
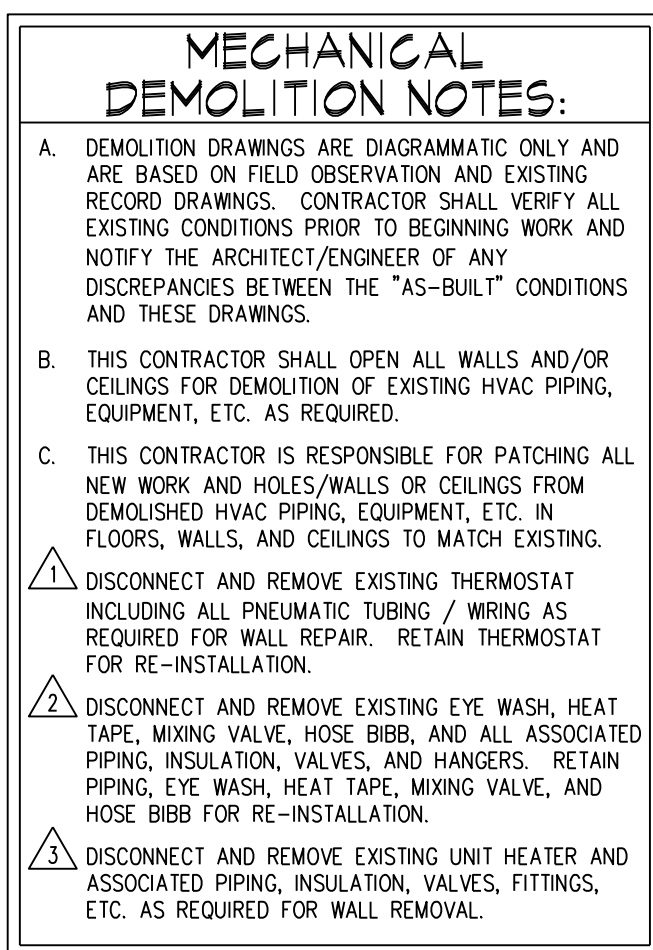
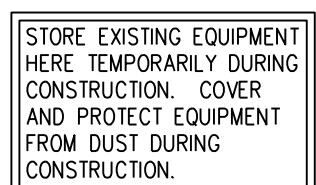


1/4"=1'-0"

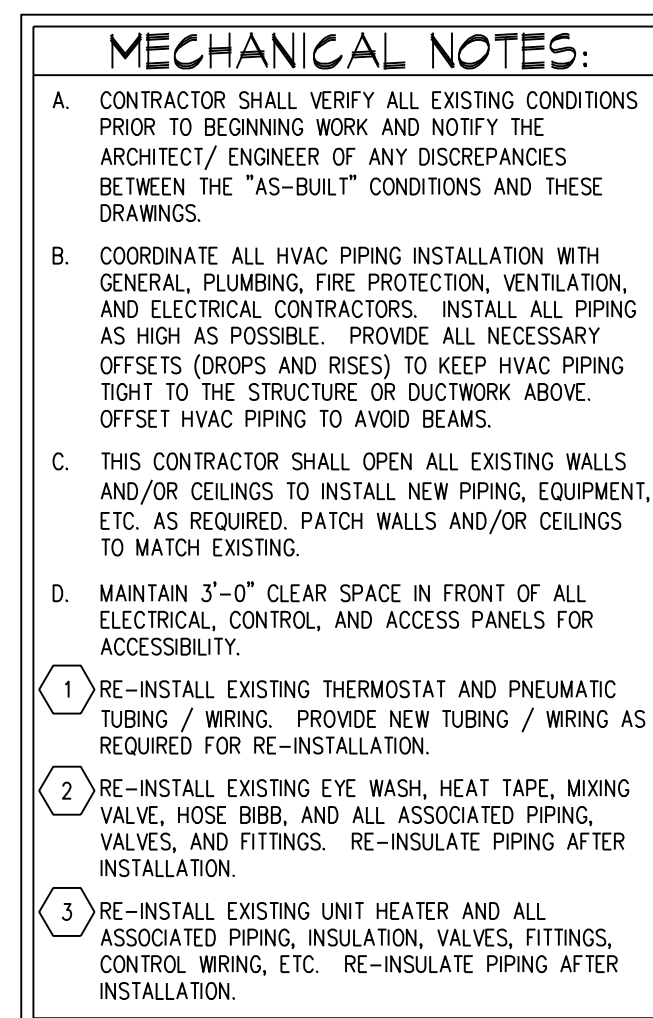

- A. DEMOLITION DRAWINGS ARE DIAGRAMMATIC ONLY AND ARE BASED ON FIELD OBSERVATION AND EXISTING CONDITIONS. CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS PRIOR TO THE BEGINNING OF ANY WORK. ARCHITECT'S INTENT/DESIGN OF ANY DISCREPANCIES BETWEEN THE AS-BUILT CONDITIONS AND THESE DRAWINGS.
- B. THIS CONTRACTOR SHALL OPEN ALL WALLS AND/OR PARTIAL DEMOLITION OF EXISTING HVAC PIPING, EQUIPMENT, ETC. AS REQUIRED.
- C. THIS CONTRACTOR IS RESPONSIBLE FOR PATCHING ALL NEW WORK AND HOLES/WALLS OR CEILINGS FROM DEMOLITION OF EXISTING WALLS, PARTIAL FLOORS, WALLS, AND CEILINGS TO MATCH EXISTING.
- D. DISCONNECT AND REMOVE EXISTING THERMOSTAT AS REQUIRED. PREPARE AND INSTALL THERMOSTAT REQUIRED FOR WALL REPAIR. RETAIN THERMOSTAT FOR RE-INSTALLATION.
- E. DISCONNECT AND REMOVE EXISTING EYE WASH, HEAT PIPING, EXISTING DRAIN, AND ALL ASSOCIATED PIPING, INSULATION, VALVES, AND HANGERS. RETAIN PIPING, INSULATION, VALVES, AND HANGERS. RETAIN PIPING, INSULATION, VALVES, AND HANGERS. RETAIN EYE WASH FOR RE-INSTALLATION.
- F. DISCONNECT AND REMOVE EXISTING UNIT VALVE AND ASSOCIATED PIPING, INSULATION, VALVES, FITTINGS, AND HANGERS. RETAIN PIPING, INSULATION, VALVES, AND HANGERS FOR RE-INSTALLATION.


$$\overline{1/4^* - 1^* - 0}$$


- | | |
|---|---|
| A | CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS BEFORE TO BEGINNING WORK AND NOTIFY THE ARCHITECT IMMEDIATELY OF ANY DISCREPANCIES BETWEEN THE "AS-BUILT" CONDITIONS AND THESE DRAWINGS. |
| B | CONTRACTOR SHALL HVAC PIPING INSTALLATION WITH GENERAL PLUMBING, FUR PROTECTION, VENTILATION, AND ELECTRICAL CONTRACTORS. INSTALL ALL PIPING AND FITTINGS IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATIONS. OFFSETS (DROPS AND RISERS) TO KEEP HVAC PIPING ABOVE THE STRUCTURE OF THE BUILDING. PATCH WALLS AND CEILING TO MATCH EXISTING. |
| C | THIS CONTRACTOR SHALL OPEN ALL EXISTING WALLS AND CEILING TO INSTALL NEW PIPING, EQUIPMENT, ETC. AND PATCH WALLS AND CEILING TO MATCH EXISTING. |
| D | MAINTAIN 3'-0" CLEAR SPACE IN FRONT OF ALL EQUIPMENT, CONTROL, AND ACCESS PANELS FOR ACCESSIBILITY. |
| E | RE-INSTALL EXISTING THERMOSTAT AND PNEUMATIC CONTROLS. PROVIDE 1'-0" CLEAR SPACE AROUND REQUIRED FOR RE-INSTALLATION. |
| F | RE-INSTALL EXISTING EYE WASH, HEAT TREAT, WASH HANDS, AND FIRST AID KIT. RE-INSTALL EXISTING VALVES, AND FITTINGS. RE-INSULATE AFTER INSTALLATION. |
| G | RE-INSTALL EXISTING UNIT HEATER AND ALL ASSOCIATED PIPING, INSULATION, VALVES, FITTINGS, CONTROL WIRING, ETC. RE-INSULATE PIPING AFTER INSTALLATION. |



Department of
Veterans Affairs