

Scope of Work
For
Flat Marker Monuments in selected Flat
Marker Sections
3/1/2017

1. The following is a statement of work for creating and delivering five Georgia gray granite monuments to Jefferson Barracks National Cemetery (JBNC) in accordance with the following specific design criteria:


A. Number of Monuments: 5

B. Material: Georgia gray granite

C. Size: 30 inches wide x 18 inches thickness x 30 inches tall (back side) x 26 inches tall (front side)

D. Specifications: Polished beveled top (to accommodate the bronze plaque mounted to each monument), steeled/smooth front and back sides, (lettering on the front side per the attachment - Flat Gravesite Markers) rocked pitched/rough sides

E. Bronze Plaque: Size 24 inches x 12 inches to accommodate a 2 inch color folded U.S. flag emblem used by the Department of Veterans Affairs with a single border. Raised lettering 1/8 inch to fit onto the 24 inch x 12 inch space and centered on the plaque.

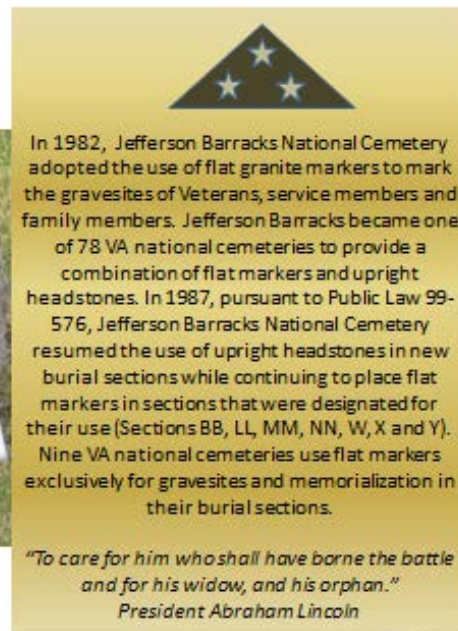

F. Cost should include delivery to JBNC and set on cemetery prepared foundation.

2. Please submit individual and total cost estimates for each monument with bronze plaque lettered according to the specifications.

