


GENERAL NOTES	CONSTRUCTION NOTES
1. GENERAL CONTRACTOR EMPLOYEES SHALL NOT ENTER SITE WITHOUT APPROPRIATE BADGES.	1. CONCRETE FOOTINGS for gate posts shall be 3,000 psi compressive strength at 28 days.
2. VEHICLE AUTHORIZATION REQUEST SHALL BE REQUIRED FOR EMPLOYEE VEHICLES ON SITE.	2. Proof roll existing subgrade prior to placement of walkway sub-base material.
3. WORKERS ARE SUBJECT TO THE RULES OF THE MEDICAL GROUP APPLICABLE TO THEIR CONDUCT.	3. Compaction: Use approved equipment well suited to the type of material being compacted.
4. CONSTRUCTION FENCING SHALL BE PROVIDED PRIOR TO THE BEGINNING OF OPERATIONS.	4. Finish elevation of subgrade for fill material shall be 4" below finish grade.
5. CONTRACTOR SHALL PRESERVE & PROTECT ALL STRUCTURES & VEGETATION ON OR ADJACENT TO THE WORK SITE.	5. Asphalt shall conform to NYS DOT Specifications, for Bituminous Pavements.
6. SUBMITTALS ARE REQUIRED FOR GATE & HARDWARE, FILL MATERIAL, SUBBASE MATERIAL, ASPHALT, TOPSOIL, SEED, FERTILIZER.	6. Water valve curb boxes within walkway shall be raised flush with finish grade.
	7. Restore & disturbed areas including topsoil, seeding, fertilizing & mulch. Topsoil shall a minimum of 4" in depth.

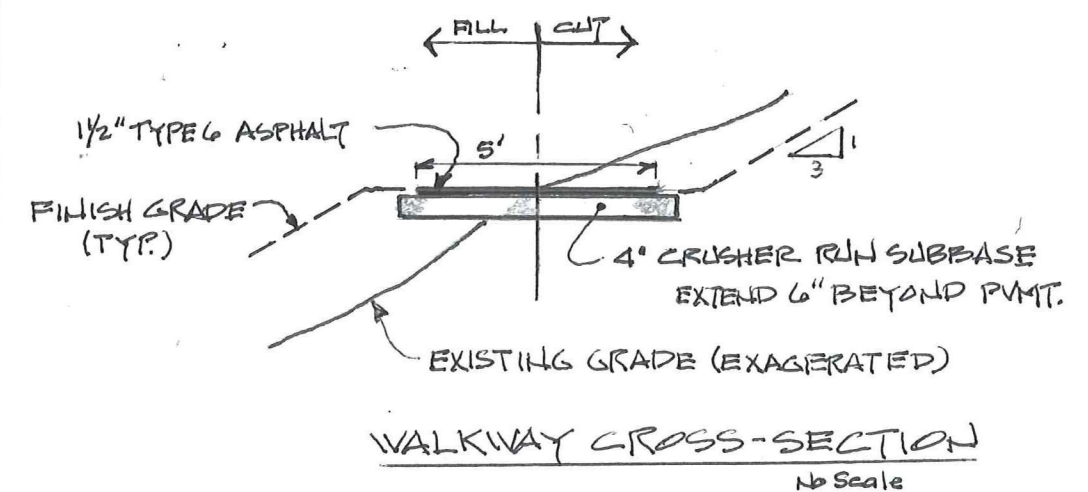

BLDG 26 GATE INSTALLATION & SITE WORK	
PROJECT NO. 528AB-12	
DRAWN BY: MSC	SCALE: NONE
DATE: APRIL 5, 2012	PKG. NO. SP-1