

# 8TH FLOOR AND DOM WOMEN'S RESTROOMS

Project No. 539-12-108

VA Medical Center



3200 Vine St.

Cincinnati, OH 45220

And


1000 North Fort Thomas Ave.

Fort Thomas, Ky 41075

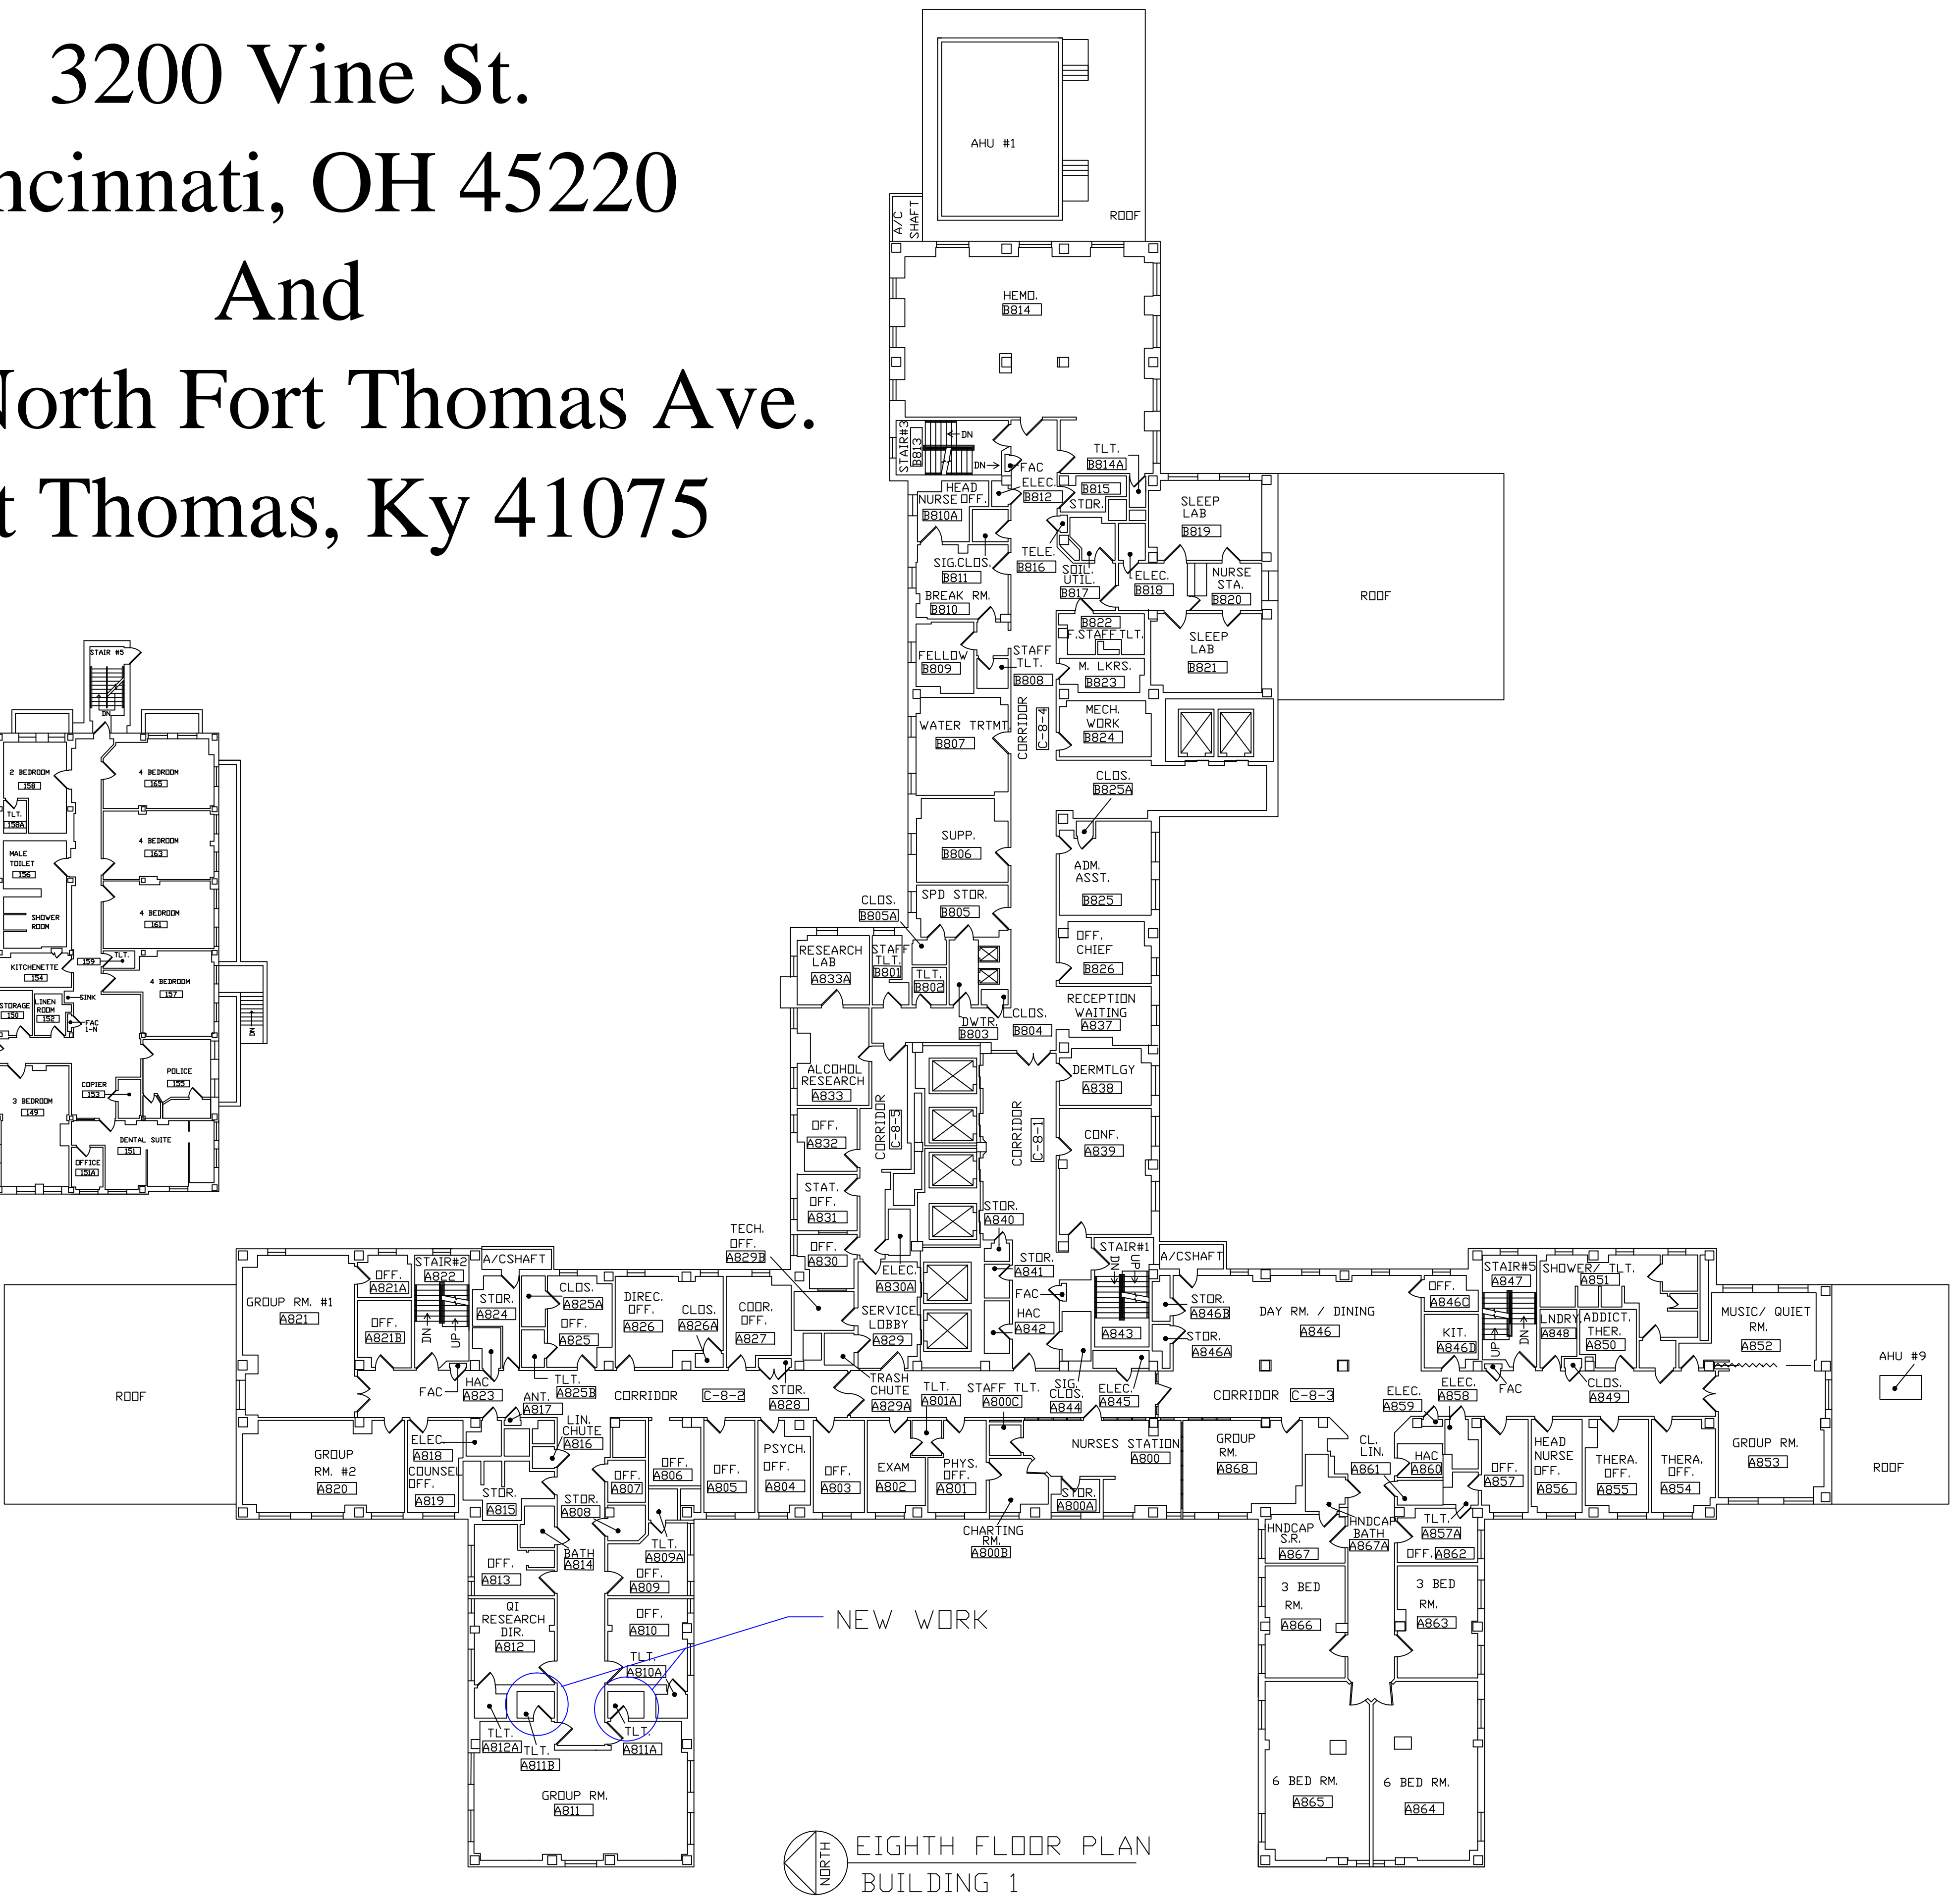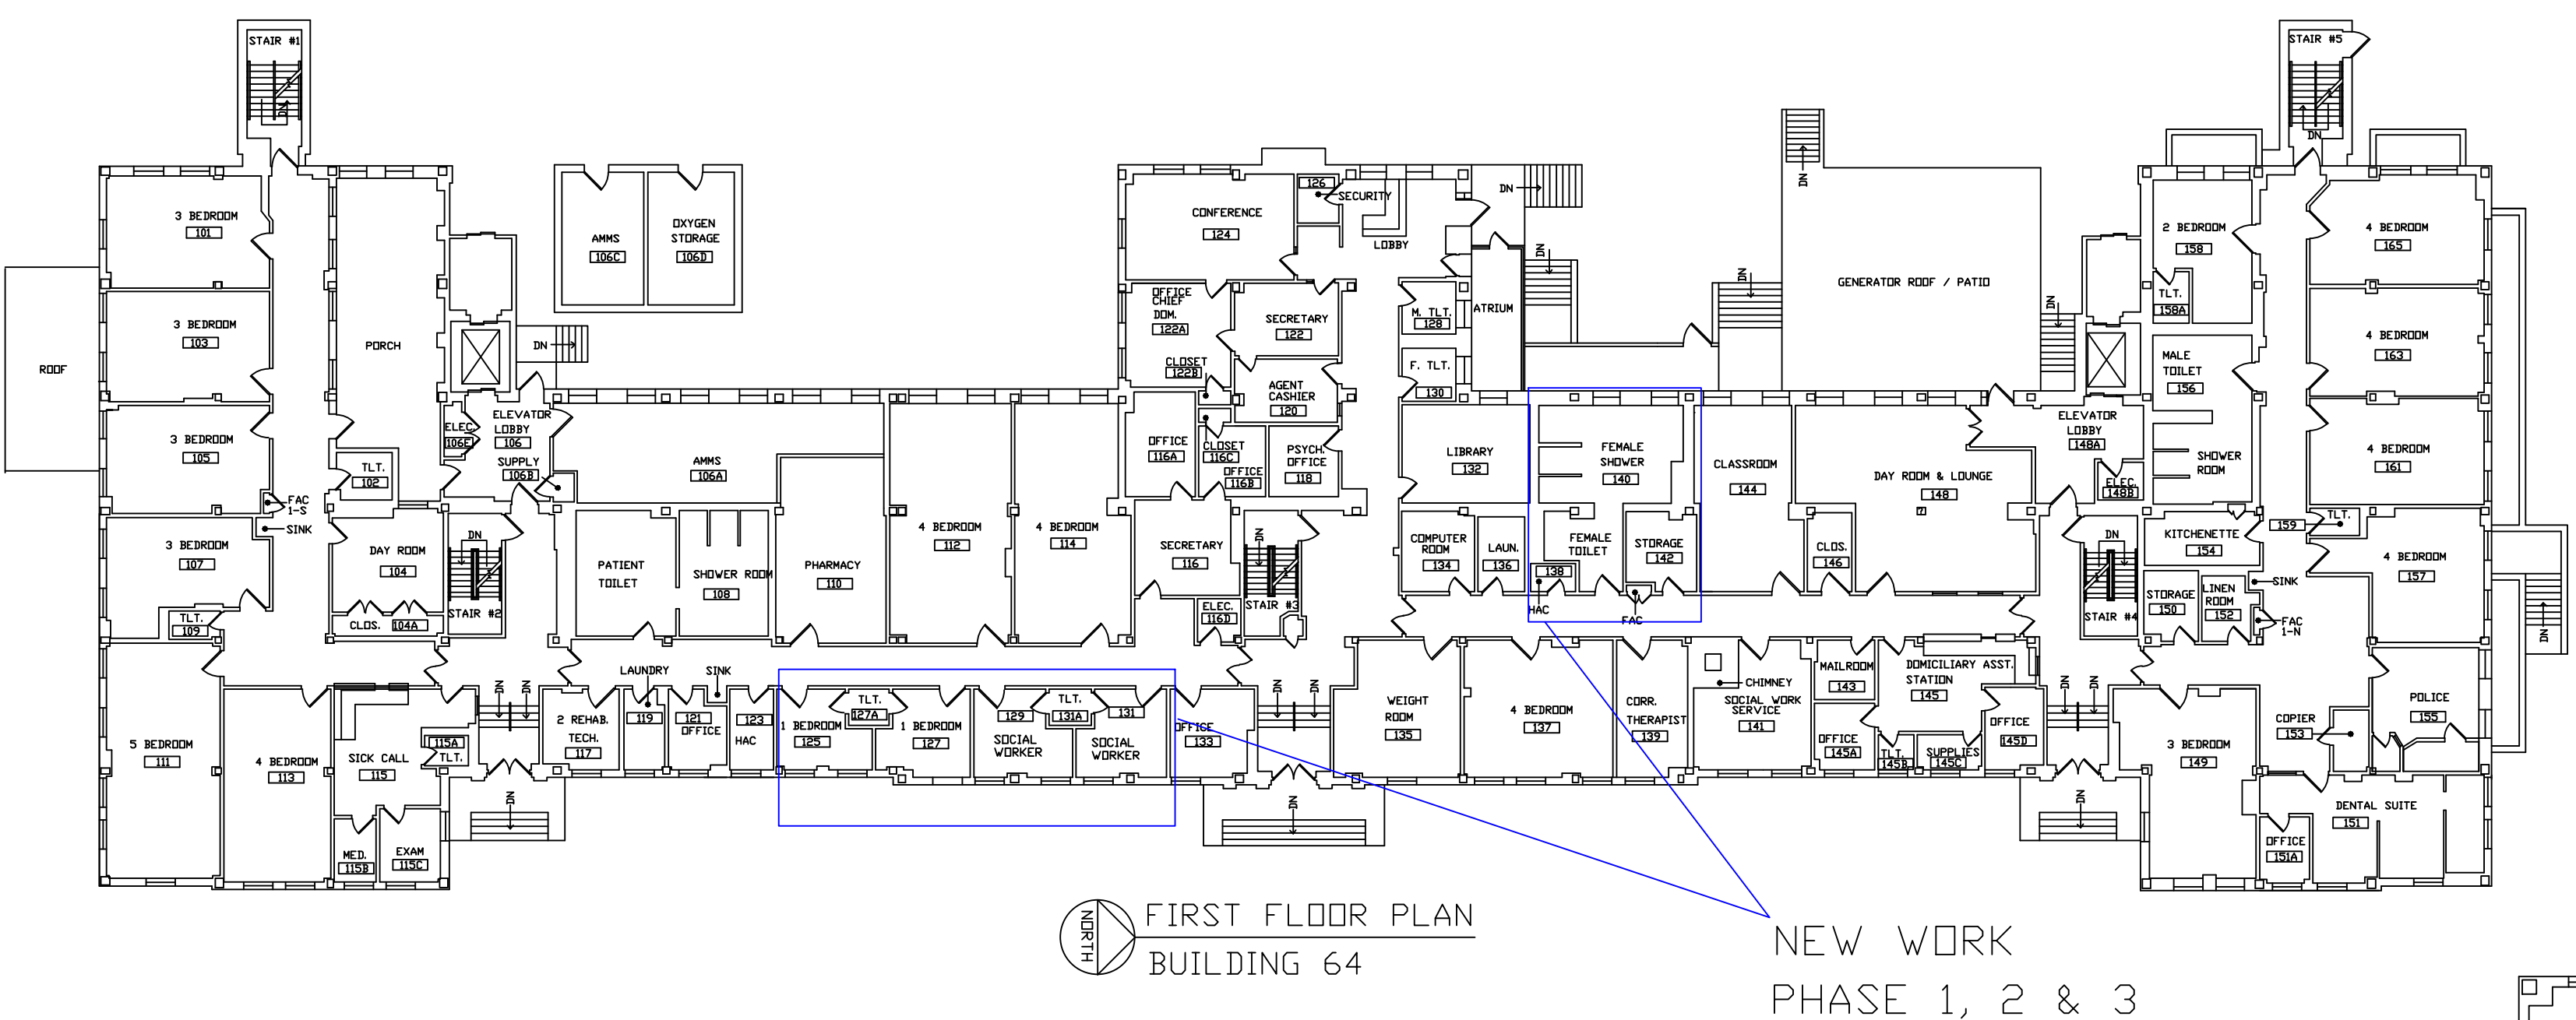


- T-1 TITLE PAGE
- D-1 DEMO A811A & A811B
- D-2 DEMO FEMALE SHOWER 140
- D-3 FEMALE BEDROOMS
- A-1 A811A FLOOR PLAN
- A-2 NEW WORK FEMALE SHOWER 140
- A-3 A811A FLOOR PLAN
- A-4 ELEVATION FEMALE SHOWER 140
- A-5 FLOOR PLAN FEMALE SHOWER 140
- A-6 FEMALE SHOWER
- A-7 FEMALE BEDROOMS
- A-8 FEMALE BEDROOMS FLOOR PLAN
- P-1 A811A & A811B PLANS
- P-2 FEMALE SHOWER ROOM 140
- P-3 FEMALE BEDROOMS
- H-1 HVAC PLAN
- E-1 ELECTRICAL PLAN


Drawing Title:	Project Title	Date	<div>VA</div> <div>Department of Veterans Affairs</div>
TITLE PAGE	8th Floor and Dom Restrooms	5/15/12	
	Building Number	Project No. 539-12-108	
TIMOTHY HOGG	001	T-1	

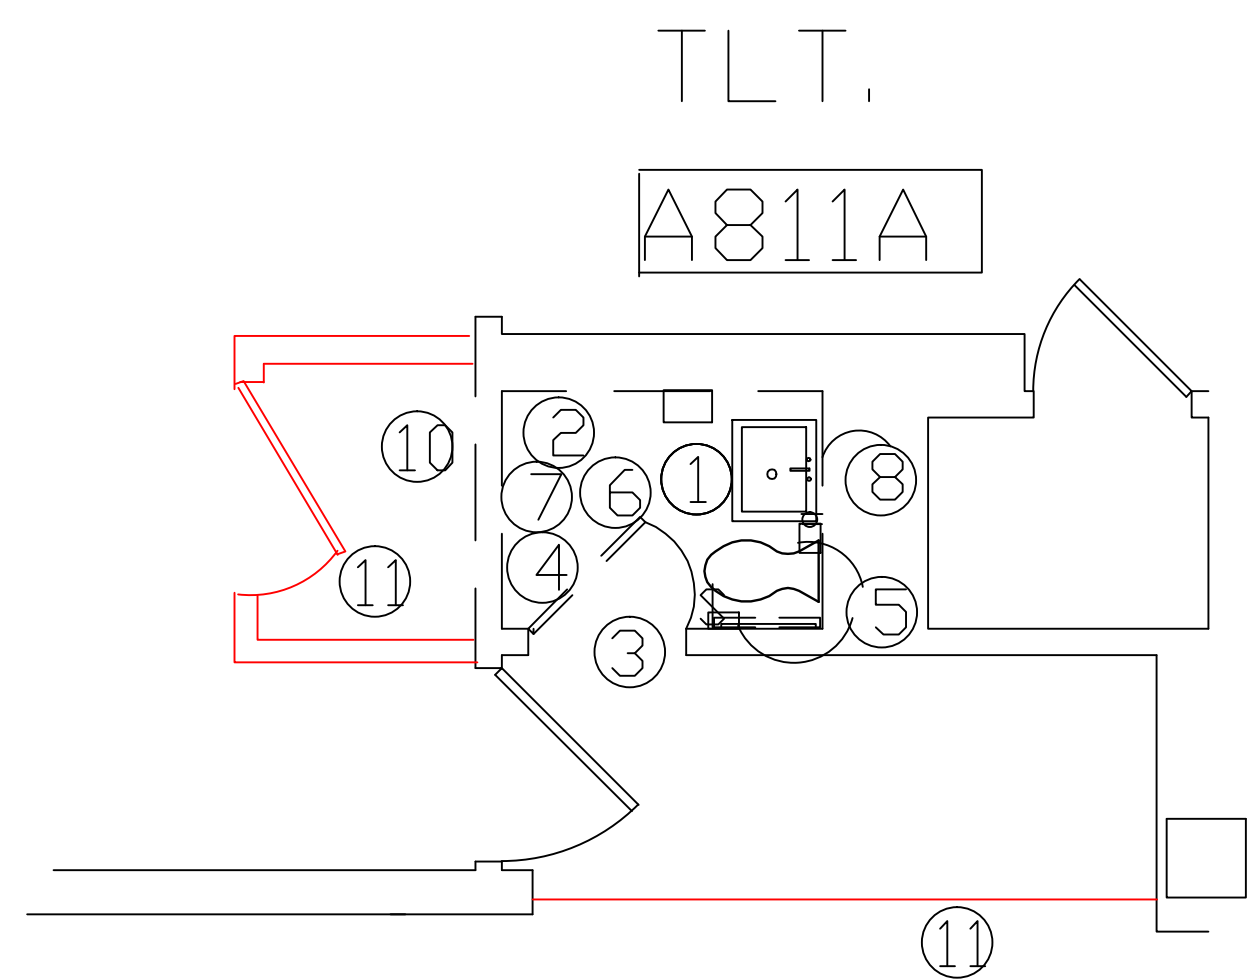


DEMO WORK

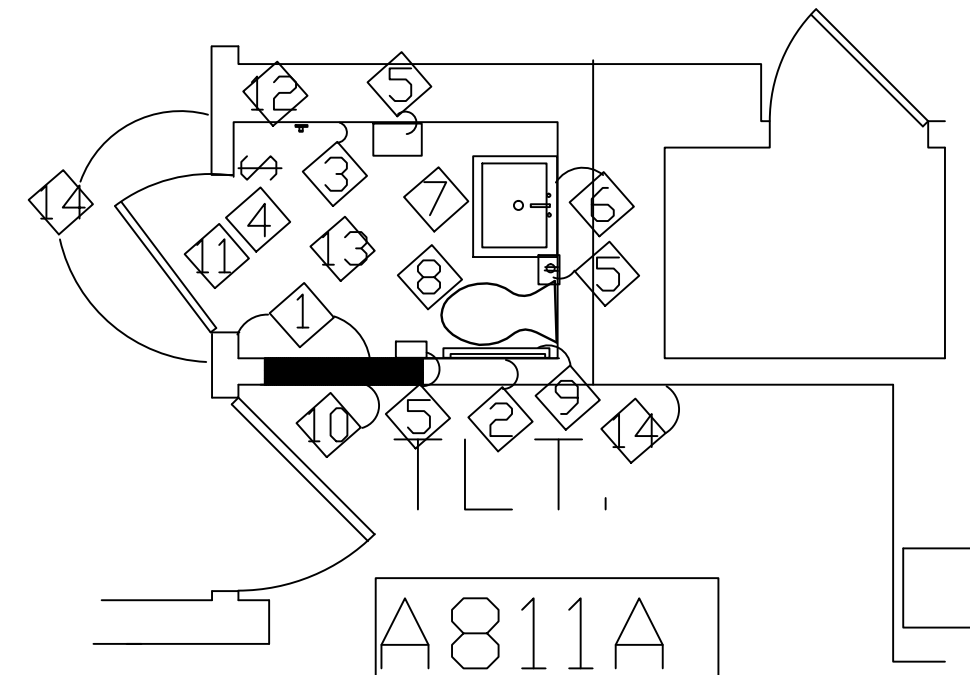

NEW WORK

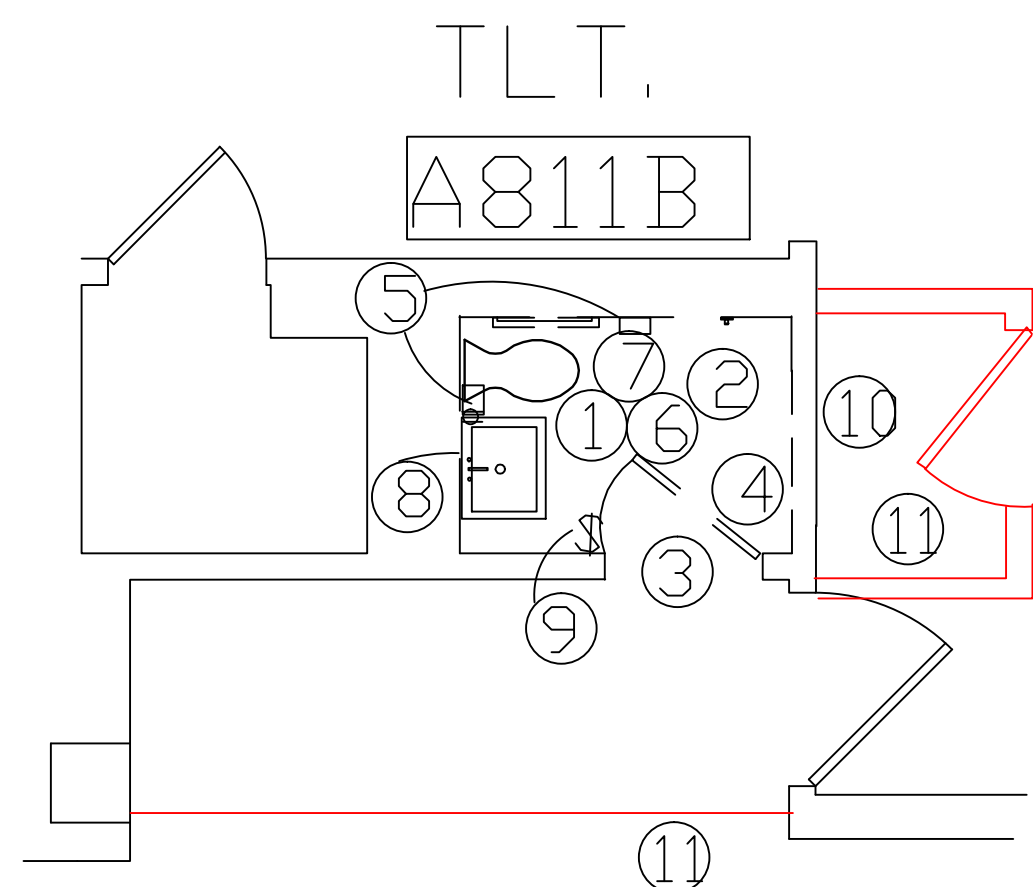

DEMO WORK

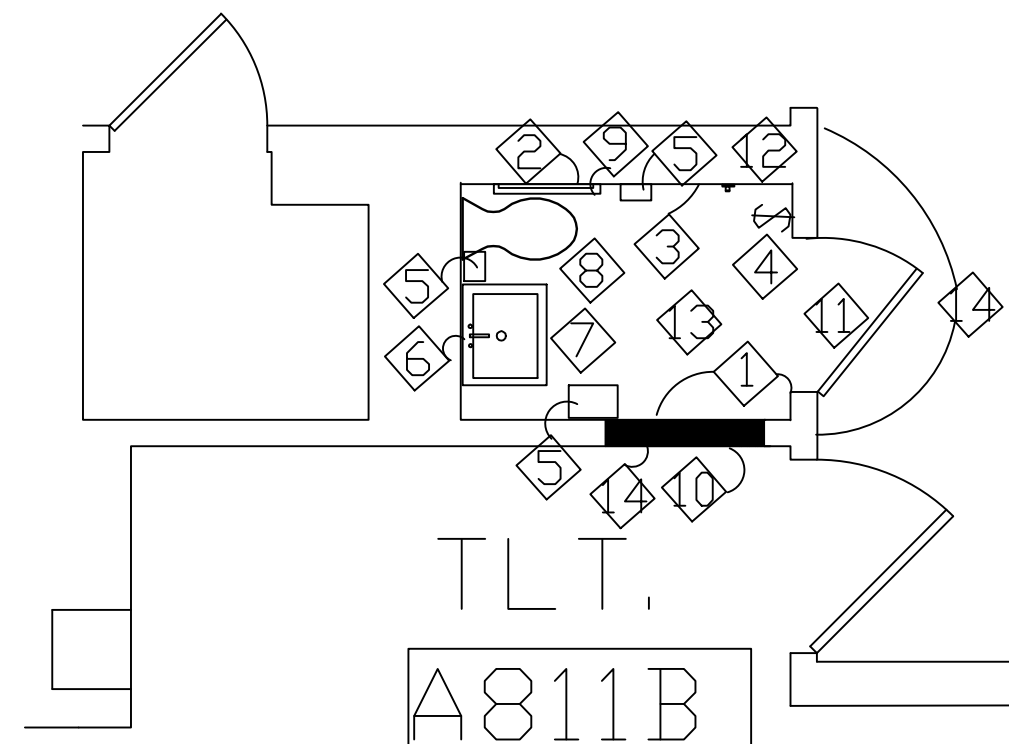

NEW WORK

GENERAL DEMOLITION NOTES:

- REFER TO MECHANICAL/ELECTRICAL DEMOLITION ITEMS. COORDINATE ALL WORK.
- CONTRACTOR RESPONSIBLE FOR FIELD VERIFYING EXISTING CONDITIONS PRIOR TO REMOVAL WORK.
- ALL AREAS TO BE DEMOLISHED OR DISTURBED ARE TO BE PATCHED TO MATCH EXISTING.
- CONTRACTOR RESPONSIBLE FOR ANY DAMAGE TO EXISTING SURFACE, EQUIPMENT, ETC. IN AREA TO REMAIN. THIS INCLUDES TRAVEL ROUTE FOR MATERIAL AND WORKMAN MOVEMENT.
- ALL REMOVAL WORK TO BE COORDINATED WITH NEW WORK TO INSURE PROPER LIMITS, SCOPE, AND DIMENSIONS.
- ADJACENT SPACES ARE OCCUPIED, DUST CONTROL, DEBRIS REMOVAL, AND PROPER MATERIAL TRANSPORT IS A MUST. NO SURFACE RUN UTILITIES PERMITTED.
- COORDINATE CHANNELING OF BLOCK WALLS FOR PLACEMENT OF NEW UTILITY LINES WITH THE APPROPRIATE MECHANICAL/ELECTRICAL WORK.
- CONTRACTOR RESPONSIBLE FOR REPAIR TO FLOORS, WALLS, ETC. UPON REMOVAL OF PLUMBING FIXTURES, MECHANICAL EQUIPMENT, WALLS, ETC.
- THE G.C. SHALL COORDINATE PHASING OF BOTH DEMOLITION AND NEW CONSTRUCTION WITH VAMC. PROVIDE DUST CONTROL & FIRE RATED PLASTIC AT CORRIDOR SIDE WORK.
- REMOVE MASONRY WALLS AND/OR GYPSUM BOARD AND STUDS (Verify in Field) AS INDICATED BY DASHED LINES ON DEMOLITION PLAN. REPAIR DAMAGE TO WALL SURFACES AT ADJACENT AREAS WHERE AFFECTED BY DEMOLITION AND PREPARE TO RECEIVE NEW FINISHES, NOTIFY VA COTR ASAP IF OBSTRUCTION EXISTS WHICH MAY NOT ALLOW FULL DEMOLITION AS SHOWN.

DEMO NOTES: ○

- REMOVE PLUMBING FIXTURES FROM RESTROOM.
- DEMO ALL WALLS BACK TO METAL STUDS.
- DEMO DOOR AND DOOR FRAME
- DEMO THE EXISTING FLOOR.
- DEMO PAPER TOWEL AND SOAP DISPENSER
- DEMO LIGHTING.
- DEMO CEILINGS.
- DEMO MIRROR
- DEMO LIGHT SWITCH
- DEMO COVE BASE
- INSTALL TEMPORARY BARRIER DURING CONSTRUCTION.


NEW CONSTRUCTION ◇


- INSTALL CONCRETE BOARD TO TILE HEIGHT AND ⅝" GREEN BOARD ABOVE ALL WALLS.
- INSTALL BACKING FOR HANDRAIL
- INSTALL TILE AS PER WALL PATTERN DETAIL PF-1.
- RELOCATE LIGHT SWITCH
- INSTALL SOAP, TOWEL DISPENSER AND TOILET PAPER DISPENSER PER ELEVATION DRAWING.
- INSTALL MIRROR AS PER ELEVATION DRAWING
- INSTALL LAVATORY SINK WITH ADA PLUMBING SHROUD AS PER SPECIFICATIONS.
- INSTALL ELONGATED TOILET BOWL
- INSTALL GRAB BAR AS PER SPECIFICATIONS
- DRYWALL AND FINISH TO MATCH EXISTING
- INSTALL NEW BIRCH VENEER DOOR; SOLID CORE; ROTARY CUT "RA100"1⅜" THICK; ⅝" MAXIMUM UNDER CUT. METAL FRAME WITH HOSPITAL STOPS. WITH CORBIN RUSSWIN LOCKSET ML2030XUS26D; BURNS ARMOR PLATE 36"HX2" LDW CLEAR PLASTIC; ROCK WOOD DOOR EDGING 301 AND 302B X 36"XUS32D (FOR RECESSED INSTALLATION)
- INSTALL COAT HOOK PER ELEVATION DRAWING.
- ACOUSTIC CEILING BY ARMSTRONG "CLEAN ROOM VL" #868 WHITE 2' X 2' TILE
- PAINT CORNER TO CORNER MATCHING EXISTING AND INSTALL COVE BASE TO MATCH EXISTING.

GENERAL LEGEND:

- DOUBLE DUPLEX RECEPTACLE
- DATA TELECOMMUNICATION
- SINGLE POLE LIGHT SWITCH
- 2' X 4' LIGHT
- EXISTING WALL
- DEMO WALL
- NEW WALL

EIGHTH FLOOR PLAN  
SCALE: 1/4" = 1'

Drawing Title:  DEMO A811A & A811B	Project Title  8 NORTH AND DOM WOMEN'S RESTROOMS	Date  5/15/12	 <i>Department of Veterans Affairs</i>
		Project No.  539-12-108	
	Building Number  001	D-1	

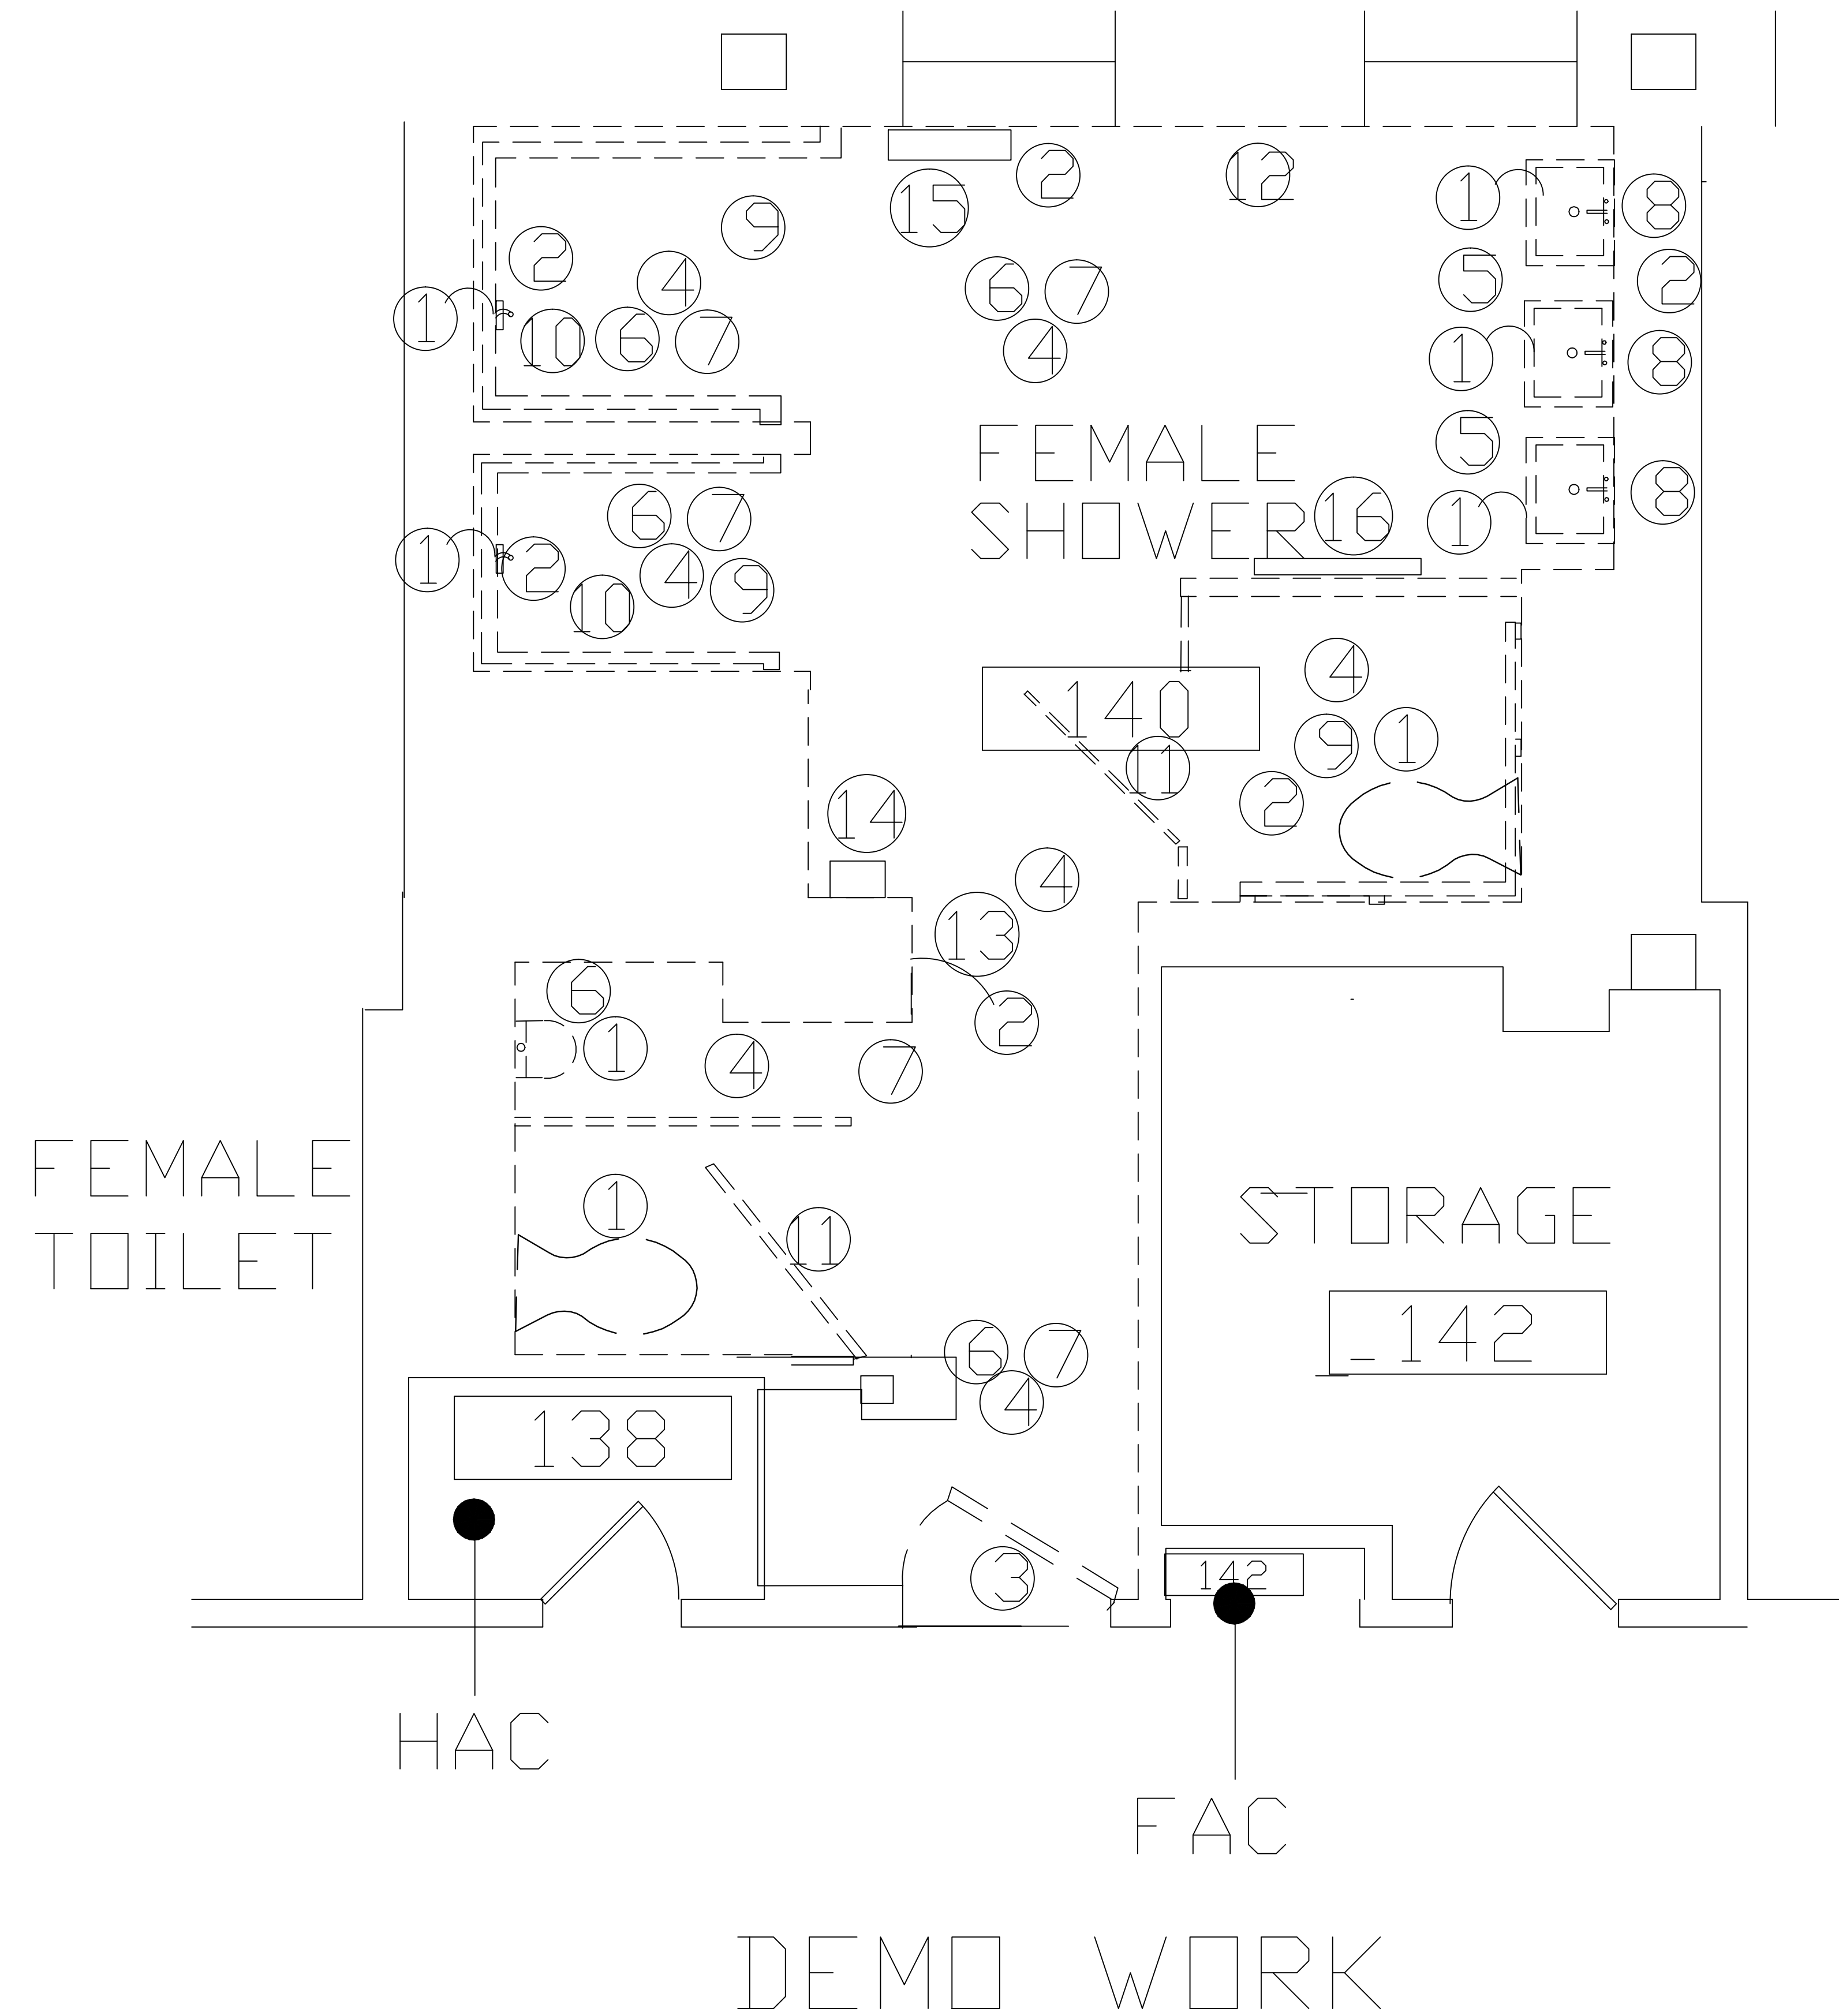

SCALE: 1/2" = 1'-0"


GENERAL DEMOLITION NOTES:

- REFER TO MECHANICAL/ELECTRICAL DEMOLITION ITEMS. COORDINATE ALL WORK.
- CONTRACTOR RESPONSIBLE FOR FIELD VERIFYING EXISTING CONDITIONS PRIOR TO REMOVAL WORK.
- ALL AREAS TO BE DEMOLISHED OR DISTURBED ARE TO BE PATCHED TO MATCH EXISTING.
- CONTRACTOR RESPONSIBLE FOR ANY DAMAGE TO EXISTING SURFACE, EQUIPMENT, ETC. IN AREA TO REMAIN. THIS INCLUDES TRAVEL ROUTE FOR MATERIAL AND WORKMAN MOVEMENT.
- ALL REMOVAL WORK TO BE COORDINATED WITH NEW WORK TO INSURE PROPER LIMITS, SCOPE, AND DIMENSIONS.
- ADJACENT SPACES ARE OCCUPIED, DUST CONTROL, DEBRIS REMOVAL, AND PROPER MATERIAL TRANSPORT IS A MUST. NO SURFACE RUN UTILITIES PERMITTED.
- COORDINATE CHANNELING OF BLOCK WALLS FOR PLACEMENT OF NEW UTILITY LINES WITH THE APPROPRIATE MECHANICAL/ELECTRICAL WORK.
- CONTRACTOR RESPONSIBLE FOR REPAIR TO FLOORS, WALLS, ETC. UPON REMOVAL OF PLUMBING FIXTURES, MECHANICAL EQUIPMENT, WALLS, ETC.
- THE G.C. SHALL COORDINATE PHASING OF BOTH DEMOLITION AND NEW CONSTRUCTION WITH VAMC. PROVIDE DUST CONTROL & FIRE RATED PLASTIC AT CORRIDOR SIDE WORK.
- REMOVE MASONRY WALLS AND/OR GYPSUM BOARD AND STUDS (Verify in Field) AS INDICATED BY DASHED LINES ON DEMOLITION PLAN. REPAIR DAMAGE TO WALL SURFACES AT ADJACENT AREAS WHERE AFFECTED BY DEMOLITION AND PREPARE TO RECEIVE NEW FINISHES, NOTIFY VA CDR ASAP IF OBSTRUCTION EXISTS WHICH MAY NOT ALLOW FULL DEMOLITION AS SHOWN.


DEMO NOTES: ○

- REMOVE PLUMBING FIXTURES FROM RESTROOM.
- DEMO ALL WALLS BACK TO METAL STUDS.
- DEMO DOOR AND DOOR FRAME
- DEMO THE CERAMIC TILE FLOOR.
- DEMO PAPER TOWEL AND SOAP DISPENSER
- DEMO LIGHTING.
- DEMO CEILINGS.
- DEMO MIRROR
- DEMO GRAB BARS (SAVE FOR REUSE)
- DEMO SHOWER VALVES
- DEMO TOILET PARTITIONS.
- REMOVE BENCH FROM WALL AND SAVE.
- DEMO TRASH RECEPTACLE
- REMOVE WOMEN'S HYGIENE DISPENSER (SAVE FOR REINSTALLATION).
- REMOVE CONVECTOR UNIT COVER (SAVE FOR REINSTALLATION).
- REMOVE BABY CHANGING TABLE. (SAVE FOR REINSTALLATION).

Drawing Title: DEMO FEMALE SHOWER 140	Project Title 8th FLOOR AND DOM WOMEN'S RESTROOMS	Date 5/15/12	<div>VA</div> <div>Department of Veterans Affairs</div>
		Project No. 539-12-108	
	Building Number 064	D-2	

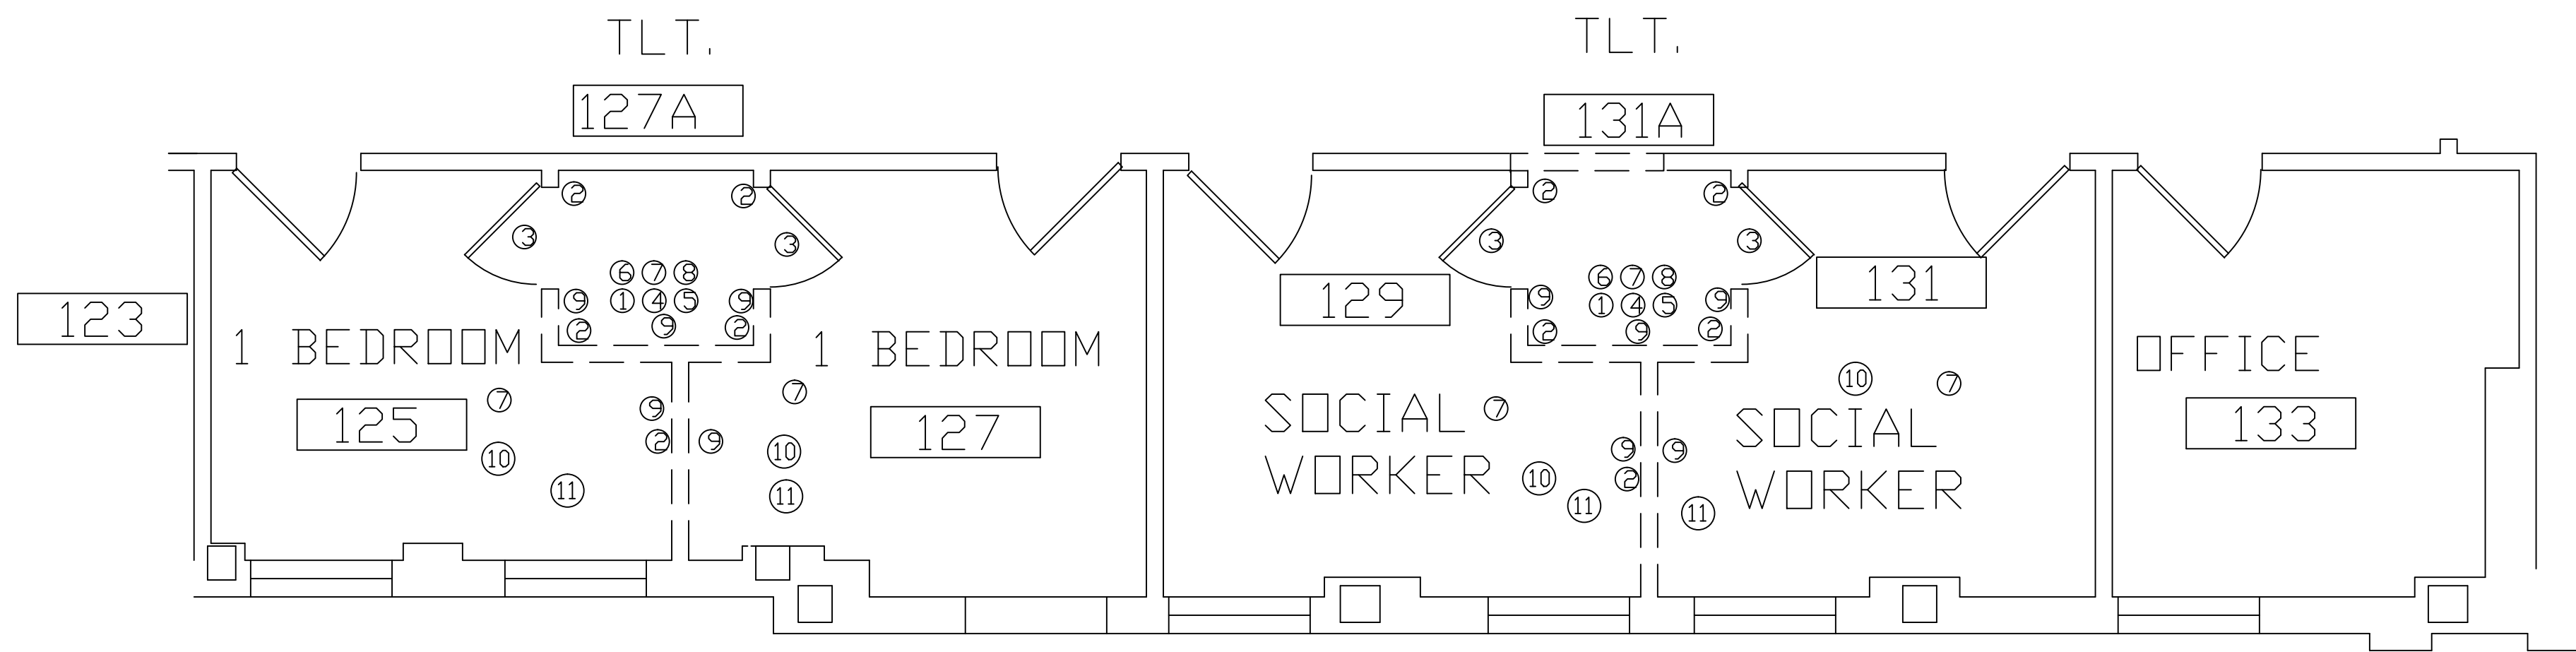

BEDROOMS DEMOLITION PLAN

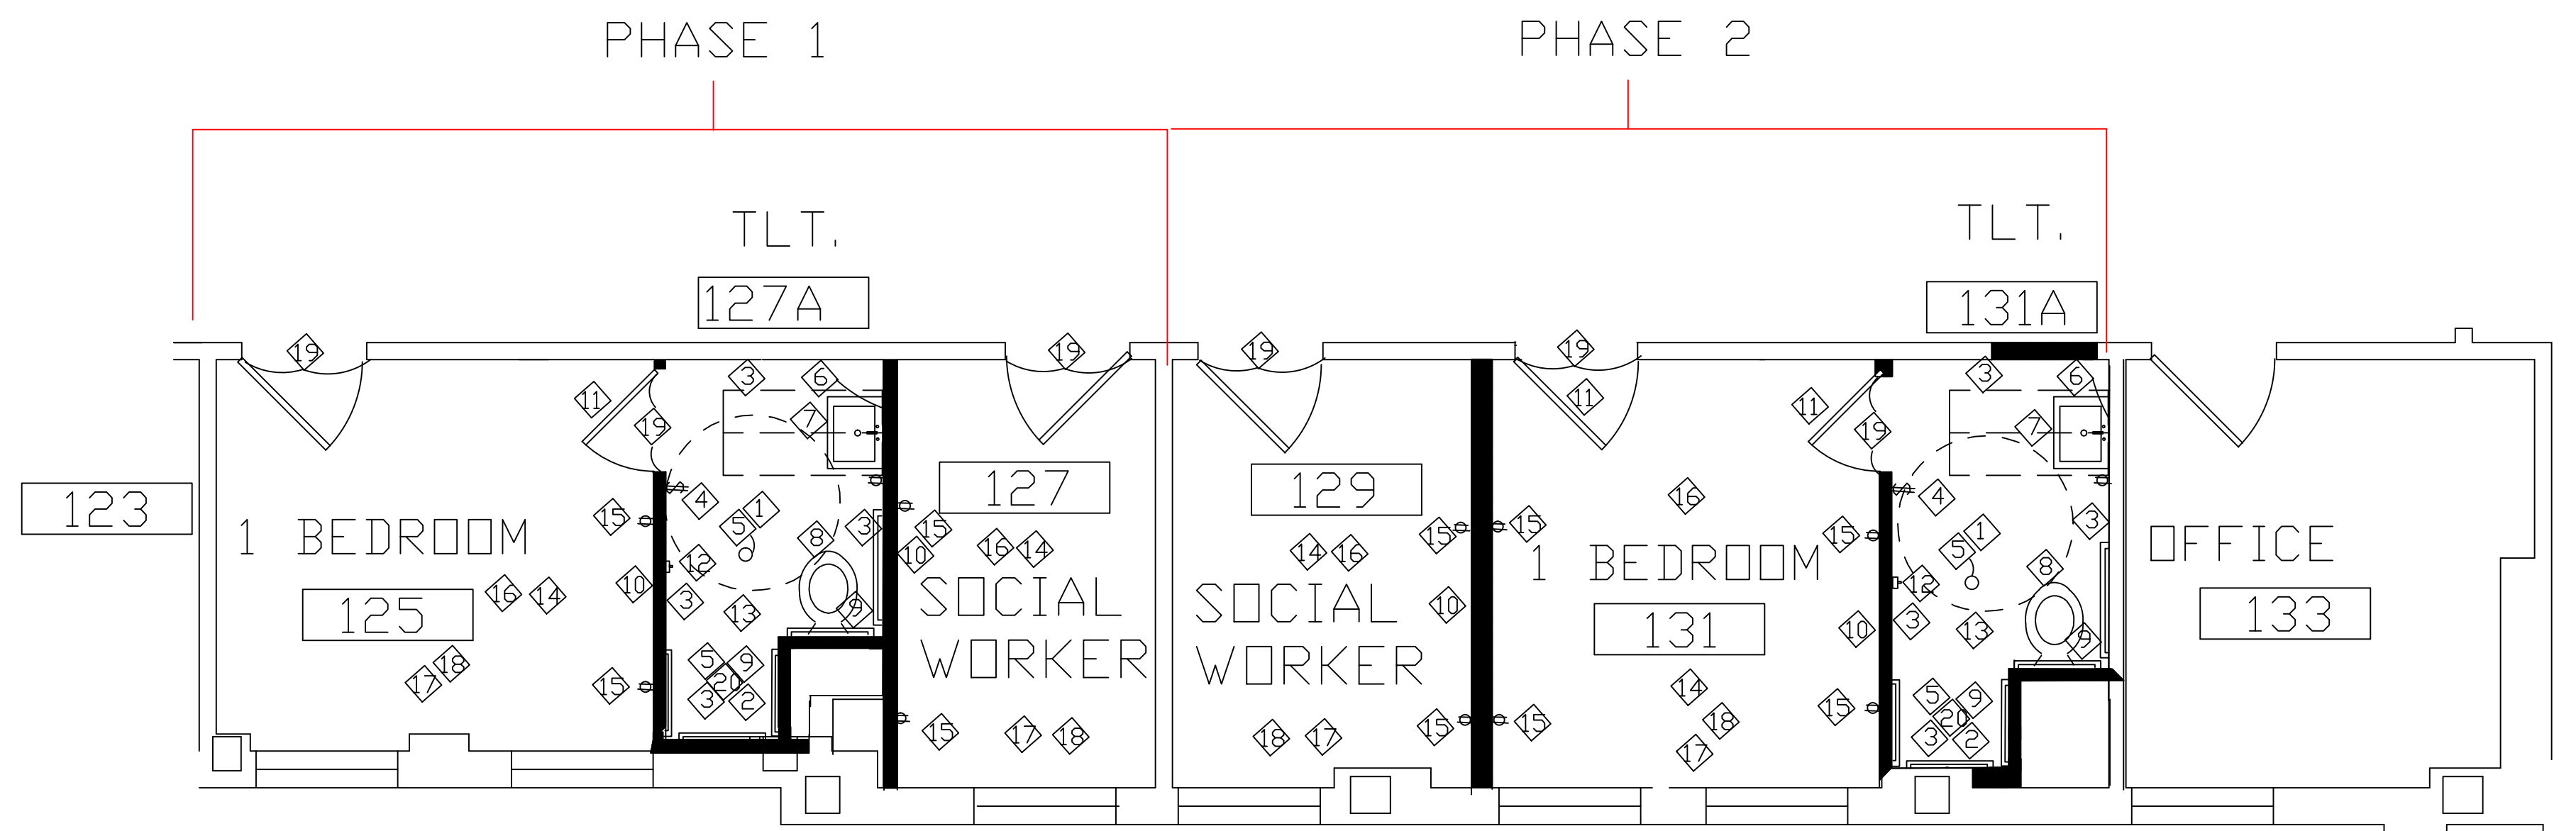

BEDROOMS NEW WORK PLAN

SCALE: 1/4" = 1'

GENERAL LEGEND:

- DOUBLE DUPLEX RECEPTACLE
- DATA TELECOMMUNICATION
- SINGLE POLE LIGHT SWITCH
- 2' X 4' LIGHT
- EXISTING WALL
- DEMO WALL
- NEW WALL

GENERAL DEMOLITION NOTES:

- REFER TO MECHANICAL/ELECTRICAL DEMOLITION ITEMS. COORDINATE ALL WORK.
- CONTRACTOR RESPONSIBLE FOR FIELD VERIFYING EXISTING CONDITIONS PRIOR TO REMOVAL WORK.
- ALL AREAS TO BE DEMOLISHED OR DISTURBED ARE TO BE PATCHED TO MATCH EXISTING.
- CONTRACTOR RESPONSIBLE FOR ANY DAMAGE TO EXISTING SURFACE, EQUIPMENT, ETC. IN AREA TO REMAIN. THIS INCLUDES TRAVEL ROUTE FOR MATERIAL AND WORKMAN MOVEMENT.
- ALL REMOVAL WORK TO BE COORDINATED WITH NEW WORK TO INSURE PROPER LIMITS, SCOPE, AND DIMENSIONS.
- ADJACENT SPACES ARE OCCUPIED, DUST CONTROL, DEBRIS REMOVAL, AND PROPER MATERIAL TRANSPORT IS A MUST. NO SURFACE RUN UTILITIES PERMITTED.
- COORDINATE CHANNELING OF BLOCK WALLS FOR PLACEMENT OF NEW UTILITY LINES WITH THE APPROPRIATE MECHANICAL/ELECTRICAL WORK.
- CONTRACTOR RESPONSIBLE FOR REPAIR TO FLOORS, WALLS, ETC. UPON REMOVAL OF PLUMBING FIXTURES, MECHANICAL EQUIPMENT, WALLS, ETC.
- THE G.C. SHALL COORDINATE PHASING OF BOTH DEMOLITION AND NEW CONSTRUCTION WITH VAMC. PROVIDE DUST CONTROL & FIRE RATED PLASTIC AT CORRIDOR SIDE WORK.
- REMOVE MASONRY WALLS AND/OR GYPSUM BOARD AND STUDS (Verify in Field) AS INDICATED BY DASHED LINES ON DEMOLITION PLAN. REPAIR DAMAGE TO WALL SURFACES AT ADJACENT AREAS WHERE AFFECTED BY DEMOLITION AND PREPARE TO RECEIVE NEW FINISHES, NOTIFY VA COTR ASAP IF OBSTRUCTION EXISTS WHICH MAY NOT ALLOW FULL DEMOLITION AS SHOWN.

DEMO NOTES:

- REMOVE PLUMBING FIXTURES FROM RESTROOM.
- DEMO WALL.
- DEMO DOOR AND DOOR FRAME
- DEMO THE CERAMIC TILE FLOOR.
- DEMO PAPER TOWEL AND SOAP DISPENSER
- DEMO LIGHTING.
- DEMO CEILINGS.
- DEMO MIRROR
- DEMO ELECTRIC IN WALL.
- DEMO VCT FLOORING. (THIS MASTIC DOES CONTAIN ASBESTOS AND WILL REQUIRE ABATEMENT).
- DEMO COVE BASE


NEW CONSTRUCTION

- INSTALL CONCRETE BOARD TO TILE HEIGHT AND 3/8" GREEN BOARD ABOVE ALL WALLS.
- INSTALL BACKING FOR HANDRAIL
- INSTALL TILE AS PER WALL PATTERN DETAIL PF-1.
- RELOCATE LIGHT SWITCH
- INSTALL FLOOR DRAIN
- INSTALL MIRROR AS PER ELEVATION DRAWING
- INSTALL LAVATORY SINK WITH ADA PLUMBING SHROUD AS PER SPECIFICATIONS.
- INSTALL ELONGATED TOILET BOWL
- INSTALL GRAB BAR AS PER SPECIFICATIONS
- DRYWALL AND FINISH TO MATCH EXISTING
- INSTALL NEW BIRCH VENEER DOOR; SOLID CORE; ROTARY CUT "RA100"; 1 3/4" THICK; 1/2" MAXIMUM UNDER CUT. METAL FRAME WITH HOSPITAL STOPS. WITH CORBIN RUSSWIN LOCKSET ML2030XUS26D; BURNS ARMOR PLATE 36"H X 2' LDW CLEAR PLASTIC; ROCK WOOD DOOR EDGING 301 AND 302B X 36"XUS32D (FOR RECESSED INSTALLATION)
- INSTALL COAT HOOK PER ELEVATION DRAWING.
- ACOUSTIC CEILING BY ARMSTRONG "CLEAN ROOM VL" #868 WHITE 2' X 2' TILE
- PAINT ROOM 6 2/27 WATER CHESTNUT COLOR.
- INSTALL DUPLEX RECEPTACLE ATF 18".
- INSTALL ACOUSTICAL CEILING BY ARMSTRONG, CORTEGA MINABOARD #770 NON-DIRECTIONAL; 2'X2'X3/8"; WHITE GRID.
- BASE - JOHNNSITE; RUBBER 6" "BEIGE #49".
- INSTALL NEW VCT FLOORING - ARMSTRONG EXCELON IMPERIAL TEXTURE; 3/8" ALTERNATING PATTERN. 51811 ANTIQUE WHITE
- TRIM TO BE PAINTED 5 5/51 MUSHROOM CAP
- SHOWER FLOOR TO SLOPE AS TO PROVIDE WHEEL CHAIR ACCESS WITH ADEQUATE DRAINAGE.

Drawing Title:  FEMALE BEDROOMS	Project Title  8TH FLOOR AND DOM WOMEN'S RESTROOMS	Date 5/15/12	<div>VA</div> <div>Department of Veterans Affairs</div>
		Project No. 539-12-108	
	Building Number  064	D-3	


Note: "Brand name or equal" products listed on this drawing are products used with-in our facilities. These listed products are for reference only. Product description are set forth in the specifications to included the salient physical, functional, or other characteristics of the referenced products that are essential to the minimum needs of the Government.

TOILET ROOM ACCESSORIES LEGEND				
ITEM #	ITEM	PRODUCT #	MOUNTING HEIGHT	REMARKS
A	GRAB BAR 36"	B-6806 X 36	33" A.F.F TO CENTERLINE	SATIN FINISH
B	GRAB BAR 42"	B-6806 X 42	33" A.F.F TO CENTERLINE	SATIN FINISH
C	TOILET TISSUE DISP. (SURFACE MOUNT)	By owner	26 3/4" A.F.F. TO TOP	PROVIDED BY OWNER
D	SAN. NAP DISPENSOR (SURFACE MOUNT)	B270	25" TO 30" A.F.F. TO TOP	
E	MIRROR 24X36	B-1652436	39" A.F.F. TO BOTTOM OF MIRROR	
F	SOAP DISPENSER	By owner	LEVER AT 44" A.F.F.	PROVIDED BY OWNER
G	PAPER TOWEL DISPENSER	By owner	48" A.F.F. TO BOTTOM UNIT	PROVIDED BY OWNER
H	COAT HOOK	B-2116	40" A.F.F. TO CENTER LINE	

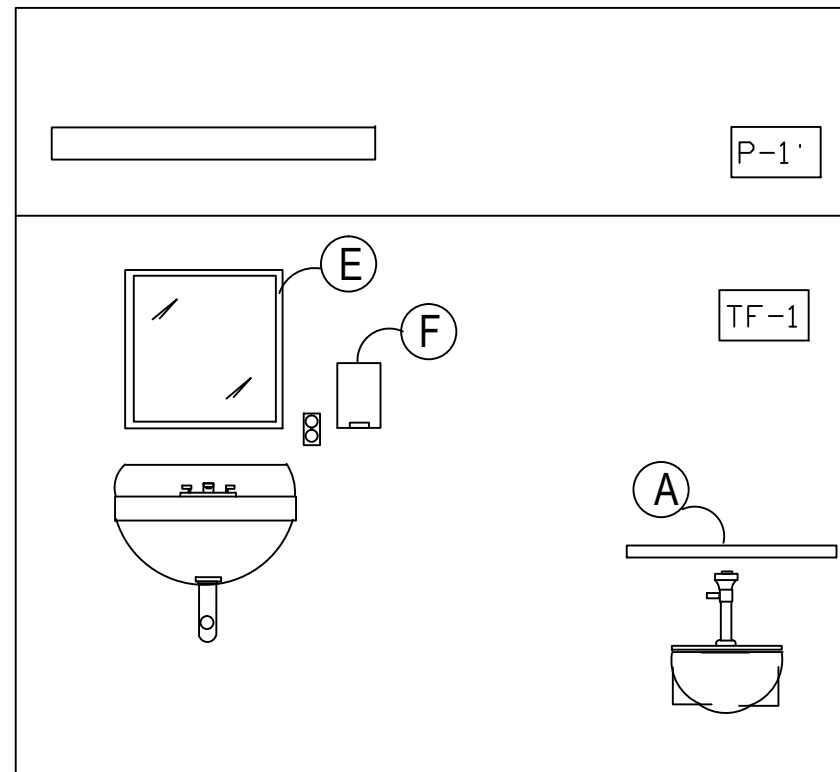

Restroom-A811A


OPPOSITE HAND FOR ROOM A811B

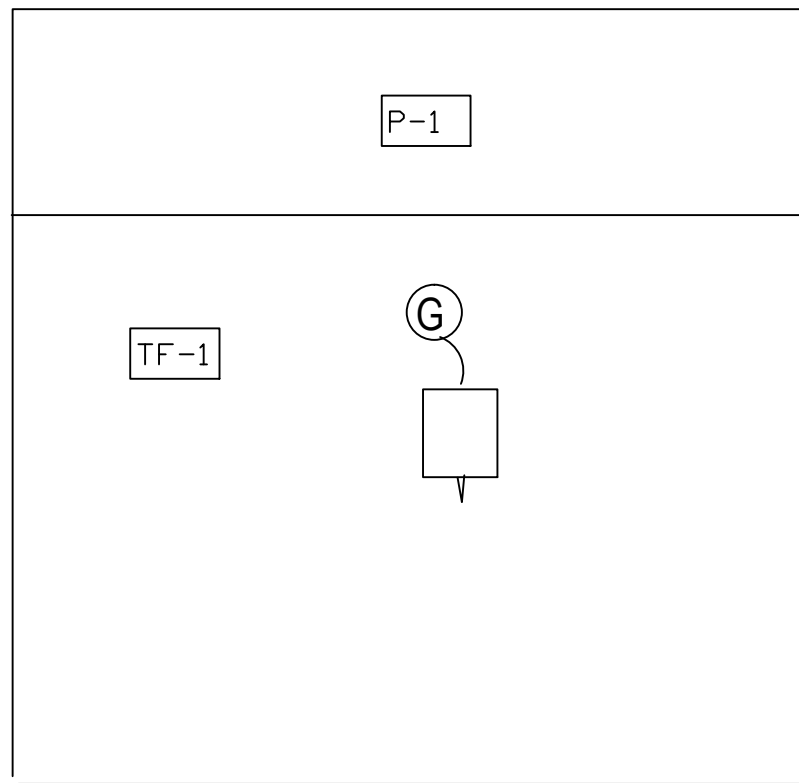


Restroom-A811A

OPPOSITE HAND FOR ROOM A811B

ACCESSIBLE PUBLIC TOILETS - FINISH LEGEND				
ABBREV.	FINISH TYPE	MANUFACTURER	PRODUCT / COLOR	DESCRIPTION
FLOOR FINISHES				
PB-1	PORCELAIN TILE BASE	CROSSVILLE	"NOW" 7837 1061208 AMBER 6"x12"	
PP-2	PORCELAIN TILE	CROSSVILLE	"NOW" 5086 AMBER 6"x18"	
PP-3	PORCELAIN TILE	CROSSVILLE	"NOW" 4575 AMBER 18"x18"	
PP-4	PORCELAIN TILE	CROSSVILLE	"NOW" 8227 AMBER 12"x24"	
PP-5	PORCELAIN TILE	CROSSVILLE	"NOW" 5019 AMBER 6"x24"	
WALL FINISHES				
PP-5	PORCELAIN TILE	CROSSVILLE	"NOW" 5019 AMBER 6"x24"	
PP-6	PORCELAIN TILE	CROSSVILLE	"NOW" 6863 AMBER 3"x12"	
PP-7	PORCELAIN TILE	CROSSVILLE	"NOW" 5A37 AMBER 3"x18" BULLNOSE	
TF-1	PORCELAIN TILE	CROSSVILLE	PATTERN	LAYOUT PATTERN
R-1	PAINT	ICI PAINTS	301YV 62127 WATER CHESTNUT	EGGSHELL (GLOSS LEVEL 3)
R-2	PAINT	ICI PAINTS	201YV 65151 MUSHROOM CAP	SEM GLOSS ON DOOR FRAMES (GLOSS LEVEL 5)
R-3	PAINT	ICI PAINTS	CEILING WHITE	FLAT ON CEILINGS (GLOSS LEVEL 1)
MISCELLANEOUS FINISHES				
ACT-1	ACOUSTIC CEILING TILE	ARMSTRONG	"CLEAN ROOM VL" #688 WHITE 2' X 2' TILE	
G-1	GROUT	STARQUARTZ	"QUARTZ-LOCK 2" 260 HAYSTACK	USE W/ ALL TILE

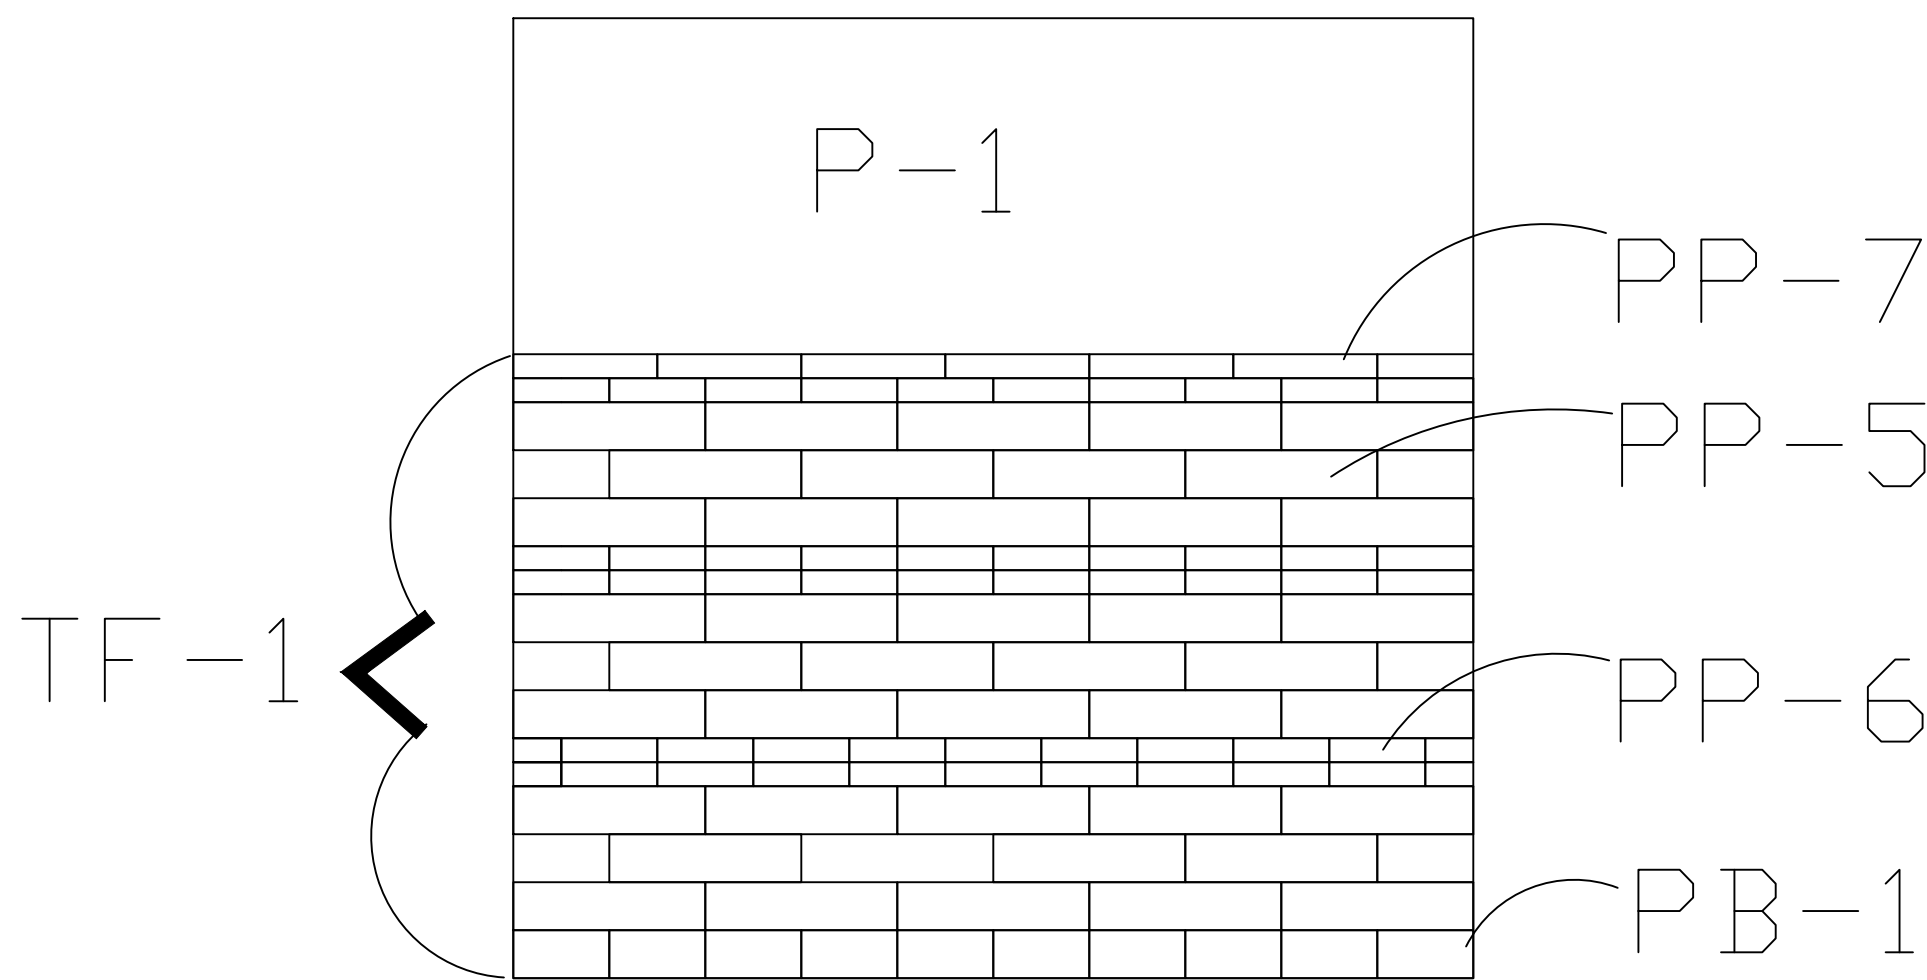


WALL PATTERN

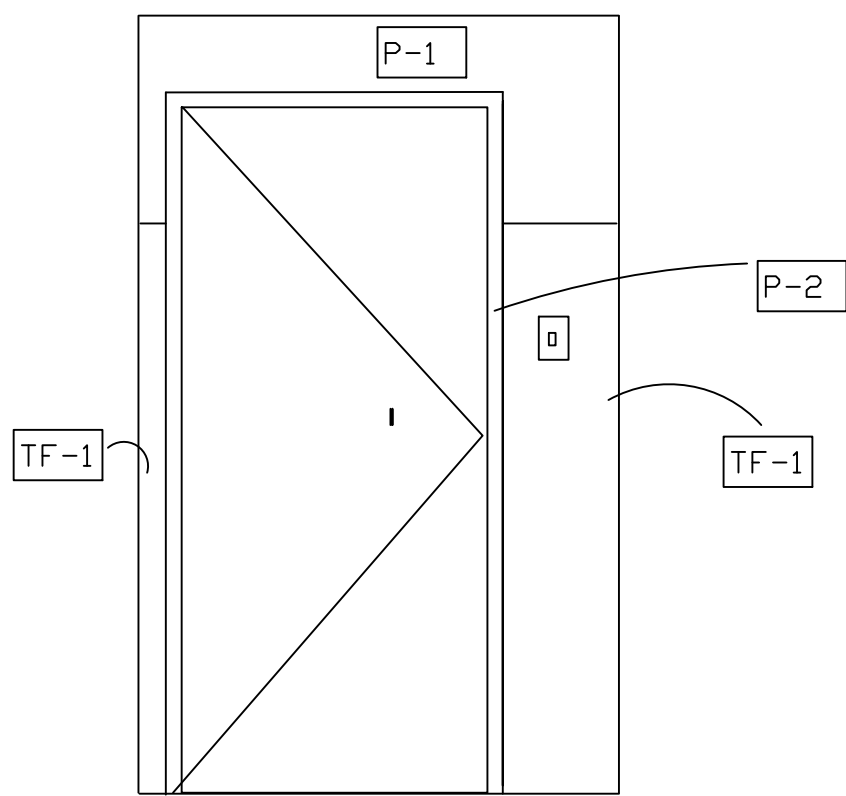


Restroom-A811A

OPPOSITE HAND FOR ROOM A811B

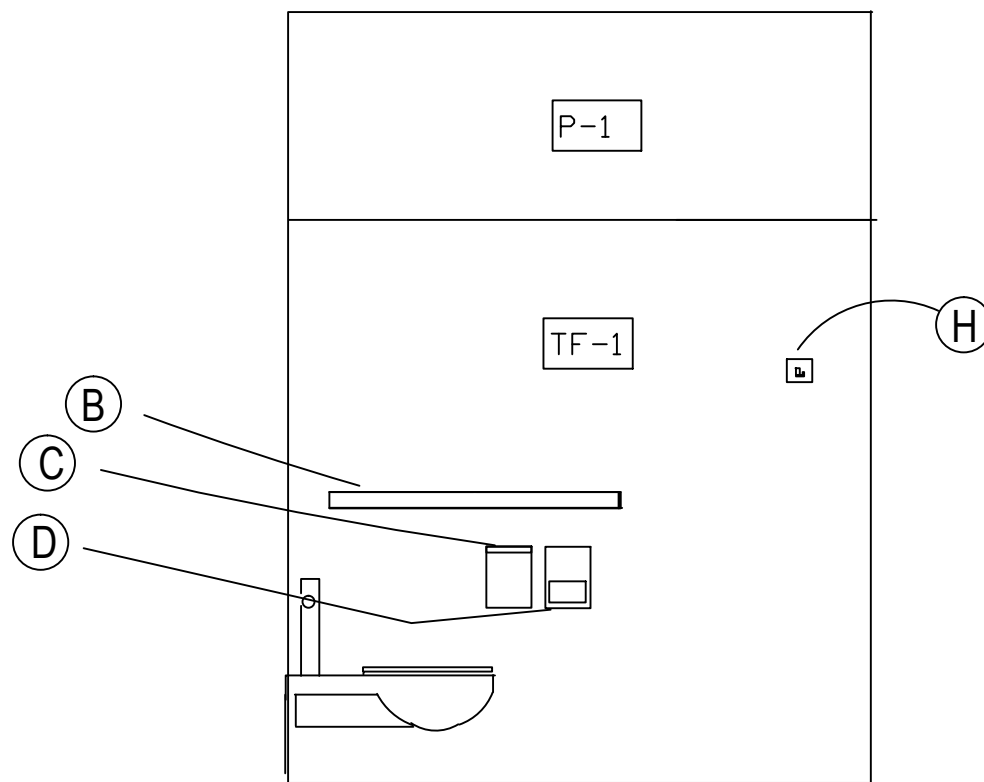

Restroom-A811A

OPPOSITE HAND FOR ROOM A811B



EIGHTH FLOOR PLAN

SCALE: 1/2" = 1'-0"

Drawing Title: A811A FLOOR PLAN	Project Title: 8TH FLOOR AND DOM WOMEN'S RESTROOMS	Date: 5/15/12	
		Project No. 539-12-108	
	Building Number: 001	A-1	

FEMALE  
SHOWER

140

FEMALE  
TOILET

138

HAC

FAC

STORAGE

142








NEW WORK (PHASE 3)


SCALE: 1/2" = 1'-0"

NEW CONSTRUCTION NOTES:


- 1.) INSTALL NEW BIRCH VENEER DOOR; SOLID CORE; ROTARY CUT "RA100", 1 3/4" THICK; 5/8" MAXIM UNDER CUT; METAL FRAME WITH HOSPITAL STOPS, WITH CORBIN RUSSWIN LOCKSET ML2030XUS26D; BURNS ARMOR PLATE 42"Hx2' LbW CLEAR PLASTIC; ROCK WOOD DOOR EDGING 301 AND 302B X 36"XUS32D (FOR RECESSED INSTALLATION)
- 2.) Toilet portions are to be solid color reinforced composite (SCRC) from "BOBRICK" SC02- Desert Beige 3/4" thick. Mounting brackets are to be full length of the panels.
- 3.) Reinstall existing stainless grab bars.
- 4.) Install new walls metal studs.
- 5.) Install soap dispenser.
- 6.) Install paper towel dispenser.
- 7.) Install GFI receptacle.
- 8.) Provide and install acoustical tile ceiling.
- 9.) Install toilet paper dispenser.
- 10.) Provide and install 18 ga. sheetmetal blocking for anchoring toilet partitions and other wall mounted items. Any wood blocking shall be f.r. treated.
- 11.) Walls to be ceramic tile.
- 12.) Floor to be ceramic tile.
- 13.) Provide and install new 48" stainless grab bars.
- 14.) Install bench paint steel P-1.
- 15.) Install four coat hooks.
- 16.) Install woman's hygiene dispenser.
- 17.) Paint convector cover P-1.
- 18.) Reinstall changing table.
- 19.) Over the sink light two 36" light fixtures.

GENERAL LEGEND:

-  DOUBLE DUPLEX RECEPTACLE
-  DATA TELECOMMUNICATION
-  SINGLE POLE LIGHT SWITCH
-  2' X 4' LIGHT
-  EXISTING WALL
-  DEMO WALL
-  NEW WALL


Drawing Title: NEW WORK FEMALE SHOWER 140	Project Title 8TH FLOOR AND DOM WOMEN'S RESTROOMS	Date 5/15/12	 Department of Veterans Affairs
		Project No. 539-12-108	
	Building Number 064	A-2	

Note: "Brand name or equal" products listed on this drawing are products used with-in our facilities. These listed products are for reference only. Product description are set forth in the specifications to included the salient physical, functional, or other characteristics of the referenced products that are essential to the minimum needs of the Government.

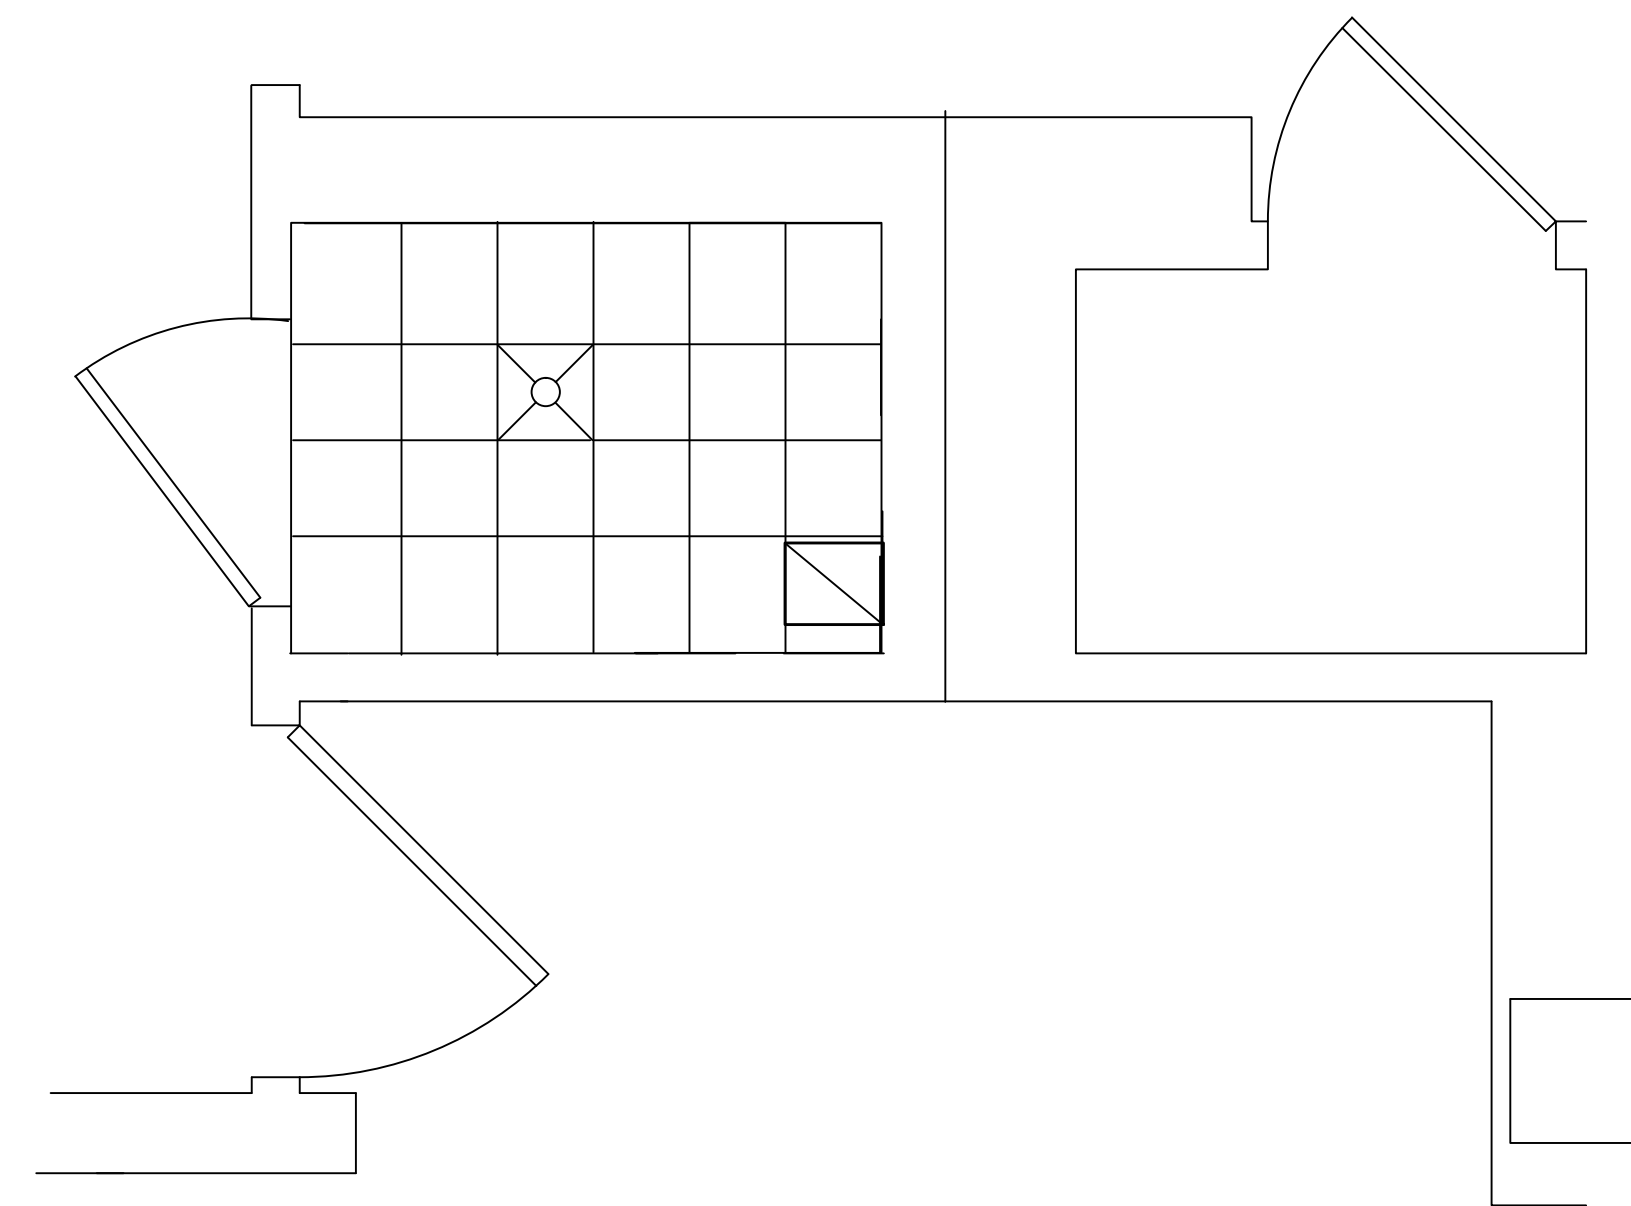

Restroom-A811A

REFLECTED CEILING PLAN  
OPPOSITE HAND FOR ROOM A811B

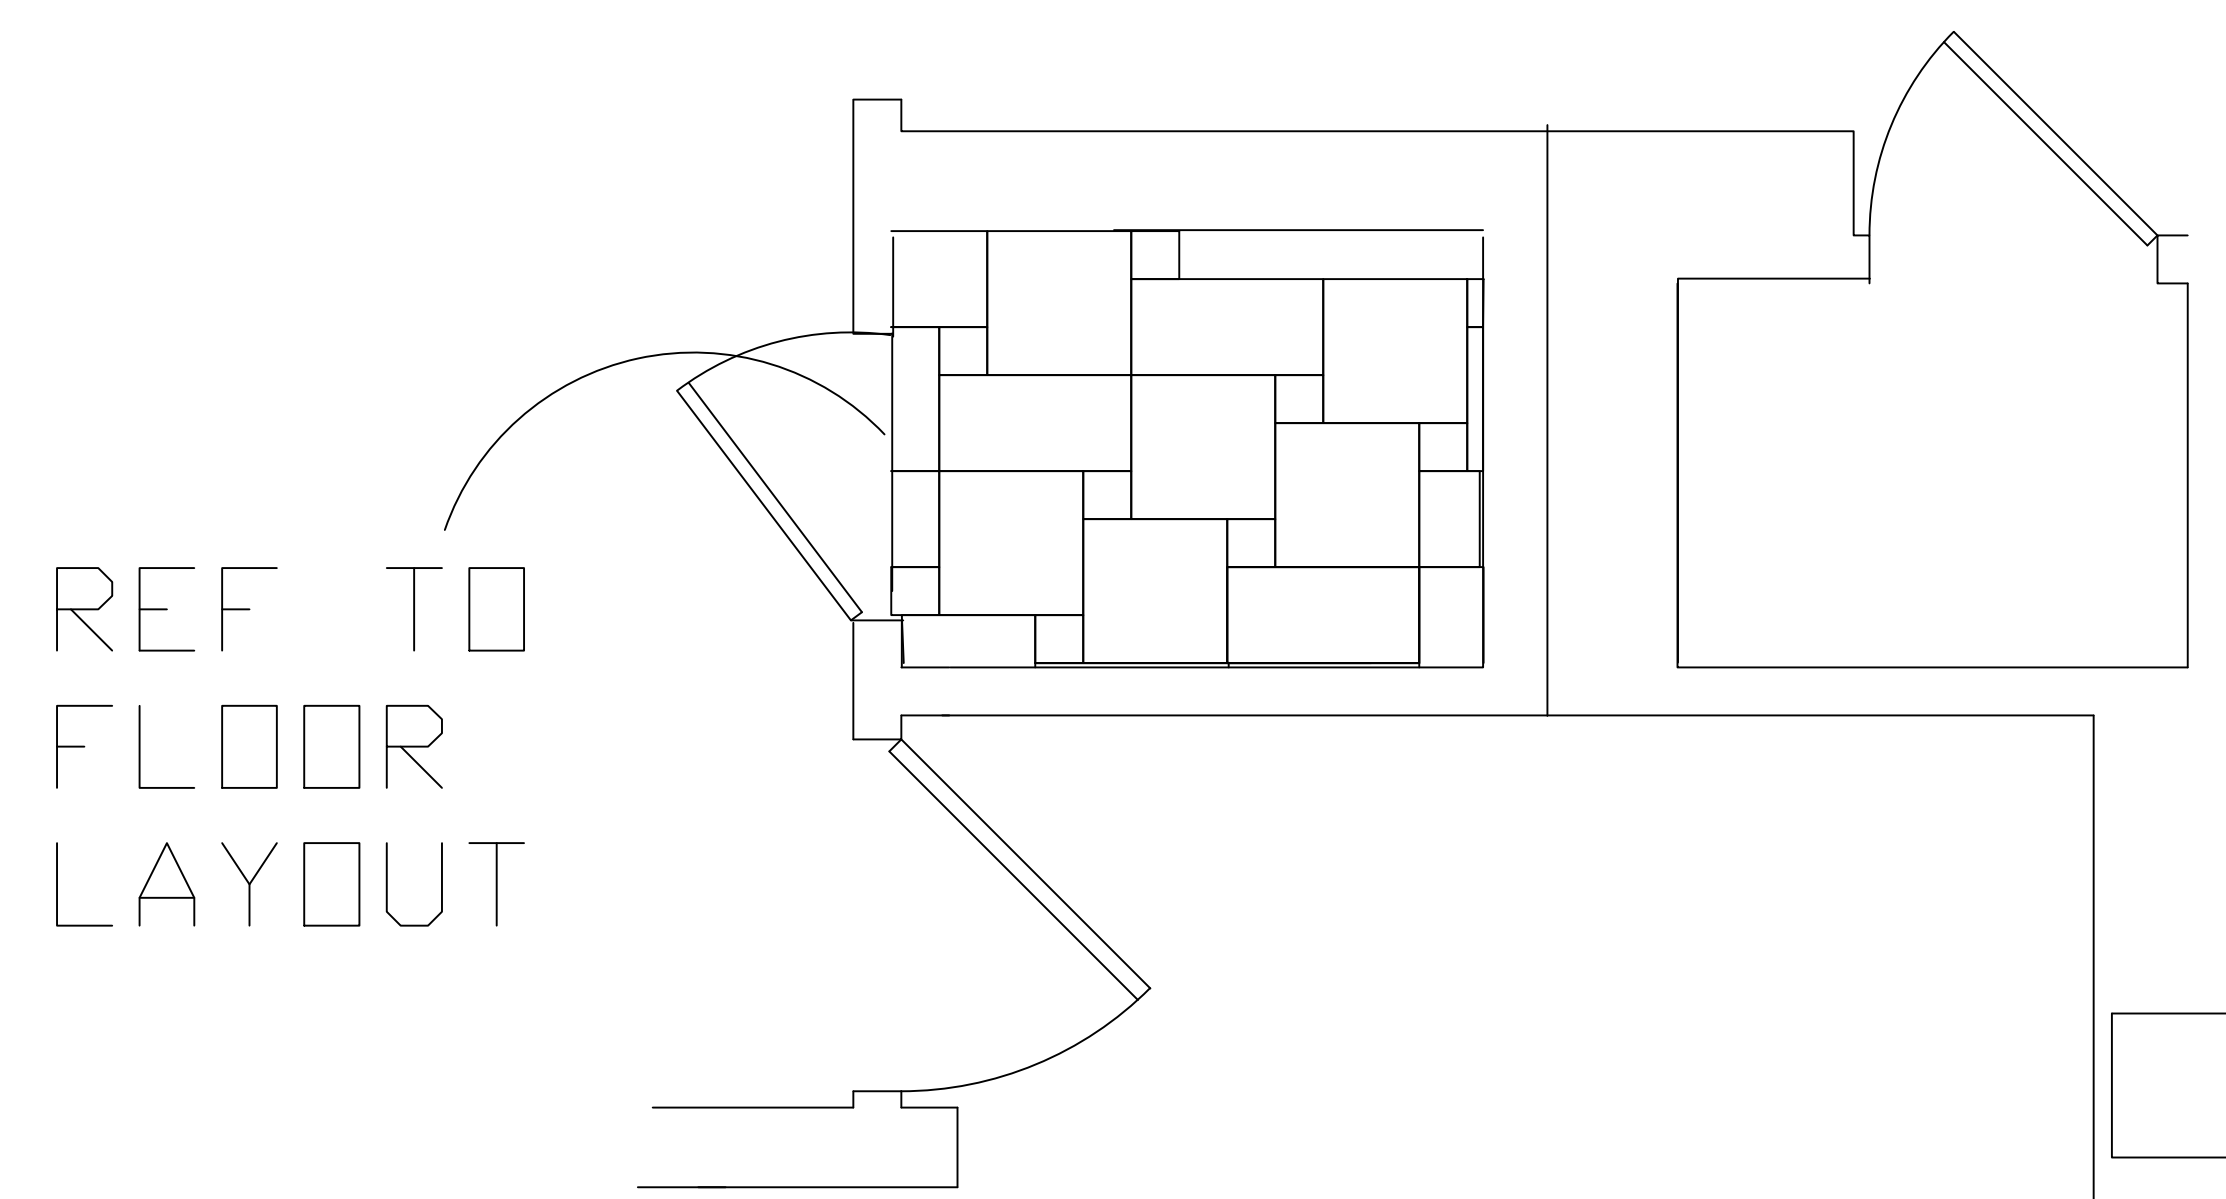

Restroom-A811A




FLOOR PLAN  
OPPOSITE HAND FOR ROOM A811B


EIGHTH FLOOR PLAN

SCALE: 1/2" = 1'-0"


ABBREV.	FINISH TYPE	MANUFACTURER	PRODUCT / COLOR	DESCRIPTION
<b>FLOOR FINISHES</b>				
PP-1	PORCELAIN TILE BASE	CROSSVILLE	"NOW" T837 10612CB AMBER 6"x12"	
PP-2	PORCELAIN TILE	CROSSVILLE	"NOW" S086 AMBER 6"x6"	
PP-3	PORCELAIN TILE	CROSSVILLE	"NOW" 4F5 AMBER 18"x18"	
PP-4	PORCELAIN TILE	CROSSVILLE	"NOW" 6Z27 AMBER 12"x24"	
PP-5	PORCELAIN TILE	CROSSVILLE	"NOW" SC19 AMBER 6"x24"	
<b>WALL FINISHES</b>				
PP-5	PORCELAIN TILE	CROSSVILLE	"NOW" SC19 AMBER 6"x24"	
PP-6	PORCELAIN TILE	CROSSVILLE	"NOW" 6B2 AMBER 3"x12"	
PP-7	PORCELAIN TILE	CROSSVILLE	"NOW" SA37 AMBER 3"x18" BULLNOSE	
TF-1	PORCELAIN TILE	CROSSVILLE	PATTERN	LAYOUT PATTERN
P-1	PAINT	ICI PAINTS	30YY 62/127 WATER CHESTNUT	EGGSHELL (GLOSS LEVEL 3)
P-2	PAINT	ICI PAINTS	20YY 55/151 MUSHROOM CAP	SBM GLOSS ON DOOR FRAMES (GLOSS LEVEL 5)
P-3	PAINT	ICI PAINTS	CEILING WHITE	FLAT ON CEILINGS (GLOSS LEVEL 1)
<b>MISCELLANEOUS FINISHES</b>				
ACT-1	ACOUSTIC CEILING TILE	ARMSTRONG	"CLEAN ROOM VLT" #868 WHITE 2' X 2' TILE	
G-1	GROUT	STARQUARTZ	"QUARTZ-LOCK 2" 260 HAYSTACK	USE W/ ALL TILE

GENERAL LEGEND:


- |   |               |
|---|---------------|
|  | AIR SUPPLY    |
|  | AIR RETURN    |
|  | 2' X 2' LIGHT |

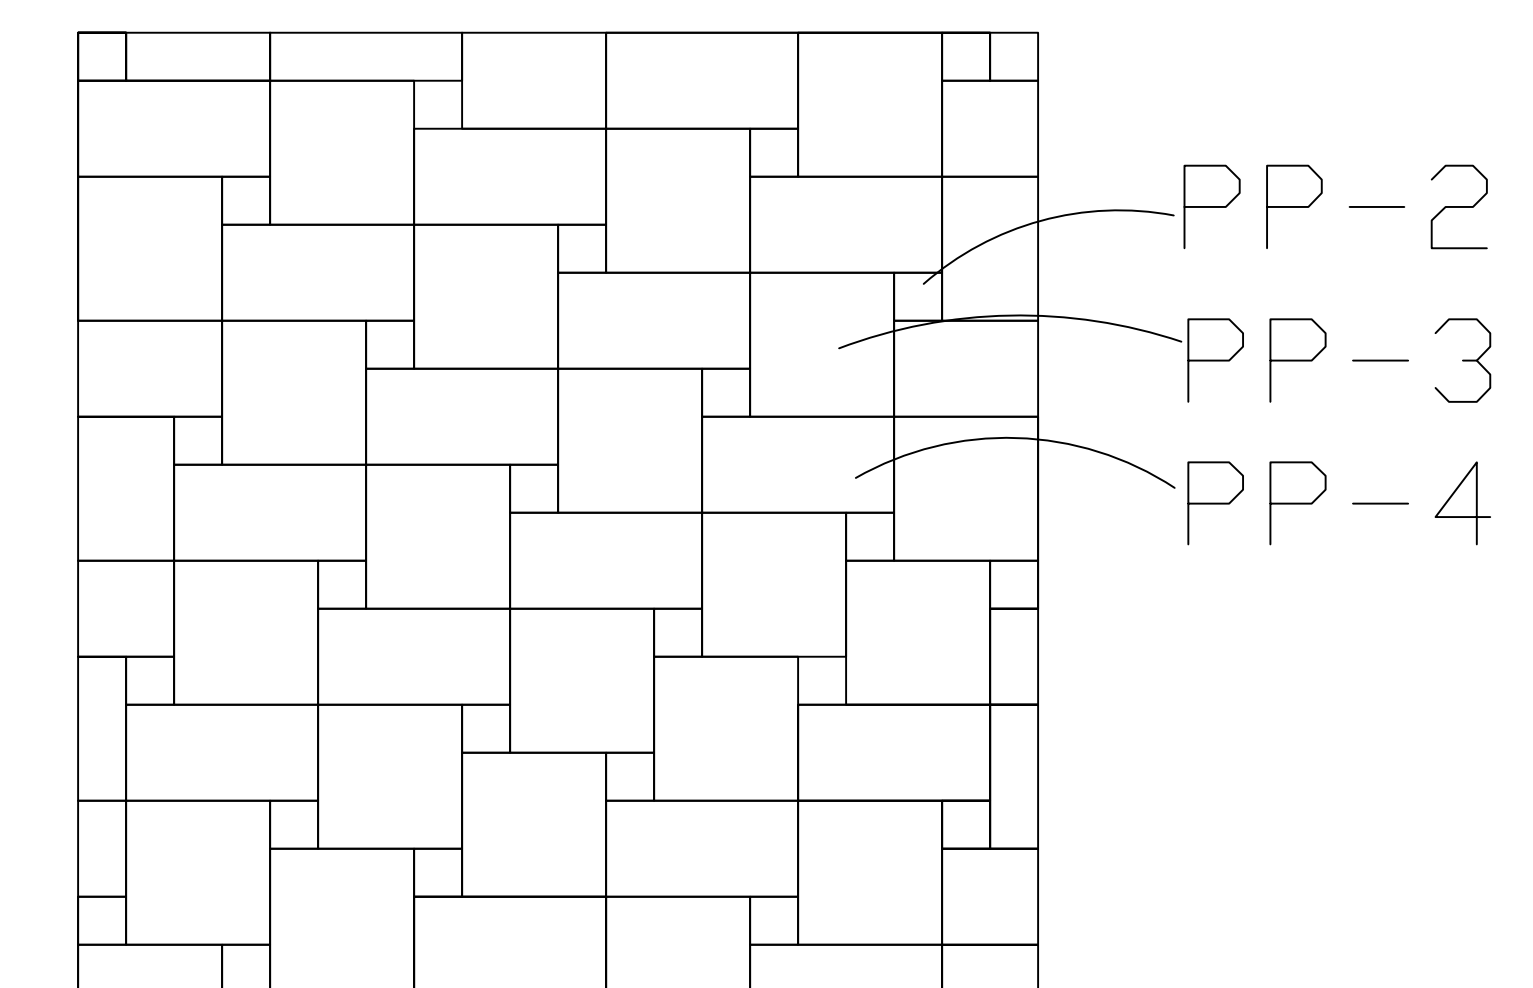


## FLOOR LAYOUT

Drawing Title:  A811A FLOOR PLAN	Project Title  8TH FLOOR AND DOM WOMEN'S RESTROOMS	Date  5/15/12	
		Project No. 539-12-108	
	Building Number  001	A-3	<i>Department of Veterans Affairs</i>


Note: "Brand name or equal" products listed on this drawing are products used with-in our facilities. These listed products are for reference only. Product description are set forth in the specifications to included the salient physical, functional, or other characteristics of the referenced products that are essential to the minimum needs of the Government.

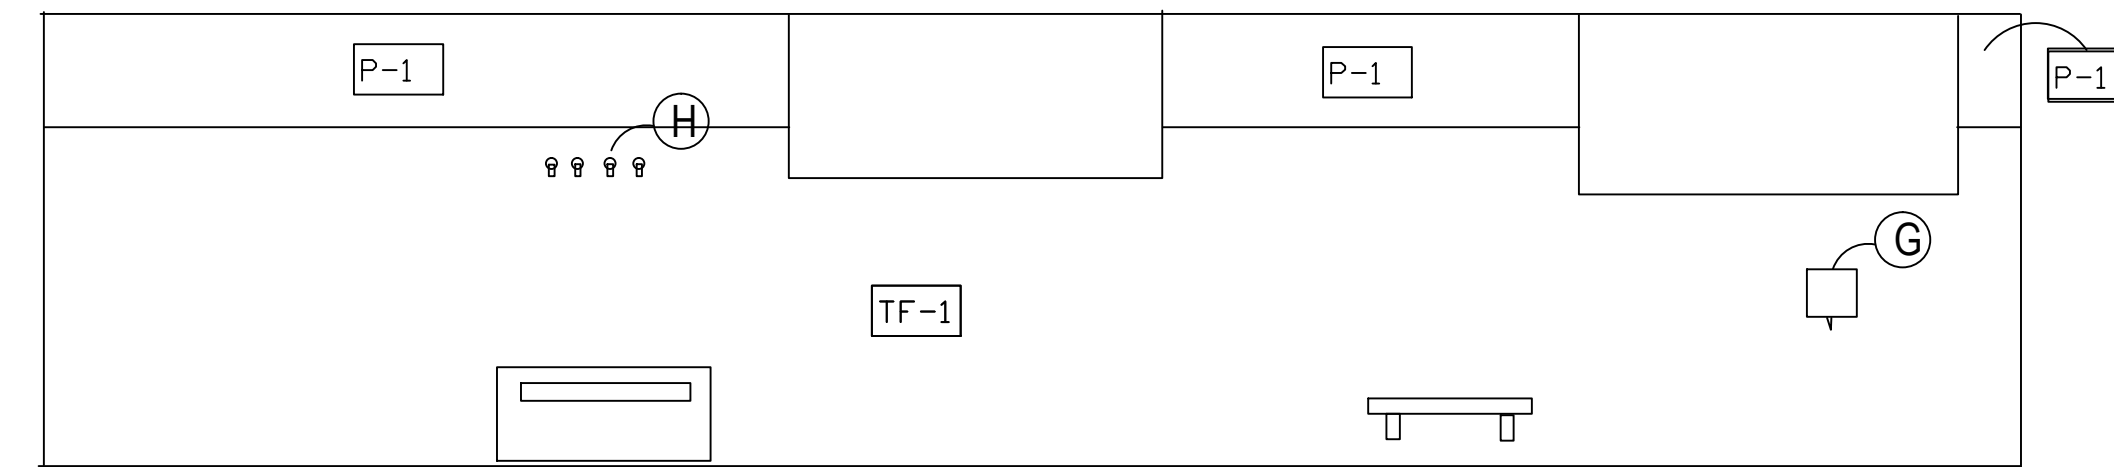

1 Restroom-140

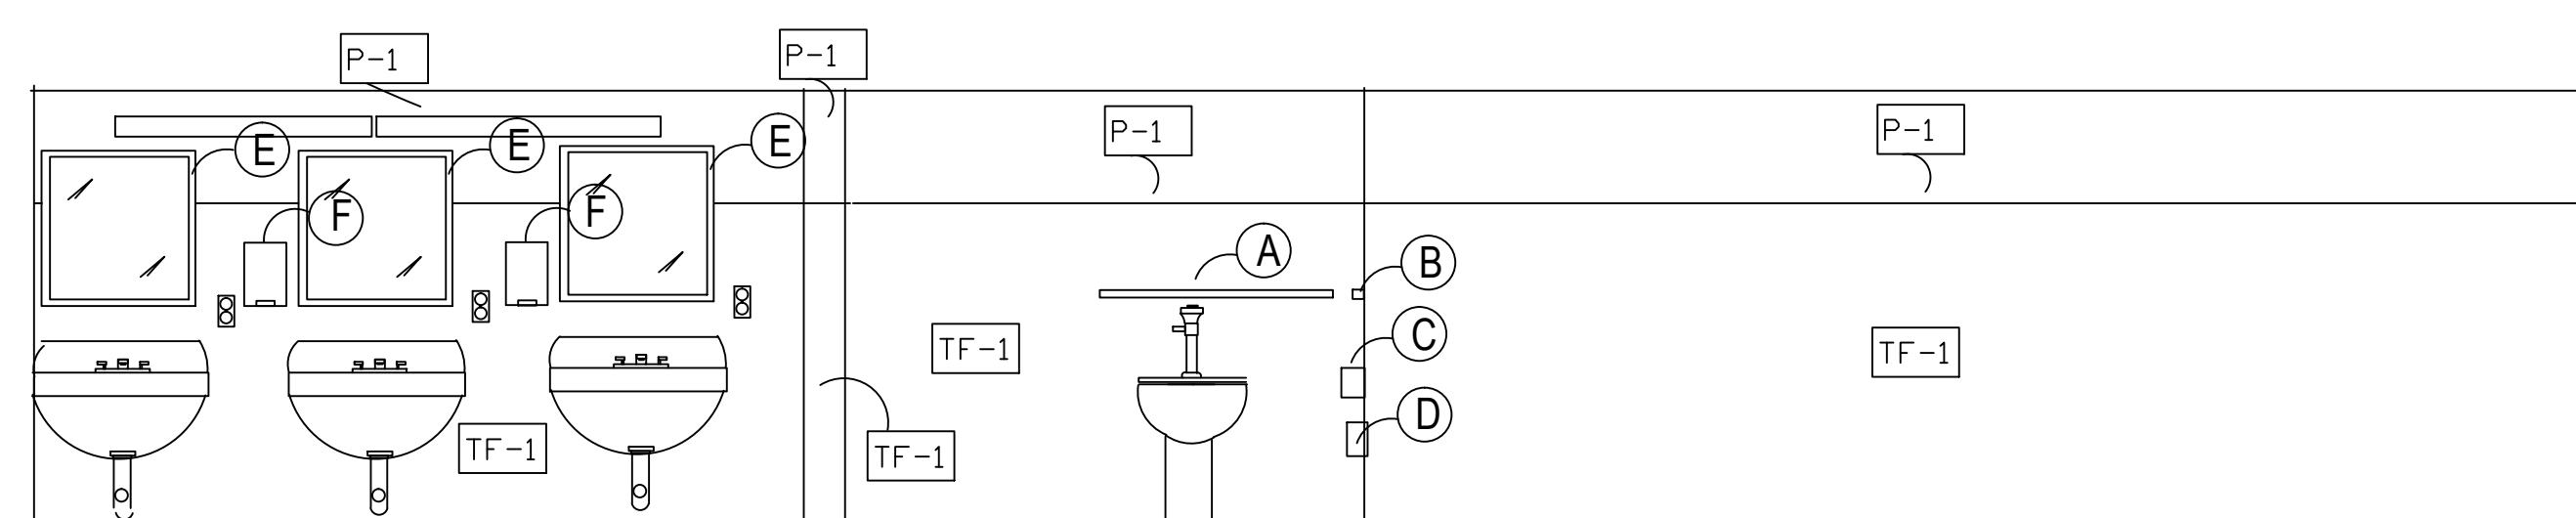


2 Restroom-140

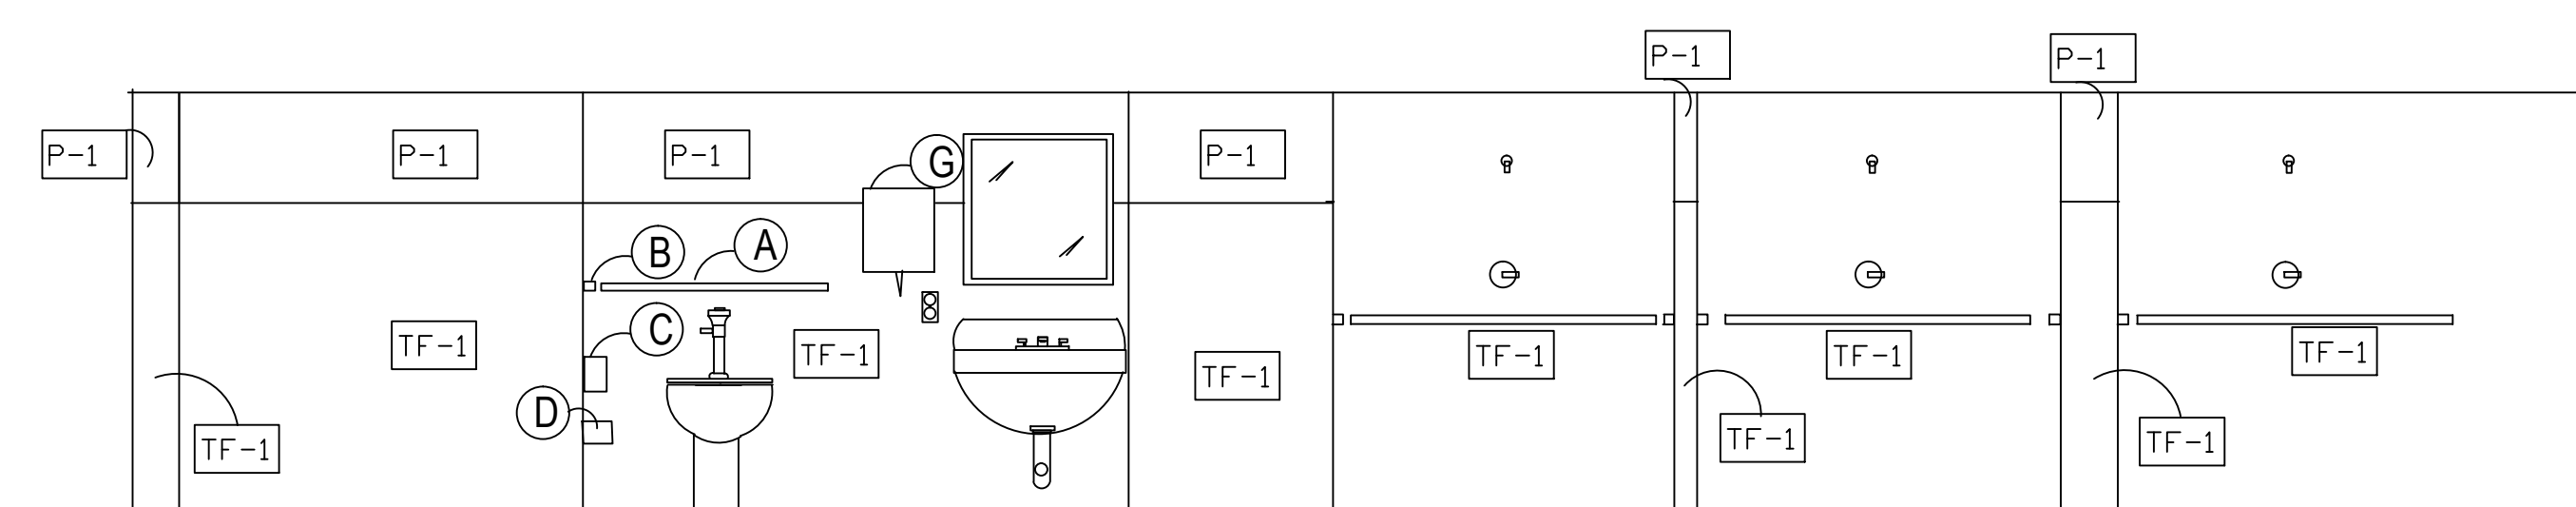


③ Restroom-140

TOILET ROOM ACCESSORIES LEGEND				
ITEM#	ITEM	PRODUCT #	MOUNTING HEIGHT	REMARKS
A	GRAB BAR 36"	B-6806 X 36	33" A.F.F. TO CENTERLINE	SATIN FINISH
B	GRAB BAR 42"	B-6806 X 42	33" A.F.F. TO CENTERLINE	SATIN FINISH
C	TOILET TISSUE DISP. (SURFACE MOUNT)	By owner	26 3/4" A.F.F. TO TOP	PROVIDED BY OWNER
D	SAN. NAP DISPENSOR (SURFACE MOUNT)	B270	25" TO 30" A.F.F. TO TOP	
E	MIRROR 24X36	B-1652436	39" A.F.F. TO BOTTOM OF MIRROR	
F	SOAP DISPENSER	By owner	LEVER AT 44" A.F.F.	PROVIDED BY OWNER
G	PAPER TOWEL DISPENSER	By owner	48" A.F.F. TO BOTTOM UNIT	PROVIDED BY OWNER
H	COAT HOOK	B-2116	40" A.F.F. TO CENTER LINE	


ACCESSIBLE PUBLIC TOILETS - FINISH LEGEND				
ABBREV.	FINISH TYPE	MANUFACTURER	PRODUCT / COLOR	DESCRIPTION
<b>FLOOR FINISHES</b>				
FP-1	PORCELAIN TILE BASE	CROSSVILLE	"NOW" 7837 108 12CB AMBER 6"x12"	
FP-2	PORCELAIN TILE	CROSSVILLE	"NOW" 5086 AMBER 6"x6"	
FP-3	PORCELAIN TILE	CROSSVILLE	"NOW" 49FS AMBER 18"x18"	
FP-4	PORCELAIN TILE	CROSSVILLE	"NOW" 6227 AMBER 12"x24"	
FP-5	PORCELAIN TILE	CROSSVILLE	"NOW" 5C19 AMBER 6"x24"	
<b>WALL FINISHES</b>				
WP-5	PORCELAIN TILE	CROSSVILLE	"NOW" 5C19 AMBER 6"x24"	
WP-6	PORCELAIN TILE	CROSSVILLE	"NOW" 68ES AMBER 3"x12"	
WP-7	PORCELAIN TILE	CROSSVILLE	"NOW" 5437 AMBER 3"x18" BULLNOSE	
TF-1	PORCELAIN TILE	CROSSVILLE	PATTERN	LAYOUT PATTERN
P-1	PAINT	ICI PAINTS	30Y 62/127 WATER CHESTNUT	EGGSHELL (GLOSS LEVEL 3)
P-2	PAINT	ICI PAINTS	20Y 55/151 MUSHROOM CAP	SBM GLOSS ON DOOR FRAMES (GLOSS LEVEL 5)
P-3	PAINT	ICI PAINTS	CEILING WHITE	FLAT ON CEILINGS (GLOSS LEVEL 1)
<b>MISCELLANEOUS FINISHES</b>				
ACT-1	ACOUSTIC CEILING TILE	ARMSTRONG	"CLEAN ROOM VLM" #888 WHITE 2' X 2' TILE	
G-1	GROUT	STARQUARTZ	"QUARTZ-LOCK 2" 260 HAYSTACK	USE WALL TILE

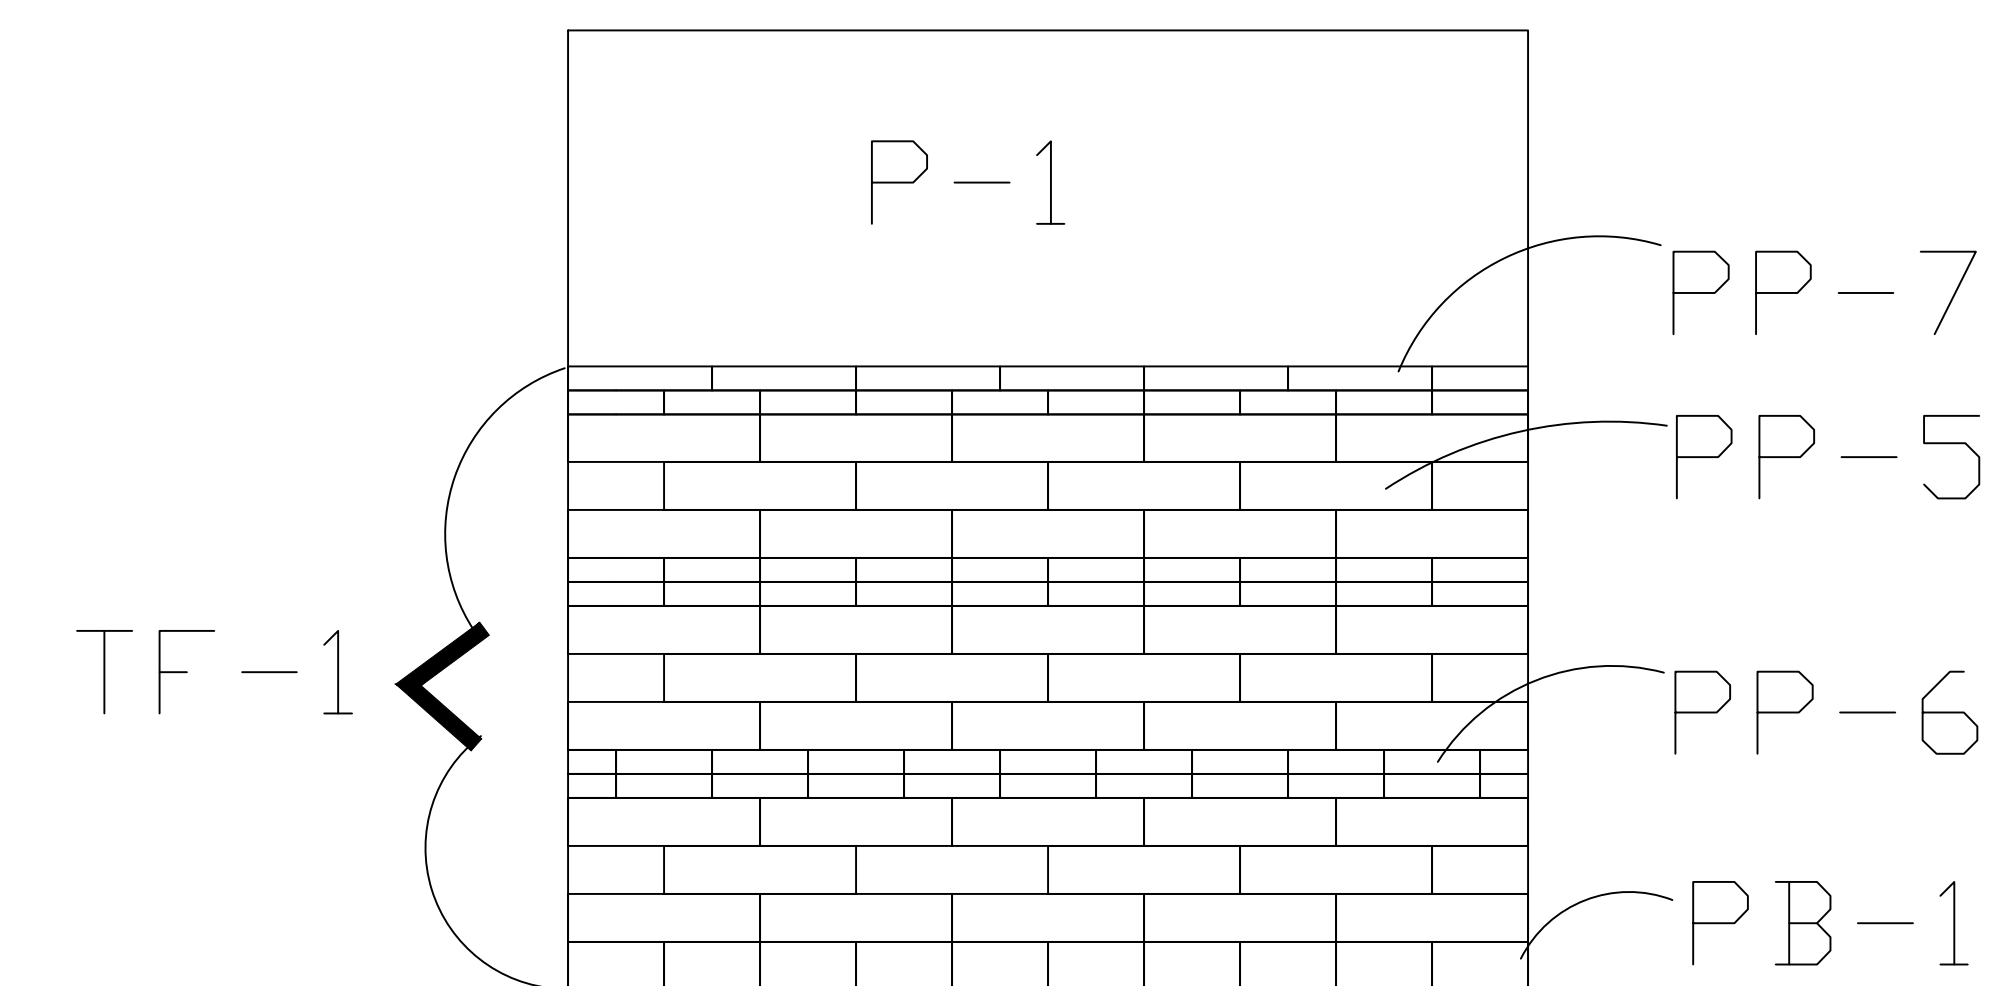

WALL PATTERN

Drawing Title: ELEVATION FEMALE SHOWER 140	Project Title 8TH FLOOR AND DOM WOMEN'S RESTROOMS	Date 5/15/12	
		Project No. 539-12-108	
	Building Number 064	A-4	


Note: "Brand name or equal" products listed on this drawing are products used with-in our facilities. These listed products are for reference only. Product description are set forth in the specifications to included the salient physical, functional, or other characteristics of the referenced products that are essential to the minimum needs of the Government.

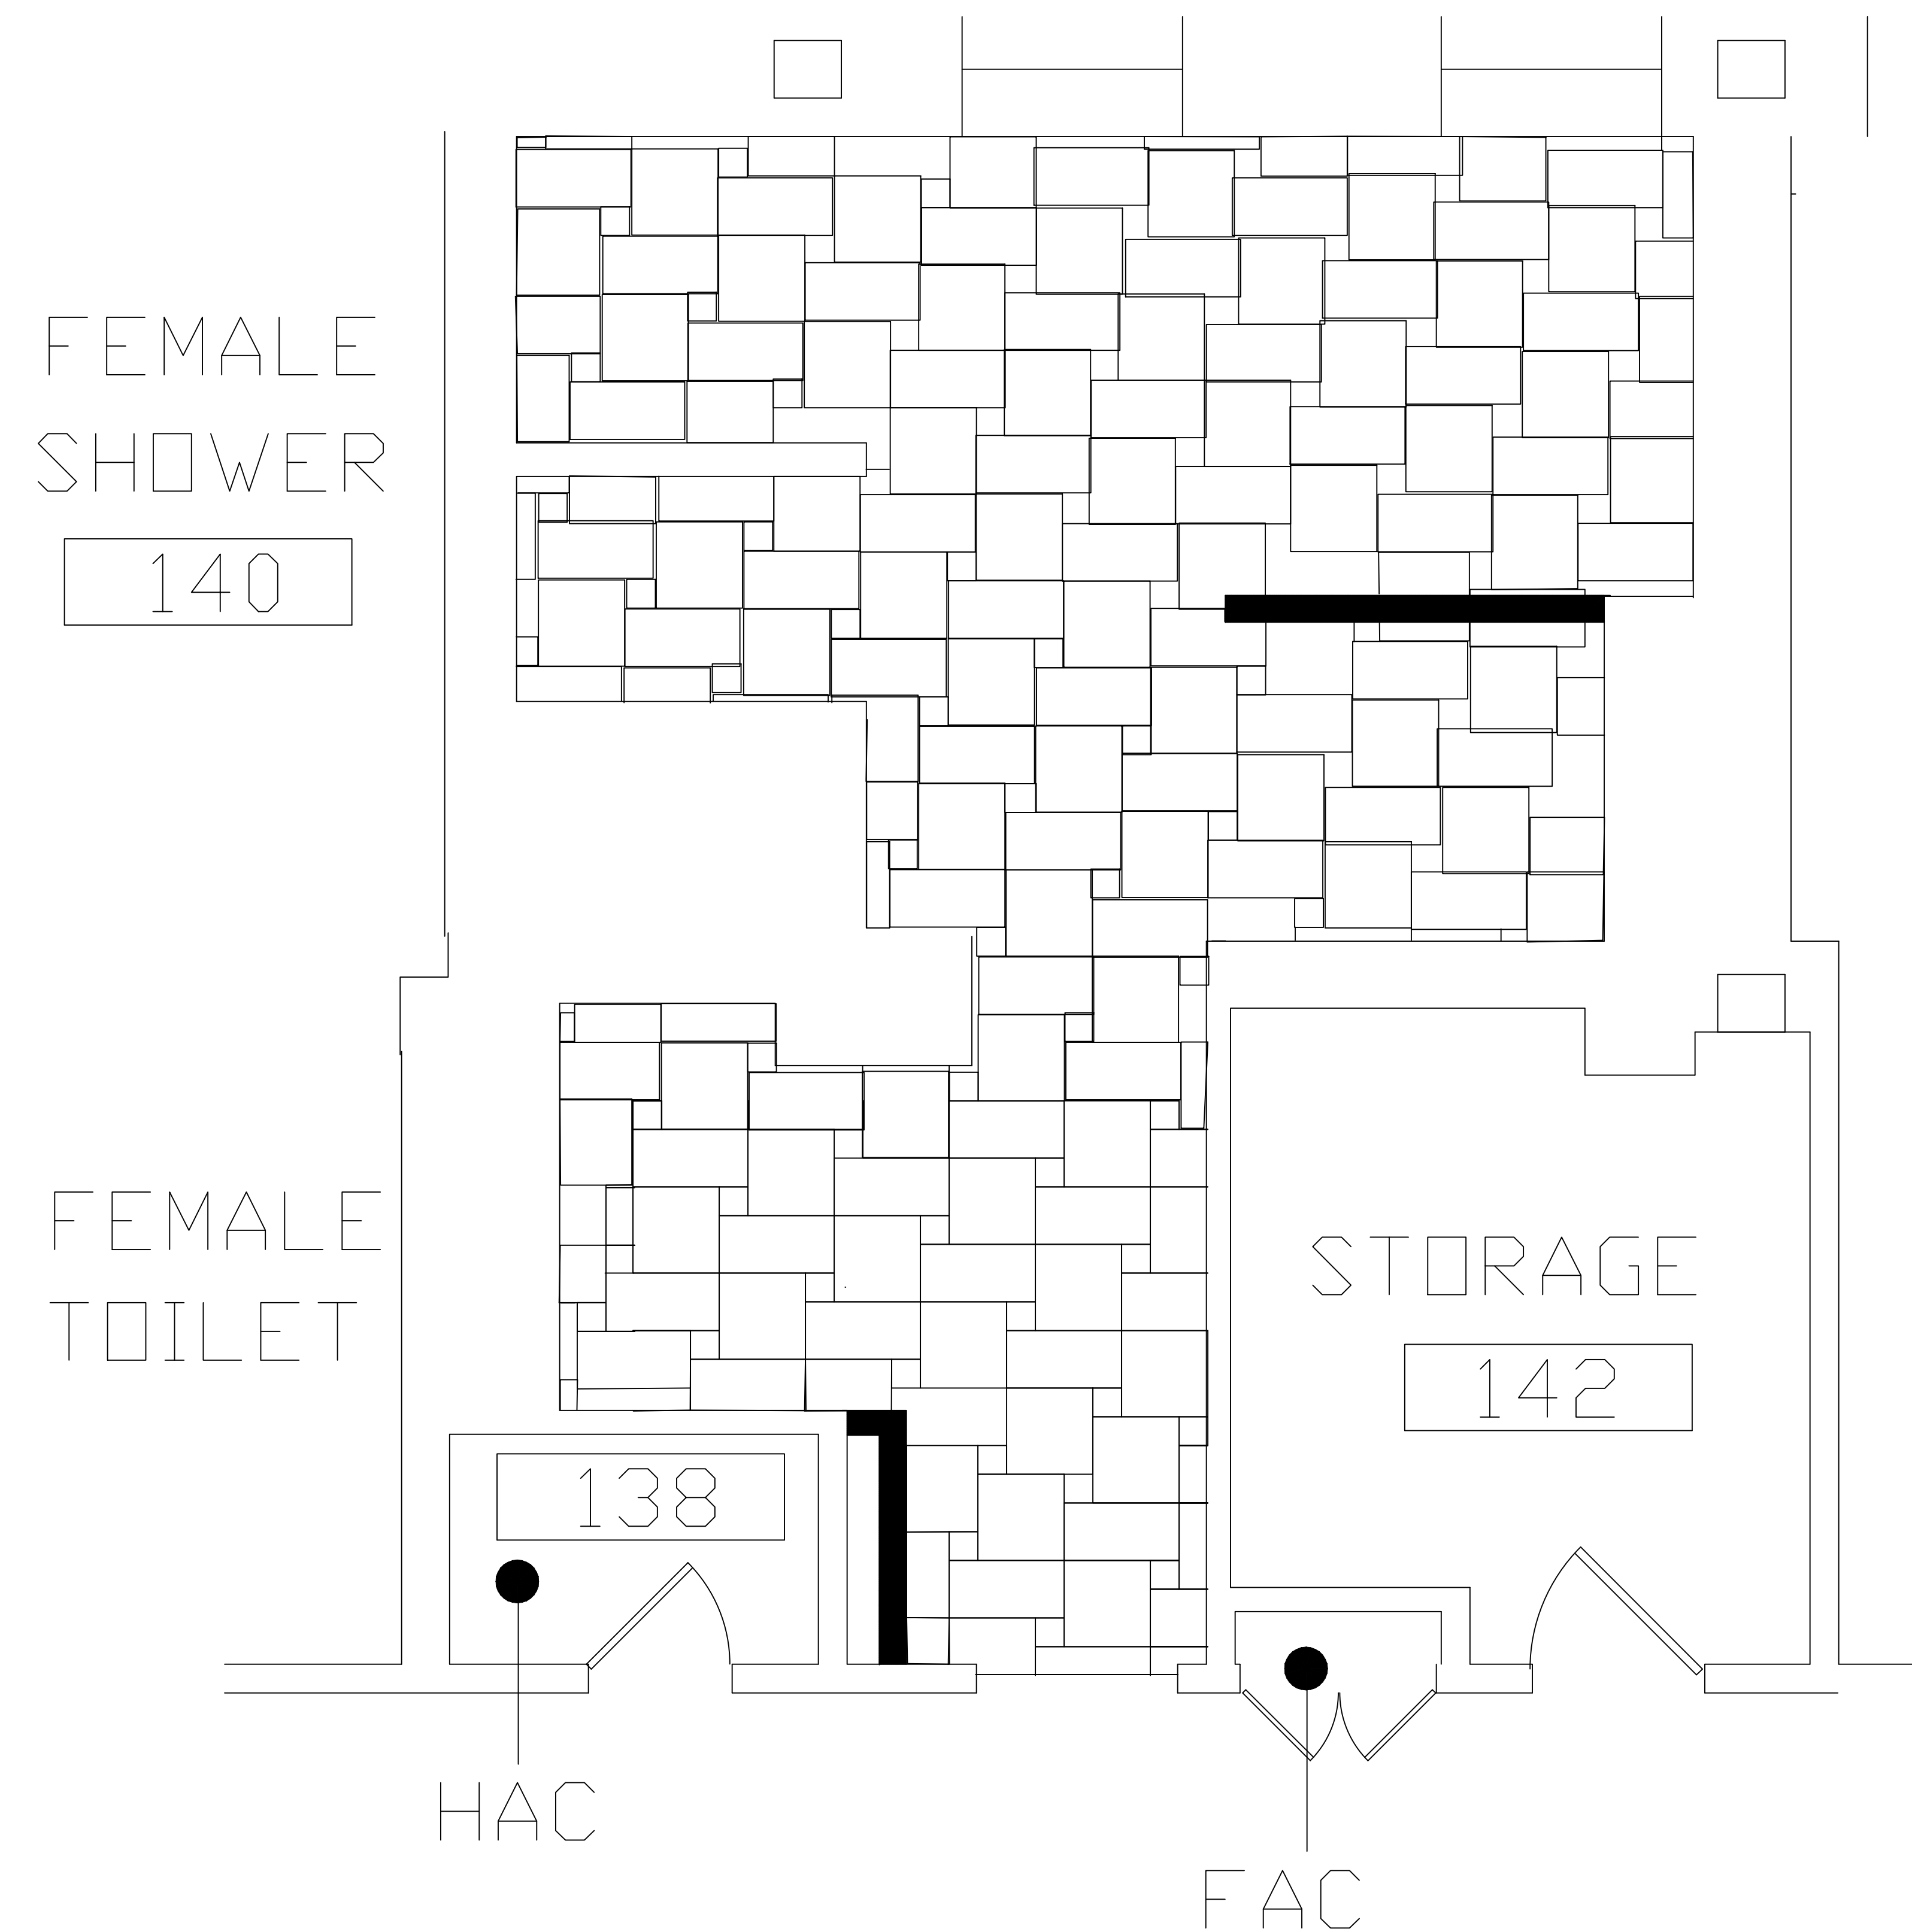


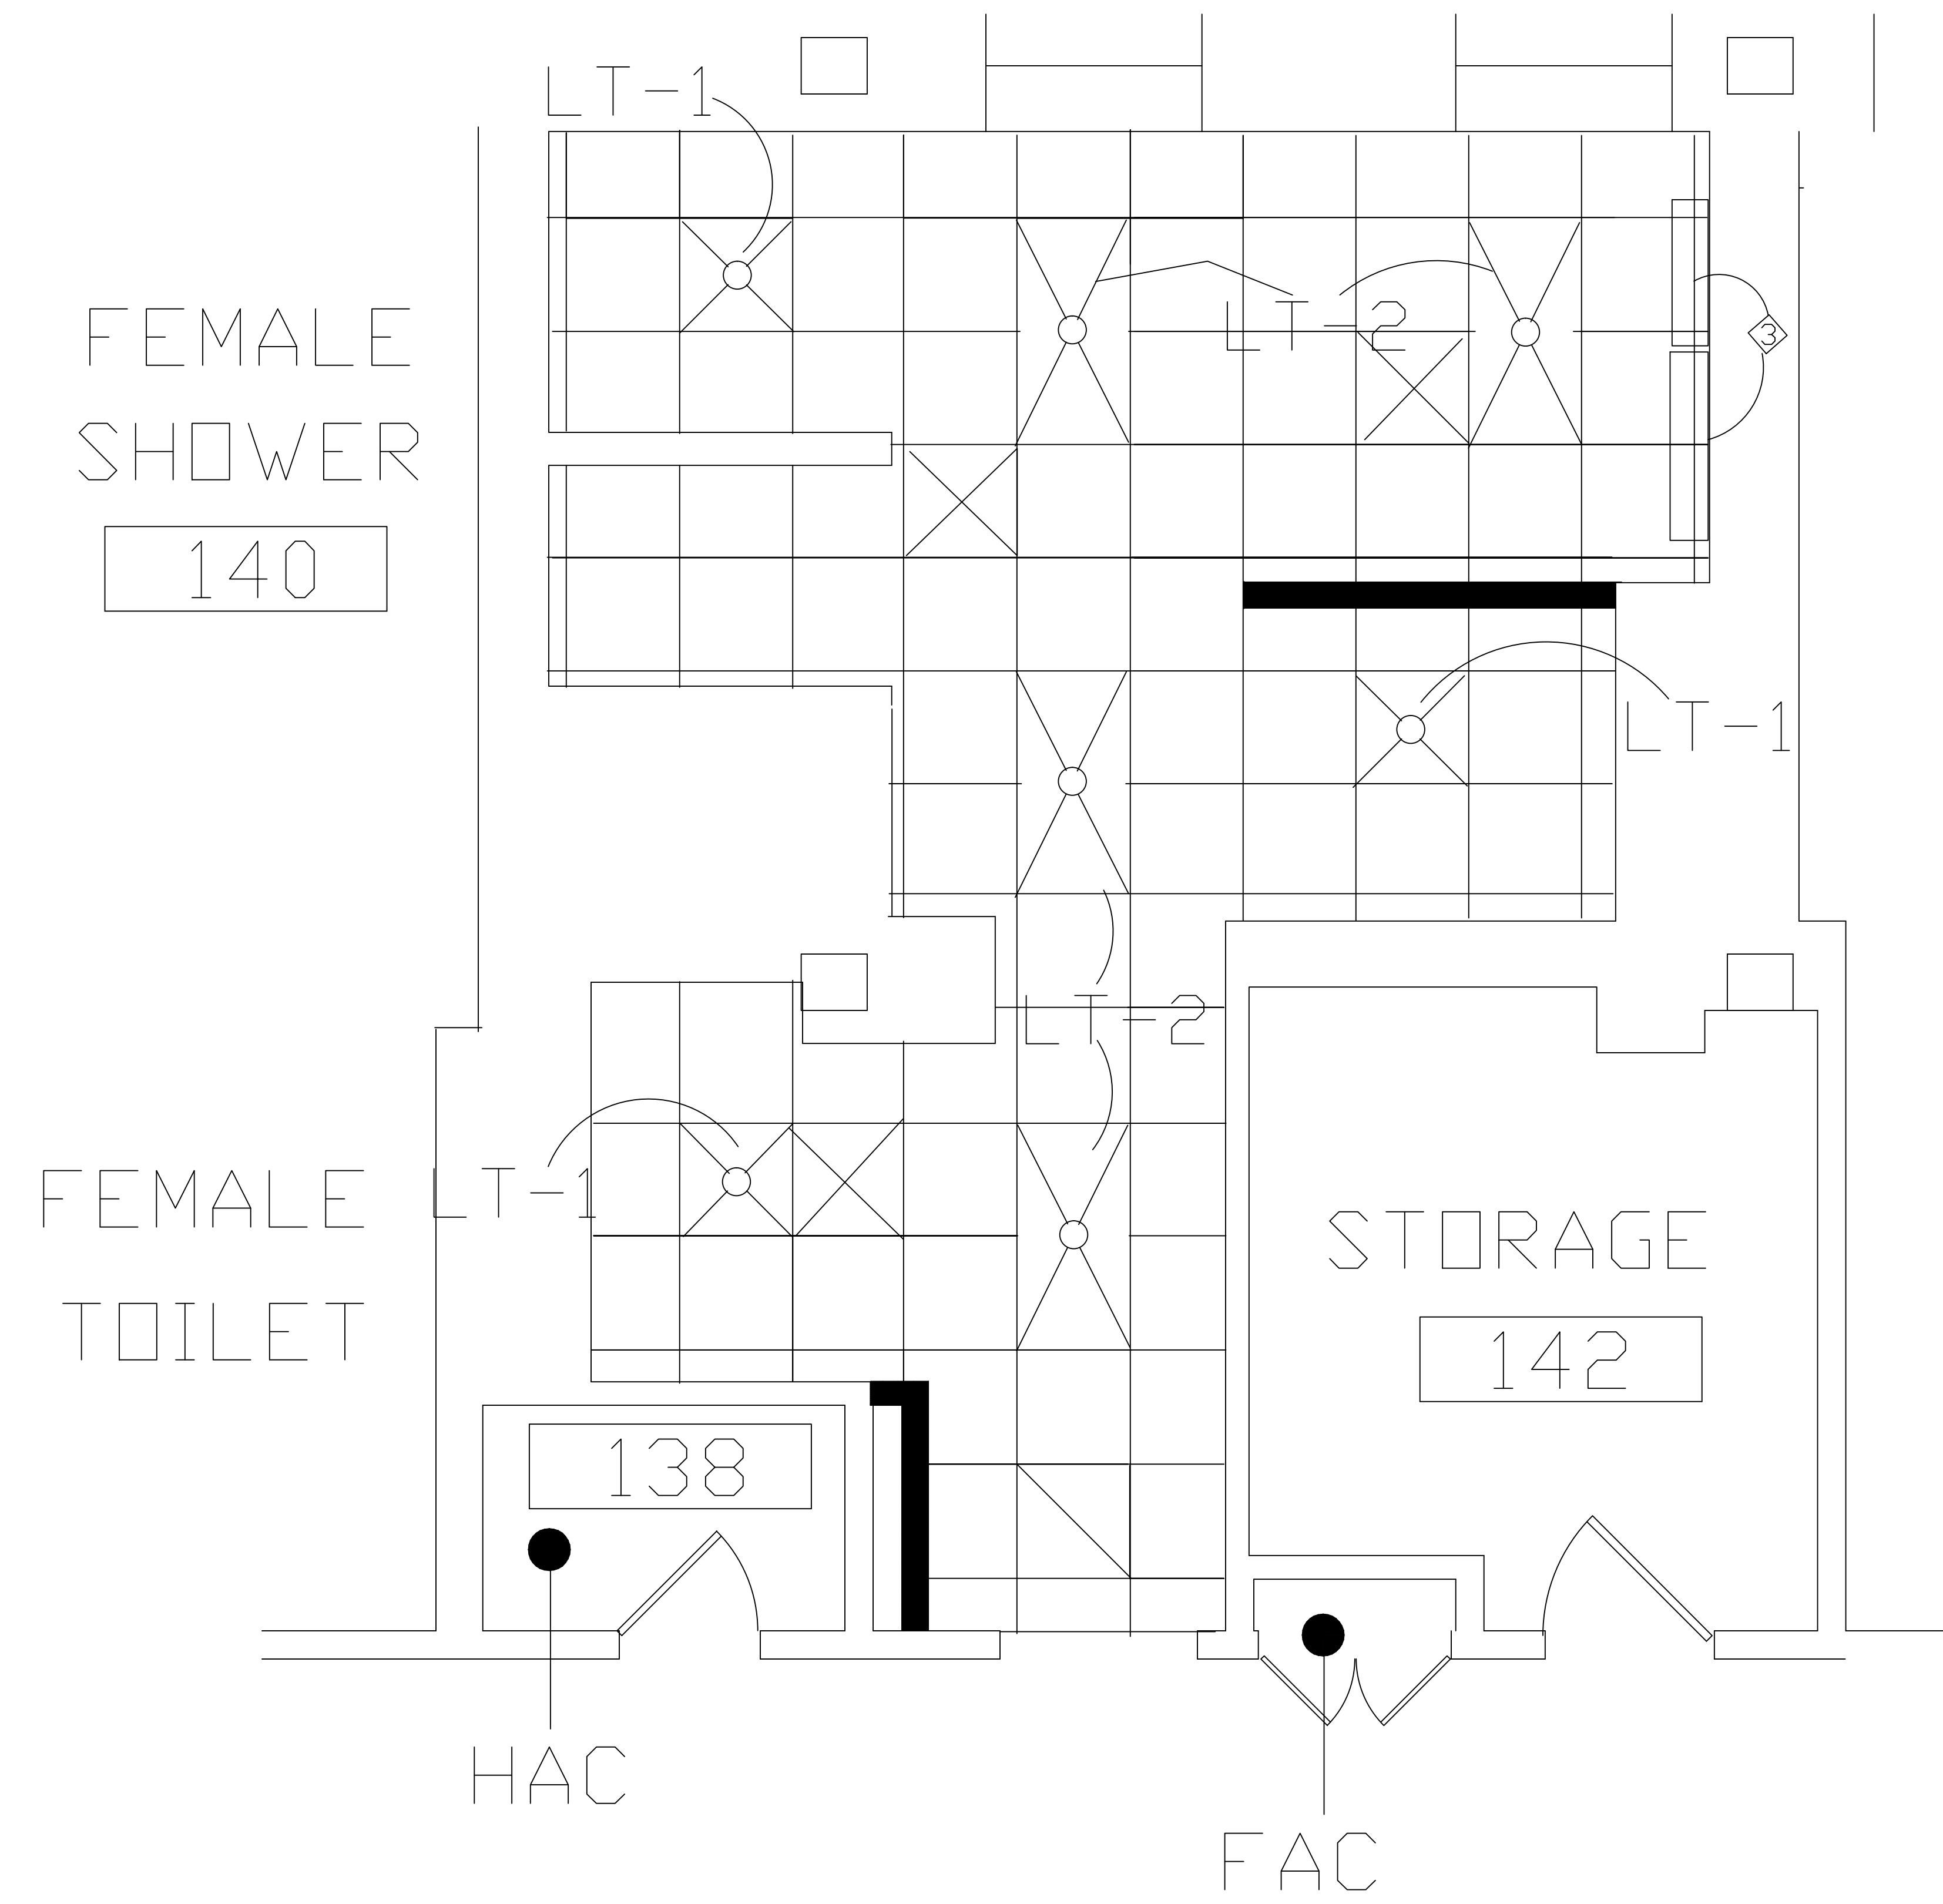
# FLOORING PLAN

SCALE: 1/2" = 1'-0"

ABBREV	FINISH TYPE	MANUFACTURER	PRODUCT / COLOR	DESCRIPTION
<b>FLOOR FINISHES</b>				
PR-1	PORCELAIN TILE BASE	CROSSVILLE	"NOW" 7B37 10612CB AMBER 6"X 12"	
PR-2	PORCELAIN TILE	CROSSVILLE	"NOW" 5D86 AMBER 6"X 6"	
PR-3	PORCELAIN TILE	CROSSVILLE	"NOW" 4F5 AMBER 18"X 18"	
PR-4	PORCELAIN TILE	CROSSVILLE	"NOW" 6Z27 AMBER 12"X24"	
PR-5	PORCELAIN TILE	CROSSVILLE	"NOW" 5C19 AMBER 6"X 24"	
<b>WALL FINISHES</b>				
PR-5	PORCELAIN TILE	CROSSVILLE	"NOW" 5C19 AMBER 6"X 24"	
PR-6	PORCELAIN TILE	CROSSVILLE	"NOW" 6B63 AMBER 3"X 12"	
PR-7	PORCELAIN TILE	CROSSVILLE	"NOW" 5A37 AMBER 3"X 18" BULLNOSE	
TF-1	PORCELAIN TILE	CROSSVILLE	PATTERN	LAYOUT PATTERN
P-1	PAINT	ICI PAINTS	30YY 62/127 WATER CHESTNUT	EGGSHELL (GLOSS LEVEL 3)
P-2	PAINT	ICI PAINTS	20YY 55/151 MUSHROOM CAP	SBM GLOSS ON DOOR FRAMES (GLOSS LEVEL 5)
P-3	PAINT	ICI PAINTS	CEILING WHITE	FLAT ON CEILINGS (GLOSS LEVEL 1)
<b>MISCELLANEOUS FINISHES</b>				
ACT-1	ACOUSTIC CEILING TILE	ARMISTRONG	"CLEAN ROOM VL" #868 WHITE 2' X 2' TILE	
G-1	GROUT	STARQUARTZ	"QUARTZ-LOCK 2" 250 HA-YSTACK	USE WALL TILE

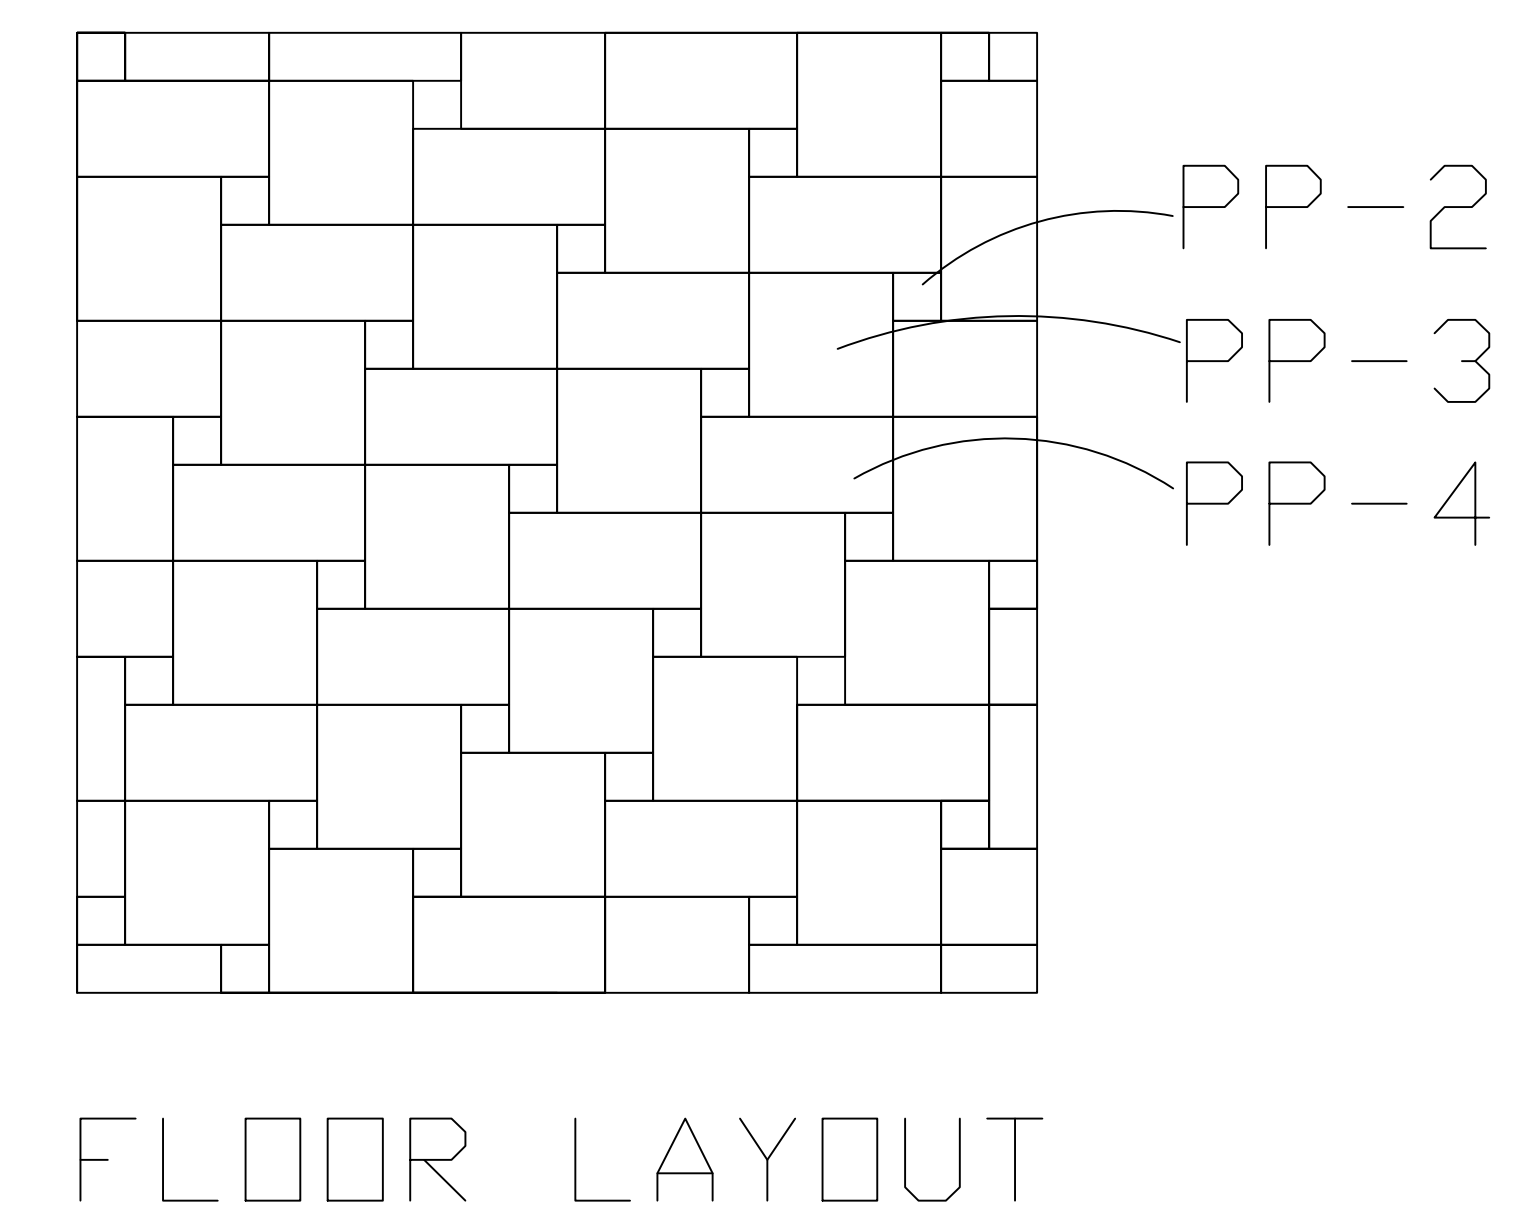

Drawing Title: FEMALE SHOWER PLAN 140	Project Title 8TH FLOOR AND DOM WOMEN'S RESTROOMS	Date 5/15/12	
		Project No. 539-12-108	
	Building Number 064	A-5	







NEW CONSTRUCTION NOTES:

1.) LT-1 IS FOR THE INSTALLATION OF A 2'X2' T-8 FLUORESCENT LIGHTING TROFFER WITH LUMINOUS HIGH EFFICIENCY LENS PANELS.


2.) LT-2 IS FOR THE INSTALLATION OF 2'X4' FLUORESCENT LIGHTING; MODEL: COLUMBIA #EPC24-232G-DL SERIES OR EQUAL BY DAYBRITE OR LITHONIA.

3.) INSTALL WALL MOUNTED LIGHTING FIXTURE; MULTI-STAGE PHOSPHATE BONDING TREATMENT AND WHITE BAKED ENAMEL; RAPID START 32W-T8 LAMPS; EF28C; NOMINAL 36" IN LENGTH, 1-25W T8 LAMP, MODEL: FINELITE #S17-VCF-PF-T8-00-00-0.88 OR EQUAL BY DECO LIGHTING.



- GENERAL LEGEND:
-  AIR SUPPLY
  -  AIR RETURN
  -  2' X 2' LIGHT
  -  2' X 4' LIGHT

REFLECTED CEILING


SCALE: 1/2" = 1'-0"

Drawing Title: FEMALE SHOWER 140	Project Title 8TH FLOOR AND DOM WOMEN'S RESTROOMS	Date 5/15/12	 Department of Veterans Affairs
		Project No. 539-12-108	
	Building Number 064	A-6	


Note: "Brand name or equal" products listed on this drawing are products used with-in our facilities. These listed products are for reference only. Product description are set forth in the specifications to included the salient physical, functional, or other characteristics of the referenced products that are essential to the minimum needs of the Government.

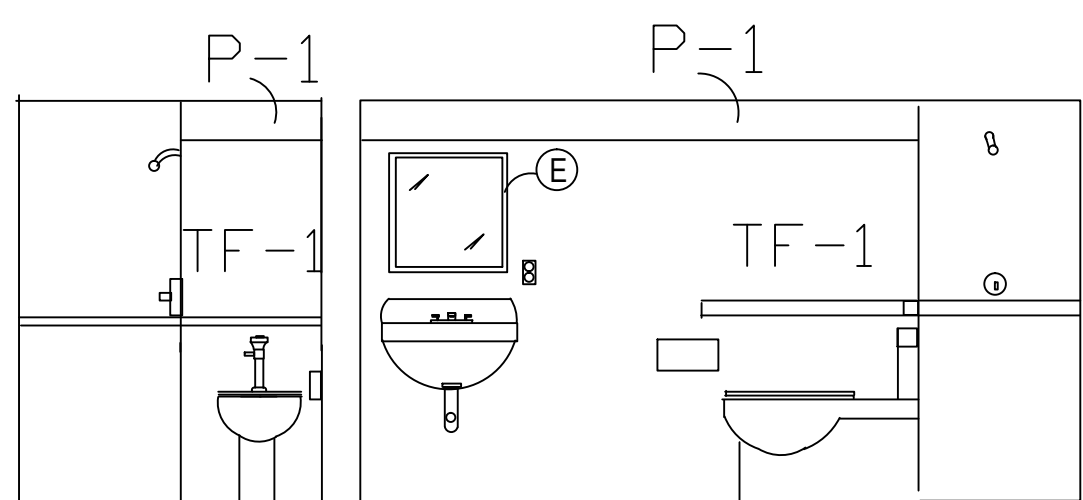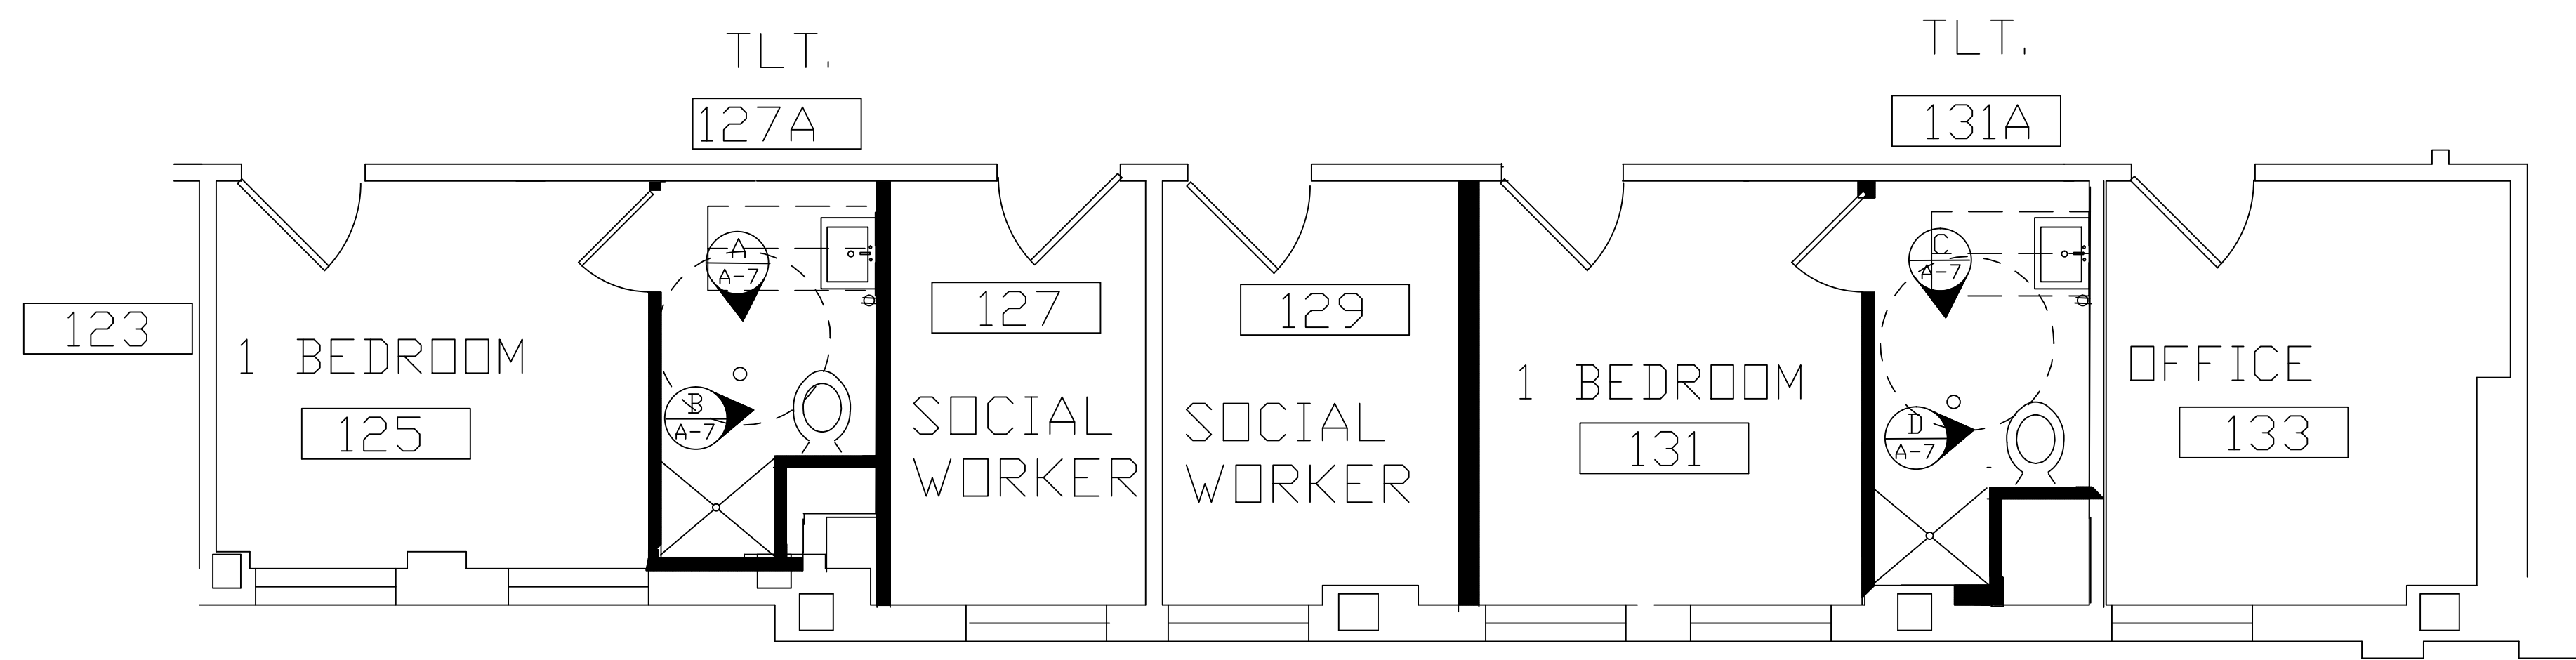


A & B RESTROOM 127A

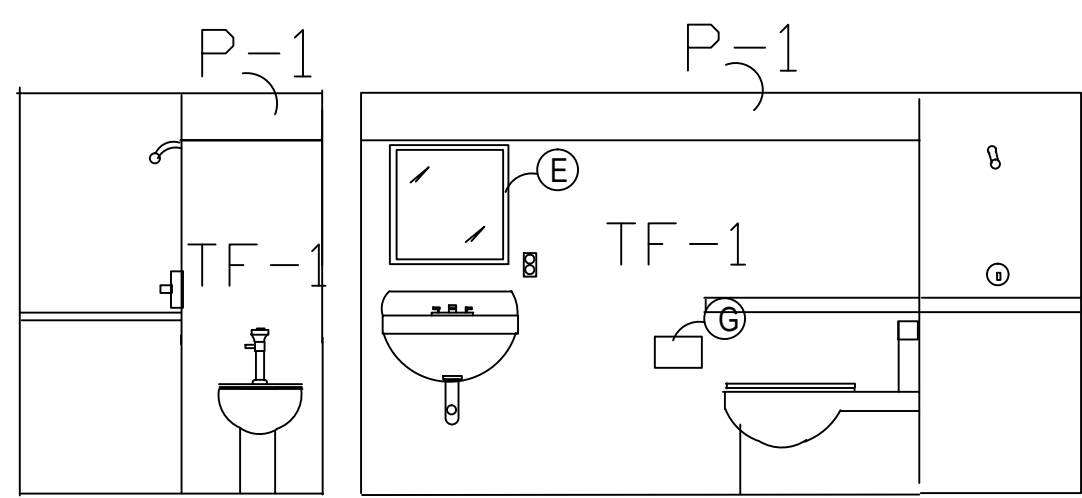


C & D RESTROOM 131A

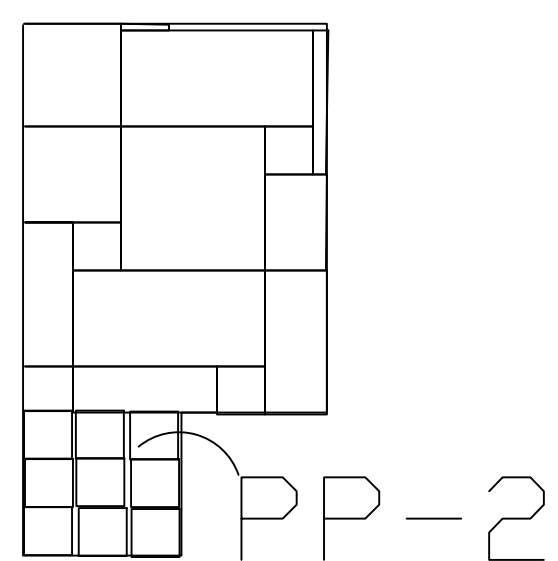

FLOOR PLAN RESTROOM 127A

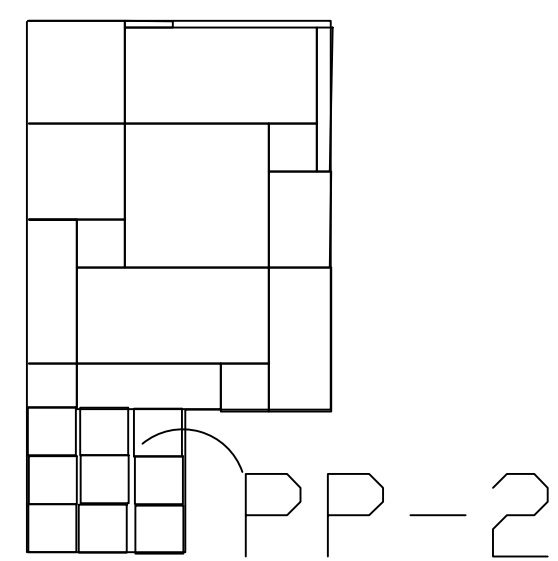

FLOOR PLAN RESTROOM 131A

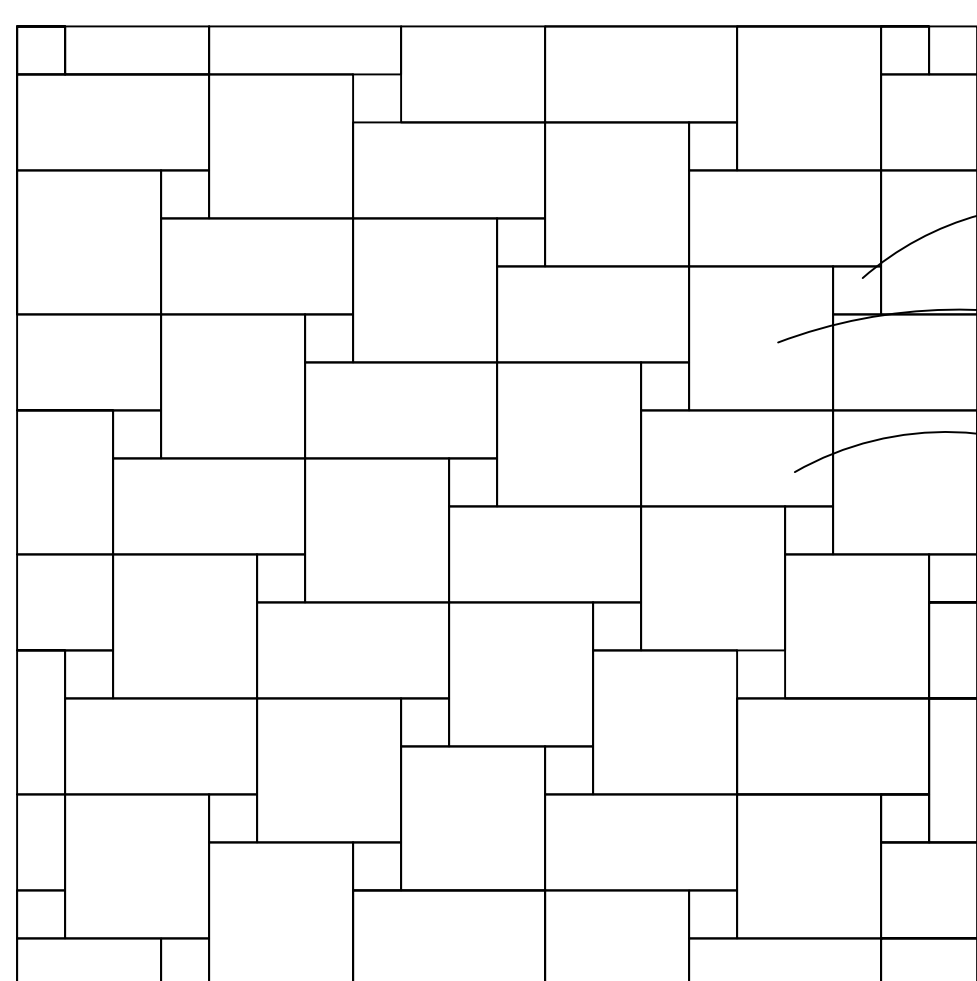


FLOOR LAYOUT

PP-2  
PP-3  
PP-4


TOILET ROOM ACCESSORIES LEGEND				
ITEM #	ITEM	PRODUCT #	MOUNTING HEIGHT	REMARKS
A	GRAB BAR 36"	B-6806 X 36	33" A.F.F TO CENTERLINE	SATIN FINISH
B	GRAB BAR 42"	B-6806 X 42	33" A.F.F TO CENTERLINE	SATIN FINISH
C	TOILET TISSUE DISP. (SURFACE MOUNT)	By owner	26 3/4" A.F.F. TO TOP	PROVIDED BY OWNER
D	SAN. NAP DISPENSOR (SURFACE MOUNT)	B270	25" TO 30" A.F.F. TO TOP	
E	MIRROR 24X36	B-1652436	39" A.F.F. TO BOTTOM OF MIRROR	
F	SOAP DISPENSER	By owner	LEVER AT 44" A.F.F.	PROVIDED BY OWNER
G	PAPER TOWEL DISPENSER	By owner	48" A.F.F. TO BOTTOM UNIT	PROVIDED BY OWNER
H	COAT HOOK	B-2116	40" A.F.F. TO CENTER LINE	

ACCESSIBLE PUBLIC TOILETS - FINISH LEGEND				
ABBREV.	FINISH TYPE	MANUFACTURER	PRODUCT / COLOR	DESCRIPTION
FLOOR FINISHES				
FB-1	PORCELAIN TILE BASE	CROSSVILLE	"NOW" 7837 10612CB AMBER 6"x12"	
FP-2	PORCELAIN TILE	CROSSVILLE	"NOW" 5086 AMBER 6"x6"	
FP-3	PORCELAIN TILE	CROSSVILLE	"NOW" 48P5 AMBER 18"x18"	
FP-4	PORCELAIN TILE	CROSSVILLE	"NOW" 6227 AMBER 12"x24"	
FP-5	PORCELAIN TILE	CROSSVILLE	"NOW" 5C19 AMBER 6"x24"	
WALL FINISHES				
PP-5	PORCELAIN TILE	CROSSVILLE	"NOW" 5C19 AMBER 6"x24"	
PP-6	PORCELAIN TILE	CROSSVILLE	"NOW" 68E3 AMBER 3"x12"	
PP-7	PORCELAIN TILE	CROSSVILLE	"NOW" 5A37 AMBER 3"x18" BULLNOSE	
TF-1	PORCELAIN TILE	CROSSVILLE	PATTERN	LAYOUT PATTERN
P-1	PAINT	ICI PAINTS	30YY 62/127 WATER CHESTNUT	EGGSHELL (GLOSS LEVEL 3)
P-2	PAINT	ICI PAINTS	20YY 55/151 MUSHROOM CAP	SBM GLOSS ON DOOR FRAMES (GLOSS LEVEL 5)
P-3	PAINT	ICI PAINTS	CEILING WHITE	FLAT ON CEILING (GLOSS LEVEL 1)
MISCELLANEOUS FINISHES				
ACT-1	ACOUSTIC CEILING TILE	ARMSTRONG	"CLEAN ROOM VLT" #868 WHITE 2' X 2' TILE	
G-1	GROUT	STARQUARTZ	"QUARTZ-LOOK 2" 260 HAYSTACK	USE W/ ALL TILE

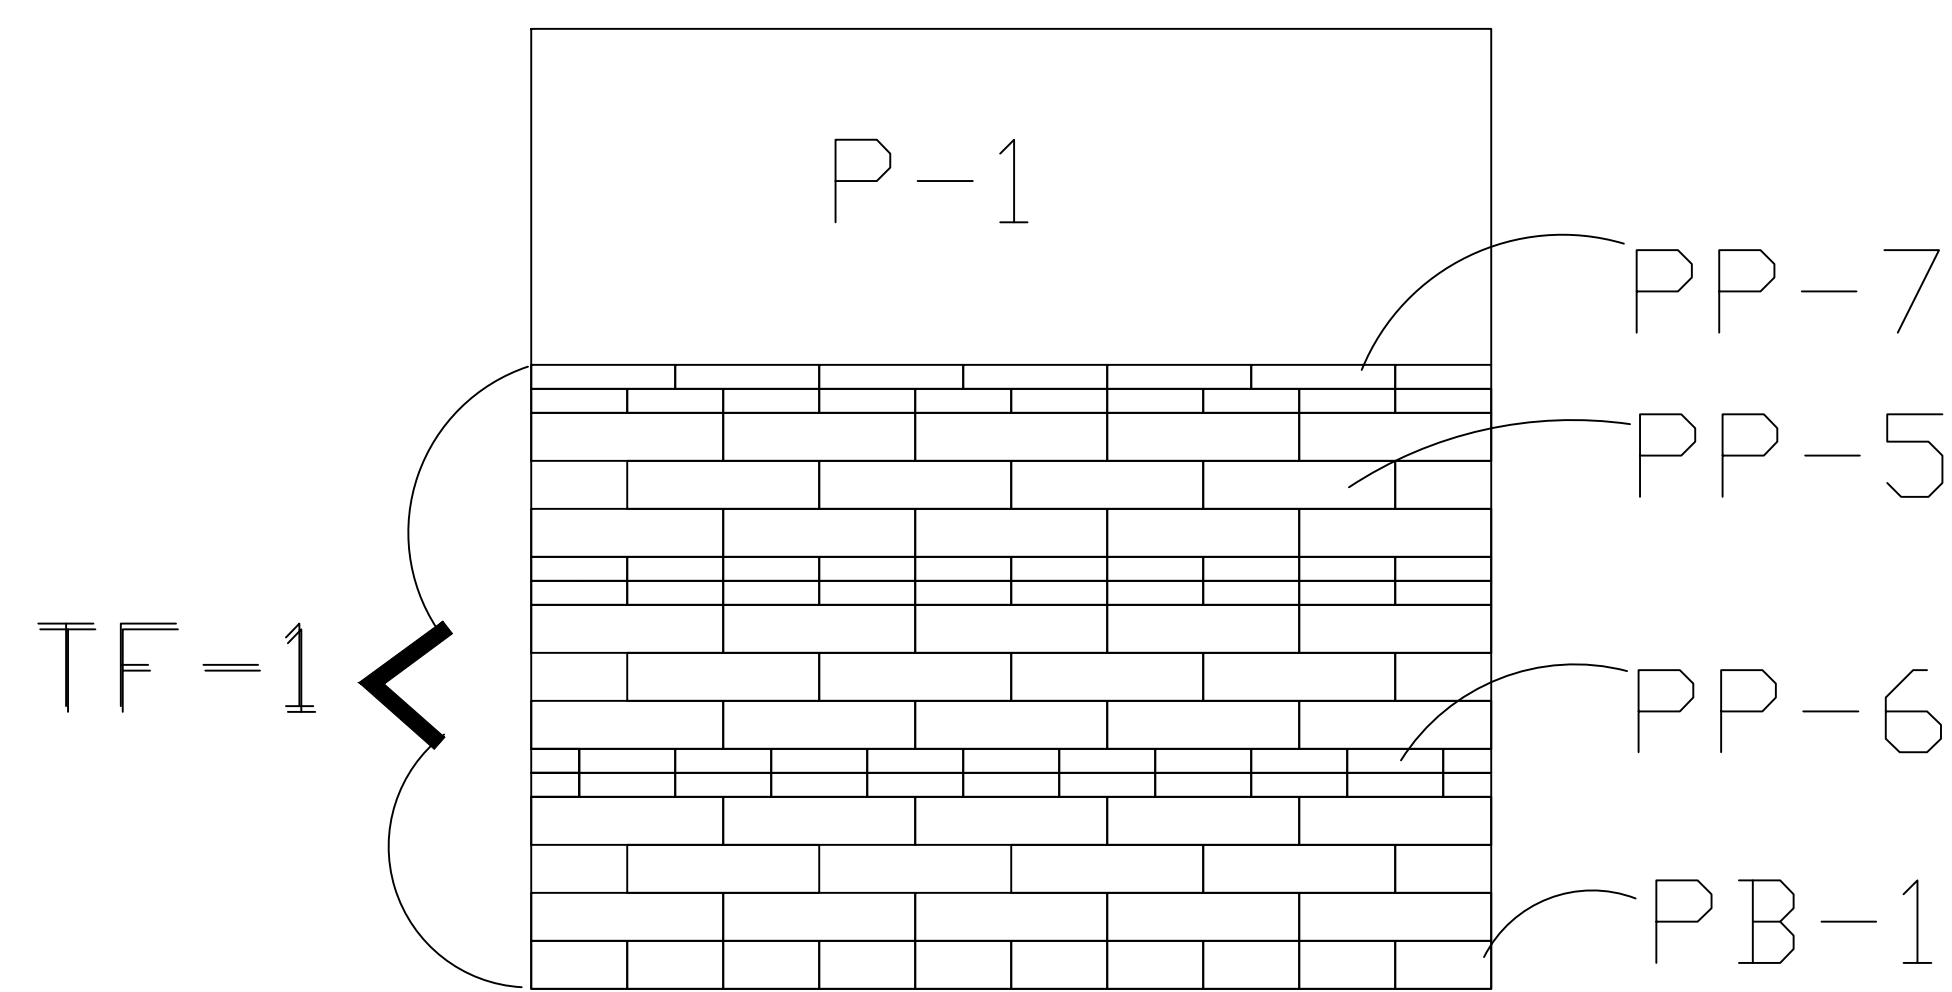

WALL PATTERN

Drawing Title: FEMALE BEDROOMS	Project Title 8TH FLOOR AND DOM WOMEN'S RESTROOMS	Date 5/15/12	
		Project No. 539-12-108	
	Building Number 064	A-7	

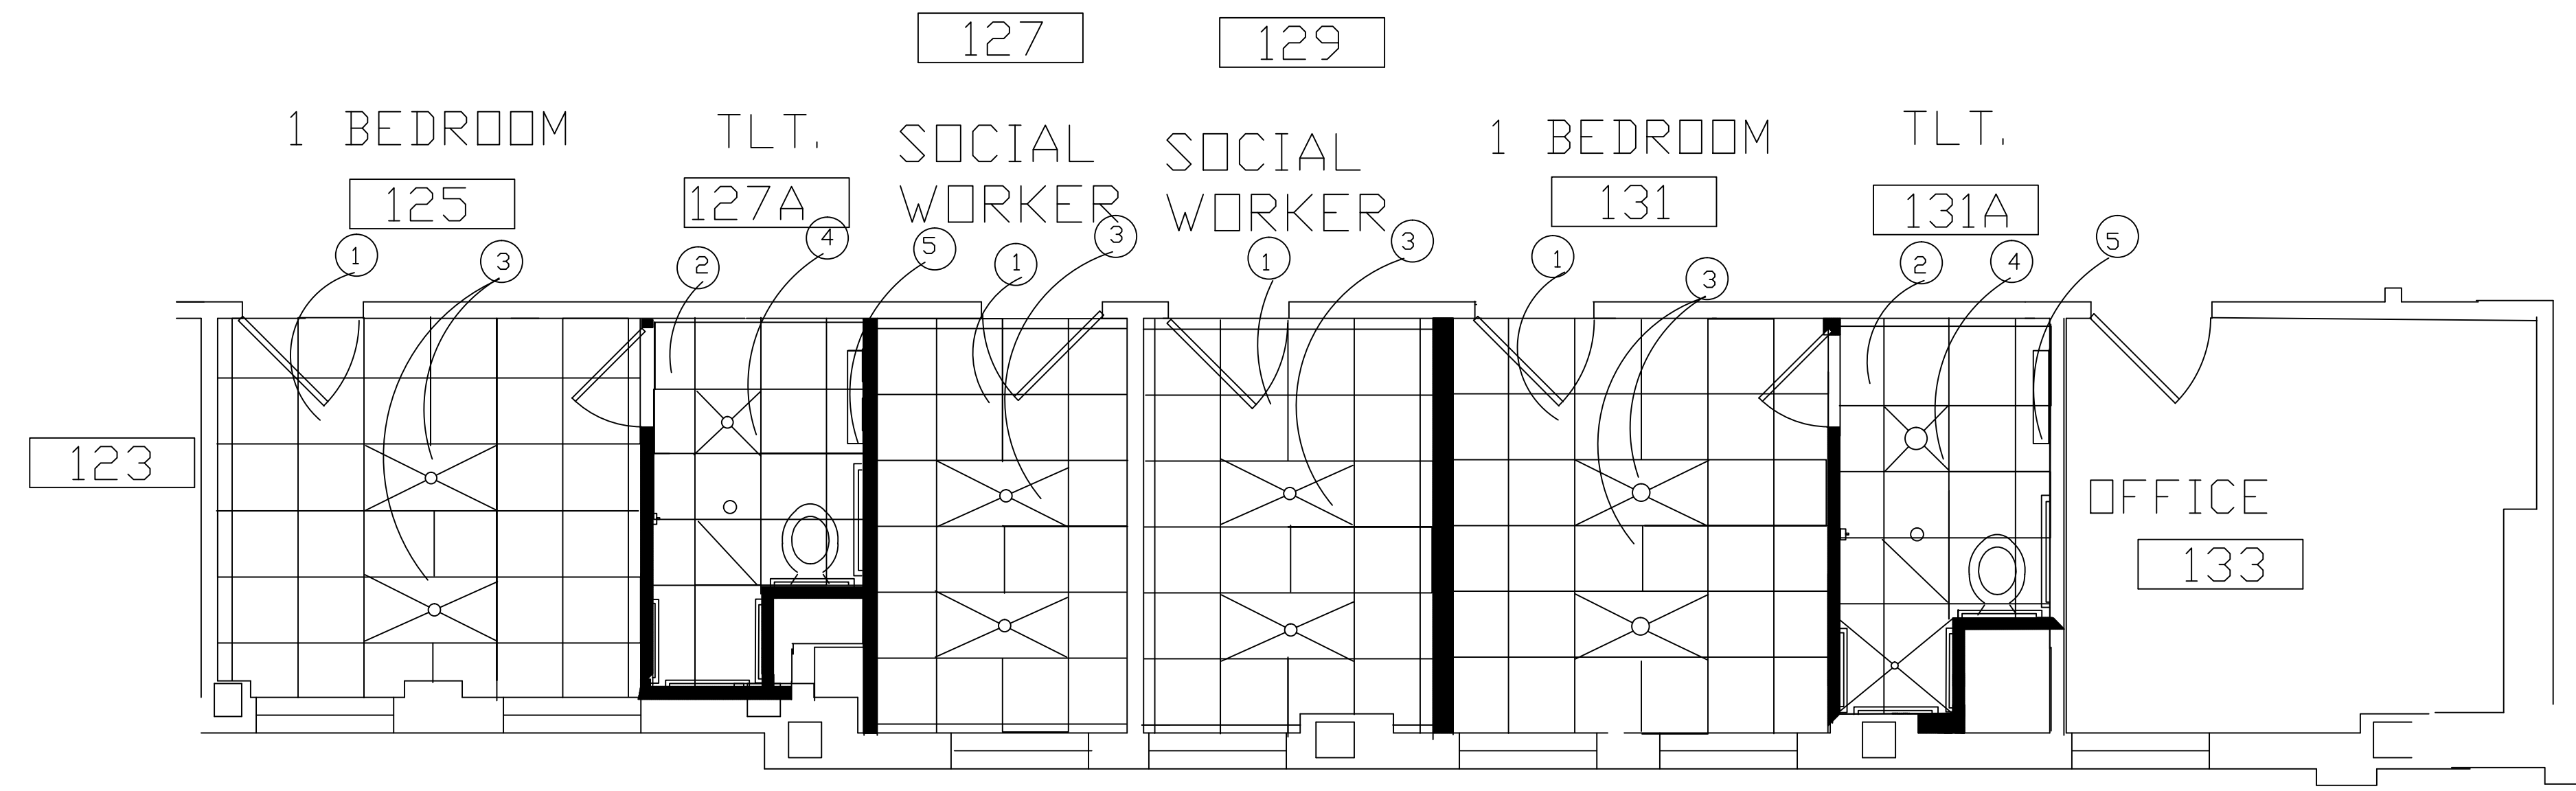

REFLECTED CEILING BEDROOMS NEW WORK PLAN

SCALE: 1/4" = 1'

REFLECTED CEILING WORK: ○


1.) ACOUSTICAL CEILING TILE BY ARMSTRONG "CORTEGA" #770 WHITE 2'X2' TILE. WHITE GRID

2.) ACOUSTICAL CEILING TILE BY ARMSTRONG "CLEAN ROOM VL" #868 WHITE 2'X2' TILE. WHITE GRID.

3.) 2'X4' RECESSED FLUORESCENT FIXTURE; T-8; MODEL COLUMBIA #EPC24-232G-DL SERIES OR EQUAL BY DAYBRITE OR LITHONIA.

4.) 2'X2' RECESSED FLUORESCENT FIXTURE; T-8; BY DRYBRITE OR LITHONIA.

5.) WALL MOUNTED 36" LIGHTING FIXTURE; MULTI-STATGE PHOSPHATE BONDING TREATMENT AND WHITE BAKED ENAMEL; RAPID START 32W-T8 LAMPS; EF28C; NOMINAL 36" IN LENGTH, MODEL: FINELITE #S17-VCF-PF-T8-00-00-0.88 OR EQUAL BY DECO LIGHTING.

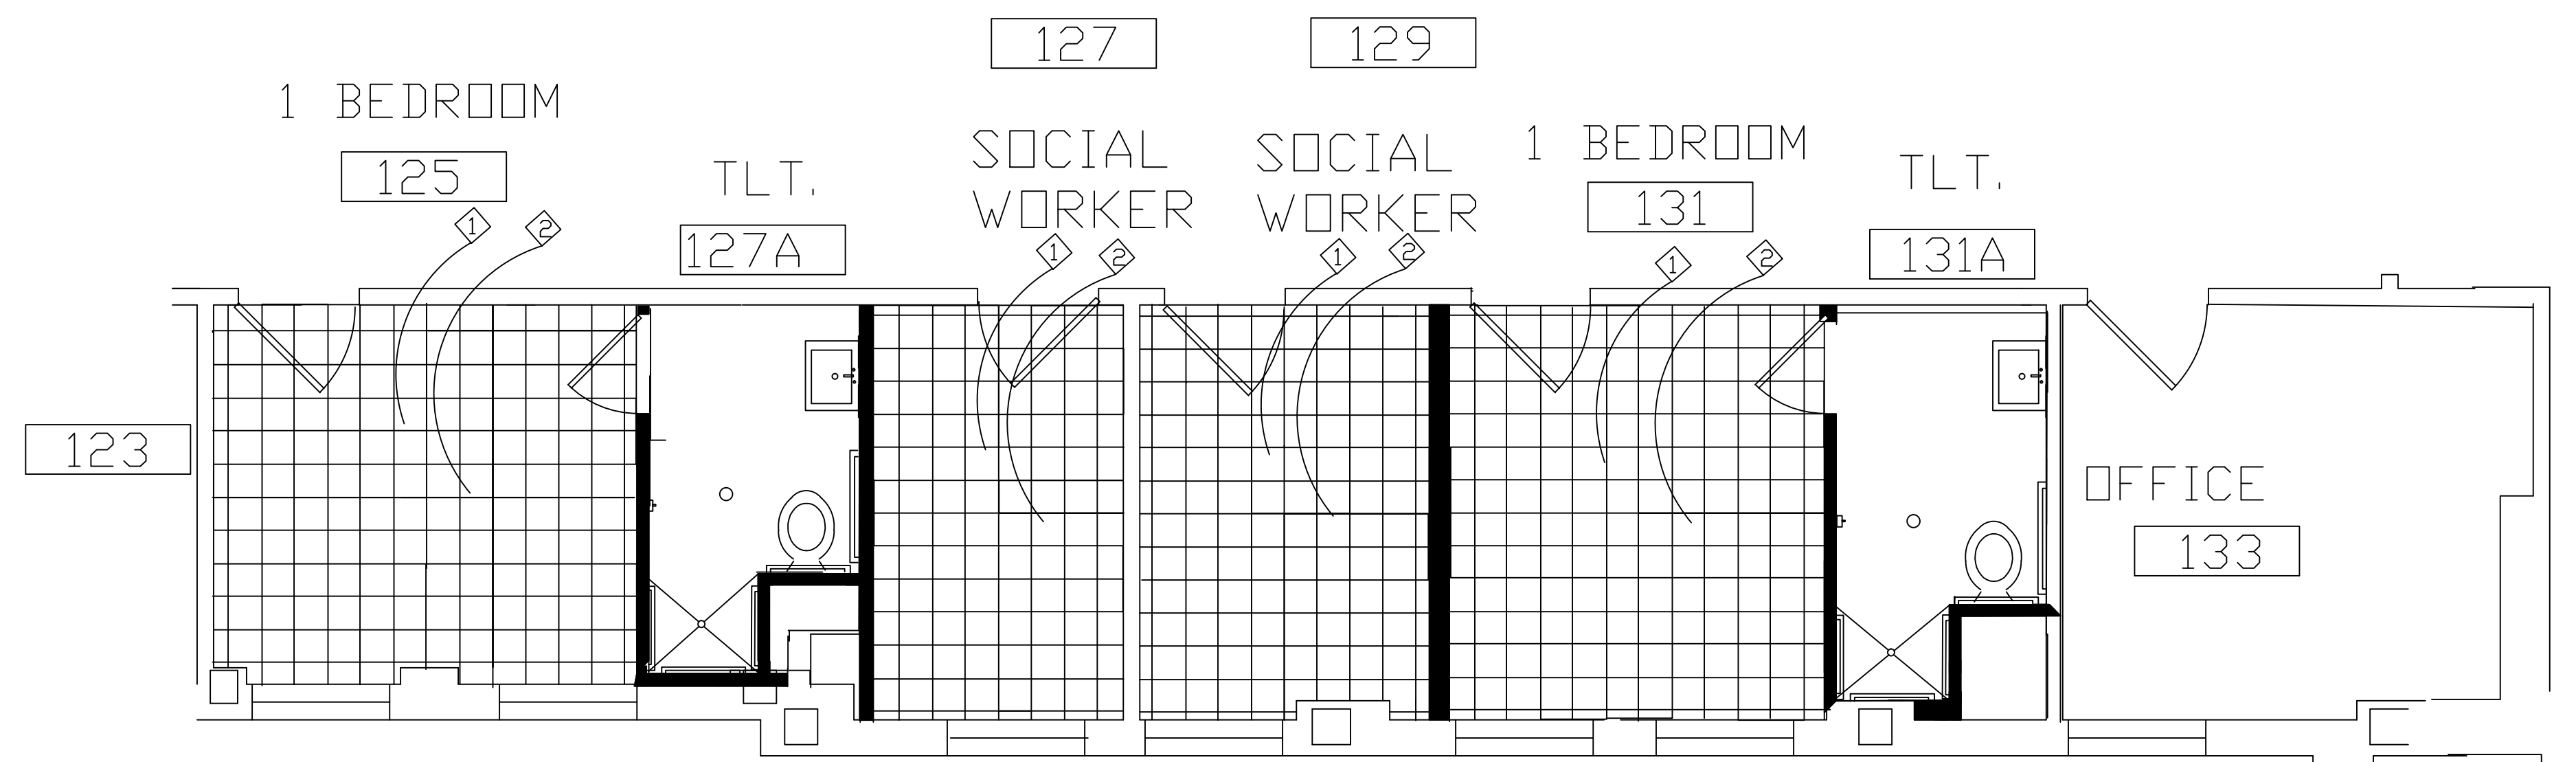

BEDROOMS NEW WORK FLOOR PLAN

SCALE: 1/4" = 1'

NEW FLOOR WORK: ◇

1.) INSTALL VINYL COMPOSITION TILE BY ARMSTRONG; STANDARD EXCELON" 51811 ANTIQUE WHITE.


2.) RUBBER COVE BASE 6" JOHNSONITE; 49 BEIGE.

GENERAL LEGEND:


- ⊠ AIR SUPPLY
- ⊠ AIR RETURN
- ⊠ 2'X2' LIGHT
- ⊠ 2'X4' LIGHT

Drawing Title: FEMALE BEDROOMS	Project Title: 8TH FLOOR AND DOM WOMEN'S RESTROOMS	Date: 5/15/12	
		Project No. 539-12-108	
	Building Number: 064	A-8	

Note: "Brand name or equal" products listed on this drawing are products used with-in our facilities. These listed products are for reference only. Product description are set forth in the specifications to included the salient physical, functional, or other characteristics of the referenced products that are essential to the minimum needs of the Government.

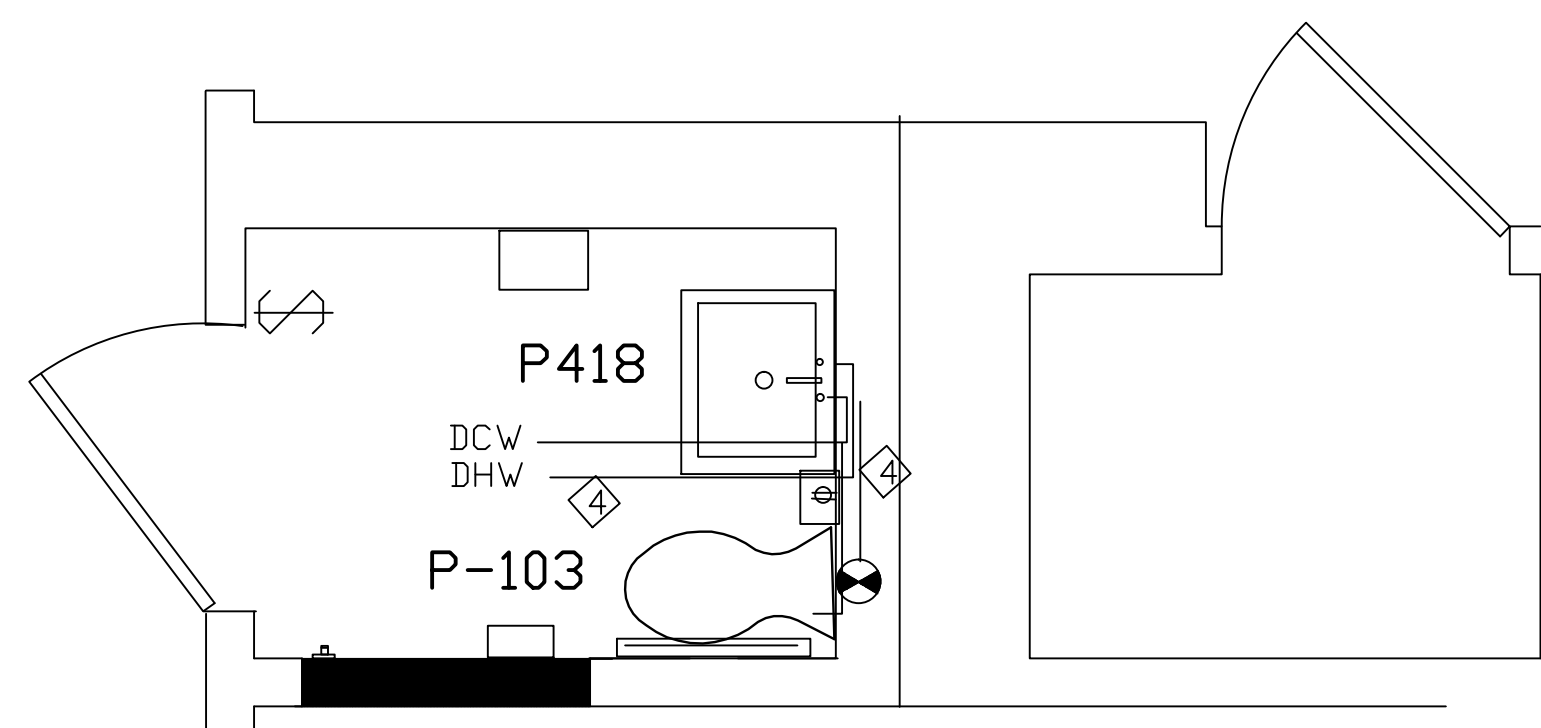

A Restroom-A811a

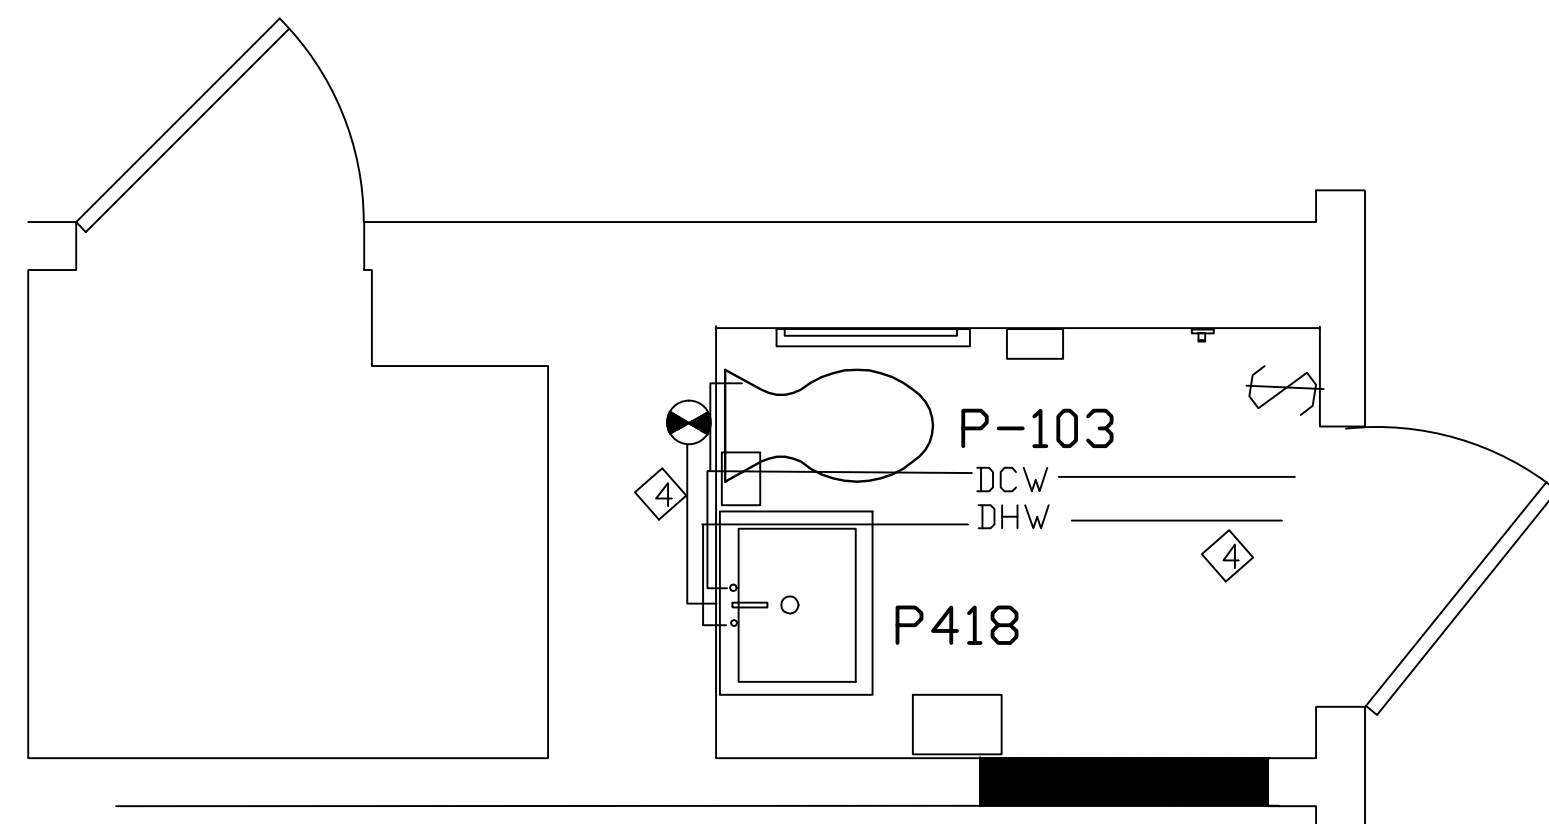


B Restroom-A811b

PLUMBING SCHEDULE




	ROOM #	SPACE	BASE MATERIALS	
P-103	A811A A811B	BATH	Toilet	Wall hung elongated toilet
P-418	A811A A811B	BATH	Lavatories	American Standard "Lucerne" 0355.012 on carrier; curved back with ADA protective shroud.
	A811A A811B	BATH	Faucets	Automatic : Sloan Q-ETF-770 (Electric Transformer Faucet)
	A811A A811B	BATH	Flushometer	Sloan 1.6 gallon, Automatic (electric) courtesy flushometer on toilets. Use battery operated type on toilets in lieu of hard-wired type. (Side Mount)
	A811A A811B	BATH	Sink Rap	Install cover beneath lavatories to conceal water and drain lines.

- NOTES:
- 1.) PROVIDE SEPARATE SLOAN #ETF-470 CHECK VALVE ON EACH INLET.
- 2.) P-103 ARE TO MATCH EXISTING CARRIER.
- 3.) ALL LAVATORY ARE TO HAVE LAVATORY SHIELD ENCLOSURE.
- 4.) EXISTING TO REMAIN.

Drawing Title:  A811A & A811B FLOOR PLAN	Project Title  8TH FLOOR AND DOM WOMEN'S RESTROOMS	Date 5/15/12	<div>VA</div> <div>Department of Veterans Affairs</div>
		Project No. 539-12-108	
	Building Number  001	P-1	

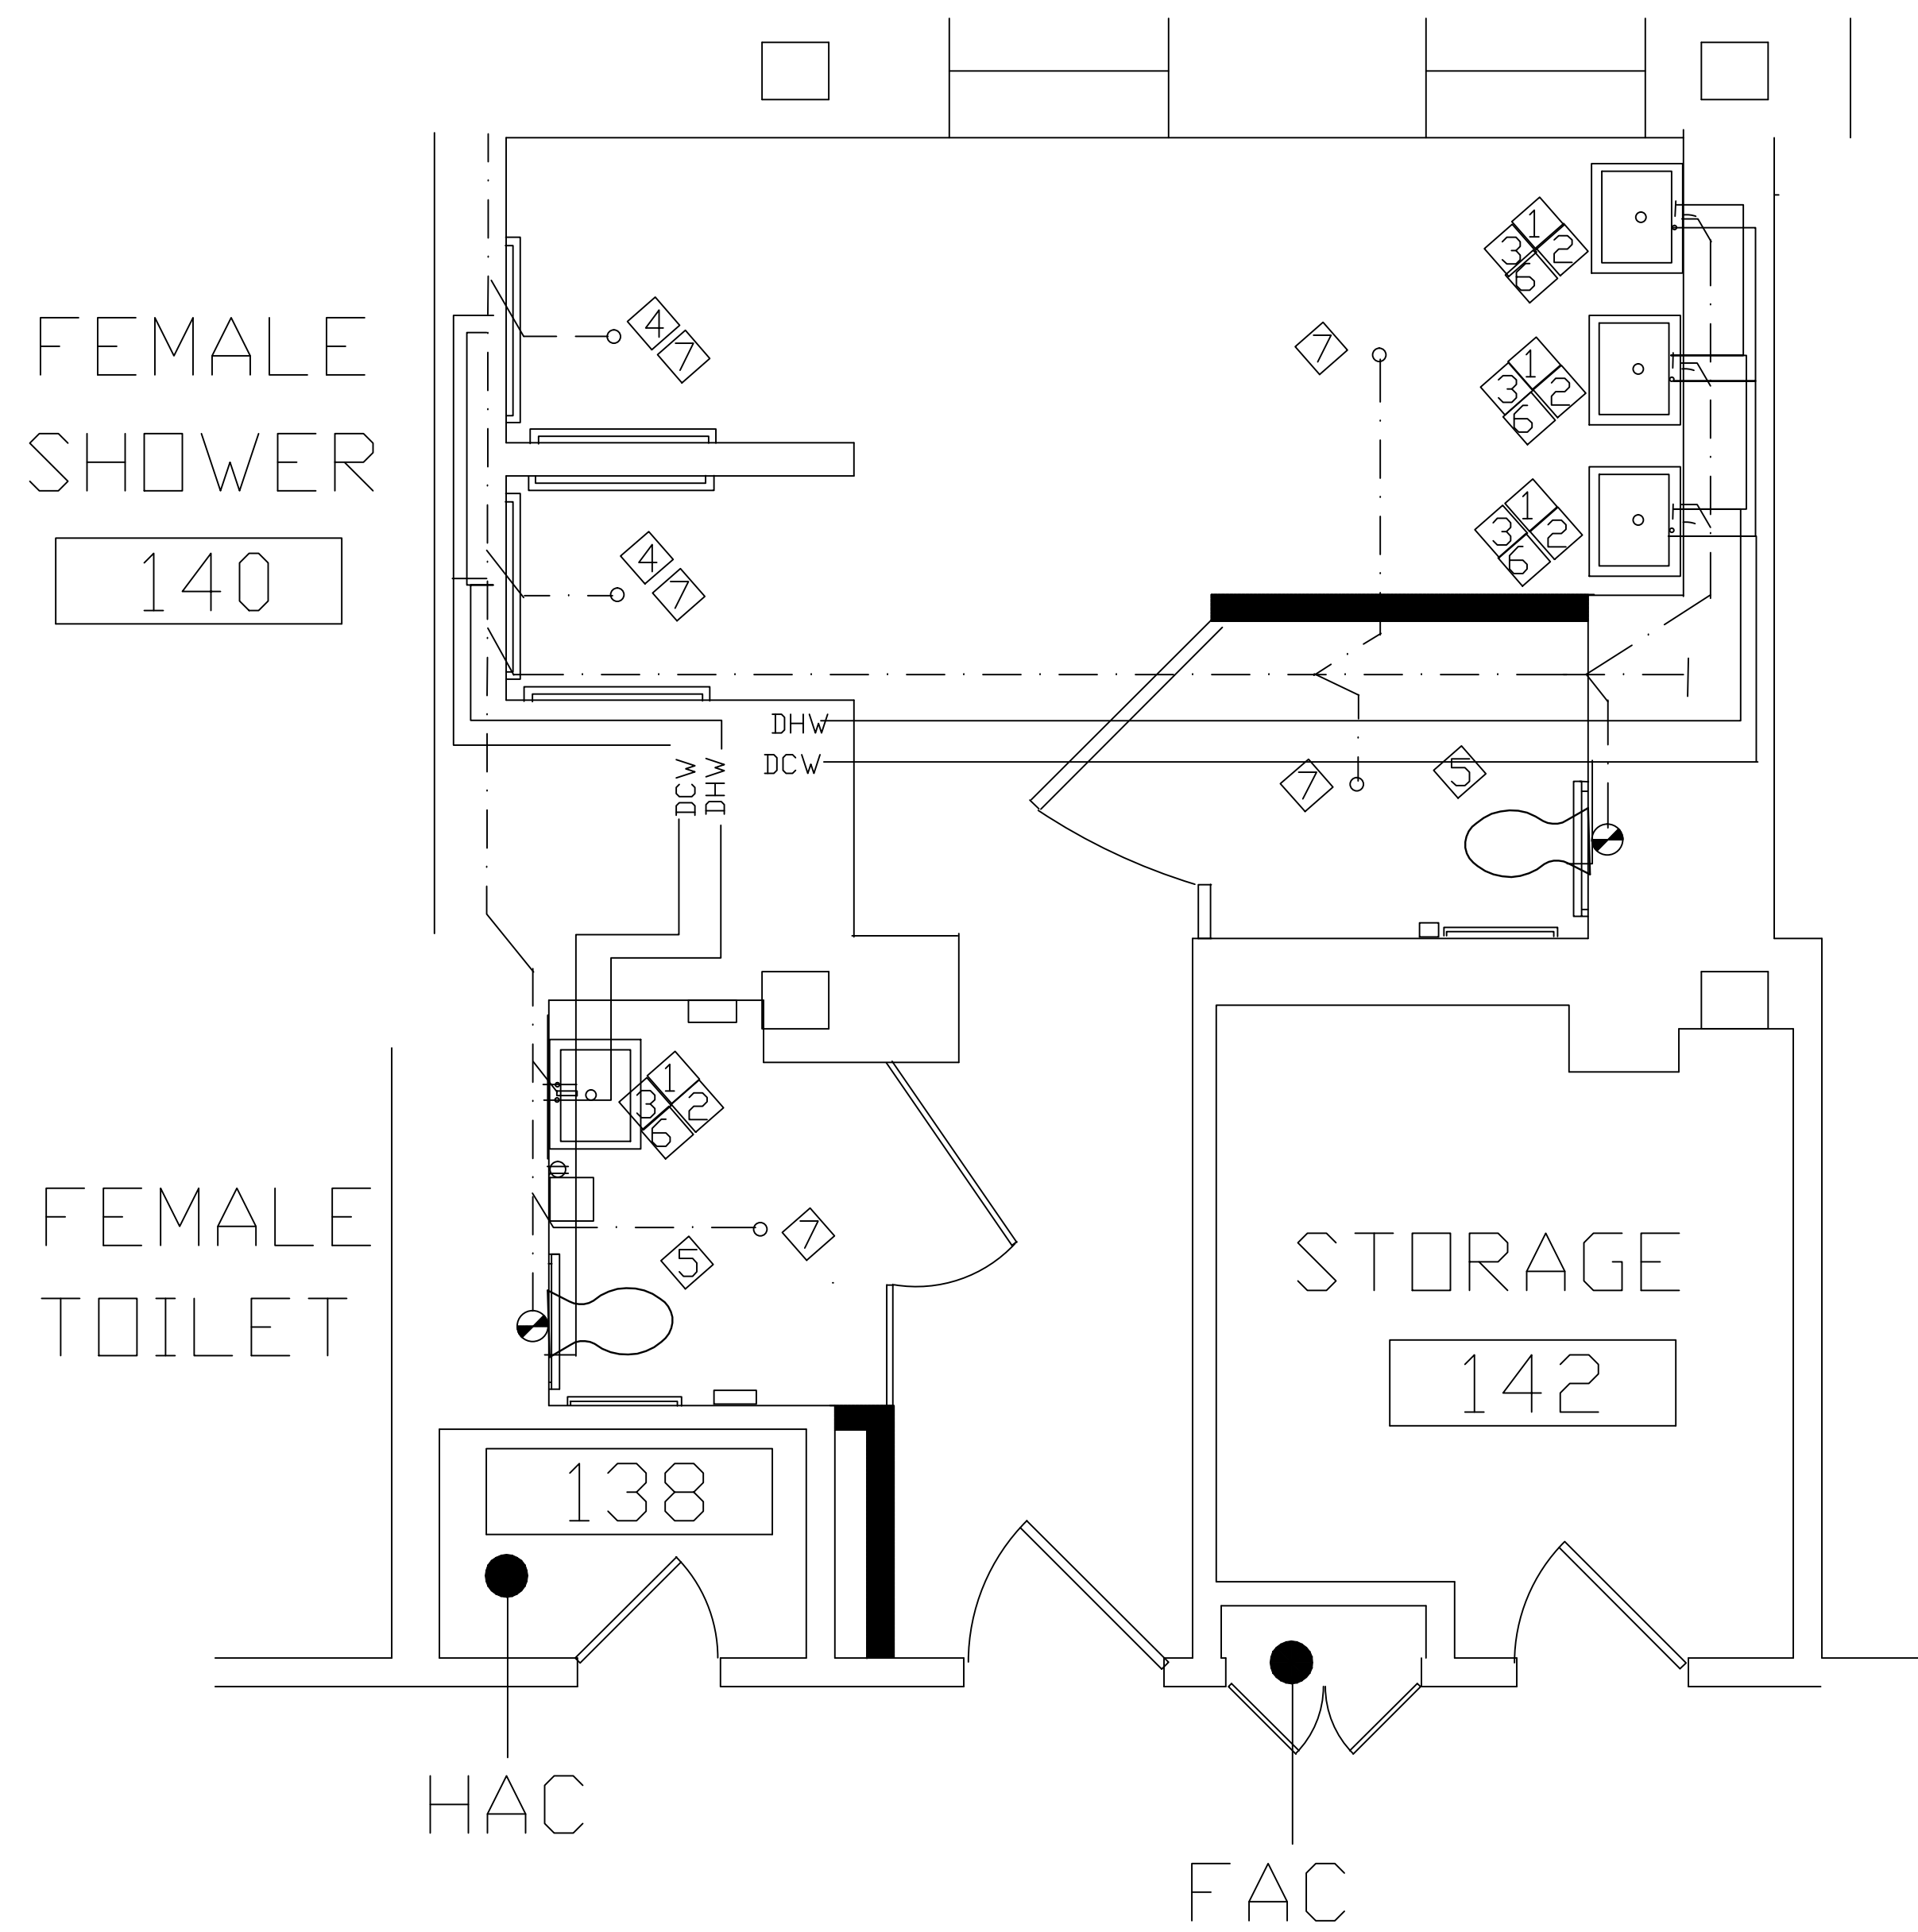

140 RESTROOM NEW WORK

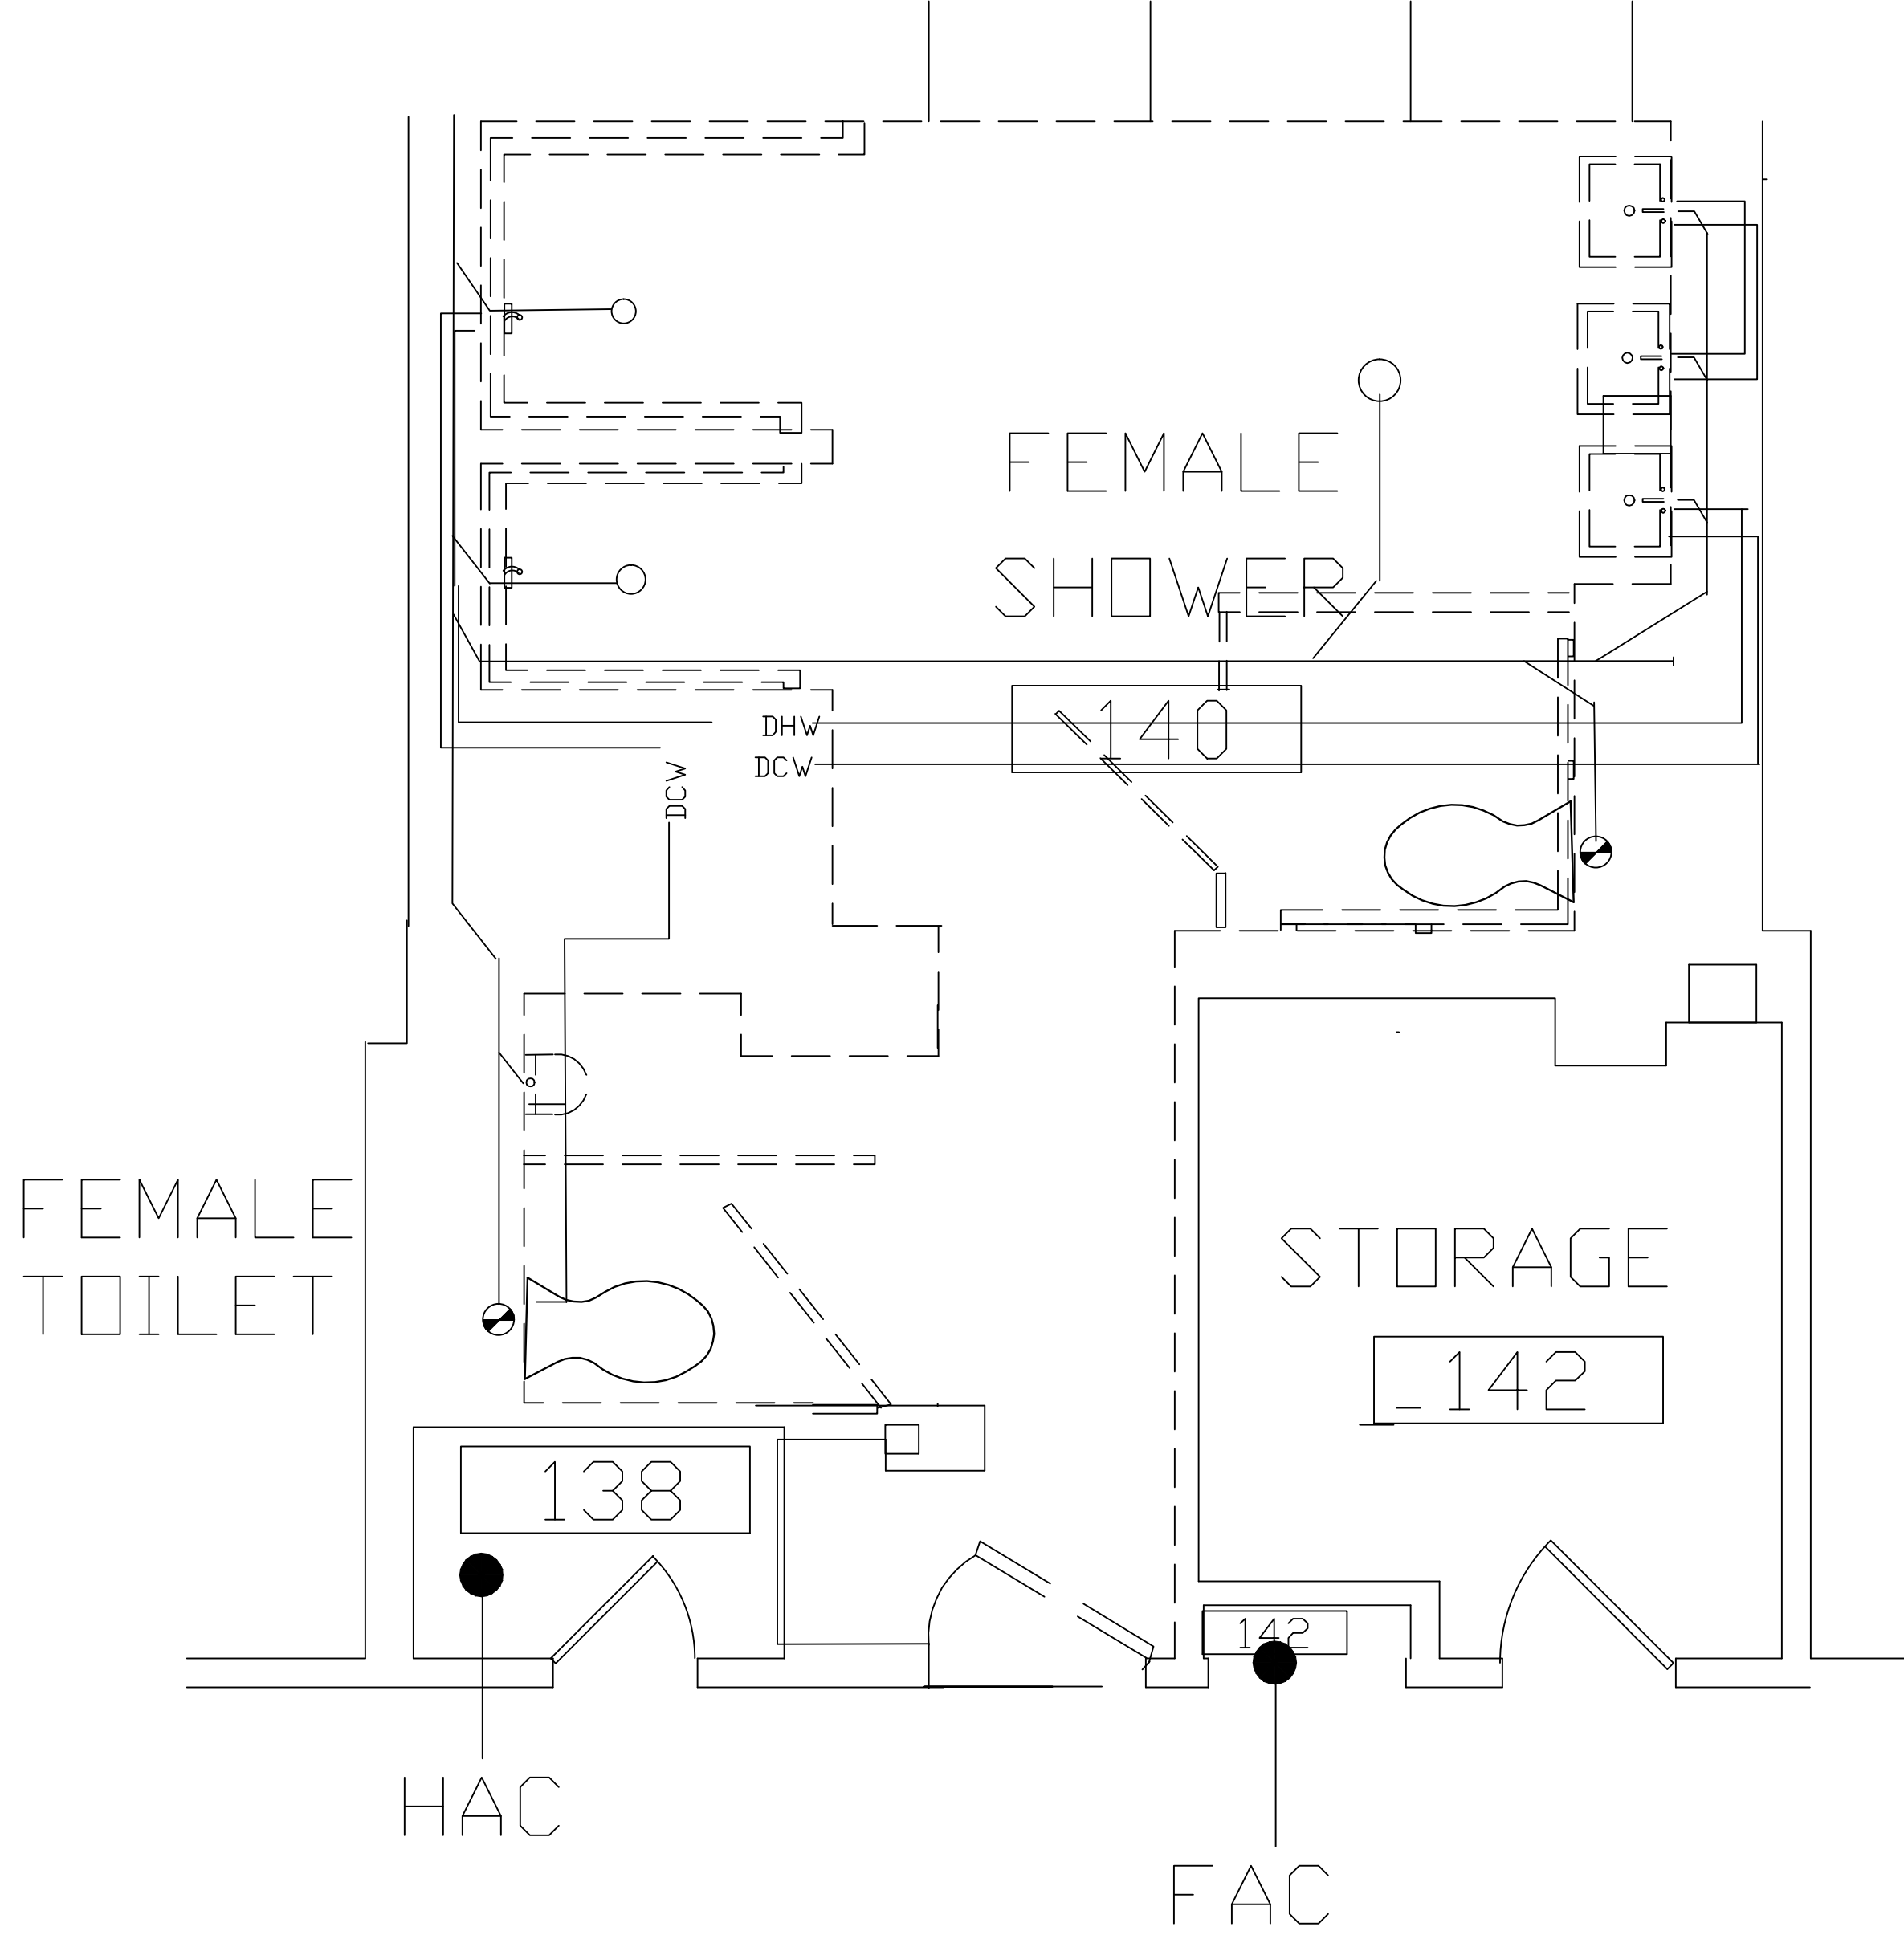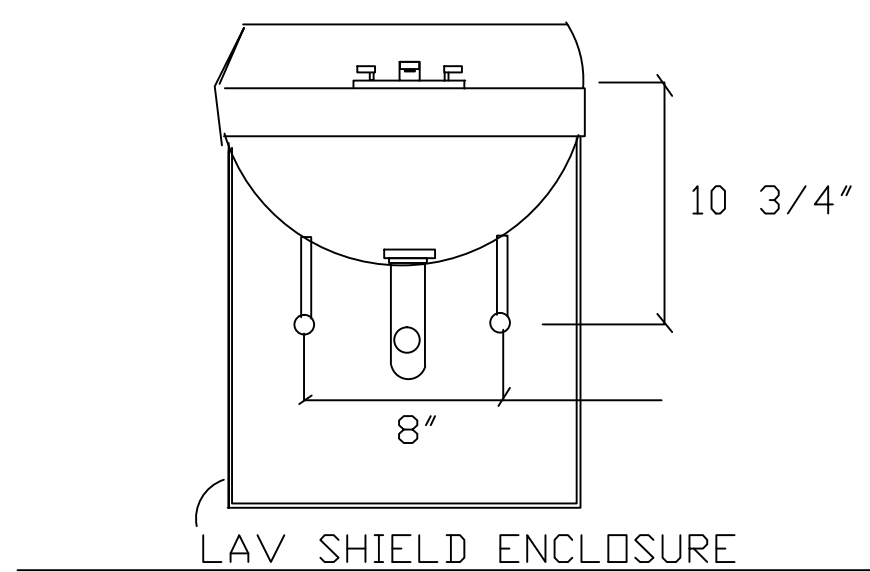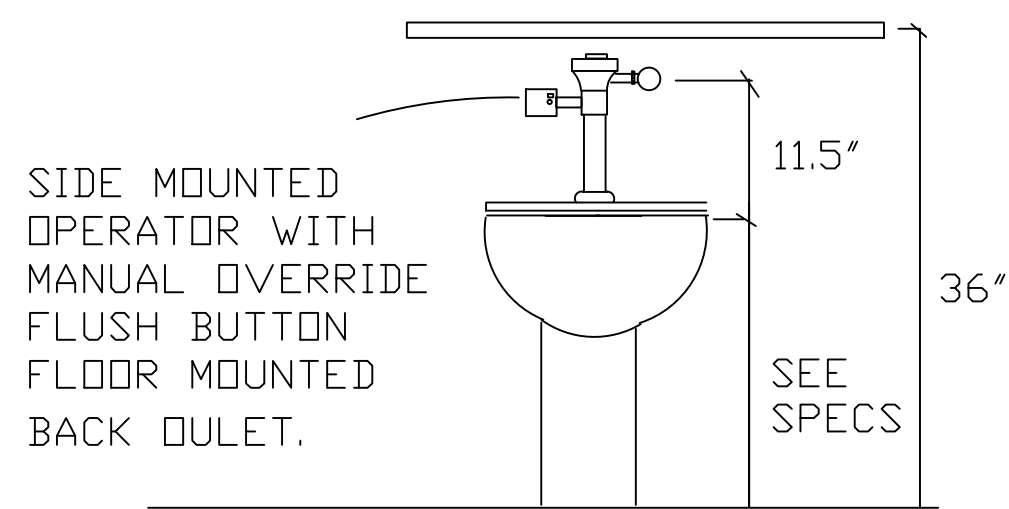

140 RESTROOM DEMOLITION PLAN

GENERAL NOTES:


- A.) All piping is located above the ceiling (at underside of structure in exposed structure areas) unless otherwise indicated.
- B.) Above ceiling utility space in certain areas is limited. Coordination between trades is critical, prior to installation of any work.
- C.) Location and sizes of existing piping have been determined from a review of existing drawings and on site inspections, where possible. Field verification of existing locations, elevations, inverts, sizes, direction of flow, ETC. shall be required prior to beginning new work.
- D.) New connections to existing piping will be the same size as the existing piping, unless otherwise noted.
- E.) The PC shall verify the exact size and location of all existing piping at points of connection and that there is adequate space to install all new piping required to complete this work.
- F.) All removed materials and equipment, so designated by the owner shall be turned over and placed where directed. All material and equipment, which the owner does not wish to retain shall become the property of the contractor responsible for the removal.


NEW CONSTRUCTION NOTES:

- 1.) Lavatories to be American Standard "Lucerne" 0355.012 on carriers; curved back.
- 2.) Faucets automatic : Sloan Q-ETF-770 (Electric Transformer); include a required check valves on both hot and cold lines at every sink location which uses such a mixing valve.
- 3.) lavatory carrier for American Standard "Lucerne" 0355.012.
- 4.) Shower valve to be Symmons Safetymix nonscald with Sloan Automatic Shower Head.
- 5.) Elongated bowl floor mounted back outlet.
- 6.) Install ADA plumbing shrouds under lavatory sinks.
- 7.) Replace existing floor drains and install new.


GENERAL LEGEND:

- DOUBLE DUPLEX RECEPTACLE
- DATA TELECOMMUNICATION
- SINGLE POLE LIGHT SWITCH
- 2' X 4' LIGHT
- EXISTING WALL
- DEMO WALL
- NEW WALL

Drawing Title: FEMALE SHOWER 140	Project Title 8TH FLOOR AND DOM WOMEN'S RESTROOMS	Date 5/15/12	 Department of Veterans Affairs
		Project No. 539-12-108	
	Building Number 064	P-2	

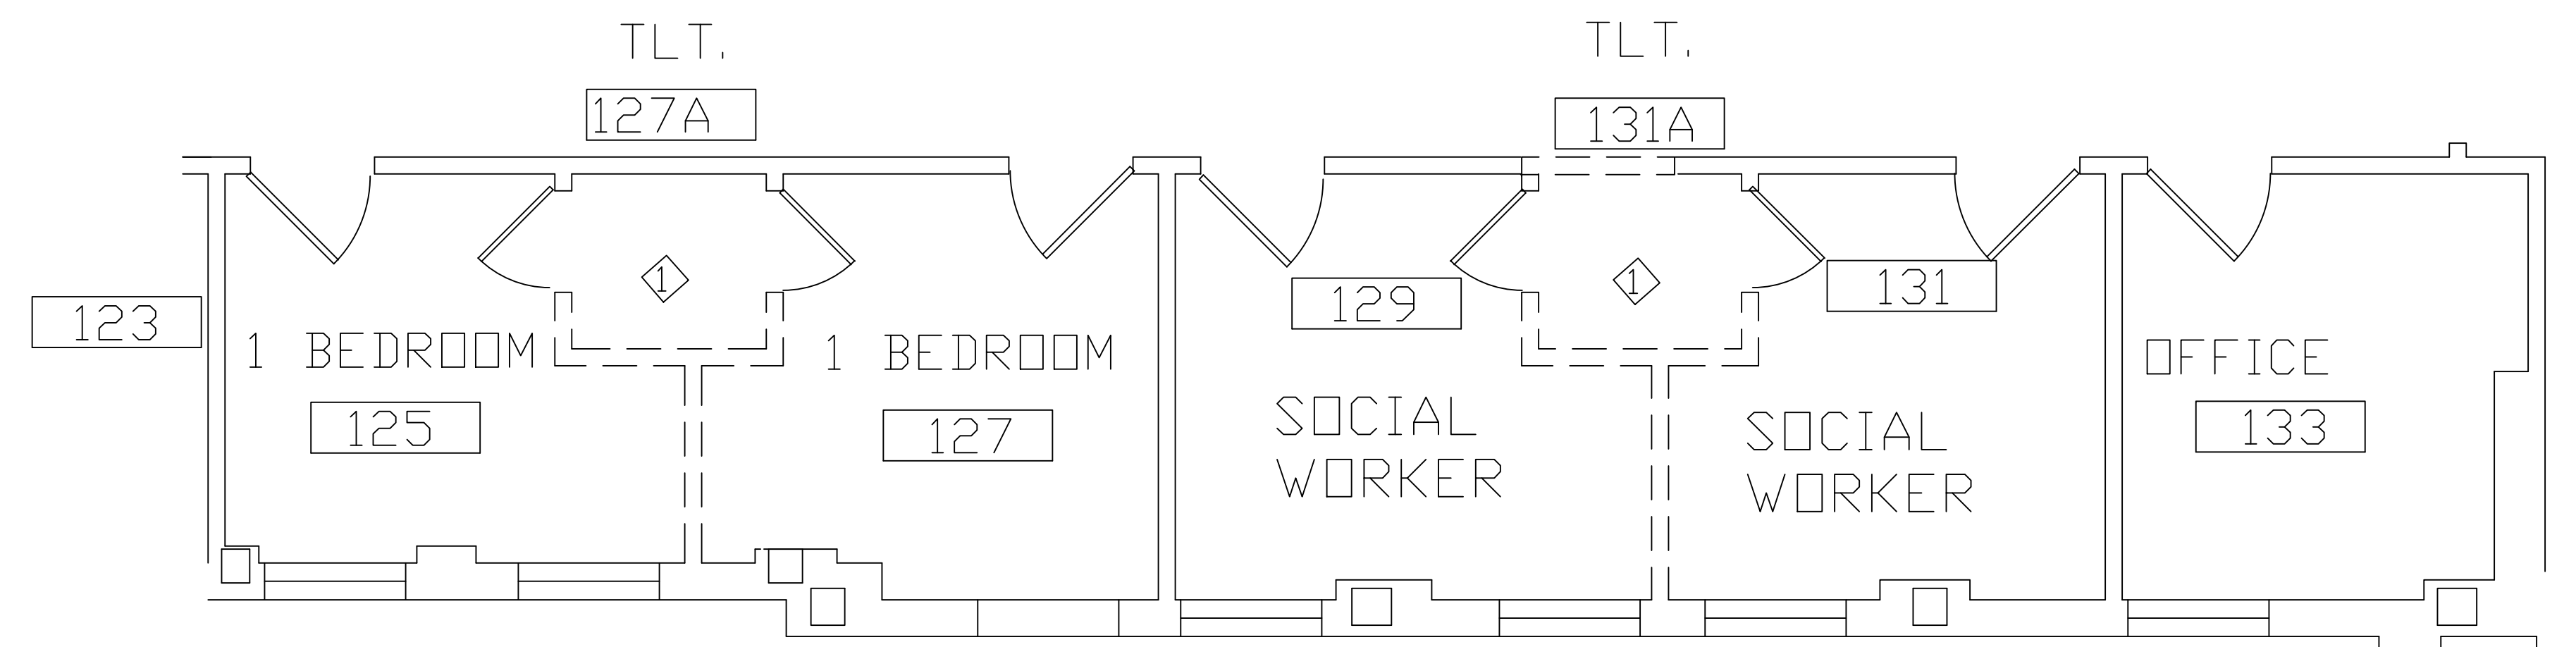

BEDROOMS DEMOLITION PLAN

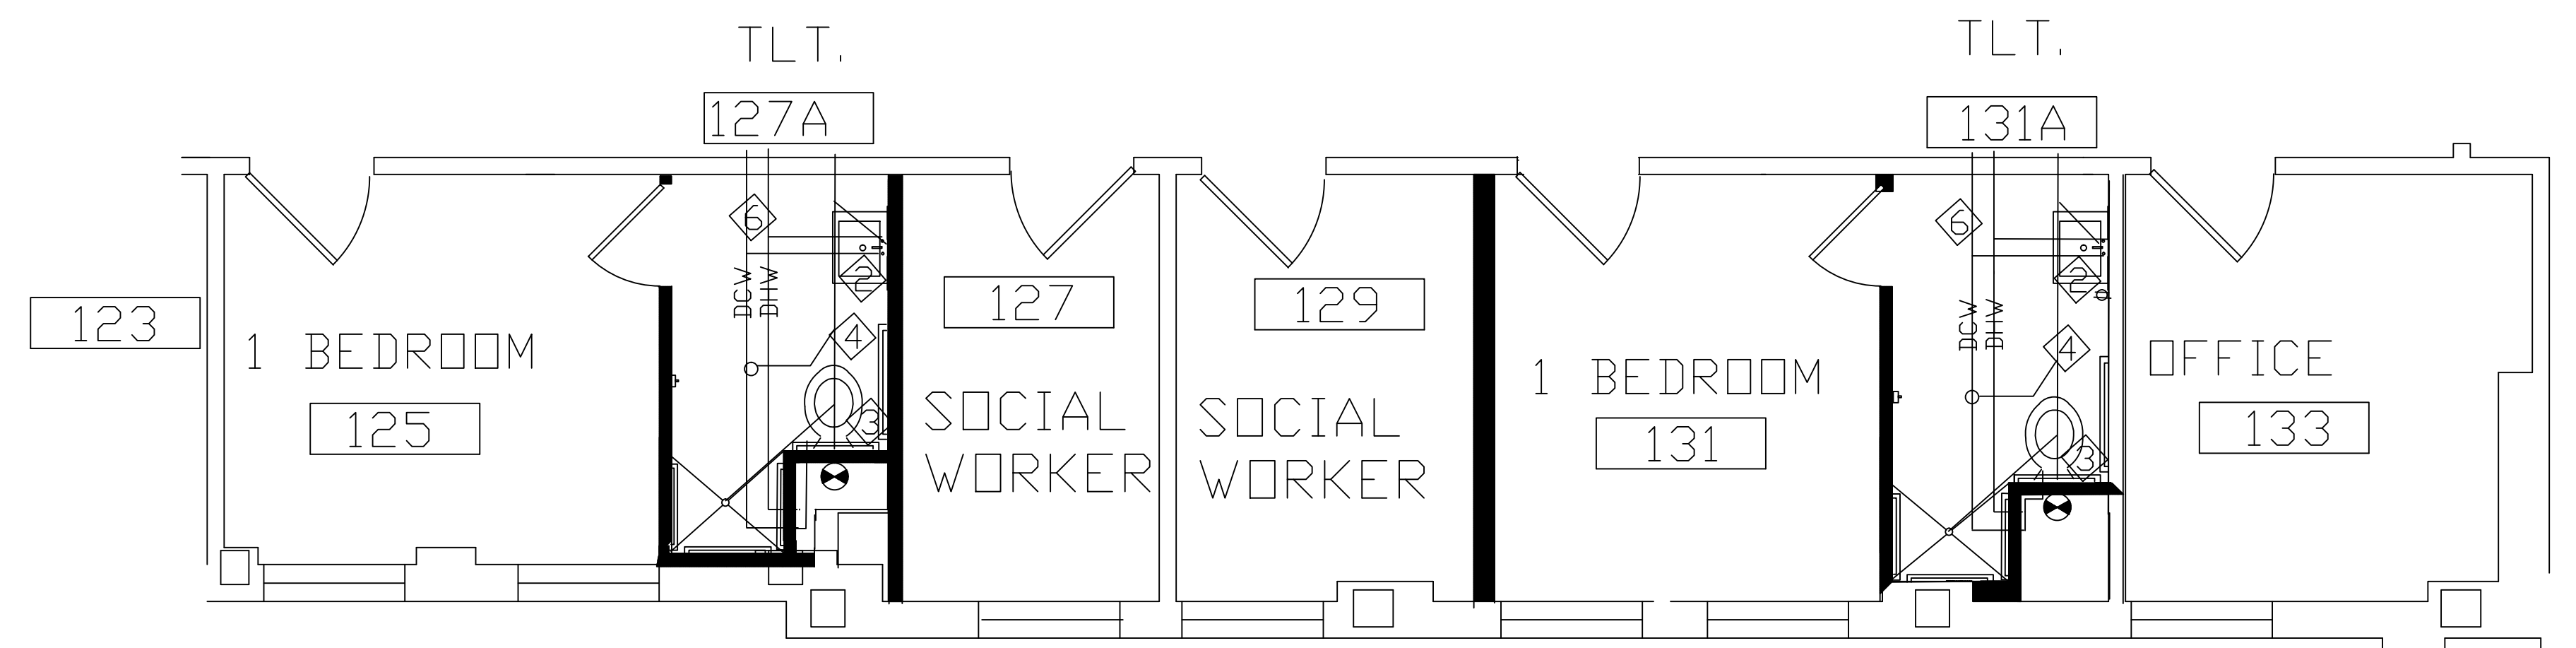

BEDROOMS NEW WORK PLAN

SCALE: 1/4" = 1'

GENERAL NOTES:

A. ALL PIPING IS LOCATED ABOVE THE CEILING (AT THE UNDERSIDE OF THE STRUCTURE IN EXPOSED STRUCTURE AREA) UNLESS OTHERWISE NOTED.

B. ABOVE CEILING UTILITY SPACE IN CERTAIN AREAS IS LIMITED , COORDINATION WITH ALL TRADES IS CRITICAL PRIOR TO INSTALLATION OF ANY WORK.

C. LOCATION AND SIZE OF PIPING HAVE BEEN DETERMINED FROM SITE INSPECTIONS, WHERE POSSIBLE. FIELD VERIFICATION EXACT LOCATIONS AND SIZES IS REQUIRED TO DETERMINE ELEVATIONS , INVERTS, DIRECTION OF FLOW, ETC. SHALL BE REQUIRED PRIOR TO BEGINNING NEW WORK.

C. NEW CONNECTIONS TO EXISTING PIPING SHALL BE WITH THE SAME SIZE AS THE EXISTING PIPING, UNLESS OTHERWISE NOTED.

D. THE P.C. SHALL VERIFY THE EXACT SIZE AND LOCATION OF ALL EXISTING PIPING AT POINTS OF CONNECTION AND THAT THERE IS ADEQUATE SPACE TO INSTALL ALL NEW PIPING REQUIRED TO COMPLETE THIS WORK.

E. ALL MATERIAL AND EQUIPMENT, WHICH THE OWNER DOES NOT WISH TO RETAIN, SHALL BECOME THE PROPERTY OF THE CONTRACTOR RESPONSIBLE FOR THE REMOVAL.

NOTES:

1.) REMOVE EXISTING FIXTURES OR ITEM OF EQUIPMENT (TYPE AS INDICATED) INCLUDING CARRIER (AS REQUIRED) AND ALL EXTRANEOUS PIPING BACK TO MAIN OR POINT OF NEW CONSTRUCTION. CAP ALL PIPING IN WALLS WHERE WALLS ARE TO REMAIN OR ABOVE CEILING OR BELOW THE FLOOR SLAB WHERE WALLS ARE TO BE REMOVED. NO PIPE OR PIPE STUBS ARE TO REMAIN VISIBLE IN FINISHED AREAS.


2.) BOW MOUNTED TRANSFORMER LOCATED ABOVE CEILING TO CONTROL SENSOR OPERATED FAUCETS ON FIXTURES BELOW. 120V-1PH POWER WILL BE LOCATED IN A WIRING BOX ABOVE THE CEILING BY THE E.C. A 0.75" CONDUIT (LDW VOLTAGE WIRING) STUBBED OUT ABOVE THE CEILING AND EXTENDED DOWN TO AND ELECTRICAL WALL BOX LOCATED BELOW EACH LAVATORY WILL BE PROVIDED BY THE E.C. ALL TRANSFORMERS AND ALL LDW VOLTAGE WIRING SHALL BE BY THE P.C. THE P.C. SHALL COORDINATE ALL WORK WITH THE E.C.


3.) CONNECT NEW FIXTURES TO EXISTING SUPPLY, WASTE AND VENT PIPING LACATED IN WALL OR CHASE AND ABOVE CEILING OF THE FLOOR SLAB.

4.) PIPING LOCATED ABOVE THE CEILING OF THE FLOOR BELOW.

5.) PIPING LOCATED IN CHASE/WALL ABOVE THE EXISTING FLOOR SLAB.


6.) EXTEND DCW AND DHW IN CHASE WALL TO SERVE NEW PLUMBING FIXTURES.

Drawing Title: FEMALE BEDROOMS	Project Title  8TH NORTH AND DOM WOMEN'S RESTROOMS	Date 5/15/12		
		Project No. 539-12-108		
	Building Number  064	P-3		

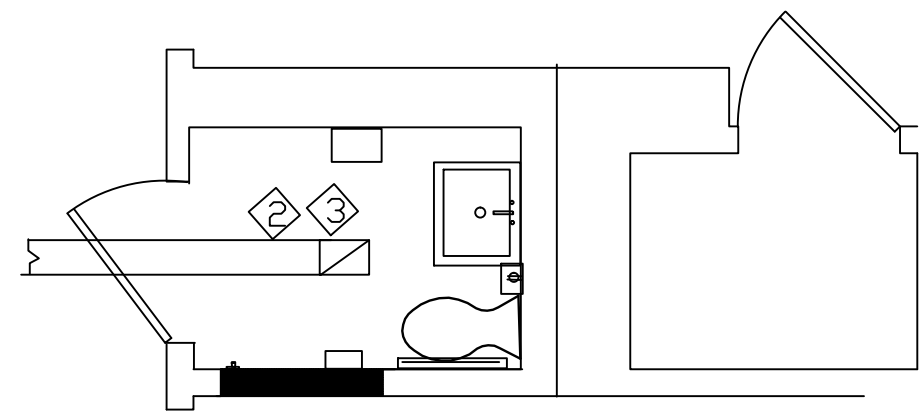


Restroom-A811a

SCALE: 1/4" = 1'

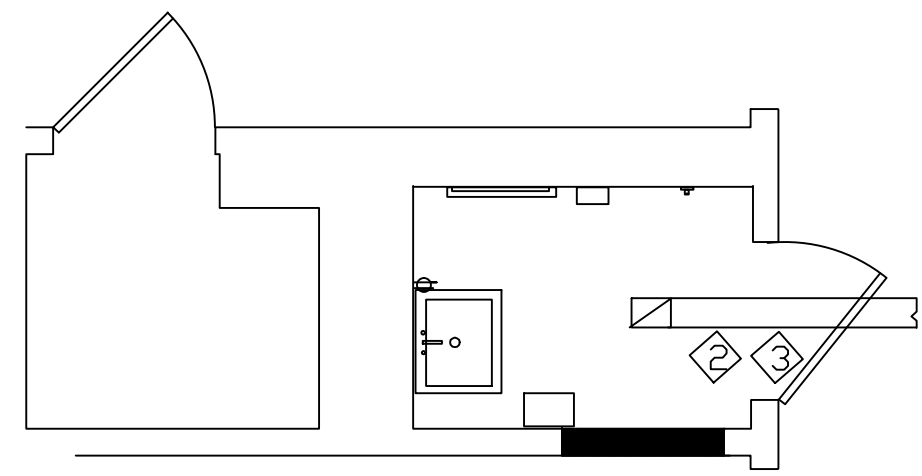

Restroom-A811b

SCALE: 1/4" = 1'

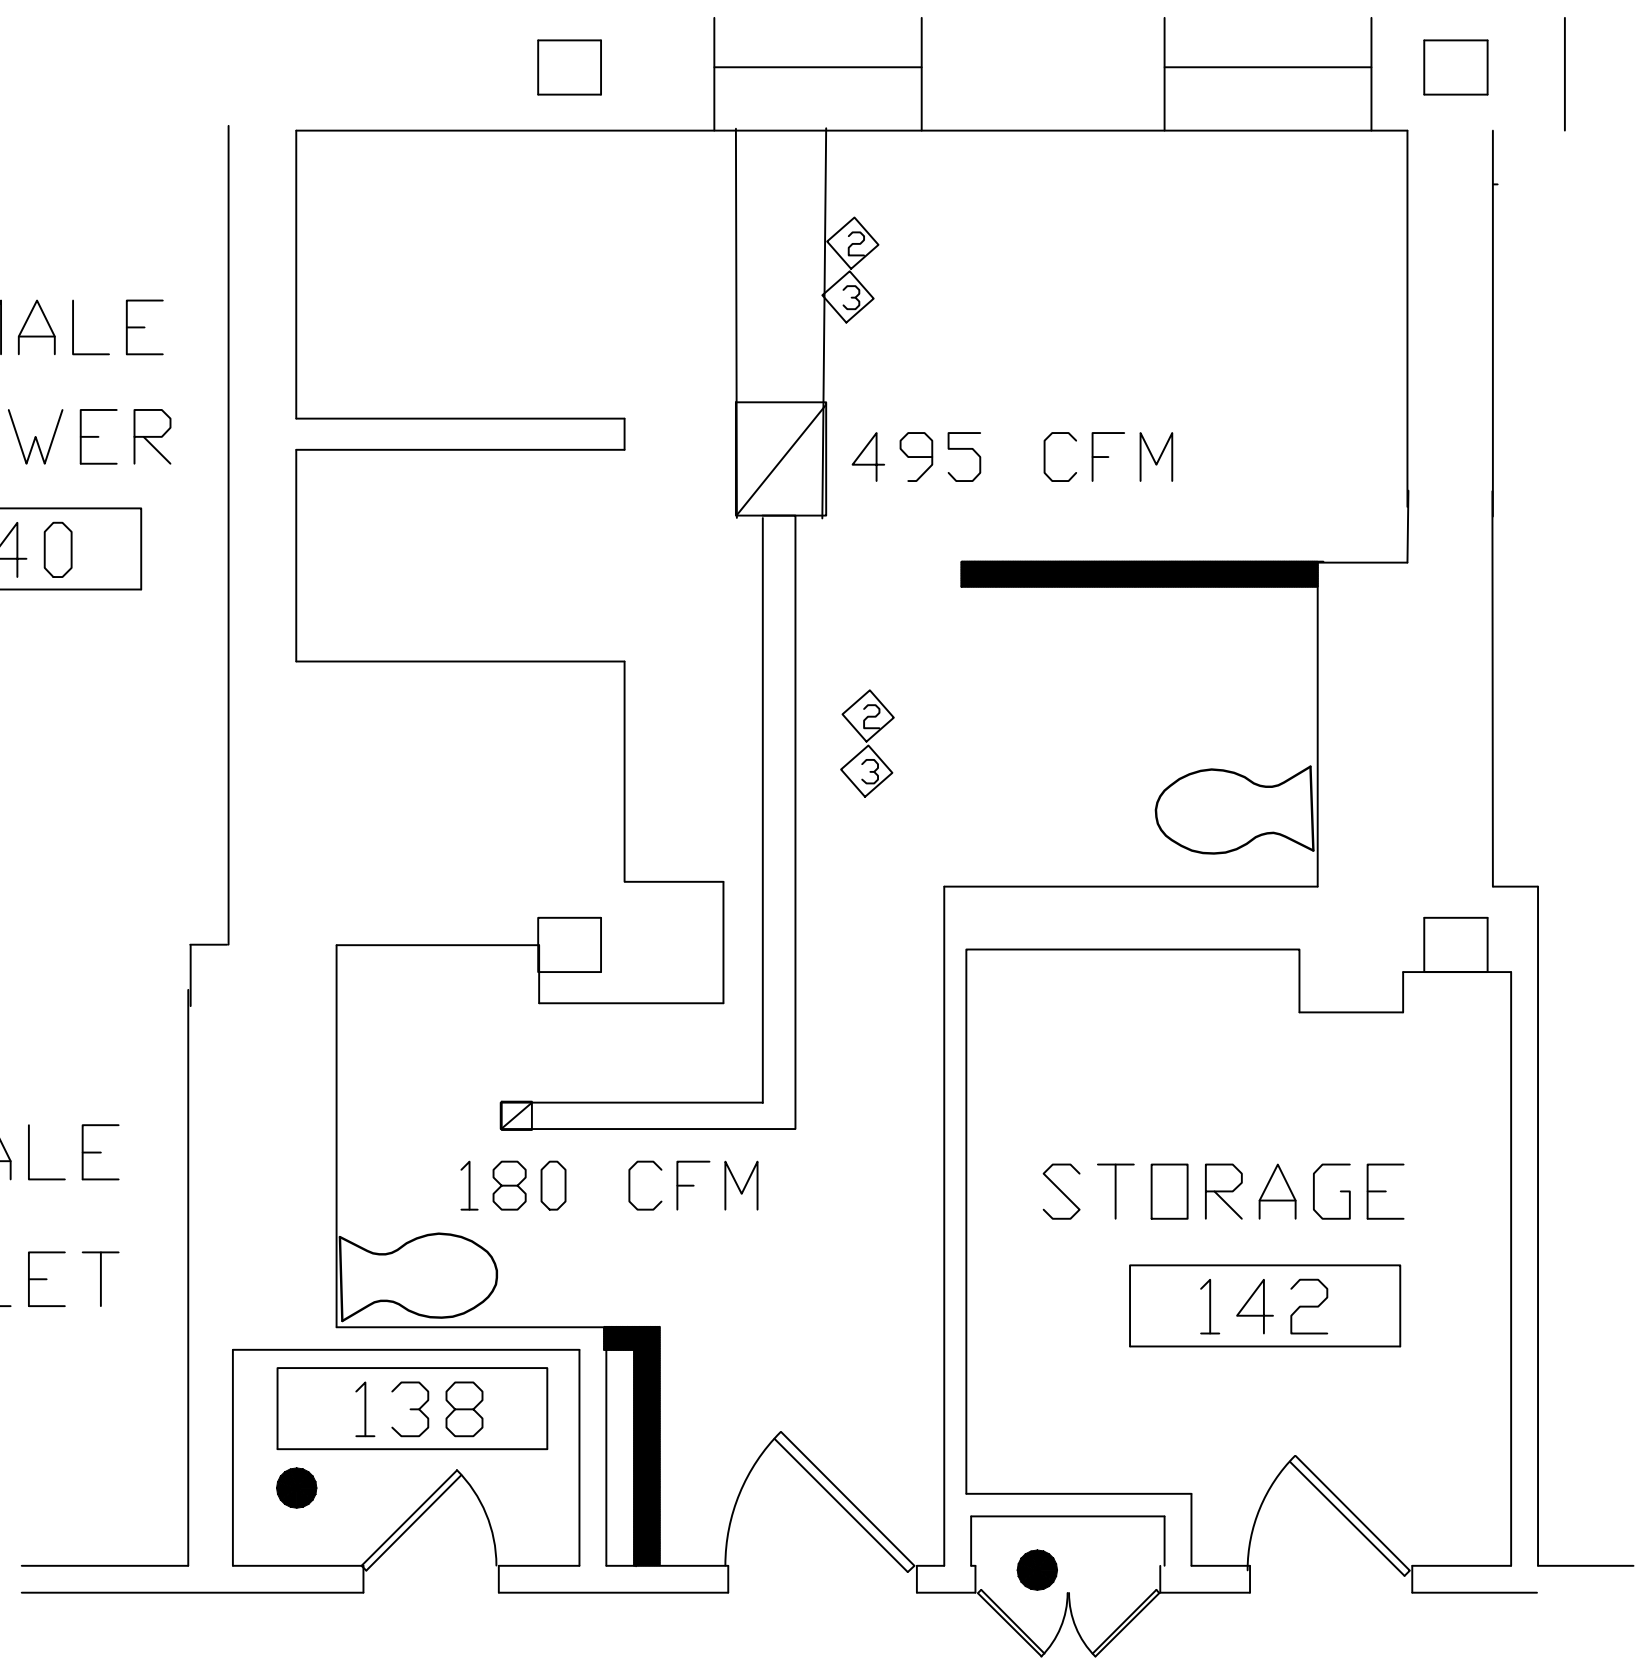


140 RESTROOM NEW WORK

SCALE: 1/4" = 1'

- NOTES:
- 1.) REQUIRES A NEW EXHAUST SYSTEM TO BE INSTALLED.
  - 2.) TO BE BALANCED FOR PROPER AIR CHANGES IDENTIFIED.
  - 3.) USE EXISTING DUCT WORK.

GENERAL LEGEND:


- AIR SUPPLY
- AIR RETURN

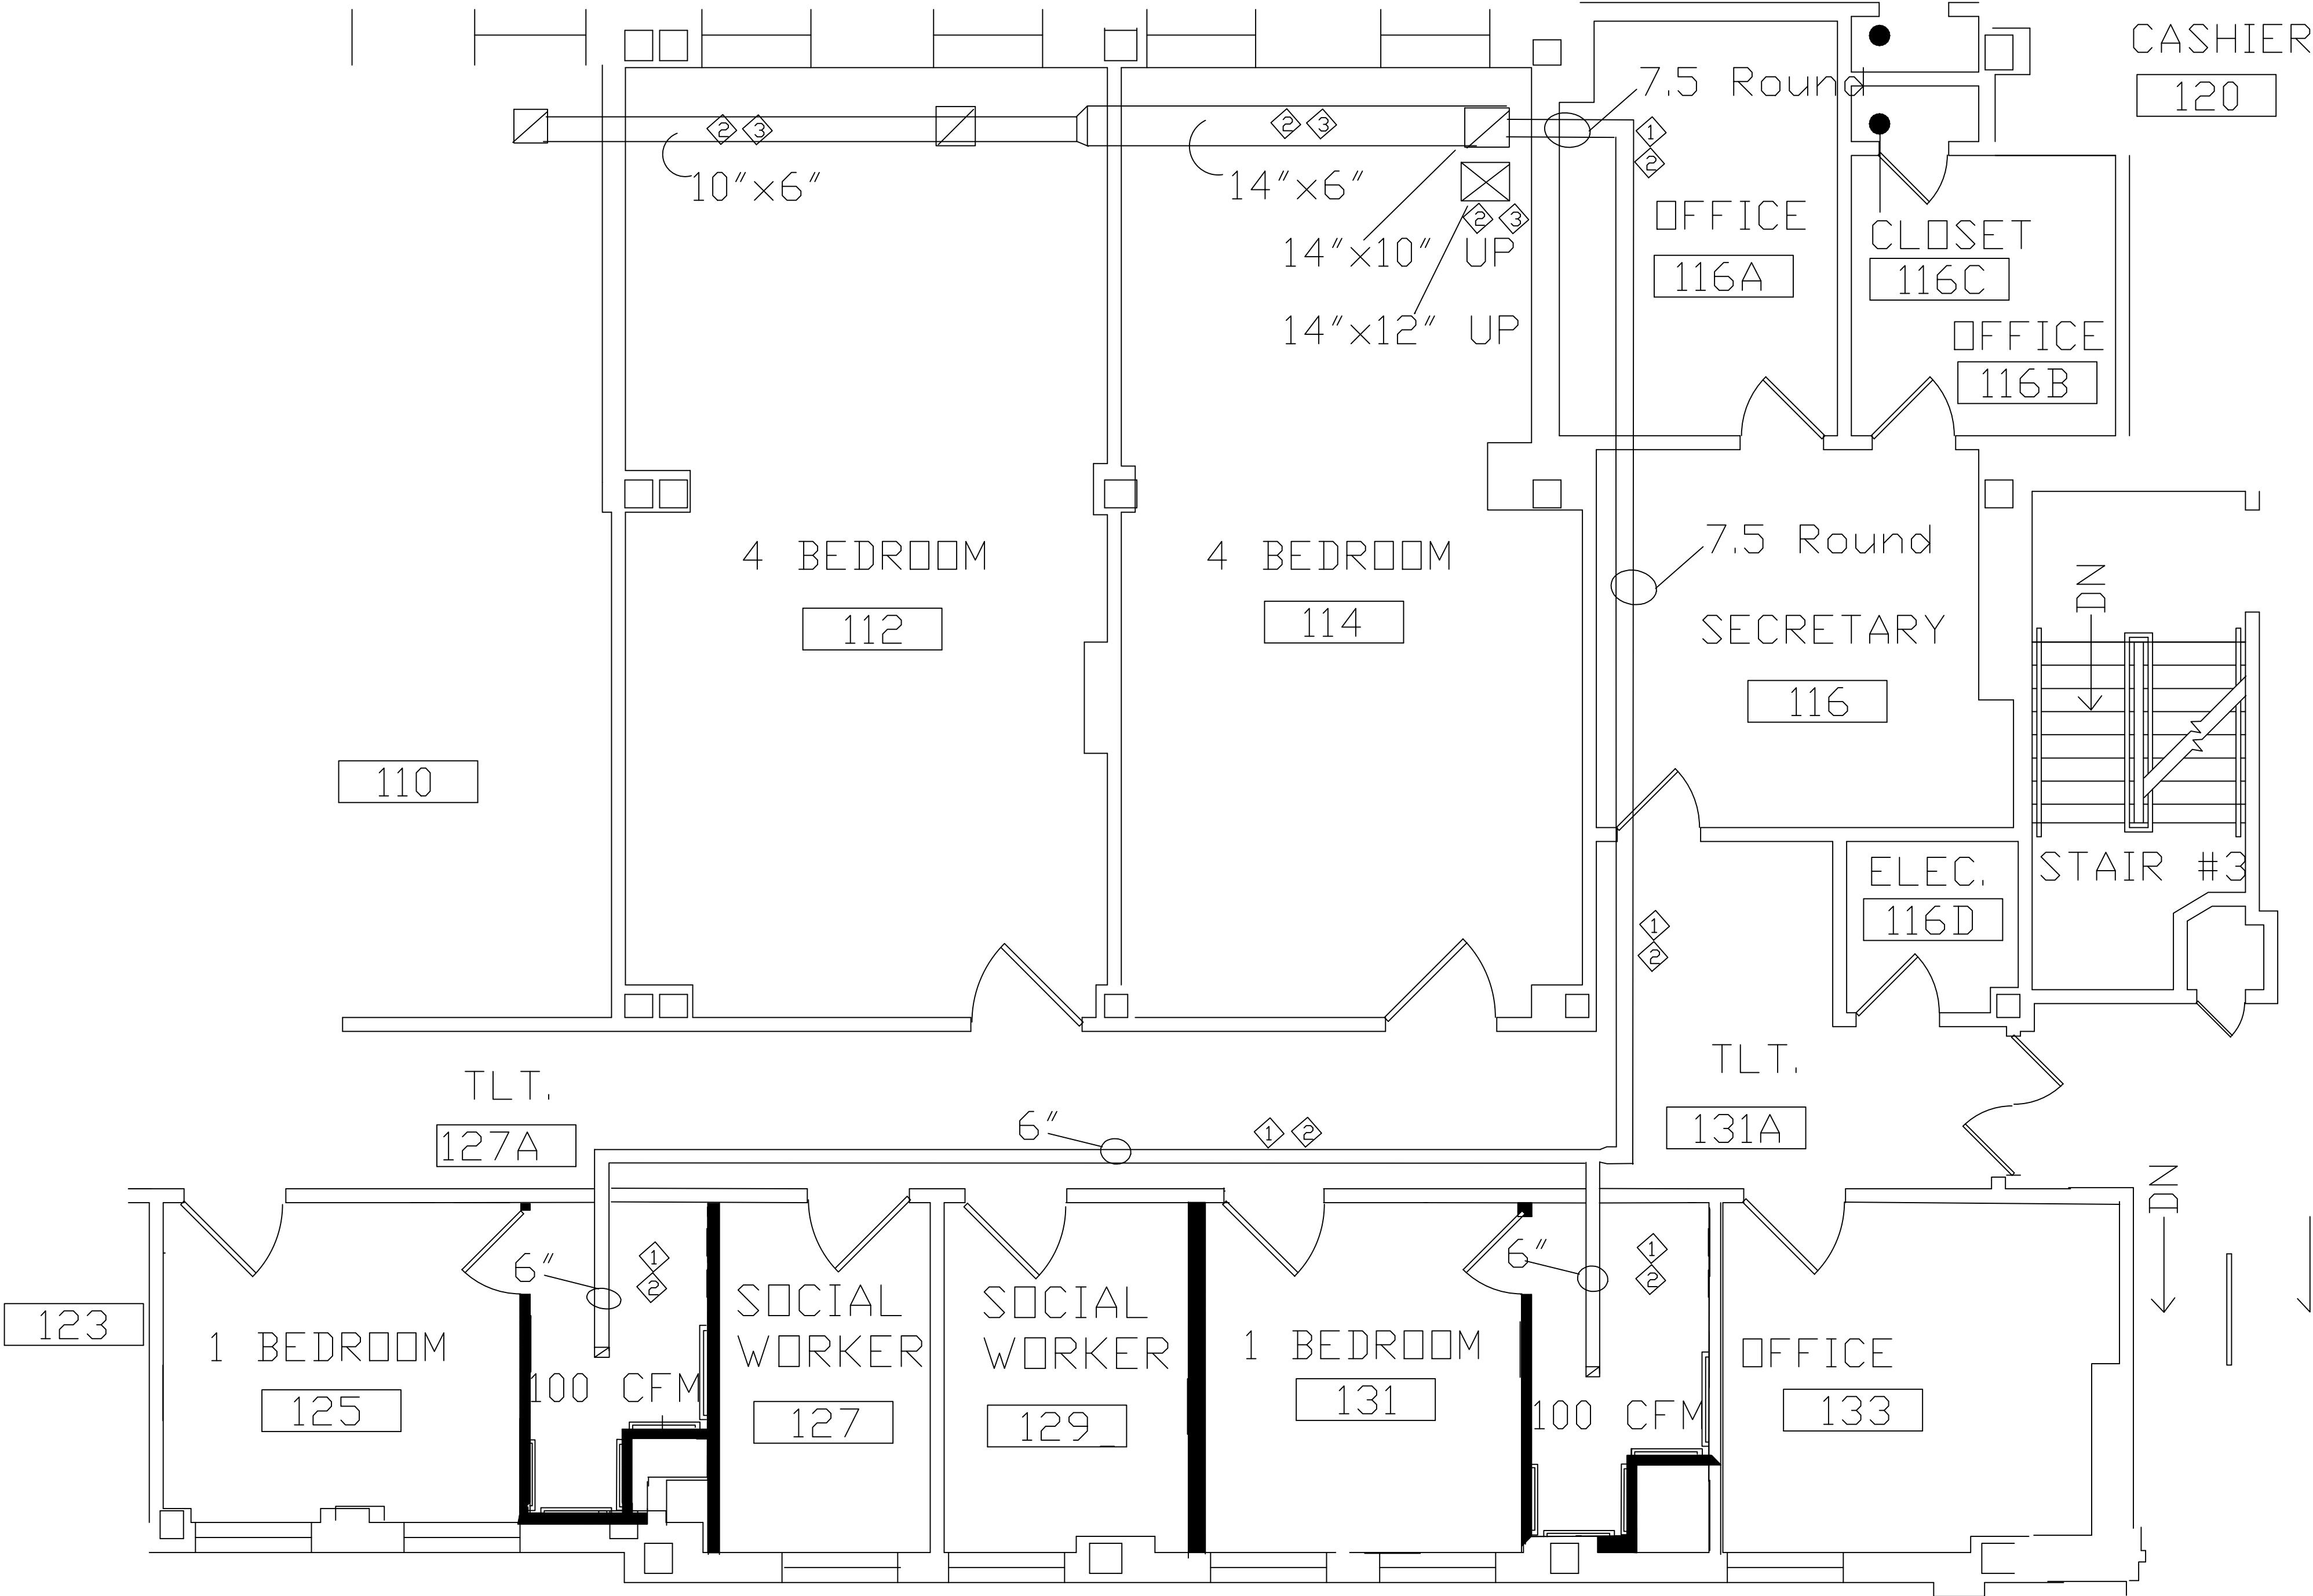

BEDROOMS NEW WORK PLAN


SCALE: 1/4" = 1'

Drawing Title: HVAC PLAN	Project Title 8TH FLOOR AND DOM WOMEN'S RESTROOMS	Date 5/15/12	
		Project No. 539-12-108	
	Building Number 001	H-1	

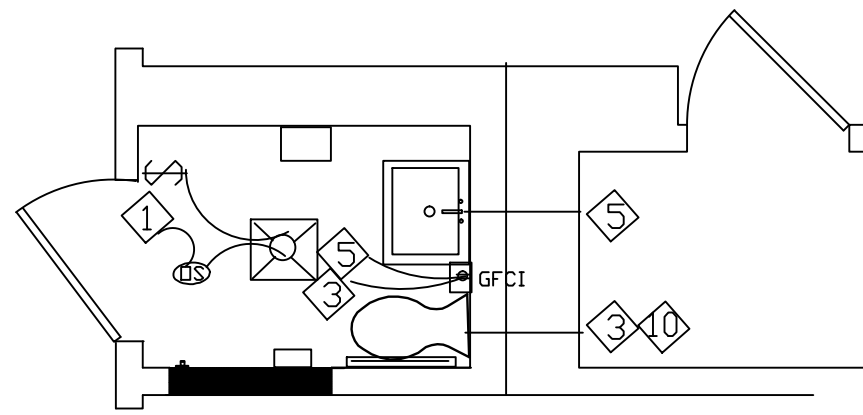

Restroom-A811a


SCALE: 1/4" = 1'

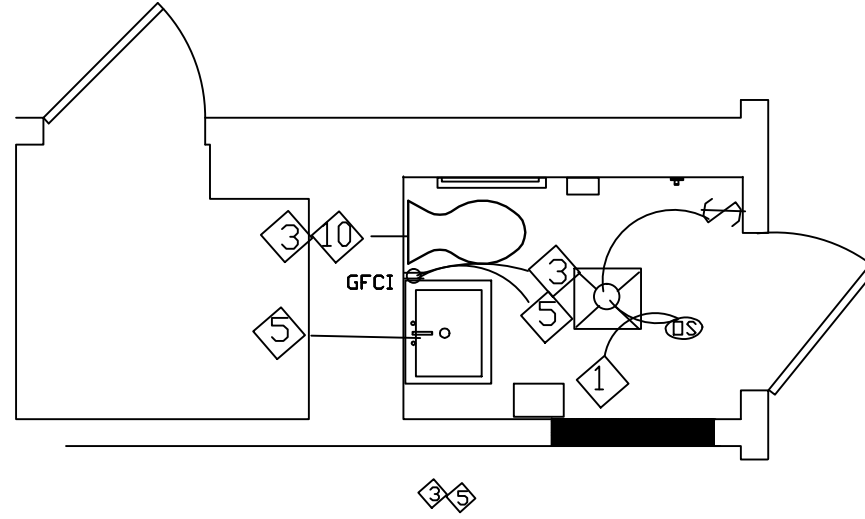

Restroom-A811b

SCALE: 1/4" = 1'

127 129

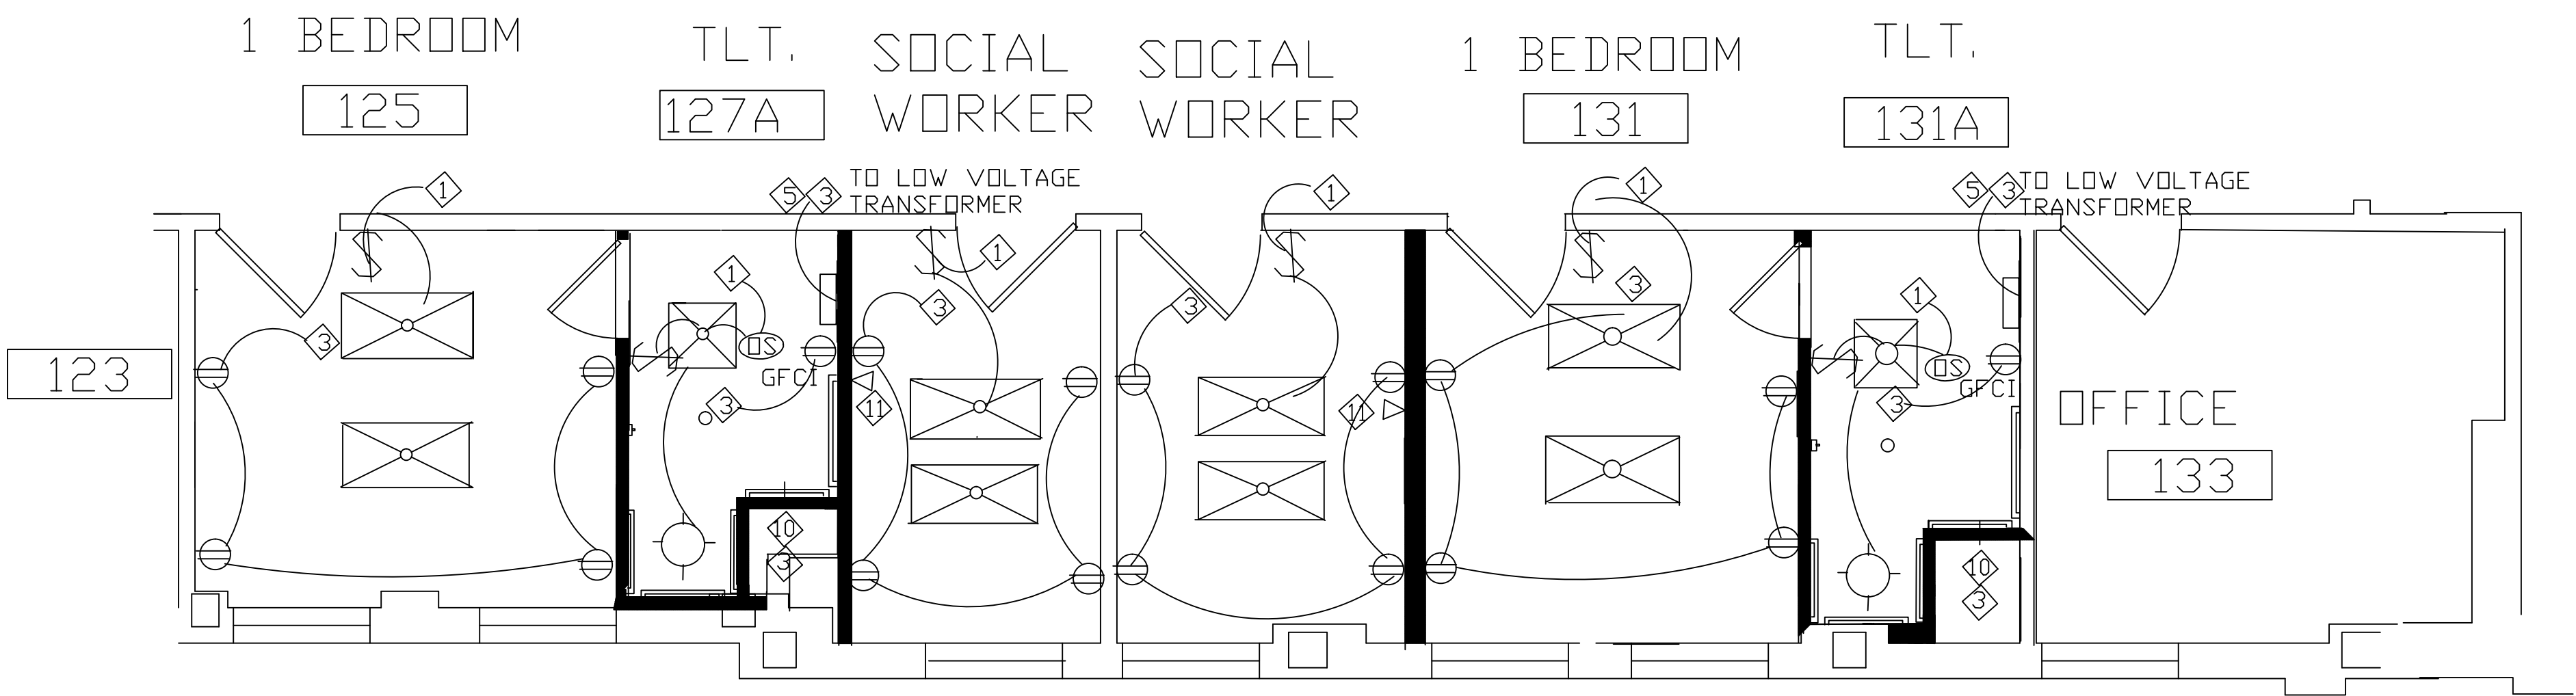


BEDROOMS NEW WORK PLAN

SCALE: 1/4" = 1'

NOTES:

- 1.) CONNECT TO EXISTING 120/277V NORMAL POWER LIGHTING CIRCUIT.
- 2.) CONNECT TO LOCAL 120/277V LIFE SAFETY LIGHTING CIRCUIT.
- 3.) CONNECT TO EXISTING 120V RECEPTACLE CIRCUIT.
- 4.) PROVIDE NEW 120V-20A/1P CIRCUIT BREAKER IN EXISTING CRITICAL BRANCH PANEL.
- 5.) PROVIDE AND INSTALL 4"SQ. JUNCTION BOX ABOVE CEILING FOR L.V. LAVATORY TRANSFORMER (BY DIV. 22) AND PROVIDE 0.75"C. FROM BELOW EACH LAVATORY TO ABOVE CEILING FOR L.V. WIRING BY DIV. 22. COORDINATE EXACT REQUIREMENTS WITH DIV. 22.
- 6.) CONNECT TO LOCAL 120V CRITICAL BRANCH CIRCUIT.
- 7.) UTILIZE SPARE 120V-20A /1P CIRCUIT BREAKER.
- 8.) EXHAUST FAN TO BE REMOVED BY DIVISION 23. DISCONNECTED AND MAINTAIN HOMERUN CIRCUITRY.
- 9.) NEW LIGHT SWITCH
- 10.) POWER SUPPLY FOR COMMDE.
- 11.) INSTALL NEW DATA AND TELECOMMUNICATION.

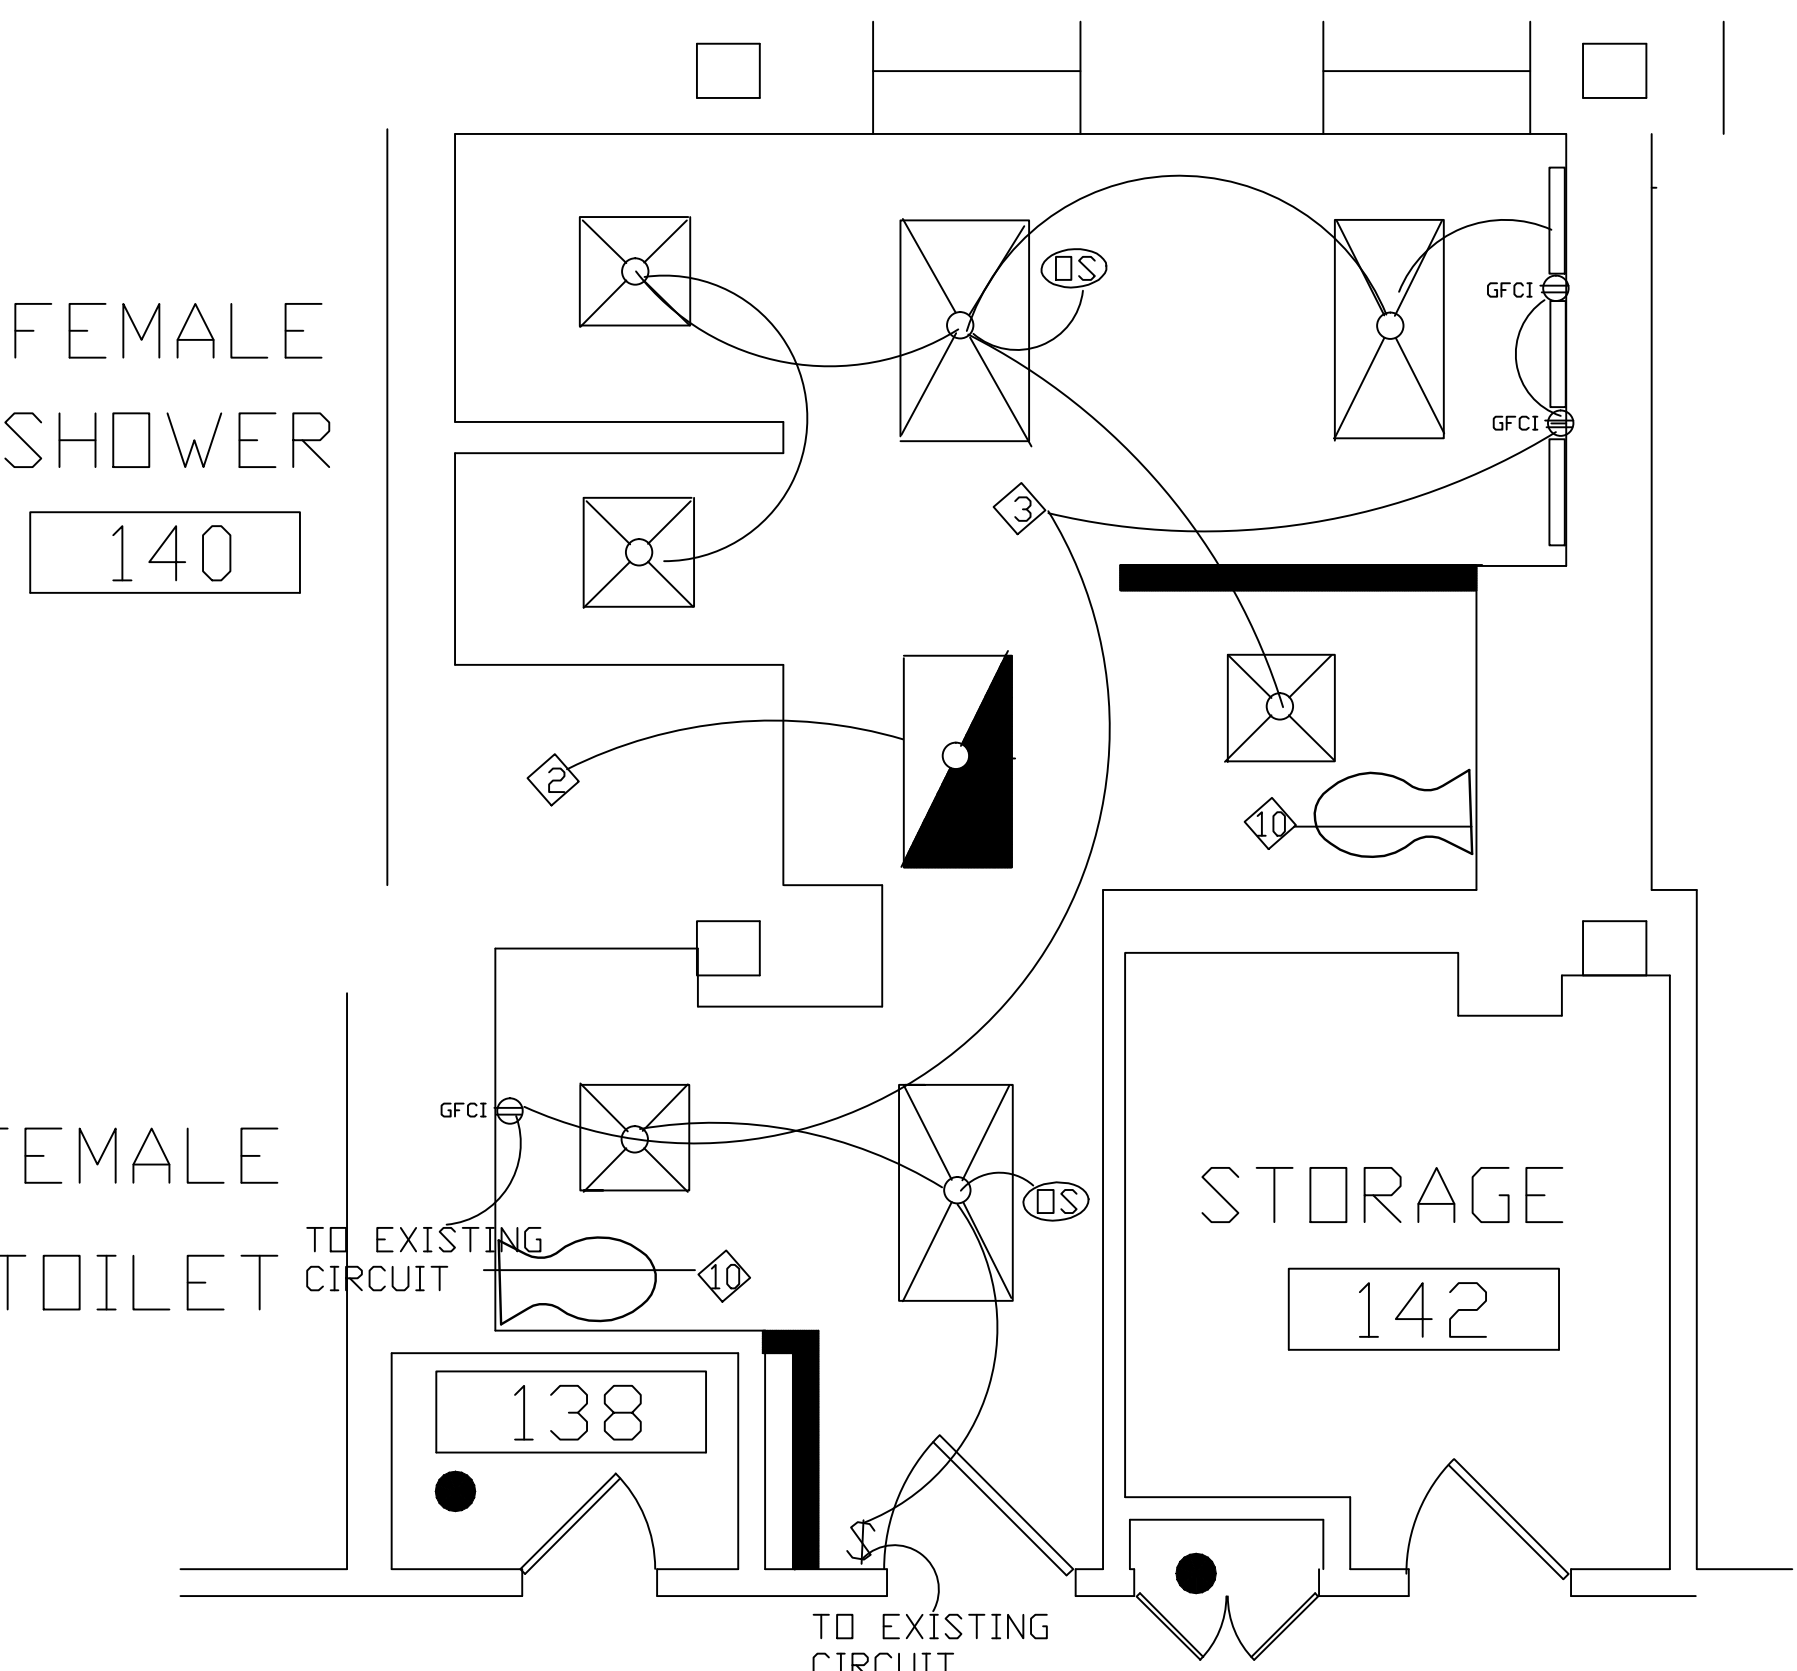

140 RESTROOM NEW WORK


SCALE: 1/4" = 1'

GENERAL NOTES:

- A. MAINTAIN ALL LIGHTING AND RECEPTACLE CIRCUITS FOR NEW WORK.
- B. FIELD VERIFY EXISTING LIGHTING CIRCUIT VOLTAGE PRIOR TO ORDERING FIXTURES AND OCCUPANCY SENSORS.
- C. WIRE ALL OCCUPANCY SENSORS IN PARALLEL (NORMAL POWER LIGHTING) FOR COMMON ZONE CONTROL.
- D. LIFE SAFETY LIGHTING SHALL BE WIRED FOR 24/7 OPERATION.
- E. ALL FINAL LOCATIONS AND ARRANGEMENTS OF LIGHTING FIXTURES SHALL BE OBTAINED FROM THE ARCHITECTURAL REFLECTED CEILING PLAN.
- F. (1) EACH BRANCH CIRCUIT HOMERUN SHALL HAVE NO MORE THAN THREE CIRCUITS. EACH BRANCH CIRCUIT HOMERUN SHALL HAVE A SEPARATE GREEN INSULATED EQUIPMENT GROUNDING CONDUCTOR.
- G. MULTI-GANG BACKBOXES FOR DIFFERENT VOLTAGES AND TYPES OF EMERGENCY AND NORMAL BRANCH WIRING DEVICES SHALL HAVE DIVIDER BETWEEN DEVICES.
- H. EXISTING EQUIPMENT, SUCH AS LIGHTING FIXTURES, WIRING DEVICES, CONDUITS, ETC. SHOWN ON PLANS TO BE REMOVED COMPLETELY. CUT/CAP CONDUITS AT THE AREA OF WORK PERIMETER AND REMOVE CONDUIT WITHIN THE WORK AREA. DISCONNECT WIRING AT THE OVERCURRENT PROTECTIVE DEVICE AND REMOVE WIRING COMPLETELY FROM THE ABANDONED CONDUITS.
- I. REMOVE ALL ACCESSIBLE ABANDONED WIRING OF ALL TYPES., OR CAP AND LABEL IN JUNCTION BOX FOR RE-USE, IN COMPLIANCE WITH NATIONAL ELECTRICAL CODE.
- J. MAINTAIN AND RESTORE IF INTERRUPTED, ALL CONDUITS AND CONDUCTORS PASSING THROUGH RENOVATED AREAS AND SERVICING UNDISTURBED AREAS.
- K. REFER TO ARCHITECTURAL PHASING PLANS AND INCLUDE ALL WORK REQUIRED REQUIRED TO ACCOMMODATE PHASING.

GENERAL LEGEND:

- AIR SUPPLY
- AIR RETURN
- 2' X 2' LIGHT
- 2' X 4' LIGHT
- 2' X 4' EMERGENCY LIGHT

Drawing Title:  ELECTRICAL    PLAN	Project Title  8TH FLOOR AND DOM WOMEN'S RESTROOMS	Date 5/15/12	 <i>Department of Veterans Affairs</i>
		Project No. 539-12-108	
	Building Number  001	E-1	