


1846-FA Series Front Access 18" Wide Combination Units

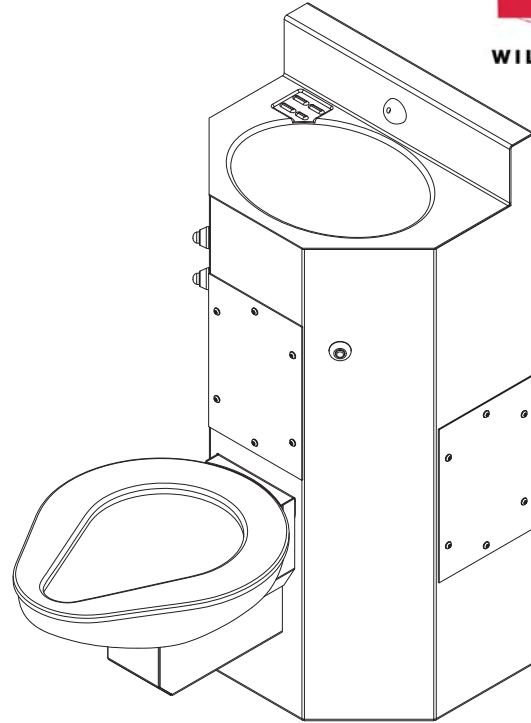

(Unit may be shown with optional features)

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a wall outlet front access 18" combination unit with centered toilet, standard ligature-resistant filler/bubbler, 1.6 GPF, dual temp. pneumatic metering valve, standard ligature-resistant push buttons, removable lav. 'p' trap, lav. fast drain, standard gasketed waste connection, hydraulic flush valve, left recessed tissue holder (for Centered toilet), and wall template

Use the following Willoughby Model Number:

ECW-1846-FA-C-ON-BPH-1.6-PML2-PBH-RPT-GWC-FV-RTHL-MT

Recommended Specifications

Front access 18" combination lavatory/toilet shall be:
Willoughby Model No. **EC__-1846-FA**
(Select from model number and options list on next page)

Fixture shall be fabricated from 14 gauge, type 304 stainless steel. The construction shall be all welded, with exposed stainless surfaces polished to a #4 satin finish. Removable access panels, attached w/ security screws, shall provide access to fixture interior.

Standard toilet shall include:

- Elongated toilet bowl with contoured seat
- Integral crevice-free self-draining flushing rim with positive afterfill
- Bead blast finish bowl interior

Toilet shall be blowout type, requiring 35 psi min. flushing pressure. Model shall meet the requirements of ASME A112.19.3/CSA B45.4.

Standard lavatory shall include:

- Oval-shaped bowl, 13" x 9-1/2" x 5-1/2" deep
- Stainless steel ligature-resistant bubbler/filler
- Fast drain with air vent
- Removable slip-joint brass union 'P' trap (1-1/2" N.P.T.)
- Self-draining soap dish

Fixture shall withstand loadings of 5,000 lbs. without permanent damage.

Cabinet interior shall be sound deadened with fire-resistant material.

Optionally selected lavatory valve and flush valve shall be factory installed inside fixture cabinet.

Anchoring shall be from the front, anchoring holes provided. Anchoring hardware provided by others. Standard unit requires no chase area for installation and maintenance, however certain non-standard options may require an accessible chase (see options list for details).

On back to back fixture installations, do not use standard cross type waste fitting: cross flow may result due to blowout jet action. Use sanitary or offset type waste fittings.

Note: Unit will pass a 2" ball.

*WaterSense Certified for 1.28 GPF HET fixtures.



WARNING: Cancer and Reproductive Harm

- www.P65Warnings.ca.gov



MADE IN THE U.S.A.

visit our website at www.willoughby-ind.com

5105 West 78th Street • Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

MODEL NUMBER AND OPTIONS:

1.) Toilet Waste Location:

- ☐ ECW Wall Outlet
☐ ECF Floor Outlet

2.) Base Model Number:

- ☐ 1846-FA Front Access 18" Lav-toilet Combination

3.) Toilet Orientation:

- ☐ L Angled Left
☐ R Angled Right
☐ C Centered

4.) Fixture Mounting:

- ☐ ON On-Floor

5.) Bubbler Selection:

- ☐ BPH Ligature-resistant Bubbler/Filler (Standard)
☐ BC Code Bubbler/Filler (w/ Non Ligature-Resistant Mouth Guard)
☐ FLH Ligature-resistant Lav. Filler

6.) Flush Valve GPF (Must Specify):

- ☐ 1.28 GPF HET (WaterSense Certified)
☐ 1.6 GPF ULF
☐ 3.5 GPF

7.) Lavatory Valve Selection:

- ☐ NV No Valve
☐ PSL1 Single Temp. Pneumatic Non-metering
☐ PSL2 Dual Temp. Pneumatic Non-metering
☐ PML1 Single Temp. Pneumatic Metering
☐ PML2 Dual Temp. Pneumatic Metering
☐ E1L1 Single Temp. Electronic (Pick Control)
☐ E1L2 Dual Temp. Electronic (Pick Control)

8.) Lavatory Push Button Selection:

- ☐ PBH Ligature-resistant Push Buttons
☐ PZPB Ligature-resistant Piezo Electronic Push Buttons

9.) Electronic Controls*

- (Must Use Electronic Lavatory & Flush Valves):
☐ WUCC-3010 ☐ Pneutronic ☐ WMSII

10.) Lavatory Waste:

- ☐ RPT Removable 'P'-Trap (1-1/2" N.P.T.) (Standard)
☐ OV Lavatory Overflow
☐ CW1 Combined Waste w/o Clean-out
☐ CW2 Combined Waste w/ Clean-out
☐ SLOW Slow Drain

11.) Toilet Waste:

- ☐ GWC Gasketed Waste Connection (Standard)
☐ TWE Toilet Waste Extension (Requires Accessible Chase)
☐ TW4 Floor Outlet Waste Connection

12.) Waste Coupling for (TWE) Toilet Waste Extension:

- ☐ TWC3P Connecting to 3" PVC
☐ TWC3C Connecting to 3" Cast Iron
☐ TWC4P Connecting to 4" PVC
☐ TWC4C Connecting to 4" Cast Iron


13.) Other Options:

- ☐ T4 Manual Reset Toilet Overflow Preventer, Req. (FV)
☐ T4A Auto Reset Toilet Overflow Preventer, Req. (FV)
☐ ET4 Electronic Toilet Overflow Preventer, Requires (EFV) & (WUCC-3010) or (WMSII)
☐ FV Hydraulic Flush Valve (Includes Push Button)
☐ EFVP Electronic Flush Valve w/ (PZPB) (Pick Control)
☐ HS Hinged White Plastic Seat (Not recommended for Max. Security/Ligature-resistant use; No Cover)
☐ RTH Recessed Tissue Holder
☐ L Left Side Holder for C & R Toilet Orientation
☐ R Right Side Holder for L Toilet Orientation
☐ ISH Integral Shelf
☐ TB1 Single Toothbrush Holder
☐ L ☐ R
☐ TB2 Dual Toothbrush Holder
☐ TH1 Single Towel Hook
☐ L ☐ LF ☐ C ☐ RF ☐ R
☐ TH2 Dual Towel Hook
☐ L ☐ LF ☐ C ☐ RF ☐ R
☐ DC Decorator Color (Fixture exterior only - White)
☐ TF24H Hard-wired Transformer, 110VAC to 24VAC*
☐ TF24P Plug-in Transformer, 110VAC to 24VAC*
☐ HPS High Polish Seat
☐ VG Vent Grille, 6-1/2"x 9-1/2" (13-3/4 in² free area)
☐ L ☐ LF ☐ RF ☐ R
☐ MT Wall Template
☐ WS Wall Sleeve (Requires Accessible Chase)
☐ SK Ligature-resistant Toilet Skirt
☐ TG 12 Gauge Cabinet
☐ TSC Toilet Shipping Cover
☐ Other _____
☐ Other _____


*(Req. 110V power through ground fault interrupter (GFCI) receptacle)

Approved For Manufacturing By: _____ Date: _____ Company: _____
 Wall Thickness: _____ Wall Type: _____


VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN.
 WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.




PLAN VIEW
CENTER CONFIGURATION



PLAN VIEW
RIGHT HAND CONFIGURATION



SIDE VIEW



PLAN VIEW
LEFT HAND CONFIGURATION

visit our website at www.willoughby-ind.com
 5105 West 78th Street • Indianapolis, IN. 46268
 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.