


NEW CONSTRUCTION
B160 CIRCLE DRIVE

Space will be renovated to:

1. Remove one window on the first floor to accommodate an airlock entry and new walkway with automatic doors meeting ADA/ABA requirements incorporating exterior drainage with existing system.
2. Installation of ceiling tile, lighting, sprinklers, walls, floor, floor tile, carpeting, power, data, automatic fire door configuration meeting ADA/ABA standards, and millwork for a complete functional space of approximately 1,554 square feet.
3. Provide HVAC for entire first floor (3,130 square feet the original warehouse space), 1,554 square feet HVAC will be installed in the finished ceiling and airlock entryway.
4. Design space in accordance with Design Guide criteria (SEPS II) for patient privacy and NFPA requirements.
5. Remove metal security panels for warehouse windows
6. Installation of cable for two TV monitors, intercom system.
7. Install security system with close circuit cameras and monitors, and electronic locks
8. Install an outside entry/exit door to escort parking location in Building 205 and the corner entrance of Building 69 and 77, recess two double door entrances to Building 205 from Building 77 corridor, one store front entrance to waiting area and one metal door entry to Canteen Storage Room.
9. Construct an enclosed area with metal canopy connecting the existing escort structure with wheelchair storage and seating with the new entrance of building 205.
10. Install landscaping to coordinate with Building 69.
11. Add gutters to existing escort hut and proposed canopies. Connect to existing inlets.

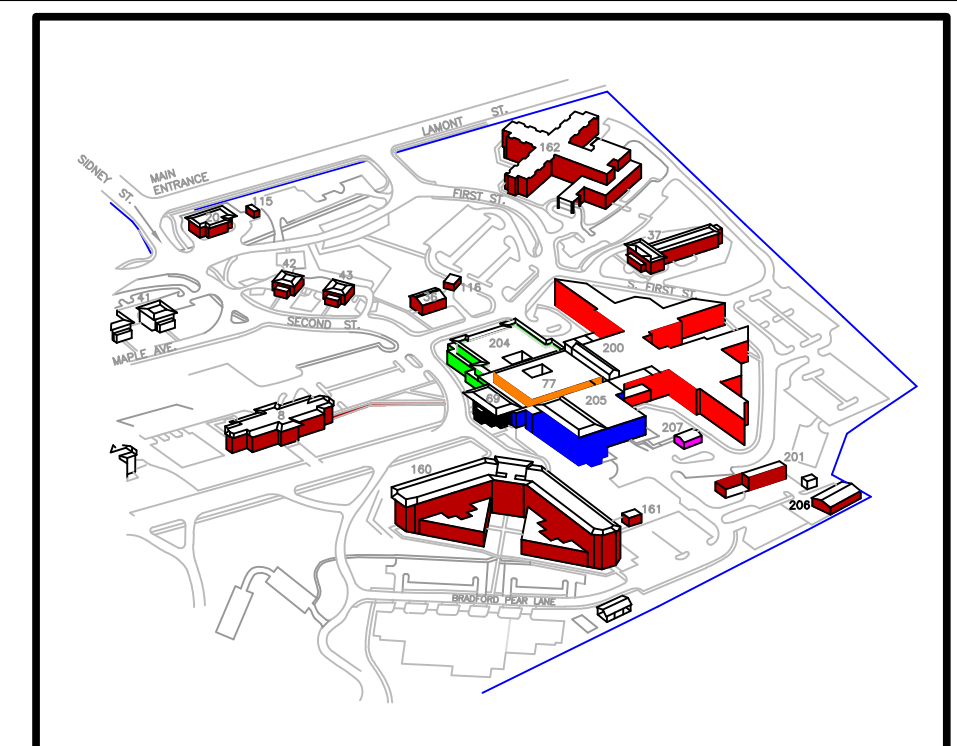

KEY PLAN
(PARTIAL SITE PLAN)