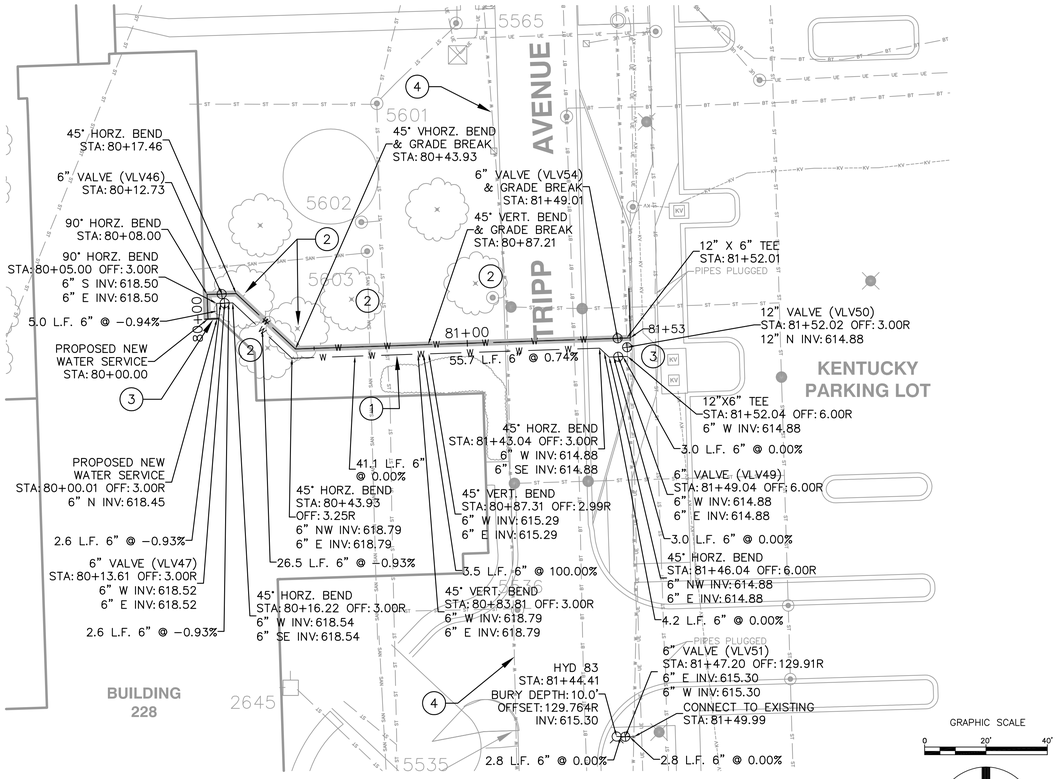

(A) WEST BUILDING 200 LATERAL

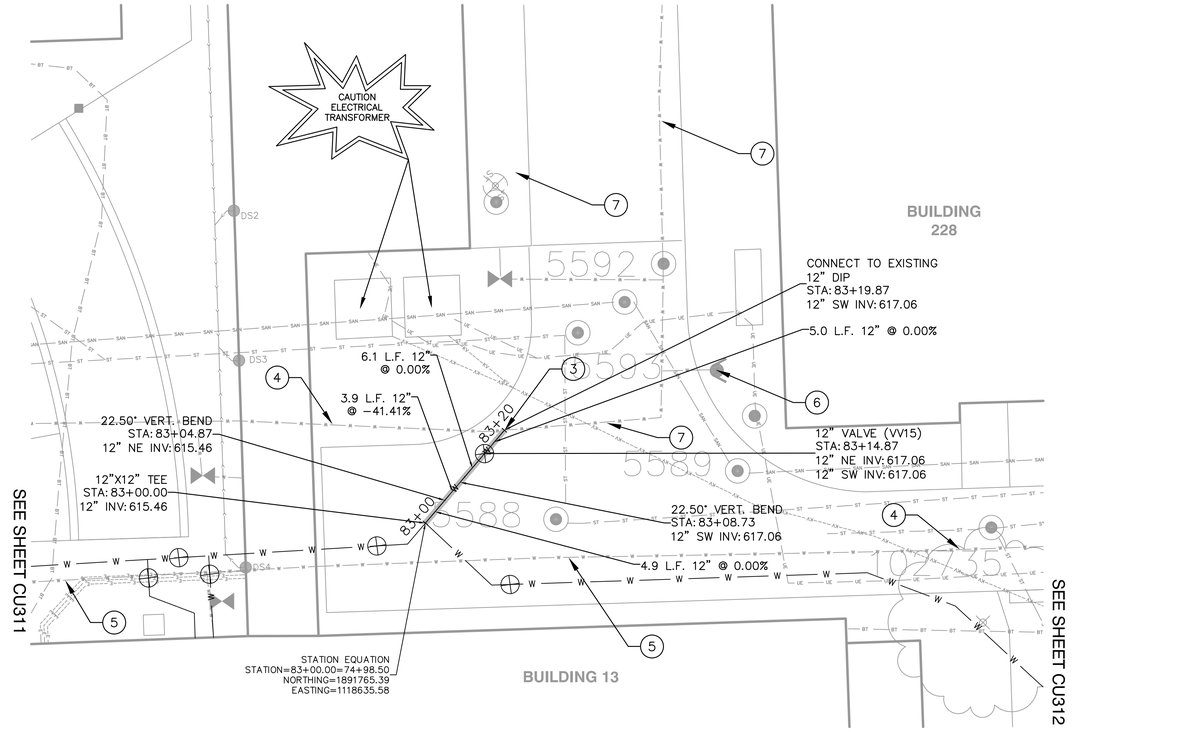

(B) BUILDING CORRIDOR SERVICE LATERAL

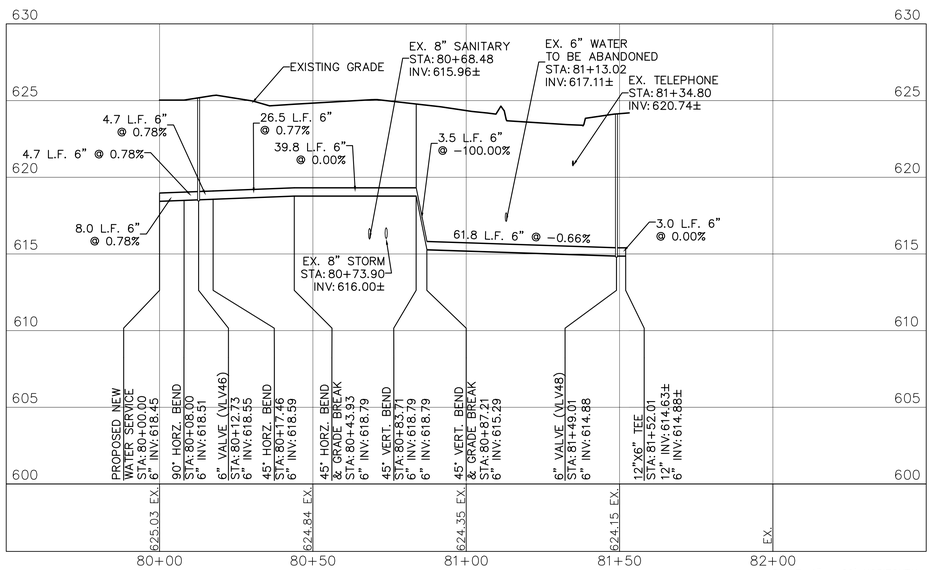

KEYED NOTES: (#)

1. SECOND PROPOSED BUILDING SERVICE LATERAL IS 3' OFFSET FROM PROFILED BUILDING SERVICE LATERAL. MATCH INVERTS AND BENDS.
2. POTENTIAL TREE IMPACT. SEE RESTORATION PLANS CU200 & CU201.
3. CONTRACTOR SHALL PROVIDE AND INSTALL VERTICAL & HORIZONTAL MECHANICAL BENDS AS REQUIRED FOR INSTALLATION OF PROPOSED BUILDING SERVICE LATERAL.
4. ABANDON EXISTING WATER SERVICE LINE IN PLACE. SEE ABANDONMENT/REMOVAL PLANS CU100 & CU101.
5. REMOVE EXISTING WATER SERVICE LINE. SEE ABANDONMENT/REMOVAL PLANS CU100 & CU101.
6. REMOVE EXISTING HYDRANT. SEE ABANDONMENT/REMOVAL PLANS CU100 & CU101.
7. EXISTING WATER SERVICE LINE TO REMAIN IN SERVICE.

NOTES:

1. EXISTING UTILITIES ARE SHOWN FOR INFORMATIONAL PROPOSES ONLY. THE VA AND ENGINEER NEITHER ASSUME OR IMPLY RESPONSIBILITY FOR THE ACCURACY OR COMPLETENESS OF UTILITY DATA PRESENTED. ALL EXISTING TOPOGRAPHY, UNDERGROUND UTILITIES, STRUCTURES AND ASSOCIATED FACILITIES SHOWN ON THE DRAWINGS ARE BASED ON AVAILABLE SURVEYS AND RECORD DRAWINGS. THEREFORE, THEIR LOCATIONS AND ELEVATIONS MUST BE CONSIDERED APPROXIMATELY ONLY. THERE MAY BE ADDITIONAL FACILITIES, STRUCTURES, UTILITIES WHICH THEIR EXISTENCE ARE NOT PRESENTLY KNOWN. ACTUAL LOCATIONS OF UTILITIES MAY VARY FROM LOCATIONS SHOWN ON THE PLANS.
2. THE CONTRACTOR IS RESPONSIBLE FOR MAKING HIS OWN DETERMINATION AS THE THE TYPE AND LOCATION OF UNDERGROUND UTILITIES AS MAY BE NECESSARY TO AVOID CONFLICTS AND DAMAGE THERETO. CONTRACTOR SHALL VERIFY ALL FIELD CONDITIONS, ELEVATIONS, STRUCTURES AND FACILITIES AND SHALL REPORT ANY CONFLICTS, ERRORS, DISCREPANCIES OR OMISSIONS, TO THE COTR AND ENGINEER PRIOR TO ORDERING MATERIAL AND STARTING WORK SO THAT CLARIFICATION OR REDESIGN CAN OCCUR IF NECESSARY.
3. EXISTING UTILITY CROSSING IN PROFILE ARE OUTSIDE BOTTOM OF PIPE / STRUCTURE ELEVATIONS.
4. CONTRACTOR SHALL COORDINATE CONSTRUCTION WITH VA, TO ENSURE THE ACCESS DRIVE IS MAINTAINED THROUGHOUT WATER MAIN INSTALLATION.

TEE - FACING YOU
TEE - FACING AWAY
VLV - VALVE BOX
VV - VALVE VAULT (CONCRETE)

Revisions	Date

THE SIGMA GROUP
Single Source. Sound Solutions.
www.thesigmagroup.com
1300 West Canal Street
Milwaukee, WI 53233
Phone: 414-643-4200
Fax: 414-643-4210

HGA
Architecture | Engineering | Planning
Hammel, Green and Abrahamson, Inc.
333 East Erie Street
Milwaukee, Wisconsin USA 53202
Telephone 414.278.8200 Facsimile 414.278.7734

PHASE 2 - CONSTRUCTION DOCUMENTS: MAY 22, 2012

Drawing Title: PHASE 2 - WATER MAIN PLAN & PROFILE STA: 80+00.00 TO STA: 81+52.01 STA: 83+00.00 TO STA: 83+19.87

Project Title: VA MEDICAL CENTER REPLACE EXISTING WATER MAINS PROJECT

Date: MAY 22, 2012

Project No. VA#69PD-RA-1465 HGA#2606-008-00

Approved: Division Chief

Approved: Service Director

Building Number

Checked: JBL

Drawn: TPM

Location: HINES, ILLINOIS

DRAWING NO. CU313

Dwg. __ Of __

Office of Facilities Management

Department of Veterans Affairs