

PLUMBING - LABORATORY GASES
1 DEMOLITION PLAN - THIRD FLOOR

CONTRACTOR EXISTING UTILITIES NOTE:

CONTRACTOR IS TO ALLOCATE MONEY IN THE FINAL PRICE AS REQUIRED TOWARD THE RE-WORKING OF EXISTING UTILITIES AND INSTALLATION OF NEW UTILITIES COMING IN AND GOING OUT OF ALL EXISTING CHASES AND COORDINATE RE-WORKING AND INSTALLATION OF UTILITIES WITH OTHER TRADES.

- KEY NOTES**
- DEMOLISH EXISTING LABORATORY GAS OUTLETS AND ASSOCIATED PIPING.
 - DEMOLISH EXISTING LABORATORY GAS PIPING SERVING LAB BENCH. CAP EXISTING SERVICES IN THE CEILING OF THE FLOOR BELOW. ISLAND BENCHES ARE SERVED FROM THE THIRD FLOOR CEILING.
 - DEMOLISH EXISTING LABORATORY GAS OUTLETS AT ISLAND BENCH AND ASSOCIATED PIPING. PIPING IS ROUTED HORIZONTALLY IN CASE WORK.
 - DEMOLISH EXISTING LABORATORY VACUUM, LAB AIR, AND NATURAL GAS PIPING AS INDICATED. DEMOLITION SHALL INCLUDE ALL HANGERS AND ASSOCIATED DEVICES.
 - DEMOLISH EXISTING 5" RWL UP TO THIRD FLOOR CEILING AND DOWN INTO SECOND FLOOR CEILING FOR THE PURPOSES OF OFFSETTING LINE TO A BETTER LOCATION WITHIN CHASE. REFER TO 1-PL4.03-357 FOR NEW ROUTING OF LINE.
- ** APPLIES TO THIS SHEET ONLY ****




WALL LEGEND	
	EXISTING PARTITION
	EXISTING ONE HOUR FIRE BARRIER
	EXISTING TWO HOUR FIRE BARRIER
	PARTITION TO BE DEMOLISHED
	NEW TYPICAL PARTITION
	NEW 1-HR. RATED FIRE PARTITION
	NEW 2-HR. RATED FIRE PARTITION

FULLY SPRINKLERED

Revisions	Date
1 AMENDMENT #4	5/24/12



Tennessee Valley Healthcare System

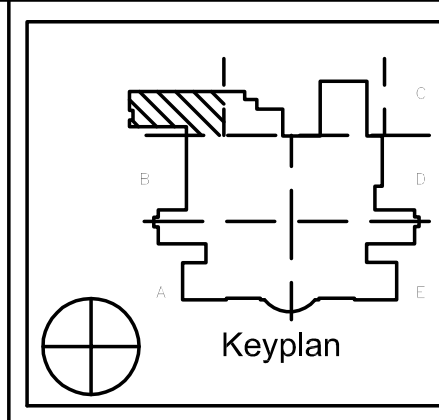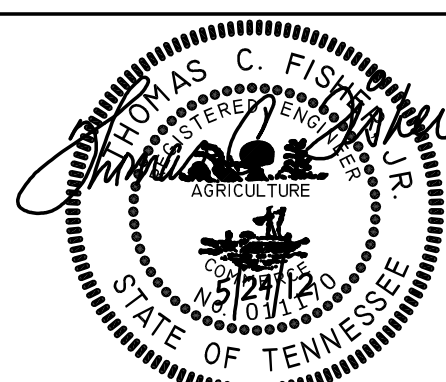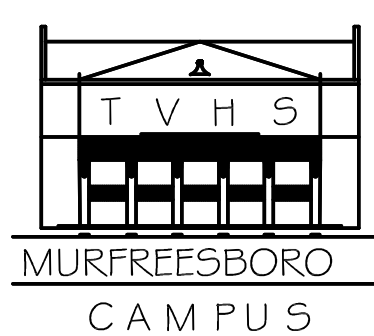

Project Title	VA Renovation Research Lab Phase 3
Drawing Title	DEMOLITION PLAN- THIRD FLOOR - PLBG - LABORATORY GASES
Approved By	
Building Number	1
Floor	3
Checked By	RSM
Drawn By	BDA

Date	3-5-2012
Project No.	626-11-101
Drawn By	1-PL1.03.2-357
Drawn	61
Of	92

Department of Veterans Affairs