


		<p>EXISTING DOOR TO REMAIN</p> <p>EXISTING DOOR TO RECEIVE NEW HARDWARE. SEE DOOR SCHEDULE.</p> <p>NEW DOOR. SEE DOOR SCHEDULE.</p> <p>EXISTING PLUMBING FIXTURE TO REMAIN</p> <p>NEW PLUMBING FIXTURE. REFER TO PLUMBING DRAWINGS AND SPECS</p> <p>FURNITURE OR EQUIPMENT TO BE PROVIDED/RELOCATED BY OWNER (FOFI)</p> <p>FURNITURE OR EQUIPMENT TO BE PROVIDED/RELOCATED BY OWNER (FOFI)</p> <p>NEW BUILT-IN MILLWORK, REFER TO ELEVATIONS AND FINISH PLANS.</p> <p>FLOOR DRAIN - SEE PLUMBING COORDINATE WITH STRUCTURE BELOW.</p>	<p>—INT NEW INTERCOM OUTLET. WALL OUTLET, CONDUIT AND CABLING TO BE PROVIDED BY CONTRACTOR. INTERCOM SETS TO BE PROVIDED AND INSTALLED BY VA (FOFI). REFER TO ELECTRICAL DRAWINGS AND ROOM ELEVATIONS</p> <p>—O2 NEW OXYGEN MEDICAL GAS OUTLET/VALVE. ADDITIONAL CONTROL VALVE TO BE PROVIDED IN CORRIDOR OUTSIDE EACH SLEEP ROOM. REFER TO ROOM ELEVATIONS AND PLUMBING DRAWINGS.</p> <p>—O2V NEW OXYGEN CONTROL BOX - SEE PLUMBING.</p> <p>—VAC NEW VACUUM MEDICAL GAS OUTLET/VALVE. REFER TO ROOM ELEVATIONS AND PLUMBING DRAWINGS.</p> <p>① THERMOSTAT FOR INDIVIDUAL SLEEP ROOM CONTROL.</p>
--	--	---	---

1.	ALL WALLS ARE 5/8" TYPE-X GYPSUM BOARD ON 3" 22 GA METAL STUDS UNLESS NOTED OTHERWISE.	1	WALL MOUNTED WIRE CABINET. PROVIDE BLOCKING IN WALL AS REQUIRED. SEE DETAIL 11A5.2
2.	ALIGN BOTH SIDES OF NEW PARTITION WITH NEW CONSTRUCTION UNLESS NOTED OTHERWISE. PROVIDE ADDITIONAL FRAMING AND/OR FURRING AS REQUIRED.	2	NOT USED.
3.	EXTEND ALL PARTITIONS TIGHT TO STRUCTURE ABOVE. SEAL TIGHT ALL PENETRATIONS. REFER TO OVERALL FLOOR PLANS FOR LOCATIONS OF SMOKE TIGHT AND FIRE RATED PARTITIONS.	3	NEW PLUMBING WASTE LINE. COORDINATE WITH PLUMBING DRAWINGS AND STRUCTURE BELOW.
4.	PROVIDE IN-WALL BLOCKING IN NEW AND EXISTING WALLS FOR ALL NEW WALL MOUNTED MILLWORK, CABINET AND TOILET ACCESSORIES.	4	PROVIDE 22 GA 6" METAL STUD THIS PARTITION. COORDINATE CLEARANCES WITH PLUMBING.
		5	PROVIDE ONE LAYER OF 5/8" TYPE-X GYPSUM BOARD ON 22 GA, 3 5/8" METAL STUDS ON EXISTING PARTITION. COORDINATE PLUMBING CLEARANCES.
		6	MARBLE THRESHOLD. SEE DETAIL 7/A9.3
		7	PROVIDE RECESS IN EXISTING CONCRETE SLAB FOR NEW SHOWER. SEE DETAIL 11A5.3
		8	ALIGN NEW WORK WITH EXISTING.
		9	FUR OUT EXISTING COLUMN AS REQUIRED FOR NEW BLOCKING AND PLUMBING.
		10	AUTO DOOR OPENER BUZZON.
		11	WALL MOUNTED TV BY VA. PROVIDE BLOCKING IN WALL AS REQUIRED PROVIDE POWER AND TV. COORDINATE TV CABLEING WITH VA. POWER OUTLET TO BE 7'-0" A.F.F.
		12	48"x48" WALL MOUNTED WIRE ORGANIZER. SEE DETAIL 13/A5.2.

[illegible]

2805 CRESCENT AVENUE • SUITE 200 • BIRMINGHAM, ALABAMA 35209

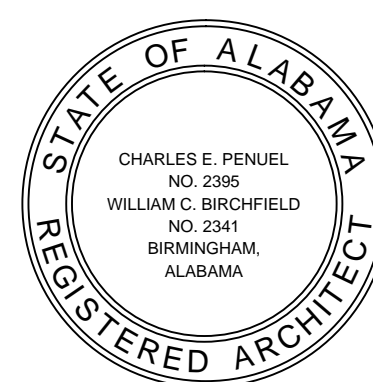

Department of Veterans Affairs
MEDICAL CENTER
BIRMINGHAM, ALABAMA

Drawing Title	Project Title			Date: 08-02-11
ENLARGED PLANS	RENOVATE SPACE FOR REHAB AND PHYSICAL MEDICINE			VA Project No. 521-10-101
				CAD File No. 10709A2.5.dwg
	Building Numbers	Checked	Drawn	
	Location			DRAWING NO.
	VA MEDICAL CENTER BIRMINGHAM, ALABAMA			A2.5
				Dwg. of

Veterans Administration

FINAL SUBMITTAL