



one-eighth inch = one foot
one-quarter inch = one foot
three-eighths inch = one foot
one-half inch = one foot
three-quarters inch = one foot
one inch = one foot
one and one-half inches = one foot
three inches = one foot

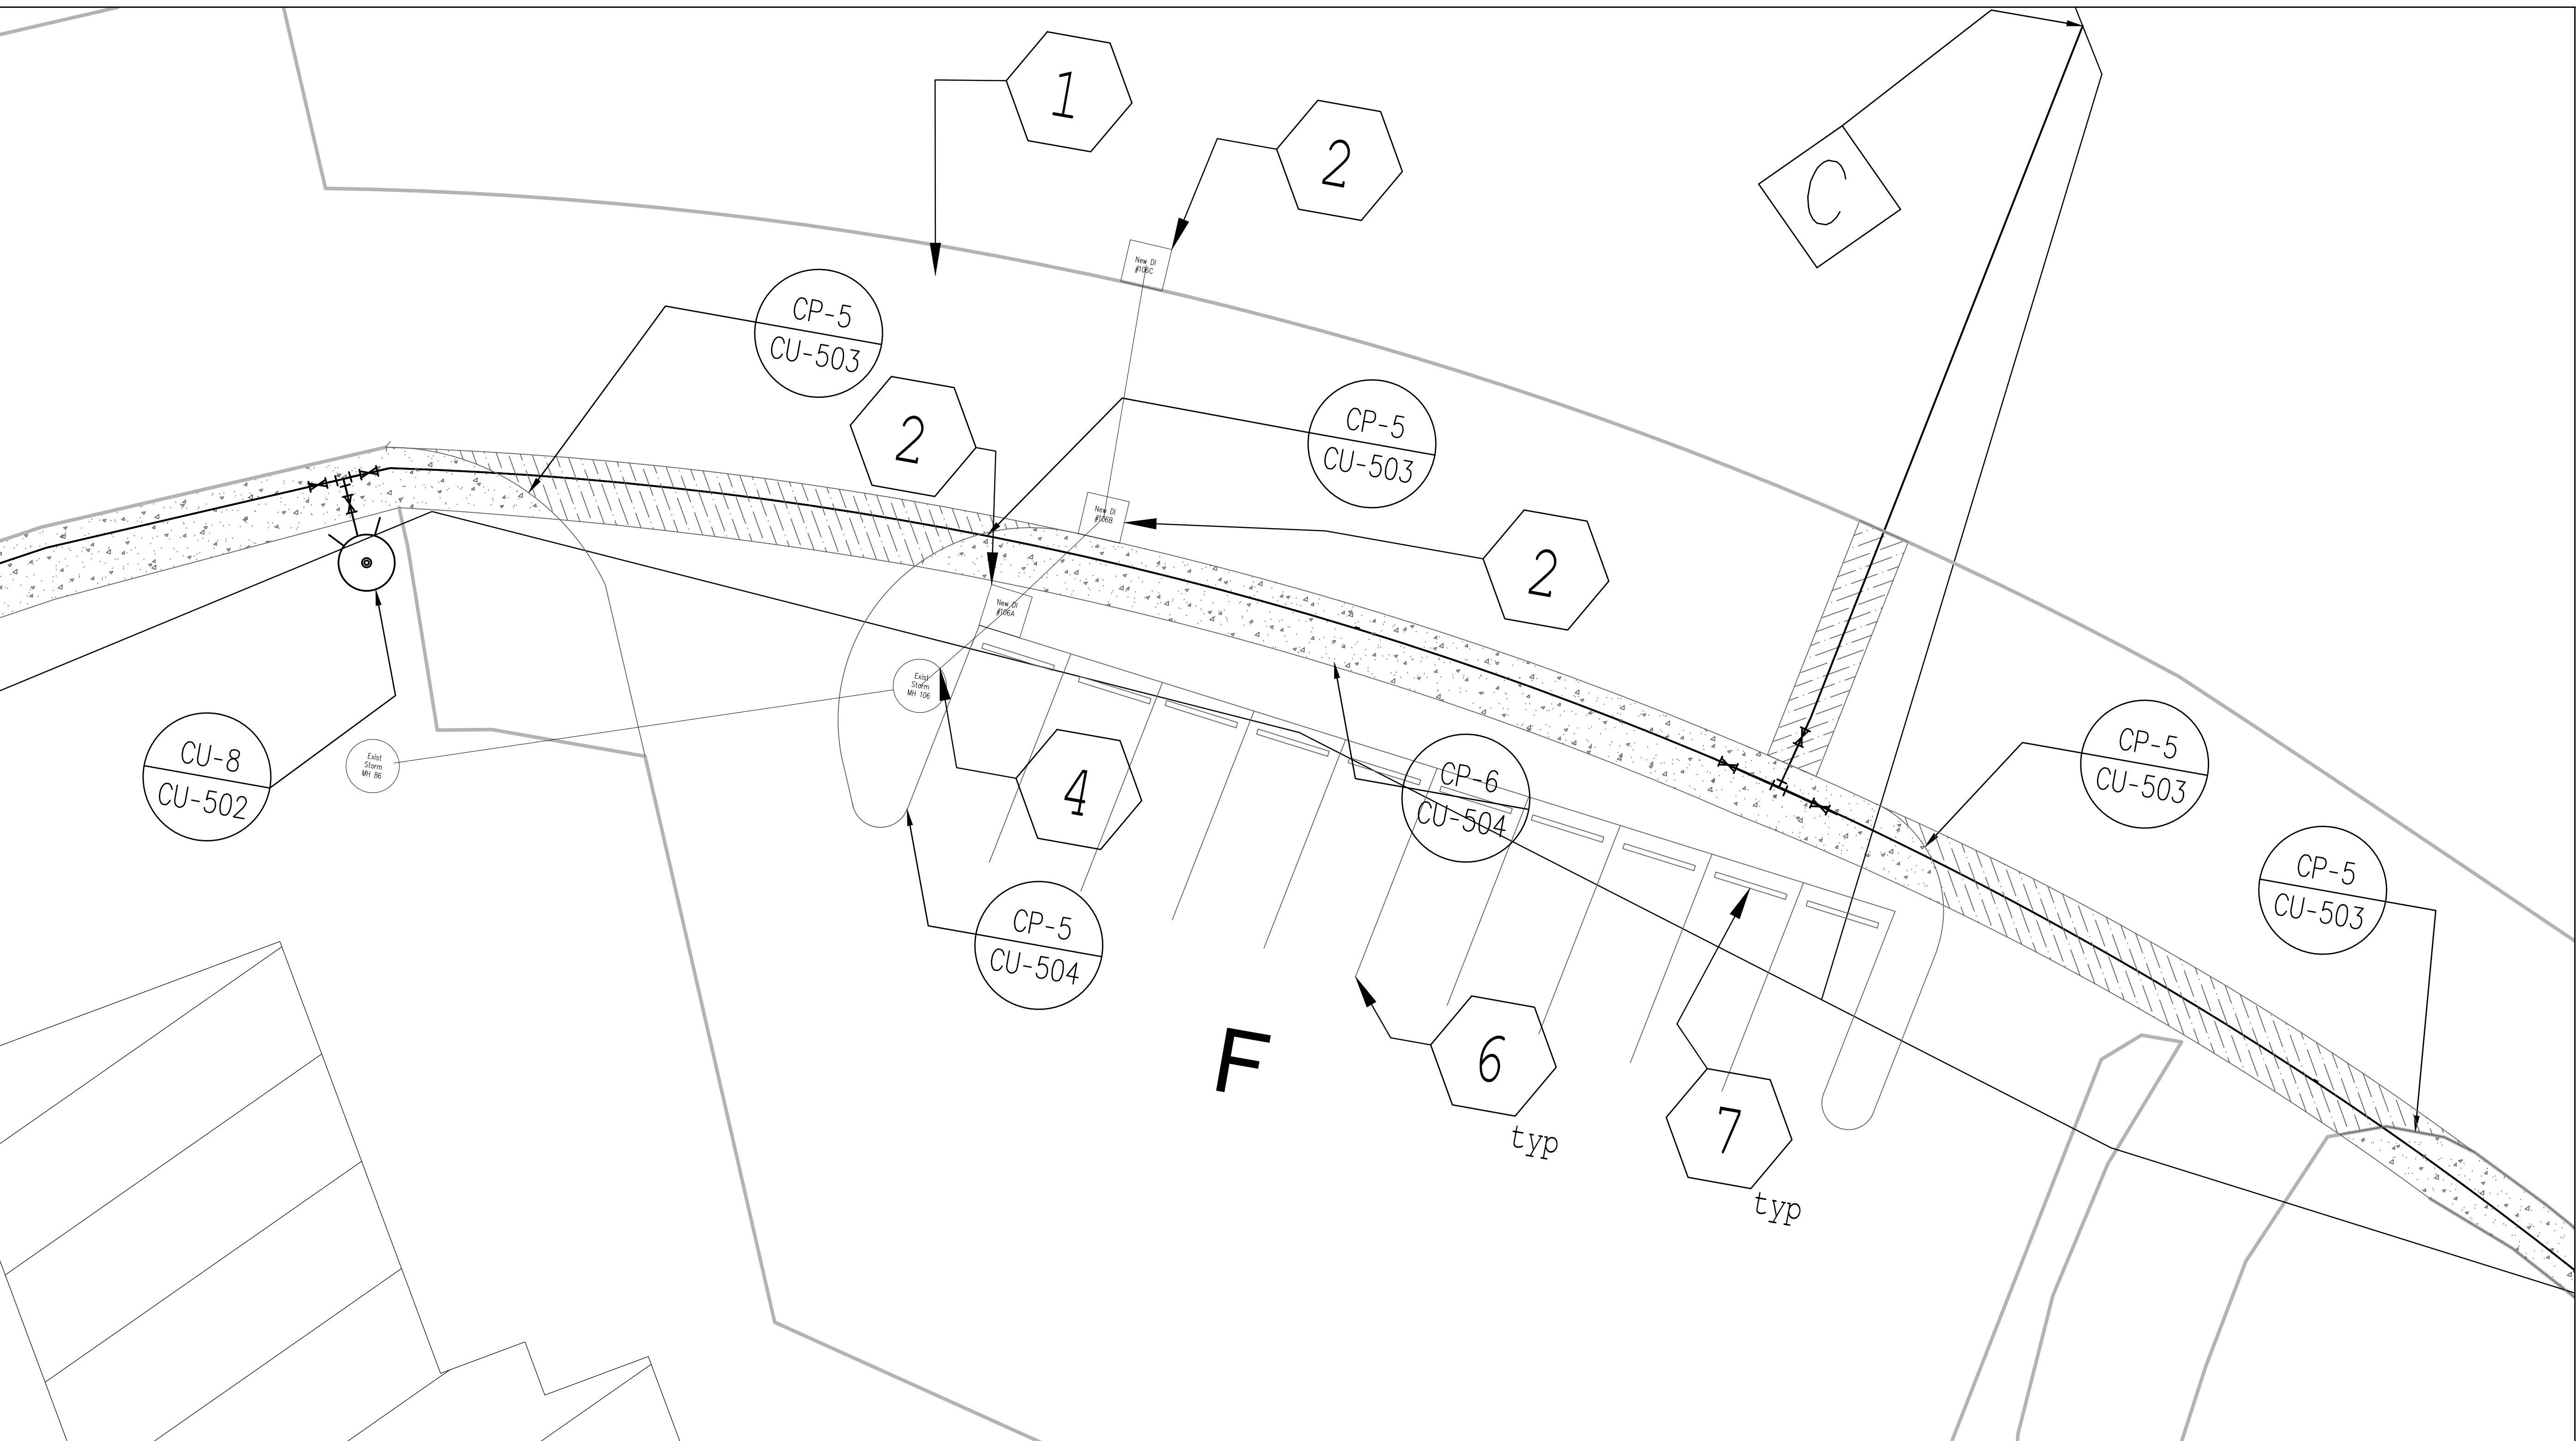

- SHEET KEYNOTES
1. Remove existing drop inlets and storm drain lines connecting inlets with existing storm MH #106. Seal openings in manhole.
 2. Provide 3 new drop inlets (VDOT DI-2) in locations shown.
 3. All new storm drainage construction shall comply with VDOT standards and specifications.
 4. Core new opening into existing storm MH #106 approximately 3" above existing invert out.
 5. New storm drainage lines shall be 12" Type III Reinforced Concrete Pipe (RCP) at 1% slope.
 6. Obscure existing pavement markings and remark parking spaces as shown.
 7. Reset existing parking wheel stops in new parking space locations. Provide 2 additional parking wheel stops to match existing wheel stops.

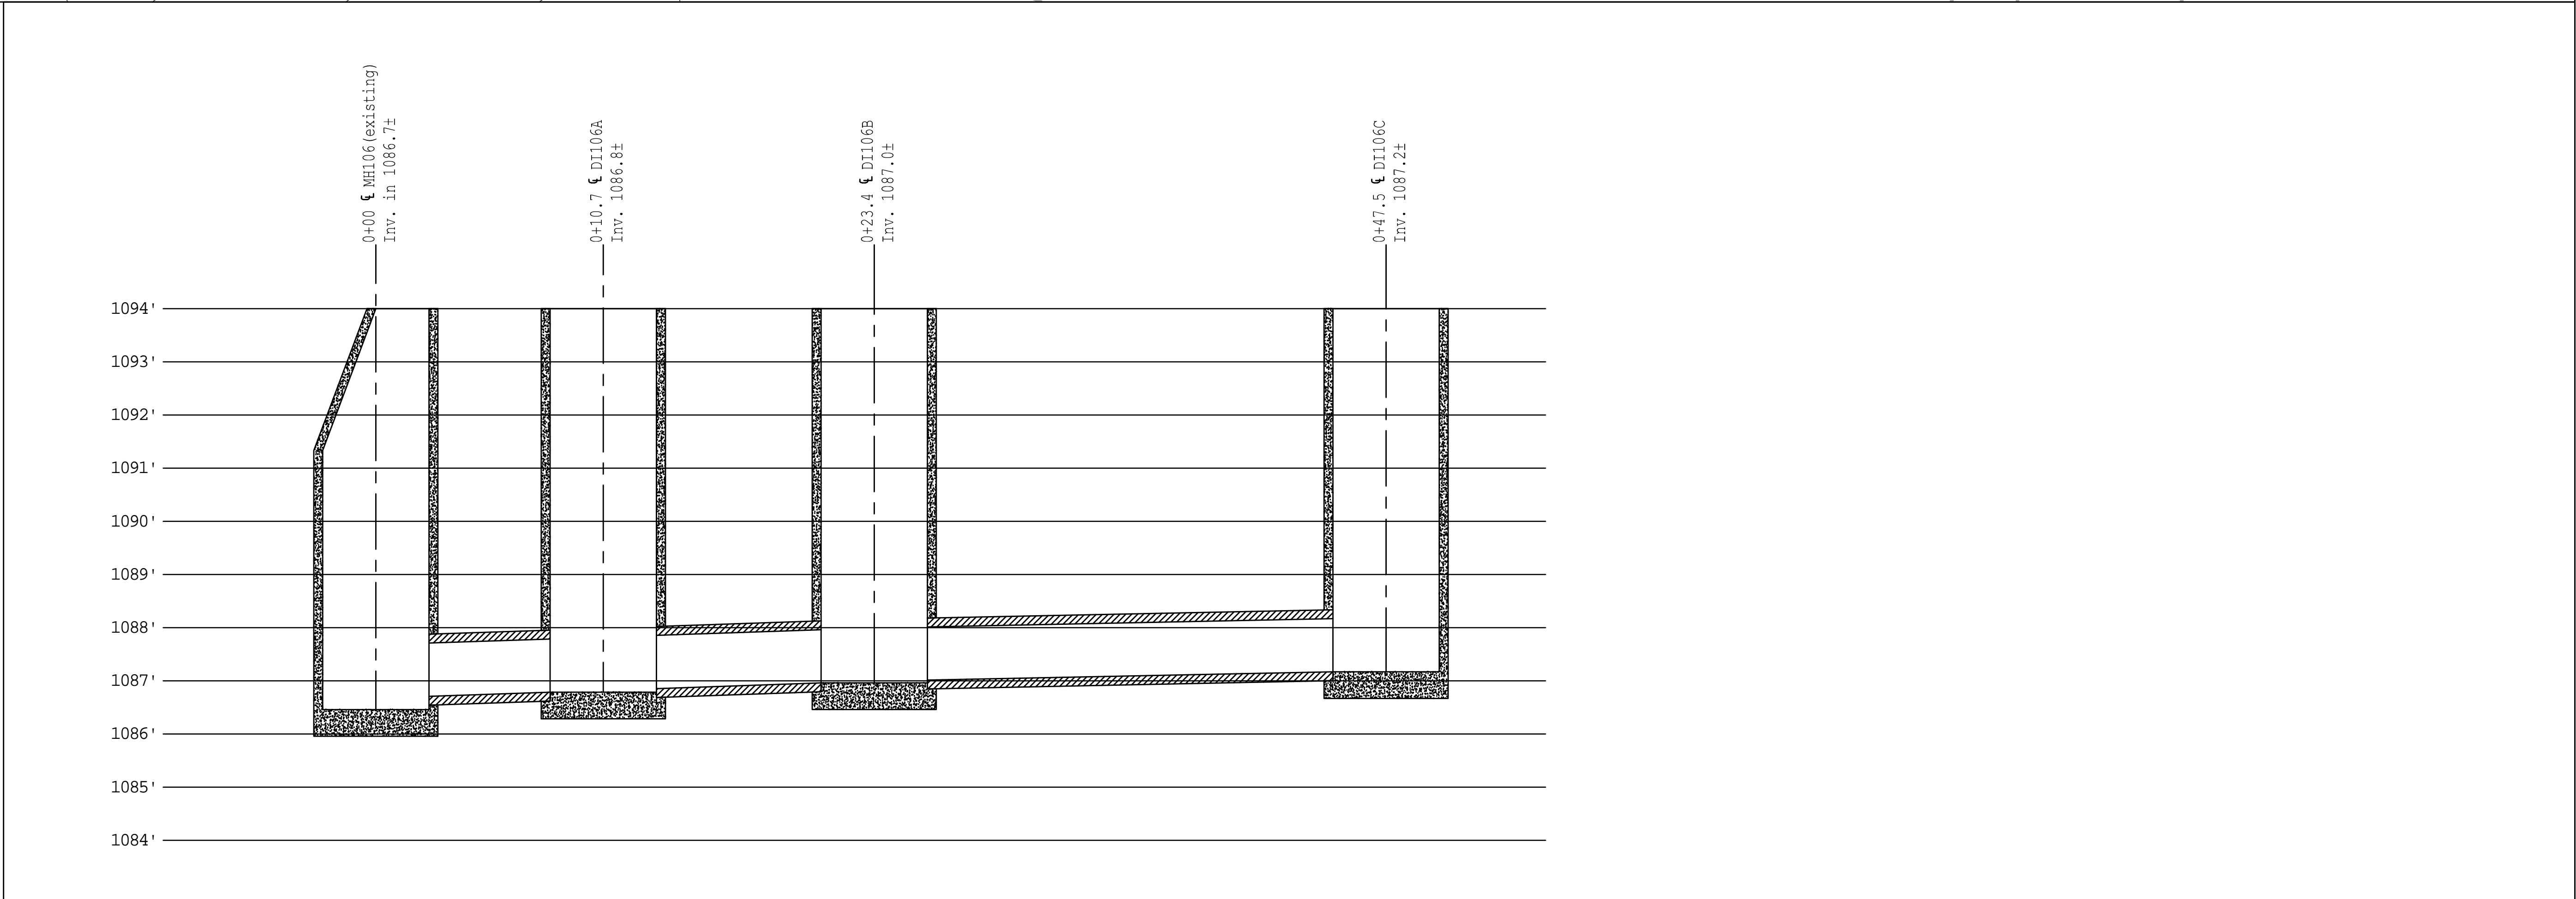

							Approved: Safety Manager		Drawing Title CU-401 Modifications @ Parking Lot F	Project Title UPGRADE WATER DISTRIBUTION	Date 5-25-12	Veterans Affairs			
							Approved: GEMS COORDINATOR				Project No. 658-12-104				
							Approved: Infection Control Officer	Approved: Chief of Staff	Approved: Chief of Facility Management Svc.	Building Number	Checked		Drawn EBC	DRAWING NO. 2559	Sheet 18 Of 25
							Approved: ENERGY ENGINEER	Approved: Associate Director	Approved: Medical Center Director	Location VAMC SALEM, VA.					
Revisions	Date														