

COMPANY. UPON COMPLETION OF THE ROOF SYSTEM IN THE AREA OF THE TELECOMMUNICATIONS SYSTEMS, COORDINATE RELOCATION WITH THE RELATED COMPANY.

REMOVE EXISTING BUILT-UP ROOF SYSTEM TO SUBSTRATE. REMOVE EXISTING VAPOR BARRIER ADHERED TO CONCRETE DECK. CONTRACTOR IS TO EMPLOY METHODS FOR REMOVAL OF ROOF MATERIAL INDICATED IN SHADED AREAS NOTED ON DRAWING 1-HA1 PER PROCEDURES SET FORTH ON THAT DRAWING.

DOCUMENT LOCATION, MARK, REMOVE AND STORE THE EXISTING CATHODIC PROTECTION SYSTEM. PROVIDE NEW CABLING AND ROOF ATTACHMENTS, AND REINSTALL AFTER INSTALLATION OF NEW ROOF ASSEMBLY PER DETAILS SET FORTH ON DRAWING 1-A16. REMOVAL AND REINSTALLATION WORK BY A UL-

REMOVE EXISTING BASE FLASHING FROM ROOF PERIMETER AND AROUND ALL ROOF PENETRATIONS.

REMOVE AND DISPOSE OF ALL DEMOLITION DEBRIS MATERIAL OFF-SITE PER VAMC GUIDELINES. REF. TO SPECIFICATION SECTION 01 74 19.

CERTIFIED CONTRACTOR AND VALIGHTNING PROTECTION SPECS.

INSTALL NEW MODIFIED BITUMEN ROOFING ON ALL ROOF SURFACES THIS SHEET. NEW INSULATION THICKNESS TO AVERAGE R-33 VALUE FOR WHOLE ROOF. REF. TO SPECIFICATION SECTION 07 22 00-2. SLOPE ROOF SURFACE TO DRAINS TO ENSURE POSITIVE DRAINAGE.

INSTALL NEW BASE FLASHING AND COUNTER FLASHING AS SHOWN ON ROOF PENETRATION AND PERIMETER WALL DETAILS ON 1-A14 AND 1-A15.

INSTALL COUNTER FLASHING AND SEALANTS AS DETAILED ON 1-A14.

INSTALL NEW ROOF DRAIN STRAINER COVERS.

EXISTING WALKWAY TO BE REMOVED AND REPLACED WITH NEW METAL WALKWAYS SIMILAR TO EXISTING ON 10TH FLOOR ROOF EAST SIDE. SUPPORT PVC SQUARE PIPE INSTALLED @ 4'-0" OC. SEE DETAILS ON 16 AND 17 ON 1-A15.

REMOVE DEBRIS, EQUIPMENT AND EXTRA MATERIAL UPON COMPLETION OF WORK, LEAVING ALL SURFACES IN A CLEAN CONDITION.

REF. TO 1-HA1 FOR ASBESTOS AND LEAD MATERIALS.

(5) EXISTING CELL PHONE SERVICE PROVIDER CABLETRAY/WALKWAY FOR PROTECTION OF CABLES.

(6) EXISTING CELL PHONE SERVICE PROVIDER ANTENNA MOUNTED TO PERIMETER ROOF RAILS. THE EXISTING CABLES FROM THE ANTENNAS ARE ROUTED ALONG THE PERIMETER OF THE ROOF AND THROUGH THE SURFACE-MOUNTED CABLETRAY/WALKWAYS. COORDINATE WITH THE SERVICE PROVIDER(S) FOR PROTECTION AND/OR TEMPORARY REMOVAL OF THESE CABLES DURING

COORDINATE WITH THE VAMC FOR PROTECTION AND/OR TEMPORARY REMOVAL OF WIRING TO RADIO/TV ANTENNA DURING CONSTRUCTION.

8 REMOVE AND REPLACE EXISTING ROOF WITH NEW ROOF SYSTEM.

SYMBOL LEGEND

ROOF PENETRATION

ROOF BLOCKING

MECHANICAL EQUIPMENT ROUND ROOF PENETRATION

V ROOF VENT

ROOF DRAIN

SCUPPER

H ROOF HATCH

ROOF LADDER ■ ROOF TIE-OFF

< CELL PHONE ANTENA

O── RADIO/TV ANTENA

OISH ANTENA

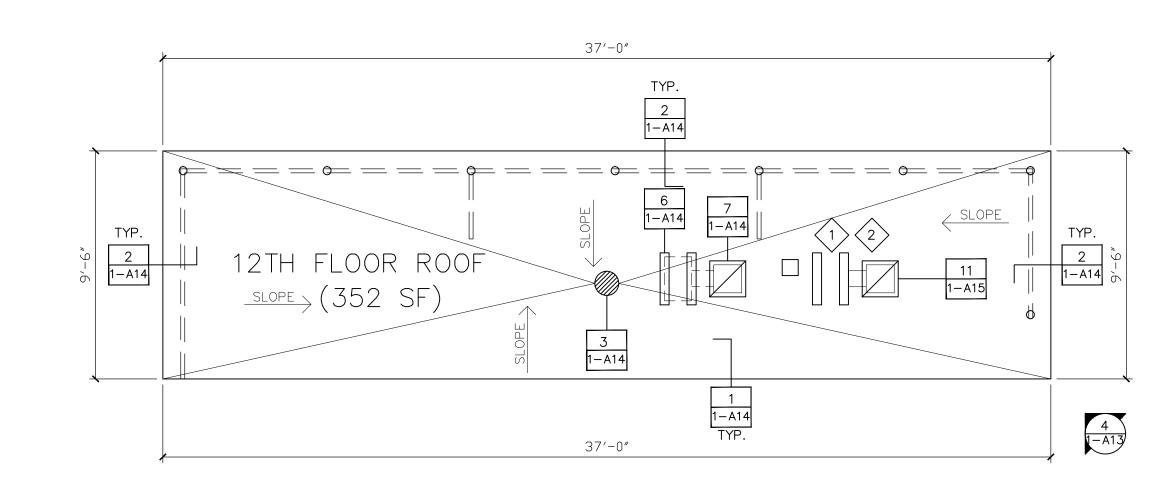




PHOTO # 1



PHOTO # 2



PHOTO # 3


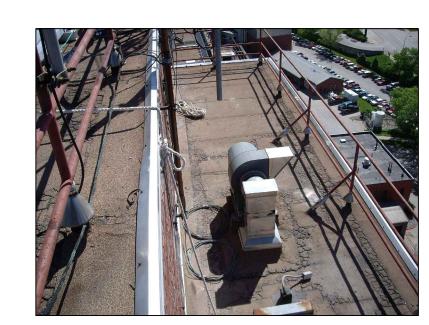


PHOTO # 4



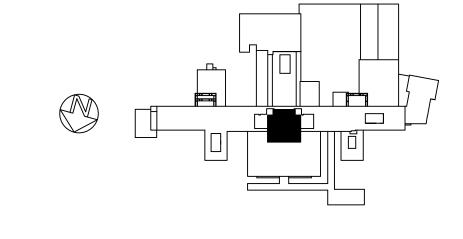

	CONSULTANTS:		ARCHITECT/ENGINEERS:		Drawing Title	Project Title REPLACE MAJOR ROOFS		Project Number 636A8-11-004	Office of
	Roofing Consultant: Robert L Dye, LC PO BOX 4581 Overland Park, Kansas, 66204	Industrial Hygiene Consultant: John A. Jurgiel + Associates, Inc. 1810 Craig Road, Suite 207 St. Louis, Missouri 63146	Decide Signature of the second	1401 Indian Pipe Lane, Wildwood, MO. 63038 Phone (314) 401-4078 phoenixdzn@yahoo,com	TWELFTH + THIRTEENTH FLOOR ROOF PLANS	BUILDING # 1		Building Number BLDG # 1	Construction and Facilities
					Approved: Project Director	Location IOWA CITY VAMC, IOWA Date Checked Drawn DNAT		Drawing Number 1-A13	Management Department of Veterans Affairs
Revisions: Date VA FORM 08-6231						03-13-2012	RWT RE	Dwg. 14 of 18	Veterans Affairs

 1
 2

 3
 9