


# GENERAL NOTES

- CONTRACTOR TO PROVIDE FLOORING AND WELDING ROD SAMPLES TO BE APPROVED BY VA INTERIOR DESIGNER
- WALLS TO BE PAINTED P1 UNLESS NOTED OTHERWISE
- WALL RUBBER BASE TO BE RB
- ALL WALL HANDRAILS AND CRASH RAILS TO BE UP
- ALL CORNER GUARDS TO BE CG
- FIELD VERIFY ALL DIMENSIONS
- ALL WORK SHOULD BE DONE IN ACCORDANCE WITH NFPA, VA, AND STATE OF IDAHO REQUIREMENTS AND ALL OTHER APPLICABLE CODES
- ALL WORK THAT DISRUPTS NORMAL MEDICAL CENTER OPERATIONS MUST BE DONE OUTSIDE OF NORMAL VA HOURS OF 7:30AM-4:30PM, MONDAY-FRIDAY
- REMOVE AND REINSTALL DOORSTOPS, SIGNAGE, ARTWORK AND OTHER ITEMS AS NECESSARY TO COMPLETE WORK
- REMOVE AND INSTALL NEW TRANSITION STRIPS AS NECESSARY TO COMPLETE WORK
- PREP AND PAINT ALL METAL DOORS AND METAL DOOR FRAMES P4
- REPLACE ALL ACUSTICAL CEILING TILES IN AREA OF WORK WITH ARMSTRONG 7558 (BID ALTERNATE)
- HANDRAIL TO BE INSTALLED AT 34" AFF TO TOP OF RAIL, CRASH-RAIL TO BE INSTALLED AT 13" AFF TO TOP
- FLOOR PREP TO INCLUDE BEAD BLASTING, NEUTRALIZE PH, INSTALL MOISTURE BARRIER

# KEYNOTES

- REMOVE EXISTING FLOORING, MASTIC, AND RUBBER BASE IN AREAS INDICATED TO RECEIVE NEW FLOORING
- PROVIDE AND INSTALL SHEET VINYL, AND RUBBER BASE
- PROVIDE AND INSTALL LUXURY VINYL TILE AND VINYL PLANK
- REMOVE EXISTING HANDRAILS AND CRASH RAILS, PROVIDE AND INSTALL NEW WALL PROTECTION (WP) APPROVED BY VA INTERIOR DESIGNER
- REMOVE EXISTING FRP PANELS
- PATCH AND PAINT WALLS WITH PAINT APPROVED BY VA INTERIOR DESIGNER
- EXISTING CG TO BE REPLACED
- INSTALL CG
- INSTALL CRASH RAIL IN THIS AREA

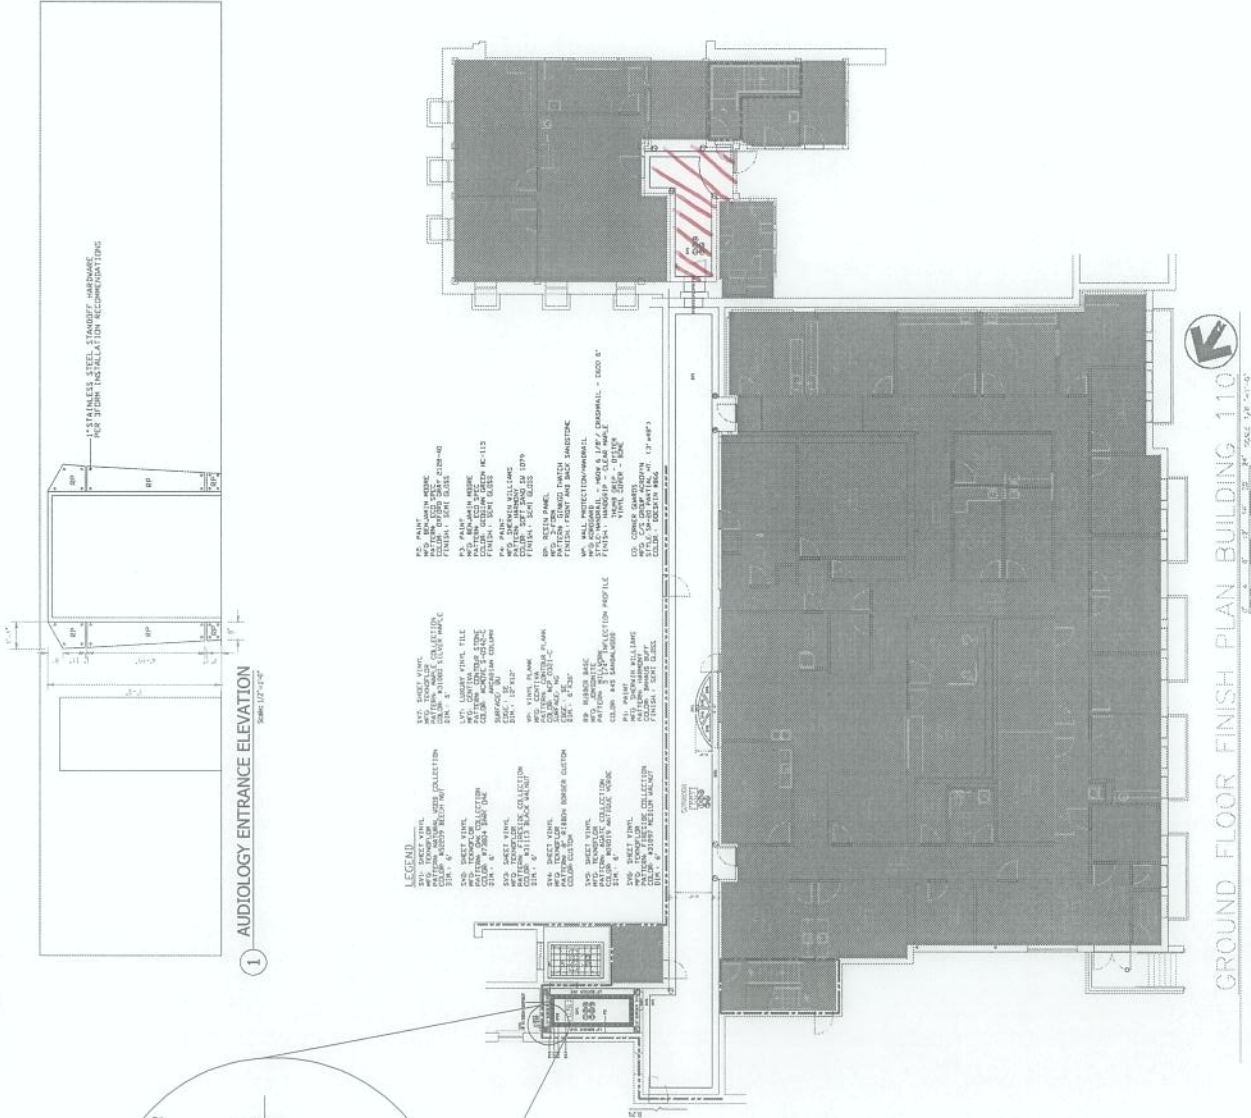

GROUND FLOOR FINISH PLAN BUILDING 110

	
DATE: 2/23/12 DRAWING NO: 531-13-105 PROJECT NO: 110A001	PROJECT NAME: BOISE VAMC UPGRADE BUILDING 110 HALLWAYS LOCATION: 110 OWNER: VAMC BOISE, IDAHO
SHEET NO: 21 (OF 100) SHEET TITLE: HALLWAYS	PROJECT NO: 110A001 PROJECT NAME: BOISE VAMC UPGRADE BUILDING 110 HALLWAYS LOCATION: 110 OWNER: VAMC BOISE, IDAHO