


one-eighth inch = one foot
one-quarter inch = one foot
three-eighths inch = one foot
one-half inch = one foot
three-quarters inch = one foot
one-half inch = one foot
one and one-half inch = one foot three inches = one foot

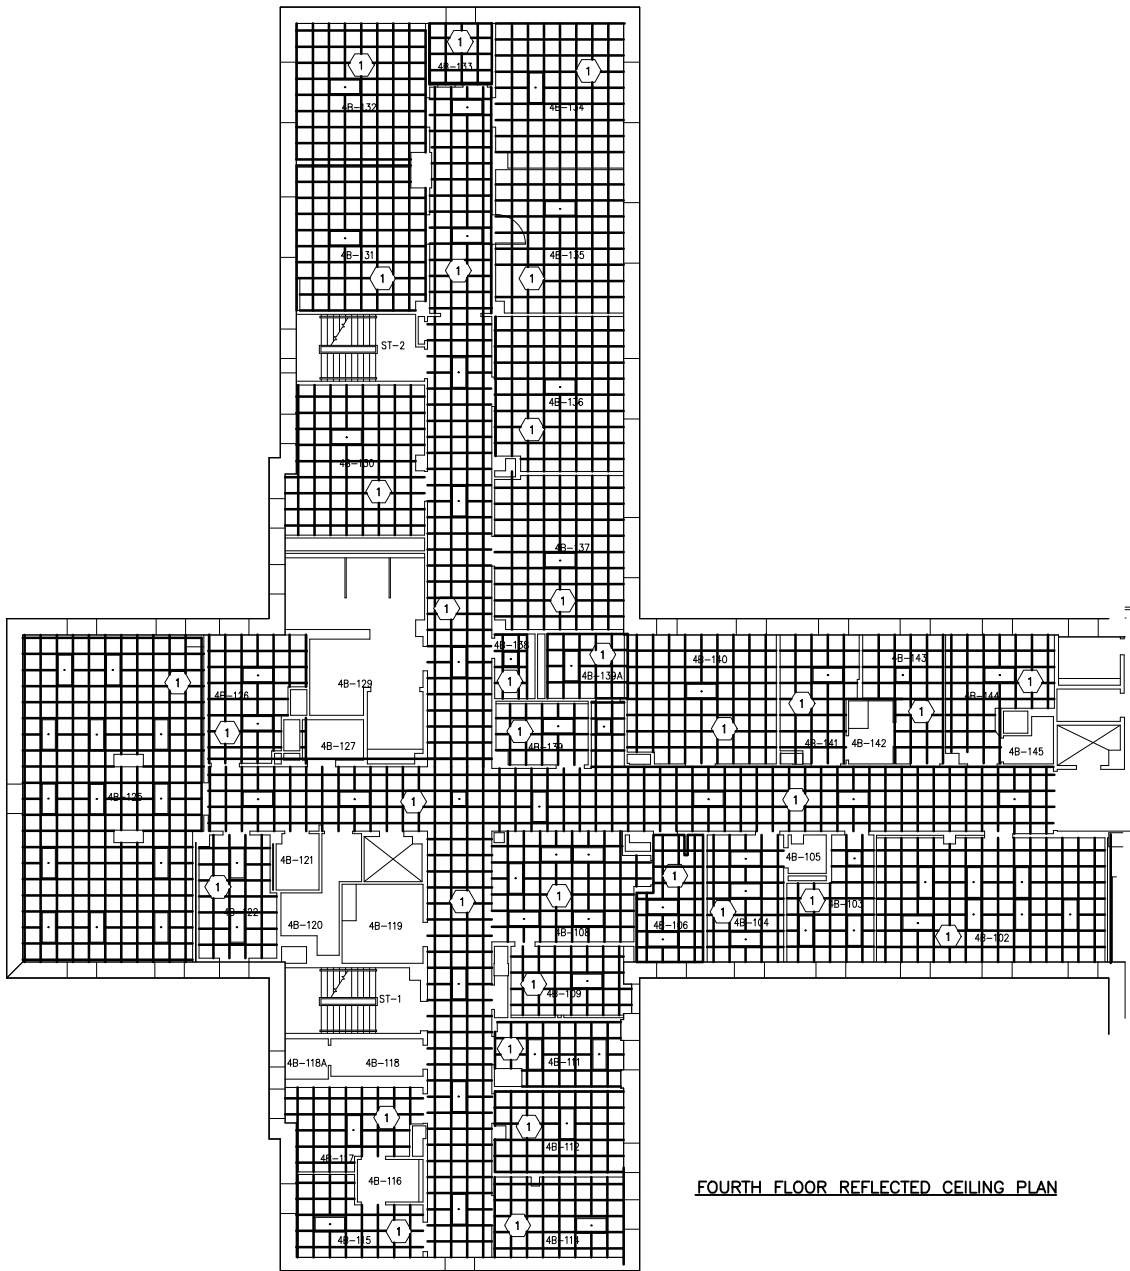

FOURTH FLOOR REFLECTED CEILING PLAN

GENERAL CONSTRUCTION NOTES

1. SEE APPROVED SUBMITTALS FOR NEW CEILING TYPE AND DUFFUSER/ RETURNS TYPES.
2. CONTRACTOR TO REPLACE EXISTING DIFFUSERS/RETURNS WITH NEW DIFFUSER/RETURNS.
3. CONTRACTOR TO REPAIR ANY SURFACES DAMAGED DURING REMOVAL AND INSTALLATION OF CEILING SYSTEM. FINISHES OF EXISTING SURFACES TO MATCH EXISTING FINISHES.
4. IT IS THE CONTRACTORS RESPONSIBILITY TO DISCONNECT AND RECONNECT ANY MECHANICAL OR ELECTRICAL DEVICES MOUNTED IN THE CEILING SYSTEM. CONTRACTOR TO NOTIFY COR IN ADVANCE BEFORE DISCONNECTING OR RECONNECTING ANY DEVICES.
5. ALL PATIENT ROOMS HAVE PATIENT LIFT SYSTEMS MOUNTED IN THE CEILINGS. CONTRACTOR TO USE CAUTION WHEN REMOVING EXISTING CEILING AND INSTALLING NEW CEILING.
6. THE ONLY CEILING MOUNTED DEVICES SHOWN ARE THE LIGHTS. IT IS THE CONTRACTORS RESPONSIBILITY TO FIELD VERIFY EXISTING CONDITION BEFORE SUBMITTING A PROPOSAL.

CODED NOTES


- 1 INSTALL NEW CEILING SYSTEM
- 2 INSTALL REMOVED CUBICAL TRACK IN EXISTING LOCATION. NOT SHOWN ON DRAWING.
- 3 THE GENERAL INTENT OF INSTALLATION OF NE CEILING IN EXISTING ROOMS ARE GETTING A FINISH UP GRADE IS TAHT THE NEW GRID IS CHANGING FROM A 2' X 4' GRID TO A 2' X 2' GRID PATTERN. THE NEW GRID PATTERN IS TO ALLOW FOR LIGHTS, DIFFUSERS, RETURNS, SPRINKLERS AND OTHER CEILING MOUNTED ITEMS TO REMAIN IN THE SAME LOCATION. ANY CHANGE THAT RESULTS I THE MOVING OF ANY CEILING MOUNTED ITEMS WILL BE AT THE COST OF THE CONTRACTOR.
- 4 CONTRACTOR TO REMOVE ITEMS, IE: SPRINKLER ESCUTHEONS, DIFFUSERS, RETURNS, ETC, AS REQUIRED TO INSTALL NEW CEILING GRID AND CEILING TILES AND REPLACE AFTER NEW CEILING IS INSTALLED. CONTRACTOR TO TAKE PICTURES PRIOR TO DEMOLITION TO DOCUMENT WHERE ITEMS ARE TO BE REINSTALLED.

DEMOLITION NOTES

- 1 REMOVE EXISTING CEILING SYSTEM.
- 2 REMOVED EXISTING CUBICAL TRACK IAND SAVE FOR REINSTALLATION

REFLECTED CEILING LEGEND

- 2' X 4' ACOUSTICAL TILE CEILING
- 2' X 2' ACOUSTICAL TILE CEILING
- 2' X 4' RECESSED LIGHT FIXTURE
- 2' X 2' RECESSED LIGHT FIXTURE
- RECESSED DOWN LIGHT FIXTURE



APPROVED:
APPROVED:
APPROVED:

APPROVED: INTERIM SAFETY MANAGER
JUSTIN GREENE
APPROVED: INFECTION CONTROL
SHAWN MILLS
APPROVED:

APPROVED: CHIEF, FACILITIES MANAGEMENT SERVICE LINE
CLAYTON HELMS
APPROVED: ASSOCIATE DIRECTOR for PATIENT CARE SERVICES/EXECUTIVE NURSE
DEBRA L LEGG
APPROVED: SERVICE LINE CHIEF

APPROVED: MEDICAL CENTER DIRECTOR
KARIN MCGRAW, MSN, FACHE
APPROVED: ASSOCIATE DIRECTOR
BRIAN MINNO, MS
APPROVED: CHIEF OF STAFF
JOHN D. BERRYMAN, M. D.

DRAWING TITLE:
Fourth Floor Ceiling Tile Replacement
PROJECT TITLE:
Fourth & Sixth Floor, Ceiling Tile Replacement
DATE
5/6/2012
REV.
SCALE
NTS
CHECKED BY:

DRAWING No.
AS-101
PROJECT No.
517-12-102
DRAWN BY:
JPP
CHECKED BY:

NOT TO SCALE

Medical Center
200 Veterans Av
Beckley, WV.
25801

