


FINAL: WHEN FINAL ELEVATIONS ARE SET, AND SITE IMPROVEMENTS ARE COMPLETED AND READY FOR OWNER ACCEPTANCE.

FINAL: WHEN FINAL ELEVATIONS ARE SET, AND SITE IMPROVEMENTS ARE COMPLETED AND READY FOR OWNER ACCEPTANCE.



- 1) FOLLOW MPR'S RECOMMENDATIONS FOR PLACEMENT OF STAKES (4' SPACING MIN. UNLESS OTHERWISE APPROVED)
- 2) ALL SOIL PILES SHALL BE SURROUNDED BY STAKED FIBER ROLL.
- 3) REPAIR OR REPLACE SPLIT, TORN, UNRAVELING OR SLUMPING FIBER ROLLS.
- 4) INSPECT FIBER ROLL ROLLS WHEN RAIN IS FORECAST, FOLLOWING RAIN EVENTS AND AT LEAST DAILY DURING PROLONGED RAINFALL. PERFORM REQUIRED MAINTENANCE.
- 5) IN MOST CASES, FIBER ROLL ROLLS DO NOT REQUIRE REMOVAL AND CAN BE ABANDONED IN PLACE. IF NOT EXCESSIVELY SOILED, ROLLS MAY BE REMOVED, REPLACED AND REUSED.
- 6) NO PLASTIC, MONOFILAMENT, JUTE, OR SIMILAR EROSION CONTROL MATTING THAT COULD ENTANGLE SNAKES WILL BE PLACED ON A PROJECT SITE WHEN WORKING WITHIN 200 FEET OF SNAKE AQUATIC OR RICE HABITAT. POSSIBLE SUBSTITUTIONS WOULD INCLUDE COCOFIBER MATTING, TACKIFIED HYDROSEEDING COMPOUNDS, OR OTHER MATERIAL APPROVED BY THE WILDLIFE AGENCIES.

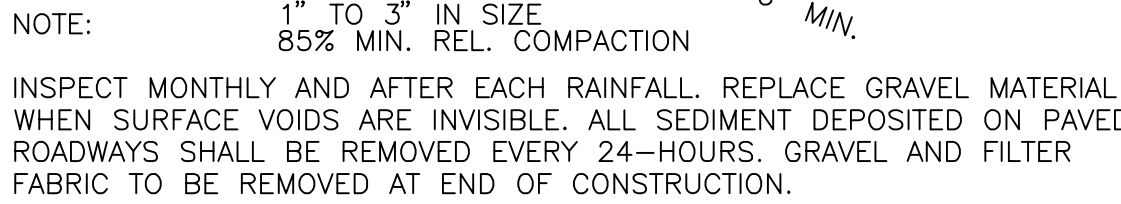


NOT TO SCALE



- 1) STEEL POSTS WHICH SUPPORT THE SILT FENCE SHALL BE INSTALLED ON A SLIGHT ANGLE TOWARD THE ANTICIPATED RUNOFF SOURCE. POST MUST BE EMBEDDED A MIN. OF ONE (1') FOOT.
- 2) THE TOE OF THE SILT FENCE SHALL BE TRENCHED IN WITH A SPADE OR MECHANICAL TRENCHER, SO THAT THE DOWNSLOPE FACE OF THE TRENCH IS FLAT AND PERPENDICULAR TO THE LINE OF FLOW. WHERE FENCE CANNOT BE TRENCHED (E.G., PAVEMENT) THE FENCE FABRIC FLAP WITH WASHED GRAVEL OR SANDBAGS ON UPHILL SIDE TO PREVENT FLOW UNDER FENCE.
- 3) THE TRENCH MUST BE A MINIMUM OF 6 INCHES DEEP AND 6 INCHES WIDE TO ALLOW FOR THE FENCE FABRIC TO BE LAID IN THE GROUND AND BACKFILLED WITH COMPACTED MATERIAL.
- 4) SILT FENCE SHALL BE SECURELY FASTENED TO EACH STEEL SUPPORT POST OR TO WOVEN WIRE, WHICH IN TURN IS SECURELY FASTENED TO THE STEEL FENCE POSTS.
- 5) INSPECTION SHALL BE MADE WEEKLY OR AFTER EACH RAINFALL EVENT AND REPAIR OR REPLACEMENT SHALL BE MADE PROMPTLY AS NEEDED.
- 6) SILT FENCE SHALL BE REMOVED WHEN THE SITE IS COMPLETELY STABILIZED SO AS NOT TO BLOCK OR IMPEDE STORM FLOW OR DRAINAGE.
- 7) ACCUMULATED SILT SHALL BE REMOVED WHEN IT REACHES A DEPTH OF 8 INCHES. THE SILT SHALL BE DISPOSED OF IN AN APPROVED SITE AND IN SUCH A MANNER AS TO NOT CONTRIBUTE TO ADDITIONAL SILTATION.

NOT TO SCALE

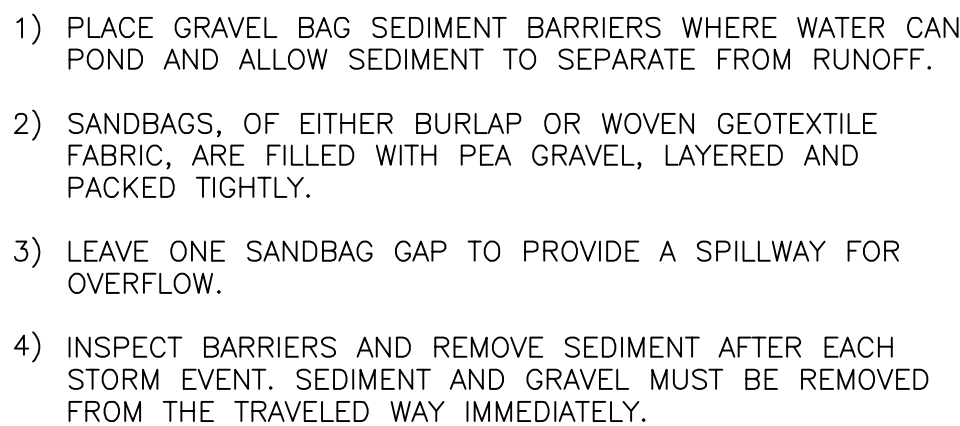

F4



- 1) TURN THE ENDS OF THE BAG BARRIER UP--SLOPE TO PREVENT RUNOFF FROM GOING AROUND THE BARRIER.
- 2) STACK BAGS AT LEAST TWO BAGS HIGH. BURY BOTTOM BAG 1/2 BAG HEIGHT.
- 3) BUTT ENDS OF BAGS TIGHTLY. OVERLAP BUTT JOINTS OF ROW BENEATH WITH EACH SUCCESSIVE ROW.
- 4) BAGS SHOULD BE WOVEN POLYPROPYLENE, POLYETHYLENE OR POLYAMIDE FABRIC, MINIMUM UNIT WEIGHT OF 4 OUNCES/YD<sup>2</sup>.
- 5) BAG FILL MATERIAL SHOULD BE NON-COHESIVE, CLASS 1 OR CLASS 2 PERMEABLE MATERIAL FREE FROM CLAY AND DELETERIOUS MATERIAL.
- 6) INSPECT BAGS PRIOR TO FORECAST RAIN, DAILY DURING EXTENDED RAIN EVENTS, AFTER RAIN EVENTS, WEEKLY DURING THE WET SEASON AND AT TWO WEEK INTERVALS DURING THE DRY SEASON.
- 7) BAGS EXPOSED TO SUNLIGHT WILL NEED TO BE REPLACED EVERY TWO TO THREE MONTHS DUE TO DEGRADATION OF THE BAGS.
- 8) REMOVE SEDIMENT WHEN SEDIMENT ACCUMULATION REACHES 1/3 OF THE BARRIER HEIGHT. SEDIMENT REMOVED MAY BE INCORPORATED INTO EARTHWORK ON THE SITE OR DISPOSED OF AT AN APPROPRIATE OFFSITE LOCATION.

**F6**

D:\Projects\WJXU0039\Drawings\WJXU0039.UPP\CDs\PH-1A\07 1-100 - 1-101\Fraction Control Plan.dwg 3-21-12 10:51:34 AM Greenes