

**Statement of Work**  
**James J. Peters VA Medical Center**  
**130 West Kingsbridge Road**  
**Bronx, NY 10468**  
**Replacement of Compactors**

**A. GENERAL INFORMATION**

1. Title of Project: Compactors Replacement

The James J. Peters VA Medical Center located at 130 West Kingsbridge Road, Bronx, NY is seeking to procure the replacement of two (2) compactors a rear load enclosed hopper w/ safety gate interlock. Below please see a photograph of the current compactors located at the James J. Peters VA Medical Center.

1. New compactors will reduce waste storage, as well as help to eliminate odor and waste leakage problems associated with wet waste. The compactors will be used for JJP VAMC general waste. This procurement includes two (2) new portable 35 Cu. Yard customized compactors. The vendor shall be responsible for any damaged parts during assembly and transportation. Contractor shall be responsible for replacement of parts at no additional expense to the Government.

Please note the need for custom requirements per current structural design in the compactor room and safety requirements for James J. Peters Employees and visitors.

2. Scope of Work: Vendor shall be responsible for providing two (2) new 35 Cu. Ya. portable customized compactors, W/10 h. p. motor, ½” front hinged push plate.


The overall length is approximately – 268”/22’4”

The overall width is approximately – 92”

The overall height is - 101”

The compactor also has an enclosed doghouse with door and interlock (picture is attached) . The Doghouse enclosure must be welded over the hopper (Not to exceed the height of the compactor), and a door opens to the rear of the Doghouse for easy loading.

Vendor shall also customize a hole to install the compactor. After the installation an inspection with the vendor and authorized facility staff to confirm requirement is satisfactory.

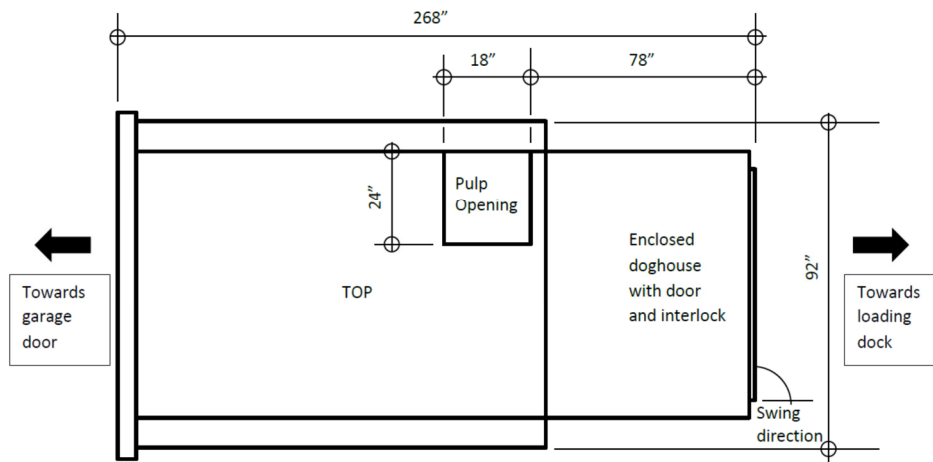

COMPACTOR – PLAN VIEW (OF TOP PULP OPENING)

3. Period of Performance: The contractor shall provide the deliverables required under this Statement of Work within 30 calendar days or less from date of award, unless otherwise directed by the Contracting Officer. The contractor shall provide a warranty period of 12 months after delivery and acceptance.
4. General Information And Requirements: All measurements must be field verified via a site visit after award.

**Site Visit Highly Recommended-Availability: Monday through Friday 10 am to 1 pm.**

Prior to submitting a quote, offerors are urged and expected to inspect the site where services are to be performed and to satisfy themselves regarding all general and local conditions that may affect the cost of contract performance, to the extent that the information is reasonably obtainable. In no event shall failure to inspect the site constitute grounds for a claim after contract award.

Vendor shall not provide alternate products as alternate products cannot be considered. Deviation from this plan would restrict adaptability of product.

- Equipment shall meet a 24 /7 hour work day.
- Equipment shall include hardware to install.
- Upon completion of inspection COR communicate to Contracting Officer the same authorizing that products have been received complete and payment can be released.

5. Type of Contract: Firm Fixed Price

Contracting Office Address:

VISN 2 Network Contracting Office  
James J. Peters VA Medical Center  
130 West Kingsbridge Road,  
Bronx, New York 10468-3992

Place of Delivery:

James J. Peters VA Medical Center  
130 West Kingsbridge Road  
Bronx, NY 10468  
ATTN: FMSC



**B. Deliverables (include but not limited to):**

<b>Item #</b>	<b>Description/Part Number*</b>	<b>Qty</b>	<b>Price</b>	<b>Extended Amount</b>
1	New 35 Cu. Yd. Portable Compactor Model SC 35 W/ 10 Horse Power Motor, ½" Front hinged push plate	2		
2	Custom Requirements <ul style="list-style-type: none"><li>• Rear and Load enclosed Hopper with Safety Gate Interlock for Compactor security purposes</li><li>• Hydraulic Hose – Placed Right and Left for a center motor</li><li>• 2'X18" Pulp Hole Square Opening on Top to the right side, 6.5' from Rear Edge of Hopper for food disposal</li></ul>	2		
3	Delivery and Installation	1		
4	Warranty on all equipment and parts for a 12 month period after installment	2		
Total of all Line Items				