



BRAINERD AUDIOLOGY BOOTH

1-19-16

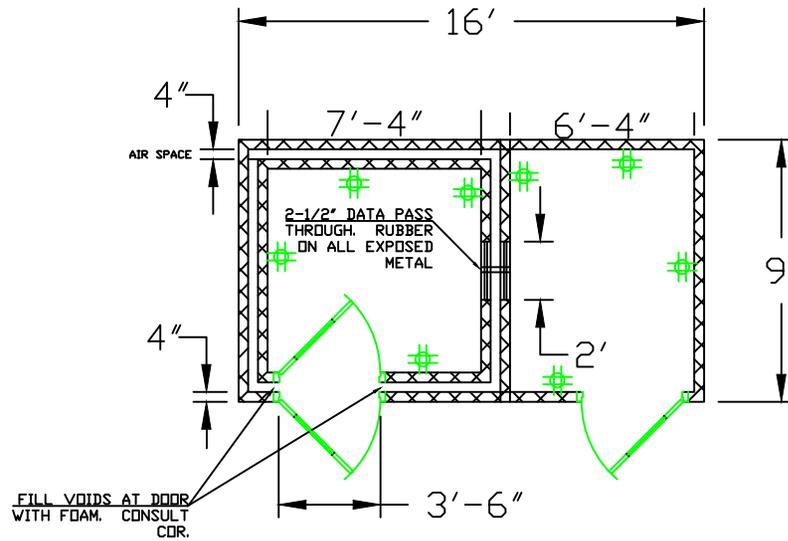

GENERAL REQUIREMENTS:

- WINDOWS IN THE DOORS(22"W X 60"H) & BETWEEN BOOTHS(30"W X 34"H) ABOVE DATA PASSTHROUGH.
- NO CLOSING HINGES ON DOORS
- FILLER PANELS AT ADJACENT WALLS/CEILING/FLOORS TO MATCH BOOTH COLORS
- HVAC SUPPLY & RETURN (EACH BOOTH)
- EPOWER ELECT. (EACH BOOTH)
- NORMAL ELECT. (EACH BOOTH)
- FIRE STROBE (EACH BOOTH)
- FIRE SPRINKLER W/FLEX LINE (EACH BOOTH)
- PATIENT CALL (DOCTOR SIDE)
- DIMMABLE LIGHTS LED CAN (EACH BOOTH)
- DIMMER SWITCH (EACH BOOTH)
- 2-1/2" DATA PASSTHROUGHS BETWEEN DOCTOR & PATIENT SIDES. INCLUDE RUBBER SURROUND TO PROTECT FROM METAL PANELS CUTTING DATA LINES.
- PHONE/DATA CONNECTIONS (EACH BOOTH)
- FILL INNER BOOTH & OUTER BOOTH VOIDS WITH FOAM AT DOORS.
- LARGE GRIPABLE DOOR HANDLES ON PULL SIDE, PUSH PLATES ON PUSH SIDE.
- POWDER COATED PANEL PAINT, MATCH ADJACENT WALLS. BENJAMIN MOORE VERIFY & MATCH EXISTING.
- CARPET FLOOR INTERIOR (EACH BOOTH) VERIFY & MATCH EXISTING
- CARPET BASE EXTERIOR (EACH BOOTH) MATCH INTERIOR CARPET.
- CONCRETE FLOOR DEPRESSION: 4-5/8" WITH 1/8" TOLERANCE UNDER BOOTH.
- BOOTH CONTRACTOR TO FURNISH & INSTALL ALL BOOTH UTILITIES, FINISHES & CONNECTIONS TO BUILDING SYSTEMS FOR A COMPLETE TURN KEY PRODUCT.
- ONCE BOOTHS ARE PURCHASED AND INSTALLED PER THE CONTRACT TO THE EXISTING BUILDING SPACE.(INCLUDING ALL UTILITY CONNECTIONS) THE BOOTH CONTRACTOR SHALL NOTIFY THE CDR & THE BOOTH CONTRACTOR'S INDEPENDANT (FROM MANUFACTURER) TESTING AGENT TO VERIFY THE MANUFACTURER & THE INSTALLATION MEETS THE TESTING CRITERIA.

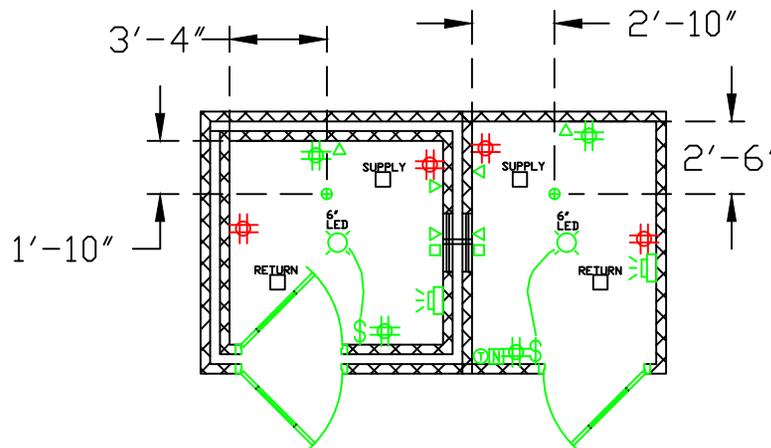

\$	RECESS MOUNTED DIMMER SWITCH
#	RECESS MOUNTED QUAD RECEPTACLE (20A 18'A.F.F.)
⊙	RECESS MOUNTED 6" CEILING CANISTER LED LIGHT
☒	NURSE CALL
⊕	HVAC THERMOSTAT
☒	75cd FIRE STROBE
⊓	JACK PANEL (LOCATED UNDER WINDOW)
⊕	SPRINKLER HEAD LOCATION