
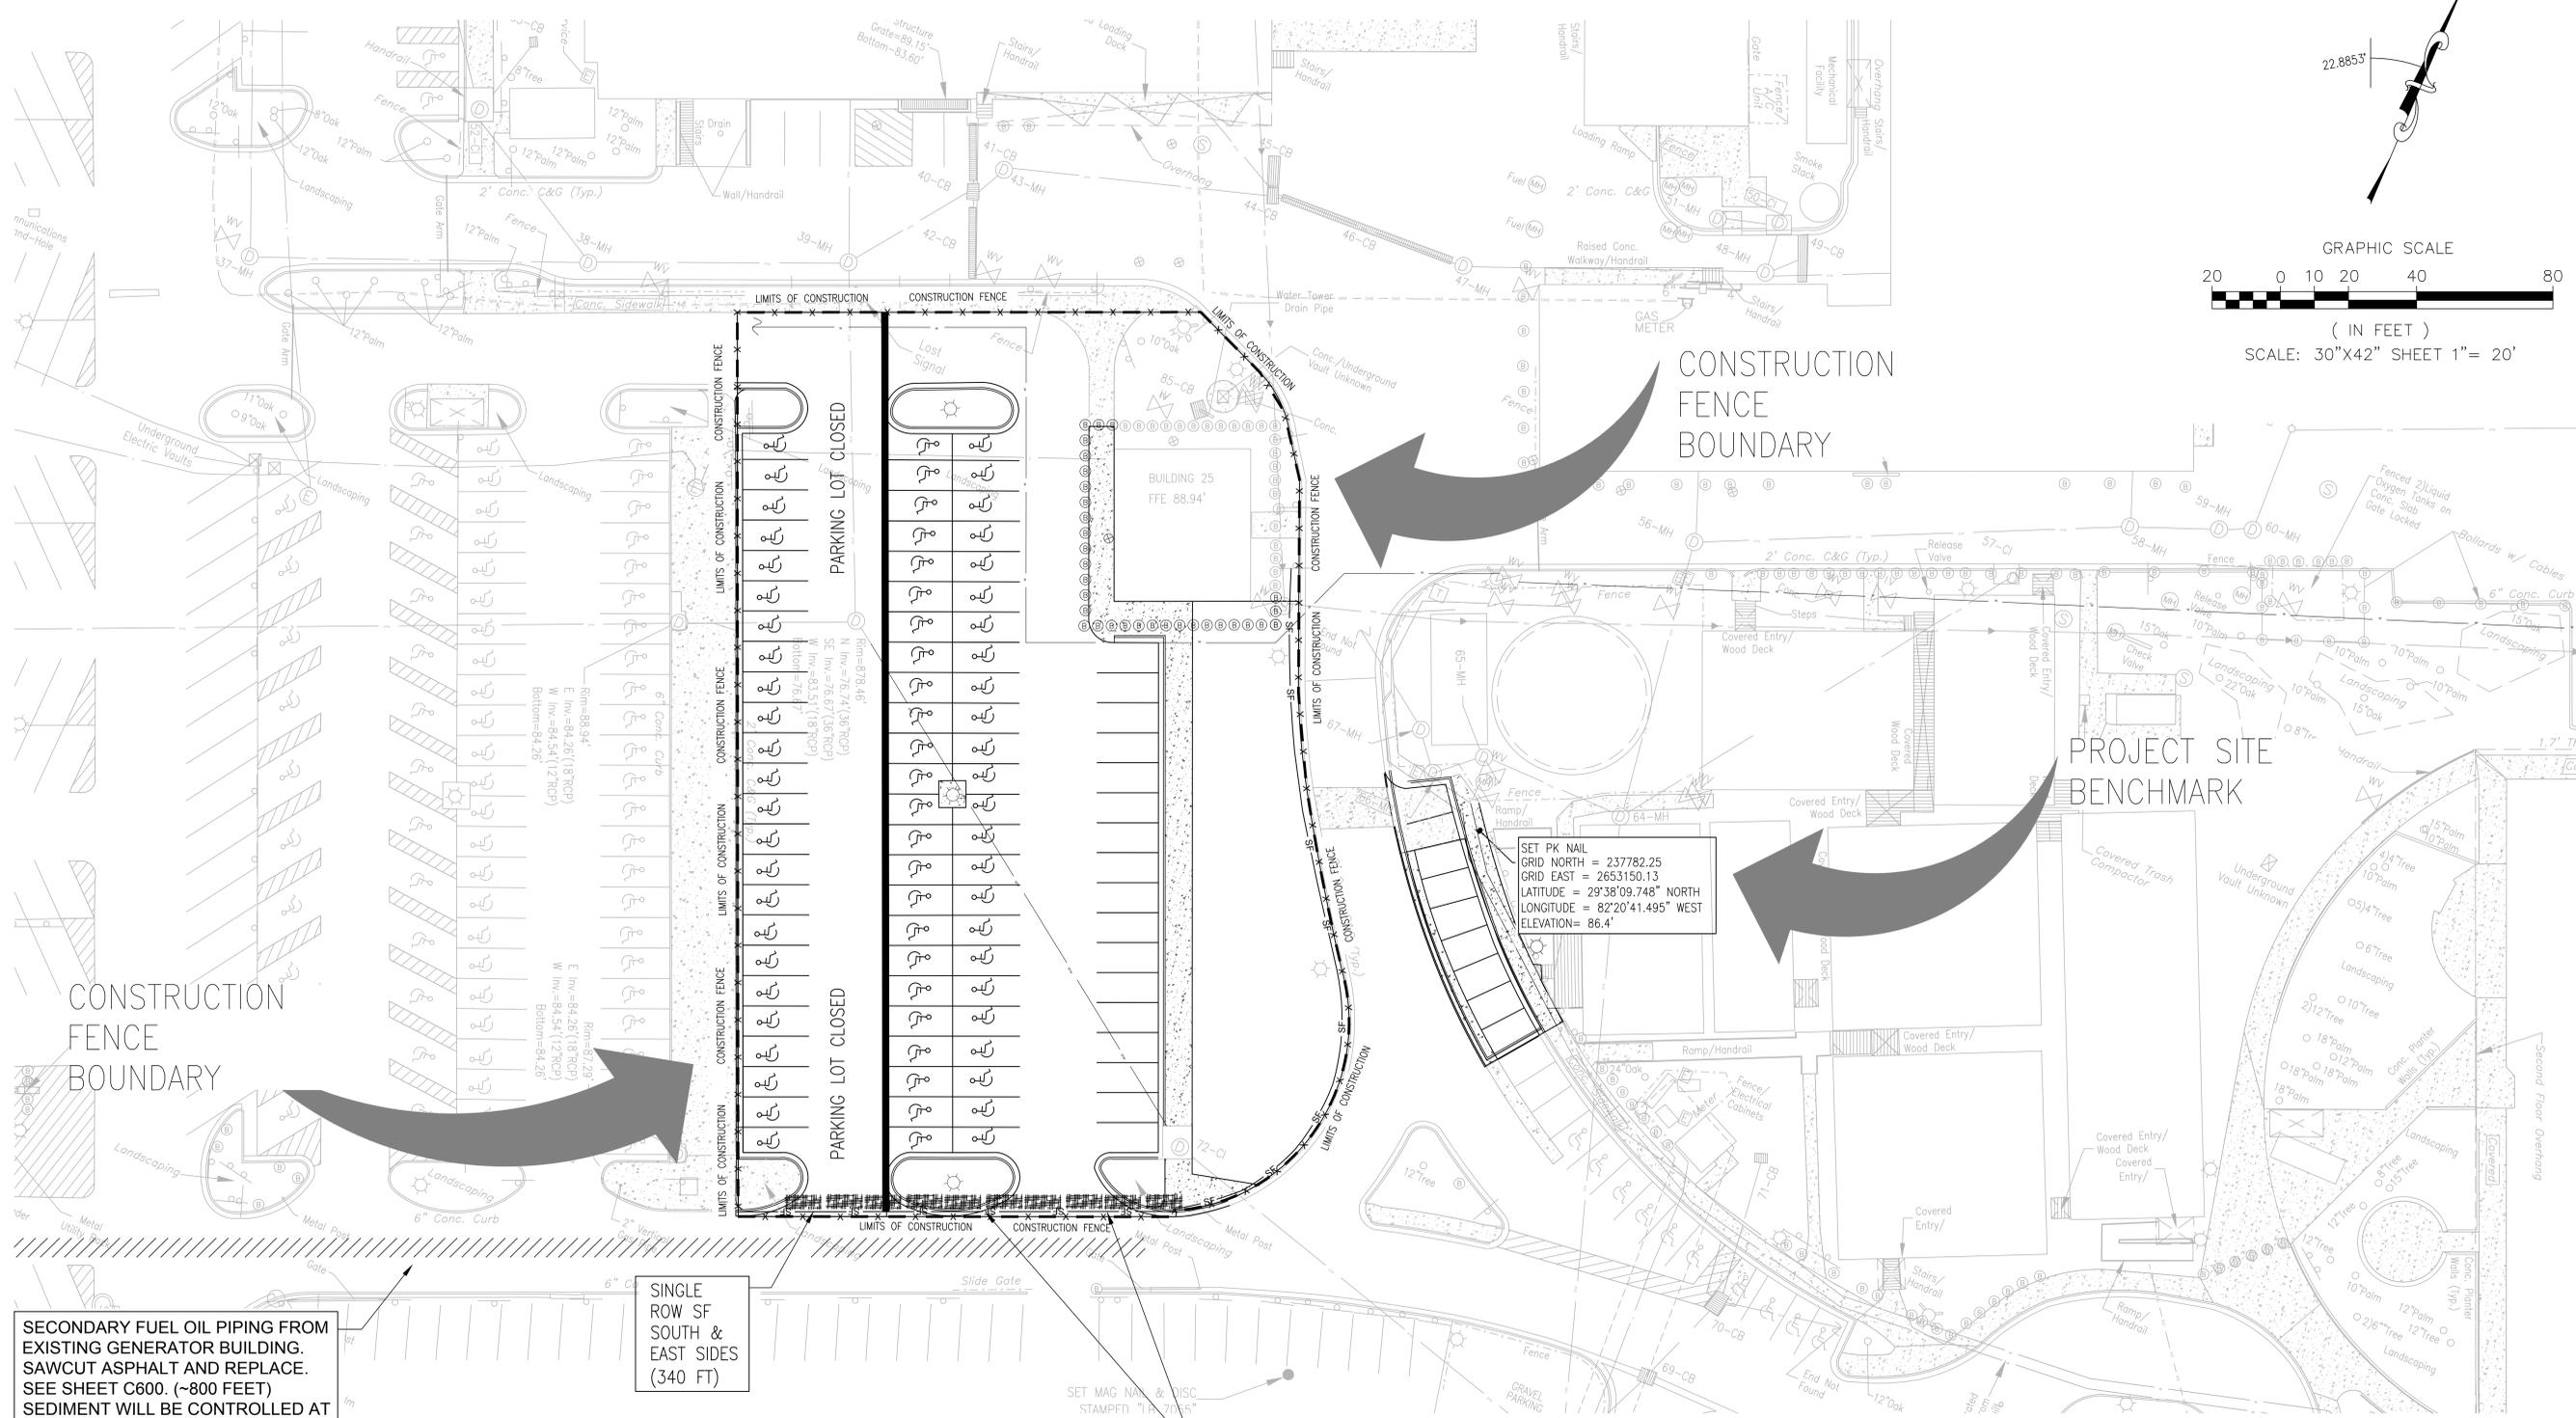
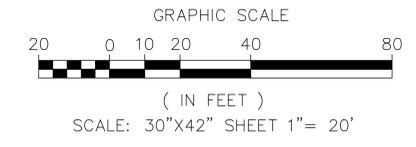


three inches = one foot
 one and one half inches = one foot
 one inch = one foot
 three quarters inch = one foot
 one half inch = one foot
 three eighths inch = one foot
 one quarter inch = one foot
 one eighth inch = one foot
 one sixteenth inch = one foot



SET PK NAIL
 GRID NORTH = 237782.25
 GRID EAST = 2653150.13
 LATITUDE = 29°38'09.748" NORTH
 LONGITUDE = 82°20'41.495" WEST
 ELEVATION = 86.4'

SECONDARY FUEL OIL PIPING FROM EXISTING GENERATOR BUILDING. SAWCUT ASPHALT AND REPLACE. SEE SHEET C600. (~800 FEET) SEDIMENT WILL BE CONTROLLED AT THE POINT OF IMPACT.

SINGLE ROW SF SOUTH & EAST SIDES (340 FT)

NOTE: HAYBALES OR SEDIMENT SOCK PLACED ON IMPERVIOUS SURFACE, WHICH CAN NOT BE STAKED IN PLACE, MUST BE HELD IN PLACE ANOTHER WAY (I.E. SANDBAGS).
 AFTER DEMOLITION OF ASPHALT, REPLACE HAYBALES OR SEDIMENT SOCK WITH SILT FENCE.

- EROSION AND SEDIMENT CONTROL NOTES:**
1. SILT BARRIERS SHALL BE INSTALLED AROUND SITE AS DETAILED PRIOR TO ANY CONSTRUCTION ACTIVITY.
 2. CONTRACTOR SHALL MAINTAIN AND CONTINUE TO INSTALL SILT BARRIERS AS REQUIRED TO PROVIDE EROSION CONTROL.
 3. ALL PRACTICAL AND NECESSARY EFFORT SHALL BE TAKEN, DURING CONSTRUCTION TO CONTROL AND PREVENT EROSION AND TRANSPORT OF SEDIMENT TO SURFACE DRAINS, SURFACE WATER OR OFFSITE.
 4. STABILIZATION MEASURES SHALL BE INITIATED AS SOON AS PRACTICABLE IN PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED, BUT IN NO CASE MORE THAN 14 DAYS AFTER THE CONSTRUCTION ACTIVITY IN THAT PORTION OF THE SITE HAS TEMPORARILY OR PERMANENTLY CEASED, UNLESS ACTIVITY IN THAT PORTION OF THE SITE WILL RESUME WITHIN 21 DAYS.
 5. ALL SEDIMENT CONTROL MEASURES SHALL BE INSPECTED AT LEAST ONCE EVERY SEVEN CALENDAR DAYS AND AFTER ANY STORM EVENT GREATER THAN 0.5 INCHES OF PRECIPITATION DURING ANY 24 HOUR PERIOD. ALL SEDIMENT CONTROL FEATURES SHALL BE MAINTAINED UNTIL FINAL STABILIZATION HAS BEEN OBTAINED.

FINAL DESIGN
 APPROVED FOR CONSTRUCTION

Revisions: _____ Date _____ V4 FORM 08-6231	CONSULTANTS: _____ _____	ENGINEER-OF-RECORD MICHAEL D. TOOTLE FL P.E. NO. 67818	ARCHITECT/ENGINEERS: AKEA INC. 3603 NW 98th Street, Suite B Gainesville, FL 32606 Phone: (352) 474-6124 Fax: (352) 553-4437 COA: FL #26693 AKEA Project No. 083-14	Drawing Title SEDIMENT AND EROSION CONTROL PLAN	Project Title REPLACE BOILERS - FCA D, ENERGY AT THE MALCOM RANDALL VAMC	Project Number 573-14-600	Office of Construction and Facilities Management
	Approved: Project Director	Location GAINESVILLE, FLORIDA	Drawing Number C110	Date JULY 8, 2016	Checked MDT	Drawn JG	Department of Veterans Affairs