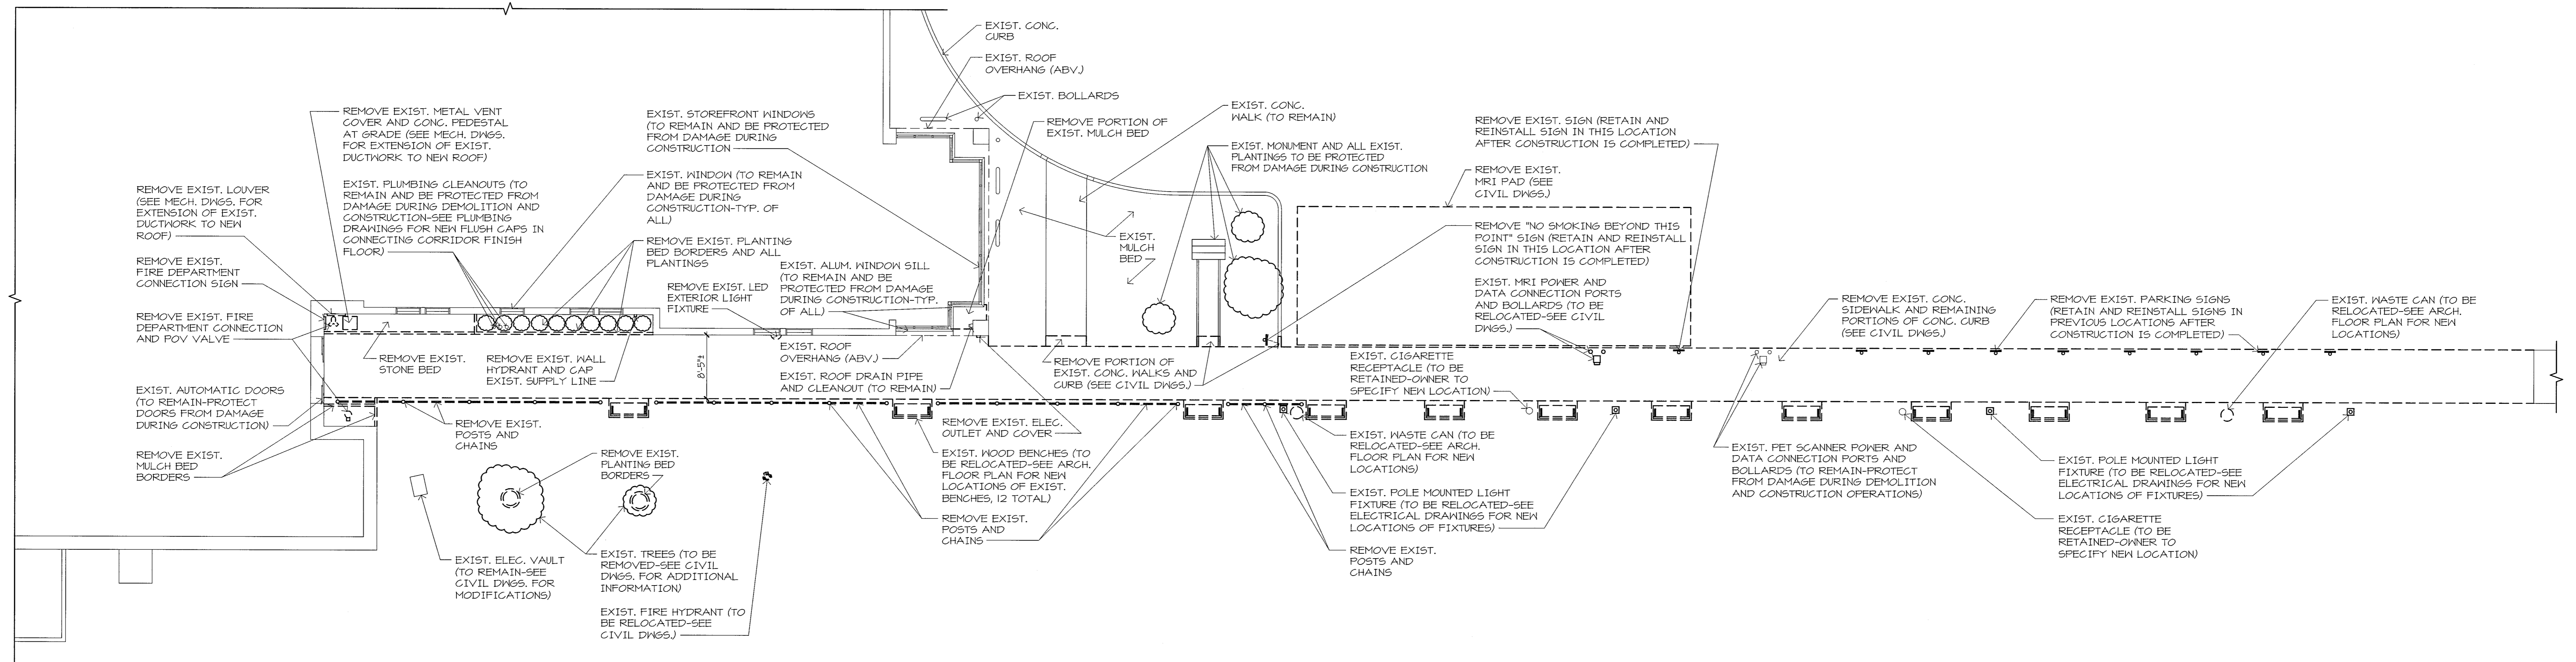


1. BEFORE WORK COMMENCES, CONTRACTORS SHALL CONDUCT A THOROUGH SURVEY OF THE BUILDING AND NOTIFY THE OWNER IN WRITING OF ALL DISCREPANCIES BETWEEN EXISTING CONDITIONS AND THOSE SHOWN ON DRAWINGS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR NOTIFYING THE ARCHITECT OF ANY DISCREPANCY INFORMATION CONCERNING EXISTING CONDITIONS THAT MAY NOT BELIEVE THE CONTRACTOR'S RESPONSIBILITIES OF PERFORMANCE OF WORK IN ACCORDANCE WITH REQUIREMENTS OF THE CONTRACT DOCUMENTS.
2. THESE DRAWINGS HAVE BEEN DEVELOPED FROM EXISTING DRAWINGS AND MAY NOT REFLECT ACTUAL FIELD CONDITIONS. THE CONTRACTOR SHALL VERIFY FIELD CONDITIONS AND NOTIFY THE ARCHITECT IN WRITING OF ANY FIELD CONDITIONS DESCRIBED IN THE CONTRACT DOCUMENTS WHICH CANNOT BE PERFORMED DUE TO EXISTING CONDITIONS.
3. EXISTING EXIST DOORS, ACCESS TO EXITS AND FIRE PROTECTION SHALL BE MAINTAINED DURING DEMOLITION OPERATIONS. ALL FIRE PROTECTION, ACCESS AND EXITS SHALL BE OPERATIONAL AFTER COMPLETION OF ALL DEMOLITION WORK.
4. VERIFY WITH OWNER FINAL DISPOSITION OF ALL SITE ITEMS REMOVED.
5. PROTECT FROM DAMAGE ALL MATERIALS TO REMAIN.
6. CONTRACTOR SHALL USE CAUTION WHEN PERFORMING DEMOLITION AT OR NEAR FIRE-RATED WALLS OR SHAFTS SO AS NOT TO DISRUPT INTEGRITY OF THE FIRE RATINGS OF THE WALLS OR SHAFTS AND REPAIR DAMAGE TO WALLS OR SHAFTS AS REQUIRED TO ENSURE CONDITIONS RATINGS. REPAIR ADJACENT SURFACES AS REQUIRED TO RECEIVE NEW FINISH.
7. DEMOLITION WORK INCLUDES, BUT IS NOT NECESSARILY LIMITED TO THOSE ITEMS NOTED. OTHER ITEMS OF A MINOR NATURE WHICH MAY EXIST BUT ARE NOT SPECIFICALLY NOTED ON THE DRAWINGS ARE TO BE REMOVED AS REQUIRED, TO PROVIDE ACCESS AND ALLOW ALTERNATION OR NEW WORK TO PROCEED. REPAIR ADJACENT SURFACES AS REQUIRED TO RECEIVE NEW FINISHES.
8. NOT ALL MECHANICAL, ELECTRICAL AND PLUMBING EQUIPMENT WHICH IS REQUIRED TO BE REMOVED IS SHOWN ON CONTRACT DOCUMENTS. CONTRACTOR SHALL REMOVE ALL EQUIPMENT WHICH WILL INTERFERE WITH NEW CONSTRUCTION. EQUIPMENT WHICH WILL NO LONGER BE USED SUCH AS PIPES, CONDUITS AND DUCTS SHALL BE REMOVED COMPLETELY BACK TO THE POINT OF SERVICE AND CAPPED OR PLUGGED. ALSO SEE MECHANICAL, PLUMBING AND ELECTRICAL DRAWINGS FOR ADDITIONAL DEMOLITION NOTES.
9. IF ANY HAZARDOUS MATERIALS ARE ENCOUNTERED BY THE GENERAL CONTRACTOR, INCLUDING BUT NOT LIMITED TO MATERIALS CONTAINING ASBESTOS, LEAD PAINT, ETC., WORK IS TO BE STOPPED AND THE ARCHITECT IMMEDIATELY NOTIFIED.
10. THE ADJACENT BUILDING SHALL BE OCCUPIED DURING CONSTRUCTION. THE GENERAL CONTRACTOR IS TO TAKE ALL MEASURES NECESSARY TO PROVIDE FOR THE PROTECTION AND SAFETY OF THE ADJACENT BUILDING OCCUPANTS.

11. REMOVE OR MODIFY EXISTING CONSTRUCTION AS SHOWN.
12. AREAS OF EXISTING SURFACES NOT SCHEDULED FOR DEMOLITION WHICH BECOME DAMAGED, SHALL BE PATCHED OR REPAIRED TO MATCH ADJACENT SURFACE THICKNESS, FINISH AND TEXTURE. NEW WORK SHALL BE PRIMED PRIOR TO RECEIVING FINISH COATS.
13. PROVIDE FLOOR TO CEILING TEMPORARY PARTITIONS TO SEPARATE CONSTRUCTION FROM OCCUPIED AREAS. PARTITION SHALL BE CONSTRUCTED OF NEW MATERIALS TO PROVIDE A SOUND AND DUST BUFFER BETWEEN CONSTRUCTION AND OTHER OCCUPIED SPACES. PARTITIONS SHALL BE STUD CONSTRUCTION WITH GSKB. APPLIED TO EACH SIDE. GSKB SHALL BE TAPED, CALKED AND PAINTED.
14. ALL EXISTING WALLS AND PARTITIONS THAT ARE SCHEDULED TO REMAIN AND RECEIVE NEW FINISHES SHALL BE PATCHED, REPAIRED OR RESURFACED AS REQUIRED TO PROVIDE A SMOOTH SURFACE FOR THE NEW FINISHES. REPAIRED ADJACENT SURFACES ARE REQUIRED TO RECEIVE NEW FINISH.
15. ALL EXISTING FLOOR AND WALL SURFACES THAT HAVE BEEN DAMAGED BY THIS CONSTRUCTION SHALL BE REPAIRED OR PATCHED TO MATCH THEIR FINISH PRIOR TO THE START OF CONSTRUCTION.
16. SEE CIVIL DRAWINGS FOR ADDITIONAL INFORMATION CONCERNING SITE FEATURES AND OTHER ITEMS TO BE REMOVED. SEE SHEET C101 FOR REFERENCE TO THE EXISTING SITE CONDITIONS.
17. CONTRACTOR TO CONSULT OWNER CONCERNING THE REMOVAL OF ALL BED PLANTINGS AND SMALL TREES FOR POSSIBLE RELOCATION.
18. EXISTING BENCHES, POSTS, CHAINS AND LIGHT FIXTURES ARE TO BE RETURNED TO THE OWNER UNDER AFTER REPAIR. SEE ALL EXISTING ASSEMBLY AND MOUNTING HARDWARE. SEE ARCHITECTURAL FLOOR PLAN FOR NEW LOCATIONS OF WOOD BENCHES AND ELECTRICAL DRAWINGS FOR RELOCATED POLE MOUNTED LIGHT FIXTURES.
19. ALL EXISTING CONCRETE PADS BENEATH WOOD BENCHES ARE TO BE REMOVED. REMOVE ALL CONCRETE PEDESTALS BENEATH POLE MOUNTED LIGHT FIXTURES.

[illegible]

SFC S | Architecture
Engineering
Planning
Interiors

SFCS Inc. ■ 305 South Jefferson Street
Roanoke, Virginia 24011.2003
540.344.6664 ■ Fax 540.343.6925
www.sfcs.com




ANDERSON & ASSOCIATES, INC.
Professional Design Services
www.andassoc.com

100 Andmore St.
Blacksburg, VA 24060
540-552-6592

Approved: Project Director

Location	Beckley, West Virginia	
Date	08/05/2011	Checked ABC

AD1.1
Dwg. 17 of 77



Department of
Veterans Affairs