# SPECIFICATION

FOR CONSTRUCTION CONTRACT

VA Project No. 695-12-117

112 Replace Generator

Clement J. Zablocki VA Medical Center

Milwaukee, Wisconsin

Volume 1: Division 0 – 28

Issued: June-27-2012

CHEQUAMEGON BAY ENGINEERING, INC.

**DEPARTMENT OF VETERANS AFFAIRS**
**VHA MASTER SPECIFICATIONS**

**TABLE OF CONTENTS**
**Section 00 01 10**


| | **DIVISION 00 - SPECIAL SECTIONS** | **DATE** |
|---|---|---|
| 00 01 10 | Table of Contents | |
| 00 01 15 | List of Drawing Sheets | 09-11 |
| | | |
| | **DIVISION 01 - GENERAL REQUIREMENTS** | |
| | | |
| 01 00 00 | General Requirements | 06-11 |
| 01 01 10 FSS | Fire Safety Control | 12-11 |
| 01 01 10 IC | Infection Control | 12-11 |
| 01 01 10 SN | Special Notes | 12-11 |
| 01 01 10 1HR | 1 Hour Construction Smoke Barrier | 12-11 |
| 01 32 16.15 | Project Schedules (Small Projects – Design/Bid/Build | 04-10 |
| 01 33 23 | Shop Drawings, Product Data, and Samples | 03-12 |
| 01 42 19 | Reference Standards | 09-11 |
| 01 45 29 | Testing Laboratory Services | 05-09 |
| 01 57 19 | Temporary Environmental Controls | 01-11 |
| 01 58 16 | Temporary Interior Signage | 08-11 |
| 01 74 19 | Construction Waste Management | 09-10 |
| 01 81 11 | Sustainable Design Requirements | 12-11 |
| 01 91 00 | General Commissioning Requirements | 05-11 |
| | | |
| | **DIVISION 02 – EXISTING CONDITIONS** | |
| | | |
| 02 41 00 | Demolition | 06-10 |
| 02 42 00 | Cutting Demo Restoration and Patching | 11-12 |
| 02 82 11 | Traditional Asbestos Abatement | 05-12 |
| 02 82 13.13 | Glovebag Asbestos Abatement | 05-12 |
| 02 83 33.13 | Lead-Based Paint Removal and Disposal | 05-12 |
| | | |
| | **DIVISION 03 – CONCRETE** | |
| | | |
| 03 30 00 | Cast-in-Place Concrete | 11-08 |
| | | |
| | **DIVISION 04 – MASONRY** | |
| | | |
| 04 05 13 | Masonry Mortaring | 09-11 |
| 04 05 16 | Masonry Grouting | 09-11 |
| 04 20 00 | Unit Masonry | 09-11 |
| | | |
| | **DIVISION 05 – METALS** | |
| | | |
| | **DIVISION 06 – WOOD,PLASTICS AND COMPOSITES (NOT USED)** | |
| | | |
| | **DIVISION 07 - THERMAL AND MOISTURE PROTECTION** | |
| | | |
| 07 60 00 | Flashing and Sheet Metal | 10-10 |

| | | |
|---|---|---|
| 07 84 00 | Firestopping | 10-11 |
| 07 92 00 | Joint Sealants | 12-11 |
| | | |
| | **DIVISION 08 - OPENINGS** | |
| | | |
| 08 11 13 | Hollow Metal Doors and Frames | 02-09 |
| 08 71 00 | Door Hardware | 03-12 |
| 08 80 00 | Glazing | 12-10 |
| 08 90 00 | Louvers and Vents | 10-11 |
| | | |
| | **DIVISION 09 – FINISHES** | |
| | | |
| 09 06 00 | Schedule for Finishes | 10-11 |
| 09 22 16 | Non-Structural Metal Framing | 07-10 |
| 09 29 00 | Gypsum Board | 02-12 |
| 09 91 00 | Painting | 04-09 |
| | | |
| | **DIVISION 10 – SPECIALTIES (NOT USED)** | |
| | | |
| | | |
| | **DIVISION 11 – EQUIPMENT (NOT USED)** | |
| | | |
| | | |
| | **DIVISION 12 – FURNISHINGS (NOT USED)** | |
| | | |
| | | |
| | **DIVISION 13 - SPECIAL CONSTRUCTION (NOT USED)** | |
| | | |
| | | |
| | **DIVISION 14– CONVEYING EQUIPEMENT (NOT USED)** | |
| | | |
| | | |
| | **DIVISION 21 – FIRE SUPPRESSION (NOT USED)** | |
| | | |
| | | |
| | **DIVISION 22 – PLUMBING (NOT USED)** | |
| | | |
| | | |
| | **DIVISION 23 – HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)** | |
| | | |
| 23 05 11 | Common Work Results for HVAC | 11-10 |
| 23 05 12 | General Motor Requirements for HVAC and Steam Generation Equipment | 11-10 |
| 23 05 41 | Noise and Vibration Control for HVAC Piping and Equipment | 11-10 |
| 23 07 11 | HVAC and Boiler Plant Insulation | 05-11 |
| 23 08 00 | Commissioning of HVAC | 07-10 |
| 23 10 00 | Facility Fuel Systems | 09-11 |
| 23 22 13 | Steam and Condensate Heating Piping | 03-10 |
| 23 23 00 | Refrigerant Piping | 02-10 |
| 23 31 00 | HVAC Ducts and Casings | 04-11 |
| 23 34 00 | HVAC Fans | 11-09 |

| | | |
|---|---|---|
| 23 37 00 | Air Outlets and Inlets | 11-09 |
| 23 81 43 | Air-Source Unitary Heat Pumps | 04-11 |
| | | |
| | **DIVISION 25 – INTEGRATED AUTOMATION (NOT USED)** | |
| | | |
| | **DIVISION 26 – ELECTRICAL** | |
| | | |
| 26 05 11 | Requirements for Electrical Installations | 09-10 |
| 26 05 21 | Low-Voltage Electrical Power Conductors and Cables (600 Volts and Below) | 09-10 |
| 26 05 26 | Grounding and Bonding for Electrical Systems | 09-10 |
| 26 05 33 | Raceway and Boxes for Electrical Systems | 09-10 |
| 26 05 71 | Electrical System Protective Device Study | 09-10 |
| 26 09 13 | Electric Power Monitoring and Control | 09-10 |
| 26 12 19 | Substation Style, Liquid-Filled, Medium-Voltage Transformers | 09-10 |
| 26 18 41 | Medium-Voltage Switches | 09-10 |
| 26 22 00 | Low-Voltage Transformers | 09-10 |
| 26 24 16 | Panelboards | 09-10 |
| 26 27 26 | Wiring Devices | 04-09 |
| 26 29 11 | Motor Starters | 09-10 |
| 26 29 21 | Disconnect Switches | 09-10 |
| 26 32 13 | Engine Generators | 09-10 |
| 26 36 23 | Automatic Transfer Switches | 09-10 |
| 26 43 13 | Transient-Voltage Surge Suppression | 04-09 |
| 26 51 00 | Interior Lighting | 04-09 |
| | | |
| | **DIVISION 27 – COMMUNICATIONS** | |
| | | |
| 27 05 11 | Requirements for Communications Installations | 11-09 |
| 27 05 33 | Raceways and Boxes for Communications Systems | 12-05 |
| 27 15 00 | Communications Horizontal Cabling | 10-06 |
| | | |
| | **DIVISION 28 – ELECTRONIC SAFETY AND SECURITY** | |
| | | |
| 28 05 00 | Common Work Results for Electronic Safety and Security | 09-11 |
| 28 05 13 | Conductors and Cables for Electronic Safety and Security | 09-11 |
| 28 05 28.33 | Conduits and Backboxes for Electronic Safety and Security | 09-11 |
| 28 13 11 | Physical Access Control Systems | 10-11 |
| 28 23 00 | Video Surveillance | 09-11 |
| 28 31 00 | Fire Detection and Alarm | 10-11 |
| | | |
| | **DIVISION 31 – EARTHWORK (NOT USED)** | |
| | | |
| | **DIVISION 32 – EXTERIOR IMPROVEMENTS (NOT USED)** | |
| | | |
| | **DIVISION 33 – UTILITIES (NOT USED)** | |
| | | |
| | **DIVISION 34 – TRANSPORTATION (NOT USED)** | |
| | | |
| | | |

# SECTION 00 01 15
# LIST OF DRAWING SHEETS

The drawings listed below accompanying this specification form a part of the contract.

| Drawing No. | Title |
|---|---|
| | **GENERAL INFORMATION** |
| G100 | TITLE SHEET, PROJECT INFORMATION, & SHEET INDEX |
| | **ARCHITECTURAL** |
| A101 | NEW CONSTRUCTION FLOOR & ROOF PLANS AND DETAILS |
| | **HEATING, VENTILATING, AIR** |
| M101 | PLUMBING & MECHANICAL |
| M201 | MECHANICAL SCHEDULE |
| | **ELECTRICAL** |
| E000 | ELECTRICAL SYMBOLS AND ABBREVIATIONS |
| ES100 | ELECTRICAL SITE PLAN |
| ED101 | PARTIAL FIRST FLOOR PLAN – DEMOLITION |
| E100 | LOWER LEVEL FLOOR PLAN - ELECTRICAL |
| E101 | ENLARGED FIRST FLOOR PLAN - POWER |
| E501 | ELECTRICAL DETAILS |
| E601 | ELECTRICAL SCHEDULES |
| E701 | ONELINE POWER DIAGRAM - PHASE-1 |
| E702 | ONELINE POWER DIAGRAM - PHASE-2 |
| E703 | ONELINE POWER DIAGRAM - PHASE-3 |
| E704 | ONELINE POWER DIAGRAM - PHASE-4 |
| E705 | ONELINE POWER DIAGRAM - PHASE-5 |
| E706 | ONELINE POWER DIAGRAM |
| Y100 | FIRST FLOOR PLAN - TECHNOLOGY |

- - - END - - -

**SECTION 01 00 00**
**GENERAL REQUIREMENTS**

**TABLE OF CONTENTS**

1.1 GENERAL INTENTION ..... 1
1.2 STATEMENT OF BID ITEM(S) ..... 2
1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR ..... 2
1.4 CONSTRUCTION SECURITY REQUIREMENTS ..... 3
1.5 FIRE SAFETY ..... 4
1.6 OPERATIONS AND STORAGE AREAS ..... 7
1.7 ALTERATIONS: NOT APPLICABLE ..... 10
1.8 INFECTION PREVENTION MEASURES – REFER TO 01 01 10 INFECTION CONTROL ..... 10
1.9 DISPOSAL AND RETENTION ..... 13
1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS ..... 14
1.11 RESTORATION ..... 15
1.12 PHYSICAL DATA ..... 16
1.13 PROFESSIONAL SURVEYING SERVICES ..... 16
1.14 LAYOUT OF WORK ..... 17
1.15 As-Built Drawings ..... 18
1.16 USE OF ROADWAYS ..... 18
1.17 RESIDENT ENGINEER'S FIELD OFFICE: NOT APPLICABLE ..... 19
1.18 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT ..... 19
1.19 TEMPORARY USE OF EXISTING ELEVATORS: NOT APPLICABLE ..... 20
1.20 TEMPORARY USE OF NEW ELEVATORS: NOT APPLICABLE ..... 20
1.22 AVAILABILITY AND USE OF UTILITY SERVICES ..... 20
1.23 NEW TELEPHONE EQUIPMENT ..... 22
1.24 TESTS ..... 22
1.25 INSTRUCTIONS ..... 22
1.26 GOVERNMENT-FURNISHED PROPERTY ..... 24
1.27 RELOCATED EQUIPMENT ITEMS: NOT APPLICABLE ..... 25
1.28 STORAGE SPACE FOR DEPARTMENT OF VETERANS AFFAIRS EQUIPMENT: NOT APPLICABLE ..... 25
1.29 CONSTRUCTION SIGN ..... 25
1.30 SAFETY SIGN ..... 25
1.31 PHOTOGRAPHIC DOCUMENTATION ..... 26
1.32 FINAL ELEVATION DIFITAL IMAGES ..... 29
1.33 HISTORIC PRESERVATION ..... 29

# SECTION 01 00 00
# GENERAL REQUIREMENTS

## 1.1 GENERAL INTENTION

A. Contractor shall completely prepare site for building operations, including demolition and removal of existing structures, and furnish labor and materials and perform work for VA Project No. 695-12-117, Building 112 Replace Generator, as required by drawings and specifications.

B. Visits to the site by Bidders may be made only by appointment with the Medical Center Engineering Officer.

C. Offices of Chequamegon Bay Engineering, as Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the Government without affirmations by Contracting Officer or his duly authorized representative.

D. Before placement and installation of work subject to tests by testing laboratory retained by Department of Veterans Affairs, the Contractor shall notify the Resident Engineer in sufficient time to enable testing laboratory personnel to be present at the site in time for proper taking and testing of specimens and field inspection. Such prior notice shall be not less than three work days unless otherwise designated by the Resident Engineer.

E. All employees of general contractor and subcontractors shall comply with VA security management program and obtain permission of the VA police, be identified by project and employer, and restricted from unauthorized access.

F. Prior to commencing work, general contractor shall provide proof that a OSHA certified “competent person” (CP) (29 CFR 1926.20(b)(2) will maintain a presence at the work site whenever the general or subcontractors are present.

G. Training:

1. All employees of general contractor or subcontractors shall have the 10-hour OSHA certified Construction Safety course and/or other relevant competency training, as determined by VA CP with input from the ICRA team.
2. Submit training records of all such employees for approval before the start of work.

**1.2 STATEMENT OF BID ITEM(S)**

A. ITEM I, GENERAL CONSTRUCTION: Work includes general construction, alterations, mechanical and electrical work, and HVAC system construction, necessary removal of existing structures and construction and certain other items.

B. ROUTINE INSPECTIONS AND MAINTENANCE DURING CONSTRUCTION:

a. Provide routine inspections and maintenance services as prescribed in Operations & Maintenance manuals required under this contract.

b. Provide services during construction and until items below are complete:

i. VA inspection complete

ii. Successful Commisioning

iii. Training of VA Maintenance staff

iv. Acceptance by VA of each system described in other specifications related to this contract.

v. O & M manual submittals received, reviewed and approved by VA (Resident Engineer)

c. Systems Included in this contract include the following: (See Construction Drawings for all items)

i. Electrical (complete generator replacement, and electrical system work)

ii. HVAC System Installation

iii. Building Improvements

C. SUBMIT with O&M manuals (if phased work, submit at substantial completion of work phases and update upon completion of final work phase) one spreadsheet based comprehensive summary schedule of routine inspection and maintenance for systems. List: specification section, article and paragraph; description of systems/subsystems; O&M manual reference; frequency.

D. PHASING: Phasing to be included in this project. Phase 1 will be submittals review and duration to be based on AE determination of submittals required prior to work beginning and time to review these and Phase 2 will be construction.

**1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR**

A. AFTER AWARD OF CONTRACT, all drawings and specifications will be on FedBizOps and Buzzsaw for Contractor use.

C. In the case of conflicts or discrepancies within or among the Contract Drawings, the better quality, more stringent requirements or greater quantity of work, as determined by the Government, shall be provided.

**1.4 CONSTRUCTION SECURITY REQUIREMENTS**

A. Security Plan:
   1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
   2. The General Contractor is responsible for assuring that all sub-contractors working on the project and their employees also comply with these regulations.

B. Security Procedures:
   1. General Contractor’s employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.
   2. For working outside the “regular hours” as defined in the contract, The General Contractor shall give 3 days’ notice to the Contracting Officer so that security arrangements can be provided for the employees. This notice is separate from any notices required for utility shutdown described later in this section.
   3. No photography of VA premises is allowed without written permission of the Contracting Officer.
   4. VA reserves the right to close down or shut down the project site and order General Contractor’s employees off the premises in the event of a national emergency. The General Contractor may return to the site only with the written approval of the Contracting Officer.

C. Guards: NOT APPLICABLE

D. Key Control:
   1. The General Contractor shall turn over all permanent lock cylinders to the VA locksmith for permanent installation. See Section 08 71 00, DOOR HARDWARE and coordinate.

E. Document Control:
   1. Before starting any work, the General Contractor/Sub Contractors shall submit an electronic security memorandum describing the approach to following goals and maintaining confidentiality of “sensitive information”.
   2. The General Contractor is responsible for safekeeping of all drawings, project manual and other project information. This

information shall be shared only with those with a specific need to accomplish the project.

4. Certain documents, sketches, videos or photographs and drawings may be marked “Law Enforcement Sensitive” or “Sensitive Unclassified”. Secure such information in separate containers and limit the access to only those who will need it for the project. Return the information to the Contracting Officer upon request.
5. These security documents shall not be removed or transmitted from the project site without the written approval of Contracting Officer.
6. All paper waste or electronic media such as CD’s and diskettes shall be shredded and destroyed in a manner acceptable to the VA.
7. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of “sensitive information”.
8. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).
   a. Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
   b. “Sensitive information” including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.

F. Motor Vehicle Restrictions
1. Vehicle authorization request shall be required for any vehicle entering the site and such request shall be submitted 24 hours before the date and time of access. Access shall be restricted to picking up and dropping off materials and supplies.
2. Separate permits shall be issued for General Contractor and its employees for parking in designated areas only.

**1.5 FIRE SAFETY**

A. Applicable Publications: Publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.
1. American Society for Testing and Materials (ASTM):
   E84-2009.....Surface Burning Characteristics of Building Materials
2. National Fire Protection Association (NFPA):
   10-2010.....Standard for Portable Fire Extinguishers
   30-2008.....Flammable and Combustible Liquids Code

51B-2009.....Standard for Fire Prevention During Welding, Cutting and Other Hot Work
70-2011.....National Electrical Code
241-2009.....Standard for Safeguarding Construction, Alteration, and Demolition Operations

3. Occupational Safety and Health Administration (OSHA):
29 CFR 1926.....Safety and Health Regulations for Construction

B. Fire Safety Plan: Establish and maintain a fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to Resident Engineer for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES Prior to any worker for the contractor or subcontractors beginning work, they shall undergo a safety briefing provided by the general contractor’s competent person per OSHA requirements. This briefing shall include information on the construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, etc. Documentation shall be provided to the Resident Engineer that individuals have undergone contractor’s safety briefing.

C. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.

D. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).

E. Temporary Construction Partitions:

1. Install and maintain temporary construction partitions to provide smoke-tight separations between the areas that are described in phasing requirements and adjoining areas. Construct partitions of gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on both sides of fire retardant treated wood or metal steel studs. Extend the partitions through suspended ceilings to floor slab deck or roof. Seal joints and penetrations. At door openings, install Class C, ¾ hour fire/smoke rated doors with self-closing devices.

2. Install one-hour fire-rated temporary construction partitions as shown on drawings to maintain integrity of existing exit stair

enclosures, exit passageways, fire-rated enclosures of hazardous areas, horizontal exits, smoke barriers, vertical shafts and openings enclosures.

3. Close openings in smoke barriers and fire-rated construction to maintain fire ratings. Seal penetrations with listed through-penetration firestop materials in accordance with Section 07 84 00, FIRESTOPPING.

F. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.

G. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with Resident Engineer.

H. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to Resident Engineer.

I. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.

J. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.

L. Sprinklers: NOT APPLICABLE

M. Existing Fire Protection: NOT APPLICABLE

N. Smoke Detectors: NOT APPLICABLE

O. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with Resident Engineer at least 24 hours in advance. Designate contractor's responsible project-site fire prevention program manager to permit hot work.

P. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to Resident Engineer.

Q. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. In separate and detached buildings under construction, smoking is prohibited except in designated smoking rest areas.

R. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.

S. Perform other construction, alteration and demolition operations in accordance with 29 CFR 1926.

T. If required, submit documentation to the Resident Engineer that personnel have been trained in the fire safety aspects of working in areas with impaired structural or compartmentalization features.

U. Temporary Interior Signage: When the contractor’s work blocks doors and/or exists, changes paths, etc., the General Ccontractor is to provide all temporary signage to reroute personnel and block the doors or exits. Locations to be determined based on the ILSM.

**1.6 OPERATIONS AND STORAGE AREAS**

A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance.

B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.

C. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.

**(FAR 52.236-10)**

D. Working space and space available for storing materials shall be as coordinated by the Resident Engineer. Parking areas for Contractor’s employees is to be coordinated with Resident Engineer and is subject to change day to day. Resident Engineer and Contractor to coordinate parking areas, staging areas, Contractor Trailer location, and any changes to these locations.

E. Execute work in such a manner as to interfere as little as possible with work being done by others. Keep roads clear of construction materials, debris, standing construction equipment and vehicles at all times.

F. Utilities Services: Where necessary to cut existing pipes, electrical wires, conduits, cables, etc., of utility services, or of fire protection systems or communications systems (except telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by Resident Engineer. All such actions shall be coordinated with the Utility Company involved:

1. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.

G. Phasing: To insure such executions, Contractor shall furnish the Resident Engineer with a schedule of approximate dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, Contractor shall notify the Resident Engineer two weeks in advance of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such dates to insure accomplishment of this work in successive phases mutually agreeable to Resident Engineer and Contractor.

H. Building (s) No. (s) 115 (Temporary Building) will be accessible to the Contractor immediately after date of receipt of Notice to Proceed.

I. Construction Fence: Before construction operations begin, Contractor shall provide a chain link construction fence, 2.1m (seven feet) minimum height, around the construction area indicated on the drawings. Provide gates as required for access with necessary hardware, including hasps and padlocks. Fasten fence fabric to terminal posts with tension bands and to line posts and top and bottom rails with tie wires spaced at maximum 375mm (15 inches). Bottom of fences shall extend to 25mm (one inch) above grade. Remove the fence when directed by Resident Engineer.

J. When a building is turned over to Contractor, Contractor shall accept entire responsibility therefore.

1. Contractor shall maintain a minimum temperature of 4 degrees C (40 degrees F) at all times, except as otherwise specified.
2. Contractor shall maintain in operating condition existing fire protection and alarm equipment. In connection with fire alarm equipment, Contractor shall make arrangements for pre-inspection of

site with Fire Department or Company (Department of Veterans Affairs or municipal) whichever will be required to respond to an alarm from Contractor's employee or watchman.

K. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by Resident Engineer.

1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of Resident Engineer. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without the Medical Center Director’s prior knowledge and written approval. Refer to specification Sections 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS and 28 05 11, REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS for additional requirements.
2. Contractor shall submit a request to interrupt any such services to Resident Engineer, in writing, 48 hours in advance of proposed interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.
3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Medical Center. Interruption time approved by Medical Center may occur at other than Contractor's normal working hours.
4. Major interruptions of any system must be requested, in writing, at least 15 calendar days prior to the desired time and shall be performed as directed by the Resident Engineer.
5. In case of a contract construction emergency, service will be interrupted on approval of Resident Engineer. Such approval will be confirmed in writing as soon as practical. Contractor is to provide a list of emergency contacts at the entrance to the construction site.

6. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.

L. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, which are to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged. The lines shall not be capped in finished areas, but shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas, or within walls or partitions; so that they are completely behind the finished surfaces.

M. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:

1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles.
2. Method and scheduling of required cutting, altering and removal of existing roads; walks and entrances must be approved by the Resident Engineer.

N. Coordinate the work for this contract with other construction operations as directed by Resident Engineer. This includes the scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS.

**1.7 ALTERATIONS: NOT APPLICABLE**

**1.8 INFECTION PREVENTION MEASURES – REFER TO 01 01 10 INFECTION CONTROL**

A. Implement the requirements of VAMC’s Infection Control Risk Assessment (ICRA) team. ICRA Group may monitor dust in the vicinity of the construction work and require the Contractor to take corrective action immediately if the safe levels are exceeded.

B. Establish and maintain a dust control program as part of the contractor’s infection preventive measures in accordance with the guidelines provided by ICRA Group. Prior to start of work, prepare a plan detailing project-specific dust protection measures, including periodic status reports, and submit to Resident Engineer and Facility ICRA team for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

1. All personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the medical center.

C. Medical center Infection Control personnel shall monitor for airborne disease (e.g. aspergillosis) as appropriate during construction. A baseline of conditions may be established by the medical center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality. In addition:

1. The RE and VAMC Infection Control personnel shall review pressure differential monitoring documentation to verify that pressure differentials in the construction zone and in the patient-care rooms are appropriate for their settings. The requirement for negative air pressure in the construction zone shall depend on the location and type of activity. Upon notification, the contractor shall implement corrective measures to restore proper pressure differentials as needed.
2. In case of any problem, the medical center, along with assistance from the contractor, shall conduct an environmental assessment to find and eliminate the source.

D. In general, following preventive measures shall be adopted during construction to keep down dust and prevent mold.

1. Dampen debris to keep down dust and provide temporary construction partitions in existing structures where directed by Resident Engineer. Blank off ducts and diffusers to prevent circulation of dust into occupied areas during construction.
2. Do not perform dust producing tasks within occupied areas without the approval of the Resident Engineer. For construction in any areas that will remain jointly occupied by the medical Center and Contractor’s workers, the Contractor shall:
   a. Provide dust proof one-hour fire rated temporary drywall construction barriers to completely separate construction from the operational areas of the hospital in order to contain dirt debris and dust. Barriers shall be sealed and made presentable on hospital occupied side. Install a self-closing rated door in a metal frame, commensurate with the partition, to allow worker access. Maintain negative air at all times. A fire retardant polystyrene, 6-mil thick or greater plastic barrier meeting local fire codes may be used where dust control is the only hazard, and

an agreement is reached with the Resident Engineer and Medical Center.

b. HEPA filtration is required where the exhaust dust may reenter the breathing zone. Contractor shall verify that construction exhaust to exterior is not reintroduced to the medical center through intake vents, or building openings. Install HEPA (High Efficiency Particulate Accumulator) filter vacuum system rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. Insure continuous negative air pressures occurring within the work area. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Exhaust hoses shall be heavy duty, flexible steel reinforced and exhausted so that dust is not reintroduced to the medical center.

c. Adhesive Walk-off/Carpet Walk-off Mats, minimum 600mm x 900mm (24” x 36”), shall be used at all interior transitions from the construction area to occupied medical center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.

d. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as they are created. Transport these outside the construction area in containers with tightly fitting lids.

e. The contractor shall not haul debris through patient-care areas without prior approval of the Resident Engineer and the Medical Center. When, approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.

f. Using a HEPA vacuum, clean inside the barrier and vacuum ceiling tile prior to replacement. Any ceiling access panels opened for investigation beyond sealed areas shall be sealed immediately when unattended.

g. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within

the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.

h. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.

E. Final Cleanup:

1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
3. All new air ducts shall be cleaned prior to final inspection.

**1.9 DISPOSAL AND RETENTION**

A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:

1. Reserved items which are to remain property of the Government are identified by attached tags or noted on drawings or in specifications as items to be stored. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by Resident Engineer.
2. Items not reserved shall become property of the Contractor and be removed by Contractor from Medical Center.
3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractor's operation.
4. PCB Transformers and Capacitors: The Contractor shall be responsible for disposal of the Polychlorinated Biphenyl (PCB) transformers and capacitors. The transformers and capacitors shall be taken out of service and handled in accordance with the procedures of the Environmental Protection Agency (EPA) and the Department of

Transportation (DOT) as outlined in Code of Federal Regulation (CFR), Titled 40 and 49 respectively. The EPA's Toxic Substance Control Act (TSCA) Compliance Program Policy Nos. 6-PCB-6 and 6-PCB-7 also apply. Upon removal of PCB transformers and capacitors for disposal, the "originator" copy of the Uniform Hazardous Waste Manifest (EPA Form 8700-22), along with the Uniform Hazardous Waste Manifest Continuation Sheet (EPA Form 8700-22A) shall be returned to the Contracting Officer who will annotate the contract file and transmit the Manifest to the Medical Center's Chief.

a. Copies of the following listed CFR titles may be obtained from the Government Printing Office:

40 CFR 261.....Identification and Listing of Hazardous Waste
40 CFR 262.....Standards Applicable to Generators of Hazardous Waste
40 CFR 263.....Standards Applicable to Transporters of Hazardous Waste
40 CFR 761.....PCB Manufacturing, Processing, Distribution in Commerce, and use Prohibitions
49 CFR 172.....Hazardous Material tables and Hazardous Material Communications Regulations
49 CFR 173.....Shippers - General Requirements for Shipments and Packaging
49 CRR 173.....Subpart A General
49 CFR 173.....Subpart B Preparation of Hazardous Material for Transportation
49 CFR 173.....Subpart J Other Regulated Material; Definitions and Preparation
TSCA.....Compliance Program Policy Nos. 6-PCB-6 and 6-PCB-7

**1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS**

A. The Contractor shall preserve and protect all structures, equipment, and vegetation (such as trees, shrubs, and grass) on or adjacent to the work site, which is not to be removed and which does not unreasonably interfere with the work required under this contract. The Contractor shall only remove trees when specifically authorized to do so, and shall avoid damaging vegetation that will remain in place. If any limbs or branches of trees are broken during contract performance, or by the careless operation of equipment, or by workmen, the Contractor shall

trim those limbs or branches with a clean cut and paint the cut with a tree-pruning compound as directed by the Contracting Officer.

B. The Contractor shall protect from damage all existing improvements and utilities at or near the work site and on adjacent property of a third party, the locations of which are made known to or should be known by the Contractor. The Contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor.

**(FAR 52.236-9)**

C. Refer to Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, for additional requirements on protecting vegetation, soils and the environment. Refer to Articles, "Alterations", "Restoration", and "Operations and Storage Areas" for additional instructions concerning repair of damage to structures and site improvements.

**1.11 RESTORATION**

A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the Resident Engineer. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the Resident Engineer before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.

B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.

C. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workmen to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone)

which are indicated on drawings and which are not scheduled for discontinuance or abandonment.

D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2).

**1.12 PHYSICAL DATA**

A. Data and information furnished or referred to below is for the Contractor's information. The Government shall not be responsible for any interpretation of or conclusion drawn from the data or information by the Contractor.

1. The indications of physical conditions on the drawings and in the specifications are the result of site investigations by Giles Engineering Associates, Inc.

**(FAR 52.236-4)**

B. Subsurface conditions have been developed by core borings. Logs of subsurface exploration are shown diagrammatically within the soil report.

C. A copy of the soil report will be made available for inspection by bidders upon request to the Engineering Officer at the VA Medical Center, and shall be considered part of the contract documents.

D. Government does not guarantee that other materials will not be encountered nor that proportions, conditions or character of several materials will not vary from those indicated by explorations. Bidders are expected to examine site of work and logs of borings; and, after investigation, decide for themselves character of materials and make their bids accordingly. Upon proper application to Department of Veterans Affairs, bidders will be permitted to make subsurface explorations of their own at site.

**1.13 PROFESSIONAL SURVEYING SERVICES**

A registered professional land surveyor or registered civil engineer whose services are retained and paid for by the Contractor shall perform services specified herein and in other specification sections. The Contractor shall certify that the land surveyor or civil engineer is not one who is a regular employee of the Contractor, and that the land surveyor or civil engineer has no financial interest in this contract.

**1.14 LAYOUT OF WORK**

A. The Contractor shall lay out the work from Government established base lines and bench marks, indicated on the drawings, and shall be responsible for all measurements in connection with the layout. The Contractor shall furnish, at Contractor's own expense, all stakes, templates, platforms, equipment, tools, materials, and labor required to lay out any part of the work. The Contractor shall be responsible for executing the work to the lines and grades that may be established or indicated by the Contracting Officer. The Contractor shall also be responsible for maintaining and preserving all stakes and other marks established by the Contracting Officer until authorized to remove them. If such marks are destroyed by the Contractor or through Contractor's negligence before their removal is authorized, the Contracting Officer may replace them and deduct the expense of the replacement from any amounts due or to become due to the Contractor.

**(FAR 52.236-17)**

B. Establish and plainly mark center lines for each building and such other lines and grades that are reasonably necessary to properly assure that location, orientation, and elevations established for each such structure and/or addition, roads, walk, curb & gutter, and any other improvements are in accordance with lines and elevations shown on contract drawings.

C. Following completion of general mass excavation and before any other permanent work is performed, establish and plainly mark (through use of appropriate batter boards or other means) sufficient additional survey control points or system of points as may be necessary to assure proper alignment, orientation, and grade of all major features of work. Survey shall include, but not be limited to, location of lines and grades of footings, exterior walls, center lines of columns in both directions, major utilities and elevations of floor slabs:

1. Such additional survey control points or system of points thus established shall be checked and certified by a registered land surveyor or registered civil engineer. Furnish such certification to the Resident Engineer before any work (such as footings, floor slabs, columns, walls, utilities and other major controlling features) is placed.

D. During progress of work, and particularly as work progresses from floor to floor, Contractor shall have line grades and plumbness of all major form work checked and certified by a registered land surveyor or

registered civil engineer as meeting requirements of contract drawings. Furnish such certification to the Resident Engineer before any major items of concrete work are placed. In addition, Contractor shall also furnish to the Resident Engineer certificates from a registered land surveyor or registered civil engineer that the following work is complete in every respect as required by contract drawings.

1. Lines of each building and/or addition.
2. Elevations of bottoms of footings and tops of floors of each building and/or addition.
3. Lines and elevations of sewers and of all outside distribution systems.
5. Lines of elevations of all swales and interment areas.
6. Lines and elevations of roads, streets and parking lots.

E. Whenever changes from contract drawings are made in line or grading requiring certificates, record such changes on a reproducible drawing bearing the registered land surveyor or registered civil engineer seal, and forward these drawings upon completion of work to Resident Engineer.

F. The Contractor shall perform the surveying and layout work of this and other articles and specifications in accordance with the provisions of Article "Professional Surveying Services".

**1.15 AS-BUILT DRAWINGS**

A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications.

B. All variations shall be shown in the same general detail as used in the contract drawings. To insure compliance, as-built drawings shall be made available for the Resident Engineer's review, as often as requested.

C. Contractor shall deliver two approved completed sets of as-built drawings to the Resident Engineer within 15 calendar days after each completed phase and after the acceptance of the project by the Resident Engineer.

D. Paragraphs A, B, & C shall also apply to all shop drawings.

E. Contractor is to update as work is completed the VA electrical, medical gas, domestic plumbing and mechanical piping master schematic books. These books are located in the FM office.

**1.16 USE OF ROADWAYS**

A. For hauling, use only established public roads and roads on Medical Center property and, when authorized by the Resident Engineer, such temporary roads which are necessary in the performance of contract work.

Temporary roads shall be constructed by the Contractor at Contractor's expense. When necessary to cross curbing, sidewalks, or similar construction, they must be protected by well-constructed bridges.

B. When new permanent roads are to be a part of this contract, Contractor may construct them immediately for use to facilitate building operations. These roads may be used by all who have business thereon within zone of building operations.

C. When certain buildings (or parts of certain buildings) are required to be completed in advance of general date of completion, all roads leading thereto must be completed and available for use at time set for completion of such buildings or parts thereof.

**1.17 RESIDENT ENGINEER'S FIELD OFFICE: NOT APPLICABLE**

**1.18 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT**

A. Use of new installed mechanical and electrical equipment to provide heat, ventilation, plumbing, light and power will be permitted subject to compliance with the following provisions:

1. Permission to use each unit or system must be given by Resident Engineer. If the equipment is not installed and maintained in accordance with the following provisions, the Resident Engineer will withdraw permission for use of the equipment.
2. Electrical installations used by the equipment shall be completed in accordance with the drawings and specifications to prevent damage to the equipment and the electrical systems, i.e. transformers, relays, circuit breakers, fuses, conductors, motor controllers and their overload elements shall be properly sized, coordinated and adjusted. Voltage supplied to each item of equipment shall be verified to be correct and it shall be determined that motors are not overloaded. The electrical equipment shall be thoroughly cleaned before using it and again immediately before final inspection including vacuum cleaning and wiping clean interior and exterior surfaces.
3. Units shall be properly lubricated, balanced, and aligned. Vibrations must be eliminated.
4. Automatic temperature control systems for preheat coils shall function properly and all safety controls shall function to prevent coil freeze-up damage.
5. The air filtering system utilized shall be that which is designed for the system when complete, and all filter elements shall be replaced at completion of construction and prior to testing and balancing of system.

6. All components of heat production and distribution system, metering equipment, condensate returns, and other auxiliary facilities used in temporary service shall be cleaned prior to use; maintained to prevent corrosion internally and externally during use; and cleaned, maintained and inspected prior to acceptance by the Government. Boilers, pumps, feedwater heaters and auxiliary equipment must be operated as a complete system and be fully maintained by operating personnel. Boiler water must be given complete and continuous chemical treatment.

B. Prior to final inspection, the equipment or parts used which show wear and tear beyond normal, shall be replaced with identical replacements, at no additional cost to the Government.

C. This paragraph shall not reduce the requirements of the mechanical and electrical specifications sections.

**1.19 TEMPORARY USE OF EXISTING ELEVATORS: NOT APPLICABLE**

**1.20 TEMPORARY USE OF NEW ELEVATORS: NOT APPLICABLE**

**1.21 TEMPORARY TOILETS**

A. Provide where directed, (for use of all Contractor's workmen) ample temporary sanitary toilet accommodations with suitable sewer and water connections; or, when approved by Resident Engineer, provide suitable dry closets where directed. Keep such places clean and free from flies, and all connections and appliances connected therewith are to be removed prior to completion of contract, and premises left perfectly clean.

**1.22 AVAILABILITY AND USE OF UTILITY SERVICES**

A. The Government shall make all reasonably required amounts of utilities available to the Contractor from existing outlets and supplies, as specified in the contract. The amount to be paid by the Contractor for chargeable electrical services shall be the prevailing rates charged to the Government. The Contractor shall carefully conserve any utilities furnished without charge.

B. The Contractor, at Contractor's expense and in a workmanlike manner satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines, and all meters required to measure the amount of electricity used for the purpose of determining charges. Before final acceptance of the work by the Government, the Contractor shall remove all the temporary connections, distribution lines, meters, and associated paraphernalia.

C. Contractor shall install meters at Contractor's expense and furnish the Medical Center a monthly record of the Contractor's usage of electricity as hereinafter specified.

D. Heat: Furnish temporary heat necessary to prevent injury to work and materials through dampness and cold. Use of open salamanders or any temporary heating devices which may be fire hazards or may smoke and damage finished work, will not be permitted. Maintain minimum temperatures as specified for various materials:

1. Obtain heat by connecting to Medical Center heating distribution system.
   a. Steam is available at no cost to Contractor.

E. Electricity (for Construction and Testing): Furnish all temporary electric services.

1. Obtain electricity by connecting to the Medical Center electrical distribution system. The Contractor shall meter and pay for electricity required for electric cranes and hoisting devices, electrical welding devices and any electrical heating devices providing temporary heat. Electricity for all other uses is available at no cost to the Contractor.

F. Water (for Construction and Testing): Furnish temporary water service.

1. Obtain water by connecting to the Medical Center water distribution system. Provide reduced pressure backflow preventer at each connection. Water is available at no cost to the Contractor.
2. Maintain connections, pipe, fittings and fixtures and conserve water-use so none is wasted. Failure to stop leakage or other wastes will be cause for revocation (at Resident Engineer's discretion) of use of water from Medical Center's system.

G. Steam: Furnish steam system for testing required in various sections of specifications.

1. Obtain steam for testing by connecting to the Medical Center steam distribution system. Steam is available at no cost to the Contractor.
2. Maintain connections, pipe, fittings and fixtures and conserve steam-use so none is wasted. Failure to stop leakage or other waste will be cause for revocation (at Resident Engineer's discretion), of use of steam from the Medical Center's system.

H. Fuel: Natural and LP gas and burner fuel oil required for boiler cleaning, normal initial boiler-burner setup and adjusting, and for performing the specified boiler tests will be furnished by the Government. Fuel required for prolonged boiler-burner setup,

adjustments, or modifications due to improper design or operation of boiler, burner, or control devices shall be furnished by the Contractor at Contractor's expense.

**1.23 NEW TELEPHONE EQUIPMENT**

The contractor shall coordinate with the work of installation of telephone equipment by others. This work shall be completed before the building is turned over to VA.

**1.24 TESTS**

A. Pre-test mechanical and electrical equipment and systems and make corrections required for proper operation of such systems before requesting final tests. Final test will not be conducted unless pre-tested.

B. Conduct final tests required in various sections of specifications in presence of an authorized representative of the Contracting Officer. Contractor shall furnish all labor, materials, equipment, instruments, and forms, to conduct and record such tests.

C. Mechanical and electrical systems shall be balanced, controlled and coordinated. A system is defined as the entire complex which must be coordinated to work together during normal operation to produce results for which the system is designed. For example, air conditioning supply air is only one part of entire system which provides comfort conditions for a building. Other related components are return air, exhaust air, steam, chilled water, refrigerant, hot water, controls and electricity, etc. Another example of a complex which involves several components of different disciplines is a boiler installation. Efficient and acceptable boiler operation depends upon the coordination and proper operation of fuel, combustion air, controls, steam, feedwater, condensate and other related components.

D. All related components as defined above shall be functioning when any system component is tested. Tests shall be completed within a reasonably short period of time during which operating and environmental conditions remain reasonably constant.

E. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components and of the entire system.

**1.25 INSTRUCTIONS**

A. Contractor shall furnish Maintenance and Operating manuals and verbal instructions when required by the various sections of the specifications and as hereinafter specified.

B. Manuals: Maintenance and operating manuals (four copies each) for each separate piece of equipment shall be delivered to the Resident Engineer coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing equipment similar to but of a different model, style, and size than that furnished will not be accepted.

C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed instructions to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the Resident Engineer and shall be considered concluded only when the Resident Engineer is satisfied in regard to complete and thorough coverage. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the Resident Engineer, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

**1.26 GOVERNMENT-FURNISHED PROPERTY**

A. The Government shall deliver to the Contractor, the Government-furnished property shown on the drawings and coordinated with the Resident Engineer.

B. Equipment furnished by Government to be installed by Contractor will be furnished to Contractor at the Medical Center.

C. Storage space for equipment will be provided by the Government and the Contractor shall be prepared to unload and store such equipment therein upon its receipt at the Medical Center.

D. Notify Contracting Officer in writing, 60 days in advance, of date on which Contractor will be prepared to receive equipment furnished by Government. Arrangements will then be made by the Government for delivery of equipment.

   1. Immediately upon delivery of equipment, Contractor shall arrange for a joint inspection thereof with a representative of the Government. At such time the Contractor shall acknowledge receipt of equipment described, make notations, and immediately furnish the Government representative with a written statement as to its condition or shortages.

   2. Contractor thereafter is responsible for such equipment until such time as acceptance of contract work is made by the Government.

E. Equipment furnished by the Government will be delivered in a partially assembled (knock down) condition in accordance with existing standard commercial practices, complete with all fittings, fastenings, and appliances necessary for connections to respective services installed under contract. All fittings and appliances (i.e., couplings, ells, tees, nipples, piping, conduits, cables, and the like) necessary to make the connection between the Government furnished equipment item and the utility stub-up shall be furnished and installed by the contractor at no additional cost to the Government.

F. Completely assemble and install the Government furnished equipment in place ready for proper operation in accordance with specifications and drawings.

G. Furnish supervision of installation of equipment at construction site by qualified factory trained technicians regularly employed by the equipment manufacturer.

**1.27 RELOCATED EQUIPMENT ITEMS: NOT APPLICABLE**

**1.28 STORAGE SPACE FOR DEPARTMENT OF VETERANS AFFAIRS EQUIPMENT: NOT APPLICABLE**

**1.29 CONSTRUCTION SIGN**

A. Provide a Construction Sign where directed by the Resident Engineer. All wood members shall be of framing lumber. Cover sign frame with 0.7 mm (24 gage) galvanized sheet steel nailed securely around edges and on all bearings. Provide three 100 by 100 mm (4 inch by 4 inch) posts (or equivalent round posts) set 1200 mm (four feet) into ground. Set bottom of sign level at 900 mm (three feet) above ground and secure to posts with through bolts. Make posts full height of sign. Brace posts with 50 x 100 mm (two by four inch) material as directed.

B. Paint all surfaces of sign and posts two coats of white gloss paint. Border and letters shall be of black gloss paint, except project title which shall be blue gloss paint.

C. Maintain sign and remove it when directed by the Resident Engineer.

D. Detail Drawing of construction sign showing required legend and other characteristics of sign is shown on the drawings.

E. Contractor to list emergency contacts on the Construction sign at the Entrance to the Site.

**1.30 SAFETY SIGN**

A. Provide a Safety Sign where directed by Resident Engineer. Face of sign shall be 19 mm (3/4 inch) thick exterior grade plywood. Provide two 100 mm by 100 mm (four by four inch) posts extending full height of sign and 900 mm (three feet) into ground. Set bottom of sign level at 1200 mm (four feet) above ground.

B. Paint all surfaces of Safety Sign and posts with one prime coat and two coats of white gloss paint. Letters and design shall be painted with gloss paint of colors noted.

C. Maintain sign and remove it when directed by Resident Engineer.

D. Standard Detail Drawing Number SD10000-02(Found on VA TIL) of safety sign showing required legend and other characteristics of sign is shown on the drawings.

E. Post the number of accident free days on a daily basis.

F. TEMPORARY INTERIOR SIGNAGE: When the Contractor’s work blocks doors and/or exits, changes paths, etc. the General Contractor is to provide all temporary signage to reroute personnel and block the doors or exits. Locations to be determined based on the ILSM.

**1.31 PHOTOGRAPHIC DOCUMENTATION**

A. During the construction period through completion, provide 250 – 300 photographic documentations of construction progress and at selected milestones including electronic indexing, navigation, storage and remote access to the documentation, as per these specifications. The commercial photographer or the subcontractor used for this work shall meet the following qualifications:
   1. Demonstrable minimum experience of three (3) years in operation providing documentation and advanced indexing/navigation systems including a representative portfolio of construction projects of similar type, size, duration and complexity as the Project.
   2. Demonstrable ability to service projects throughout North America, which shall be demonstrated by a representative portfolio of active projects of similar type, size, duration and complexity as the Project.

B. Photographic documentation elements:
   1. Each digital image shall be taken with a professional grade camera with minimum size of 6 megapixels (MP) capable of producing 200x250mm (8 x 10 inch) prints with a minimum of 2272 x 1704 pixels and 400x500mm (16 x 20 inch) prints with a minimum 2592 x 1944 pixels.
   2. Indexing and navigation system shall utilize actual AUTOCAD construction drawings, making such drawings interactive on an on-line interface. For all documentation referenced herein, indexing and navigation must be organized by both time (date-stamped) and location throughout the project.
   3. Documentation shall combine indexing and navigation system with inspection-grade digital photography designed to capture actual conditions throughout construction and at critical milestones. Documentation shall be accessible on-line through use of an internet connection. Documentation shall allow for secure multiple-user access, simultaneously, on-line.
   4. Before construction, the building pad, adjacent streets, roadways, parkways, driveways, curbs, sidewalks, landscaping, adjacent utilities and adjacent structures surrounding the building pad and site shall be documented. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings. If site work or pad preparation is extensive, this documentation may be

required immediately before construction and at several pre-determined intervals before building work commences.

5. Construction progress for all trades shall be tracked at pre-determined intervals, but not less than once every thirty (30) calendar days (“Progressions”). Progression documentation shall track both the exterior and interior construction of the building. Exterior Progressions shall track 360 degrees around the site and each building. Interior Progressions shall track interior improvements beginning when stud work commences and continuing until Project completion.
6. As-built condition of pre-slab utilities and site utilities shall be documented prior to pouring slabs, placing concrete and/or backfilling. This process shall include all underground and in-slab utilities within the building(s) envelope(s) and utility runs in the immediate vicinity of the building(s) envelope(s). This may also include utilities enclosed in slab-on-deck in multi-story buildings. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive site utility plans.
7. As-built conditions of mechanical, electrical, plumbing and all other systems shall be documented post-inspection and pre-insulation, sheet rock or dry wall installation. This process shall include all finished systems located in the walls and ceilings of all buildings at the Project. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive architectural drawings.
8. As-built conditions of exterior skin and elevations shall be documented with an increased concentration of digital photographs as directed by the Resident Engineer in order to capture pre-determined focal points, such as waterproofing, window flashing, radiused steel work, architectural or Exterior Insulation and Finish Systems (EIFS) detailing. Overlapping photographic techniques shall be used to insure maximum coverage. Indexing and navigation accomplished through interactive elevations or elevation details.
9. As-built finished conditions of the interior of each building including floors, ceilings and walls shall be documented at certificate of occupancy or equivalent, or just prior to occupancy, or both, as directed by the Resident Engineer. Overlapping photographic techniques shall be used to insure maximum coverage.

Indexing and navigation accomplished through interactive architectural drawings.

10. Miscellaneous events that occur during any Contractor site visit, or events captured by the Department of Veterans Affairs independently, shall be dated, labeled and inserted into a Section in the navigation structure entitled “Slideshows,” allowing this information to be stored in the same “place” as the formal scope.
11. Customizable project-specific digital photographic documentation of other details or milestones. Indexing and navigation accomplished through interactive architectural plans.
12. Monthly (29 max) exterior progressions (360 degrees around the project) and slideshows (all elevations and building envelope). The slideshows allow for the inclusion of Department of Veterans Affairs pictures, aerial photographs, and timely images which do not fit into any regular monthly photopath.
13. Weekly (21 Max) Site Progressions - Photographic documentation capturing the project at different stages of construction. These progressions shall capture underground utilities, excavation, grading, backfill, landscaping and road construction throughout the duration of the project.
14. Regular (8 max) interior progressions of all walls of the entire project to begin at time of substantial framed or as directed by the Resident Engineer through to completion.
15. Detailed Exact-Built of all Slabs for all project slab pours just prior to placing concrete or as directed by the Resident Engineer.
16. Detailed Interior exact built overlapping photos of the entire building to include documentation of all mechanical, electrical and plumbing systems in every wall and ceiling, to be conducted after rough-ins are complete, just prior to insulation and or drywall, or as directed by Resident Engineer.
17. Finished detailed Interior exact built overlapping photos of all walls, ceilings, and floors to be scheduled by Resident Engineer prior to occupancy.
18. In event a greater or lesser number of images than specified above are required by the Resident Engineer, adjustment in contract price will be made in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).

C. Images shall be taken by a commercial photographer and must show distinctly, at as large a scale as possible, all parts of work embraced in the picture.

D. Coordination of photo shoots is accomplished through Resident Engineer. Contractor shall also attend construction team meetings as necessary. Contractor’s operations team shall provide regular updates regarding the status of the documentation, including photo shoots concluded, the availability of new Progressions or Exact-Builts viewable on-line and anticipated future shoot dates.

E. Contractor shall provide all on-line domain/web hosting, security measures, and redundant server back-up of the documentation.

F. Contractor shall provide technical support related to using the system or service.

G. Upon completion of the project, final copies of the documentation (the “Permanent Record”) with the indexing and navigation system embedded (and active) shall be provided in an electronic media format, typically a DVD or external hard-drive. Permanent Record shall have Building Information Modeling (BIM) interface capabilities. On-line access terminates upon delivery of the Permanent Record.

**1.32 FINAL ELEVATION DIGITAL IMAGES**

A. A minimum of four (4) images of each elevation shall be taken with a minimum 6 MP camera, by a professional photographer with different settings to allow the Resident Engineer to select the image to be printed. All images are provided to the RE on a CD.

B. Photographs shall be taken upon completion, including landscaping. They shall be taken on a clear sunny day to obtain sufficient detail to show depth and to provide clear, sharp pictures. Pictures shall be 400 mm x 500 mm (16 by 20 inches), printed on regular weight paper, matte finish archival grade photographic paper and produced by a RA4 process from the digital image with a minimum 300 PPI. Identifying data shall be carried on label affixed to back of photograph without damage to photograph and shall be similar to that provided for final construction photographs.

**1.33 HISTORIC PRESERVATION**

Where the Contractor or any of the Contractor's employees, prior to, or during the construction work, are advised of or discover any possible archeological, historical and/or cultural resources, the Contractor shall immediately notify the Resident Engineer verbally, and then with a written follow up.

- - - E N D - - -

**SECTION 01 01 10 - FSS**
**FIRE SAFETY SECTION**

PART 1 - GENERAL

1.1 DESCRIPTION: This section covers safety precautions required by all contractor personnel to safeguard patients, visitors, and Department of Veterans Affairs employees.

1.2 RELATED SECTION

A. Section 01 00 00 - GENERAL REQUIREMENTS

1.3 APPLICABLE PUBLICATIONS

A. NFPA standard No. 241 - Safeguarding Construction, Alteration, and Demolition Operations.

B. NFPA Standard No. 51B - Fire Protection in use of cutting and welding Processes.

C. NFPA Standard No. 101 - Life Safety Code (Current Edition)

D. OSHA Regulations 29CFR1926 - Construction Industry Standards.

1. Sub-part P- Fire Protection and Prevention

2. Sub-part J- welding and Cutting

PART 2 - PRODUCTS

2.1 PRODUCTS:

A. Table F-1 indicates which fire extinguishers are required for various combustible materials.

**Table F-1 FIRE EXTINGUISHERS DATA**

| TYPE OF AGENT | Multi-Purpose Dry Chemical Monoammonium Phosphate | Regular Dry Chemical Sodium Phosphate | Halon 1211 Bromoclorodi-fluoromethane | Carbon Dioxide ($CO_2$) | Water |
|---|---|---|---|---|---|
| Each class of fire calls for the right kind of extinguisher. Using the wrong extinguisher is dangerous and may do more harm than good. For your own protection, you should know the classes of fire, the different types of extinguishers, how to use them and why. | Yes-excellent Adheres to burning materials amd forms a coating which will smother the fire and minimize reflash. | No | Yes-excellent Halon 1211 leaves no residue. May not normally affect equipment. | No | Yes Water saturates materials and prevents rekindling. |
| Fires in ordinary combustible materials - paper, wood, and many plastics. Quenching by water or insulating by Multi-Purpose (ABC),dry chemical is effective. | Yes-excellent Dry chemical agent smothers fire. Screen of agent shields user from heat. | Yes-excellent Dry chemical agent smothers fire. Screen of agent shields user from heat. | Yes-excellent Halon 1211 leaves no residue. May not normally affect equipment. | Yes-excellent Carbon Dioxide leaves no residue, may not normally affect or damage equipment. | No Water will spread flammable liquids and not put it out. |
| Fires in flammable liquids such as gasoline, oils, grease, tars, paints, lacquers and flammable gases. Multi-Purpose (ABC). Regular Dry Chemical, Halon 1211, and Carbon Dioxide agents smother these fires. | Yes-excellent Dry chemical agent is non-conductive. Screen of agent shields user from heat. | Yes-excellent Dry chemical agent is non-conductive. Screen of agent shields user from heat. | Yes-excellent Halon 1211 is a non-conductor, leaves no residue, may not normally affect or damage electrical equipment. | Yes-excellent Carbon Dioxide is a non-conductor, leaves no residue, may not normally affect or damage electrical equipment. | No Wate, a conductor, should never be used on live electrical fires. |
| Fires in electrical equipment.. Motors, generators, switches and appliances.. where a non conducting extinguishing agent Multi-Purpose (ABC), Regular Dry Chemical, Halon 1211 or Carbon Dioxide is required. | 5 to 20 feet<br>10 to 25 seconds | 5 to 20 feet<br>10 to 25 seconds | 8 to 18 feet<br>8 to 18 seconds<br>Depending on size | 3 to 8 feet<br>8 to 30 seconds | Up to 40 feet<br>Up to 60 seconds |
| RANGE ----------<br>Discharge Time ---------- | | | | | |

B. Cover Plates

1. Receptacles - Manufactured by H. B. Enterprises or equal. Catalog No. 007

2. Switches - Manufactured by N. 13. Enterprises. Catalog No. 003

PART III - EXECUTION

3.1 Construction offices and trailers used as storage are required to a located minimum distance from permanent structures. Veterans Administration approval of location does not relieve the contractor at this ultimate responsibility of meeting OSHA and NFPA Regulation.

3.2 Contractor is required to obtained a permit from the office of the Chief Engineer prior to start of each welding/cutting operation. The Chief Engineer reserves the right to delegate the Project Manager as approving official. The following form is acceptable for obtaining approval and may be reproduced at contractor's expense. Other form must be submitted for approval by the Project Engineer prior to use.

3.3 The following checklist is provided to the contractor as a quick reference only. NFPA 513 should be consulted for official requirements for protection of the area.

## REQUEST FOR SPRINKLER SYSTEM SHUTDOWN

Date Closed: _____ Time Closed: _____

Planned Date Restored: _____ Time Restored: _____

Location of System: Bldg: _____ Floor: _____ Wing: _____

Area this will affect: _____

Impact on adjacencies: _____

Reason for shutdown: _____

If Construction, Give Project#: _____ Generic Maintenance Contract

Sprinkler Contractor: _____ General Contractor: _____

Phone: _____ Phone: _____

Remarks: _____ Approval [ x ] Disapproval [ ]

Approving Authority Comments: _____

_____
Signature/Approval Authority

**Copy one (1) VAMC, Form No 138-S1** **Revised 2/05**

Date Valve Reopened: _____

Time Valve Reopened: _____

Location of System: Building: _____

Date Closed: _____

Wing: _____

Time Closed: _____

Floor: _____

_____
Signature of Requestor

_____
Print Name

_____
Signature of FM Divisional Manager

REQUESTOR OF SHUTDOWN ID: O-001391
**Copy two (2) VAMC, Form No 138-S2**

**Copy three (3) VAMC, Form No 138-S3**
**1,421**

## PERMIT FOR CUTTING AND WELDING WITH PORTABLE GAS, ELECTRICAL, OR ARC EQUIPMENT

Date Disabled:_____ Time Disabled: _____

Planned Date Restored: _____ Time Restored:_____

Location of System: Bldg:_____ Floor:_____ Wing:_____

Area this Will Affect: _____ Impact on Adjacencies:_____

*The location where the work is to be done had been examined, necessary precautions taken, and permission is granted for this work.*

Work to Be Accomplished: _____

Construction Project#: _____ Generic Maintenance Contract

Subcontractor: _____ General Contractor: _____

Phone: _____ Phone: _____

_____ Approval [ ] Disapproval [ ]

Signature/Approval Authority Approving Authority Comments:

---

ATTENTION

Before approving any cutting and welding permit, the Contractor's fire safety supervisor or his appointee and/or the PAI or his designee shall inspect the work area and confirm that precautions have been taken to prevent fire in accordance with NFPA 51B.
Contractor is responsible to check off each item below that applies or indicate N/A.

PRECAUTIONS

_____ Sprinklers in service. Fully charged and operable fire extinguishers that are appropriate for the type of possible fire shall be available immediately at the work area.
_____ The hot work equipment to be used shall be in satisfactory operating condition and in good repair.
_____ The following shall apply to hot work done in close proximity to a sprinkler head:
(a) A wet rag shall be laid over the sprinkler head and then removed at the conclusion of the welding or cutting operation.
(b) During hot work, special precautions shall be taken to avoid accidental operation of automatic fire detection or suppression systems (e.g., special extinguishing systems or sprinklers).
_____ Nearby personnel shall be suitably protected against dangers such as heat, sparks, and slag.

WITHIN 35 FT OF WORK

_____ Floors swept clean of combustibles
_____ If relocation is impractical, combustibles shall be protected with fire-retardant covers or otherwise shielded with metal or fire-retardant guards or curtains.
_____ Combustible floors (except wood on concrete) shall be kept wet, covered with damp sand, or protected by noncombustible or fire-retardant shields.
_____ Where floors have been wet down, personnel operating arc welding equipment or cutting equipment shall be protected from possible shock.
_____ Openings or cracks in walls, floors, or ducts within 11 m (35 ft) of the site shall be tightly covered with fire-retardant or noncombustible material to prevent the passage of sparks to adjacent areas.
_____ Covers suspended beneath work to collect sparks

WORK ON WALLS OR CEILINGS

_____ Construction noncombustible and without combustible covering
_____ Combustibles moved away from opposite side of wall
_____ If hot work is done near walls, partitions, ceilings, or roofs of combustible construction, fire-retardant shields or guards shall be provided to prevent ignition.
_____ If hot work is done on one side of a wall, partition, ceiling, or roof, one of the following criteria shall be met:
(a) Precautions shall be taken to prevent ignition of combustibles on the other side by relocating the combustibles.
(b) If it is impractical to relocate combustibles, a fire watch shall be provided on the side opposite from where the work is being performed.

WORK ON ENCLOSED EQUIPMENT
(Tanks, containers, ducts, dust collectors, etc.)

_____ Containers purged of flammable vapors
_____ Ducts and conveyor systems that might carry sparks to distant combustibles shall be shielded, or shut down, or both.

FIRE WATCH

_____ To be provided during and 30 minutes after operation
_____ Supplied with extinguisher
_____ Trained in use of equipment and in sounding fire alarm

FINAL CHECK-UP

_____ Work area and all adjacent areas to which sparks and heat might have spread (including floors above and below and on opposite sides of walls) were inspected 30 minutes after the work was completed and were found fire safe.

Signed:_____
(Supervisor of Fire Watcher)

Milwaukee VA Medical Center - 1,421 Page 2 of 2 Outage ID: O-001391

**SECTION 01 01 10 - IC**
**INFECTION CONTROL**

**DESCRIPTION**

A. This section specifies the control of environmental infection control and risk assessment that the Contractor must consider for construction & renovation projects in the medical facility. It includes Precautionary management of, Inspections and Non invasive activities, small scale, short duration activities, that create minimal dust. Major demolition and construction projects that generate a moderate to high levels of dust. Movement of materials and equipment, and resources that are encountered or

Step 1. **Identify Construction Activity**

generated by the Contractor. The Contractor is obligated to consider the specified control measures with the costs included within the various contract items of work. An ***Infection Control Risk Assessment Matrix of Precautions*** for construction and renovation for activities follows.

| | |
|---|---|
| **TYPE A** | **Inspection and Non-Invasive Activities**.<br>Includes, but is not limited to:<br>▪ removal of ceiling tiles for visual inspection limited to 1 tile per 50 square feet<br>▪ painting (but not sanding)<br>▪ wall covering, electrical trim work, minor plumbing, and activities which do not generate dust or require cutting of walls or access to ceilings other than for visual inspection. |
| **TYPE B** | **Small scale, short duration activities which create minimal dust**<br>Includes, but is not limited to:<br>▪ installation of telephone and computer cabling<br>▪ access to chase spaces<br>▪ cutting of walls or ceiling where dust migration can be controlled. |
| **TYPE C** | **Work that generates a moderate to high level of dust or requires demolition or removal of any fixed building components or assemblies**<br>Includes, but is not limited to:<br>▪ sanding of walls for painting or wall covering<br>▪ removal of floor coverings, ceiling tiles and casework<br>▪ new wall construction<br>▪ minor duct work or electrical work above ceilings<br>▪ major cabling activities<br>▪ any activity that cannot be completed within a single work shift. |
| **TYPE D** | **Major demolition and construction projects**<br>Includes, but is not limited to:<br>▪ activities which require consecutive work shifts<br>▪ requires heavy demolition or removal of a complete cabling system<br>▪ new construction. |

B. Infection Control Risk and damage is defined as the presence of chemical, physical, or biological elements or agents which:

1. Adversely effect human health or welfare,
2. Unfavorably alter ecological balances of importance to human life.

Step 2. **Identify Patient Risk Group**

Using the following table, ***identify the*** **Patient Risk Groups** that will be affected. If more than one risk group will be affected, select the higher risk group:

| Low Risk | Medium Risk | High Risk | Highest Risk |
|---|---|---|---|
| ▪ Office areas | ▪ Cardiology<br>▪ Echocardiography<br>▪ Endoscopy<br>▪ Nuclear Medicine<br>▪ Physical Therapy<br>▪ Radiology/MRI<br>▪ Respiratory Therapy | ▪ CCU<br>▪ Emergency Room<br>▪ Labor & Delivery<br>▪ Laboratories (specimen)<br>▪ Newborn Nursery<br>▪ Outpatient Surgery<br>▪ Pediatrics<br>▪ Pharmacy<br>▪ Post Anesthesia Care Unit<br>▪ Surgical Units | ▪ Any area caring for immunocompromised patients<br>▪ Burn Unit<br>▪ Cardiac Cath Lab<br>▪ Central Sterile Supply<br>▪ Intensive Care Units<br>▪ Medical Unit<br>▪ Negative pressure isolation rooms<br>▪ Oncology<br>▪ Operating rooms including C-section rooms |

C. Match the ***Patient Risk Group*** *with* ***Construction Project Type*** on the following matrix to find the level of **infection control activities required**.

**Patient Risk Group** (***Low, Medium, High, Highest***) with the planned **…**
**Construction Project Type** (***A, B, C, D***) on the following matrix, to find the **…**
**Class of Precautions** (***I, II, III or IV***) or level of infection control activities required.

1) Infection Control approval will be required when the Construction Activity and Risk Level indicate that **Class III** or **Class IV** control procedures are necessary. Contact the VA Project engineer and the infection control officer before proceeding.

Step 3. **Identify Level of Infection Control Activities Required**

## IC Matrix - Class of Precautions: Construction Project by Patient Risk

| Patient Risk Group | Construction Project Type: TYPE A | TYPE B | TYPE C | TYPE D |
|---|---|---|---|---|
| LOW Risk Group | I | II | II | III/IV |
| MEDIUM Risk Group | I | II | III | IV |
| HIGH Risk Group | I | II | III/IV | IV |
| HIGHEST Risk Group | II | III/IV | III/IV | IV |

## D. Description of Required Infection Control Precautions by Class

| | During Construction Project | Upon Completion of Project |
|---|---|---|
| CLASS I | 1. Execute work by methods to minimize raising dust from construction operations.<br>2. Immediately replace a ceiling tile displaced for visual inspection | |
| CLASS II | 1. Provide active means to prevent airborne dust from dispersing into atmosphere.<br>2. Water mist work surfaces to control dust while cutting.<br>3. Seal unused doors with duct tape.<br>4. Block off and seal air vents.<br>5. Place dust mat at entrance and exit of work area<br>6. *Remove or isolate HVAC system in areas where work is being performed. | 1. Wipe work surfaces with disinfectant.<br>2. Contain construction waste before transport in tightly covered containers.<br>3. Wet mop and/or vacuum with HEPA filtered vacuum before leaving work area.<br>4. Remove isolation of HVAC system in areas where work is being performed. |
| CLASS III | 1. *Remove or Isolate HVAC system in area where work is being done to prevent contamination of duct system.<br>2. Complete all critical barriers i.e. sheetrock, plywood, plastic, to seal area from non-work area or implement control cube method (cart with plastic covering and sealed connection to work site with HEPA vacuum for vacuuming prior to exit) before construction begins.<br>3. Maintain negative air pressure within work site utilizing HEPA equipped air filtration units.<br>4. Contain construction waste before transport in tightly covered containers.<br>5. Cover transport receptacles or carts. Tape covering unless solid lid.<br>* Use window for negative HEPA air exhaust when accessible. Obtain V.A, resident engineer approval for exhausting in existing exhaust ductwork. | 1. Do not remove barriers from work area until completed project is inspected by the owner's Safety Department and Infection Control Department and thoroughly cleaned by the owner's Environmental Services Department.<br>2. Remove barrier materials carefully to minimize spreading of dirt and debris associated with construction.<br>3. Vacuum work area with HEPA filtered vacuums.<br>4. Wet mop area with disinfectant.<br>5. Remove isolation of HVAC system in areas where work is being performed. |

| | | |
|---|---|---|
| CLASS IV | 1. Isolate HVAC system in area where work is being done to prevent contamination of duct system.<br>2. Complete all critical barriers i.e. sheetrock, plywood, plastic, to seal area from non-work area or implement control cube method (cart with plastic covering and sealed connection to work site with HEPA vacuum for vacuuming prior to exit) before construction begins.<br>3. Maintain negative air pressure within work site utilizing HEPA equipped air filtration units.<br>4. Seal holes, pipes, conduits, and punctures appropriately.<br>5. Construct anteroom and require all personnel to pass through this room so they can be vacuumed using a HEPA vacuum cleaner before leaving work site or they can wear cloth or paper coveralls that are removed each time they leave the work site.<br>6. All personnel entering work site are required to wear shoe covers. Shoe covers must be changed each time the worker exits the work area.<br>7. Do not remove barriers from work area until completed project is inspected by the owner's Safety Department and Infection Control Department and thoroughly cleaned by the owner's Environmental Services Department. | 1. Remove barrier material carefully to minimize spreading of dirt and debris associated with construction.<br>2. Contain construction waste before transport in tightly covered containers.<br>3. Cover transport receptacles or carts. Tape covering unless solid lid<br>4. Vacuum work area with HEPA filtered vacuums.<br>5. Wet mop area with disinfectant.<br>6. Remove isolation of HVAC system in areas where work is being performed. |

E. Identify the area surrounding the project area, assessing potential impact.

Step 4. **Identify the areas surrounding the project area, assessing potential impact**

| Unit Below | Unit Above | Lateral | Lateral | Behind | Front |
|---|---|---|---|---|---|
| | | | | | |
| Risk Group | Risk Group | Risk Group | Risk Grow . | Risk Group | Risk Group |

Step 5. **Identify specific site of activity eg, patient rooms, medication room, etc.**

Step 6. **Identify issues related to: ventilation, plumbing, electrical in terms of the occurrence of probable outages.**

Step 7. **Identify containment measures, using prior assessment. What types of barriers? (Eg, solids wall barriers); Will HEPA filtration be required?**

(Note: Renovation/construction area shall be isolated from the occupied areas during construction and shall be negative with respect to surrounding areas)

Step 8. Consider potential risk of water damage. Is there a risk due to compromising structural integrity? (eg, wall, ceiling, roof)

Step 9. **Work hours: Can or will the work be done during non-patient care hours?**

Step 10. **Do plans allow for adequate number of isolation/negative airflow rooms?**

Step 11. **Do the plans allow for the required number & type of handwashing sinks?**

Step 12. **Does the infection control staff agree with the minimum number of sinks for this project?** (Verify **against** AIA Guidelines for types and area)

Step 13. **Does the infection control staff agree with the plans relative to clean and soiled utility rooms?**

Step 14. **Plan to discuss the following containment issues with the project team. Eg, traffic flow, housekeeping, debris removal (how and when)**

*Appendix: Identify and communicate the responsibility for project monitoring that includes infection control concerns and risks. The ICRA may be modified throughout the project. Revisions must be communicated to the Project Manager.*

Steps 1-3 Adapted with permission V Kennedy, B Barnard, St Luke Episcopal Hospital, Houston TX ; C Fine, CA

Steps 4-14 Adapted with permission Fairview University Medical Center, Minneapolis MN by ECSI Inc 2001
Forms modified and provided courtesy of 3 Bartley, ECSI Inc 2002

# Infection Control Construction Permit

| | |
|---|---|
| | Permit No: |
| Location of Construction: | Project Start Date: |
| Project Coordinator: | Estimated Duration: |
| Contractor Performing Work | Permit Expiration Date: |
| Supervisor: | Telphone: |

| YES | NO | CONSTRUCTION ACTIVITY | YES NO | INFECTION CONTROL, RISK GROUP |
|---|---|---|---|---|
| | | TYPE A: Inspection, non-invasive activity | | GROUP 1: Low Risk |
| | | TYPE B: Small scale, short duration, moderate to high levels | | GROUP 2: Medium Risk |
| | | TYPE C: Activity generates moderate to high levels of dust, re Lures eater 1 work shift for completion | | GROUP 3: Medium/high Risk |
| | | TYPE. D: Major duration arid construction activities Requiring consecutive work shifts | | GROUP 4: Highest Risk |

| | | |
|---|---|---|
| CLASS I | 1. Execute work by methods to minimize raising dust from construction operations.<br>2. Immediately replace any ceiling tile displaced for visual inspection. | 3. Minor Demolition for Remodeling |
| CLASS 11 | 1, Provides active means to prevent air-bone dust from dispersing into atmosphere<br>2. Water mist work surfaces to control dust while cutting.<br>3. Seal unused doors with duct tape.<br>4. Block off and seal air vents.<br>S. Wipe surfaces with disinfectant. | 6. Contain construction waste before transport in tightly covered containers.<br>7. Wet mop and/or vacuum with HEPA filtered vacuum before leaving work area.<br>S. Place dust mat at entrance and exit of work area.<br>9. Remove or isolate HVAC system in areas where work is being performed. |
| CLASS 111<br><br>Date<br>Initial | 1. Obtain infection control pennit before construction begins.<br>2. Isolate HVAC system in area where work is being done to prevent contamination of the duct system.<br>3. Complete all critical barriers or implement control cube method before construction begins.<br>4. Maintain negative air pressure within work site utilizing HEPA equipped air filtration units.<br>S Do not remove barriers from work area until complete project is thoroughly cleaned by Env. Services Dept. | 6. Vacuum work with HEPA filtered vacuums.<br>7. Wet mop with disinfectant<br>S. Remove barrier materials carefully to minimize spreading of dirt and debris associated with construction.<br>9. Contain construction waste before transport in tightly covered containers.<br>10. Cover transport receptacles or carts. Tape covering.<br>11. Remove or isolate HVAC system in areas where work is being performed/ |
| Class IV<br><br>Date<br><br>Initial | l. Obtain infection control permit before construction begins.<br>2. Isolate HVAC= system in area where work is being done to prevent contamination of duct system.<br>3. Complete all critical barriers or implement control cube method before construction begins.<br>4. Maintain negative air pressure within work site utilizing HEPA equipped air filtration units.<br>5. Seal holes, pipes, conduits, and punctures appropriately.<br>6. Construct anteroom and require all personnel to pass through this room so they can be vacuumed using a HEPA vacuum cleaner before leaving work site or they can wear cloth or paper coveralls that are removed each time they leave the work site. | 7. All personnel entering work site are required to wear shoe covers<br>S. Do not remove barriers from work area until completed project is thoroughly cleaned by the Environmental Service Dept.<br>9. Vacuum work area with HEPA filtered vacuums.<br>10. Wet mop with disinfectant.<br>11. Remove barrier materials carefully to minimize spreading of dirt and debris associated with construction.<br>12. Contain construction waste before transport in tightly covered containers.<br>13. Cover transport receptacles or carts. Tape covering.<br>14. Remove or isolate HVAC system in areas where is bein done. |

Additional Requirements:

| | |
|---|---|
| Date Initials | Exceptions/Additions to this permit Date Initials are noted b attached memoranda |
| Permit Request By: | Permit Authorized By: |
| Date: | Date: |

F. Apply Life Safety and standards (APIC) and the following criteria would need to be assured in order to maintain the supply air side open during Class 4 construction activity:

- The air supply is 100% fresh air and the site and adjacent areas can be kept under negative pressure at all times.
- There is no re circulated air in this section
- There is no duct work involved in this section of the demolition
- The site can never be positive to the adjacent areas (i.e. keep the negative air machines on at all times or for 1-2 hours post site work until the negative action can be maintained.
- A log is maintained to document that the negative pressure is checked and has been maintained during those hours when the negative air machines are turned off. (An alarmed device is recommended for this purpose and should be maintained and monitored by the construction personnel).

**PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT**

**2.1 MATERIALS AND EQUIPMENT**

GENERAL REQUIREMENTS

A. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable). When transporting new materials & equipment though the hospital use 4 mil Poly sheeting encasing materials, tools and equipment or use a totally enclosed cart.

B. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated/work area until construction is completed.

C. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized place.

D. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.

E. Demolition materials must be transported in totally enclosed containers.

1) Demolition on above ground floors may use a window debris chute to convey materials to an enclosed dumpster that provides dust and noise control. The contractor is responsible to maintain the original appearance of the building fascia.

**2.1.2 NEGATIVE PRESSURE FILTRATION SYSTEM**

The Contractor shall provide enough negative air machines to completely exchange the regulated area air volume 4 actual times per hour. The Competent Person shall determine the number of units needed for each regulated area by dividing the cubic feet in the regulated area by 15 and then dividing that result by the actual cubic feet per minute (cfm) for each unit to determine the number of units needed to effect 4 air changes per hour. Provide a standby unit in the event of machine failure and/or emergency in an adjacent area.

**2.1.3 DESIGN AND LAYOUT**

***Before start of work for each phase of the project***, the contractor is to submit for approval, an infection control plan which will include the design and layout of the regulated area to include the type and location of infection control construction barriers to be used, access points, ante room location, etc. The submittal shall indicate the number of, location of and size of negative air machines and exhaust route & location of the windows to be used. The point(s) of exhaust, air flow within the regulated area, anticipated negative pressure differential, and supporting calculations for sizing shall be provided. In addition, submit the following:

1. Manufacturer's information on the negative air machine(s).
2. Method of supplying power to the units and designation/location of the panels.

3. Description of testing method(s) for correct air volume and pressure differential. Provide manufacturer's product data on the pressure differential measuring device used.
4. If auxiliary power supply is to be provided for the negative air machines, provide a schematic diagram of the power supply and manufacturer's data on the generator and switch.
5. Location of isolation negative air pressure monitor.
6. The following is a SAMPLE plan:

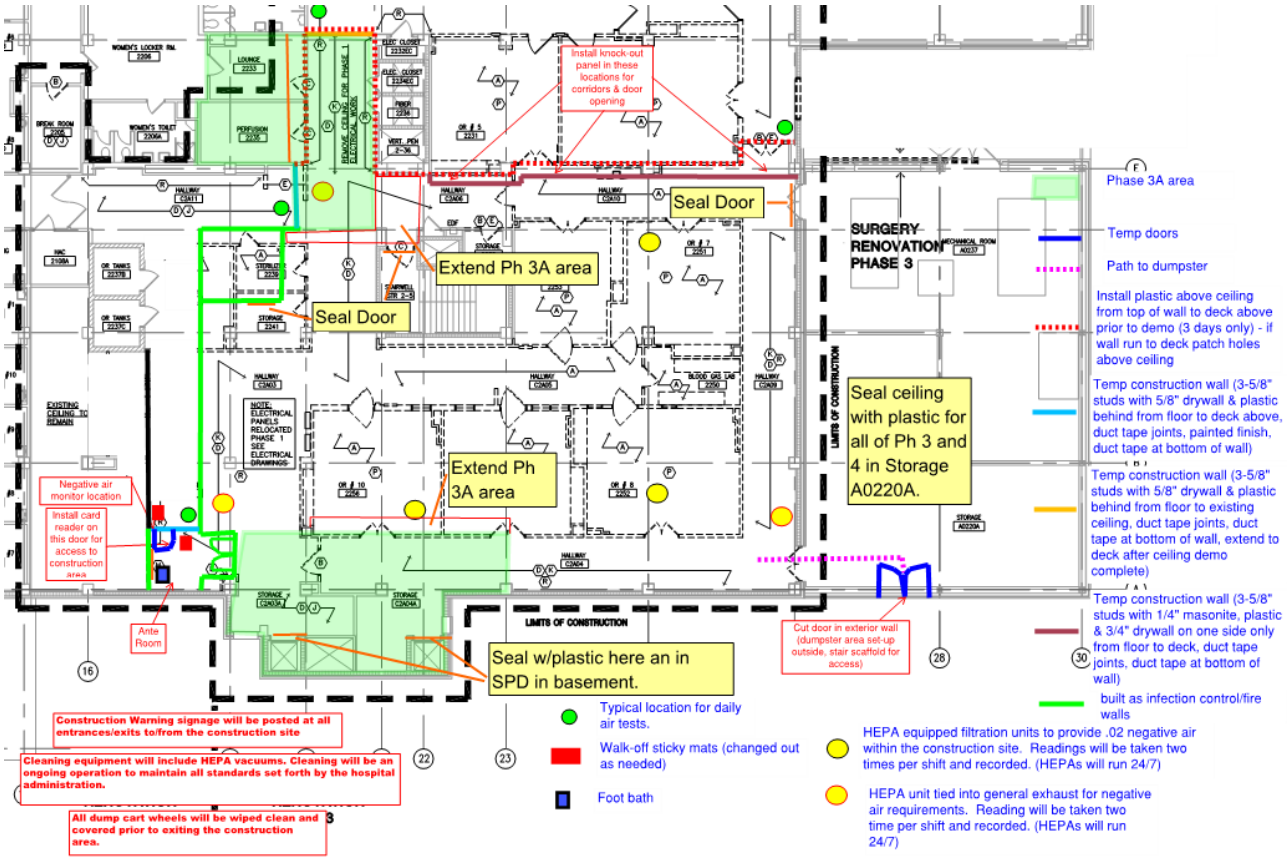


SAMPLE INFECTION CONTROL PLAN

## 2.1.4 NEGATIVE AIR MACHINES

A. Negative Air Machine Cabinet: The cabinet shall be constructed of steel or other durable material capable of withstanding potential damage from rough handling and transportation. The width of the

cabinet shall be less than 30" in order to fit in standard doorways. The cabinet must be factory sealed to prevent dust from being released during use, transport, or maintenance. Any access to and replacement of filters shall be from the inlet end. The unit must be on casters or wheels.

B. Negative Air Machine Fan: The rating capacity of the fan must the air moving capacity under actual operating conditions. Manufacturer's typically use "free-air" (no resistance) conditions when rating fans. The fan must be a centrifugal type fan.

A. Negative Air Machine Final Filter:

1) When exhausting directly to the outside from a window or penetration the filter shall be a minimum MERV 8 pleated filter media completely sealed on all edges within a structurally rigid frame.

2) When exhausting to a exhaust duct: the final filter shall be a HEPA filter. The filter media must be completely sealed on all edges within a structurally rigid frame. The filter shall align with a continuous flexible gasket material in the negative air machine housing to form an air tight seal. Each **HEPA** filter shall be individually tested and certified by the manufacturer to have an efficiency of not less than 99.97% when challenged with 0.3 µm dioctylphthalate (DOP) particles. Testing shall have been done in accordance with Military Standard MIL- STD-282 and Army Instruction Manual 136-300-175A. Each filter must bear a UL586 label to indicate ability to perform under specified conditions. Each filter shall be marked with the name of the manufacturer, serial number, air flow rating, efficiency and resistance, and the direction of test air flow.

D. Negative Air Machine Pre-filters: The pre-filters, which protect the final HEPA filter by removing larger particles, are required to prolong the operating life of the HEPA filter. Two stages of pre-filtration are required. A first stage pre-filter shall be a low efficiency type for particles 10 µm or larger. A second stage

pre-filter shall have a medium efficiency effective for particles down to 5 µm or larger. Pre-filters shall be installed either on or in the intake grid of the unit and held in place with a special housing or clamps.

F. Negative Air Machine Safety and Warning Devices: An electrical/ mechanical lockout must be provide to prevent the fan from being operated without a HEPA filter. Units must be equipped with an automatic shutdown device to stop the fan in the event of a rupture in the HEPA filter or blockage in the discharge of the fan. Warning lights are required to indicate normal operation; too high a pressure drop across filters; or too low of a pressure drop across filters.

G. Negative Air Machine Electrical: All electrical components shall be approved by the National Electrical Manufacturer's Association (NEMA) and Underwriter's Laboratories (UL). Each unit must be provided with overload protection and the motor, fan, fan housing, and cabinet must be grounded.

**2.1.5 PRESSURE DIFFERENTIAL**

The fully operational negative air system within the regulated area shall continuously maintain a pressure differential of -0.02" water column. Before any disturbance of any material or building system, this shall be demonstrated to the VA by use of a pressure differential meter/manometer as required by OSHA 29 CFR 1926.1101(e)(5)(i). The Competent Person shall be responsible for providing and maintaining the negative pressure and air changes as required by OSHA and this specification.

**2.1.9 TESTING THE SYSTEM**

The negative pressure system must be tested before any disturbedance. After the regulated area has been completely prepared, the decontamination units set up, and the negative air machines installed, start the units up one at a time. Demonstrate and document the operation and testing of the negative pressure system to the VA using smoke tubes and a negative pressure gauge. Testing must also be done at the start of each work shift.

**2.1.10 DEMONSTRATION OF THE NEGATIVE AIR PRESSURE SYSTEM**

The demonstration of the operation of the negative pressure system to the VA shall include, but not be limited to, the following:

A. Contractor to install **Triatek** (Web site www.Ttk.com) negative air isolation monitoring stations at the sites access doors or at opposite sides of the construction area check with COTR for number of units and location.

B. Curtains of the decontamination units move in toward regulated area.

D. Use smoke tubes to demonstrate air is moving air across all areas in which work is to be done.

E. Plastic barriers and sheeting move lightly in toward the regulated area.

**2.1.11 USE OF SYSTEM DURING CONSTRUCTION OPERATIONS**

A. Start units before beginning any disturbance occurs. After work begins, the units shall run continuously, maintaining 4 actual air changes per hour at a negative pressure differential of 5.0 Pa (-0.02") water column, for the duration of the work until a final visual clearance and final air clearance has been completed.

B. The negative air machines shall not be shut down for the duration of the project unless authorized by the VA, in writing.

C. Construction work shall begin at a location closest from the units and proceed away from them. If an electric failure occurs, the Competent Person shall stop all work and not resume until power is restored and all units necessary are operating properly again.

D. The negative air machines shall continue to run after all work is completed and until a final visual clearance and a final air, clearance has been completed for that regulated area.

**2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA**

**2.2.1 GENERAL**

A. Seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All surfaces in the regulated area must be covered to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated, immediately stop work and clean up the contamination at no additional cost to the Government.

**2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA**

A. Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA warning signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of opaque fire retardant poly sheeting at least 4 mils thick to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid and capable of withstanding the negative pressure.

**2.2.4 CRITICAL BARRIERS**

A. Completely separate the regulated area from adjacent areas using fire retardant poly at least 6 mils thick and duct tape. Individually seal with two layers of 6 mil poly and duct tape all HVAC openings, cap off exhaust into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects in the regulated area. Use care with hot/warm surfaces see fig 1.

**2.2.5 PRIMARY BARRIERS**

A. Temporary Construction Partitions:

1. Install and maintain temporary construction partitions to provide separations between construction areas and adjoining areas. Construct partitions of gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on one side of wood or metal steel studs. Seal with one layers of 6 mil poly for a vapor barrier under gypsum or plywood. Extend the Poly through suspended ceilings to floor

slab or roof. Seal penetrations at door openings, install tight-fitting yellow construction doors with self-closing devices see fig. 2 for barrier construction. Contractor to provide the construction(s) door for the project.

**2.2.6 CONTRACTOR SPILL RESPONSE KIT**

A. The kit should include the following:

1. Shop Vacuum.
2. Multi-Purpose Spill Control Sorbents to absorb nonaggesive liquids up to 30 gallons.
3. Sorbents pillows.
4. Pipe leak clamps for copper & steel pipe in sufficient size range and quantity base on project piping scope.
5. Bucket & mop and water resistant duct tape.

FIG. 1

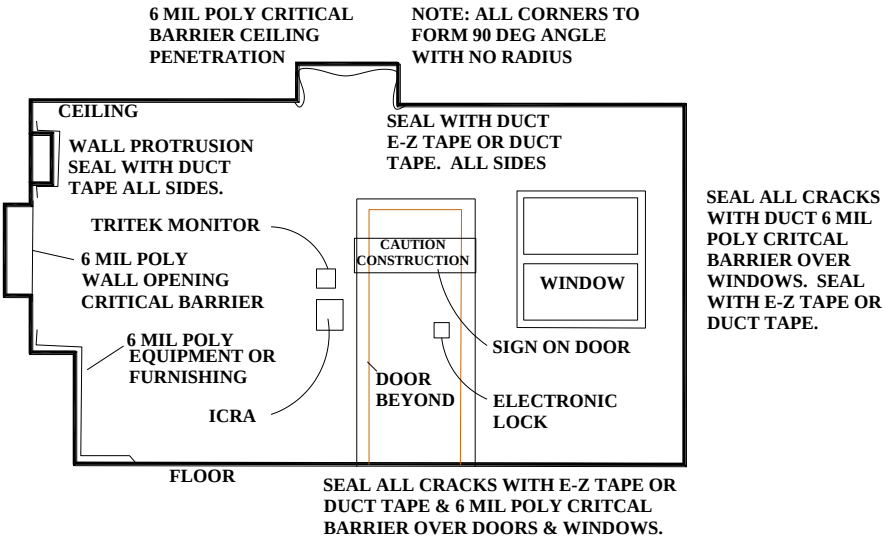


Figure 1

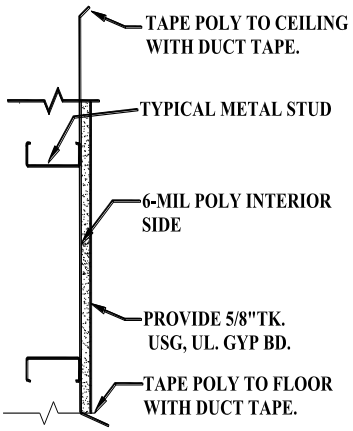


**TEMPORARY IC BARRIER WALL CONSTRUCTION**

Figure 2

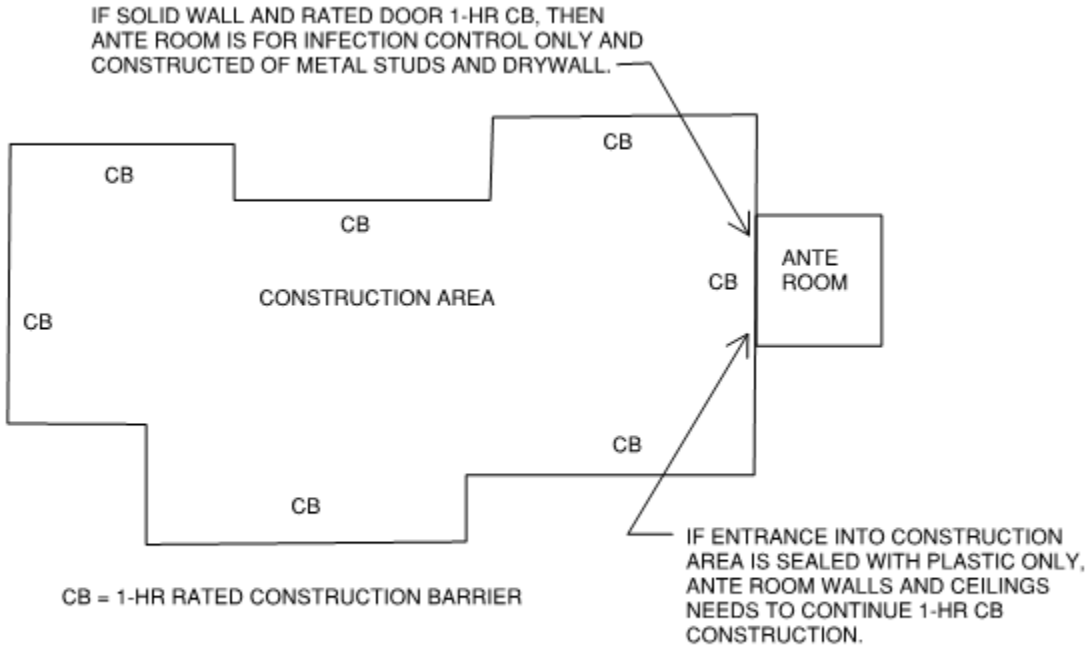


**CONSTRUCTION AREA TYPICAL PLAN**

Figure 3

**SECTION 01 01 10 - SN**

**SPECIAL NOTES**

PART 1: GENERAL

1.1 Not Used.

1.2 FIRE ALARM SYSTEM:

**FIRE/SECURITY ALARM SYSTEMS**: Contractor shall advise the Graphic Control Center and/or the Police Desk at extension 41010/42222 respectively, prior to any work which might result in the Fire Alarm System or Security System (this includes but is no limited to: Smoke Detectors, Water Flow Switches, Pull Stations, Sprinkler Heads, Motion Detectors, Door Contacts, Security Door Controls, etc.) being activated, in addition to having an approved outage form from the Facility Management Department. Notification to Graphics and/or the Police Desk and having an outage form, does not absolve the contractor from following the proper procedures to prevent the system from activating, i.e. covering the smoke heads with paper bags, closing valves, containing dust, monitoring and controlling security devices, etc.). If any system activates due to the contractor's failure to notify the Graphic Control Center, the Contractor's failure to follow proper procedures, or the Contractor's failure to obtain an outage form, a Modification/Settlement by Determination deduction of $2500.00 per alarm/event or notice from the Police that a construction area was left unsecured will be issued to the contractor.

1.3 SCHEDULING OF WORK:

A. Contractor shall verbally schedule work areas with Resident Engineer not less than fifteen (15) calendar days in advance of commencement of work. Verbal notification shall be backed up and verified in writing.

B. Contractor shall verbally schedule outages or service interruptions with Resident Engineer not less than fifteen (15) calendar days in advance of intended commencement of work. Notification does not guarantee the date of scheduled outage or service interruption however Resident Engineer will schedule such dates and inform the contractor. Date will be scheduled with medical center personnel when service interruption will minimize affect to hospital patients and operations. Contractor to submit VA System Outage Request form to Resident Engineer not less than fifteen (15) calendar days in advance of intended commencement of outage work. Contractor to attend (2) weekly pre-outage meetings with Engineering and staff to coordinate actual date of outage, duration, time of outage, phasing, and affected services. In addition, contractor to attend the pre-outage meeting one hour prior to outage to coordinate communications, readiness, pre-outage checklist, document requirements, temporary measures, lock out tag out and other outage requirements and procedures.

C. Contractor to attend weekly construction meetings.

1.4 PROTECTION OF WORK AREAS:

Contractor to provide drop cloths when working in occupied areas to avoid staining or damaging existing carpets or vinyl tile floors.

1.5 HOURS OF WORK:

A. The hours of contract work shall be from 7:00 a.m. until 4:30 p.m. the normal work shift for hospital employees, the contractor shall verify shift or shifts required for construction areas. Other than normal, after (off) hours, including federal holidays shall be scheduled two days prior to starting with the Project Manager. These off hours will be required to complete the project in the time allotted for the contract at no additional cost to the Department of Veterans Affairs. Upon approval of the Department of Veterans Affairs, the contractor will propose the scope or extent of off hour work due to individual contractor resources available to accomplish this project in the time allotted. In addition, these off hours will be required for utility/service interruptions, and any/other work that may interrupt the operation of the occupied space, i.e., some road construction, demolition, work in occupied areas, work affecting occupied areas, etc. Some noise producing

demolition operations will be required to be scheduled for off work hours as directed by Resident Engineer and described on drawings.

B. Certain work items, which require off-hour work, have been identified. These items are indicated on the drawings. Refer, in particular, to Phasing Notes on Drawings. All drawings shall be reviewed for off-hour work requirements and items creating disturbance to the hospital staff or patient care must be performed during off-hour working periods as established and approved by the VA Engineer.

C. Building will be occupied during performance of work, but areas of alterations will be vacated. Contractor shall take all measures and provide all material necessary for protecting existing equipment and property in affected areas of construction against dust and debris, so that equipment and affected areas to be used in the Medical Centers operations will not be hindered. Contractor shall permit access to Department of Veterans Affairs personnel and patients through other construction areas, which serve as routes of access to such affected areas and equipment. Coordinate alteration work in areas occupied by the VA so that Medical Center operations will continue during the construction period. Contractor to construct 7 feet tall by 5 feet wide metal stud and drywall tunnels through occupied space as deemed necessary by the VA for access by Medical Center personnel and maintaining construction operations.

1.6 SUBMITTAL APPROVAL AND START OF CONSTRUCTION PROJECT:

No work may commence prior to the contractor receiving written approval of all submittals related to work on this contract. Delivery of submittals to the COTR or verbal acknowledgement of receipt by the Project Manager **does not** constitute approval.

1.7 EMERGENCY SERVICE:

All offerors, if successful, must be able to respond to all contract and contractor created emergency services resulting from contractor actions and installations, as determined by the Department of Veterans Affairs Resident Engineer, with qualified staff personnel within one (1) hour of verbal notification during construction stages and warranty period. Bidders must be prepared to show proof, in writing, that they can satisfy this requirement prior to award.

1.8 KEYS:

Keys for access to construction/work areas may be issued to the contractor at the discretion of the Project Manager. Up to three sets of keys will be provided at no cost. Additional keys will be provided for a charge of $5.00 per key, payable by check to the Department of Veterans Affairs. All keys issued will be signed for and issued to the General Contractor. Upon completion of the work, failure to return all issued keys to the Project Manager will result in the issuance of a Settlement by Determination in the amount of $100.00 for each outstanding key. In addition, a $5.00 fee will be paid to VA for each outstanding key. Keys will be provided through the FM SAM Box. Keys are to be picked up and returned daily. If keys are not returned by the end of the day, a modification of $5.00/key per day will be assessed against the contractor.

1.9 SAFETY ITEMS:

A. Training: All employees of contractor and subcontractor shall be aware of the egress routes from the construction areas. It is the contractor's responsibility to ensure all employees are aware of the fire alarm codes for the building they are working in and participate in fire alarm drills and actual fire alarms.

B. Barricades: The contractor is responsible to erect barricades, construction and safety signs, and new egress routes. The barricades will be erected to restrict areas where hazardous operations are performed. The construction and safety signs shall consist of caution signs as determined and approved by VA; egress signs, where egress has been altered for construction; and any applicable hazardous warning signs. If the egress is changed due to construction, the contractor shall provide temporary directional signs for changes as determined by VA and for construction of any walkways, steps, or overhead protection scaffolding or the like as required providing a new means of egress. **Emergency egress plan shall be developed by the contractor and submitted for approval by the designated VA safety manager before egress routes are altered.**

C. Fire Extinguisher: The contractor and subcontractor's shall provide fully charged and fully operational fire extinguishers as required and in accordance with section FSS on the job site(s) at all times. Reference section 01 01 10 FSS.

D. Debris: Combustible storage and debris shall be kept to the lowest level necessary for required daily operations. The construction area shall be kept clean as indicated in general requirements and conditions

E. Gasoline Powered Equipment: Gasoline powered equipment shall not be used within the confines of any building on the Medical Center without specific written permission from the Chief, Engineering Service.

F. Fire/Smoke Doors: Fire and/or smoke doors shall not be propped open or prevented from closing and latching. This includes mechanical equipment rooms and utility closet doors.

G. Construction Site Phone: Contractor to run wiring from telephone closet to the construction space for the installation of a VA phone in the constitution space. Installation of the phone is required prior to construction can begin. The VA will provide the phone.

H. Construction Hard Hats: General Contractor to provide (4) sets of hard hats and safety glasses for each worksite for VA staff use.

I. Exit Signs:

a. Inside Construction Space: Contractor to provide luminescent Exit Signs throughout the construction space such that while standing in any place within the construction space, an Exit sign is visible and the path of egress can be followed.

b. Outside Construction Space: Contractor will cover, relocate, etc. Exit signs impacted due to their construction operations as directed by the ILSM and the VA Safety Officer.

1.10 **SECURITY OF CONSTRUCTION SITES** – Contractor Regulations

A. All construction sites must be secured to prevent inappropriate access by patients, visitors, and employees. While such security fences, doors, and barricades are temporary, they must be substantially installed to control access to the site. The existing security (Pegasys by Johnson Controls and Ingersoll Rand) system must be extended to each construction access door. Each construction door must be provided with an Ingersoll Rand Integrated Reader Lock programmed to the existing VA security system. Construction sites and all security measures must be monitored daily to ensure that security is maintained. Local VA Police must be alerted about the construction project. At the close of activity daily, before securing the site or portions of the site, the contractor must ensure that there are no patients, visitors, or staff in the area. If construction site problems arise, the Contracting Officer and COTR will take appropriate action to correct any and all safety and security conditions.

B. VA engineering, safety/fire department, and police staff must have the right to access the construction site as needed to perform their assigned responsibilities.

C. Lock up the worksite at all times to prevent patients and other unauthorized people from entering the site.

D. The need for job site security is much greater when work is being conducted in psychiatric areas to protect the safety of the patients. All job boxes, tools, etc., must be locked up even when workers are on site unless there's enough activity to assure that patients cannot access tools or site. Verify that no one is in the construction area upon locking up the site for the evening.

E. Two evacuation routes from the worksite must be maintained at all times.

F. Contractors may lock up their tools etc., with personal locks.

1.11 PENETRATIONS:

A. WALL:

a. All wall and/or floor penetrations created by work on this contract, whether by demolition or new construction, shall be patched by the general contractor or as assigned by the general contractor. All patching materials shall be of like kind or a suitable substitute approved by NFPA or UL.

b. If the permit is for other than inspection, a Follow-Up Inspection page will need to be filled out by the person performing the installation/removal work, which then needs to be signed and returned to whoever originally issued the permit. The permit initiator is then responsible for checking the areas listed on the permit to ensure firestopping was completed according to Facility standards and penetrations sealed with an approved fire/smoke sealant compound so as to maintain fire and smoke separation integrity. Documentation of the sealant or system used in the penetration must be made available at the affected penetration by the permit requestor at the time of permit completion inspection. The program or person completing the follow up inspection must validate that the sealant compound or system is properly rated and installed for maintaining the rating of the affected smoke or firewall. Photo-documentation in lieu of interim inspections can be performed to validate work.

c. ONLY (1) one type of fire sealant is permissible per hole.

d. The permit will be in this person's possession while all inspections and/or work are being performed.

B. CEILINGS:

a. To ensure that proper ceiling penetrations are sealed, all internal departments and contractors doing any cabling, wiring, plumbing, etc., must obtain a ceiling access permit from Facilities Services prior to installation.

b. All wall penetrations must be located, marked, and sealed by contractor responsible for penetration. As penetrations are sealed, Facilities Service must be contacted to inspect penetrations for proper sealing.

c. If the permit is for other than inspection, a Follow-Up Inspection page will need to be filled out by the person performing the installation/removal work, which then needs to be signed and returned to whoever originally issued the permit. The permit initiator is then responsible for checking the areas listed on the permit to ensure firestopping was completed according to Facility standards and penetrations sealed with an approved fire/smoke sealant compound so as to maintain fire and smoke separation integrity. Documentation of the sealant or system used in the penetration must be made available at the affected penetration by the permit requestor at the time of permit completion inspection. The program or person completing the follow up inspection must validate that the sealant compound or system is properly rated and installed for maintaining the rating of the affected smoke or firewall. Photo-documentation in lieu of interim inspections can be performed to validate work.

d. The permit will be in this person's possession while all inspections and/or work are being performed.

e. At the end of each work day and prior to leaving work site, the contractor shall replace all ceiling tiles temporarily removed to do work above finished ceilings in corridors.

f. If it is not practical to replace all ceiling tiles on a daily basis the contractor is to construct 7 feet tall by 5 feet wide metal stud and drywall tunnels through occupied spaces as deemed necessary by the VA for access by Medical Center personnel and maintaining construction operations. Upon the first incident of the contractor not replacing the ceiling tiles, this tunnel construction will have to commence immediately prior to any further construction on the project.

C. Reference section 01 01 10 – 1HR for additional information.

1.12 PHASING:

Phasing on this contract is critical as portions of the area to be remodeled shall remain occupied throughout the construction work. Contractor will be working in an operational hospital and not be provided designated elevators or entrances. The contractor will share the corridors, the B-Bank elevators, loading dock, etc. with staff, patients and other contractors. Each phase shall be as described on the drawings and/or specifications shall be completed in the sequence described. Also refer to Section 01 00 00, Article 1.6.G. Phasing.

1.13 SCAFFOLDING:

Prior to setup of all scaffolding, the contractor is to provide a submittal of the scaffolding design through the submittal review process. The scaffolding design is to be stamped by a professional engineer. Contractor is to provide copies of daily scaffolding inspections with daily logs.

1.14 ENERGY EFFICIENCY REQUIREMENTS:

A. Federal Executive Order #13423/#13514 requires all energy efficiency materials, equipment, and systems to be evaluated and if feasible incorporated into VA Projects. The A/E, prime contractor, and all subcontractors shall cooperate with the Federal Government in specifying, evaluating, documenting, purchasing, and installing energy efficient equipment that meet basic energy efficiency criteria established by the VA. The criteria can be defined as comparing total energy savings to life cycle cost of the equipment, To accomplish this objective, the A/E shall produce an Energy Equipment Schedule comparing a description of each standard piece of equipment (system) versus a description of recommended efficient equipment (or system); including the estimated purchase price, estimated cost to install, maintain, and operate the equipment as well as the estimated annual energy usage and estimated useful life for each piece of equipment (or system).

B. All design and installation will be in accordance with current VAMC, HVAC design guides, NEC, NFPA, ASHRAE 90.1, state, local and all VA and federal codes.

C. The VA intends to provide energy savings equipment and design modifications for current energy usage to the most efficient and economical level possible.

1.15 INSPECTIONS:

All mechanical and electrical work shall be inspected by Engineering Service (Shop & Resident Engineer) personnel prior to being put into operation or closing up if work will be hidden by walls, ceilings, drop ceilings, cover plates, access panels, etc. Contractor shall notify the VA RE a minimum of two days prior to the inspection date, times and dates shall be scheduled and agreed upon by VA. Installations will be inspected by these VA personnel for work in compliance with State, Federal, Local, Dept. of Veterans Affairs Codes, regulations and contract specifications. If corrections, alterations, adjustments, new construction etc. is required, the VA will be notified within 48 hours of completion of such items. These inspections and corrections, alterations, etc. will be made at no additional time or cost to VA.

**1.16 CONTRACTOR'S AGREEMENT - RULES AND REGULATIONS FOR ALL CONTRACTORS**

The following is the contractor's agreement required to be signed at the pre-construction meeting and updated monthly when new subcontractors start working on the job site. The agreement will be preceded by a training video provided by the VA. The agreement is the general contractor's responsibility to ensure all subcontractor personnel are trained and acknowledge (sign) the agreement.

A. STANDARD POLICY

All outside General contractors and Sub-contractors will coordinate all work within the hospital with Facilities Management before beginning work.

B. PURPOSE

General Contractor will ensure that each individual General Contractor and Sub-Contractor employee is responsible for complying with established hospital standards, applicable OSHA Safety Requirements, federal, state and local environmental regulations, wearing prescribed safety equipment, and preventing avoidable accidents.

C. **PROCEDURE**

**General Contractor will ensure that each individual general contractor and sub-contractor employee review, understand and acknowledge (sign) the following information prior to the commencement of work scheduled at this facility. General Contractor will forward copies of signed acknowledgements to Project Engineer of all new employees on a monthly basis.**

**The following building rules and regulations affect all contractor personnel, suppliers, and vendors**:

**D. Access to Construction Areas**

- Access is limited to areas such as critical care and surgical units, as well as mechanical/electrical rooms, etc. Access can be obtained through Facilities Service.
- Access to any floors of the facility after normally scheduled work hours (Monday-Friday, 7:00 a.m.-5:00 p.m.) must be scheduled in advance with the Project section of Facilities Service. Police and Security reserves the right to refuse access to anyone without prior authorization and identification.
- Ready access for the Engineering, Safety, Police and (the Fire Department) shall be maintained to all areas under construction at all times.
- Areas under construction shall be locked during off-hours. Keys and cylinders for this purpose are obtained through Facilities Service. Contractors will not put their locks on any doors without VA approval.

**E. Accidents and Injuries**

- First Aid/Medical Aid/Emergency Treatment for workers: The contractor must post emergency phone numbers and treatment facilities if any contractor employees are injured on the job, or need medical treatment
- Work site injuries must be reported to the VA. The VA has an accident reporting form (form number 2162). The COTS/ Safety/ or Security and Police Service will initiate the 2 162. Once the VA has completed the supervisor's portion the injured individual will be required to complete the narrative portion of the report. The service chief responsible for the contract is also required to sign the report and forward the original report to the Safety Section.

**F. Asbestos**

- There are both friable and non-friable asbestos-containing materials located within the hospital complex. Inspection reports are located in the Facilities Service Department. Contractors are required to be aware of the asbestos materials located in the vicinity of their work. Further, all contractors are expressly forbidden to disturb any asbestos-containing materials unless specifically authorized in writing by VA. Under no circumstances are any materials supplied or installed by the contractor to contain asbestos in any form or quantity.
- Asbestos removal contractors will be trained and licensed, and will follow all OSHA rules, VA specifications, state and local regulations from notification to disposal.
- A VA representative will verify the adequacy of the barriers and ventilation before any asbestos removal work is conducted.
- The contractor is responsible for monitoring his own employees' exposure to asbestos.
- Additional specific asbestos removal specifications will apply.
- Contractor to provide a Fiscal Year breakdown of Asbestos Costs on the project.

## G. ACM TRACE WORK OPERATIONS

- **ACM TRACE RESULTS -** Should renovation activities deem the material friable due to cutting, grinding or other mechanical means of removal, an employer is bound by OSHA 29 CFR regulations 1926.1200 (d) (5) (iv) to protect their employees. This may determine that removal of the materials be performed by asbestos abatement workers trained in 29 CFR 1926.1101.

  **OSHA regulation 1910.1200 HAZARDOUS COMMUNICATION Section (d)(5) Hazard determination "…employer shall determine the hazards of mixture of chemicals as follows: (iv) "If the…employer has evidence to indicate that a component present in the mixture in concentrations of less than one percent…could be released in concentrations which would exceed an established OSHA permissible exposure limit…or could present a health risk to employees in those concentrations, the mixture shall be assumed to present the same hazard."*

- **General Summary:**
  1. Employees, contractors, etc. must be warned about the presence of asbestos.
  2. The contractor must have a competent person on site during work. (At a minimum, it should be a trained, certified asbestos supervisor).
  3. Personal exposure assessments (negative exposure assessment) are required (PCM analysis) and workers should begin work with PPE.
  4. Wet methods and daily clean up and sealing waste in leak tight containers are required. The following is a list of references from OSHA guides. Note: The reference to the word "sheet rock" is based on trace (<1%) of asbestos being present in the "sheet rock."

- The contractor will be responsible for proper work practices and prohibitions for all construction activities involving material that contains any amount of asbestos regardless of the exposure levels. And the standard has exposure-based requirements, consisting of a 0.1 fiber/cc 8-hour TWA PEL and a 1 fiber/cc 30-minute excursion limit, and other requirements that apply whenever worker exposures exceed either or both of the limits, regardless of the amount of asbestos contained in the materials involved.

- If some of the items associated with the installed sheetrock contain some asbestos but none of them contain >1% asbestos, then removal of the sheetrock is considered unclassified asbestos work. This means that only certain ones of the standard's work practice and engineering control obligations, and prohibitions pertain. Some of the general ones do not pertain because they apply to installed building materials containing >1% asbestos (ACM). How many of the eligible general work practice and engineering control obligations, and prohibitions are applicable depends on whether the employee levels of exposure to airborne asbestos exceed either of the asbestos PELs. In further explanation: These OSHA references are specific to this issue.

- If the employees' asbestos exposures exceed neither asbestos PEL, then only two of standard's general work practice control procedures and three of the standard's general prohibitions pertain to the sheetrock removal operation; none of the standard's engineering control methods pertain to the sheetrock removal operation. Those general work practice procedures and general prohibitions the employer must observe under such a condition are those presented at:

- 29 CFR 1926.1101(g)(1)(ii), which requires: **wet methods, or wetting agents, to control employee exposures during asbestos handling, ... removal, cutting, ... and cleanup, except where employers demonstrate that the use of wet methods is infeasible due to for example, the creation of electrical hazards ... [and] equipment malfunction...;** 29 CFR 1926.1101(g)(1)(iii), which requires: **prompt clean-up and disposal of wastes and debris contaminated with asbestos in leak-tight containers...;** 29 CFR 1926.1101(g)(3)(i), which prohibits: **high-speed abrasive disc saws that are not equipped with point of cut ventilator or enclosures with HEPA filtered exhaust air;** 29 CFR 1926.1101(g)(3)(ii), which prohibits: **compressed air used to remove asbestos, or materials containing asbestos, unless the compressed air is used in conjunction with an enclosed ventilation system designed to capture the dust cloud created by the compressed air;** and 29

CFR 1926.1101(g)(3)(iv), which prohibits: **employee rotation as a means of reducing employee exposure to asbestos.**

**H. Clean-Up**

- All work activity within occupied portions of the facility shall be immediately cleaned and restored to its original finished condition upon completion of the activity. If the activity continues into the next workday, the area shall be left safe, clean, and presentable.
- Public restrooms are not to be used for the cleaning of tools or equipment, i.e., paintbrushes, rollers, finishing tools, etc. Janitor's slop sinks are available for this purpose. If janitor's closets are used, they must be cleaned.
- Trash, combustible waste, and excess construction materials must be removed daily to prevent accumulation. Contractors must arrange for the removal of their debris and waste.
- All work for an area must be confined within that space. Public corridors, stairwells, equipment rooms, and vacant floors are not to be used for the storage of materials or as a workshop. Tracking of construction dirt into the public corridors or stairwells must be prevented. The contractor will provide dampened walk-off mats at all entrances and exits from the construction area.
- If smoke detectors are covered during dust-producing activities, they must be uncovered daily.

**I. Compressed Gas Cylinders**

- Compressed gas cylinders are very dangerous if not treated properly.
- Employees who work with compressed gas cylinders must have specific training.
- Make sure that they are secured properly when in use or in storage.
- Always keep the caps on the cylinders when they are not in use.
- See also Hot Work section.

**J. Confined Space**

- Confined Space Entries. All Confined Spaces are clearly marked on campus. NO ENTRY is allowed in the areas without prior approval by the Project Engineer. NO ONE will be allowed to enter these areas without the proper qualifications, equipment and training as required by the OSHA Standards (29 CFR 1910.147)
- Identify storm sewers, underground electrical vaults, and all other areas that require confined space permits. (e.g., a map showing the locations of all the confined spaces located in the Facilities Service Department).
- All hospital personnel that would require entry into these spaces must abide by the Confined Space Program Procedure.
- It is the sole responsibility of any outside contractor doing work on a VA Medical Center campus to coordinate entry into any of these spaces or any other marked permit required confined spaces with the medical center.
- Anyone entering a permit-required confined space must follow Occupational Safety and Health Administration (OSHA) Regulations, 29 CFR 1910.120.
- **Contractor to submit as a formal submittal the Confined Space Entry program (and CSE Permit if needed).**

**K. Contractor Room/Space Guidelines:**

- Materials will be kept on the job site, in the contractor's room or in storage space provided by the Contractor via trailer located in the VA corporation yard on the North East section of the VA grounds.
- Any shared space within storage room(s) must be accessible to Facilities Service. Do not block access to electric panels or fire protection equipment.
- Hallways are not to be used for storage.
- Contractors will manage the area and assure the site is kept clean and safe. (OSHA standards apply.)
- Any disputes or concerns will be directed to the Facilities Service Manager.

**L. Damage by Contractors**

- Any damage caused by the contractor's employees is to be reported to the COTR or Facilities Service Project Section immediately.

**M. Deliveries**

- All material deliveries at the loading dock must be coordinated with the Receiving Department in advance.

**N. Dress Code**

- All personnel must be appropriately dressed for their work. T-shirts or garments with obscene or suggestive messages are not permitted. Personnel found improperly dressed will be asked to leave the facility. No construction staff is allowed to remove shirts or other clothing. No articles may include offensive statements/graphics.

**O. Dust Barriers and Ventilation Requirements**

- Reference section 01 01 10 IC.
- Dust barriers are needed to protect occupied areas on any portion of the job that has potential to create dust.

**P. Elevator Usage**

- Contractors shall not hold or block from use any public elevators in any building unless authorized by the COTR.
- Contractors shall use "B" bank freight elevators only for the delivery and transportation of materials and demolition materials. Contractors shall not hold or block public elevators from use in any building. .

**Q. EMERGENCIES**

**Fire Plan - There is no difference between a fire drill and an actual fire.**

**General Contractor will ensure that each employee on the worksite knows where the pull stations are in the areas you are working.**

**If you are in the area of the fire:**

**R Rescue anyone from the area if necessary**

**A Pull the nearest Pull Station**

**C. Contain the fire by closing all doors in the area**

**E Extinguish if possible or Evacuate the area immediately**

**If you are NOT in the area of the fire:**

***Construction Workers* are to cease activities, stay in place, and wait for further instructions or cancellation of the fire drill.**

**DO NOT move through the hospital. DO NOT use the elevators or stairwells.**

- Medical Emergencies - Any contractor who witnesses a medical emergency is to pick up a nearest phone and dial "911" or the operator and describe the condition of the emergency.

- Accidents/Injuries - The contractor must post emergency phone numbers and treatment facilities for any injured employee.

- Worksite injuries must be reported to the VA immediately using the VA accident reporting form (Number 2162). The COTR/Safety/or Security and Police Service will initiate the 2162.

- Patients and visitors may be anxious or irritated because of their situation. If you are faced with any patient or visitor that gets aggressive with you, simply call Ext. 42222 and say "Code Green" and describe the situation. Security will respond immediately.

**R. Equipment Safety**

- Ladders are not to be left unattended in public areas during breaks and lunch hours. Ladders shall be laid down and placed out of traffic areas during these periods.
- No tools, carts, ladders or other equipment are to be left unattended outside a secure area.
- Yellow safety barricades must be used when working in public areas.
- Use of hospital equipment is permitted only if the contractor receives permission from Facilities Service and is properly trained on the USC of the equipment.

**S. Equipment and Supplies**

- Caution must be used with all flammable materials, i.e., adhesives, thinners, varnishes, etc.
- All paints shall be low odor latex paint. The contractor will use odor reducing agents in all paints and solvents. Ventilation will be required if toxic or foul-smelling materials have to be applied.
- Only a one-day supply of paints, oils, and gas cylinders is permitted within the facility, unless it's properly stored in a flammable liquid storage cabinet.

**T. Fire Alarm System**

- Care must be exercised to prevent the accidental tripping of smoke detectors or fire alarms.
- Notify Facilities Service of your activities and location.
- Cover and protect the smoke alarms with paper bags when raising dust or creating smoke in short duration(less than 3 days) ancillary work areas. All other construction areas to follow section 01 01 10 – 1HR. (You must inform Facilities Service Fire Department when bagging smoke alarms.)
- Remove the paper bag upon completion of your work and at the end of each workday.
- If you accidentally trip an alarm, notify Facilities Service (Fire Department) immediately.

**U. Hazardous Materials and Waste**

- A listing of all hazardous materials that will be used on the job and their material safety data sheets (MSDS) will be provided to the VA before the chemicals are used.
- Any excess or used chemicals will be removed from the hospital promptly and properly disposed of by the contractor in accordance with federal, state and local regulations.
- Any hazardous waste generated at the facility must be properly contained and labeled and stored in accordance with local, state, federal and hospital regulations.
- Do not store flammable materials in the facility unless stored in an approved non-combustible storage cabinet or prior approval by the Project Engineer and Safety Office.

**V. Heavy Lifting**

- Hoisting heavy materials/items require prior review by the Project Engineer.

**W. Housekeeping**

- Housekeeping in public areas of the hospital will be maintained at the highest level, even while work is on going.
- In secured areas, housekeeping will be performed as needed, but at a minimum at the end of each job task, and at the end of the workday.
- Debris and waste will not be allowed to accumulate on the work site and disposal must be arranged to keep the amounts low.

**X. Hot Work Permits**

- Hot work permits are required before cutting, soldering, welding operations begin. Before any cutting, soldering or welding is conducted, the contractor or sub-contractor shall obtain permission through a hot work permit. The contractor shall be responsible for obtaining the hot work permits from the Project Engineer.
- Gas and oxygen canisters shall be properly chained and protected and two 10-pound fire extinguishers shall be present.
- A fire watch shall be maintained on the worksite during the hot work operations, and for 30 minutes after the hot work is completed.

- **All burn permits will be completed, signed and scanned within 48 hrs and posted to Buzzsaw.**

**Y. Identification Badges**

- ID Badges are required for all contractor employees working at the V.A.
- Before beginning work on any project, all outside contractors shall check obtain a VA contractor badge from the Police / Security Desk and obtain a contractors I.D. badge. The Contractor will complete the badge application and email it to the COTR, who will forward to the Police. The contractor will stop at the Police Desk 1-2 days later to complete the badge process. VA contractor badges are required for all contractors and consultants who will be onsite for more than (3) total days of the project. Temporary badges will be provided to the GC for contractors onsite for less than (3) days. The outside contractor will supply the following information: location of work site, authorization, duration, and any pertinent information that is required.

**Z. Infection Control**

- Reference section 01 01 10 IC.
- Sensitive/High Risk areas of the hospital require extra precautions to assure patient safety. These areas include but are not limited to the operating rooms, intensive care units, chemotherapy and transplant units. Contact infection control for other areas that may require special precautions.
- When working in patient care areas, please be sure to read and follow the directions listed on any Infection Control Precaution sheets posted outside of a patient's room. Generally this means permission must be obtained from Nursing staff before entry.
- Temporary walls or dust barriers are required to enclose areas under construction.
- Under some circumstances it may be necessary to block return and supply ducts, and install special HEPA exhaust ventilation from the worksite. There should be no re-circulation of air from construction area to rest of hospital.
- Dampened walk-off mats must be located outside of construction area.
- Dust mops/wet mops must be available to remove any dust tracked outside barriers.
- *Standard Precautions* assumes that any person may carry a contagious disease. In order to protect you from these diseases always assume blood, non-intact skin, mucous membranes and all other body fluids and excretions are infectious. Do not touch any such materials but contact a VA employee immediately. Needle container boxes are provided for the disposal of syringes and other sharps used in the medical center. These must be properly disposed of and should be moved only by VA personnel. The VA Medical Center provides written guidelines, education, and personal protective equipment (PPE) for anyone working at VA Medical Center campus to prevent their exposure to bloodborne pathogens.

**AA. Interim Life Safety**

- The hospital will document whether and to what extent Interim Life Safety Measures will be implemented for each project.
- VA Safety will ensure what interim life safety measures (ILSM) are required by the General Contractor to temporarily compensate for the hazards posted by existing Life Safety Code (LSC) deficiencies or construction activities in areas of the Medical Center.
- Implementation of ILSM will be required in or adjacent to all construction areas and throughout buildings with existing LSC deficiencies, ILSM applies to both construction workers and affected hospital employees, and will be implemented upon construction development and continuously enforced through construction completion.
- Almost always, Interim Life Safety Measures will require walkthrough inspections by the job foreman, the project manager, and safety staff at varying intervals.
- Training of workers and any affected staff will always be a significant part of the
- Interim Life Safety Measures procedures.

**BB. Life Safety**

- Any life safety code violations incurred during construction or renovation must be resolved and will result in close coordination with Project Engineer and Safety Section to implement the hospital's Interim Life Safety Measures. These measures are required by JCAHO and NFPA.

**CC. Lock Out/Tag Out**

- Lock Out/Tag Out - No contract worker is allowed to change the status/position of ANY switch, valve or any other energy source without prior approval from the Project Engineer. All Lock out/Tag Out activities need approval prior to being implemented. Any activity requiring a Lockout/Tagout process must comply with the hospital policy.
- Per OSHA Regulation 29 CFR 1910.147, all contractors must comply with OSHA's Safety Lockout/Tagout procedures.
- Coordinate all shut downs with Hospital Personnel.
- Only VA staff is authorized to shut down utilities unless permission is specifically granted.
- **Contractor to submit as a formal submittal the Lock Out / Tag Out Program policies and procedures.**

**DD. Material Safety Data Sheets (MSDS)**

- MSDS must be provided for any hazardous materials that you will be shipping or delivering to the VA Medical Center.
- MSDS are available for all materials used in the medical center. Contact the COTR if you need an MSDS for a VA owned material.
- See also Hazardous Materials and Wastes.

**EE. Noise**

- All core drilling, chipping, and hole drilling shall be done at a time and day determined by occupants on that floor and the floors above and below. The COTR shall coordinate and approve it.
- The patients, visitors, and staff deserve consideration and the quiet enjoyment of their premises. Anyone found being loud, rude, or otherwise annoying to the patients, their guests, or staff will be asked to leave the facility. Use of vulgar language will not be tolerated.
- All work activity within occupied portions of the facility shall be accomplished with minimal disruption to the patients, physicians, visitors, and staff.
- The playing of radios, tapes, and CD players is not permitted in any occupied area. "Walk-man" radios/tapes/CD players are not permitted anywhere.
- The playing of radios, tapes, and CD players is permitted in vacant areas but shall not be heard outside the vacant area.
- In inpatient areas, coordinate construction activities and debris removal with the Nurse Manager or Charge Nurse to minimize disruption.

**FF. OSHA Compliance**

- All contractors are subject to Occupational Safety and Health Administration (OSHA) regulations, these standards and are expected to enforce these standards in the performance of their work, OSHA regulations can be found in chapter 29 of the Code of Federal Regulations (CFR). Failure on the part of any contractor employee to comply with these standards and/or conduct their work in a safe fashion will result in an interruption in the work schedule for which the contractor will be solely responsible, Any contractor found deviating from regulatory standards and/or policy and SOPS will immediately be issued a stop work order and will be responsible for contractual conflicts related to the work stoppage.

**GG. Parking**

- Facilities Service Project Section will designate parking. Contractors my not block fire lanes or other roadways. Violators will be ticketed. During large construction projects, a staging site may be available for parking to contractors.
- All Contractors who need parking must contact Facilities Service for a parking permit.
- If special parking is required, permission shall be granted and coordinated through Facilities Management. Contractors should park in the designated Visitor parking areas. Limited loading and unloading will be permitted at the loading dock area, afterwards contractor employees will be required to park in designated areas.

**II. Patient/Visitor Privacy**

- Patient/Visitor Privacy. No construction staff is allowed to review, acknowledge or move any patient information or records.
- No construction staff may acknowledge any patient or visitor unless spoken to - even if the individual is known on a personal basis.
- Radios are NOT allowed on campus.
- Cell phones are to be used only in designated areas.

**JJ. Personal Protective Equipment**

- There are many situations that require specific personal protective equipment for worker safety according to OSHA. It is the responsibility of the individual contractor to know when it is to be used and is responsible to wear them.

**KK. Restroom Usage**

- Contractors are to use public restroom unless otherwise instructed to specific restrooms or portable facilities.

**LL. Requests for Information**

- All contractor requests for assistance and information shall be addressed to the Facilities Service Project Section or Facilities Service Department.

**MM. Safety Regulations**

- Contractors are expected to comply with all Occupational Safety and Health Administration (OSHA) regulations, 29 CFR 1926 and 19 10.
- Work that is performed within a corridor or occupied space must be confined by dust barriers or non-combustible partitions.
- Appropriate job signs and barricades are to be placed in the area of construction to prevent occupants from straying into the job site.
- Stairwell doors shall not be propped open or blocked at any time. Equipment cannot be stored in the stairwells.
- All contractors are encouraged to frequently review these guidelines with their employees and/or subcontractors on site (e.g., during weekly Tool Box Safety Meetings).
- All contractors and their subcontractors are responsible for complying with these guidelines and all other conditions, OSHA requirements, and safety regulations.

**NN. Scaffolding**

- Prior to setup of all scaffolding, the contractor is to provide a submittal of the scaffolding design through the submittal review process. The scaffolding design is to be stamped by a professional engineer.
- Contractor to provide copies of daily scaffolding inspections with daily logs.

**OO. Smoking**

- The Smoking policy of the hospital is no smoking in any building nor within 50 feet of any the building entrance and only in areas designated for smoking. All construction employees must comply with this policy. A copy of the hospital smoking policy will be supplied at the pre-construction conference.
- Violation of the smoking policy will result in the worker being removed from the worksite for the duration of the project.
- The designated smoking areas are: Smoking Shelter located outside the East entrance
- Job site supervisors will enforce this smoking policy.

**PP. Stop Work**

- The hospital safety officer and COTR have the Director's permission and authority to stop work whenever conditions pose an imminent threat to life and health or threaten damage to equipment or buildings.

**QQ. Subcontractors**

- The general contractor has the responsibility to assure that all the subcontractors and their workers are properly trained and follow these safety guidelines. Assistance from VA staff will be providing on a case by case basis on technical issues.
- The VA reserves the right to approve of any subcontractor being used to complete a project.
- A worker on-site must be designated “in charge” at all times during the project.

**RR. Traffic Control**

- Contractors shall provide trained personnel and/or equipment, signage, barricades etc., to regulate traffic whenever construction operations affect traffic patterns.

**SS. Trenching**

- OSHA regulations must be followed during trenching operations.

**TT. Waste Management**

- Reference section 01 74 19.
- Trash, combustible waste, and excess construction materials must be removed daily to prevent accumulation. Contractors must arrange for the removal of their debris and waste. The building's dumpster shall not be used unless appropriate arrangements are made with Facilities Service.
- The contractor is encouraged to contact utilize our recycling program for the disposal of recyclables.
- The contractor is expected to comply with all environmental regulations.
- Contractor to provide a Fiscal Year breakdown of Waste Management/Recycling Costs on the project.

**UU. Work Site Requirements**

- All contractors are to maintain their work area as clean as possible while working and cleanup thoroughly every day.
- Prior to <u>any</u> utilities or critical systems being interrupted, a two weeks written notification to Facilities Management Project Engineer is mandatory. Only Facilities Management personnel will shut off a utility.
- All contractors are expected to use courtesy. Loud, vulgar, abusive language, sexual harrassment and aggressive behavior will not be tolerated.
- All contractors working above the ceiling are required to replace all disturbed ceiling tile by the end of each day.
- Prior to making any penetrations in walls, floors or ceilings, it is the contractor's responsibility to identify rated systems and be verified through review of as builts, line diagrams, etc.
- All repaired penetrations on rated systems must be completed using a fire rated material matching the rating of the system and must inspected by the Project Engineer before ceiling tiles are replaced or area is concealed.
- Temporary construction partitions of non-combustible materials shall be installed as required to provide a smoke tight separation between the areas undergoing renovation and/or construction and adjoining areas that are occupied by the facility.
- Exits for occupied areas of the building including rooms, suites, corridors and floors shall not be blocked by the construction or by construction materials. Exit may be blocked temporarily if it is unavoidable and adequate alternative measures are provided, such as signage, instructions to occupants and approved in advance by the Project Engineer.
- Existing fire protection systems including fire alarm systems, smoke detection systems, and sprinkler systems shall not be altered except as required for the alteration and/or renovation project. Any alteration to the system shall be coordinated with Project Engineer. When sprinkler or fire and smoke detector systems are out of service for more than eight hours general contractor shall be responsible to institute a Fire Watch till systems are operational.
- At the end of each workday, combustible packaging and crating materials for building products and equipment to be installed shall be removed from the occupied building.
- It is the responsibility of each contractor to know exactly where the fire extinguishers and pull stations are in the areas they are working.
- Fire hazard inspections shall be conducted daily by the contractor once construction starts and until the work is turned back over to the facility.
- All temporary electrical wiring and equipment used for construction shall be installed and used in accordance with pertinent provisions of NFPA 70 and National Electrical Code.
- Contractor shall maintain construction site to permit access by the fire department as necessary. Clear building construction areas of obstructions so that all portions are accessible for fire department apparatus and permit emergency egress of patients and other personnel.

- All necessary precautions shall be taken by the contractor to prevent accidental operation of any existing smoke detectors by minimizing the amount of dust generated in the vicinity of any smoke detectors. Any activity that may generate dust or smoke shall be reviewed with the Project Engineer and the infectious control nurse.

1.17 STANDARD REQUIRED FORMS

A. The following forms are required as noted below:

a. Contractor's Checklist – Completed and signed by General Contractor

b. Contractor's Impact Statement – Completed and signed by every contractor / subcontractor working on the project.

c. Daily Log of Construction – Completed daily by General Contractor.

d. Daily Intermediate Life Safety Measures (ILSM) Inspection Form – Completed daily by General Contractor.

**CONTRACTOR CHECKLIST**

**This agreement is between _____ and_____**
**Project Name (ref. #)_____**
**Project Start Date_____Ending Date_____**
**Work Allowed Between Hours_____AM/PM and_____AM/PM**

**Before performing any work on facility premises, outside contractors must read this checklist and comply with all local, state, federal and facility safety policies.**

**1.0** **Life Safety** Will the contractor compromise any part during the Life Safety System of this facility (ceiling tiles, penetrations in smoke or fire walls, blocking exits, shutting down fire/smoke detection or fire suppression, etc.) **Y N**
Describe._____
_____
_____

**1.1** Is Interim Life Safe necessary? **Y N**, if yes, attach and follow interim plan.

**2.0** **Services** Will there be any compromises to patient services during the work performed? **Y N**

**2.1** What adjustments need to be implemented to minimize impact to residents, visitors and staff? **Y N** _____
_____
_____

**3.0** **Chemical** Will hazardous chemicals (liquids or gases) be used on-site? **Y N**
If yes, what risks do they create for facility staff? Is there any chance of exposure?_____
_____
_____

**3.1** Are there any facility chemicals being used, stored or handled where the contractor will be working? **Y N**

If yes, has the contractor been informed by issuing MSDS's? **Y N**

**4.0** **"Hot Work":** Will the contractor use equipment which will generate open flames, sparks or other ignition sources **Y N**

**4.1** Will flammable chemicals be in the area? **Y N**

**4.2** Will a **Fire Watch** be necessary to be posted during all Hot Work activities? **Y N**

**5.0** **Confined Spaces:** Does the work involve entry into a confined space? **Y N**
**If yes, retain a copy of contractor's Confined Space Entry program (and CSE Permit if needed).**

**6.0** **Lockout/Tagout** : Does the work involve maintenance on energized equipment or systems? **Y N (If yes, retain a copy of the contractor's LOCKOUT/TAGOUT program)**

**6.1** Is there any impact to residents, visitors, or staff during this procedure? **Y N**
If so, describe the impact, ways to minimize the impact and who has been notified._____
_____
_____

**7.0 Unsafe Conditions/ Impact to Residents, Visitors and Staff** Are there any unusual or unsafe conditions which need to be addressed and/or communicated to facility staff, visitors or residents? ? **Y N**
Describe._____
_____
_____

**8.0 Description of Work Area** The departments/areas you will be working are
List: _____
_____
_____

**8.1 The potential hazards** to you/your workers in the areas you are working in
List_____
_____
_____

**8.2 The specific problems that can be caused** by the wrong actions in the areas you are working
List_____
_____
_____

**9.0 Contractor's Employees**
**Safety Officer Contact**_____
**Facility Project Manager**_____
**First Aid Plan**_____
_____
**Fire Plan**_____
_____
**Disaster Plan**_____
**Restricted Areas**_____

**10.0 Restricted Areas**
The following are the areas of the hospital where construction workers are allowed to go in the hospital.
List_____
_____
_____

_____ _____
(Contractor Representative) (Facility Project Manager)
Date: _____ Date: _____

**Contractor's Impact**

| System | Possible Interruption | Possible Effect to Patients |
|---|---|---|
| Electrical | - Changing position of switches and breakers<br>- Cutting or splicing into wires<br>- Disconnecting wires or terminals<br>- Disturbing Junction Boxes/Electrical Panels<br>- Core Drilling<br>- Demolition of walls<br>- Excavation | Electrical Systems provides LIFE SUPPORT (Directly and Indirectly)<br>- Can cause DEATH to critical patients |
| Water Lines | - Turning valves<br>- Cutting into lines<br>- Demolition & Excavation | Dialysis, OR, HVAC, ICU, X Ray, etc<br>Can cause DEATH to critical patients<br>Infection Control issues<br>Major Cleanup issues |
| Medical Gases:<br>Oxygen<br>Air<br>Vacuum<br>Nitrous Oxide<br>Nitrogen | - Cutting or disturbing into lines (labeled, unlabeled)<br>- Changing valve positions<br>- Deactivating alarms<br>- Demolition & Excavation | Oxygen, vacuum, air, etc.<br>ICU, OR, Med/Surg.<br>Can cause DEATH to critical patients |
| HVAC | - Shutting down<br>- Modifying<br>- Changing controls<br>- Cutting into the roof<br>- Producing foul odors near intakes<br>- Cutting into chilled water lines<br>- Obstruct fresh air intake | Temperature is critical in OR, ICU, etc.<br>Infection Control issues<br>Major Air Quality Issues |
| Fire Alarm and Sprinklers | - ANY modifications<br>- covering or removing smoke heads<br>- Demolition & Excavation<br>- Damage or set off sprinkler heads<br>- Duct work modifications | - Compromising Fire Safety<br>- False Alarms<br>- Floods<br>- Major disruptions and distractions<br><br>ALL THE ABOVE CAN RESULT IN DEATH |
| Code Alarms<br>Nurse Call<br>Wander Guards | - Demolition & Excavation<br>- Unplugging<br>- Changing position of switches/breakers | Lack of communicating system can result in patient death or injury |

**IF THERE IS ANY QUESTION REGARDING ANY OF THE INFORMATION ON THIS DOCUMENT, IMMEDIATELY CONTACT FACILITY MANAGEMENT OR SAFETY OFFICE TO RESOLVE ISSUES PRIOR TO WORK COMMENCEMENT.**

Contract Company:_____

Receipt Acknowledged:_____

Signature:_____

Date:_____

# DAILY LOG OF CONSTRUCTION

M T W Th F Pkg. No.:

PROJECT:

| BUILDING | CONTRACT NO. V69DC- | DATE |
|---|---|---|
| CONTRACTOR | CONTRACTOR REPRESENTATIVE ON JOB | |

| WEATHER *(Rain, Snow, Cloudy, Windy, etc., OR NA if all indoors)* | TEMP. High | TEMP. Low | SITE *CONDITIONS (CLEAN, DEBRIS, DUST, ETC.)* |
|---|---|---|---|

| NO. CONTRACTOR'S MEN BY JOB CATEGORIES | NO. SUBCONTRACTOR'S MEN BY JOB CATEGORIES |
|---|---|

| EQUIPMENT ON JOB Brief description of size | No. Units | Working Yes | Working No | MATERIALS DELIVERED |
|---|---|---|---|---|
| | | | | |
| | | | | |
| | | | | |
| | | | | OFFICIAL VISITORS TO JOB SITE |
| | | | | |
| | | | | |

## STATUS OF WORK

ITEM NO. Brief description of work in progress, questionable performance, unforeseen developments on job etc. Include tests made and samples taken.

STATUS OF INFECTIOUS CONTROL MEASURES (NEGATIVE AIR FLOW, CLEAN WALK OFF MAT, ANTE-ROOM SECURE,…)

NEGATIVE AIR FLOW PRESSURE READING: _____

SAFETY COMMENTS

DIFFICULTIES WITH CONTRACTOR OR REPRESENTATIVE

UNFORESEEN DEVELOPMENTS ON JOB CONTINUED *(Describe conditions, action taken; person contacted, recommended actions)*

| SIGNATURE | TITLE |
|---|---|

PROJECT SUPERINTENDENT

FORM QCA-01A

**Daily Intermediate Life Safety Measures (ILSM) Inspection Form**

**INSTRUCTIONS:** This form is to be utilized when significant hazards posed by existing NFPA 101 deficiencies or construction activities are in progress. ILSM must be implemented upon project start and continuously enforced through project completion to provide a level of life safety comparable to that described in Chapter 1-7, 31 and applicable occupancy chapters of the Life Safety Code. WHERE APPLICABLE NOTE EXCEPTIONS ONLY OF AREA IDENTIFIED AS BEING DEFICIENT DURING INSPECTION AND EXPLAIN IN SUFFICIENT DETAIL IN THE COMMENTS SECTION OF THIS FORM. TURN COMPLETED FORMS INTO THE LHS SAFETY OFFICER.

| PROJECT: | DATE | MON | TUE | WED | THR | FRI | SAT | SUN |
|---|---|---|---|---|---|---|---|---|
| 1. Are exits readily accessible and provide unobstructed egress? | | | | | | | | |
| 2. If required, due to inaccessibility of existing, have alternate exits been established? | | | | | | | | |
| 3. If alternate exists have been established, are personnel in the area informed and aware of their relocation and existence? | | | | | | | | |
| 4. Are the existing and relocation exits clearly identified and able to be seen in the event of an emergency or fire? | | | | | | | | |
| 5. Are fire evacuation routes posted and do they reflect up-to-date changes and alternate escape routes due to construction deficiencies? | | | | | | | | |
| 6. Are written procedures and guidelines posted in the immediate and adjacent areas for what to do and who to call in the event of fire or emergency? | | | | | | | | |
| 7. Are personnel in the immediate and adjacent areas aware and informed as to the procedures and guidelines to follow in the event of fire or emergency? | | | | | | | | |
| 8. Do fire alarms, detection, and suppression equipment and systems appear to be operational? | | | | | | | | |
| 9. If the fire alarm or suppression systems are impaired or temporarily made nonfunctional has a fire watch, as required or necessary, of the area been established? | | | | | | | | |
| 10. If the existing fire alarm or suppression systems/equipment are impaired, have measures been taken to provide equivalent equipment/systems for adequate protection? Note date of installation for equivalent measures to the right. | | | | | | | | |
| 11. If the fire alarm or suppression systems are impaired, are the temporary equipment/systems being inspected and tested at least monthly? | | | | | | | | |
| 12. If temporary fire alarm or suppression systems are installed, are personnel in the area aware and informed on how to operate or utilize in the event of fire or emergency? | | | | | | | | |
| 13. Has the LHS “No Smoking” policy been posted, implemented and enforced in the construction area? | | | | | | | | |
| 14. Are construction/remodel area storage, waste and debris being maintained to minimize potential for fire or safety hazards during daily operations? | | | | | | | | |

**Daily Intermediate Life Safety Measures (ILSM) Inspection Form (Continued)**

| PROJECT: | DATE | MON | TUE | WED | THR | FRI | SAT | SUN |
|---|---|---|---|---|---|---|---|---|
| 15. Are temporary partitions built to be smoke tight and of noncombustible/fire retardant materials to minimize spread of smoke or fire within the building? | | | | | | | | |
| 16 Do electrical panels, temporary wiring, extension cords, tools and equipment appear to be installed, utilized, and functioning in a safe manner? | | | | | | | | |
| 17. In general, are the exterior construction site, buildings, and ground free of hazard and potential safety violations? | | | | | | | | |
| 18. If there is any gas/arc welding or cutting being performed within the building or on site, have additional fire safety precautions been taken and the necessary equipment provided and utilized? | | | | | | | | |
| 19. If there is any gas/arc welding or cutting being performed within the building or on site, has the Plant Operations department been notified? | | | | | | | | |
| 20. If there are hand and safety rails required, are they in place and maintained in good condition? | | | | | | | | |
| 21. Are extension cords that are being used a 3 wire grounded type? | | | | | | | | |
| 22. If there are temporary electrical outlets provided, do they have ground fault protection at the receptacle or at the panel? | | | | | | | | |
| 23. I f hazardous chemicals are present and/or being used, are they being limited to the amount needed and used daily? | | | | | | | | |
| 24. Are MSDS sheets readily available for any hazardous chemicals that are present or being used? | | | | | | | | |
| 25. Do ladders and scaffolds appear to be in satisfactory condition and being utilized in a safe manner? | | | | | | | | |
| 26. Is personnel protective equipment, such as safety glasses, hard hats and etc. needed or required and being used? | | | | | | | | |
| 27. If infection control is required, are the appropriate policies and procedures known and being followed? | | | | | | | | |
| 28. If electrical equipment needs to be de-energized, are applicable “Lockout/Tagout” procedures being followed? | | | | | | | | |
| | | | | | | | | |
| PLACE INITIALS OF PERSON PERFORMING DAILY INSPECTION TO THE RIGHT. | | | | | | | | |

INSPECTION COMMENTS/FINDINGS: _____

DATE PROJECT STARTED_____ DATE PROJECT COMPLETED_____

PROJECT CE #:_____ GENERAL CONTRACTOR_____

AREAS(S) OF PROJECT/JOB INSPECTED_____

# SECTION 01 01 10 – 1HR
# 1 HOUR CONSTRUCTION SMOKE BARRIER

## 1. DESCRIPTION

This section specifies the control of the construction barrier surrounding the construction area the Contractor must consider for construction & renovation projects in the medical facility. It includes Precautionary management of, Inspections and Non-invasive activities, small scale, short duration activities, which create minimal fire hazard risk. Major demolition and construction projects that are high risk. The Contractor is obligated to consider the specified containment measures with the costs included within the various contract items of work. A ***Construction Barrier and Fire Risk Assessment Matrix of Precautions*** for construction and renovation for activities follows.

| | |
|---|---|
| **TYPE A** | **Inspection and Non-Invasive Activities.**<br>Includes, but is not limited to:<br>▪ removal of ceiling tiles for visual inspection limited to 1 tile per 50 square feet<br>▪ painting (but not sanding)<br>▪ wall covering, electrical trim work, minor plumbing, and activities which do not generate dust or require cutting of walls or access to ceilings other than for visual inspection.<br>▪ Removal of floor tile less than 10 square feet |
| **TYPE B** | **Small scale, short duration activities that can be completed within 3 calendar days. Work that requires a moderate level of demolition and does not pose a potential fire hazard. Cutting/burning operations that require a burn permit are prohibited. No electrical corded power tools permitted.**<br>Includes, but is not limited to:<br>▪ installation of telephone and computer cabling<br>▪ access to chase spaces<br>▪ asbestos abatement of flooring tile/mastic removal, glove bag operations, Transite panel removals<br>▪ duct work , electrical, plumbing, piping work above ceiling within a 50 square foot area.<br>▪ cutting of walls or ceiling where fire hazard is minimal.<br>▪ sanding of walls for painting or wall covering<br>▪ removal of floor coverings, ceiling tiles and casework<br>▪ new wall construction |

| | |
|---|---|
| | |
| **TYPE C** | **Work that requires a moderate to high level of demolition, cutting/burning operations or requires demolition or removal of any fixed building components or assemblies. Power corded tools and work that provides a potential fire hazard.**<br>Includes, but is not limited to:<br>▪ Removal of floor coverings with heat gun or open flame greater than 10 square feet.<br>▪ new wall construction<br>▪ major duct work, plumbing, piping, or electrical work<br>▪ soldering or brazing operations<br>▪ any activity that requires a burn permit. |
| **TYPE D** | **Major demolition and construction projects**<br>Includes, but is not limited to:<br>▪ activities which require consecutive work shifts<br>▪ requires heavy demolition or removal of a complete cabling system<br>▪ new construction. |

**2. TEMPORARY CONSTRUCTION PARTITIONS (NOTE: COORDINATE INFECTION CONTROL BARRIERS WITH CONSTRUCTION PARTITIONS):**

A. Type A: Provide authority to proceed with work in area, includes a ceiling permit as required, when working above ceilings.

B. Type B: Install and maintain Infection Control temporary separations between construction areas and adjoining areas. Coordinate with Section 01 01 10-IC. Provide plastic from floor to ceiling above and seal joints and penetrations. The All plastic will be labeled with the VA ILSM TEMPORARY BARRIER orange tag once installed indicating the start of the 3 days. At openings, install z-wall overlapping plastic flap barriers or equivalent.

C. Type C: Install and maintain Infection Control temporary construction partitions to provide smoke-tight separations

between construction areas and adjoining areas. Coordinate with Section 01 01 10-IC. Provide heat detectors, tied into the Building Siemens Pyrotronics System, in ante room and 1 per 900-1000 square foot of clear construction area. Heat detectors to be FTP-11 Addressable, Tri-Color LED, 135°F, Combination Fixed or Rate of Rise. Contractor to provide certification documentation once the heat detectors are installed and/or moved and tested prior to any construction work taking place in the space. Outside the ante room, existing units can be used if they are moved to the floor deck above. Separate all occupied areas from demolition, renovation, or construction activities by temporary smoke-tight construction partitions of gypsum board. For partitions in duration of 3 days to 14 days, the seams of the gypsum board construction shall be taped with E-Z Fire Tape; both sides and ceilings and from walls to floor. For partitions in duration over 14 days, the seams of the gypsum board construction shall be mudded and taped with ASTM C840 approved compound or E-Z Fire Tape; both sides and ceilings and duct tape from walls to floor. Other than ante room, new partitions shall be full height, extending through suspended ceilings to the floor slab or roof deck above and shall be one-hour fire rated 5/8" type X gypsum board both sides of metal stud wall, mudded and taped in accordance with ASTM C840. If sprinklers are installed and are operational on both sides of the temporary partition, then the partition (2 layers 5/8" type X) indicated above may be permitted to terminate at the ceiling in accordance with NFPA 241. Provide plastic Z Type door at the interior construction ante room doorway. At outer ante room construction door openings, install Class C, ¾ hour fire/smoke rated doors with self-closing devices.

D. Type D: Install one-hour fire-rated temporary construction partitions to maintain integrity of existing exit stair enclosures, exit passageways, fire-rated enclosures of hazardous

areas, horizontal exits, smoke barriers, vertical shafts and openings and other enclosures as required by the current Life Safety Code NFPA 101. This may include new horizontal egress tunnels, exit stairs, etc. Provide heat detectors, tied into the Building Siemens Pyrotronics System, in ante room and 1 per 900-1000 square foot of clear construction area. Heat detectors to be FTP-11 Addressable, Tri-Color LED, 135°F, Combination Fixed or Rate of Rise. Contractor to provide certification documentation once the heat detectors are installed and/or moved and tested prior to any construction work taking place in the space. Outside the ante room, existing units can be used if they are moved to the floor deck above.

**3. WALLS TO BE USED FOR CONSTRUCTION PARTITION AND PHASING.**

A. The construction site must be completely surrounded by the construction partitions described above. Infection control procedures need to be initiated prior to any other construction activities. Where construction walls are to function as infection control barriers, add infection control measures (e.g., plastic sheeting between metal studs and gypsum board).

B. Existing walls - All existing walls surrounding the construction are to be inspected, repaired, patched, and fire stopped as required to bring them up to current smoke barrier construction requirements, as follows:

i. for annular space gaps, holes, and cracks less than 1/4" width: intumescent fire caulk

a) Number of individual conduits, pipes and cables <1” = 10

b) Number of individual conduits, pipes and cables 1” to 3” dia = 4

c) Number of individual conduits, pipes and cables 4” to 6” dia = 4

ii. for larger annular spaces and holes: pack with mineral wool and either patch with drywall and trim with fire caulk or apply a coating of 3M FireDam 200 Spray, or other approved firestopping methods based on the manufacture of the firestopping material or VA-approved equal coating.
   a) Around conduits / pipes up to 2”Ø = 7
   b) Holes, larger, total square feet, not requiring new studs, patch up to 10 s.f.
   c) HVAC ducts – pull back insulation, trim with metal angles and fire caulk, lineal feet perimeter around ductwork = 20 l.f.

iii. For walls where the gypsum board stops below the existing floor deck above; extend gypsum board construction to deck above to meet 1 hour requirements.
   a) Square feet of wall to extend to deck = 24 s.f.

iv. These walls can then be used as part of the construction partition. All work associated with this construction shall be accomplished immediately after the infection control work has been provided.

v. Construction cores made through the construction barriers and any rated assembly need to have an ILSM firestop such as mineral wool filling including a “ILSM FIRESTOP” label as indicated below, in place for all penetrations made smoke resistant at the end of the construction day and penetrations are to be fire caulked/sealed within 30 days of being made. All penetrations will be labeled with the VA orange tag once made.

C. The Ante Room when required by infection control for the construction site will consist of a contractor provided yellow 90-minute self closing and latching construction door and frame. Metal studs and 5/8” drywall 1-hour fire rated wall and ceiling enclosure abutting the smoke barrier construction wall.

D. VA ILSM Temporary Barrier Tag

**ILSM TEMPORARY BARRIER TAG**

**PROJECT:** _____
**PRIME CONTRACTOR:** _____
**SUB CONTRACTOR:** _____
**EMERGENCY CONTACT NO.** _____
**BARRIER INSTALLATION DATE:** _____
**BARRIER EXPIRATION DATE:** _____
(MAX 3 DAYS)

# SECTION 01 32 16.15
# PROJECT SCHEDULES
***(SMALL PROJECTS – DESIGN/BID/BUILD)***

## PART 1- GENERAL

### 1.1 DESCRIPTION:

A. The Contractor shall develop a Critical Path Method (CPM) plan and schedule demonstrating fulfillment of the contract requirements (Project Schedule), and shall keep the Project Schedule up-to-date in accordance with the requirements of this section and shall utilize the plan for scheduling, coordinating and monitoring work under this contract (including all activities of subcontractors, equipment vendors and suppliers). Conventional Critical Path Method (CPM) technique shall be utilized to satisfy both time and cost applications.

### 1.2 CONTRACTOR'S REPRESENTATIVE:

A. The Contractor shall designate an authorized representative responsible for the Project Schedule including preparation, review and progress reporting with and to the Resident Engineer (RE).

B. The Contractor's representative shall have direct project control and complete authority to act on behalf of the Contractor in fulfilling the requirements of this specification section.

C. The Contractor’s representative shall have the option of developing the project schedule within their organization or to engage the services of an outside consultant. If an outside scheduling consultant is utilized, Section 1.3 of this specification will apply.

### 1.3 CONTRACTOR'S CONSULTANT:

A. The Contractor shall submit a qualification proposal to the RESIDENT ENGINEER, within 10 days of bid acceptance. The qualification proposal shall include:

1. The name and address of the proposed consultant.
2. Information to show that the proposed consultant has the qualifications to meet the requirements specified in the preceding paragraph.
3. A representative sample of prior construction projects, which the proposed consultant has performed complete project scheduling services. These representative samples shall be of similar size and scope.

B. The Contracting Officer has the right to approve or disapprove the proposed consultant, and will notify the Contractor of the VA decision

within seven calendar days from receipt of the qualification proposal. In case of disapproval, the Contractor shall resubmit another consultant within 10 calendar days for renewed consideration. The Contractor shall have their scheduling consultant approved prior to submitting any schedule for approval.

**1.4 COMPUTER PRODUCED SCHEDULES**

A. The contractor shall provide monthly, to the Department of Veterans Affairs (VA), all computer-produced time/cost schedules and reports generated from monthly project updates. This monthly computer service will include: three copies of up to five different reports (inclusive of all pages) available within the user defined reports of the scheduling software approved by the Contracting Officer; a hard copy listing of all project schedule changes, and associated data, made at the update and an electronic file of this data; and the resulting monthly updated schedule in PDM format. These must be submitted with and substantively support the contractor’s monthly payment request and the signed look ahead report. The RESIDENT ENGINEER shall identify the five different report formats that the contractor shall provide.

B. The contractor shall be responsible for the correctness and timeliness of the computer-produced reports. The Contractor shall also responsible for the accurate and timely submittal of the updated project schedule and all CPM data necessary to produce the computer reports and payment request that is specified.

C. The VA will report errors in computer-produced reports to the Contractor’s representative within ten calendar days from receipt of reports. The Contractor shall reprocess the computer-produced reports and associated diskette(s), when requested by the Contracting Officer’s representative, to correct errors which affect the payment and schedule for the project.

**1.5 THE COMPLETE PROJECT SCHEDULE SUBMITTAL**

A. Within 45 calendar days after receipt of Notice to Proceed, the Contractor shall submit for the Contracting Officer's review; three blue line copies of the interim schedule on sheets of paper 765 x 1070 mm (30 x 42 inches) and an electronic file in the previously approved CPM schedule program. The submittal shall also include three copies of a computer-produced activity/event ID schedule showing project duration; phase completion dates; and other data, including event cost. Each activity/event on the computer-produced schedule shall contain as a minimum, but not limited to, activity/event ID, activity/event

description, duration, budget amount, early start date, early finish date, late start date, late finish date and total float. Work activity/event relationships shall be restricted to finish-to-start or start-to-start without lead or lag constraints. Activity/event date constraints, not required by the contract, will not be accepted unless submitted to and approved by the Contracting Officer. The contractor shall make a separate written detailed request to the Contracting Officer identifying these date constraints and secure the Contracting Officer’s written approval before incorporating them into the network diagram. The Contracting Officer’s separate approval of the Project Schedule shall not excuse the contractor of this requirement. Logic events (non-work) will be permitted where necessary to reflect proper logic among work events, but must have zero duration. The complete working schedule shall reflect the Contractor's approach to scheduling the complete project. **The final Project Schedule in its original form shall contain no contract changes or delays which may have been incurred during the final network diagram development period and shall reflect the entire contract duration as defined in the bid documents.** These changes/delays shall be entered at the first update after the final Project Schedule has been approved. The Contractor should provide their requests for time and supporting time extension analysis for contract time as a result of contract changes/delays, after this update, and in accordance with Article, ADJUSTMENT OF CONTRACT COMPLETION.

D. Within 30 calendar days after receipt of the complete project interim Project Schedule and the complete final Project Schedule, the Contracting Officer or his representative, will do one or both of the following:
   1. Notify the Contractor concerning his actions, opinions, and objections.
   2. A meeting with the Contractor at or near the job site for joint review, correction or adjustment of the proposed plan will be scheduled if required. Within 14 calendar days after the joint review, the Contractor shall revise and shall submit three blue line copies of the revised Project Schedule, three copies of the revised computer-produced activity/event ID schedule and a revised electronic file as specified by the Contracting Officer. The revised submission will be reviewed by the Contracting Officer and, if found to be as previously agreed upon, will be approved.

E. The approved baseline schedule and the computer-produced schedule(s) generated there from shall constitute the approved baseline schedule until subsequently revised in accordance with the requirements of this section.

F. The Complete Project Schedule shall contain approximately _____work activities/events.

**1.6 WORK ACTIVITY/EVENT COST DATA**

A. The Contractor shall cost load all work activities/events except procurement activities. The cumulative amount of all cost loaded work activities/events (including alternates) shall equal the total contract price. Prorate overhead, profit and general conditions on all work activities/events for the entire project length. The contractor shall generate from this information cash flow curves indicating graphically the total percentage of work activity/event dollar value scheduled to be in place on early finish, late finish. These cash flow curves will be used by the Contracting Officer to assist him in determining approval or disapproval of the cost loading. Negative work activity/event cost data will not be acceptable, except on VA issued contract changes.

B. The Contractor shall cost load work activities/events for guarantee period services, test, balance and adjust various systems in accordance with the provisions in Article, FAR 52.232 – 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.236 – 83 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS).

C. In accordance with FAR 52.236 – 1 (PERFORMANCE OF WORK BY THE CONTRACTOR) and VAAR 852.236 – 72 (PERFORMANCE OF WORK BY THE CONTRACTOR), the Contractor shall submit, simultaneously with the cost per work activity/event of the construction schedule required by this Section, a responsibility code for all activities/events of the project for which the Contractor's forces will perform the work.

D. The Contractor shall cost load work activities/events for all BID ITEMS including ASBESTOS ABATEMENT. The sum of each BID ITEM work shall equal the value of the bid item in the Contractors' bid.

**1.7 PROJECT SCHEDULE REQUIREMENTS**

A. Show on the project schedule the sequence of work activities/events required for complete performance of all items of work. The Contractor Shall:

1. Show activities/events as:

a. Contractor's time required for submittal of shop drawings, templates, fabrication, delivery and similar pre-construction work.
b. Contracting Officer's and Architect-Engineer's review and approval of shop drawings, equipment schedules, samples, template, or similar items.
c. Interruption of VA Facilities utilities, delivery of Government furnished equipment, and rough-in drawings, project phasing and any other specification requirements.
d. Test, balance and adjust various systems and pieces of equipment, maintenance and operation manuals, instructions and preventive maintenance tasks.
e. VA inspection and acceptance activity/event with a minimum duration of five work days at the end of each phase and immediately preceding any VA move activity/event required by the contract phasing for that phase.

2. Show not only the activities/events for actual construction work for each trade category of the project, but also trade relationships to indicate the movement of trades from one area, floor, or building, to another area, floor, or building, for at least five trades who are performing major work under this contract.
3. Break up the work into activities/events of a duration no longer than 20 work days each or one reporting period, except as to non-construction activities/events (i.e., procurement of materials, delivery of equipment, concrete and asphalt curing) and any other activities/events for which the RESIDENT ENGINEER may approve the showing of a longer duration. The duration for VA approval of any required submittal, shop drawing, or other submittals will not be less than 20 work days.
4. Describe work activities/events clearly, so the work is readily identifiable for assessment of completion. Activities/events labeled "start," "continue," or "completion," are not specific and will not be allowed. Lead and lag time activities will not be acceptable.
5. The schedule shall be generally numbered in such a way to reflect either discipline, phase or location of the work.

B. The Contractor shall submit the following supporting data in addition to the project schedule:
1. The appropriate project calendar including working days and holidays.
2. The planned number of shifts per day.

3. The number of hours per shift.

Failure of the Contractor to include this data shall delay the review of the submittal until the Contracting Officer is in receipt of the missing data.

C. To the extent that the Project Schedule or any revised Project Schedule shows anything not jointly agreed upon, it shall not be deemed to have been approved by the RESIDENT ENGINEER. Failure to include any element of work required for the performance of this contract shall not excuse the Contractor from completing all work required within any applicable completion date of each phase regardless of the RESIDENT ENGINEER's approval of the Project Schedule.

D. Compact Disk Requirements and CPM Activity/Event Record Specifications: Submit to the VA an electronic file(s) containing one file of the data required to produce a schedule, reflecting all the activities/events of the complete project schedule being submitted.

**1.8 PAYMENT TO THE CONTRACTOR:**

A. Monthly, the contractor shall submit the AIA application and certificate for payment documents G702 & G703 reflecting updated schedule activities and cost data in accordance with the provisions of the following Article, PAYMENT AND PROGRESS REPORTING, as the basis upon which progress payments will be made pursuant to Article, FAR 52.232 – 5 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS) and VAAR 852.236 – 83 (PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS). The Contractor shall be entitled to a monthly progress payment upon approval of estimates as determined from the currently approved updated project schedule. Monthly payment requests shall include: a listing of all agreed upon project schedule changes and associated data; and an electronic file (s) of the resulting monthly updated schedule.

B. Approval of the Contractor's monthly Application for Payment shall be contingent, among other factors, on the submittal of a satisfactory monthly update of the project schedule.

**1.9 PAYMENT AND PROGRESS REPORTING**

A. Monthly schedule update meetings will be held on dates mutually agreed to by the RESIDENT ENGINEER and the Contractor. Contractor and their CPM consultant (if applicable) shall attend all monthly schedule update meetings. The Contractor shall accurately update the Project Schedule and all other data required and provide this information to the RESIDENT ENGINEER three work days in advance of the schedule update meeting. Job progress will be reviewed to verify:

1. Actual start and/or finish dates for updated/completed activities/events.
2. Remaining duration for each activity/event started, or scheduled to start, but not completed.
3. Logic, time and cost data for change orders, and supplemental agreements that are to be incorporated into the Project Schedule.
4. Changes in activity/event sequence and/or duration which have been made, pursuant to the provisions of following Article, ADJUSTMENT OF CONTRACT COMPLETION.
5. Completion percentage for all completed and partially completed activities/events.
6. Logic and duration revisions required by this section of the specifications.
7. Activity/event duration and percent complete shall be updated independently.

B. After completion of the joint review, the contractor shall generate an updated computer-produced calendar-dated schedule and supply the Contracting Officer’s representative with reports in accordance with the Article, COMPUTER PRODUCED SCHEDULES, specified.

C. After completing the monthly schedule update, the contractor’s representative or scheduling consultant shall rerun all current period contract change(s) against the prior approved monthly project schedule. The analysis shall only include original workday durations and schedule logic agreed upon by the contractor and resident engineer for the contract change(s). When there is a disagreement on logic and/or durations, the Contractor shall use the schedule logic and/or durations provided and approved by the resident engineer. After each rerun update, the resulting electronic project schedule data file shall be appropriately identified and submitted to the VA in accordance to the requirements listed in articles 1.4 and 1.7. This electronic submission is separate from the regular monthly project schedule update requirements and shall be submitted to the resident engineer within fourteen (14) calendar days of completing the regular schedule update. **Before inserting the contract changes durations, care must be taken to ensure that only the original durations will be used for the analysis, not the reported durations after progress. In addition, once the final network diagram is approved, the contractor must recreate all manual progress payment updates on this approved network diagram and associated reruns for contract changes in each of these update periods as outlined**

**above for regular update periods. This will require detailed record keeping for each of the manual progress payment updates.**

D. Following approval of the CPM schedule, the VA, the General Contractor, its approved CPM Consultant, RE office representatives, and all subcontractors needed, as determined by the SRE, shall meet to discuss the monthly updated schedule. The main emphasis shall be to address work activities to avoid slippage of project schedule and to identify any necessary actions required to maintain project schedule during the reporting period. The Government representatives and the Contractor should conclude the meeting with a clear understanding of those work and administrative actions necessary to maintain project schedule status during the reporting period. This schedule coordination meeting will occur after each monthly project schedule update meeting utilizing the resulting schedule reports from that schedule update. If the project is behind schedule, discussions should include ways to prevent further slippage as well as ways to improve the project schedule status, when appropriate.

**1.10 RESPONSIBILITY FOR COMPLETION**

A. If it becomes apparent from the current revised monthly progress schedule that phasing or contract completion dates will not be met, the Contractor shall execute some or all of the following remedial actions:
   1. Increase construction manpower in such quantities and crafts as necessary to eliminate the backlog of work.
   2. Increase the number of working hours per shift, shifts per working day, working days per week, the amount of construction equipment, or any combination of the foregoing to eliminate the backlog of work.
   3. Reschedule the work in conformance with the specification requirements.

B. Prior to proceeding with any of the above actions, the Contractor shall notify and obtain approval from the RESIDENT ENGINEER for the proposed schedule changes. If such actions are approved, the representative schedule revisions shall be incorporated by the Contractor into the Project Schedule before the next update, at no additional cost to the Government.

**1.11 CHANGES TO THE SCHEDULE**

A. Within 30 calendar days after VA acceptance and approval of any updated project schedule, the Contractor shall submit a revised electronic file (s) and a list of any activity/event changes including predecessors and successors for any of the following reasons:

1. Delay in completion of any activity/event or group of activities/events, which may be involved with contract changes, strikes, unusual weather, and other delays will not relieve the Contractor from the requirements specified unless the conditions are shown on the CPM as the direct cause for delaying the project beyond the acceptable limits.
2. Delays in submittals, or deliveries, or work stoppage are encountered which make rescheduling of the work necessary.
3. The schedule does not represent the actual prosecution and progress of the project.
4. When there is, or has been, a substantial revision to the activity/event costs regardless of the cause for these revisions.

B. CPM revisions made under this paragraph which affect the previously approved computer-produced schedules for Government furnished equipment, vacating of areas by the VA Facility, contract phase(s) and sub phase(s), utilities furnished by the Government to the Contractor, or any other previously contracted item, shall be furnished in writing to the Contracting Officer for approval.

C. Contracting Officer's approval for the revised project schedule and all relevant data is contingent upon compliance with all other paragraphs of this section and any other previous agreements by the Contracting Officer or the VA representative.

D. The cost of revisions to the project schedule resulting from contract changes will be included in the proposal for changes in work as specified in FAR 52.243 – 4 (Changes) and VAAR 852.236 – 88 (Changes – Supplemental), and will be based on the complexity of the revision or contract change, man hours expended in analyzing the change, and the total cost of the change.

E. The cost of revisions to the Project Schedule not resulting from contract changes is the responsibility of the Contractor.

**1.12 ADJUSTMENT OF CONTRACT COMPLETION**

A. The contract completion time will be adjusted only for causes specified in this contract. Request for an extension of the contract completion date by the Contractor shall be supported with a justification, CPM data and supporting evidence as the RESIDENT ENGINEER may deem necessary for determination as to whether or not the Contractor is entitled to an extension of time under the provisions of the contract. Submission of proof based on revised activity/event logic, durations (in work days) and costs is obligatory to any approvals. The schedule must clearly

display that the Contractor has used, in full, all the float time available for the work involved in this request. The Contracting Officer's determination as to the total number of days of contract extension will be based upon the current computer-produced calendar-dated schedule for the time period in question and all other relevant information.

B. Actual delays in activities/events which, according to the computer-produced calendar-dated schedule, do not affect the extended and predicted contract completion dates shown by the critical path in the network, will not be the basis for a change to the contract completion date. The Contracting Officer will within a reasonable time after receipt of such justification and supporting evidence, review the facts and advise the Contractor in writing of the Contracting Officer's decision.

C. The Contractor shall submit each request for a change in the contract completion date to the Contracting Officer in accordance with the provisions specified under FAR 52.243 – 4 (Changes) and VAAR 852.236 – 88 (Changes – Supplemental). The Contractor shall include, as a part of each change order proposal, a sketch showing all CPM logic revisions, duration (in work days) changes, and cost changes, for work in question and its relationship to other activities on the approved network diagram.

D. All delays due to non-work activities/events such as RFI’s, WEATHER, STRIKES, and similar non-work activities/events shall be analyzed on a month by month basis.

## 1.13 INSPECTIONS TO BE COMPLETED

| | | | |
|---|---|---|---|
| | **Project Name** | | |
| | **Project No.** | | |
| | **COTR** | | |
| **#** | **Inspections** | Date | Comments |
| | | | |
| 1 | Pre-site inspection of existing conditions | | |
| 2 | ACM containment | | |
| 3 | Demo completion | | |
| 4 | After ACM clearance (prior to tear down) | | |
| 5 | Chaulk line | | |
| 6 | Stud wall | | |
| 7 | MEP outlet box | | |
| 8 | MEP & Backing in-wall | | |
| 9 | MEP insulation | | |
| 10 | Completion of Drywall | | |
| 11 | Above Ceiling | | |
| 12 | Wall Hung Items; cabinets, mirrors, handrails, | | |
| 13 | Finishes and Trim | | |
| 14 | Flooring Seam Layout | | |
| 15 | Hardware | | |
| 16 | Final finishes and flooring | | |
| 17 | Commissioning | | |
| 18 | After punch list completion | | |

- - - E N D - - -

**SECTION 01 33 23**
**SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES**

1-1. Refer to Articles titled SPECIFICATIONS AND DRAWINGS FOR CONSTRUCTION (FAR 52.236-21) and, SPECIAL NOTES (VAAR 852.236-91), in GENERAL CONDITIONS.

1-2. For the purposes of this contract, samples, including laboratory samples to be tested, test reports, certificates, and manufacturers' literature and data shall also be subject to the previously referenced requirements. The following text refers to all items collectively as SUBMITTALS.

1-3. Submit for approval, all of the items specifically mentioned under the separate sections of the specification, with information sufficient to evidence full compliance with contract requirements. Materials, fabricated articles and the like to be installed in permanent work shall equal those of approved submittals. After an item has been approved, no change in brand or make will be permitted unless:

A. Satisfactory written evidence is presented to, and approved by Contracting Officer, that manufacturer cannot make scheduled delivery of approved item or;
B. Item delivered has been rejected and substitution of a suitable item is an urgent necessity or;
C. Other conditions become apparent which indicates approval of such substitute item to be in best interest of the Government.

1-4. Forward submittals in sufficient time to permit proper consideration and approval action by Government. Time submission to assure adequate lead time for procurement of contract - required items. Delays attributable to untimely and rejected submittals (including any laboratory samples to be tested) will not serve as a basis for extending contract time for completion.

1-5. Submittals will be reviewed for compliance with contract requirements by Architect-Engineer, and action thereon will be taken by Resident Engineer on behalf of the Contracting Officer.

1-6. Upon receipt of submittals, Architect-Engineer will assign a file number thereto. Contractor, in any subsequent correspondence, shall refer to this file and identification number to expedite replies relative to previously approved or disapproved submittals.

1-7. The Government reserves the right to require additional submittals, whether or not particularly mentioned in this contract. If additional submittals beyond those required by the contract are furnished pursuant to request therefor by Contracting Officer, adjustment in contract price and time will be made in accordance with Articles titled CHANGES (FAR 52.243-4) and CHANGES - SUPPLEMENT (VAAR 852.236-88) of the GENERAL CONDITIONS.

1-8. Schedules called for in specifications and shown on shop drawings shall be submitted for use and information of Department of Veterans Affairs and Architect-Engineer. However, the Contractor shall assume responsibility for coordinating and verifying schedules. The Contracting Officer and Architect- Engineer assumes no responsibility for checking schedules or layout drawings for exact sizes, exact numbers and detailed positioning of items.

1-9. Submittals must be submitted by Contractor only and shipped prepaid. Contracting Officer assumes no responsibility for checking quantities or exact numbers included in such submittals.

A. Submit samples required by Section 09 06 00, SCHEDULE FOR FINISHES, in quadruplicate. Submit other samples in single units unless otherwise specified. Submit shop drawings, schedules, manufacturers' literature and data, and certificates in quadruplicate, except where a greater number is specified.

B. Submittals will receive consideration only when covered by a transmittal letter signed by Contractor. Letter shall be sent via first class mail OR FAX and shall contain the list of items, name of Medical Center, name of Contractor, contract number, applicable specification paragraph numbers, applicable drawing numbers (and other information required for exact identification of location for each item), manufacturer and brand, ASTM or Federal Specification Number (if any) and such additional information as may be required by specifications for particular item being furnished. In addition, catalogs shall be marked to indicate specific items submitted for approval.

1. A copy of letter must be enclosed with items, and any items received without identification letter will be considered "unclaimed goods" and held for a limited time only.
2. Each sample, certificate, manufacturers' literature and data shall be labeled to indicate the name and location of the Medical Center, name of Contractor, manufacturer, brand, contract number and ASTM or

Federal Specification Number as applicable and location(s) on project.

3. Required certificates shall be signed by an authorized representative of manufacturer or supplier of material, and by Contractor.

C. In addition to complying with the applicable requirements specified in preceding Article 1.9, samples which are required to have Laboratory Tests (those preceded by symbol "LT" under the separate sections of the specification shall be tested, at the expense of Contractor, in a commercial laboratory approved by Contracting Officer.

1. Laboratory shall furnish Contracting Officer with a certificate stating that it is fully equipped and qualified to perform intended work, is fully acquainted with specification requirements and intended use of materials and is an independent establishment in no way connected with organization of Contractor or with manufacturer or supplier of materials to be tested.
2. Certificates shall also set forth a list of comparable projects upon which laboratory has performed similar functions during past five years.
3. Samples and laboratory tests shall be sent directly to approved commercial testing laboratory.
4. Contractor shall send a copy of transmittal letter to both Resident Engineer and to Architect-Engineer simultaneously with submission of material to a commercial testing laboratory.
5. Laboratory test reports shall be sent directly to Resident Engineer for appropriate action.
6. Laboratory reports shall list contract specification test requirements and a comparative list of the laboratory test results. When tests show that the material meets specification requirements, the laboratory shall so certify on test report.
7. Laboratory test reports shall also include a recommendation for approval or disapproval of tested item.

D. If submittal samples have been disapproved, resubmit new samples as soon as possible after notification of disapproval. Such new samples shall be marked "Resubmitted Sample" in addition to containing other previously specified information required on label and in transmittal letter.

E. Approved samples will be kept on file by the Resident Engineer at the site until completion of contract, at which time such samples will be delivered to Contractor as Contractor's property. Where noted in technical sections of specifications, approved samples in good condition

may be used in their proper locations in contract work. At completion of contract, samples that are not approved will be returned to Contractor only upon request and at Contractor's expense. Such request should be made prior to completion of the contract. Disapproved samples that are not requested for return by Contractor will be discarded after completion of contract.

F. Submittal drawings (shop, erection or setting drawings) and schedules, required for work of various trades, shall be checked before submission by technically qualified employees of Contractor for accuracy, completeness and compliance with contract requirements. These drawings and schedules shall be stamped and signed by Contractor certifying to such check.

1. For each drawing required, submit one legible photographic paper or vellum reproducible.
2. Reproducible shall be full size.
3. Each drawing shall have marked thereon, proper descriptive title, including Medical Center location, project number, manufacturer's number, reference to contract drawing number, detail Section Number, and Specification Section Number.
4. A space 120 mm by 125 mm (4-3/4 by 5 inches) shall be reserved on each drawing to accommodate approval or disapproval stamp.
5. Submit drawings, ROLLED WITHIN A MAILING TUBE, fully protected for shipment.
6. One reproducible print of approved or disapproved shop drawings will be forwarded to Contractor.
7. When work is directly related and involves more than one trade, shop drawings shall be submitted to Architect-Engineer under one cover.

1-10. Samples, shop drawings, test reports, certificates and manufacturers' literature and data, shall be submitted for approval to:

**Chequamegon Bay Engineering**
933 N. Mayfair Road, Suite 109
Milwaukee, WI, 53226

1-11. At the time of transmittal to the Architect-Engineer, the Contractor shall also send a copy of the complete submittal directly to the Resident Engineer.

**Clement J. Zablocki VA Medical Center**

**Attn:** Mike Young

5000 W. National Avenue

Milwaukee, WI, 53295

- - - E N D - - -

# SECTION 01 42 19
# REFERENCE STANDARDS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

### 1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)

A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to - GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.

B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

### 1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)

The specifications and standards cited in this solicitation can be examined at the following location:

DEPARMENT OF VETERANS AFFAIRS
Office of Construction & Facilities Management
Facilities Quality Service (00CFM1A)
425 Eye Street N.W, (sixth floor)
Washington, DC 20001
Telephone Numbers: (202) 632-5249 or (202) 632-5178
Between 9:00 AM - 3:00 PM

**1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3) (JUN 1988)**

The specifications cited in this solicitation may be obtained from the associations or organizations listed below.

AA Aluminum Association Inc.
http://www.aluminum.org

AABC Associated Air Balance Council
http://www.aabchq.com

AAMA American Architectural Manufacturer's Association
http://www.aamanet.org

AAN American Nursery and Landscape Association
http://www.anla.org

AASHTO American Association of State Highway and Transportation Officials
http://www.aashto.org

AATCC American Association of Textile Chemists and Colorists
http://www.aatcc.org

ACGIH American Conference of Governmental Industrial Hygienists
http://www.acgih.org

ACI American Concrete Institute
http://www.aci-int.net

ACPA American Concrete Pipe Association
http://www.concrete-pipe.org

ACPPA American Concrete Pressure Pipe Association
http://www.acppa.org

ADC Air Diffusion Council
http://flexibleduct.org

AGA American Gas Association
http://www.aga.org

AGC Associated General Contractors of America
http://www.agc.org

AGMA American Gear Manufacturers Association, Inc.
http://www.agma.org

AHAM Association of Home Appliance Manufacturers
http://www.aham.org

AISC American Institute of Steel Construction
http://www.aisc.org

AISI American Iron and Steel Institute
http://www.steel.org

AITC American Institute of Timber Construction
http://www.aitc-glulam.org

AMCA Air Movement and Control Association, Inc.
http://www.amca.org

ANLA American Nursery & Landscape Association
http://www.anla.org

ANSI American National Standards Institute, Inc.
http://www.ansi.org

APA The Engineered Wood Association
http://www.apawood.org

ARI Air-Conditioning and Refrigeration Institute
http://www.ari.org

ASAE American Society of Agricultural Engineers
http://www.asae.org

ASCE American Society of Civil Engineers
http://www.asce.org

ASHRAE American Society of Heating, Refrigerating, and Air-Conditioning Engineers
http://www.ashrae.org

ASME American Society of Mechanical Engineers
http://www.asme.org

ASSE American Society of Sanitary Engineering
http://www.asse-plumbing.org

ASTM American Society for Testing and Materials
http://www.astm.org

AWI Architectural Woodwork Institute
http://www.awinet.org

AWS American Welding Society
http://www.aws.org

AWWA American Water Works Association
http://www.awwa.org

BHMA Builders Hardware Manufacturers Association
http://www.buildershardware.com

BIA Brick Institute of America
http://www.bia.org

CAGI Compressed Air and Gas Institute
http://www.cagi.org

CGA Compressed Gas Association, Inc.
http://www.cganet.com

CI The Chlorine Institute, Inc.
http://www.chlorineinstitute.org

CISCA Ceilings and Interior Systems Construction Association
http://www.cisca.org

CISPI Cast Iron Soil Pipe Institute
http://www.cispi.org

CLFMI Chain Link Fence Manufacturers Institute
http://www.chainlinkinfo.org

CPMB Concrete Plant Manufacturers Bureau
http://www.cpmb.org

CRA California Redwood Association
http://www.calredwood.org

CRSI Concrete Reinforcing Steel Institute
http://www.crsi.org

CTI Cooling Technology Institute
http://www.cti.org

DHI Door and Hardware Institute
http://www.dhi.org

EGSA Electrical Generating Systems Association
http://www.egsa.org

EEI Edison Electric Institute
http://www.eei.org

EPA Environmental Protection Agency
http://www.epa.gov

ETL ETL Testing Laboratories, Inc.
http://www.et1.com

FAA Federal Aviation Administration
http://www.faa.gov

FCC Federal Communications Commission
http://www.fcc.gov

FPS The Forest Products Society
http://www.forestprod.org

GANA Glass Association of North America
http://www.cssinfo.com/info/gana.html/

FM Factory Mutual Insurance
http://www.fmglobal.com

GA Gypsum Association
http://www.gypsum.org

GSA General Services Administration
http://www.gsa.gov

HI Hydraulic Institute
http://www.pumps.org

HPVA Hardwood Plywood & Veneer Association
http://www.hpva.org

ICBO International Conference of Building Officials
http://www.icbo.org

ICEA Insulated Cable Engineers Association Inc.
http://www.icea.net

\ICAC Institute of Clean Air Companies
http://www.icac.com

IEEE Institute of Electrical and Electronics Engineers
http://www.ieee.org\

IMSA International Municipal Signal Association
http://www.imsasafety.org

IPCEA Insulated Power Cable Engineers Association

NBMA Metal Buildings Manufacturers Association
http://www.mbma.com

MSS Manufacturers Standardization Society of the Valve and Fittings Industry Inc.
http://www.mss-hq.com

NAAMM National Association of Architectural Metal Manufacturers
http://www.naamm.org

NAPHCC Plumbing-Heating-Cooling Contractors Association
http://www.phccweb.org.org

NBS National Bureau of Standards
See - NIST

NBBPVI National Board of Boiler and Pressure Vessel Inspectors
http://www.nationboard.org

NEC National Electric Code
See - NFPA National Fire Protection Association

NEMA National Electrical Manufacturers Association
http://www.nema.org

NFPA National Fire Protection Association
http://www.nfpa.org

NHLA National Hardwood Lumber Association
http://www.natlhardwood.org

NIH National Institute of Health
http://www.nih.gov

NIST National Institute of Standards and Technology
http://www.nist.gov

NLMA Northeastern Lumber Manufacturers Association, Inc.
http://www.nelma.org

NPA National Particleboard Association
18928 Premiere Court
Gaithersburg, MD 20879
(301) 670-0604

NSF National Sanitation Foundation
http://www.nsf.org

NWWDA Window and Door Manufacturers Association
http://www.nwwda.org

OSHA Occupational Safety and Health Administration
Department of Labor
http://www.osha.gov

PCA Portland Cement Association
http://www.portcement.org

PCI Precast Prestressed Concrete Institute
http://www.pci.org

PPI The Plastic Pipe Institute
http://www.plasticpipe.org

PEI Porcelain Enamel Institute, Inc.
http://www.porcelainenamel.com

PTI Post-Tensioning Institute
http://www.post-tensioning.org

RFCI The Resilient Floor Covering Institute
http://www.rfci.com

RIS Redwood Inspection Service
See - CRA

RMA Rubber Manufacturers Association, Inc.
http://www.rma.org

SCMA Southern Cypress Manufacturers Association
http://www.cypressinfo.org

SDI Steel Door Institute
http://www.steeldoor.org

IGMA Insulating Glass Manufacturers Alliance
http://www.igmaonline.org

SJI Steel Joist Institute
http://www.steeljoist.org

SMACNA Sheet Metal and Air-Conditioning Contractors
National Association, Inc.
http://www.smacna.org

SSPC The Society for Protective Coatings
http://www.sspc.org

STI Steel Tank Institute
http://www.steeltank.com

SWI Steel Window Institute
http://www.steelwindows.com

TCA Tile Council of America, Inc.
http://www.tileusa.com

TEMA Tubular Exchange Manufacturers Association
http://www.tema.org

TPI Truss Plate Institute, Inc.
583 D'Onofrio Drive; Suite 200
Madison, WI 53719
(608) 833-5900

UBC The Uniform Building Code
See ICBO

UL Underwriters' Laboratories Incorporated
http://www.ul.com

ULC Underwriters' Laboratories of Canada
http://www.ulc.ca

WCLIB West Coast Lumber Inspection Bureau
6980 SW Varns Road, P.O. Box 23145
Portland, OR 97223
(503) 639-0651

WRCLA Western Red Cedar Lumber Association
P.O. Box 120786
New Brighton, MN 55112
(612) 633-4334

WWPA Western Wood Products Association
http://www.wwpa.org

- - - E N D - - -

# SECTION 01 45 29
# TESTING LABORATORY SERVICES

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This section specifies materials testing activities and inspection services required during project construction to be provided by a Testing Laboratory retained and paid for by Contractor.

B. Contractor is responsible for insuring all work meets the specification requirements. Testing services retained by the VA shall not relieve the contractor of providing his own testing services guaranteeing his work meeting these requirements. Testing services retained by the VA shall also not provide conclusive results to substantiate the contractors work.

### 1.2 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.

B. American Association of State Highway and Transportation Officials (AASHTO):

T27-06.....Sieve Analysis of Fine and Coarse Aggregates

T96-02 (R2006).....Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine

T99-01 (R2004).....The Moisture-Density Relations of Soils Using a 2.5 Kg (5.5 lb.) Rammer and a 305 mm (12 in.) Drop

T104-99 (R2003).....Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate

T180-01 (R2004).....Moisture-Density Relations of Soils using a 4.54 kg (10 lb.) Rammer and a 457 mm (18 in.) Drop

T191-02(R2006).....Density of Soil In-Place by the Sand-Cone Method

D. American Society for Testing and Materials (ASTM):

A325-06.....Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength

A370-07.....Definitions for Mechanical Testing of Steel Products

A490-06.....Heat Treated Steel Structural Bolts, 150 ksi Minimum Tensile Strength

C31/C31M-06.....Making and Curing Concrete Test Specimens in the Field
C33-03.....Concrete Aggregates
C39/C39M-05.....Compressive Strength of Cylindrical Concrete Specimens
C109/C109M-05.....Compressive Strength of Hydraulic Cement Mortars
C138-07.....Unit Weight, Yield, and Air Content (Gravimetric) of Concrete
C140-07.....Sampling and Testing Concrete Masonry Units and Related Units
C143/C143M-05.....Slump of Hydraulic Cement Concrete
C172-07.....Sampling Freshly Mixed Concrete
C173-07.....Air Content of freshly Mixed Concrete by the Volumetric Method
C567-05.....Density Structural Lightweight Concrete
C780-07.....Pre-construction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry
C1019-08.....Sampling and Testing Grout
C1064/C1064M-05.....Freshly Mixed Portland Cement Concrete
C1077-06.....Laboratories Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Laboratory Evaluation
C1314-07.....Compressive Strength of Masonry Prisms
D698-07.....Laboratory Compaction Characteristics of Soil Using Standard Effort
D1143-07.....Piles Under Static Axial Compressive LoadD1188-07 Bulk Specific Gravity and Density of Compacted Bituminous Mixtures Using Paraffin-Coated Specimens
D1556-07.....Density and Unit Weight of Soil in Place by the Sand-Cone Method
D1557-07.....Laboratory Compaction Characteristics of Soil Using Modified Effort
D2166-06.....Unconfined Compressive Strength of Cohesive Soil
D2167-94(R2001).....Density and Unit Weight of Soil in Place by the Rubber Balloon Method
D2216-05.....Laboratory Determination of Water (Moisture) Content of Soil and Rock by Mass

D2922-05.....Density of soil and Soil-Aggregate in Place by Nuclear Methods (Shallow Depth)
D2974-07.....Moisture, Ash, and Organic Matter of Peat and Other Organic Soils
D3666-(2002).....Minimum Requirements for Agencies Testing and Inspection Bituminous Paving Materials
D3740-07.....Minimum Requirements for Agencies Engaged in the Testing and Inspecting Road and Paving Material
E94-04.....Radiographic Testing
E164-03.....Ultrasonic Contact Examination of Weldments
E329-07.....Agencies Engaged in Construction Inspection and/or Testing
E543-06.....Agencies Performing Non-Destructive Testing
E605-93(R2006).....Thickness and Density of Sprayed Fire-Resistive Material (SFRM) Applied to Structural Members
E709-(2001).....Guide for Magnetic Particle Examination
E1155-96(R2008).....Determining FF Floor Flatness and FL Floor Levelness Numbers

E. American Welding Society (AWS):
D1.1-07.....Structural Welding Code-Steel

**1.3 REQUIREMENTS**

A. Accreditation Requirements: Construction materials testing laboratories must be accredited by a laboratory accreditation authority and will be required to submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory’s scope of accreditation must include the appropriate ASTM standards (i.e.; E 329, C 1077, D 3666, D3740, A 880, E 543) listed in the technical sections of the specifications. Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA. The policy applies to the specific laboratory performing the actual testing, not just the “Corporate Office.”

B. Inspection and Testing: Testing laboratory shall inspect materials and workmanship and perform tests described herein and additional tests requested by COTR. When it appears materials furnished, or work performed by Contractor fail to meet construction contract requirements, Testing Laboratory shall direct attention of COTR to such failure.

C. Written Reports: Testing laboratory shall submit test reports to COTR, Contractor, unless other arrangements are agreed to in writing by the

COTR. Submit reports of tests that fail to meet construction contract requirements on colored paper.

D. Verbal Reports: Give verbal notification to COTR immediately of any irregularity.

**PART 2 - PRODUCTS (NOT USED)**

**PART 3 - EXECUTION**

**3.1 EARTHWORK**

A. General: The Testing Laboratory shall provide qualified personnel, materials, equipment, and transportation as required to perform the services identified/required herein, within the agreed to schedule and/or time frame. The work to be performed shall be as identified herein and shall include but not be limited to the following:

1. Observe fill and subgrades during proof-rolling to evaluate suitability of surface material to receive fill or base course. Provide recommendations to the COTR regarding suitability or unsuitability of areas where proof-rolling was observed. Where unsuitable results are observed, witness excavation of unsuitable material and recommend to COTR extent of removal and replacement of unsuitable materials and observe proof-rolling of replaced areas until satisfactory results are obtained.
2. Provide part time observation of fill placement and compaction and field density testing in building areas and pavement areas to verify that earthwork compaction obtained is in accordance with contract documents.
3. Provide supervised geotechnical technician to inspect excavation, subsurface preparation, and backfill for structural fill.

B. Testing Compaction:

1. Determine maximum density and optimum moisture content for each type of fill, backfill and subgrade material used, in compliance with ASTM D698 and/or ASTM D1557.
2. Make field density tests in accordance with the primary testing method following ASTM D6938 wherever possible. Field density tests utilizing ASTM D1556 shall be utilized on a case by case basis only if there are problems with the validity of the results from the primary method due to specific site field conditions. Should the testing laboratory propose these alternative methods, they should

provide satisfactory explanation to the COTR before the tests are conducted.

a. Building Slab Subgrade: At least one test of subgrade for every 185 $m^2$ (2000 square feet) of building slab, but in no case fewer than three tests. In each compacted fill layer, perform one test for every 185 $m^2$ (2000 square feet) of overlaying building slab, but in no case fewer than three tests.
b. Foundation Wall Backfill: One test per 30 m (100 feet) of each layer of compacted fill but in no case fewer than two tests.
c. Pavement Subgrade: One test for each 335 $m^2$ (400 square yards), but in no case fewer than two tests.
d. Curb, Gutter, and Sidewalk: One test for each 90 m (300 feet), but in no case fewer than two tests.
e. Trenches: One test at maximum 30 m (100 foot) intervals per 1200 mm (4 foot) of vertical lift and at changes in required density, but in no case fewer than two tests.
f. Footing Subgrade: At least one test for each layer of soil on which footings will be placed. Subsequent verification and approval of each footing subgrade may be based on a visual comparison of each subgrade with related tested subgrade when acceptable to COTR. In each compacted fill layer below wall footings, perform one field density test for every 30 m (100 feet) of wall. Verify subgrade is level, all loose or disturbed soils have been removed, and correlate actual soil conditions observed with those indicated by test borings.

C. Testing for Footing Bearing Capacity: Evaluate if suitable bearing capacity material is encountered in footing subgrade.
D. Testing Materials: Test suitability of on-site and off-site borrow as directed by COTR.

**3.2 LANDSCAPING**

A. Test topsoil for organic materials, pH, phosphate, potash content, and gradation of particles.
   1. Test for organic material by using ASTM D2974.
   2. Determine percent of silt, sand, clay, and foreign materials such as rock, roots, and vegetation.
B. Submit laboratory test report of topsoil to COTR.

**3.3 ASPHALT CONCRETE PAVING**

A. Aggregate Base Course:

1. Determine maximum density and optimum moisture content for aggregate base material in accordance with ASTM D1557, Method D.
2. Make a minimum of three field density tests on each day's final compaction on each aggregate course in accordance with ASTM D1556.
3. Sample and test aggregate as necessary to insure compliance with specification requirements for gradation, wear, and soundness as specified in the applicable state highway standards and specifications.

B. Asphalt Concrete:

1. Aggregate: Sample and test aggregates in stock pile and hot-bins as necessary to insure compliance with specification requirements for gradation (AASHTO T27), wear (AASHTO T96), and soundness (AASHTO T104).
2. Temperature: Check temperature of each load of asphalt concrete at mixing plant and at site of paving operation.
3. Density: Make a minimum of two field density tests in accordance with ASTM D1188 of asphalt base and surface course for each day's paving operation.

**3.4 SITE WORK CONCRETE**

A. Test site work concrete including materials for concrete as required in Article CONCRETE of this section.

**3.5 CONCRETE**

A. Batch Plant Inspection and Materials Testing:

1. Perform continuous batch plant inspection until concrete quality is established to satisfaction of COTR with concurrence of Contracting Officer and perform periodic inspections thereafter as determined by COTR.
2. Periodically inspect and test batch proportioning equipment for accuracy and report deficiencies to COTR.
3. Sample and test mix ingredients as necessary to insure compliance with specifications.
4. Sample and test aggregates daily and as necessary for moisture content. Test the dry rodded weight of the coarse aggregate whenever a sieve analysis is made, and when it appears there has been a change in the aggregate.
5. Certify, in duplicate, ingredients and proportions and amounts of ingredients in concrete conform to approved trial mixes. When concrete is batched or mixed off immediate building site, certify (by signing, initialing or stamping thereon) on delivery slips

(duplicate) that ingredients in truck-load mixes conform to proportions of aggregate weight, cement factor, and water-cement ratio of approved trial mixes.

B. Field Inspection and Materials Testing:

1. Provide a technician at site of placement at all times to perform concrete sampling and testing.
2. Review the delivery tickets of the ready-mix concrete trucks arriving on-site. Notify the Contractor if the concrete cannot be placed within the specified time limits or if the type of concrete delivered is incorrect. Reject any loads that do not comply with the Specification requirements. Rejected loads are to be removed from the site at the Contractor’s expense. Any rejected concrete that is placed will be subject to removal.
3. Take concrete samples at point of placement in accordance with ASTM C172. Mold and cure compression test cylinders in accordance with ASTM C31. Make at least three cylinders for each 40 $m^3$ (50 cubic yards) or less of each concrete type, and at least three cylinders for any one day's pour for each concrete type. Label each cylinder with an identification number. COTR may require additional cylinders to be molded and cured under job conditions.
4. Perform slump tests in accordance with ASTM C143. Test the first truck each day, and every time test cylinders are made. Test pumped concrete at the hopper and at the discharge end of the hose at the beginning of each day’s pumping operations to determine change in slump.
5. Determine the air content of concrete per ASTM C173. For concrete required to be air-entrained, test the first truck and every 20 $m^3$ (25 cubic yards) thereafter each day. For concrete not required to be air-entrained, test every 80 $m^3$ (100 cubic yards) at random. For pumped concrete, initially test concrete at both the hopper and the discharge end of the hose to determine change in air content.
6. If slump or air content fall outside specified limits, make another test immediately from another portion of same batch.
7. Notify laboratory technician at batch plant of mix irregularities and request materials and proportioning check.
8. Verify that specified mixing has been accomplished.

9. Environmental Conditions: Determine the temperature per ASTM C1064 for each truckload of concrete during hot weather and cold weather concreting operations:
   a. When ambient air temperature falls below 4.4 degrees C (40 degrees F), record maximum and minimum air temperatures in each 24 hour period; record air temperature inside protective enclosure; record minimum temperature of surface of hardened concrete.
   b. When ambient air temperature rises above 29.4 degrees C (85 degrees F), record maximum and minimum air temperature in each 24 hour period; record minimum relative humidity; record maximum wind velocity; record maximum temperature of surface of hardened concrete.
10. Inspect the reinforcing steel placement, including bar size, bar spacing, top and bottom concrete cover, proper tie into the chairs, and grade of steel prior to concrete placement. Submit detailed report of observations.
11. Observe conveying, placement, and consolidation of concrete for conformance to specifications.
12. Observe condition of formed surfaces upon removal of formwork prior to repair of surface defects and observe repair of surface defects.
13. Observe curing procedures for conformance with specifications, record dates of concrete placement, start of preliminary curing, start of final curing, end of curing period.
14. Observe preparations for placement of concrete:
   a. Inspect handling, conveying, and placing equipment, inspect vibrating and compaction equipment.
   b. Inspect preparation of construction, expansion, and isolation joints.
15. Observe preparations for protection from hot weather, cold weather, sun, and rain, and preparations for curing.
16. Observe concrete mixing:
   a. Monitor and record amount of water added at project site.
   b. Observe minimum and maximum mixing times.
17. Measure concrete flatwork for levelness and flatness as follows:
   a. Perform Floor Tolerance Measurements $F_F$ and $F_L$ in accordance with ASTM E1155. Calculate the actual overall F- numbers using the inferior/superior area method.
   b. Perform all floor tolerance measurements within 48 hours after slab installation and prior to removal of shoring and formwork.

c. Provide the Contractor and the COTR with the results of all profile tests, including a running tabulation of the overall $F_F$ and $F_L$ values for all slabs installed to date, within 72 hours after each slab installation.

18. Other inspections:
    a. Grouting under base plates.
    b. Grouting anchor bolts and reinforcing steel in hardened concrete.

C. Laboratory Tests of Field Samples:
1. Test compression test cylinders for strength in accordance with ASTM C39. For each test series, test one cylinder at 7 days and one cylinder at 28 days. Use remaining cylinder as a spare tested as directed by COTR. Compile laboratory test reports as follows: Compressive strength test shall be result of one cylinder, except when one cylinder shows evidence of improper sampling, molding or testing, in which case it shall be discarded and strength of spare cylinder shall be used.
2. Furnish certified compression test reports (duplicate) to COTR. In test report, indicate the following information:
    a. Cylinder identification number and date cast.
    b. Specific location at which test samples were taken.
    c. Type of concrete, slump, and percent air.
    d. Compressive strength of concrete in MPa (psi).
    e. Weather conditions during placing.
    f. Temperature of concrete in each test cylinder when test cylinder was molded.
    g. Maximum and minimum ambient temperature during placing.
    h. Ambient temperature when concrete sample in test cylinder was taken.
    i. Date delivered to laboratory and date tested.

**3.6 REINFORCEMENT:**

A. Review mill test reports furnished by Contractor.
B. Written report shall include, in addition to test results, heat number, manufacturer, type and grade of steel, and bar size.

**3.7 MASONRY**

A. Mortar Tests:
1. Laboratory compressive strength test:
    a. Comply with ASTM C780.
    b. Obtain samples during or immediately after discharge from batch mixer.

c. Furnish molds with 50 mm (2 inch), 3 compartment gang cube.
d. Test one sample at 7 days and 2 samples at 28 days.

2. Two tests during first week of operation; one test per week after initial test until masonry completion.

B. Grout Tests:

1. Laboratory compressive strength test:
   a. Comply with ASTM C1019.
   b. Test one sample at 7 days and 2 samples at 28 days.
   c. Perform test for each 230 $m^2$ (2500 square feet) of masonry.

C. Masonry Unit Tests:

1. Laboratory Compressive Strength Test:
   a. Comply with ASTM C140.
   b. Test 3 samples for each 460 $m^2$ (5000 square feet) of wall area.

D. Prism Tests: For each type of wall construction indicated, test masonry prisms per ASTM C1314 for each 460 $m^2$ (5000 square feet) of wall area. Prepare one set of prisms for testing at 7 days and one set for testing at 28 days.

**3.8 STRUCTURAL STEEL**

A. General: Provide shop and field inspection and testing services to certify structural steel work is done in accordance with contract documents. Welding shall conform to AWS D1.1 Structural Welding Code.

B. Prefabrication Inspection:

1. Review design and shop detail drawings for size, length, type and location of all welds to be made.
2. Approve welding procedure qualifications either by pre-qualification or by witnessing qualifications tests.
3. Approve welder qualifications by certification or retesting.
4. Approve procedure for control of distortion and shrinkage stresses.
5. Approve procedures for welding in accordance with applicable sections of AWS D1.1.

C. Fabrication and Erection:

1. Weld Inspection:
   a. Inspect welding equipment for capacity, maintenance and working condition.
   b. Verify specified electrodes and handling and storage of electrodes in accordance with AWS D1.1.
   c. Inspect preparation and assembly of materials to be welded for conformance with AWS D1.1.

d. Inspect preheating and interpass temperatures for conformance with AWS D1.1.
e. Measure 25 percent of fillet welds.
f. Welding Magnetic Particle Testing: Test in accordance with ASTM E709 for a minimum of:
   1) 20 percent of all shear plate fillet welds at random, final pass only.
   2) 20 percent of all continuity plate and bracing gusset plate fillet welds, at random, final pass only.
   3) 100 percent of tension member fillet welds (i.e., hanger connection plates and other similar connections) for root and final passes.
   4) 20 percent of length of built-up column member partial penetration and fillet welds at random for root and final passes.
   5) 100 percent of length of built-up girder member partial penetration and fillet welds for root and final passes.
g. Welding Ultrasonic Testing: Test in accordance with ASTM E164 and AWS D1.1 for 100 percent of all full penetration welds, braced and moment frame column splices, and a minimum of 20 percent of all other partial penetration column splices, at random.
h. Verify that correction of rejected welds are made in accordance with AWS D1.1.
i. Testing and inspection do not relieve the Contractor of the responsibility for providing materials and fabrication procedures in compliance with the specified requirements.

2. Bolt Inspection:
   a. Inspect high-strength bolted connections in accordance AISC Specifications for Structural Joints Using ASTM A325 or A490 Bolts.
   b. Slip-Critical Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in each connection in accordance with AISC Specifications for Structural Joints Using ASTM A325 or A490 Bolts. Inspect all bolts in connection when one or more are rejected.
   c. Fully Pre-tensioned Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in 25 percent of connections in accordance with AISC Specification for Structural

Joints Using ASTM A325 or A490 Bolts. Inspect all bolts in connection when one or more are rejected.

d. Bolts installed by turn-of-nut tightening may be inspected with calibrated wrench when visual inspection was not performed during tightening.

e. Snug Tight Connections: Inspect 10 percent of connections verifying that plies of connected elements have been brought into snug contact.

f. Inspect field erected assemblies; verify locations of structural steel for plumbness, level, and alignment.

D. Submit inspection reports, record of welders and their certification, and identification, and instances of noncompliance to COTR.

**3.9 STEEL DECKING**

A. Provide field inspection of welds of metal deck to the supporting steel, and testing services to insure steel decking has been installed in accordance with contract documents and manufacturer’s requirements.

B. Qualification of Field Welding: Qualify welding processes and welding operators in accordance with “Welder Qualification” procedures of AWS D1.1. Refer to the “Plug Weld Qualification Procedure” in Part 3 “Field Quality Control.”

C. Submit inspection reports, certification, and instances of noncompliance to COTR.

**3.10 SHEAR CONNECTOR STUDS**

A. Provide field inspection and testing services required by AWS D.1 to insure shear connector studs have been installed in accordance with contract documents.

B. Tests: Test 20 percent of headed studs for fastening strength in accordance with AWS D1.1.

C. Submit inspection reports, certification, and instances of noncompliance to COTR.

**3.11 SPRAYED-ON FIREPROOFING**

A. Provide field inspection and testing services to certify sprayed-on fireproofing has been applied in accordance with contract documents.

B. Obtain a copy of approved submittals from COTR.

C. Use approved installation in test areas as criteria for inspection of work.

D. Test sprayed-on fireproofing for thickness and density in accordance with ASTM E605.

1. Thickness gauge specified in ASTM E605 may be modified for pole extension so that overhead sprayed material can be reached from floor.

E. Location of test areas for field tests as follows:

1. Thickness: Select one bay per floor, or one bay for each 930 $m^2$ (10,000 square feet) of floor area, whichever provides for greater number of tests. Take thickness determinations from each of following locations: Metal deck, beam, and column.
2. Density: Take density determinations from each floor, or one test from each 930 $m^2$ (10,000 square feet) of floor area, whichever provides for greater number of tests, from each of the following areas: Underside of metal deck, beam flanges, and beam web.

F. Submit inspection reports, certification, and instances of noncompliance to COTR.

- - - E N D - - -

# SECTION 01 57 19
# TEMPORARY ENVIRONMENTAL CONTROLS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This section specifies the control of environmental pollution and damage that the Contractor must consider for air, water, and land resources. It includes management of visual aesthetics, noise, solid waste, radiant energy, and radioactive materials, as well as other pollutants and resources encountered or generated by the Contractor. The Contractor is obligated to consider specified control measures with the costs included within the various contract items of work.

B. Environmental pollution and damage is defined as the presence of chemical, physical, or biological elements or agents which:
   1. Adversely effect human health or welfare,
   2. Unfavorably alter ecological balances of importance to human life,
   3. Effect other species of importance to humankind, or;
   4. Degrade the utility of the environment for aesthetic, cultural, and historical purposes.

C. Definitions of Pollutants:
   1. Chemical Waste: Petroleum products, bituminous materials, salts, acids, alkalis, herbicides, pesticides, organic chemicals, and inorganic wastes.
   2. Debris: Combustible and noncombustible wastes, such as leaves, tree trimmings, ashes, and waste materials resulting from construction or maintenance and repair work.
   3. Sediment: Soil and other debris that has been eroded and transported by runoff water.
   4. Solid Waste: Rubbish, debris, garbage, and other discarded solid materials resulting from industrial, commercial, and agricultural operations and from community activities.
   5. Surface Discharge: The term "Surface Discharge" implies that the water is discharged with possible sheeting action and subsequent soil erosion may occur. Waters that are surface discharged may terminate in drainage ditches, storm sewers, creeks, and/or "water of the United States" and would require a permit to discharge water from the governing agency.
   6. Rubbish: Combustible and noncombustible wastes such as paper, boxes, glass and crockery, metal and lumber scrap, tin cans, and bones.

7. Sanitary Wastes:
   a. Sewage: Domestic sanitary sewage and human and animal waste.
   b. Garbage: Refuse and scraps resulting from preparation, cooking, dispensing, and consumption of food.

**1.2 QUALITY CONTROL**

A. Establish and maintain quality control for the environmental protection of all items set forth herein.

B. Record on daily reports any problems in complying with laws, regulations, and ordinances. Note any corrective action taken.

**1.3 REFERENCES**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

B. U.S. National Archives and Records Administration (NARA):
33 CFR 328.....Definitions

**1.4 SUBMITTALS**

A. In accordance with Section, 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

1. Environmental Protection Plan: After the contract is awarded and prior to the commencement of the work, the Contractor shall meet with the Resident Engineer to discuss the proposed Environmental Protection Plan and to develop mutual understanding relative to details of environmental protection. Not more than 20 days after the meeting, the Contractor shall prepare and submit to the Resident Engineer for approval, a written and/or graphic Environmental Protection Plan including, but not limited to, the following:
   a. Name(s) of person(s) within the Contractor's organization who is (are) responsible for ensuring adherence to the Environmental Protection Plan.
   b. Name(s) and qualifications of person(s) responsible for manifesting hazardous waste to be removed from the site.
   c. Name(s) and qualifications of person(s) responsible for training the Contractor's environmental protection personnel.
   d. Description of the Contractor's environmental protection personnel training program.
   e. A list of Federal, State, and local laws, regulations, and permits concerning environmental protection, pollution control, noise control and abatement that are applicable to the Contractor's

proposed operations and the requirements imposed by those laws, regulations, and permits.

f. Methods for protection of features to be preserved within authorized work areas including trees, shrubs, vines, grasses, ground cover, landscape features, air and water quality, fish and wildlife, soil, historical, and archeological and cultural resources.

g. Procedures to provide the environmental protection that comply with the applicable laws and regulations. Describe the procedures to correct pollution of the environment due to accident, natural causes, or failure to follow the procedures as described in the Environmental Protection Plan.

h. Permits, licenses, and the location of the solid waste disposal area.

i. Drawings showing locations of any proposed temporary excavations or embankments for haul roads, material storage areas, structures, sanitary facilities, and stockpiles of excess or spoil materials. Include as part of an Erosion Control Plan approved by the District Office of the U.S. Soil Conservation Service and the Department of Veterans Affairs.

j. Environmental Monitoring Plans for the job site including land, water, air, and noise.

k. Work Area Plan showing the proposed activity in each portion of the area and identifying the areas of limited use or nonuse. Plan should include measures for marking the limits of use areas. This plan may be incorporated within the Erosion Control Plan.

B. Approval of the Contractor's Environmental Protection Plan will not relieve the Contractor of responsibility for adequate and continued control of pollutants and other environmental protection measures.

**1.5 PROTECTION OF ENVIRONMENTAL RESOURCES**

A. Protect environmental resources within the project boundaries and those affected outside the limits of permanent work during the entire period of this contract. Confine activities to areas defined by the specifications and drawings.

B. Protection of Land Resources: Prior to construction, identify all land resources to be preserved within the work area. Do not remove, cut, deface, injure, or destroy land resources including trees, shrubs, vines, grasses, top soil, and land forms without permission from the Resident Engineer. Do not fasten or attach ropes, cables, or guys to

trees for anchorage unless specifically authorized, or where special emergency use is permitted.

1. Work Area Limits: Prior to any construction, mark the areas that require work to be performed under this contract. Mark or fence isolated areas within the general work area that are to be saved and protected. Protect monuments, works of art, and markers before construction operations begin. Convey to all personnel the purpose of marking and protecting all necessary objects.
2. Protection of Landscape: Protect trees, shrubs, vines, grasses, land forms, and other landscape features shown on the drawings to be preserved by marking, fencing, or using any other approved techniques.
   a. Box and protect from damage existing trees and shrubs to remain on the construction site.
   b. Immediately repair all damage to existing trees and shrubs by trimming, cleaning, and painting with antiseptic tree paint.
   c. Do not store building materials or perform construction activities closer to existing trees or shrubs than the farthest extension of their limbs.
3. Reduction of Exposure of Unprotected Erodible Soils: Plan and conduct earthwork to minimize the duration of exposure of unprotected soils. Clear areas in reasonably sized increments only as needed to use. Form earthwork to final grade as shown. Immediately protect side slopes and back slopes upon completion of rough grading.
4. Temporary Protection of Disturbed Areas: Construct diversion ditches, benches, and berms to retard and divert runoff from the construction site to protected drainage areas approved under paragraph 208 of the Clean Water Act.
   a. Sediment Basins: Trap sediment from construction areas in temporary or permanent sediment basins that accommodate the runoff of a local 1YR (design year) storm. After each storm, pump the basins dry and remove the accumulated sediment. Control overflow/drainage with paved weirs or by vertical overflow pipes, draining from the surface.
   b. Reuse or conserve the collected topsoil sediment as directed by the Resident Engineer. Topsoil use and requirements are specified in Section 31 20 00, EARTH MOVING.
   c. Institute effluent quality monitoring programs as required by Federal, State, and local environmental agencies.

5. Erosion and Sedimentation Control Devices: The erosion and sediment controls selected and maintained by the Contractor shall be such that water quality standards are not violated as a result of the Contractor's activities. Construct or install all temporary and permanent erosion and sedimentation control features and Maintain temporary erosion and sediment control measures such as berms, dikes, drains, sedimentation basins, grassing, and mulching, until permanent drainage and erosion control facilities are completed and operative.
6. Manage borrow areas on Government property to minimize erosion and to prevent sediment from entering nearby water courses or lakes.
7. Manage and control spoil areas on Government property to limit spoil to areas shown on the Environmental Protection Plan and prevent erosion of soil or sediment from entering nearby water courses or lakes.
8. Protect adjacent areas from despoilment by temporary excavations and embankments.
9. Handle and dispose of solid wastes in such a manner that will prevent contamination of the environment. Place solid wastes (excluding clearing debris) in containers that are emptied on a regular schedule. Transport all solid waste off Government property and dispose of waste in compliance with Federal, State, and local requirements.
10. Store chemical waste away from the work areas in corrosion resistant containers and dispose of waste in accordance with Federal, State, and local regulations.
11. Handle discarded materials other than those included in the solid waste category as directed by the Resident Engineer.

C. Protection of Water Resources: Keep construction activities under surveillance, management, and control to avoid pollution of surface and ground waters and sewer systems. Implement management techniques to control water pollution by the listed construction activities that are included in this contract.
   1. Washing and Curing Water: Do not allow wastewater directly derived from construction activities to enter water areas. Collect and place wastewater in retention ponds allowing the suspended material to settle, the pollutants to separate, or the water to evaporate.
   2. Control movement of materials and equipment at stream crossings during construction to prevent violation of water pollution control standards of the Federal, State, or local government.

3. Monitor water areas affected by construction.

D. Protection of Fish and Wildlife Resources: Keep construction activities under surveillance, management, and control to minimize interference with, disturbance of, or damage to fish and wildlife. Prior to beginning construction operations, list species that require specific attention along with measures for their protection.

E. Protection of Air Resources: Keep construction activities under surveillance, management, and control to minimize pollution of air resources. Burning is not permitted on the job site. Keep activities, equipment, processes, and work operated or performed, in strict accordance with the State of Wisconsin Administrative Code, NR400 Series and Federal emission and performance laws and standards. Maintain ambient air quality standards set by the Environmental Protection Agency, for those construction operations and activities specified.

1. Particulates: Control dust particles, aerosols, and gaseous by-products from all construction activities, processing, and preparation of materials (such as from asphaltic batch plants) at all times, including weekends, holidays, and hours when work is not in progress.
2. Particulates Control: Maintain all excavations, stockpiles, haul roads, permanent and temporary access roads, plant sites, spoil areas, borrow areas, and all other work areas within or outside the project boundaries free from particulates which would cause a hazard or a nuisance. Sprinklering, chemical treatment of an approved type, light bituminous treatment, baghouse, scrubbers, electrostatic precipitators, or other methods are permitted to control particulates in the work area.
3. Hydrocarbons and Carbon Monoxide: Control monoxide emissions from equipment to Federal and State allowable limits.
4. Odors: Control odors of construction activities and prevent obnoxious odors from occurring.

F. Reduction of Noise: Minimize noise using every action possible. Perform noise-producing work in less sensitive hours of the day or week as directed by the Resident Engineer. Maintain noise-produced work at or below the decibel levels and within the time periods specified.

1. Perform construction activities involving repetitive, high-level impact noise only between 8:00 a.m. and 6:00 p.m unless otherwise permitted by local ordinance or the Resident Engineer. Repetitive

impact noise on the property shall not exceed the following dB limitations:

| Time Duration of Impact Noise | Sound Level in dB |
|---|---|
| More than 12 minutes in any hour | 70 |
| Less than 30 seconds of any hour | 85 |
| Less than three minutes of any hour | 80 |
| Less than 12 minutes of any hour | 75 |

2. Provide sound-deadening devices on equipment and take noise abatement measures that are necessary to comply with the requirements of this contract, consisting of, but not limited to, the following:
   a. Maintain maximum permissible construction equipment noise levels at 15 m (50 feet) (dBA):

| EARTHMOVING | | MATERIALS HANDLING | |
|---|---|---|---|
| FRONT LOADERS | 75 | CONCRETE MIXERS | 75 |
| BACKHOES | 75 | CONCRETE PUMPS | 75 |
| DOZERS | 75 | CRANES | 75 |
| TRACTORS | 75 | DERRICKS IMPACT | 75 |
| SCAPERS | 80 | PILE DRIVERS | 95 |
| GRADERS | 75 | JACK HAMMERS | 75 |
| TRUCKS | 75 | ROCK DRILLS | 80 |
| PAVERS, STATIONARY | 80 | PNEUMATIC TOOLS | 80 |
| PUMPS | 75 | BLASTING | NA |
| GENERATORS | 75 | SAWS | 75 |
| COMPRESSORS | 75 | VIBRATORS | 75 |

   b. Use shields or other physical barriers to restrict noise transmission.
   c. Provide soundproof housings or enclosures for noise-producing machinery.
   d. Use efficient silencers on equipment air intakes.
   e. Use efficient intake and exhaust mufflers on internal combustion engines that are maintained so equipment performs below noise levels specified.
   f. Line hoppers and storage bins with sound deadening material.
   g. Conduct truck loading, unloading, and hauling operations so that noise is kept to a minimum.

3. Measure sound level for noise exposure due to the construction at least once every five successive working days while work is being performed above 55 dB(A) noise level. Measure noise exposure at the property line or 15 m (50 feet) from the noise source, whichever is greater. Measure the sound levels on the A weighing network of a General Purpose sound level meter at slow response. To minimize the effect of reflective sound waves at buildings, take measurements at 900 to 1800 mm (three to six feet) in front of any building face. Submit the recorded information to the Resident Engineer noting any problems and the alternatives for mitigating actions.

G. Restoration of Damaged Property: If any direct or indirect damage is done to public or private property resulting from any act, omission, neglect, or misconduct, the Contractor shall restore the damaged property to a condition equal to that existing before the damage at no additional cost to the Government. Repair, rebuild, or restore property as directed or make good such damage in an acceptable manner.

H. Final Clean-up: On completion of project and after removal of all debris, rubbish, and temporary construction, Contractor shall leave the construction area in a clean condition satisfactory to the Resident Engineer. Cleaning shall include off the station disposal of all items and materials not required to be salvaged, as well as all debris and rubbish resulting from demolition and new work operations.

- - - E N D - - -

# SECTION 01 58 16
# TEMPORARY INTERIOR SIGNAGE

## PART 1 GENERAL

### DESCRIPTION

This section specifies temporary interior signs.

## PART 2 PRODUCTS

### 2.1 TEMPORARY SIGNS

A. Fabricate from 50 Kg (110 pound) mat finish white paper.

B. Cut to 100 mm (4-inch) wide by 300 mm (12 inch) long size tag.

C. Punch 3 mm (1/8-inch) diameter hole centered on 100 mm (4-inch) dimension of tag. Edge of Hole spaced approximately 13 mm (1/2-inch) from one end on tag.

D. Reinforce hole on both sides with gummed cloth washer or other suitable material capable of preventing tie pulling through paper edge.

E. Ties: Steel wire 0.3 mm (0.0120-inch) thick, attach to tag with twist tie, leaving 150 mm (6-inch) long free ends.

## PART 3 EXECUTION

### 3.1 INSTALLATION

A. Install temporary signs attached to room door frame or room door knob, lever, or pull for doors on corridor openings.

B. Mark on signs with felt tip marker having approximately 3 mm (1/8-inch) wide stroke for clearly legible numbers or letters.

C. Identify room with numbers as designated on floor plans.

### 3.2 LOCATION

A. Install on doors that have room, corridor, and space numbers shown.

B. Doors that do not require signs are as follows:

1. Corridor barrier doors (cross-corridor) in corridor with same number.
2. Folding doors or partitions.
3. Toilet or bathroom doors within and between rooms.
4. Communicating doors in partitions between rooms with corridor entrance doors.
5. Closet doors within rooms.

C. Replace missing, damaged, or illegible signs.

- - - E N D - - -

# SECTION 01 74 19
# CONSTRUCTION WASTE MANAGEMENT

## PART 1 – GENERAL

### 1.1 DESCRIPTION

A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.

B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused. Contractor is required to restore all finishes, surfaces, items, & materials as required accommodating new finishes. For example, if wall paper, vinyl wall covering, ceramic wall tile, etc. is existing on wall, and new wall finish calls for wall to be painted, contractor is required to remove existing wall paper, vinyl wall covering, ceramic wall tile, etc. to accommodate new painted finish. These surfaces are required to be verified prior to bid, as no change to contract will be provided after award if existing finishes are clearly present.

C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:

1. Waste Management Plan development and implementation.
2. Techniques to minimize waste generation.
3. Sorting and separating of waste materials.
4. Salvage of existing materials and items for reuse or resale.
5. Recycling of materials that cannot be reused or sold.

D. At a minimum the following waste categories shall be diverted from landfills:

1. Soil.
2. Inerts (eg, concrete, masonry and asphalt).
3. Clean dimensional wood and palette wood.
4. Green waste (biodegradable landscaping materials).
5. Engineered wood products (plywood, particle board and I-joists, etc).
6. Metal products (eg, steel, wire, beverage containers, copper, etc).
7. Cardboard, paper and packaging.

8. Bitumen roofing materials.
9. Plastics (eg, ABS, PVC).
10. Carpet and/or pad.
11. Gypsum board.
12. Insulation.
13. Paint.
14. Fluorescent lamps.

**1.2 RELATED WORK**

A. Section 02 41 00, DEMOLITION.
B. Section 01 00 00, GENERAL REQUIREMENTS.
C. Section 02 83 22.13, LEAD BASED PAINT REMOVAL AND DISPOSAL

**1.3 QUALITY ASSURANCE**

A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction /Demolition waste includes products of the following:
   1. Excess or unusable construction materials.
   2. Packaging used for construction products.
   3. Poor planning and/or layout.
   4. Construction error.
   5. Over ordering.
   6. Weather damage.
   7. Contamination.
   8. Mishandling.
   9. Breakage.
B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.
C. Contractor shall develop and implement procedures to reuse and recycle new materials to a minimum of 50 percent.
D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.

E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations. The Whole Building Design Guide website http://www.wbdg.org provides a Construction Waste Management Database that contains information on companies that haul, collect, and process recyclable debris from construction projects.

F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.

G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.

H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

**1.4 TERMINOLOGY**

A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.

B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.

C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.

D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.

E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).

F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.

G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.

H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.

I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.

J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.

K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.

L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.

   1. On-site Recycling – Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
   2. Off-site Recycling – Materials hauled to a location and used in an altered form in the manufacture of new products.

M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facilities permit or be regulated by the local enforcement agency.

N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.

O. Return: To give back reusable items or unused products to vendors for credit.

P. Salvage: To remove waste materials from the site for resale or re-use by a third party.

Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.

R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.

S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

**1.5 SUBMITTALS**

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:

B. Prepare and submit to the Resident Engineer a written demolition debris management plan. The plan shall include, but not be limited to, the following information:

1. Procedures to be used for debris management.
2. Techniques to be used to minimize waste generation.
3. Analysis of the estimated job site waste to be generated:
   a. List of each material and quantity to be salvaged, reused, recycled.
   b. List of each material and quantity proposed to be taken to a landfill.
4. Detailed description of the Means/Methods to be used for material handling.
   a. On site: Material separation, storage, protection where applicable.
   b. Off site: Transportation means and destination. Include list of materials.
      1) Description of materials to be site-separated and self-hauled to designated facilities.
      2) Description of mixed materials to be collected by designated waste haulers and removed from the site.
   c. The names and locations of mixed debris reuse and recycling facilities or sites.
   d. The names and locations of trash disposal landfill facilities or sites.

e. Documentation that the facilities or sites are approved to receive the materials.

C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.

D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.

**1.6 APPLICABLE PUBLICATIONS**

A Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.

B. U.S. Green Building Council (USGBC):
LEED Green Building Rating System for New Construction

**1.7 RECORDS**

A. Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration. Records shall be kept in accordance with the LEED Reference Guide and LEED Template.

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

A. List of each material and quantity to be salvaged, recycled, reused.

B. Separate out materials and recycle them. Submit report from construction and demolition “recycle” facility. One such facility that can/has been used is the Waste Management C&D Recycling facility (formerly City Wide Recycling), 10700 West Brown Deer Road, Milwaukee, WI, 53224. Phone number is (414) 355 – 6500. Plant manager is Mike Miller. This Waste Management facility will give contractor estimated weight of recycled materials including LEED report identifying drywall, inert materials (bricks, concrete, etc.), metals, old cardboard, wood recycled and the approximate amount of materials that cannot be recycled --- which is then landfilled. Other facilities offering similar reporting and methods can be proposed by Contractor.

C. List of each material and quantity proposed to be taken to a landfill.

D. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

**PART 3 - EXECUTION**

**3.1 COLLECTION**

A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.

B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.

C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

**3.2 DISPOSAL**

A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.

B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

**3.3 REPORT**

A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.

B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.

C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices. Include the net total costs for each disposal.

**3.4 REQUIRED TABLES : To be completed by Contractor and Supplied to VA.**

Project Name:_____ Location:_____ Project Contractor:_____
COTR:_____
Date:_____

| Material Being Reused/Recycled | Reused/Recycled | Quantity (lbs or cubic yards | Recycler/Location | Comments |
|---|---|---|---|---|
| Masonry | | | | |
| Concrete | | | | |
| Scrap Metals | | | | |
| Packaging | | | | |
| Drywall | | | | |
| Wood | | | | |
| Plumbing Fixtures | | | | |
| Glass | | | | |
| Plastics (noncontaminated) | | | | |
| Acoustical Ceiling Tile | | | | |
| Wire | | | | |
| Light Fixtures | | | | |
| Lamps | | | | |
| Ballasts | | | | |
| Carpeting | | | | |

Project Name:_____ Location:_____ Project Contractor:_____

COTR:_____

Date:_____

**KEY:**

**( R) = Recycled Content**

**(ES) = Energy Star**

**(BP) = Biobased Product**

**(FEMP) = FEMP-Designated Product**

Product: What specific product was purchased?

"Green" Content: What makes it green? % recycled, biobased, energy star, etc.

| Material | Product | "Green" Content | Manufacturer | Comments |
|---|---|---|---|---|
| Appliances ( R) | | | | |
| Bathroom Fixtures ( R) | | | | |
| Building Insulation (R,ES) | | | | |
| Cement and Concrete ( R) | | | | |
| Composite panels (BP) | | | | |
| Doors and skylights (ES) | | | | |
| Floor tiles (R) | | | | |
| Laminated paperboard (R) | | | | |
| Structural fiberboard | | | | |
| Roofing materials (R, BP, ES) | | | | |
| Windows (ES) | | | | |
| Office furniture | | | | |
| Carpet (R) | | | | |
| Carpet cushion (R) | | | | |
| Compact fluorescent lamps (CFLs) (ES) | | | | |
| Decorative light strings (ES) | | | | |
| Downlight luminaires (FEMP) | | | | |
| Fluorescent ballasts (FEMP) | | | | |
| Fluorescent luminaires (FEMP) | | | | |
| Fluorescent tube lamps (FEMP) | | | | |
| LED lighting | | | | |
| Light fixtures (ES) | | | | |
| Lighting controls (FEMP) | | | | |
| Mats (R) | | | | |
| Paint -- consolidated latex paint (R) | | | | |
| Paint -- reprocessed latex paint (R) | | | | |
| Bike racks (R) | | | | |
| Plastic fencing (R) | | | | |
| Signage (R) | | | | |
| Adhesive and Mastic Removers (BP) | | | | |
| Carpet and Upholstery Cleaners - General Purpose (BP) | | | | |
| Carpet and Upholstery Cleaners - Spot Removers (BP) | | | | |
| Dust Suppressants (BP) | | | | |
| Floor Strippers (BP) | | | | |
| Graffiti and Grease Removers (BP) | | | | |
| Sorbents (BP) | | | | |
| Mats (R) | | | | |
| Wood and concrete sealers (BP) | | | | |

- - E N D - - -

Attachment A – Sample Construction Waste Management Plan

**Introduction.**

This site based **Construction Waste Management Plan** has been developed to manage the non-hazardous building construction and demolition waste by diverting waste from the landfills through salvaging, recycling, or reusing building materials for the Department of Veterans Affairs during construction activities. The Construction Waste Management Plan has been designed to establish records to quantify construction and demolition debris diversion and disposal. Based on the work that is scheduled to be part of the contract and the engineering practices to be implemented in conjunction with the work, every effort is being made to protect the people, assets, and the environment of the Department of Veterans Affairs.

**Contents.**

ORGANIZATION AND RESPONSIBILITIES
- Job Site Superintendent
- General Contractor
- All Other On-site Personnel
- Construction/Renovation Area

SITE DESCRIPTION

PERSONNEL

WASTE MANAGEMENT GOALS

PLAN IMPLEMENTATION, OVERSIGHT & ENFORCEMENT

MEETINGS & COMMUNICATION

SITE ASSESSMENT DISPOSAL AND HANDLING

WASTE AUDITING PROCEDURES

WASTE MANAGEMENT DOCUMENTATION

**Personnel Organization and Responsibilities.**

This construction project has been authorized by and is under the supervision of the Department of Veterans Affairs, Milwaukee, WI.
**Job Site Superintendent:** ***[Superintendent Name]*** will be the on-site employee responsible for the implementation and enforcement of the Construction Waste Management Plan and is so delegated by ***[Prime Contractor Name].***
**Prime Contractor:** ***[Prime Contractor Name]*** will oversee the work of all construction staff and subcontractors. The Contractor will be responsible for instituting the measures as outlined in this Construction Waste Management Plan and ensuring their effectiveness.
**All Other On-site Personnel:** All other on-site construction personnel, including all subcontractors, will be responsible for adhering to the Construction Waste Management Plan as established by ***[Prime Contractor Name]***

as well as any additional practices, laws, and regulations for ensuring a safe work environment.
**Construction/Renovation Area:** The work will take place at the Department of Veterans Affairs Medical Center, Milwaukee Wisconsin. The main construction area is contained at the ***[Contract Location]*** as shown on the drawings.

**Site Description.**
The worksite is an enclosed steel, concrete and masonry building structure.

**Personnel.**
As required in Specification Section 01 74 19 Construction Waste Management: All construction workers will be aware of the Construction Waste Management Plan through the project's Pre-Construction Meeting as well as the Project Kick-Off Meeting conducted by ***[Prime Contractor Name].*** The meetings will consist of the information contained in this Construction Waste Management Plan, including, but not limited to; the construction limits, waste management goals, plan implementation, oversight and enforcement, meetings and communication, documentation, site assessment-expected wastes, disposal and handling, trade contractor waste management plan, waste management progress report, and work area limits, as well as the safety guidelines of the VA. Upon completing this briefing ***[Superintendent Name]*** will enforce the Construction Waste Management Plan throughout the life of the project. Weekly contractor meetings will include the Construction Waste Management Plan as well as the Environmental Protection Plan in section 01 57 19 to ensure new and all workers onsite are aware of the requirements and procedures.

**Waste Management Goals.**

This Construction Waste Management Plan is the responsibility of the Prime Contractor and to be enforced for all subcontractors by the Prime Contractor. By effectively managing this Construction Waste Management Plan, ***[Prime Contractor Name]*** will recycle or salvage (for reuse) all feasible materials to a minimum of **50 percent by weight.**

The Waste Management Plan outlines the expected wastes to be confronted on site, means of disposal and handling methods, and required documentation. The ***[Prime Contractor Name]*** will provide non hazardous waste manifest identifying weight of all waste generated per delivery (dumpster)

This Construction Waste Management Plan is in conjunction with specification section 01 74
19 Construction Waste Management.

***[Prime Contractor Name]*** will monitor, implement, and document this plan throughout the construction of this project. Monitoring of on-site compliance with this plan will be performed by the ***[Prime Contractor Name]*** Superintendents on a daily basis. During demolition, the demolition contractor will provide one metal scrap dumpster and one mixed waste dumpster that will be used for all materials. The metal dumpster will be taken by ***[Demolition Subcontractor Name, Address]*** for recycling. The mixed waste dumpster will be taken to ***[Company 1 Name, address],*** where it will be sorted

and separated for recycling. Any non-recyclable material will be sent to landfill. Recyclable material will be weighed and recorded by ***[Company 1 Name, address]***. During reconstruction there will be one dumpster provided for mixed waste. The mixed waste dumpster will be taken to ***[Company 2 Name],*** where it will be sorted and separated for recycling. Records will be provided in accordance with LEED Reference Guide and LEED Template. The reports will be submitted monthly.

**Meetings and Communication.**

Each and every trade contractor and subcontractor will be required to attend a Pre-Construction Meeting and Project Kick-Off Meeting. New construction personnel that are unable to attend are required to attend a brief safety meeting that will include a construction waste training session before being allowed to work on the site. Further, the Demolition Debris Management Plan will be on the agenda at regular construction meetings to update the project team on the status of ***[Prime Contractor Name]*** goals for diverted waste and what measures may need to be implemented if these goals are not being met.

**SITE ASSESSMENT- DISPOSAL & HANDLING**
Contractor to provide dumpsters for processing recyclables and waste; Examples are: 1) Concrete materials; 2) Metal; 3) mixed waste All of these to be sorted at landfill site or recycling facility.

Upon approval, ***[Prime Contractor Name]*** will use the VA-provided cardboard dumpster for all cardboard materials.

The following table lists expected wastes on this project, their disposal method, and handling procedures:

**Hauler:**
***[Company Name, Contact, Address]***

**Recycling:**
***[Company Name, Contact, Address]***

| Item | Disposal method | Handling Procedure | Destination/Recipient |
|---|---|---|---|
| Masonry | Recycle | Place in concrete dumpster | ACME WASTE, INC. |
| Concrete | Recycle | Place in concrete dumpster | ACME WASTE, INC. |
| Scrap Metals | Recycle | Place in Metal dumpster | ACME WASTE, INC. |
| Cardboard | Recycle or reuse | Minimal packaging where possible, or place in cardboard dumpster | VA-provided cardboard dumpster (permission required) |

Attachment A – Sample Construction Waste Management Plan

| | | | |
|---|---|---|---|
| Drywall | Recycle | Place in mixed dumpster | ACME WASTE, INC. |
| Wood (clean) | Recycle | Place in mixed dumpster | ACME WASTE, INC. |
| Plumbing Fixtures | Recycle | Place in mixed dumpster | ACME WASTE, INC. |
| Glass | Recycle | Place in mixed dumpster | ACME WASTE, INC. |
| Plastics (noncontaminated) | Recycle | Place in mixed dumpster | ACME WASTE, INC. |
| Plastics (contaminated) | Landfill | Place in mixed dumpster | ACME WASTE, INC. |
| Ceiling Tile | Recycle | Place in mixed dumpster | ACME WASTE, INC. |
| Wiring | Recycle/Salvage | Electrician will reuse or recycle | [Trade Subcontractor Name] |
| Light Fixtures | Recycle/Salvage | Electrician will reuse, salvage, or recycle | [Trade Subcontractor Name] |
| Lamps (Universal Waste) | Recycle/Salvage | Electrician will reuse, salvage, or recycle | [Trade Subcontractor Name] |
| Ballasts | Recycle/Salvage | Electrician will reuse, salvage, or recycle | [Trade Subcontractor Name] |
| Carpet | Recycle | Carpet Subcontractor place in mixed dumpster or recycle | [Company Name] |
| Inerts | Recycle | Place in Concrete Dumpster | [Company Name] |
| Soil | Reuse | Reuse throughout project | [Contractor Name] |
| All Other Wastes | Landfill | Reduce waste where possible, research recycling or reuse opportunities | [Company Name] |

**Waste Auditing.**
All subcontractors are responsible for daily site cleanup and ensuring that all recycling containers are kept free of contamination. ***[Prime Contractor Name]*** representatives shall be responsible for daily checks of trash and recycling containers to check for and ensure the removal of contamination. Violators will be required to re-sort any misplaced waste and, if the problem continues, pay the cost of ***[Prime Contractor Name]*** time to sort recyclables from the

trash. ***[Prime Contractor Name]*** representatives shall be responsible for contacting haulers for collection service.

**Documentation.**
Documentation of the waste management plan will consist of the following:

1. Records will be provided in accordance with LEED Reference Guide and LEED Template.
2. Records will include the amount of material salvaged, recycled and re-used.
3. Records will include a list of materials taken to the landfill.
4. Material tracking data shall be provided indicating receiving parties, dates, weight tickets, tipping fees, manifests and the total resulting cost or savings.

The quantities in the report will be updated by ***[Prime Contractor Name]*** based on information provided by each Trade Contractor and the independent hauler under contract to provide the metal dumpsters. Each Trade Contractor shall be responsible for providing the following documentation for any waste generated on site that is not deposited in the dumpsters provided by ***[Prime Contractor Name].***

1. A record of the type and quantity (by weight) of each material salvaged, reused, recycled, or disposed in a manner other than that provided by ***[Prime Contractor Name]*** through their independent hauler.
2. Disposal receipts: Provide copies of all receipts issued by a disposal facility for CDL waste that is disposed in a landfill.
3. Recycling Receipts: Provide copies of all receipts issued by an approved recycling facility.
4. Salvaged materials document: types and quantities (by weight) for materials salvaged for reuse on site, sold, or donated to a third party.

This documentation will then be compiled by ***[Prime Contractor Name]*** in monthly waste tracking reports.

# SECTION 01 81 11
# SUSTAINABLE DESIGN REQUIREMENTS

## PART 1 - GENERAL

### 1.1 SUMMARY

This Section describes general requirements and procedures to comply with the Guiding Principles for Leadership in High Performance and Sustainable Buildings Memorandum of Understanding incorporated in the Executive Orders 13423 and 13514; Energy Policy Act of 2005 (EPA 2005) and the Energy Independence and Security Act of 2007 (EISA 2007).

### 1.2 OBJECTIVES

A. To obtain acceptable Indoor Air Quality (IAQ) for the completed project and minimize the environmental impacts of the construction and operation, the Contractor during the construction phase of this project shall implement the following procedures:

1. Select products that minimize consumption of non-renewable resources, consume reduced amounts of energy and minimize amounts of pollution to produce, and employ recycled and/or recyclable materials. It is the intent of this project to conform with EPA's Five Guiding Principles on environmentally preferable purchasing. The five principles are:
   a. Include environmental considerations as part of the normal purchasing process.
   b. Emphasize pollution prevention early in the purchasing process.
   c. Examine multiple environmental attributes throughout a product's or service's life cycle.
   d. Compare relevant environmental impacts when selecting products and services.
   e. Collect and base purchasing decisions on accurate and meaningful information about environmental performance.
2. Control sources for potential IAQ pollutants by controlled selection of materials and processes used in project construction in order to attain superior IAQ.
3. Products and processes that achieve the above objectives to the extent currently possible and practical have been selected and included in these Construction Documents. The Contractor is responsible to maintain and support these objectives in developing

means and methods for performing the work of this Contract and in proposing product substitutions and/or changes to specified processes.

4. Use building practices that insure construction debris and particulates do mot contaminate or enter duct work prior to system startup and turn over.

**1.3 RELATED DOCUMENTS**

A. Section 01 74 19 CONSTRUCTION WASTE MANANGEMENT
B. Section 01 81 09 TESTING FOR INDOOR AIR QUALITY (not written yet)
C. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS

**1.4 DEFINITIONS**

A. Agrifiber Products: Composite panel products derived from agricultural fiber
B. Biobased Product: As defined in the 2002 Farm Bill, a product determined by the Secretary to be a commercial or industrial product (other than food or feed) that is composed, in whole or in significant part, of biological products or renewable domestic agricultural materials (including plant, animal, and marine materials) or forestry materials
C. Biobased Content: The weight of the biobased material divided by the total weight of the product and expressed as a percentage by weight
D. Certificates of Chain-of-Custody: Certificates signed by manufacturers certifying that wood used to make products has been tracked through its extraction and fabrication to ensure that is was obtained from forests certified by a specified certification program
E. Composite Wood: A product consisting of wood fiber or other plant particles bonded together by a resin or binder
F. Construction and Demolition Waste: Includes solid wastes, such as building materials, packaging, rubbish, debris, and rubble resulting from construction, remodeling, repair and demolition operations. A construction waste management plan is to be provided by the Contractor as defined in Section 01 74 19.
G. Third Party Certification: Certification of levels of environmental achievement by nationally recognized sustainability rating system.

H. Light Pollution: Light that extends beyond its source such that the additional light is wasted in an unwanted area or in an area where it inhibits view of the night sky

I. Recycled Content Materials: Products that contain pre-consumer or post-consumer materials as all or part of their feedstock

J. Post-Consumer Recycled Content: The percentage by weight of constituent materials that have been recovered or otherwise diverted from the solid-waste stream after consumer use

K. Pre-Consumer Recycled Content: Materials that have been recovered or otherwise diverted from the solid-waste stream during the manufacturing process. Pre-consumer content must be material that would not have otherwise entered the waste stream as per Section 5 of the FTC Act, Part 260 "Guidelines for the Use of Environmental Marketing Claims": www.ftc.gov/bcp/grnrule/guides980427

L. Regional Materials: Materials that are extracted, harvested, recovered, and manufactured within a radius of 250 miles (400 km) from the Project site

M. Salvaged or Reused Materials: Materials extracted from existing buildings in order to be reused in other buildings without being manufactured

N. Sealant: Any material that fills and seals gaps between other materials

O. Type 1 Finishes: Materials and finishes which have a potential for short-term levels of off gassing from chemicals inherent in their manufacturing process, or which are applied in a form requiring vehicles or carriers for spreading which release a high level of particulate matter in the process of installation and/or curing.

P. Type 2 Finishes: "Fuzzy" materials and finishes which are woven, fibrous, or porous in nature and tend to adsorb chemicals offgas

Q. Volatile Organic Compounds (VOCs): Any compound of carbon, excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate, which participates in atmospheric photochemical reactions. Compounds that have negligible photochemical reactivity, listed in EPA 40 CFR 51.100(s), are also excluded from this regulatory definition.

**1.5 SUBMITTALS**

A. Sustainable Design Submittals:

1. Alternative Transportation: Provide manufacturer's cut sheets for all bike racks installed on site, including the total number of bicycle storage slots provided. Also, provide manufacturer's cut sheets for any alternative-fuel refueling stations installed on site, including fueling capacity information for an 8-hour period.
2. Heat Island Effect:
   a. Site Paving: Provide manufacturer's cut sheets for all impervious paving materials, highlighting the Solar Reflectance Index (SRI) of the material. Also, provide cut sheets for all pervious paving materials.
   b. Roofing Materials: Submittals for roofing materials must include manufacturer's cut sheets or product data highlighting the Solar Reflectance Index (SRI) of the material.
3. Exterior Lighting Fixtures: Submittals must include cut sheets with manufacturer's data on initial fixture lumens above 90° from nadir for all exterior lighting fixtures, and, for parking lot lighting, verification that the fixtures are classified by the IESNA as "full cutoff" (FCO); OR provide documentation that exterior luminaires are IDA-Approved as Dark-Sky Friendly by the International Dark Sky Association (IDA) Fixture Seal of Approval Program.
4. Irrigation Systems: Provide manufacturer's cut sheets for all permanent landscape irrigation system components and for any rainwater harvesting system components, such as cisterns.

5. Water Conserving Fixtures: Submittals must include manufacturer's cut sheets for all water-consuming plumbing fixtures and fittings (toilets, urinals, faucets, showerheads, etc.) highlighting maximum flow rates and/or flush rates. Include cut sheets for any automatic faucet-control devices.
6. Process Water Use: Provide manufacturer's cut sheets for all water-consuming commercial equipment (clothes washers, dishwashers, ice machines, etc.), highlighting water consumption performance. Include manufacturer's cut sheets or product data for any cooling towers, highlighting water consumption estimates, water use reduction measures, and corrosion inhibitors.

7. Elimination of CFCs AND HCFCs: Provide manufacturer's cut sheets for all cooling equipment with manufacturer's product data, highlighting refrigerants; provide manufacturer's cut sheets for all fire-suppression equipment, highlighting fire-suppression agents; provide manufacturer's cut-sheets for all polystyrene insulation (XPS) and closed-cell spray foam polyurethane insulation, highlighting the blowing agent(s).
8. Appliances and Equipment: Provide copies of manufacturer's product data for all Energy Star eligible equipment and appliances, including office equipment, computers and printers, electronics, and commercial food service equipment (excluding HVAC and lighting components), verifying compliance with EPA's Energy Star program.
9. On-Site Renewable Energy Systems: Provide cut sheets and manufacturer's product data for all on-site renewable energy generating components and equipment, including documentation of output capacity.
10. Measurement and Verification Systems: Provide cut sheets and manufacturer's product data for all controls systems, highlighting electrical metering and trending capability components.
11. Salvaged or Reused Materials: Provide documentation that lists each salvaged or reused material, the source or vendor of the material, the purchase price, and the replacement cost if greater than the purchase price.
12. Recycled Content: Submittals for all materials with recycled content (excluding MEP systems equipment and components) must include the following documentation: Manufacturer's product data, product literature, or a letter from the manufacturer verifying the percentage of post-consumer and pre-consumer recycled content (by weight) of each material or product
    a. An electronic spreadsheet that tabulates the Project's total materials cost and combined recycled content value (defined as the sum of the post-consumer recycled content value plus one-half of the pre-consumer recycled content value) expressed as a percentage of total materials cost. This spreadsheet shall be submitted every third month with the Contractor's Certificate and Application for Payment. It should indicate, on an ongoing basis,

line items for each material, including cost, pre-consumer recycled content, post-consumer recycled content, and combined recycled content value.

13. Regional Materials: Submittals for all products or materials expected to contribute to the regional calculation (excluding MEP systems equipment and components) must include the following documentation:
    a. Cost of each material or product, excluding cost of labor and equipment for installation
    b. Location of product manufacture and distance from point of manufacture to the Project Site
    c. Location of point of extraction, harvest, or recovery for each raw material in each product and distance from the point of extraction, harvest, or recovery to the Project Site
    d. Manufacturer’s product data, product literature, or a letter from the manufacturer verifying the location and distance from the Project Site to the point of manufacture for each regional material
    e. Manufacturer’s product data, product literature, or a letter from the manufacturer verifying the location and distance from the Project Site to the point of extraction, harvest, or recovery for each regional material or product, including, at a minimum, gravel and fill, planting materials, concrete, masonry, and GWB
    f. An electronic spreadsheet that tabulates the Project’s total materials cost and regional materials value, expressed as a percentage of total materials cost. This spreadsheet shall be submitted every third month with the Contractor’s Certificate and Application for Payment. It should indicate on an ongoing basis, line items for each material, including cost, location of manufacture, distance from manufacturing plant to the Project Site, location of raw material extraction, and distance from extraction point to the Project Site.
14. Biobased Products:
    a. Rapidly Renewable Products: Submittals must include written documentation from the manufacturer declaring that rapidly renewable materials are made from plants harvested within a ten-

year or shorter cycle and must indicate the percentage (by weight) of these rapidly renewable components contained in the candidate products, along with the costs of each of these materials, excluding labor and delivery costs.

b. Certified Wood: Submittals for all wood-based materials must include a statement indicating the cost of each product containing FSC Certified wood, exclusive of labor and delivery costs, and third party verification of certification from one of the following:

1) Documentation from the supplier verifying that 100% of the wood-based content originates from SFI third-party certified forest lands, identifying the company or companies that performed the SFI third-party certification for both the forest land management and the certified product content.

15. Outdoor Air Delivery Monitoring: Provide manufacturer’s cut sheets highlighting the installed carbon dioxide monitoring system components and sequence of controls shop drawing documentation, including CO2 differential set-points and alarm capabilities.

16. Interior Adhesives and Sealants: Submittals for all field-applied adhesives and sealants, which have a potential impact on indoor air, must include manufacturer’s MSDSs or other Product Data highlighting VOC content.

a. Provide manufacturers’ documentation verifying all adhesives used to apply laminates, whether shop-applied or field-applied, contain no urea-formaldehyde.

17. Interior Paints and Coatings: Submittals for all field-applied paints and coatings, which have a potential impact on indoor air, must include manufacturer’s MSDSs or other Product Data highlighting VOC content

18. Exterior Paints and Coatings: Submittals for all field-applied paints and coatings, which have a potential impact on ambient air quality, must include manufacturer’s MSDSs or other manufacturer’s Product Data highlighting VOC content.

19. Floorcoverings:

a. Carpet Systems: Submittals for all carpet must include the following:

1) A copy of an assessment from the Building for Environmental and Economic Sustainability (BEES) software model, either Version 3.0 or 4.0, with parameters of the model set as described by this specification section.
2) Manufacturer's product data verifying that all carpet systems meet or exceed the testing and product requirements of the Carpet and Rug Institute Green Label Plus program.

b. Engineered Wood Flooring: Submittals for all engineered wood flooring must include manufacturer's product data verifying certification under either the Greenguard or FloorScore indoor emissions testing program.

20. Composite Wood and Agrifiber Binders: Submittals for all composite wood and agrifiber products (including but not limited to particleboard, wheatboard, strawboard, agriboard products, engineered wood components, solid-core wood doors, OSB, MDF, and plywood products) must include manufacturer's product data verifying that these products contain no urea-formaldehyde resins.
21. Systems Furniture and Seating: Provide manufacturer's product data verifying that all systems furniture and seating products meet the requirements of one of the following:
    a. Greenguard certification
    b. SCS Indoor Advantage certification
    c. SCS Indoor Advantage Gold certification
    d. BIFMA Standard X7.1-2005, as tested to BIFMA method M7.1-2005 and as verified by an independent laboratory
    d. Calculated indoor air concentration limits for furniture systems and seating determined by the U.S. EPA's Environmental Technology Verification Large Chamber Test Protocol for Measuring Emissions of VOCs and Aldehydes (September 1999) testing protocol as conducted in an independent air quality testing laboratory
22. Entryway Systems: Provide manufacturer's cut sheets for all walk-off systems installed to capture particulates, including permanently installed grates, grilles, slotted systems, direct glue-down walk-off mats, and non-permanent roll-out mats.

23. Air Filtration: Provide manufacturer's cut sheets and product data highlighting the following:
    a. Minimum Efficiency Reporting Value (MERV) for filtration media in all air handling units (AHUs) per ASHRAE HVAC Design Manual for Hospitals and Clinics.
    b. Minimum Efficiency Reporting Value (MERV) for filtration media installed at return air grilles during construction if permanently installed AHUs are used during construction. See above for requirements
24. Mercury in Lighting: Provide manufacturer's cut sheets or product data for all fluorescent or HID lamps highlighting mercury content.
25. Lighting Controls: Provide manufacturer's cut sheets and shop drawing documentation highlighting all lighting controls systems components.
26. Thermal Comfort Controls: Provide manufacturer's cut sheets and shop drawing documentation highlighting all thermal comfort-control systems components.
27. Blended Cement: It is the intent of this specification to reduce $CO_2$ emissions and other environmentally detrimental effects resulting from the production of portland cement by requiring that all concrete mixes, in aggregate, utilize blended cement mixes to displace portland cement as specified in Section 03 30 00, CONCRETE typically included in conventional construction. Provide the following submittals:
    a. Copies of concrete design mixes for all installed concrete
    b. Copies of typical regional baseline concrete design mixes for all compressive strengths used on the Project
    c. Quantities in cubic yards of each installed concrete mix
28. Gypsum Wall Board: Provide manufacturer's cut sheets or product data verifying that all gypsum wallboard products are moisture and mold-resistant.
29. Fiberglass Insulation: Provide manufacturer's cut sheets or product data verifying that fiberglass batt insulation contains no urea-formaldehyde.
30. Duct Acoustical Insulation: Provide manufacturer's cut sheets or product data verifying that mechanical sound insulation materials in

air distribution ducts consists of an impervious, non-porous coatings that prevent dust from accumulating in the insulating materials.

31. Green Housekeeping: Provide documentation that all cleaning products and janitorial paper products meet the VOC limits and content requirements of this specification section.

B. Project Materials Cost Data: Provide a spreadsheet in an electronic file indicating the total cost for the Project and the total cost of building materials used for the Project, as follows:

1. Not more than 60 days after the Preconstruction Meeting, the General Contractor shall provide to the Owner and Architect a preliminary schedule of materials costs for all materials used for the Project organized by specification section. Exclude labor costs and all mechanical, electrical, and plumbing (MEP) systems materials and labor costs. Include the following:
   a. Identify each reused or salvaged material, its cost, and its replacement value.
   b. Identify each recycled-content material, its post-consumer and pre-consumer recycled content as a percentage the product’s weight, its cost, its combined recycled content value (defined as the sum of the post-consumer recycled content value plus one-half of the pre-consumer recycled content value), and the total combined recycled content value for all materials as a percentage of total materials costs.
   c. Identify each regional material, its cost, its manufacturing location, the distance of this location from the Project site, the source location for each raw material component of the material, the distance of these extraction locations from the Project site, and the total value of regional materials as a percentage of total materials costs.
   d. Identify each biobased material, its source, its cost, and the total value of biobased materials as a percentage of total materials costs. Also provide the total value of rapidly renewable materials (materials made from plants that are harvested in less than a 10-year cycle) as a percentage of total materials costs.

e. Identify each wood-based material, its cost, the total wood-based materials cost, each FSC Certified wood material, its cost, and the total value of Certified wood as a percentage of total wood-based materials costs.

2. Provide final versions of the above spreadsheets to the Owner and Architect not more than 14 days after Substantial Completion.

C. Construction Waste Management: See Section 01 74 19 "Construction Waste Management" for submittal requirements.

D. Construction Indoor Air Quality (IAQ) Management: Submittals must include the following:

1. Not more than 30 days after the Preconstruction Meeting, prepare and submit for the Architect and Owner's approval, an electronic copy of the draft Construction IAQ Management Plan in an electronic file including, but not limited to, descriptions of the following:

2. Instruction procedures for meeting or exceeding the minimum requirements of the Sheet Metal and Air Conditioning National Contractors Association (SMACNA) IAQ Guidelines for Occupied Buildings Under Construction, 1995, Chapter 3, including procedures for HVAC Protection, Source Control, Pathway Interruption, Housekeeping, and Scheduling

a. Instruction procedures for protecting absorptive materials stored on-site or installed from moisture damage

b. Schedule of submission to Architect of photographs of on-site construction IAQ management measures such as protection of ducts and on-site stored oil installed absorptive materials

c. Instruction procedures if air handlers must be used during construction, including a description of filtration media to be used at each return air grille

d. Instruction procedure for replacing all air-filtration media immediately prior to occupancy after completion of construction, including a description of filtration media to be used at each air handling or air supply unit

3. Not more than 30 days following receipt of the approved draft CIAQMP, submit an electronic copy of the approved CIAQMP in an electronic file, along with the following:

a. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for all filtration media to be installed at return air grilles during construction if permanently installed AHUs are used during construction.
b. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for filtration media in all air handling units (AHUs).

4. Not more than 14 days after Substantial Completion provide the following:
   a. Documentation verifying required replacement of air filtration media in all air handling units (AHUs) after the completion of construction and prior to occupancy and, if applicable, required installation of filtration during construction.
   b. Minimum of 18 Construction photographs: Six photographs taken on three different occasions during construction of the SMACNA approaches employed, along with a brief description of each approach, documenting implementation of the IAQ management measures, such as protection of ducts and on-site stored or installed absorptive materials.
   c. A copy of the report from testing and inspecting agency documenting the results of IAQ testing, demonstrating conformance with IAQ testing procedures and requirements defined in Section 01 81 09 "Testing for Indoor Air Quality."

E. Commissioning: See Section 01 91 00 "General Commissioning Requirements" for submittal requirements.

F. Sustainable Design Progress Reports: Concurrent with each Application for Payment, submit reports for the following:
   1. Construction Waste Management: Waste reduction progress reports and logs complying with the requirements of Section 01 74 19 "Construction Waste Management."
   2. Construction IAQ Management: See details below under Section 3.2 Construction Indoor Air Quality Management for Construction IAQ management progress report requirements.

**1.6 QUALITY ASSURANCE**

A. Preconstruction Meeting: After award of Contract and prior to the commencement of the Work, schedule and conduct meeting with Owner,

Architect, and all Subcontractors to discuss the Construction Waste Management Plan, the required Construction Indoor Air Quality (IAQ) Management Plan, and all other Sustainable Design Requirements. The purpose of this meeting is to develop a mutual understanding of the Project's Sustainable Design Requirements and coordination of the Contractor's management of these requirements with the Contracting Officer and the Construction Quality Manager.

B. Construction Job Conferences: The status of compliance with the Sustainable Design Requirements of these specifications will be an agenda item at all regular job meetings conducted during the course of work at the site.

**PART 2 - PRODUCTS**

**2.1 PRODUCT ENVIRONMENTAL REQUIREMENTS**

A. Site Clearing: Topsoil shall be provided by the Contractor from on-site material which has been stockpiled for reuse. Off-site borrow should only be used when on-site sources are exhausted. Chip and/or compost on site all vegetated material identified for removal.

B. Do not burn rubbish, organic matter, etc. or any material on the site. Dispose of legally in accordance with Specifications Sections 01 74 19.

C. Site Paving: All site impervious paving must be light colored, with a Solar Reflectance Index (SRI) of at least 29.

D. Roofing Materials: All roofing systems, other than vegetated roof systems, must comply with the following requirements:

1. Low-Sloped roofing less than or equal to 2:12 slope must have an SRI of at least 78.
2. Steep-Sloped roofing greater than 2:12 slope must have an SRI of at least 29.
3. Roofing Materials: Light-colored, reflective, and high-emissivity roofing helps to reduce localized heat build-up from roof surfaces that contribute to the urban heat island effect.

E. Exterior Lighting Fixtures:

1. All exterior luminaires must emit 0% of the total initial designed fixture lumens at an angle above 90° from nadir and/or meet the requirements of the Dark Sky certification program.

2. Exterior lighting cannot exceed 80% of the lighting power densities defined by ASHRAE/IESNA Standard 90.1-2004, Exterior Lighting Section, without amendments.
3. No lighting of building facades or landscape features is permitted.

F. Herbicides and Pest Control: Herbicides shall not be permitted, and pest control measures shall utilize EPA-registered biopesticides only.

G. Irrigation Systems: Any permanent landscape irrigation systems must be supplied entirely by collected rainwater or graywater and must be comprised of below-grade drip emitters controlled by moisture sensors. Timer controls shall not be permitted.

H. Water-Conserving Fixtures: Plumbing fixtures and fittings shall use in aggregate at least 40% less water than the water use baseline calculated for the building after meeting the Energy Policy Act of 1992 fixture performance requirements. Flow and flush rates shall not exceed the following:

1. Toilets: no more than 1.3 gallons per flush, otherwise be dual flush 1.6/0.8 gallons per flush, and have documented bowl evacuation capability per MaP testing of at least 400 grams
2. Urinals: Water sense rated with no more than 0.125 gallons per flush or use where considered appropriate.
3. Lavatory Faucets: 0.5 gpm with automatic faucet controls
4. Kitchen Sink Lavatories: 2.2 gpm
5. Showerheads: no more than 1.5gpm

I. Process Water Use: Employ strategies that in aggregate result in 20% less water use than the process water use baseline for the building after meeting the commercial equipment and HVAC performance requirements as listed in the Table below. For equipment not addressed by EPACT 2005 or the list below, additional equipment performance requirements may be proposed provided documentation supporting the proposed benchmark or industry standard is submitted.

1. Clothes Washer: 7.5 gallons/cubic foot/cycle
2. Dishwasher with Racks: 1.0 gallons/rack
3. Ice Machine: 20 gallons/100 pounds ice for machines making over 175 pounds of ice per day; 30 gallons/100 pounds ice for machines making less than 175 ice per day. Avoid water-cooled machines.
4. Food Steamer: 2 gallons/hour. Use only boilerless steamers.

5. Pre-Rinse Spray Valves: 1.4 gallons/minute
6. Kitchen Pot-Washing Sinks: 2.2 gallons/minute
7. Cooling Towers: 2.3 gallons/ton-hr. water loss

J. Elimination of CFCs AND HCFCs:
1. Ozone Protection: Base building cooling equipment shall contain no refrigerants other than the following: HCFC-123, HFC-134a, HFC-245fa, HFC-407c, or HFC 410a.
2. Fire suppression systems may not contain ozone-depleting substances.
3. Extruded polystyrene insulation (XPS) and closed-cell spray foam polyurethane insulation shall not be manufactured with hydrochlorofluorocarbon (HCFC) blowing agents.

K. Appliances and Equipment: All Energy Star eligible equipment and appliances, including office equipment, computers and printers, electronics, and commercial food service equipment (excluding HVAC and lighting components), shall be qualified by EPA’s Energy Star program.

L. HVAC Distribution Efficiency:
1. All duct systems shall be constructed of galvanized sheet metal, aluminum, or stainless steel as deemed appropriate based on the application requirements. No fiberglass duct board shall be permitted.
2. All medium- and high-pressure ductwork systems shall be pressure-tested in accordance with the current SMACNA standards.
3. All ductwork shall be externally insulated. No interior duct liner shall be permitted.
4. Where possible, all air terminal connections shall be hard-connected with sheet metal ductwork. If flexible ductwork is used, no flexible duct extension shall be more than six feet in length.
5. All HVAC equipment shall be isolated from the ductwork system with flexible duct connectors to minimize the transmittance of vibration.
6. All supply and return air branch ducts shall include the appropriate style of volume damper. Air terminal devices such as grilles, registers, and diffusers shall be balanced at duct branch dampers, not at terminal face.

M. Measurement and Verification: Install controls and monitoring devices as required by MEP divisions order to comply with International Performance Measurement & Verification Protocol (IPMVP), Volume III:

Concepts and Options for Determining Energy Savings in New Construction, April 2003, Option D.

1. The IPMVP provides guidance on situation-appropriate application of measurement and verification strategies.

N. Salvaged or Reused materials: There shall be no substitutions for specified salvaged and reused materials and products.

1. Salvaged materials: Use of salvaged materials reduces impacts of disposal and manufacturing of replacements.

O. Recycled Content of Materials:

1. Provide building materials with recycled content such that post-consumer recycled content value plus half the pre-consumer recycled content value constitutes a minimum of 30% of the cost of materials used for the Project, exclusive of all MEP equipment, labor, and delivery costs. The Contractor shall make all attempts to maximize the procurement of materials with recycled content.
   a. e post-consumer recycled content value of a material shall be determined by dividing the weight of post-consumer recycled content by the total weight of the material and multiplying by the cost of the material.
   b. Do not include mechanical and electrical components in the calculations.
   c. Do not include labor and delivery costs in the calculations.
   d. Recycled content of materials shall be defined according to the Federal Trade Commission's "Guide for the Use of Environmental Marketing Claims," 16 CFR 260.7 (e).
   e. Utilize all on-site existing paving materials that are scheduled for demolition as granulated fill, and include the cost of this material had it been purchased in the calculations for recycled content value.
   f. The materials in the following list must contain the minimum recycled content indicated:

| **Category** | **Minimum Recycled Content** |
|---|---|
| Compost/mulch | 100% post-consumer |
| Asphaltic Concrete Paving | 25% post-consumer |

| | |
|---|---|
| Cast-in-Place Concrete | 6% pre-consumer |
| CMU: Gray Block | 20% pre-consumer |
| Steel Reinforcing Bars | 90% combined |
| Structural Steel Shapes | 90% combined |
| Steel Joists | 75% combined |
| Steel Deck | 75% combined |
| Steel Fabrications | 60% combined |
| Steel Studs | 30% combined |
| Steel Roofing | 30% post-consumer |
| Aluminum Fabrications | 35% combined |
| Rigid Insulation | 20% pre-consumer |
| Batt insulation | 30% combined |

- - - E N D - - -

# SECTION 01 91 00

# GENERAL COMMISSIONING REQUIREMENTS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS shall form the basis of the construction phase commissioning process and procedures. The Commissioning Agent shall add, modify, and refine the commissioning procedures, as approved by the Department of Veterans Affairs (VA), to suit field conditions and actual manufacturer's equipment, incorporate test data and procedure results, and provide detailed scheduling for all commissioning tasks.

B. Various sections of the project specifications require equipment startup, testing, and adjusting services. Requirements for startup, testing, and adjusting services specified in the Division 7, Division 8, Division 23, Division 26, Division 27, Division 28, and Division 31 series sections of these specifications are intended to be provided in coordination with the commissioning services and are not intended to duplicate services. The Contractor shall coordinate the work required by individual specification sections with the commissioning services requirements specified herein.

C. Where individual testing, adjusting, or related services are required in the project specifications and not specifically required by this commissioning requirements specification, the specified services shall be provided and copies of documentation, as required by those specifications shall be submitted to the VA and the Commissioning Agent to be indexed for future reference.

D. Where training or educational services for VA are required and specified in other sections of the specifications, including but not limited to Division 7, Division 8, Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 series sections of the specification, these services are intended to be provided in addition to the training and educational services specified herein.

E. Commissioning is a systematic process of verifying that the building systems perform interactively according to the construction documents and the VA’s operational needs. The commissioning process shall

encompass and coordinate the system documentation, equipment startup, control system calibration, testing and balancing, performance testing and training. Commissioning during the construction, and post-occupancy phases is intended to achieve the following specific objectives according to the contract documents:

1. Verify that the applicable equipment and systems are installed in accordance with the contact documents and according to the manufacturer's recommendations.
2. Verify and document proper integrated performance of equipment and systems.
3. Verify that Operations & Maintenance documentation is complete.
4. Verify that all components requiring servicing can be accessed, serviced and removed without disturbing nearby components including ducts, piping, cabling or wiring.
5. Verify that the VA’s operating personnel are adequately trained to enable them to operate, monitor, adjust, maintain, and repair building systems in an effective and energy-efficient manner.
6. Document the successful achievement of the commissioning objectives listed above.

F. The commissioning process does not take away from or reduce the responsibility of the Contractor to provide a finished and fully functioning product.

G. The Commissioning Agent, both the firm and individual designated as the Commissioning Agent, shall be certified by at least one of the following entities: the National Environmental Balancing Bureau (NEBB), the Associated Air Balance Council Commissioning Group (AABC), and the Building Commissioning Association (BCA). Certification(s) shall be valid and active. Proof of certification(s) shall be submitted to the Contracting Officer and the Resident Engineer three (3) calendar days after the Notice to Proceed.

**1.2 CONTRACTUAL RELATIONSHIPS**

A. For this construction project, the Department of Veterans Affairs contracts with a Contractor to provide construction services. The contracts are administered by the VA Contracting Officer and the Resident Engineer as the designated representative of the Contracting Officer. On this project, the authority to modify the contract in any

way is strictly limited to the authority of the Contracting Officer and the Resident Engineer.

B. In this structure, only two contract parties are recognized and communications on contractual issues are strictly limited to VA Resident Engineer and the Contractor. It is the practice of the VA to require that communications between other parties to the contracts (Subcontractors and Vendors) be conducted through the Resident Engineer and Contractor. It is also the practice of the VA that communications between other parties of the project (Commissioning Agent and Architect/Engineer) be conducted through the Resident Engineer.

C. Whole Building Commissioning is a process that relies upon frequent and direct communications, as well as collaboration between all parties to the construction process. By its nature, a high level of communication and cooperation between the Commissioning Agent and all other parties (Architects, Engineers, Subcontractors, Vendors, third party testing agencies, etc) is essential to the success of the Commissioning effort.

D. With these fundamental practices in mind, the commissioning process described herein has been developed to recognize that, in the execution of the Commissioning Process, the Commissioning Agent must develop effective methods to communicate with every member of the construction team involved in delivering commissioned systems while simultaneously respecting the exclusive contract authority of the Contracting Officer and Resident Engineer. Thus, the procedures outlined in this specification must be executed within the following limitations:

1. No communications (verbal or written) from the Commissioning Agent shall be deemed to constitute direction that modifies the terms of any contract between the Department of Veterans Affairs and the Contractor.
2. Commissioning Issues identified by the Commissioning Agent will be delivered to the Resident Engineer and copied to the designated Commissioning Representatives for the Contractor and subcontractors on the Commissioning Team for information only in order to expedite the communication process. These issues must be understood as the professional opinion of the Commissioning Agent and as suggestions for resolution.

3. In the event that any Commissioning Issues and suggested resolutions are deemed by the Resident Engineer to require either an official interpretation of the construction documents or require a modification of the contract documents, the Contracting Officer or Resident Engineer will issue an official directive to this effect.
4. All parties to the Commissioning Process shall be individually responsible for alerting the Resident Engineer of any issues that they deem to constitute a potential contract change prior to acting on these issues.
5. Authority for resolution or modification of design and construction issues rests solely with the Contracting Officer or Resident Engineer, with appropriate technical guidance from the Architect/Engineer and/or Commissioning Agent.

**1.3 RELATED WORK**

A. Section 01 00 00 GENERAL REQUIREMENTS.
B. Section 07 08 00 FACILITY EXTERIOR CLOSURE COMMISSIONING.
C. Section 21 08 00 COMMISSIONING OF FIRE PROTECTION SYSTEMS.
E. Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.
F. Section 26 08 00 COMMISSIONING OF ELECTRICAL SYSTEMS.
G. Section 27 08 00 COMMISSIONING OF COMMUNICATIONS SYSTEMS.
H. Section 28 08 00 COMMISSIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

**1.4 SUMMARY**

A. This Section includes general requirements that apply to implementation of commissioning without regard to systems, subsystems, and equipment being commissioned.
B. The commissioning activities have been developed to support the VA requirements to meet guidelines for Federal Leadership in Environmental, Energy, and Economic Performance.
C. The commissioning activities have been developed to support the United States Green Building Council (USGBC) LEED ™ rating program and to support delivery of project performance in accordance with the VA requirements developed for the project.
   1. Commissioning activities and documentation for the LEED™ section on “Energy and Atmosphere” and the prerequisite of “Fundamental Building Systems Commissioning.”

2. Commissioning activities and documentation for the LEED™ section on "Energy and Atmosphere" requirements for the "Enhanced Building System Commissioning" credit.
3. Activities and documentation for the LEED™ section on "Measurement and Verification" requirements for the Measurement and Verification credit.

D. The commissioning activities have been developed to support the Green Buildings Initiative Green Globes rating program and to support delivery of project performance in accordance with the VA requirements developed for the project.

**1.5 DEFINITIONS**

A. Architect: Includes Architect identified in the Contract for Construction between the Department of Veterans Affairs and Contractor, plus consultant/design professionals responsible for design of fire suppression, plumbing, HVAC, controls for HVAC systems, electrical, communications, electronic safety and security, as well as other related systems.

B. CxA: Commissioning Agent.

C. Commissioning Plan: a document that is an overall plan that outlines the commissioning process, commissioning team responsibilities, schedule for commissioning activities, and commissioning documents.

D. Commissioning Issue: a condition in the installation or function of a component, piece of equipment or system that affects the system operations, maintenance, and/or repair.

E. Commissioning Observation: a condition in the installation or function of a component, piece of equipment or system that may not be in compliance with the Contract Documents, or may not be in compliance with the manufacturer's installation instruction, or may not be in compliance with generally accepted industry standards.

F. Systems Functional Performance Test: a test, or tests, of the dynamic function and operation of equipment and systems using manual (direct observation) or monitoring methods. Systems Functional Performance Testing is the dynamic testing of systems (rather than just components) under full operation (e.g., the chiller pump is tested interactively with the chiller functions to see if the pump ramps up and down to maintain the differential pressure setpoint). Systems are tested under various modes, such as during low cooling or heating loads, high loads,

component failures, unoccupied, varying outside air temperatures, fire alarm, power failure, etc. The systems are run through all the control system's sequences of operation and components are verified to be responding as the sequences state. Traditional air or water test and balancing (TAB) is not Systems Functional Performance Testing, in the commissioning sense of the word. TAB's primary work is setting up the system flows and pressures as specified, while System Functional Performance Testing is verifying that the system has already been set up properly and is functioning in accordance with the Construction Documents. The Commissioning Agent develops the Systems Functional Performance Test Procedures in a sequential written form, coordinates, witnesses, and documents the actual testing. Systems Functional Performance Testing is performed by the Contractor. Systems Functional Performance Tests are performed after startups, control systems are complete and operational, TAB functions and Pre-Functional Checklists are complete.

G. System: A system is defined as the entire set of components, equipment, and subsystems which must be coordinated to work together during normal operation to produce results for which the system is designed. For example, air conditioning supply air is only one component of an entire system which provides comfort conditions for a building. Other related components are return air, exhaust air, steam supply, chilled water supply, refrigerant supply, hot water supply, controls and electrical service, etc. Another example of a system which involves several components of different disciplines is a boiler installation. Efficient and acceptable boiler operation depends upon the coordination and proper operation of the fuel supply, combustion air, controls, steam, feedwater supply, condensate return and other related components.

H. Pre-Functional Checklist: a list of items provided by the Commissioning Agent to the Contractor that require inspection and elementary component tests conducted to verify proper installation of equipment. Pre-Functional Checklists are primarily static inspections and procedures to prepare the equipment or system for initial operation (e.g., belt tension, oil levels OK, labels affixed, gages in place, sensors calibrated, etc.). However, some Pre-Functional Checklist items entail simple testing of the function of a component, a piece of

equipment or system (such as measuring the voltage imbalance on a three-phase pump motor of a chiller system). The term "Pre-Functional" refers to before Systems Functional Performance Testing. Pre-Functional Checklists augment and are combined with the manufacturer's startup checklist and the Contractor's Quality Control checklists.

I. Seasonal Functional Performance Testing: a test or tests that are deferred until the system will experience conditions closer to their design conditions.

J. VA: Includes the Contracting Officer, Resident Engineer, or other authorized representative of the Department of Veterans Affairs.

K. TAB: Testing, Adjusting, and Balancing.

**1.6 SYSTEMS TO BE COMMISSIONED**

A. Commissioning of a system or systems specified for this project is part of the construction process. Documentation and testing of these systems, as well as training of the VA's Operation and Maintenance personnel, is required in cooperation with the VA and the Commissioning Agent.

B. The following systems will be commissioned as part of this project:

1. Facility exterior closure (Division 7 and Division 8) to include all or a portion of:
   a. Roofs (Asphalt shingles, slate shingles, wood shingles, clay roof tiles, built-up bituminous, modified bituminous, EPDM, PVC, fluid-applied, sprayed polyurethane, flashing & sheet metal, metal roofing, roof specialties, and roof accessories)
   b. Exterior Insulation and Finish Systems (EIFS)
   c. Curtain Wall Systems (Mullions, glazing, and sealing)
   d. Exterior Doors (Revolving, glass leaf, emergency exit, and service)
   e. Exterior Windows (Aluminum, steel, glazing, storm)
   f. Louvers and Vents
   g. Sealants (Caulking, mechanical seals, and wind and vapor barriers)
2. HVAC (Division 23) to include all or a portion of:
   a. Air Handling Systems (Fans, motors, Variable Speed Drives, cooling coils and control valves, heating coils and control valves, filters, dampers, safeties such as smoke detectors or

freezestats and damper end switches, controls, gages, and vibration isolation).

b. Dehumidification Systems (Energy recovery devices – such as enthalpy wheels, fans, motors, Variable Speed Drives, cooling coils and control valves, heating coils and control valves, filters, dampers, safeties, controls, gages, and vibration isolation).

c. Condensate Return Systems (Condensate receivers and transfer pumps, motors, controls, pump alternator, alarms and instrumentation, deaerators, boiler feed pumps and motors, safeties).

d. Exhaust Fans (Fan, motor, Variable Speed Drives, controls and safeties).

e. Direct Digital Control System (BACnet or similar Local Area Network (LAN), Operator Work Station hardware and software, building controller hardware and software, terminal unit controller hardware and software, all sequences of operation, system accuracy and response time).

f. Room Pressurization Equipment (Pressure sensors, terminal units/dampers, and controls and alarms).

g. Fuel Delivery and Storage Systems for Boilers and Standby Generators (Fuel level monitoring/controls/alarms, transfer pumps and motors, leak detection monitoring/alarms, and fill systems)

3. Electrical (Division 26) to include all or a portion of:

a. Utility Service Entrance Switchgear (Fuses and circuit breaker settings, metering, mimic diagram, gages, and controls).

b. Standby Generator Systems (Automatic transfer switches, fuel delivery pumps and motors, battery charging and instrumentation, muffler and exhaust system, and vibration isolation).

c. Generator Paralleling Switchboards (Automatic transfer switches, instrumentation, metering and gages, and controls).

d. Generator Power Distribution Systems (Fuses and circuit breaker settings, metering, gages, and controls).

e. Utility Power Unit Substations (Transformers and tap settings, fuses and circuit breaker settings, metering, gages, and controls).

f. Generator Power Unit Substations (Transformers and tap settings, fuses and circuit breaker settings, metering, gages, and controls).
g. Automatic Transfer Switches (Test with associated generator).
h. Normal Power Distribution Systems (Grounding tests, coordination study review, major circuit breaker settings, meters and gages, and controls).
i. Life Safety Power Distribution Systems (Automatic transfer on loss of normal power, grounding tests, coordination study review, major circuit breaker settings, meters and gages, and controls).
j. Critical Power Distribution Systems (Automatic transfer on loss of normal power, grounding tests, coordination study review, major circuit breaker settings, meters and gages, and controls).
k. Essential Equipment Power Distribution Systems (Automatic transfer on loss of normal power, grounding tests, coordination study review, major circuit breaker settings, meters and gages, and controls).
l. Lighting Controls (Control system hardware and software, scene settings, zone settings, occupancy sensor interface, and unoccupied cycle control).
m. Uninterruptible Power Supply Systems and UPS Power Distribution Systems (Battery chargers, static and dynamic power generators – i.e. inverters, MG sets, metering and controls, system power displays, and distribution panel circuit breakers).

4. Communications (Division 27) to include all or a portion of:
   a. Facility Telecommunications and Data Distribution Systems.
   b. Public Address and Mass Notification Systems (Amplifiers and head-end hardware, speaker volume, and background noise – i.e. hiss or similar interference).
   c. Healthcare Intercommunications and Program Systems (Local stations, system hardware and software, and notification signals).
5. Electronic Safety and Security (Division 28)
   a. Fire Detection and Alarm (Master panel and software, addressable units – i.e. pull stations, flow detectors, hear detectors, etc., controls and alarm functions, horns/bells/door releases and other output devices, and fire command center functions – stairwell

communications, stairwell pressurization fan start, mechanical systems shutdowns).

**1.7 COMMISSIONING TEAM**

A. Members Appointed by Contractor:
   1. Contractor: The designated person, company, or entity that plans, schedules and coordinates the commissioning activities for the construction team.
   2. Contractor's Commissioning Representative(s): Individual(s), each having authority to act on behalf of the entity he or she represents, explicitly organized to implement the commissioning process through coordinated actions. The commissioning team shall consist of, but not be limited to, representatives of Contractor, including Project Superintendent and subcontractors, installers, suppliers, and specialists deemed appropriate by the Department of Veterans Affairs (VA) and Commissioning Agent.

B. Members Appointed by VA:
   1. Commissioning Agent: The designated person, company, or entity that plans, schedules, and coordinates the commissioning team to implement the commissioning process. The VA will engage the CxA under a separate contract.
   2. Representatives of the facility user and operation and maintenance personnel.
   3. Architect and engineering design professionals.

**1.8 VA'S COMMISSIONING RESPONSIBILITIES**

A. Appoint an individual, company or firm to act as the Commissioning Agent.

B. Assign operation and maintenance personnel and schedule them to participate in commissioning team activities including, but not limited to, the following:
   1. Coordination meetings.
   2. Training in operation and maintenance of systems, subsystems, and equipment.
   3. Testing meetings.
   4. Witness and assist in Systems Functional Performance Testing.
   5. Demonstration of operation of systems, subsystems, and equipment.

C. Provide the Construction Documents, prepared by Architect and approved by VA, to the Commissioning Agent and for use in managing the

commissioning process, developing the commissioning plan, systems manuals, and reviewing the operation and maintenance training plan.

**1.9 CONTRACTOR'S COMMISSIONING RESPONSIBILITIES**

A. The Contractor shall assign a Commissioning Manager to manage commissioning activities of the Contractor, and subcontractors.

B. The Contractor shall ensure that the commissioning responsibilities outlined in these specifications are included in all subcontracts and that subcontractors comply with the requirements of these specifications.

C. The Contractor shall ensure that each installing subcontractor shall assign representatives with expertise and authority to act on behalf of the subcontractor and schedule them to participate in and perform commissioning team activities including, but not limited to, the following:

1. Participate in commissioning coordination meetings.
2. Conduct operation and maintenance training sessions in accordance with approved training plans.
3. Verify that Work is complete and systems are operational according to the Contract Documents, including calibration of instrumentation and controls.
4. Evaluate commissioning issues and commissioning observations identified in the Commissioning Issues Log, field reports, test reports or other commissioning documents. In collaboration with entity responsible for system and equipment installation, recommend corrective action.
5. Review and comment on commissioning documentation.
6. Participate in meetings to coordinate Systems Functional Performance Testing.
7. Provide schedule for operation and maintenance data submittals, equipment startup, and testing to Commissioning Agent for incorporation into the commissioning plan.
8. Provide information to the Commissioning Agent for developing commissioning plan.
9. Participate in training sessions for VA's operation and maintenance personnel.
10. Provide technicians who are familiar with the construction and operation of installed systems and who shall develop specific test

procedures to conduct Systems Functional Performance Testing of installed systems.

**1.10 COMMISSIONING AGENT'S RESPONSIBILITIES**

A. Organize and lead the commissioning team.

B. Prepare the commissioning plan. See Paragraph 1.11-A of this specification Section for further information.

C. Review and comment on selected submittals from the Contractor for general conformance with the Construction Documents. Review and comment on the ability to test and operate the system and/or equipment, including providing gages, controls and other components required to operate, maintain, and test the system. Review and comment on performance expectations of systems and equipment and interfaces between systems relating to the Construction Documents.

D. At the beginning of the construction phase, conduct an initial construction phase coordination meeting for the purpose of reviewing the commissioning activities and establishing tentative schedules for operation and maintenance submittals; operation and maintenance training sessions; TAB Work; Pre-Functional Checklists, Systems Functional Performance Testing; and project completion.

E. Convene commissioning team meetings for the purpose of coordination, communication, and conflict resolution; discuss status of the commissioning processes. Responsibilities include arranging for facilities, preparing agenda and attendance lists, and notifying participants. The Commissioning Agent shall prepare and distribute minutes to commissioning team members and attendees within five workdays of the commissioning meeting.

F. Observe construction and report progress, observations and issues. Observe systems and equipment installation for adequate accessibility for maintenance and component replacement or repair, and for general conformance with the Construction Documents.

G. Prepare Project specific Pre-Functional Checklists and Systems Functional Performance Test procedures.

H. Coordinate Systems Functional Performance Testing schedule with the Contractor.

I. Witness selected systems startups.

J. Verify selected Pre-Functional Checklists completed and submitted by the Contractor.

K. Witness and document Systems Functional Performance Testing.

L. Compile test data, inspection reports, and certificates and include them in the systems manual and commissioning report.

M. Review and comment on operation and maintenance (O&M) documentation and systems manual outline for compliance with the Contract Documents. Operation and maintenance documentation requirements are specified in Paragraph 1.25, Section 01 00 00 GENERAL REQUIREMENTS.

N. Review operation and maintenance training program developed by the Contractor. Verify training plans provide qualified instructors to conduct operation and maintenance training.

O. Prepare commissioning Field Observation Reports.

P. Prepare the Final Commissioning Report.

Q. Return to the site at 10 months into the 12 month warranty period and review with facility staff the current building operation and the condition of outstanding issues related to the original and seasonal Systems Functional Performance Testing. Also interview facility staff and identify problems or concerns they have operating the building as originally intended. Make suggestions for improvements and for recording these changes in the O&M manuals. Identify areas that may come under warranty or under the original construction contract. Assist facility staff in developing reports, documents and requests for services to remedy outstanding problems.

R. Assemble the final commissioning documentation, including the Final Commissioning Report and Addendum to the Final Commissioning Report.

**1.11 COMMISSIONING DOCUMENTATION**

A. Commissioning Agent's Certification(s): Commissioning Agent shall submit evidence of valid and current certification(s), as required in Section 1.1(G), to the Contracting Officer.

B. Commissioning Plan: A document, prepared by Commissioning Agent, that outlines the schedule, allocation of resources, and documentation requirements of the commissioning process, and shall include, but is not limited, to the following:

1. Plan for delivery and review of submittals, systems manuals, and other documents and reports. Identification of the relationship of these documents to other functions and a detailed description of submittals that are required to support the commissioning processes.

Submittal dates shall include the latest date approved submittals must be received without adversely affecting commissioning plan.

2. Description of the organization, layout, and content of commissioning documentation (including systems manual) and a detailed description of documents to be provided along with identification of responsible parties.
3. Identification of systems and equipment to be commissioned.
4. Schedule of Commissioning Coordination meetings.
5. Identification of items that must be completed before the next operation can proceed.
6. Description of responsibilities of commissioning team members.
7. Description of observations to be made.
8. Description of requirements for operation and maintenance training.
9. Schedule for commissioning activities with dates coordinated with overall construction schedule.
10. Process and schedule for documenting changes on a continuous basis to appear in Project Record Documents.
11. Process and schedule for completing prestart and startup checklists for systems, subsystems, and equipment to be verified and tested.
12. Preliminary Systems Functional Performance Test procedures.

C. Systems Functional Performance Test Procedures: The Commissioning Agent will develop Systems Functional Performance Test Procedures for each system to be commissioned, including subsystems, or equipment and interfaces or interlocks with other systems. Systems Functional Performance Test Procedures will include a separate entry, with space for comments, for each item to be tested. Preliminary Systems Functional Performance Test Procedures will be provided to the VA, Architect/Engineer, and Contractor for review and comment. The Systems Performance Test Procedure will include test procedures for each mode of operation and provide space to indicate whether the mode under test responded as required. Each System Functional Performance Test procedure, regardless of system, subsystem, or equipment being tested, shall include, but not be limited to, the following:

1. Name and identification code of tested system.
2. Test number.
3. Time and date of test.

4. Indication of whether the record is for a first test or retest following correction of a problem or issue.
5. Dated signatures of the person performing test and of the witness, if applicable.
6. Individuals present for test.
7. Observations and Issues.
8. Issue number, if any, generated as the result of test.

D. Pre-Functional Checklists: The Commissioning Agent will prepare Pre-*Functional Checklists. Pre-Functional Checklists shall be completed* and signed by the Contractor, verifying that systems, subsystems, equipment, and associated controls are ready for testing. The Commissioning Agent will spot check Pre-Functional Checklists to verify accuracy and readiness for testing. Inaccurate or incomplete Pre-Functional Checklists shall be returned to the Contractor for correction and resubmission.

E. Test and Inspection Reports: The Commissioning Agent will record test data, observations, and measurements on Systems Functional Performance Test Procedure. The report will also include recommendation for system acceptance or non-acceptance. Photographs, forms, and other means appropriate for the application shall be included with data. Commissioning Agent Will compile test and inspection reports and test and inspection certificates and include them in systems manual and commissioning report.

F. Corrective Action Documents: The Commissioning Agent will document corrective action taken for systems and equipment that fail tests. The documentation will include any required modifications to systems and equipment and/or revisions to test procedures, if any. The Commissioning Agent will witness and document any retesting of systems and/or equipment requiring corrective action and document retest results.

G. Commissioning Issues Log: The Commissioning Agent will prepare and maintain Commissioning Issues Log that describes Commissioning Issues and Commissioning Observations that are identified during the Commissioning process. These observations and issues include, but are not limited to, those that are at variance with the Contract Documents. The Commissioning Issues Log will identify and track issues as they are encountered, the party responsible for resolution, progress toward

resolution, and document how the issue was resolved. The Master Commissioning Issues Log will also track the status of unresolved issues.

1. Creating an Commissioning Issues Log Entry:
   a. Identify the issue with unique numeric or alphanumeric identifier by which the issue may be tracked.
   b. Assign a descriptive title for the issue.
   c. Identify date and time of the issue.
   d. Identify test number of test being performed at the time of the observation, if applicable, for cross reference.
   e. Identify system, subsystem, and equipment to which the issue applies.
   f. Identify location of system, subsystem, and equipment.
   g. Include information that may be helpful in diagnosing or evaluating the issue.
   h. Note recommended corrective action.
   i. Identify commissioning team member responsible for corrective action.
   j. Identify expected date of correction.
   k. Identify person that identified the issue.
2. Documenting Issue Resolution:
   a. Log date correction is completed or the issue is resolved.
   b. Describe corrective action or resolution taken. Include description of diagnostic steps taken to determine root cause of the issue, if any.
   c. Identify changes to the Contract Documents that may require action.
   d. State that correction was completed and system, subsystem, and equipment are ready for retest, if applicable.
   e. Identify person(s) who corrected or resolved the issue.
   f. Identify person(s) verifying the issue resolution.

H. Final Commissioning Report: The Commissioning Agent will document results of the commissioning process, including unresolved issues, and performance of systems, subsystems, and equipment. The Commissioning Report will indicate whether systems, subsystems, and equipment have been properly installed and are performing according to the Contract Documents. This report will be used by the Department of Veterans

Affairs when determining that systems will be accepted. This report will be used to evaluate systems, subsystems, and equipment and will serve as a future reference document during VA occupancy and operation. It shall describe components and performance that exceed requirements of the Contract Documents and those that do not meet requirements of the Contract Documents. The commissioning report will include, but is not limited to, the following:

1. Lists and explanations of substitutions; compromises; variances with the Contract Documents; record of conditions; and, if appropriate, recommendations for resolution. Design Narrative documentation maintained by the Commissioning Agent.
2. Commissioning plan.
3. Pre-Functional Checklists completed by the Contractor, with annotation of the Commissioning Agent review and spot check.
4. Systems Functional Performance Test Procedures, with annotation of test results and test completion.
5. Commissioning Issues Log.
6. Listing of deferred and off season test(s) not performed, including the schedule for their completion.

I. Addendum to Final Commissioning Report: The Commissioning Agent will prepare an Addendum to the Final Commissioning Report near the end of the Warranty Period. The Addendum will indicate whether systems, subsystems, and equipment are complete and continue to perform according to the Contract Documents. The Addendum to the Final Commissioning Report shall include, but is not limited to, the following:

1. Documentation of deferred and off season test(s) results.
2. Completed Systems Functional Performance Test Procedures for off season test(s).
3. Documentation that unresolved system performance issues have been resolved.
4. Updated Commissioning Issues Log, including status of unresolved issues.
5. Identification of potential Warranty Claims to be corrected by the Contractor.

J. Systems Manual: The Commissioning Agent will gather required information and compile the Systems Manual. The Systems Manual will include, but is not limited to, the following:

1. Design Narrative, including system narratives, schematics, single-line diagrams, flow diagrams, equipment schedules, and changes made throughout the Project.
2. Reference to Final Commissioning Plan.
3. Reference to Final Commissioning Report.
4. Approved Operation and Maintenance Data as submitted by the Contractor.

**1.12 SUBMITTALS**

A. Preliminary Commissioning Plan Submittal: The Commissioning Agent has prepared a Preliminary Commissioning Plan based on the final Construction Documents. The Preliminary Commissioning Plan is included as an Appendix to this specification section. The Preliminary Commissioning Plan is provided for information only. It contains preliminary information about the following commissioning activities:

1. The Commissioning Team: A list of commissioning team members by organization.
2. Systems to be commissioned. A detailed list of systems to be commissioned for the project. This list also provides preliminary information on systems/equipment submittals to be reviewed by the Commissioning Agent; preliminary information on Pre-Functional Checklists that are to be completed; preliminary information on Systems Performance Testing, including information on testing sample size (where authorized by the VA).
3. Commissioning Team Roles and Responsibilities: Preliminary roles and responsibilities for each Commissioning Team member.
4. Commissioning Documents: A preliminary list of commissioning-related documents, include identification of the parties responsible for preparation, review, approval, and action on each document.
5. Commissioning Activities Schedule: Identification of Commissioning Activities, including Systems Functional Testing, the expected duration and predecessors for the activity.
6. Pre-Functional Checklists: Preliminary Pre-Functional Checklists for equipment, components, subsystems, and systems to be commissioned. These Preliminary Pre-Functional Checklists provide

guidance on the level of detailed information the Contractor shall include on the final submission.

7. Systems Functional Performance Test Procedures: Preliminary step-by-step System Functional Performance Test Procedures to be used during Systems Functional Performance Testing. These Preliminary Systems Functional Performance procedures provide information on the level of testing rigor, and the level of Contractor support required during performance of system's testing.

B. Final Commissioning Plan Submittal: Based on the Final Construction Documents and the Contractor's project team, the Commissioning Agent will prepare the Final Commissioning Plan as described in this section. The Commissioning Agent will submit three hard copies and three sets of electronic files of Final Commissioning Plan. The Contractor shall review the Commissioning Plan and provide any comments to the VA. The Commissioning Agent will incorporate review comments into the Final Commissioning Plan as directed by the VA.

C. Systems Functional Performance Test Procedure: The Commissioning Agent will submit preliminary Systems Functional Performance Test Procedures to the Contractor, and the VA for review and comment. The Contractor shall return review comments to the VA and the Commissioning Agent. The VA will also return review comments to the Commissioning Agent. The Commissioning Agent will incorporate review comments into the Final Systems Functional Test Procedures to be used in Systems Functional Performance Testing.

D. Pre-Functional Checklists: The Commissioning Agent will submit Pre-Functional Checklists to be completed by the Contractor.

E. Test and Inspection Reports: The Commissioning Agent will submit test and inspection reports to the VA with copies to the Contractor and the Architect/Engineer.

F. Corrective Action Documents: The Commissioning Agent will submit corrective action documents to the VA Resident Engineer with copies to the Contractor and Architect.

G. Preliminary Commissioning Report Submittal: The Commissioning Agent will submit three electronic copies of the preliminary commissioning report. One electronic copy, with review comments, will be returned to the Commissioning Agent for preparation of the final submittal.

H. Final Commissioning Report Submittal: The Commissioning Agent will submit four sets of electronically formatted information of the final commissioning report to the VA. The final submittal will incorporate comments as directed by the VA.

I. Data for Commissioning:

1. The Commissioning Agent will request in writing from the Contractor specific information needed about each piece of commissioned equipment or system to fulfill requirements of the Commissioning Plan.
2. The Commissioning Agent may request further documentation as is necessary for the commissioning process or to support other VA data collection requirements, including Construction Operations Building Information Exchange (COBIE), Building Information Modeling (BIM), etc.

**1.13 COMMISSIONING PROCESS**

A. The Commissioning Agent will be responsible for the overall management of the commissioning process as well as coordinating scheduling of commissioning tasks with the VA and the Contractor. As directed by the VA, the Contractor shall incorporate Commissioning tasks, including, but not limited to, Systems Functional Performance Testing (including predecessors) with the Master Construction Schedule.

B. Within 15 days of contract award, the Contractor shall designate a specific individual as the Commissioning Manager (CM) to manage and lead the commissioning effort on behalf of the Contractor. The Commissioning Manager shall be the single point of contact and communications for all commissioning related services by the Contractor.

C. Within 15 days of contract award, the Contractor shall ensure that each subcontractor designates specific individuals as Commissioning Representatives (CR) to be responsible for commissioning related tasks. The Contractor shall ensure the designated Commissioning Representatives participate in the commissioning process as team members providing commissioning testing services, equipment operation, adjustments, and corrections if necessary. The Contractor shall ensure that all Commissioning Representatives shall have sufficient authority to direct their respective staff to provide the services required, and

to speak on behalf of their organizations in all commissioning related contractual matters.

**1.14 QUALITY ASSURANCE**

A. Instructor Qualifications: Factory authorized service representatives shall be experienced in training, operation, and maintenance procedures for installed systems, subsystems, and equipment.

B. Test Equipment Calibration: The Contractor shall comply with test equipment manufacturer's calibration procedures and intervals. Recalibrate test instruments immediately whenever instruments have been repaired following damage or dropping. Affix calibration tags to test instruments. Instruments shall have been calibrated within six months prior to use.

**1.15 COORDINATION**

A. Management: The Commissioning Agent will coordinate the commissioning activities with the VA and Contractor. The Commissioning Agent will submit commissioning documents and information to the VA. All commissioning team members shall work together to fulfill their contracted responsibilities and meet the objectives of the contract documents.

B. Scheduling: The Contractor will work with the Commissioning Agent and the VA to incorporate the commissioning activities into the construction schedule. The Commissioning Agent will provide sufficient information on commissioning activities to allow the Contractor and the VA to schedule commissioning activities. All parties shall address scheduling issues and make necessary notifications in a timely manner in order to expedite the project and the commissioning process. The Contractor shall update the Master Construction as directed by the VA.

C. Initial Schedule of Commissioning Events: The Commissioning Agent will provide the initial schedule of primary commissioning events in the Commissioning Plan and at the commissioning coordination meetings. The Commissioning Plan will provide a format for this schedule. As construction progresses, more detailed schedules will be developed by the Contractor with information from the Commissioning Agent.

D. Commissioning Coordinating Meetings: The Commissioning Agent will conduct periodic Commissioning Coordination Meetings of the commissioning team to review status of commissioning activities, to

discuss scheduling conflicts, and to discuss upcoming commissioning process activities.

E. Pretesting Meetings: The Commissioning Agent will conduct pretest meetings of the commissioning team to review startup reports, Pre-Functional Checklist results, Systems Functional Performance Testing procedures, testing personnel and instrumentation requirements.

F. Systems Functional Performance Testing Coordination: The Contractor shall coordinate testing activities to accommodate required quality assurance and control services with a minimum of delay and to avoid necessity of removing and replacing construction to accommodate testing and inspecting. The Contractor shall coordinate the schedule times for tests, inspections, obtaining samples, and similar activities.

**PART 2 - PRODUCTS**

**2.1 TEST EQUIPMENT**

A. The Contractor shall provide all standard and specialized testing equipment required to perform Systems Functional Performance Testing. Test equipment required for Systems Functional Performance Testing will be identified in the detailed System Functional Performance Test Procedure prepared by the Commissioning Agent.

B. Data logging equipment and software required to test equipment shall be provided by the Contractor.

C. All testing equipment shall be of sufficient quality and accuracy to test and/or measure system performance with the tolerances specified in the Specifications. If not otherwise noted, the following minimum requirements apply: Temperature sensors and digital thermometers shall have a certified calibration within the past year to an accuracy of 0.5 °C (1.0 °F) and a resolution of + or - 0.1 °C (0.2 °F). Pressure sensors shall have an accuracy of + or - 2.0% of the value range being measured (not full range of meter) and have been calibrated within the last year. All equipment shall be calibrated according to the manufacturer's recommended intervals and when dropped or damaged. Calibration tags shall be affixed or certificates readily available.

**PART 3 - EXECUTION**

**3.1 STARTUP, INITIAL CHECKOUT, AND PRE-FUNCTIONAL CHECKLISTS**

A. The following procedures shall apply to all equipment and systems to be commissioned, according to Part 1, Systems to Be Commissioned.

1. Pre-Functional Checklists are important to ensure that the equipment and systems are hooked up and operational. These ensure that Systems Functional Performance Testing may proceed without unnecessary delays. Each system to be commissioned shall have a full Pre-Functional Checklist completed by the Contractor prior to Systems Functional Performance Testing. No sampling strategies are used.
   a. The Pre-Functional Checklist will identify the trades responsible for completing the checklist. The Contractor shall ensure the appropriate trades complete the checklists.
   b. The Commissioning Agent will review completed Pre-Functional Checklists and field-verify the accuracy of the completed checklist using sampling techniques.
2. Startup and Initial Checkout Plan: The Contractor shall develop detailed startup plans for all equipment. The primary role of the Contractor in this process is to ensure that there is written documentation that each of the manufacturer recommended procedures have been completed. Parties responsible for startup shall be identified in the Startup Plan and in the checklist forms.
   a. The Contractor shall develop the full startup plan by combining (or adding to) the checklists with the manufacturer's detailed startup and checkout procedures from the O&M manual data and the field checkout sheets normally used by the Contractor. The plan shall include checklists and procedures with specific boxes or lines for recording and documenting the checking and inspections of each procedure and a summary statement with a signature block at the end of the plan.
   b. The full startup plan shall at a minimum consist of the following items:
      1) The Pre-Functional Checklists.
      2) The manufacturer's standard written startup procedures copied from the installation manuals with check boxes by each procedure and a signature block added by hand at the end.
      3) The manufacturer's normally used field checkout sheets.
         a) The Commissioning Agent will submit the full startup plan to the VA and Contractor for review. Final approval will be by the VA.

b) The Contractor shall review and evaluate the procedures and the format for documenting them, noting any procedures that need to be revised or added.

3. Sensor and Actuator Calibration
   a. All field installed temperature, relative humidity, $CO_2$ and pressure sensors and gages, and all actuators (dampers and valves) on all equipment shall be calibrated using the methods described in Division 21, Division 22, Division 23, Division 26, Division 27, and Division 28 specifications.
   b. All procedures used shall be fully documented on the Pre-Functional Checklists or other suitable forms, clearly referencing the procedures followed and written documentation of initial, intermediate and final results.
4. Execution of Equipment Startup
   a. Four weeks prior to equipment startup, the Contractor shall schedule startup and checkout with the VA and Commissioning Agent. The performance of the startup and checkout shall be directed and executed by the Contractor.
   b. The Commissioning Agent will observe the startup procedures for selected pieces of primary equipment.
   c. The Contractor shall execute startup and provide the VA and Commissioning Agent with a signed and dated copy of the completed startup checklists, and contractor tests.
   d. Only individuals that have direct knowledge and witnessed that a line item task on the Startup Checklist was actually performed shall initial or check that item off. It is not acceptable for witnessing supervisors to fill out these forms.

**3.2 DEFICIENCIES, NONCONFORMANCE, AND APPROVAL IN CHECKLISTS AND STARTUP**

A. The Contractor shall clearly list any outstanding items of the initial startup and Pre-Functional Checklist procedures that were not completed successfully, at the bottom of the procedures form or on an attached sheet. The procedures form and any outstanding deficiencies shall be provided to the VA and the Commissioning Agent within two days of completion.

B. The Commissioning Agent will review the report and submit comments to the VA. The Commissioning Agent will work with the Contractor to correct and verify deficiencies or uncompleted items. The Commissioning

Agent will involve the VA and others as necessary. The Contractor shall correct all areas that are noncompliant or incomplete in the checklists in a timely manner, and shall notify the VA and Commissioning Agent as soon as outstanding items have been corrected. The Contractor shall submit an updated startup report and a Statement of Correction on the original noncompliance report. When satisfactorily completed, the Commissioning Agent will recommend approval of the checklists and startup of each system to the VA.

C. The Contractor shall be responsible for resolution of deficiencies as directed the VA.

**3.3 PHASED COMMISSIONING**

A. The project may require startup and initial checkout to be executed in phases. This phasing shall be planned and scheduled in a coordination meeting of the VA, Commissioning Agent, and the Contractor. Results will be added to the master construction schedule and the commissioning schedule.

**3.4 TRENDING AND ALARMS**

A. Trending is a method of testing as a standalone method or to augment manual testing. The Contractor shall trend any and all points of the system or systems at intervals specified below.

B. Alarms are a means to notify the system operator that abnormal conditions are present in the system. Alarms shall be structured into three tiers – Critical, Priority, and Maintenance.

1. Critical alarms are intended to be alarms that require the immediate attention of and action by the Operator. These alarms shall be displayed on the Operator Workstation in a popup style window that is graphically linked to the associated unit's graphical display. The popup style window shall be displayed on top of any active window within the screen, including non DDC system software.
2. Priority level alarms are to be printed to a printer which is connected to the Operator’s Work Station located within the engineer’s office. Additionally Priority level alarms shall be able to be monitored and viewed through an active alarm application. Priority level alarms are alarms which shall require reaction from the operator or maintenance personnel within a normal work shift, and not immediate action.

3. Maintenance alarms are intended to be minor issues which would require examination by maintenance personnel within the following shift. These alarms shall be generated in a scheduled report automatically by the DDC system at the start of each shift. The generated maintenance report will be printed to a printer located within the engineer's office.

C. The Contractor shall provide a wireless internet network in the building for use during controls programming, checkout, and commissioning. This network will allow project team members to more effectively program, view, manipulate and test control devices while being in the same room as the controlled device.

D. The Contractor shall provide graphical trending through the DDC control system of systems being commissioned. Trending requirements are indicated below and included with the Systems Functional Performance Test Procedures. Trending shall occur before, during and after Systems Functional Performance Testing. The Contractor shall be responsible for producing graphical representations of the trended DDC points that show each system operating properly during steady state conditions as well as during the System Functional Testing. These graphical reports shall be submitted to the Resident Engineer and Commissioning Agent for review and analysis before, during dynamic operation, and after Systems Functional Performance Testing. The Contractor shall provide, but not limited to, the following trend requirements and trend submissions:

1. Pre-testing, Testing, and Post-testing – Trend reports of trend logs and graphical trend plots are required as defined by the Commissioning Agent. The trend log points, sampling rate, graphical plot configuration, and duration will be dictated by the Commissioning Agent. At any time during the Commissioning Process the Commissioning Agent may recommend changes to aspects of trending as deemed necessary for proper system analysis. The Contractor shall implement any changes as directed by the Resident Engineer. Any pre-test trend analysis comments generated by the Commissioning Team should be addressed and resolved by the Contractor, as directed by the Resident Engineer, prior to the execution of Systems Functional Performance Testing.
2. Dynamic plotting – The Contractor shall also provide dynamic plotting during Systems Functional Performance testing at frequent

intervals for points determined by the Systems Functional Performance Test Procedure. The graphical plots will be formatted and plotted at durations listed in the Systems Functional Performance Test Procedure.

3. Graphical plotting - The graphical plots shall be provided with a dual y-axis allowing 15 or more trend points (series) plotted simultaneously on the graph with each series in distinct color. The plots will further require title, axis naming, legend etc. all described by the Systems Functional Performance Test Procedure. If this cannot be sufficiently accomplished directly in the Direct Digital Control System then it is the responsibility of the Contractor to plot these trend logs in Microsoft Excel.
4. The following tables indicate the points to be trended and alarmed by system. The Operational Trend Duration column indicates the trend duration for normal operations. The Testing Trend Duration column indicates the trend duration prior to Systems Functional Performance Testing and again after Systems Functional Performance Testing. The Type column indicates point type: AI = Analog Input, AO = Analog Output, DI = Digital Input, DO = Digital Output, Calc = Calculated Point. In the Trend Interval Column, COV = Change of Value. The Alarm Type indicates the alarm priority; C = Critical, P = Priority, and M = Maintenance. The Alarm Range column indicates when the point is considered in the alarm state. The Alarm Delay column indicates the length of time the point must remain in an alarm state before the alarm is recorded in the DDC. The intent is to allow minor, short-duration events to be corrected by the DDC system prior to recording an alarm.

| **Dual-Path Air Handling Unit Trending and Alarms** | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Opera-tional Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| OA Tempera-ture | AI | 15 Min | 24 hours | 3 days | N/A | | |
| RA Tempera-ture | AI | 15 Min | 24 hours | 3 days | N/A | | |
| RA Humidity | AI | 15 Min | 24 hours | 3 days | P | >60% RH | 10 min |
| Mixed Air Temp | AI | None | None | None | N/A | | |

| Dual-Path Air Handling Unit Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Opera-tional Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| SA Temp | AI | 15 Min | 24 hours | 3 days | C | ±5°F from SP | 10 min |
| Supply Fan Speed | AI | 15 Min | 24 hours | 3 days | N/A | | |
| Return Fan Speed | AI | 15 Min | 24 hours | 3 days | N/A | | |
| RA Pre-Filter Status | AI | None | None | None | N/A | | |
| OA Pre-Filter Status | AI | None | None | None | N/A | | |
| After Filter Status | AI | None | None | None | N/A | | |
| SA Flow | AI | 15 Min | 24 hours | 3 days | C | ±10% from SP | 10 min |
| OA Supply Temp | AI | 15 Min | 24 hours | 3 days | P | ±5°F from SP | 10 min |
| RA Supply Temp | AI | 15 Min | 24 hours | 3 days | N/A | | |
| RA CHW Valve Position | AI | 15 Min | 24 hours | 3 days | N/A | | |
| OA CHW Valve Position | AI | 15 Min | 24 hours | 3 days | N/A | | |
| OA HW Valve Position | AI | 15 Min | 24 hours | 3 days | N/A | | |
| OA Flow | AI | 15 Min | 24 hours | 3 days | P | ±10% from SP | 5 min |
| RA Flow | AI | 15 Min | 24 hours | 3 days | P | ±10% from SP | 5 min |
| Initial UVC Intensity (%) | AI | None | None | None | N/A | | |
| Duct Pressure | AI | 15 Min | 24 hours | 3 days | C | ±25% from SP | 6 min |
| CO2 Level | AI | 15 Min | 24 hours | 3 days | P | ±10% from SP | 10 min |
| | | | | | | | |
| Supply Fan Status | DI | COV | 24 hours | 3 days | C | Status <> Com-mand | 10 min |
| Return Fan Status | DI | COV | 24 hours | 3 days | C | Status <> Com-mand | 10 Min |
| High Static Status | DI | COV | 24 hours | 3 days | P | True | 1 min |
| Fire Alarm Status | DI | COV | 24 hours | 3 days | C | True | 5 min |

| Dual-Path Air Handling Unit Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Opera-tional Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| Freeze Stat Level 1 | DI | COV | 24 hours | 3 days | C | True | 10 min |
| Freeze Stat Level 2 | DI | COV | 24 hours | 3 days | C | True | 5 min |
| Freeze Stat Level 3 | DI | COV | 24 hours | 3 days | P | True | 1 min |
| Fire/Smoke Damper Status | DI | COV | 24 hours | 3 days | P | Closed | 1 min |
| Emergency AHU Shutdown | DI | COV | 24 hours | 3 days | P | True | 1 min |
| Exhaust Fan #1 Status | DI | COV | 24 hours | 3 days | C | Status <> Com-mand | 10 min |
| Exhaust Fan #2 Status | DI | COV | 24 hours | 3 days | C | Status <> Com-mand | 10 min |
| Exhaust Fan #3 Status | DI | COV | 24 hours | 3 days | C | Status <> Com-mand | 10 min |
| OA Alarm | DI | COV | 24 hours | 3 days | C | True | 10 min |
| High Static Alarm | DI | COV | 24 hours | 3 days | C | True | 10 min |
| UVC Emitter Alarm | DI | COV | 24 hours | 3 days | P | True | 10 min |
| CO2 Alarm | DI | COV | 24 hours | 3 days | P | True | 10 min |
| Power Failure | DI | COV | 24 hours | 3 days | P | True | 1 min |
| | | | | | | | |
| Supply Fan Speed | AO | 15 Min | 24 hours | 3 days | N/A | | |
| Return Fan Speed | AO | 15 Min | 24 hours | 3 days | N/A | | |
| RA CHW Valve Position | AO | 15 Min | 24 hours | 3 days | N/A | | |
| OA CHW Valve Position | AO | 15 Min | 24 hours | 3 days | N/A | | |
| OA HW Valve Position | AO | 15 Min | 24 hours | 3 days | N/A | | |
| | | | | | | | |
| Supply Fan S/S | DO | COV | 24 hours | 3 days | N/A | | |
| Return Fan S/S | DO | COV | 24 hours | 3 days | N/A | | |
| Fire/Smoke Dampers | DO | COV | 24 hours | 3 days | N/A | | |

| Dual-Path Air Handling Unit Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Opera-tional Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| Exhaust Fan S/S | DO | COV | 24 hours | 3 days | N/A | | |
| Exhaust Fan S/S | DO | COV | 24 hours | 3 days | N/A | | |
| Exhaust Fan S/S | DO | COV | 24 hours | 3 days | N/A | | |
| | | | | | | | |
| AHU Energy | Calc | 1 Hour | 30 day | N/A | N/A | | |
| | | | | | | | |

| Terminal Unit (VAV, CAV, etc.) Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Opera-tional Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| Space Temper-ature | AI | 15 Min | 12 hours | 3 days | P | ±5°F from SP | 10 min |
| Air Flow | AI | 15 Min | 12 hours | 3 days | P | ±5°F from SP | 10 min |
| SA Tempera-ture | AI | 15 Min | 12 hours | 3 days | P | ±5°F from SP | 10 min |
| Local Setpoint | AI | 15 Min | 12 hours | 3 days | M | ±10°F from SP | 60 min |
| Space Humidi-ty | AI | 15 Min | 12 hours | 3 days | P | > 60% RH | 5 min |
| | | | | | | | |
| Unoccupied Override | DI | COV | 12 hours | 3 days | M | N/A | 12 Hours |
| Refrigerator Alarm | DI | COV | 12 hours | 3 days | C | N/A | 10 min |
| | | | | | | | |
| Damper Posi-tion | AO | 15 Minutes | 12 hours | 3 days | N/A | | |
| Heating coil Valve Posi-tion | AO | 15 Minutes | 12 hours | 3 days | N/A | | |

| 4-Pipe Fan Coil Trending and Alarms |
|---|

| Point | Type | Trend Interval | Operational Trend Duration | Testing Trend Duration | Alarm Type | Alarm Range | Alarm Delay |
|---|---|---|---|---|---|---|---|
| Space Temperature | AI | 15 Minutes | 12 hours | 3 days | P | ±5°F from SP | 10 min |
| SA Temperature | AI | 15 Minutes | 12 hours | 3 days | P | ±5°F from SP | 10 min |
| Pre-Filter Status | AI | None | None | None | M | > SP | 1 hour |
| | | | | | | | |
| Water Sensor | DI | COV | 12 hours | 3 days | M | N/A | 30 Min |
| | | | | | | | |
| Cooling Coil Valve Position | AO | 15 Minutes | 12 hours | 3 days | N/A | | |
| Heating coil Valve Position | AO | 15 Minutes | 12 hours | 3 days | N/A | | |
| Fan Coil ON/OFF | DO | COV | 12 hours | 3 days | M | Status <> Command | 30 min |

| 2-Pipe Fan Coil Unit Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Operational Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| Space Temperature | AI | 15 Minutes | 12 hours | 3 days | P | ±5°F from SP | 10 min |
| SA Temperature | AI | 15 Minutes | 12 hours | 3 days | P | ±5°F from SP | 10 min |
| Pre-Filter Status | AI | None | None | None | M | > SP | 1 hour |
| | | | | | | | |
| Water Sensor | DI | COV | 12 hours | 3 days | M | N/A | 30 Min |
| | | | | | | | |
| Cooling Coil Valve Position | AO | 15 Minutes | 12 hours | 3 days | N/A | | |
| Fan Coil ON/OFF | DO | COV | 12 hours | 3 days | M | Status <> Command | 30 min |

| Unit Heater Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Opera-tional Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| Space Temper-ature | AI | 15 Minutes | 12 hours | 3 days | P | ±5°F from SP | 10 min |
| | | | | | | | |
| Heating Valve Position | AO | 15 Minutes | 12 hours | 3 days | N/A | | |
| | | | | | | | |
| Unit Heater ON/OFF | DO | COV | 12 hours | 3 days | M | Status <> Com-mand | 30 min |

| Steam and Condensate Pumps Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Opera-tional Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| Steam Flow (LB/HR) | AI | 15 Minutes | 12 hours | 3 days | N/A | | |
| Condensate Pump Run Hours | AI | 15 Minutes | 12 hours | 3 days | N/A | | |
| Water Meter (GPM) | AI | 15 Minutes | 12 hours | 3 days | N/A | | |
| Electric Me-ter (KW/H) | AI | 15 Minutes | 12 hours | 3 days | N/A | | |
| Irrigation Meter (GPM) | AI | 15 Minutes | 12 hours | 3 days | N/A | | |
| Chilled Water Flow (TONS) | AI | 15 Minutes | 12 hours | 3 days | N/A | | |
| Condensate Flow (GPM) | AI | 15 Minutes | 12 hours | 3 days | N/A | | |
| | | | | | | | |
| High Water Level Alarm | DI | COV | 12 hours | 3 days | C | True | 5 Min |
| | | | | | | | |
| Condensate Pump Start/Stop | DO | COV | 12 hours | 3 days | P | Status <> Com-mand | 10 min |

| Domestic Hot Water Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Opera-tional Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| Domestic HW Setpoint WH-1 | AI | 15 Minute | 12 Hours | 3 days | N/A | | |
| Domestic HW Setpoint WH-2 | AI | 15 Minute | 12 Hours | 3 days | N/A | | |
| Domestic HW Temperature | AI | 15 Minute | 12 Hours | 3 days | C | > 135 °F | 10 Min |
| Domestic HW Temperature | AI | 15 Minute | 12 Hours | 3 days | P | ±5°F from SP | 10 Min |
| | | | | | | | |
| Dom. Circ. Pump #1 Sta-tus | DI | COV | 12 Hours | 3 days | M | Status <> Com-mand | 30 min |
| Dom. Circ. Pump #2 Sta-tus | DI | COV | 12 Hours | 3 days | M | Status <> Com-mand | 30 min |
| | | | | | | | |
| Dom. Circ. Pump #1 Start/Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| Dom. Circ. Pump #2 Start/Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| Domestic HW Start/Stop | DO | COV | 12 Hours | 3 days | N/A | | |

| Hydronic Hot Water Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Opera-tional Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| System HWS Temperature | AI | 15 min | 12 hours | 3 days | C | ±5°F from SP | 10 Min |
| System HWR Temperature | AI | 15 min | 12 hours | 3 days | M | ±15°F from SP | 300 Min |
| HX-1 Entering Temperature | AI | 15 min | 12 hours | 3 days | P | ±5°F from SP | 10 Min |
| HX-2 Entering Temperature | AI | 15 min | 12 hours | 3 days | P | ±5°F from SP | 10 Min |
| HX-2 Leaving Temperature | AI | 15 min | 12 hours | 3 days | P | ±5°F from SP | 10 Min |
| | | | | | | | |

| Hydronic Hot Water Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Operational Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| System Flow (GPM) | AI | 15 min | 12 hours | 3 days | N/A | | |
| System Differential Pressure | AI | 15 min | 12 hours | 3 days | P | ±10% from SP | 8 Min |
| | | | | 3 days | | | |
| HW Pump 1 Status | DI | COV | 12 Hours | 3 days | C | Status <> Command | 30 min |
| HW Pump 2 Status | DI | COV | 12 Hours | 3 days | C | Status <> Command | 30 min |
| | | | | | | | |
| HW Pump 1 VFD Speed | AO | 15 Min | 12 Hours | 3 days | N/A | | |
| HW Pump 2 VFD Speed | AO | 15 Min | 12 Hours | 3 days | N/A | | |
| Steam Station #1 1/3 Control Valve Position | AO | 15 Min | 12 Hours | 3 days | N/A | | |
| Steam Station #1 2/3 Control Valve Position | AO | 15 Min | 12 Hours | 3 days | N/A | | |
| Steam Station #2 1/3 Control Valve Position | AO | 15 Min | 12 Hours | 3 days | N/A | | |
| Steam Station #2 2/3 Control Valve Position | AO | 15 Min | 12 Hours | 3 days | N/A | | |
| Steam Station Bypass Valve Position | AO | 15 Min | 12 Hours | 3 days | N/A | | |
| | | | | | | | |
| HW Pump 1 Start/Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| HW Pump 2 Start/Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| HWR #1 Valve | DO | COV | 12 Hours | 3 days | N/A | | |
| HWR #2 Valve | DO | COV | 12 Hours | 3 days | N/A | | |

| Chilled Water System Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Operational Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| Chiller 1 Entering Temperature | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Chiller 1 Leaving Temperature | AI | 15 Minutes | 12 Hours | 3 days | P | ±5°F from SP | 10 Min |
| Chiller 1 Flow | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Chiller 1 Percent Load | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Chiller 1 KW Consumption | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Chiller 1 Tonnage | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Chiller 2 Entering Temperature | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Chiller 2 Leaving Temperature | AI | 15 Minutes | 12 Hours | 3 days | P | ±5°F from SP | 10 Min |
| Chiller 2 Flow | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Chiller 2 Percent Load | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Chiller 2 KW Consumption | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Chiller 2 Tonnage | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Primary Loop Decoupler Flow | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Primary Loop Flow | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Primary Loop Supply Temperature | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Secondary Loop Differential Pressure | AI | 15 Minutes | 12 Hours | 3 days | P | ±5% from SP | 10 Min |
| Secondary Loop Flow | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Secondary Loop Supply Temperature | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |

| Chilled Water System Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Opera-tional Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| Secondary Loop Return Temperature | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Secondary Loop Tonnage | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| | | | | | | | |
| Primary Loop Pump 1 Status | DI | COV | 12 Hours | 3 days | C | Status <> Com-mand | 30 min |
| Primary Loop Pump 2 Status | DI | COV | 12 Hours | 3 days | C | Status <> Com-mand | 30 min |
| Secondary Loop Pump 1 Status | DI | COV | 12 Hours | 3 days | C | Status <> Com-mand | 30 min |
| Secondary Loop Pump 2 Status | DI | COV | 12 Hours | 3 days | C | Status <> Com-mand | 30 min |
| Chiller 1 Status | DI | COV | 12 Hours | 3 days | C | Status <> Com-mand | 30 min |
| Chiller 1 Evaporator Iso-Valve | DI | COV | 12 Hours | 3 days | N/A | | |
| Chiller 1 Evaporator Flow Switch | DI | COV | 12 Hours | 3 days | N/A | | |
| Chiller 1 Unit Alarm | DI | COV | 12 Hours | 3 days | C | True | 10 Min |
| Chiller 2 Status | DI | COV | 12 Hours | 3 days | C | Status <> Com-mand | 30 min |
| Chiller 2 Evaporator Iso-Valve | DI | COV | 12 Hours | 3 days | N/A | | |
| Chiller 2 Evaporator Flow Switch | DI | COV | 12 Hours | 3 days | N/A | | |
| Chiller 2 Unit Alarm | DI | COV | 12 Hours | 3 days | C | True | 10 Min |
| Refrigerant Detector | DI | COV | 12 Hours | 3 days | C | True | 10 Min |
| Refrigerant Exhaust Fan Status | DI | COV | 12 Hours | 3 days | M | Status <> Com-mand | 30 min |
| Emergency Shutdown | DI | COV | 12 Hours | 3 days | P | True | 1 Min |

| Chilled Water System Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Opera-tional Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| | | | | | | | |
| Primary Loop Pump 1 VFD Speed | AO | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Primary Loop Pump 2 VFD Speed | AO | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Secondary Loop Pump 1 VFD Speed | AO | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Secondary Loop Pump 2 VFD Speed | AO | 15 Minutes | 12 Hours | 3 days | N/A | | |
| | | | | | | | |
| Primary Pump 1 Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| Primary Pump 2 Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| Secondary Pump 1 Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| Secondary Pump 2 Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| Chiller 1 En-able | DO | COV | 12 Hours | 3 days | N/A | | |
| Chiller 1 Iso-Valve Command | DO | COV | 12 Hours | 3 days | N/A | | |
| Chiller 2 En-able | DO | COV | 12 Hours | 3 days | N/A | | |
| Chiller 2 Iso-Valve Command | DO | COV | 12 Hours | 3 days | N/A | | |
| Refrigerant Exhaust Fan Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |

| Condenser Water System Trending and Alarms |
|---|

| Point | Type | Trend Interval | Operational Trend Duration | Testing Trend Duration | Alarm Type | Alarm Range | Alarm Delay |
|---|---|---|---|---|---|---|---|
| Chiller 1 Condenser Entering Temp | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Chiller 1 Condenser Leaving Temp | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Chiller 2 Condenser Entering Temp | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Chiller 2 Condenser Leaving Temp | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Cooling Tower 1 Supply Temp | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Cooling Tower 1 Return Temp | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Cooling Tower 1 Basin Temp | AI | 15 Minutes | 12 Hours | 3 days | P | < 45 °F | 10 Min |
| Cooling Tower 2 Supply Temp | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Cooling Tower 2 Return Temp | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Cooling Tower 2 Basin Temp | AI | 15 Minutes | 12 Hours | 3 days | P | < 45 °F | 10 Min |
| Condenser Water Supply Temp | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Condenser Water Return Temp | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Outdoor Air Wet Bulb | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| | | | | | | | |
| Cooling Tower 1 Fan Status | DI | COV | 12 Hours | 3 days | P | Status <> Command | 1 min |
| Cooling Tower 1 Basin Heat | DI | COV | 12 Hours | 3 days | N/A | | |
| Cooling Tower 1 Heat Trace | DI | COV | 12 Hours | 3 days | N/A | | |
| Cooling Tower 2 Fan Status | DI | COV | 12 Hours | 3 days | P | Status <> Command | 1 min |
| Cooling Tower 2 Basin Heat | DI | COV | 12 Hours | 3 days | N/A | | |
| Cooling Tower 2 Heat Trace | DI | COV | 12 Hours | 3 days | N/A | | |

| Condenser Water System Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Operational Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| Chiller 1 Isolation Valve | DI | COV | 12 Hours | 3 days | P | Status <> Command | 1 min |
| Chiller 2 Isolation Valve | DI | COV | 12 Hours | 3 days | P | Status <> Command | 1 min |
| Condenser Water Pump 1 Status | DI | COV | 12 Hours | 3 days | P | Status <> Command | 1 min |
| Condenser Water Pump 2 Status | DI | COV | 12 Hours | 3 days | P | Status <> Command | 1 min |
| | | | | | | | |
| Chiller 1 Condenser Bypass Valve | AO | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Chiller 2 Condenser By-Pass Valve | AO | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Cooling Tower 1 Bypass Valve | AO | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Cooling Tower 1 Fan Speed | AO | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Cooling Tower 2 Bypass Valve | AO | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Cooling Tower 2 Fan Speed | AO | 15 Minutes | 12 Hours | 3 days | N/A | | |
| | | | | | | | |
| Cooling Tower 1 Fan Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| Cooling Tower 2 Fan Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| Condenser Water Pump 1 Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| Condenser Water Pump 2 Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |

| Steam Boiler System Trending and Alarms |
|---|

| Point | Type | Trend Interval | Operational Trend Duration | Testing Trend Duration | Alarm Type | Alarm Range | Alarm Delay |
|---|---|---|---|---|---|---|---|
| Boiler 1 Steam Pressure | AI | 15 Minutes | 12 Hours | 3 days | P | ±5% from SP | 10 Min |
| Boiler 1 Steam Temperature | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Boiler 1 Fire Signal | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Boiler 2 Steam Pressure | AI | 15 Minutes | 12 Hours | 3 days | P | ±5% from SP | 10 Min |
| Boiler 2 Steam Temperature | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Boiler 2 Fire Signal | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| System Steam Pressure | AI | 15 Minutes | 12 Hours | 3 days | P | ±5% from SP | 10 Min |
| | | | | | | | |
| Boiler 1 Enable | DI | COV | 12 Hours | 3 days | N/A | | |
| Boiler 1 Status | DI | COV | 12 Hours | 3 days | P | Status <> Command | 10 min |
| Boiler 1 Alarm | DI | COV | 12 Hours | 3 days | C | True | 1 Min |
| Boiler 1 on Fuel Oil | DI | COV | 12 Hours | 3 days | N/A | | |
| Boiler 1 Low Water Alarm | DI | COV | 12 Hours | 3 days | C | True | 5 Min |
| Boiler 1 High Water Alarm | DI | COV | 12 Hours | 3 days | C | True | 5 Min |
| Boiler 1 Feed Pump | DI | COV | 12 Hours | 3 days | N/A | | |
| Boiler 2 Enable | DI | COV | 12 Hours | 3 days | N/A | | |
| Boiler 2 Status | DI | COV | 12 Hours | 3 days | P | Status <> Command | 10 min |
| Boiler 2 Alarm | DI | COV | 12 Hours | 3 days | C | True | 1 Min |
| Boiler 2 on Fuel Oil | DI | COV | 12 Hours | 3 days | N/A | | |
| Boiler 2 Low Water Alarm | DI | COV | 12 Hours | 3 days | C | True | 5 Min |
| Boiler 2 High Water Alarm | DI | COV | 12 Hours | 3 days | C | True | 5 Min |

| Steam Boiler System Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Operational Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| Boiler 2 Feed Pump | DI | COV | 12 Hours | 3 days | N/A | | |
| Combustion Damper Status | DI | COV | 12 Hours | 3 days | P | Status <> Command | 5 min |
| Condensate Recovery Pump Status | DI | COV | 12 Hours | 3 days | P | Status <> Command | 5 min |
| | | | | | | | |
| Boiler 1 Feed Pump Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| Boiler 2 Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| Combustion Damper Command | DO | COV | 12 Hours | 3 days | N/A | | |
| Condensate Recovery Pump Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |

| Hot Water Boiler System Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Operational Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| Outside Air Temperature | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Boiler 1 Fire Signal | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Boiler 1 Entering Water Temperature | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Boiler 1 Leaving Water Temperature | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Boiler 2 Fire Signal | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Boiler 2 Entering Water Temperature | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Boiler 2 Leaving Water Temperature | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |

| Hot Water Boiler System Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Operational Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| Hot Water Supply Temperature | AI | 15 Minutes | 12 Hours | 3 days | P | ±5 °F from SP | 10 Min |
| Hot Water Return Temperature | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| Secondary Loop Differential Pressure | AI | 15 Minutes | 12 Hours | 3 days | C | ±5% from SP | 10 Min |
| Lead Boiler | AI | 15 Minutes | 12 Hours | 3 days | N/A | | |
| | | | | | | | |
| Boiler 1 Enable | DI | COV | 12 Hours | 3 days | N/A | | |
| Boiler 1 Status | DI | COV | 12 Hours | 3 days | P | Status <> Command | 10 min |
| Boiler 1 Isolation Valve | DI | COV | 12 Hours | 3 days | N/A | | |
| Boiler 1 on Fuel Oil | DI | COV | 12 Hours | 3 days | N/A | | |
| Boiler 1 Alarm | DI | COV | 12 Hours | 3 days | C | True | 1 Min |
| Boiler 2 Enable | DI | COV | 12 Hours | 3 days | N/A | | |
| Boiler 2 Status | DI | COV | 12 Hours | 3 days | P | Status <> Command | 10 min |
| Boiler 2 Isolation Valve | DI | COV | 12 Hours | 3 days | N/A | | |
| Boiler 2 on Fuel Oil | DI | COV | 12 Hours | 3 days | N/A | | |
| Boiler 2 Alarm | DI | COV | 12 Hours | 3 days | C | True | 1 Min |
| Combustion Dampers Open | DI | COV | 12 Hours | 3 days | P | Status <> Command | 10 min |
| Primary Pump 1 Status | DI | COV | 12 Hours | 3 days | P | Status <> Command | 10 min |
| Primary Pump 2 Status | DI | COV | 12 Hours | 3 days | P | Status <> Command | 10 min |
| Secondary Pump 1 Status | DI | COV | 12 Hours | 3 days | P | Status <> Command | 10 min |

| Hot Water Boiler System Trending and Alarms | | | | | | | |
|---|---|---|---|---|---|---|---|
| **Point** | **Type** | **Trend Interval** | **Opera-tional Trend Duration** | **Testing Trend Duration** | **Alarm Type** | **Alarm Range** | **Alarm Delay** |
| Secondary Pump 2 Status | DI | COV | 12 Hours | 3 days | P | Status <> Com-mand | 10 min |
| | | | | | | | |
| Primary Pump 1 VFD Speed | AO | COV | 12 Hours | 3 days | N/A | | |
| Primary Pump 2 VFD Speed | AO | COV | 12 Hours | 3 days | N/A | | |
| Secondary Pump 1 VFD Speed | AO | COV | 12 Hours | 3 days | N/A | | |
| Secondary Pump 2 VFD Speed | AO | COV | 12 Hours | 3 days | N/A | | |
| | | | | | | | |
| Hot Water System Enable | DO | COV | 12 Hours | 3 days | N/A | | |
| Combustion Dampers Com-mand | DO | COV | 12 Hours | 3 days | N/A | | |
| Primary Pump 1 Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| Primary Pump 2 Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| Secondary Pump 1 Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |
| Secondary Pump 2 Start / Stop | DO | COV | 12 Hours | 3 days | N/A | | |

E. The Contractor shall provide the following information prior to Systems Functional Performance Testing. Any documentation that is modified after submission shall be recorded and resubmitted to the Resident Engineer and Commissioning Agent.

1. Point-to-Point checkout documentation;
2. Sensor field calibration documentation including system name, sensor/point name, measured value, DDC value, and Correction Factor.

3. A sensor calibration table listing the referencing the location of procedures to following in the O&M manuals, and the frequency at which calibration should be performed for all sensors, separated by system, subsystem, and type. The calibration requirements shall be submitted both in the O&M manuals and separately in a standalone document containing all sensors for inclusion in the commissioning documentation. The following table is a sample that can be used as a template for submission.

| **SYSTEM** | | |
|---|---|---|
| **Sensor** | **Calibration Frequency** | **O&M Calibration Procedure Reference** |
| Discharge air temperature | Once a year | Volume I Section D.3.aa |
| Discharge static pressure | Every 6 months | Volume II Section A.1.c |

4. Loop tuning documentation and constants for each loop of the building systems. The documentation shall be submitted in outline or table separated by system, control type (e.g. heating valve temperature control); proportional, integral and derivative constants, interval (and bias if used) for each loop. The following table is a sample that can be used as a template for submission.

| **AIR HANDLING UNIT AHU-1** | | | | |
|---|---|---|---|---|
| **Control Reference** | **Proportional Constant** | **Integral Constant** | **Derivative Constant** | **Interval** |
| Heating Valve Output | 1000 | 20 | 10 | 2 sec. |

## 3.5 SYSTEMS FUNCTIONAL PERFORMANCE TESTING

A. This paragraph applies to Systems Functional Performance Testing of systems for all referenced specification Divisions.

B. Objectives and Scope: The objective of Systems Functional Performance Testing is to demonstrate that each system is operating according to the Contract Documents. Systems Functional Performance Testing facilitates bringing the systems from a state of substantial completion to full dynamic operation. Additionally, during the testing process, areas of noncompliant performance are identified and corrected, thereby

improving the operation and functioning of the systems. In general, each system shall be operated through all modes of operation (seasonal, occupied, unoccupied, warm-up, cool-down, part- and full-load, fire alarm and emergency power) where there is a specified system response. The Contractor shall verify each sequence in the sequences of operation. Proper responses to such modes and conditions as power failure, freeze condition, low oil pressure, no flow, equipment failure, etc. shall also be tested.

C. Development of Systems Functional Performance Test Procedures: Before Systems Functional Performance Test procedures are written, the Contractor shall submit all requested documentation and a current list of change orders affecting equipment or systems, including an updated points list, program code, control sequences and parameters. Using the testing parameters and requirements found in the Contract Documents and approved submittals and shop drawings, the Commissioning Agent will develop specific Systems Functional Test Procedures to verify and document proper operation of each piece of equipment and system to be commissioned. The Contractor shall assist the Commissioning Agent in developing the Systems Functional Performance Test procedures as requested by the Commissioning Agent i.e. by answering questions about equipment, operation, sequences, etc. Prior to execution, the Commissioning Agent will provide a copy of the Systems Functional Performance Test procedures to the VA, the Architect/Engineer, and the Contractor, who shall review the tests for feasibility, safety, equipment and warranty protection.

D. Purpose of Test Procedures: The purpose of each specific Systems Functional Performance Test is to verify and document compliance with the stated criteria of acceptance given on the test form. Representative test formats and examples are found in the Commissioning Plan for this project. (The Commissioning Plan is issued as a separate document and is available for review.) The test procedure forms developed by the Commissioning Agent will include, but not be limited to, the following information:

1. System and equipment or component name(s)
2. Equipment location and ID number

3. Unique test ID number, and reference to unique Pre-Functional Checklists and startup documentation, and ID numbers for the piece of equipment.
4. Date
5. Project name
6. Participating parties
7. A copy of the specification section describing the test requirements
8. A copy of the specific sequence of operations or other specified parameters being verified
9. Formulas used in any calculations
10. Required pretest field measurements
11. Instructions for setting up the test.
12. Special cautions, alarm limits, etc.
13. Specific step-by-step procedures to execute the test, in a clear, sequential and repeatable format
14. Acceptance criteria of proper performance with a Yes / No check box to allow for clearly marking whether or not proper performance of each part of the test was achieved.
15. A section for comments.
16. Signatures and date block for the Commissioning Agent. A place for the Contractor to initial to signify attendance at the test.

E. Test Methods: Systems Functional Performance Testing shall be achieved by manual testing (i.e. persons manipulate the equipment and observe performance) and/or by monitoring the performance and analyzing the results using the control system's trend log capabilities or by standalone data loggers. The Contractor and Commissioning Agent shall determine which method is most appropriate for tests that do not have a method specified.

1. Simulated Conditions: Simulating conditions (not by an overwritten value) shall be allowed, although timing the testing to experience actual conditions is encouraged wherever practical.
2. Overwritten Values: Overwriting sensor values to simulate a condition, such as overwriting the outside air temperature reading in a control system to be something other than it really is, shall be allowed, but shall be used with caution and avoided when possible. Such testing methods often can only test a part of a system, as the interactions and responses of other systems will be

erroneous or not applicable. Simulating a condition is preferable. e.g., for the above case, by heating the outside air sensor with a hair blower rather than overwriting the value or by altering the appropriate setpoint to see the desired response. Before simulating conditions or overwriting values, sensors, transducers and devices shall have been calibrated.

3. Simulated Signals: Using a signal generator which creates a simulated signal to test and calibrate transducers and DDC constants is generally recommended over using the sensor to act as the signal generator via simulated conditions or overwritten values.
4. Altering Setpoints: Rather than overwriting sensor values, and when simulating conditions is difficult, altering setpoints to test a sequence is acceptable. For example, to see the Air Conditioning compressor lockout initiate at an outside air temperature below 12 C (54 F), when the outside air temperature is above 12 C (54 F), temporarily change the lockout setpoint to be 2 C (4 F) above the current outside air temperature.
5. Indirect Indicators: Relying on indirect indicators for responses or performance shall be allowed only after visually and directly verifying and documenting, over the range of the tested parameters, that the indirect readings through the control system represent actual conditions and responses. Much of this verification shall be completed during systems startup and initial checkout.

F. Setup: Each function and test shall be performed under conditions that simulate actual conditions as closely as is practically possible. The Contractor shall provide all necessary materials, system modifications, etc. to produce the necessary flows, pressures, temperatures, etc. necessary to execute the test according to the specified conditions. At completion of the test, the Contractor shall return all affected building equipment and systems, due to these temporary modifications, to their pretest condition.

G. Sampling: No sampling is allowed in completing Pre-Functional Checklists. Sampling is allowed for Systems Functional Performance Test Procedures execution. The Commissioning Agent will determine the sampling rate. If at any point, frequent failures are occurring and testing is becoming more troubleshooting than verification, the Commissioning Agent may stop the testing and require the Contractor to

perform and document a checkout of the remaining units, prior to continuing with Systems Functional Performance Testing of the remaining units.

H. Cost of Retesting: The cost associated with expanded sample System Functional Performance Tests shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be considered a justified reason for a claim of delay or for a time extension by the Contractor.

I. Coordination and Scheduling: The Contractor shall provide a minimum of 7 days notice to the Commissioning Agent and the VA regarding the completion schedule for the Pre-Functional Checklists and startup of all equipment and systems. The Commissioning Agent will schedule Systems Functional Performance Tests with the Contractor and VA. The Commissioning Agent will witness and document the Systems Functional Performance Testing of systems. The Contractor shall execute the tests in accordance with the Systems Functional Performance Test Procedure.

J. Testing Prerequisites: In general, Systems Functional Performance Testing will be conducted only after Pre-Functional Checklists have been satisfactorily completed. The control system shall be sufficiently tested and approved by the Commissioning Agent and the VA before it is used to verify performance of other components or systems. The air balancing and water balancing shall be completed before Systems Functional Performance Testing of air-related or water-related equipment or systems are scheduled. Systems Functional Performance Testing will proceed from components to subsystems to systems. When the proper performance of all interacting individual systems has been achieved, the interface or coordinated responses between systems will be checked.

K. Problem Solving: The Commissioning Agent will recommend solutions to problems found, however the burden of responsibility to solve, correct and retest problems is with the Contractor.

**3.6 DOCUMENTATION, NONCONFORMANCE AND APPROVAL OF TESTS**

A. Documentation: The Commissioning Agent will witness, and document the results of all Systems Functional Performance Tests using the specific procedural forms developed by the Commissioning Agent for that purpose. Prior to testing, the Commissioning Agent will provide these forms to

the VA and the Contractor for review and approval. The Contractor shall include the filled out forms with the O&M manual data.

B. Nonconformance: The Commissioning Agent will record the results of the Systems Functional Performance Tests on the procedure or test form. All items of nonconformance issues will be noted and reported to the VA on Commissioning Field Reports and/or the Commissioning Master Issues Log.

1. Corrections of minor items of noncompliance identified may be made during the tests. In such cases, the item of noncompliance and resolution shall be documented on the Systems Functional Test Procedure.
2. Every effort shall be made to expedite the systems functional Performance Testing process and minimize unnecessary delays, while not compromising the integrity of the procedures. However, the Commissioning Agent shall not be pressured into overlooking noncompliant work or loosening acceptance criteria to satisfy scheduling or cost issues, unless there is an overriding reason to do so by direction from the VA.
3. As the Systems Functional Performance Tests progresses and an item of noncompliance is identified, the Commissioning Agent shall discuss the issue with the Contractor and the VA.
4. When there is no dispute on an item of noncompliance, and the Contractor accepts responsibility to correct it:
   a. The Commissioning Agent will document the item of noncompliance and the Contractor's response and/or intentions. The Systems Functional Performance Test then continues or proceeds to another test or sequence. After the day's work is complete, the Commissioning Agent will submit a Commissioning Field Report to the VA. The Commissioning Agent will also note items of noncompliance and the Contractor’s response in the Master Commissioning Issues Log. The Contractor shall correct the item of noncompliance and report completion to the VA and the Commissioning Agent.
   b. The need for retesting will be determined by the Commissioning Agent. If retesting is required, the Commissioning Agent and the Contractor shall reschedule the test and the test shall be repeated.

5. If there is a dispute about item of noncompliance, regarding whether it is an item of noncompliance, or who is responsible:
   a. The item of noncompliance shall be documented on the test form with the Contractor's response. The item of noncompliance with the Contractor’s response shall also be reported on a Commissioning Field Report and on the Master Commissioning Issues Log.
   b. Resolutions shall be made at the lowest management level possible. Other parties are brought into the discussions as needed. Final interpretive and acceptance authority is with the Department of Veterans Affairs.
   c. The Commissioning Agent will document the resolution process.
   d. Once the interpretation and resolution have been decided, the Contractor shall correct the item of noncompliance, report it to the Commissioning Agent. The requirement for retesting will be determined by the Commissioning Agent. If retesting is required, the Commissioning Agent and the Contractor shall reschedule the test. Retesting shall be repeated until satisfactory performance is achieved.

C. Cost of Retesting: The cost to retest a System Functional Performance Test shall be solely the responsibility of the Contractor. Any required retesting by the Contractor shall not be considered a justified reason for a claim of delay or for a time extension by the Contractor.

D. Failure Due to Manufacturer Defect: If 10%, or three, whichever is greater, of identical pieces (size alone does not constitute a difference) of equipment fail to perform in compliance with the Contract Documents (mechanically or substantively) due to manufacturing defect, not allowing it to meet its submitted performance specifications, all identical units may be considered unacceptable by the VA. In such case, the Contractor shall provide the VA with the following:
   1. Within one week of notification from the VA, the Contractor shall examine all other identical units making a record of the findings. The findings shall be provided to the VA within two weeks of the original notice.

2. Within two weeks of the original notification, the Contractor shall provide a signed and dated, written explanation of the problem, cause of failures, etc. and all proposed solutions which shall include full equipment submittals. The proposed solutions shall not significantly exceed the specification requirements of the original installation.
3. The VA shall determine whether a replacement of all identical units or a repair is acceptable.
4. Two examples of the proposed solution shall be installed by the Contractor and the VA shall be allowed to test the installations for up to one week, upon which the VA will decide whether to accept the solution.
5. Upon acceptance, the Contractor shall replace or repair all identical items, at their expense and extend the warranty accordingly, if the original equipment warranty had begun. The replacement/repair work shall proceed with reasonable speed beginning within one week from when parts can be obtained.

E. Approval: The Commissioning Agent will note each satisfactorily demonstrated function on the test form. Formal approval of the Systems Functional Performance Test shall be made later after review by the Commissioning Agent and by the VA. The Commissioning Agent will evaluate each test and report to the VA using a standard form. The VA will give final approval on each test using the same form, and provide signed copies to the Commissioning Agent and the Contractor.

**3.7 DEFERRED TESTING**

A. Unforeseen Deferred Systems Functional Performance Tests: If any Systems Functional Performance Test cannot be completed due to the building structure, required occupancy condition or other conditions, execution of the Systems Functional Performance Testing may be delayed upon approval of the VA. These Systems Functional Performance Tests shall be conducted in the same manner as the seasonal tests as soon as possible. Services of the Contractor to conduct these unforeseen Deferred Systems Functional Performance Tests shall be negotiated between the VA and the Contractor.

B. Deferred Seasonal Testing: Deferred Seasonal Systems Functional Performance Tests are those that must be deferred until weather conditions are closer to the systems design parameters. The

Commissioning Agent will review systems parameters and recommend which Systems Functional Performance Tests should be deferred until weather conditions more closely match systems parameters. The Contractor shall review and comment on the proposed schedule for Deferred Seasonal Testing. The VA will review and approve the schedule for Deferred Seasonal Testing. Deferred Seasonal Systems Functional Performances Tests shall be witnessed and documented by the Commissioning Agent. Deferred Seasonal Systems Functional Performance Tests shall be executed by the Contractor in accordance with these specifications.

**3.8 OPERATION AND MAINTENANCE TRAINING REQUIREMENTS**

A. Training Preparation Conference: Before operation and maintenance training, the Commissioning Agent will convene a training preparation conference to include VA's Resident Engineer, VA's Operations and Maintenance personnel, and the Contractor. The purpose of this conference will be to discuss and plan for Training and Demonstration of VA Operations and Maintenance personnel.

B. The Contractor shall provide training and demonstration as required by other Division 21, Division 22, Division 23, Division 26, Division 27, Division 28, and Division 31 sections. The Training and Demonstration shall include, but is not limited to, the following:

1. Review the Contract Documents.
2. Review installed systems, subsystems, and equipment.
3. Review instructor qualifications.
4. Review instructional methods and procedures.
5. Review training module outlines and contents.
6. Review course materials (including operation and maintenance manuals).
7. Review and discuss locations and other facilities required for instruction.
8. Review and finalize training schedule and verify availability of educational materials, instructors, audiovisual equipment, and facilities needed to avoid delays.
9. For instruction that must occur outside, review weather and forecasted weather conditions and procedures to follow if conditions are unfavorable.

C. Training Module Submittals: The Contractor shall submit the following information to the VA and the Commissioning Agent:

1. Instruction Program: Submit two copies of outline of instructional program for demonstration and training, including a schedule of proposed dates, times, length of instruction time, and instructors' names for each training module. Include learning objective and outline for each training module. At completion of training, submit two complete training manuals for VA's use.
2. Qualification Data: Submit qualifications for facilitator and/or instructor.
3. Attendance Record: For each training module, submit list of participants and length of instruction time.
4. Evaluations: For each participant and for each training module, submit results and documentation of performance-based test.
5. Demonstration and Training Videotapes: Submit two copies within seven days of end of each training module.
   a. Identification: On each copy, provide an applied label with the following information:
      1) Name of Project.
      2) Name and address of photographer
      3) Name of Contractor.
      4) Date videotape was recorded.
      5) Description of vantage point, indicating location, direction (by compass point), and elevation or story of construction.
6. Transcript: Prepared on 8-1/2-by-11-inch paper, punched and bound in heavy-duty, 3-ring, vinyl-covered binders. Mark appropriate identification on front and spine of each binder. Include a cover sheet with same label information as the corresponding videotape. Include name of Project and date of videotape on each page.

D. QUALITY ASSURANCE

1. Facilitator Qualifications: A firm or individual experienced in training or educating maintenance personnel in a training program similar in content and extent to that indicated for this Project, and whose work has resulted in training or education with a record of successful learning performance.
2. Instructor Qualifications: A factory authorized service representative, complying with requirements in Division 01 Section "Quality Requirements," experienced in operation and maintenance procedures and training.

3. Photographer Qualifications: A professional photographer who is experienced photographing construction projects.

E. COORDINATION

1. Coordinate instruction schedule with VA's operations. Adjust schedule as required to minimize disrupting VA's operations.
2. Coordinate instructors, including providing notification of dates, times, length of instruction time, and course content.
3. Coordinate content of training modules with content of approved emergency, operation, and maintenance manuals. Do not submit instruction program until operation and maintenance data has been reviewed and approved by the VA.

F. INSTRUCTION PROGRAM

1. Program Structure: Develop an instruction program that includes individual training modules for each system and equipment not part of a system, as required by individual Specification Sections, and as follows:
   a. Fire protection systems, including fire alarm, fire pumps, and fire suppression systems.
   b. Intrusion detection systems.
   c. Conveying systems, including elevators, wheelchair lifts, escalators, and automated materials handling systems.
   d. Medical equipment, including medical gas equipment and piping.
   e. Laboratory equipment, including laboratory air and vacuum equipment and piping.
   f. Heat generation, including boilers, feedwater equipment, pumps, steam distribution piping, condensate return systems, heating hot water heat exchangers, and heating hot water distribution piping.
   g. Refrigeration systems, including chillers, cooling towers, condensers, pumps, and distribution piping.
   h. HVAC systems, including air handling equipment, air distribution systems, and terminal equipment and devices.
   i. switchgear, transformers, switchboards, panelboards, uninterruptible power supplies, and motor controls.
   j. Packaged engine generators, including synchronizing switchgear/switchboards, and transfer switches.
   k. Lighting equipment and controls.

l. Communication systems, including intercommunication, surveillance, nurse call systems, public address, mass evacuation, voice and data, and entertainment television equipment.

m. Site utilities including lift stations, condensate pumping and return systems, and storm water pumping systems.

G. Training Modules: Develop a learning objective and teaching outline for each module. Include a description of specific skills and knowledge that participants are expected to master. For each module, include instruction for the following:

1. Basis of System Design, Operational Requirements, and Criteria: Include the following:

a. System, subsystem, and equipment descriptions.

b. Performance and design criteria if Contractor is delegated design responsibility.

c. Operating standards.

d. Regulatory requirements.

e. Equipment function.

f. Operating characteristics.

g. Limiting conditions.

h. Performance curves.

2. Documentation: Review the following items in detail:

a. Emergency manuals.

b. Operations manuals.

c. Maintenance manuals.

d. Project Record Documents.

e. Identification systems.

f. Warranties and bonds.

g. Maintenance service agreements and similar continuing commitments.

3. Emergencies: Include the following, as applicable:

a. Instructions on meaning of warnings, trouble indications, and error messages.

b. Instructions on stopping.

c. Shutdown instructions for each type of emergency.

d. Operating instructions for conditions outside of normal operating limits.

e. Sequences for electric or electronic systems.

f. Special operating instructions and procedures.

4. Operations: Include the following, as applicable:

a. Startup procedures.

b. Equipment or system break-in procedures.

c. Routine and normal operating instructions.

d. Regulation and control procedures.

e. Control sequences.

f. Safety procedures.

g. Instructions on stopping.

h. Normal shutdown instructions.

i. Operating procedures for emergencies.

j. Operating procedures for system, subsystem, or equipment failure.

k. Seasonal and weekend operating instructions.

l. Required sequences for electric or electronic systems.

m. Special operating instructions and procedures.

5. Adjustments: Include the following:

a. Alignments.

b. Checking adjustments.

c. Noise and vibration adjustments.

d. Economy and efficiency adjustments.

6. Troubleshooting: Include the following:

a. Diagnostic instructions.

b. Test and inspection procedures.

7. Maintenance: Include the following:

a. Inspection procedures.

b. Types of cleaning agents to be used and methods of cleaning.

c. List of cleaning agents and methods of cleaning detrimental to product.

d. Procedures for routine cleaning

e. Procedures for preventive maintenance.

f. Procedures for routine maintenance.

g. Instruction on use of special tools.

8. Repairs: Include the following:

a. Diagnosis instructions.

b. Repair instructions.

c. Disassembly; component removal, repair, and replacement; and reassembly instructions.

d. Instructions for identifying parts and components.

e. Review of spare parts needed for operation and maintenance.

H. Training Execution:

1. Preparation: Assemble educational materials necessary for instruction, including documentation and training module. Assemble training modules into a combined training manual. Set up instructional equipment at instruction location.

2. Instruction:

a. Facilitator: Engage a qualified facilitator to prepare instruction program and training modules, to coordinate instructors, and to coordinate between Contractor and Department of Veterans Affairs for number of participants, instruction times, and location.

b. Instructor: Engage qualified instructors to instruct VA's personnel to adjust, operate, and maintain systems, subsystems, and equipment not part of a system.

1) The Commissioning Agent will furnish an instructor to describe basis of system design, operational requirements, criteria, and regulatory requirements.

2) The VA will furnish an instructor to describe VA's operational philosophy.

3) The VA will furnish the Contractor with names and positions of participants.

3. Scheduling: Provide instruction at mutually agreed times. For equipment that requires seasonal operation, provide similar instruction at start of each season. Schedule training with the VA and the Commissioning Agent with at least seven days' advance notice.

4. Evaluation: At conclusion of each training module, assess and document each participant's mastery of module by use of **an oral**, **or a written**, performance-based test.

5. Cleanup: Collect used and leftover educational materials and remove from Project site. Remove instructional equipment. Restore systems and equipment to condition existing before initial training use.

I. Demonstration and Training Recording:

1. General: Engage a qualified commercial photographer to record demonstration and training. Record each training module separately. Include classroom instructions and demonstrations, board diagrams, and other visual aids, but not student practice. At beginning of each training module, record each chart containing learning objective and lesson outline.
2. Video Format: Provide high quality color DVD color on standard size DVD disks.
3. Recording: Mount camera on tripod before starting recording, unless otherwise necessary to show area of demonstration and training. Display continuous running time.
4. Narration: Describe scenes on videotape by audio narration by microphone while demonstration and training is recorded. Include description of items being viewed. Describe vantage point, indicating location, direction (by compass point), and elevation or story of construction.

----- END -----

# SECTION 02 41 00
# DEMOLITION

## PART 1 - GENERAL

### 1.1 DESCRIPTION:

This section specifies demolition and removal of buildings, portions of buildings, utilities, other structures and debris from trash dumps shown.

### 1.2 RELATED WORK:

A. Safety Requirements: GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
B. Disconnecting utility services prior to demolition: Section 01 00 00, GENERAL REQUIREMENTS.
C. Reserved items that are to remain the property of the Government: Section 01 00 00, GENERAL REQUIREMENTS.
D. Environmental Protection: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
E. Construction Waste Management: Section 01 74 19 CONSTRUCTION WASTE MANAGEMENT.
F. Infectious Control: Section 01 01 10 IC, GENERAL REQUIREMENT, INFECTION CONTROL.

### 1.3 PROTECTION:

A. Perform demolition in such manner as to eliminate hazards to persons and property; to minimize interference with use of adjacent areas, utilities and structures or interruption of use of such utilities; and to provide free passage to and from such adjacent areas of structures. Comply with requirements of GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
B. Provide safeguards, including warning signs, barricades, temporary fences, warning lights, and other similar items that are required for protection of all personnel during demolition and removal operations. Comply with requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES AND IMPROVEMENTS.
C. Maintain fences, barricades, lights, and other similar items around exposed excavations until such excavations have been completely filled.
D. Provide enclosed dust chutes with control gates from each floor to carry debris to truck beds and govern flow of material into truck. Provide overhead bridges of tight board or prefabricated metal construction at dust chutes to protect persons and property from falling debris.

E. Prevent spread of flying particles and dust. Sprinkle rubbish and debris with water to keep dust to a minimum. Do not use water if it results in hazardous or objectionable condition such as, but not limited to; ice, flooding, or pollution. Vacuum and dust the work area daily.

F. In addition to previously listed fire and safety rules to be observed in performance of work, include following:
   1. No wall or part of wall shall be permitted to fall outwardly from structures.
   2. Maintain at least one stairway in each structure in usable condition to highest remaining floor. Keep stairway free of obstructions and debris until that level of structure has been removed.
   3. Wherever a cutting torch or other equipment that might cause a fire is used, provide and maintain fire extinguishers nearby ready for immediate use. Instruct all possible users in use of fire extinguishers.
   4. Keep hydrants clear and accessible at all times. Prohibit debris from accumulating within a radius of 4500 mm (15 feet) of fire hydrants.

G. Before beginning any demolition work, the Contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the Medical Center; any damaged items shall be repaired or replaced as approved by the Resident Engineer. The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required. The Contractor shall ensure that structural elements are not overloaded and shall be responsible for increasing structural supports or adding new supports as may be required as a result of any cutting, removal, or demolition work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for existing construction weakened by demolition or removal works. Repairs, reinforcement, or structural replacement must have Resident Engineer’s approval.

H. The work shall comply with the requirements of Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

I. The work shall comply with the requirements of Section 01 01 10 - IC, INFECTION CONTROL

**1.4 UTILITY SERVICES:**

A. Demolish and remove outside utility service lines shown to be removed.

B. Remove abandoned outside utility lines that would interfere with installation of new utility lines and new construction.

**PART 2 - PRODUCTS (NOT USED)**

**PART 3 – EXECUTION**

**3.1 DEMOLITION:**

A. Completely demolish and remove buildings and structures, including all appurtenances related or connected thereto, as noted below:
   1. As required for installation of new utility service lines.
   2. To full depth within an area defined by hypothetical lines located 1500 mm (5 feet) outside building lines of new structures.

B. Debris, including brick, concrete, stone, metals and similar materials shall become property of Contractor and shall be disposed of by him daily, off the Medical Center to avoid accumulation at the demolition site. Materials that cannot be removed daily shall be stored in areas specified by the Resident Engineer. Break up concrete slabs below grade that do not require removal from present location into pieces not exceeding 600 mm (24 inches) square to permit drainage. Contractor shall dispose debris in compliance with applicable federal, state or local permits, rules and/or regulations.

C. In removing buildings and structures of more than two stories, demolish work story by story starting at highest level and progressing down to third floor level. Demolition of first and second stories may proceed simultaneously.

D. Remove and legally dispose of all materials, other than earth to remain as part of project work, from any trash dumps shown. Materials removed shall become property of contractor and shall be disposed of in compliance with applicable federal, state or local permits, rules and/or regulations. All materials in the indicated trash dump areas, including above surrounding grade and extending to a depth of 1500mm (5feet) below surrounding grade, shall be included as part of the lump sum compensation for the work of this section. Materials that are located beneath the surface of the surrounding ground more than 1500 mm (5 feet), or materials that are discovered to be hazardous, shall be handled as unforeseen. The removal of hazardous material shall be referred to Hazardous Materials specifications.

E. Remove existing utilities as indicated or uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the Resident Engineer. When Utility lines are encountered that are not indicated on the

drawings, the Resident Engineer shall be notified prior to further work in that area.

**3.2 CLEAN-UP:**

On completion of work of this section and after removal of all debris, leave site in clean condition satisfactory to Resident Engineer. Clean-up shall include off the Medical Center disposal of all items and materials not required to remain property of the Government as well as all debris and rubbish resulting from demolition operations.

- - - E N D - - -

# SECTION 02 42 00
# CUTTING, REMOVAL, DEMOLITION, RESTORATION AND PATCHING

## PART 1 GENERAL

### 1.1 SCOPE:

A. Refer to SECTION 01 00 00 for special requirements, protection, constraints, timing of work, scheduling of work, enclosures and similar requirements relating to this section.

B. This section covers cutting, demolition, removal work, patching, leveling and restoration work as necessary to accomplish and complete all work under this contract, including any relocation or reuse of existing materials, equipment, systems, or other work, as well as the disposition of salvaged materials or debris. This Section applies to all work under this contract, including general construction, mechanical and electrical work.

C. Contractor and his subcontractors shall examine the spaces/work site themselves to determine the actual conditions and requirements. All removals, demolition, cutting, restoration, new installations and other work shall be accomplished to transform the existing spaces and conditions to the new conditions required under the Contract, as well as to accomplish all tie-in work of new to existing.

D. It is the intent that, unless specifically shown on the schedules, or is inherent in the work to be accomplished under the general construction work of the area, that each contractor shall perform the demolition, cutting, removals, relocations, patching and leveling, and restoration as will be required to accomplish the work under their contracts. All work indicated on the schedules shall be accomplished by the General Contractor.

E. Except for general demolition of entire areas, it is the intent that at each area or space the contractor and each subcontractor shall make removals, perform cutting or demolition and accomplish relocations of work normal to his trade (i.e., Mechanical Contractor removes or relocates piping, ductwork and similar. At areas of general demolition of entire area spaces, the Mechanical Contractor shall make

removals normal to their trade or may be called for, for reuse or relocation, make any relocations and cutoffs, terminate, or otherwise discontinue services that will be abandoned, shall be removed to the nearest active main. The general contractor shall then demolish or remove all unwanted electrical or mechanical materials, items or elements in the area.

F. Contractor is required to restore all finishes, surfaces, items, & materials as required to accommodate new finishes. For example, if wall paper, vinyl wall covering, ceramic wall tile, etc. is existing on wall, and new wall finish calls for wall to be painted, contractor is required to remove existing wall paper, vinyl wall covering, ceramic wall tile, etc. to accommodate new painted finish. These surfaces are required to be verified prior to bid, as no change to contract will be provided after award if existing finishes are clearly present.

PART 2: MATERIALS

2.1 SALVAGEABLE MATERIALS TO BE STORED BY OWNER (VA):

A. The owner shall mark or tag existing materials, equipment or other items that are to be retained during a pre-demolition walk through. Salvageable materials and items designated or marked to remain the property of the government shall be carefully removed by applicable trades, protected from damage and stored adjacent to the removal area as directed.

B. Consult the Project Manager concerning any possible salvageable items prior to demolition thereof. Carefully remove and salvage any materials designated to be retained.

C. Any materials not wanted by the government shall be removed from the site by the contractor, without additional cost to the government.

D. Removal from the area and the site to the government’s storage area shall be by the contractor.

PART 3 EXECUTION:

3.1 TEMPORARY PROTECTION:

A. Provide temporary bracing, shoring, needling and support during demolition, cutting, remodeling and related new construction necessary for the execution of the work and the protection of persons and property. Perform all work with appropriate supports, protection and methods to prevent collapse, settling or damage to property or persons. Provide adequate supports for the loads to be carried, with loads properly distributed, and including to lower levels and sound bearing, if necessary.

B Provide protective covering and enclosures necessary to prevent damage to existing spaces and materials to remain.

C. Provide dust proof temporary enclosures (including above ceilings) separating areas under demolition and remodeling from the remainder of the buildings as well as temporary filters at ductwork. If work produces fumes or odors that impact patient care or staff operations, granulated active carbon filters shall be provided for all HVAC intake units where operations provide these odors or fumes. Provide temporary hinged doors in temporary enclosures where necessary.Temporary and permanent doors shall be completely sealed with tape or other suitable material during demolition work and shall remain sealed until dust has settled.

3.2 MECHANICAL AND ELECTRICAL WORK EXPOSED

A. Where unknown mechanical piping, ductwork or electrical conduit is exposed during removal of partitions, walls, floors and ceilings, the removal or re-routing shall be by the Mechanical or Electrical Contractor as applicable. The contractor is to provide at minimum labor and materials required for one journeyman electrician or plumber 40-manhours to relocate these utilities. Re-routed piping shall be located where directed and shall be re-connected to maintain all functions in proper operation. Abandoned piping may be left in place where it is disconnected from its source and capped or as directed by Project Manager. There shall be no"dead end" water, sewer, medical gas, or vent piping existing in the completed work.

B. Removals, capping or otherwise terminating services which are

abandoned or need to be abandoned, shall be accomplished without additional cost to the government, whether shown or noted on drawings or otherwise encountered.

C. Contractor is to remove all old abandoned oval pneumatic tube lines, transfer boxes, and related equipment and components exposed within the construction area. The contractor is to provide at minimum labor and materials required for one electrician or laborer 40-manhours for removal.

3.3 WORK OF EACH CONTRACT

A. The contractor and each subcontractor shall carefully review the contract documents, including those primarily for other trades, with respect to the coordination of demolition, removal and remodeling work and perform such removals normal to their respective trade as may be shown, noted, or otherwise required. Cutting and patching incidental to demolition, removal and/or remodeling of general construction work shall be construed as the work of the general contractor when shown or indicated on the general construction drawings or schedules or specifically noted or called for on documents primarily for other trades as being accomplished by the general contractor. Other contractors shall perform such other cutting, demolition, patching, replacement and restoration as may be required to accomplish their part of the work.

3.4 PAINTING

A. Any painting to match adjacent or surrounding areas.

3.5 LEVELING OF FLOORS

A. Contractor shall submit for approval - brand of latex, floor leveler to be used. Leveler shall include additive for waterproofing.

3.6 PATCHING

A. Contractor shall be responsible for all patching required as a result of installation of new work.

B. Contractor shall furnish all related components, trims, etc. required to complete the work.

- - -END- - -

**SECTION 02 82 11**
**TRADITIONAL ASBESTOS ABATEMENT**

**TABLE OF CONTENTS**

PART 1 - GENERAL....1
1.1 SUMMARY OF THE WORK....1
1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS....1
1.1.2 EXTENT OF WORK....1
1.1.3 RELATED WORK....1
1.1.4 TASKS....2
1.1.5 CONTRACTORS USE OF PREMISES....2
1.2 VARIATIONS IN QUANTITY....2
1.3 STOP ASBESTOS REMOVAL....3
1.4 DEFINITIONS....4
1.4.1 GENERAL....4
1.4.2 GLOSSARY....4
1.4.3 REFERENCED STANDARDS ORGANIZATIONS....12
1.5 APPLICABLE CODES AND REGULATIONS....13
1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS....13
1.5.2 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITY....14
1.5.3 FEDERAL REQUIREMENTS....14
1.5.4 STATE REQUIREMENTS....15
1.5.5 STANDARDS....15
1.5.6 EPA GUIDANCE DOCUMENTS....15
1.5.7 NOTICES....16
1.5.8 PERMITS/LICENSES....16
1.5.9 POSTING AND FILING OF REGULATIONS....16
1.5.10 VA RESPONSIBILITIES....16
1.5.11 SITE SECURITY....16
1.5.12 EMERGENCY ACTION PLAN AND ARRANGEMENTS....17
1.5.13 PRE-CONSTRUCTION MEETING....18
1.6 PROJECT COORDINATION....19
1.6.1 PERSONNEL....19
1.7 RESPIRATORY PROTECTION....21
1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM....21
1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR....21
1.7.3 SELECTION AND USE OF RESPIRATORS....21
1.7.4 MINIMUM RESPIRATORY PROTECTION....21

1.7.5 MEDICAL WRITTEN OPINION.....21
1.7.6 RESPIRATOR FIT TEST.....21
1.7.7 RESPIRATOR FIT CHECK.....22
1.7.8 MAINTENANCE AND CARE OF RESPIRATORS.....22
1.7.9 SUPPLIED AIR SYSTEMS.....22
1.8 WORKER PROTECTION.....22
1.8.1 TRAINING OF ABATEMENT PERSONNEL.....22
1.8.2 MEDICAL EXAMINATIONS.....22
1.8.3 PERSONAL PROTECTIVE EQUIPMENT.....23
1.8.4 REGULATED AREA ENTRY PROCEDURE.....23
1.8.5 DECONTAMINATION PROCEDURE - PAPR.....23
1.8.6 REGULATED AREA REQUIREMENTS.....24
1.9 DECONTAMINATION FACILITIES.....24
1.9.1 DESCRIPTION.....24
1.9.2 GENERAL REQUIREMENTS.....24
1.9.3 TEMPORARY FACILITIES TO THE PDF and W/EDF.....25
1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF).....25
1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF).....27
1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES.....28
PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT.....29
2.1 MATERIALS AND EQUIPMENT.....29
2.1.1 GENERAL REQUIREMENTS.....29
2.1.2 NEGATIVE PRESSURE FILTRATION SYSTEM.....30
2.1.3 DESIGN AND LAYOUT.....31
2.1.4 NEGATIVE AIR MACHINES (HEPA UNITS).....31
2.1.5 PRESSURE DIFFERENTIAL.....32
2.1.6 MONITORING.....33
2.1.7 AUXILIARY GENERATOR.....33
2.1.8 SUPPLEMENTAL MAKE-UP AIR INLETS.....33
2.1.9 TESTING THE SYSTEM.....33
2.1.10 DEMONSTRATION OF THE NEGATIVE AIR PRESSURE SYSTEM.....33
2.1.11 USE OF SYSTEM DURING ABATEMENT OPERATIONS.....34
2.1.12 DISMANTLING THE SYSTEM.....34
2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA.....34
2.2.1 GENERAL.....34
2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA.....35
2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA.....35
2.2.4 CRITICAL BARRIERS.....35

2.2.5 PRIMARY BARRIERS.....35
2.2.6 SECONDARY BARRIERS.....36
2.2.7 EXTENSION OF THE REGULATED AREA.....36
2.2.8 FIRESTOPPING.....36
2.3 MONITORING, INSPECTION AND TESTING.....36
2.3.1 GENERAL.....36
2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT.....37
2.3.3 MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH.....38
2.4 STANDARD OPERATING PROCEDURES.....39
2.5 SUBMITTALS.....40
2.5.1 PRE-START MEETING SUBMITTALS.....40
2.5.2 SUBMITTALS DURING ABATEMENT.....43
2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT.....43
2.6 ENCAPSULANTS.....43
2.6.1 TYPES OF ENCAPSULANTS.....43
2.6.2 PERFORMANCE REQUIREMENTS.....44
2.6.3 CERTIFICATES OF COMPLIANCE.....44
PART 3 - EXECUTION.....44
3.1 PRE-ABATEMENT ACTIVITIES.....44
3.1.1 PRE-ABATEMENT MEETING.....44
3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS.....45
3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS.....45
3.2 REGULATED AREA PREPARATIONS.....46
3.3 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA GENERAL.....47
3.4 REMOVAL OF ACM.....48
3.4.1 WETTING ACM.....48
3.4.2 SECONDARY BARRIER AND WALKWAYS.....48
3.4.3 WET REMOVAL OF ACM.....48
3.4.4 WET REMOVAL OF AMOSITE.....50
3.4.5 DISCOVERED MATERIALS.....51
3.4.6 REPLACEMENT OF DIELECTRIC UNIONS.....51
3.5 LOCKDOWN ENCAPSULATION.....51
3.5.1 GENERAL.....51
3.5.2 DELIVERY AND STORAGE.....51
3.5.3 WORKER PROTECTION.....51
3.5.4 ENCAPSULATION OF SCRATCH COAT PLASTER OR PIPING.....51
3.5.5 SEALING EXPOSED EDGES.....52
3.6 DISPOSAL OF ACM WASTE MATERIALS.....52

3.6.1 GENERAL....52
3.6.2 PROCEDURES....52
3.7 PROJECT DECONTAMINATION....53
3.7.1 GENERAL....53
3.7.2 REGULATED AREA CLEARANCE....53
3.7.3 WORK DESCRIPTION....53
3.7.4 PRE-DECONTAMINATION CONDITIONS....53
3.7.5 FIRST CLEANING....54
3.7.6 PRE-CLEARANCE INSPECTION AND TESTING....54
3.7.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES....54
3.8 FINAL VISUAL INSPECTION AND AIR CLEARANCE TESTING....55
3.8.1 GENERAL....55
3.8.2 FINAL VISUAL INSPECTION....55
3.8.3 FINAL AIR CLEARANCE TESTING....55
3.8.4 FINAL AIR CLEARANCE PROCEDURES....55
3.8.5 CLEARANCE SAMPLING USING PCM - LESS THAN 260LF/160SF....56
3.8.6 CLEARANCE SAMPLING USING TEM - EQUAL TO OR MORE THAN 260LF/160SF....56
3.8.7 LABORATORY TESTING OF PCM CLEARANCE SAMPLES....56
3.8.8 LABORATORY TESTING OF TEM SAMPLES....56
3.9 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE....57
3.9.1 COMPLETION OF ABATEMENT WORK....57
3.9.2 CERTIFICATE OF COMPLETION BY CONTRACTOR....57
3.9.3 WORK SHIFTS....57
3.9.4 RE-INSULATION....57
ATTACHMENT #1....58
ATTACHMENT #2....59
ATTACHMENT #3....60
ATTACHMENT #4....61

**PART 1 - GENERAL**

**1.1 SUMMARY OF THE WORK**

**1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS**

Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

**1.1.2 EXTENT OF WORK**

A. Below is a brief description of the estimated quantities of asbestos containing materials to be abated. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.

B. Removal, clean-up and disposal of asbestos containing materials (ACM) and asbestos/waste contaminated elements in an appropriate regulated area for the following approximate quantities;

( 30 ) linear feet of >150 mm (>6") diameter pipe insulation

( 25 ) fittings of >150 mm (>6") in diameter

( 150 ) linear feet of caulk

( 180 ) linear feet of window pane glaze

**1.1.3 RELATED WORK**

A. Section 07 84 00, FIRESTOPPING.

B. Section 02 41 00, DEMOLITION.

C. Division 09, FINISHES

D. Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.

E. Section 23 21 13, HYDRONIC PIPING.

F. Section 23 31 00, HVAC DUCTS AND CASINGS / Section 23 37 00, AIR OUTLETS AND INLETS.

**1.1.4 TASKS**

The work tasks are summarized briefly as follows:

A. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, regulated area preparations, emergency procedures arrangements, and standard operating procedures for asbestos abatement work.

B. Abatement activities including removal, clean-up and disposal of ACM waste, recordkeeping, security, monitoring, and inspections.

C. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

**1.1.5 CONTRACTORS USE OF PREMISES**

A. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.

B. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved pre-abatement work plan. Asbestos abatement drawings of partially occupied buildings will show the limits of regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action. The following limitations of use shall apply to existing facilities shown on drawings:

Reference Section 028211-A, the asbestos inspection report, “Limited Asbestos Inventory Summary: Building 112 Emergency Elevator Project VA#695-12-117, VA Medical Center, Building 112, 5000 W. National Avenue, Milwaukee, Wisconsin”, prepared by Sigma Environmental Services, Inc.

**1.2 VARIATIONS IN QUANTITY**

The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimated which are limited

by the physical constraints imposed by occupancy of the buildings. Accordingly, minor variations (+/- 5%) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the contractor shall provide unit prices for newly discovered materials and those prices shall be used for additional work required under the contractor.

Additionally, it may be later determined that materials designated as Assumed to Contain (ATC) do not contain greater than one percent asbestos. As such, the contractor shall provide unit pricing for all materials designated as POS and ATC. Materials designated as ATC which are later determined to contain less than one percent asbestos may be removed from the contract at the discretion of the owner. The dollar amount deducted from the contract will be determined by multiplying the quantity of ATC materials determined to be non-ACM by the unit costs.

**1.3 STOP ASBESTOS REMOVAL**

If the Contracting Officer; their field representative; or the VPIH/CIH presents a written **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered air flow and adequately wet any exposed ACM. The Contractor shall not resume any asbestos removal activity until authorized to do so by the VA. A stop asbestos removal order may be issued at any time the VA determines abatement conditions/activities are not within specification requirements. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the industrial hygienist's time. The occurrence of any of the following events shall be reported immediately by the Contractor’s competent person in writing to the VA representative and shall require the Contractor to immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities:

A. =/> 0.01 f/cc outside a regulated area or >0.05 f/cc inside a regulated area;
B. breach/break in regulated area barrier(s);
C. less than -0.02” WCG pressure in the regulated area;
D. serious injury/death at the site;
E. fire/safety emergency at the site;
F. respiratory protection system failure;
G. power failure or loss of wetting agent; or
H. any visible emissions observed outside the regulated area.

## 1.4 DEFINITIONS

### 1.4.1 GENERAL

Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

### 1.4.2 GLOSSARY

**Abatement** - Procedures to control fiber release from asbestos-containing materials, typically during removal. Includes removal, encapsulation, enclosure, demolition and renovation activities related to asbestos.

**ACE** - Asbestos contaminated elements.

**ACM** - Asbestos containing material.

**Aerosol** - Solid or liquid particulate suspended in air.

**Adequately wet** - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

**Aggressive method** - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

**Aggressive sampling** - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

**AHERA** - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

**Aircell** - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

**Air monitoring** - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air.

**Air sample filter** - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

**Amended water** - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

**Asbestos** - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

**Asbestos-containing material (ACM)** - Any material containing more than one percent of asbestos.

**Asbestos contaminated elements (ACE)** - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

**Asbestos-containing waste material** - Asbestos-containing material or asbestos contaminated objects requiring disposal.

**Asbestos waste decontamination facility** - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

**Authorized person** - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

**Authorized visitor** - Any person approved by the VA; the contractor; or any government agency having jurisdiction over the regulated area.

**Barrier** - Any surface the isolates the regulated area and inhibits fiber migration from the regulated area.

**Containment Barrier** - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

**Critical Barrier** - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting secured in place at openings such as doors, windows, or any other opening into the regulated area.

**Primary Barrier** - Barriers placed over critical barriers and exposed directly to abatement work.

**Secondary Barrier** - Any additional sheeting used to isolate and provide protection from debris during abatement work.

**Breathing zone** - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

**Bridging encapsulant** - An encapsulant that forms a layer on the surface of the ACM.

**Building/facility owner** - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

**Bulk testing** - The collection and analysis of suspect asbestos containing materials.

**Certified Industrial Hygienist (CIH)** - One certified in practice of industrial hygiene by the American Board of Industrial Hygiene. An industrial hygienist Certified in Comprehensive Practice by the American Board of Industrial Hygiene.

**Class I asbestos work** - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

**Class II asbestos work** - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

**Clean room/Changing room** - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

**Clearance sample** - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's industrial hygiene consultant (VPIH/CIH.

**Closely resemble** - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

**Competent person** - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

**Contractor's Professional Industrial Hygienist (CPIH)** - The asbestos abatement contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of the PIH.

**Count** - Refers to the fiber count or the average number of fibers greater than five microns in length per cubic centimeter of air.

**Decontamination area/unit** - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room,

and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

**Demolition** - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

**Disposal bag** - Typically 6 mil thick siftproof, dustproof, leaktight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

**Disturbance** - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag which shall not exceed 60 inches in length or width.

**Drum** - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be siftproof, dustproof, and leaktight.

**Employee exposure** - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

**Encapsulant** - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

**Encapsulation** - Treating ACM with an encapsulant.

**Enclosure** - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

**Equipment room** - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

**Fiber** - A particulate form of asbestos, 5 microns or longer, with a length to width ratio of at least 3 to 1.

**Fibers per cubic centimeter (f/cc)** - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

**Filter** - Media used in respirators, vacuums, or other machines to remove particulate from air.

**Firestopping** - Material used to close the open parts of a structure in order to prevent a fire from spreading.

**Friable asbestos containing material** - Any material containing more than 1 percent asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

**Glovebag** - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

**High efficiency particulate air (HEPA) filter** - A filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 microns or greater in diameter.

**HEPA vacuum** - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

**Homogeneous area** - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

**HVAC** - Heating, Ventilation and Air Conditioning

**Industrial hygienist** - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

**Industrial hygienist technician** - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned.

**Intact** - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

**Lockdown** - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

**National Emission Standards for Hazardous Air Pollutants (NESHAP's)** - EPA's rule to control emissions of asbestos to the environment.

**Negative initial exposure assessment** - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL's.

**Negative pressure** - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through

HEPA equipped filtration units. OSHA requires maintaining -0.02" water column gauge inside the negative pressure enclosure.

**Negative pressure respirator** - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air outside the respirator.

**Non-friable ACM** - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

**Organic vapor cartridge** - The type of cartridge used on air purifying respirators for organic vapor exposures.

**Outside air** - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

**Owner/operator** - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

**Penetrating encapsulant** - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

**Personal sampling/monitoring** - Representative air samples obtained in the breathing zone of the person using a cassette and battery operated pump to determine asbestos exposure.

**Permissible exposure limit (PEL)** - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the PEL is 0.1 fibers per cc.

**Polarized light microscopy (PLM)** - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

**Polyethylene sheeting** - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, sometimes flame retardant in compliance with NFPA 241.

**Positive/negative fit check** - A method of verifying the fit of a respirator by closing off the filters and breathing in or closing off the exhalation valve and breathing out while detecting leakage of the respirator.

**Presumed ACM (PACM)** - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as

PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (k)(5).

**Professional IH** - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH.

**Project designer** - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B)(5).

**Protection factor** - A value assigned by OSHA/NIOSH to indicate the assigned protection a respirator should provide if worn properly. The number indicates the reduction of exposure level from outside to inside the respirator.

**Qualitative fit test (QLFT)** - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

**Quantitative fit test (QNFT)** - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

**Regulated area** - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

**Regulated ACM (RACM)** - Friable ACM; Category I nonfriable ACM that has become friable; Category I nonfriable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II nonfriable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

**Removal** - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

**Renovation** - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

**Repair** - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

**Shower room** - The portion of the PDF where personnel shower before leaving the regulated area. Also used for bag/drum decontamination in the EDF.

**Standard operating procedures (SOP's)** - Asbestos work procedures required to be submitted by the contractor before work begins.

**Supplied air respirator (SAR)** - A respirator that utilizes an air supply separate from the air in the regulated area.

**Surfacing ACM** - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

**Surfactant** - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

**Thermal system ACM** - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

**Transmission electron microscopy (TEM)** - A microscopy method that can identify and count asbestos fibers.

**VA Industrial Hygienist (VPIH)** - Department of Veterans Affairs Professional Industrial Hygienist.

**VA Certified Industrial Hygienist (VPCIH)** - Department of Veterans Affairs Professional Certified Industrial Hygienist.

**VA Representative** - The VA official responsible for on-going project work.

**Visible emissions** - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM or ACM waste material.

**Waste/Equipment decontamination facility (W/EDF) - The area in which equipment is decontaminated before removal from the regulated area.**

**Waste generator** - Any owner or operator whose act or process produces asbestos-containing waste material.

**Waste shipment record** - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

**Wet cleaning** - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

**1.4.3 REFERENCED STANDARDS ORGANIZATIONS**

The following acronyms or abbreviations as referenced in contract/specification documents are defined to mean the associated names. Names and addresses may be subject to change.

A. VA Department of Veterans Affairs
810 Vermont Avenue, NW
Washington, DC 20420

B. AIHA American Industrial Hygiene Association
2700 Prosperity Avenue, Suite 250
Fairfax, VA 22031
703-849-8888

C. ANSI American National Standards Institute
1430 Broadway
New York, NY 10018
212-354-3300

D. ASTM American Society for Testing and Materials
1916 Race St.
Philadelphia, PA 19103
215-299-5400

E. CFR Code of Federal Regulations
Government Printing Office
Washington, DC 20420

F. CGA Compressed Gas Association
1235 Jefferson Davis Highway
Arlington, VA 22202
703-979-0900

G. CS Commercial Standard of the National Institute of Standards and Technology (NIST)
U. S. Department of Commerce
Government Printing Office
Washington, DC 20420

H. EPA Environmental Protection Agency
401 M St., SW
Washington, DC 20460
202-382-3949

I. MIL-STD Military Standards/Standardization Division
Office of the Assistant Secretary of Defense
Washington, DC 20420

J. MSHA Mine Safety and Health Administration
Respiratory Protection Division
Ballston Tower #3
Department of Labor
Arlington, VA 22203
703-235-1452

K. NIST National Institute for Standards and Technology
U. S. Department of Commerce
Gaithersburg, MD 20234
301-921-1000

L. NEC National Electrical Code (by NFPA)

M. NEMA National Electrical Manufacturer's Association
2101 L Street, N.W.
Washington, DC 20037

N. NFPA National Fire Protection Association
1 Batterymarch Park
P.O. Box 9101
Quincy, MA 02269-9101
800-344-3555

O. NIOSH National Institutes for Occupational Safety and Health
4676 Columbia Parkway
Cincinnati, OH 45226
513-533-8236

P. OSHA Occupational Safety and Health Administration
U.S. Department of Labor
Government Printing Office
Washington, DC 20402

Q. UL Underwriters Laboratory
333 Pfingsten Rd.
Northbrook, IL 60062
312-272-8800

R. USA United States Army
Army Chemical Corps
Department of Defense
Washington, DC 20420

**1.5 APPLICABLE CODES AND REGULATIONS**

**1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS**

A. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes

governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.

B. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specification exists, the most stringent requirement(s) shall be utilized.

C. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system.

**1.5.2 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITY**

The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment as required by applicable Federal, State and Local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor’s failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor will incur all costs of the CPIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements related to failure to comply with the regulations applicable to the work.

**1.5.3 FEDERAL REQUIREMENTS**

Federal requirements which govern of asbestos abatement include, but are not limited to, the following regulations.

A. Occupational Safety and Health Administration **(OSHA)**

1. Title 29 CFR 1926.1101 - Construction Standard for Asbestos
2. Title 29 CFR 1910.132 - Personal Protective Equipment
3. Title 29 CFR 1910.134 - Respiratory Protection
4. Title 29 CFR 1926 - Construction Industry Standards
5. Title 29 CFR 1910.20 - Access to Employee Exposure and Medical Records
6. Title 29 CFR 1910.1200 - Hazard Communication
7. Title 29 CFR 1910.151 - Medical and First Aid

B. Environmental Protection Agency **(EPA)**:
   1. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
   2. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)
C. Department of Transportation **(DOT)**
   Title 49 CFR 100 - 185 - Transportation

**1.5.4 STATE REQUIREMENTS**

State requirements that apply to the asbestos abatement work, disposal, clearance, etc., include, but are not limited to, the following:

Wisconsin Administrative Code NR 447

Wisconsin State Statues 285.11, 285.13, 285.17 and 285.27

Wisconsin Department of Health Services DHS 159

**1.5.5 STANDARDS**

A. Standards which govern asbestos abatement activities include, but are not limited to, the following:
   1. American National Standards Institute (ANSI) Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems Z88.2 - Practices for Respiratory Protection.
   2. Underwriters Laboratories (UL) 586-90 - UL Standard for Safety of HEPA Filter Units, 7th Edition.
B. Standards which govern encapsulation work include, but are not limited to the following:
   1. American Society for Testing and Materials (ASTM)
C. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
   1. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
   2. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
   3. NFPA 101 - Life Safety Code

**1.5.6 EPA GUIDANCE DOCUMENTS**

A. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.
B. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
C. Asbestos Waste Management Guidance EPA 530-SW-85-007
D. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001
E. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

**1.5.7 NOTICES**

A. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM as follows:

B. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification is given to EPA, State, and Local authorities.

**1.5.8 PERMITS/LICENSES**

A. The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

**1.5.9 POSTING AND FILING OF REGULATIONS**

A. Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each in the clean room at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

**1.5.10 VA RESPONSIBILITIES**

Prior to commencement of work:

A. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipment and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**

B. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized and method of analysis. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

**1.5.11 SITE SECURITY**

A. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.

B. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent Person shall immediately notify the VA.

C. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.

D. Access to the regulated area shall be through a single decontamination unit. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall not be locked from the inside, however, they shall be sealed with poly sheeting and taped until needed.

E. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.

F. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.

G. The regulated area shall be locked during non-working hours and secured by VA security/police guards.

**1.5.12 EMERGENCY ACTION PLAN AND ARRANGEMENTS**

A. An Emergency Action Plan shall be developed by prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a);(b).

B. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.

C. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.

D. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls,

confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.

E. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
   1. For non life-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
   2. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, remove them from the regulated area, and secure proper medical treatment.

F. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.

G. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.

H. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the standard operating procedures during abatement. Such incidents include, but are not limited to, fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

**1.5.13 PRE-CONSTRUCTION MEETING**

Prior to commencing the work, the Contractor shall meet with the VA Certified Industrial Hygienist (VPCIH) to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

A. Proof of Contractor licensing.

B. Proof the Competent Person(s) is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person(s) shall also be presented.

C. A list of all workers who will participate in the project, including experience and verification of training and accreditation.

D. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.

E. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).

F. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.

G. A copy of the Contractor's Standard Operating Procedures for Asbestos Abatement. In these procedures, the following information must be detailed, specific for this project.

1. Regulated area preparation procedures;
2. Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
3. Decontamination area set-up/layout and decontamination procedures for employees;
4. Abatement methods/procedures and equipment to be used;
5. Personal protective equipment to be used;

H. At this meeting the Contractor shall provide all submittals as required.

I. Procedures for handling, packaging and disposal of asbestos waste.

J. Emergency Action Plan and Contingency Plan Procedures.

**1.6 PROJECT COORDINATION**

The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

**1.6.1 PERSONNEL**

A. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.

B. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval

shall be submitted for any person to be employed during the project giving the person's name; qualifications; accreditation card with color picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.

C. Minimum qualifications for Contractor and assigned personnel are:

1. The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive standard operating procedures for asbestos work; has adequate materials, equipment and supplies to perform the work.
2. The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
3. The Contractor Professional Industrial Hygienist (CPIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete standard operating procedure for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.
4. The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the standard operating procedures of the Contractor; has one year of asbestos abatement experience; has applicable medical and respiratory protection documentation; has certificate of training/current refresher and State accreditation/license.

**1.7 RESPIRATORY PROTECTION**

**1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM**

The Contractor shall develop and implement a Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.132;134. ANSI Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written respiratory protection shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c)(1)(i - ix) - Respiratory Protection Program.

**1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR**

The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years experience coordinating the program. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

**1.7.3 SELECTION AND USE OF RESPIRATORS**

The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualification. The procedure must written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit for reference by employees or authorized visitors.

**1.7.4 MINIMUM RESPIRATORY PROTECTION**

Minimum respiratory protection shall be a full face powered air purifying respirator when fiber levels are maintained consistently at or above 0.5 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

**1.7.5 MEDICAL WRITTEN OPINION**

No employee shall be allowed to wear a respirator unless a physician has determined they are capable of doing so and has issued a current written opinion for that person.

**1.7.6 RESPIRATOR FIT TEST**

All personnel wearing respirators shall have a current qualitative/quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Quantitative fit tests shall be done for PAPR's which have been put into a failure mode.

**1.7.7 RESPIRATOR FIT CHECK**

The Competent Person shall assure that the positive/negative fit check is done each time the respirator is donned by an employee. Headcoverings must cover respirator headstraps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a fit check shall preclude that person from wearing a respirator until resolution of the problem.

**1.7.8 MAINTENANCE AND CARE OF RESPIRATORS**

The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) Maintenance and care of respirators.

**1.7.9 SUPPLIED AIR SYSTEMS**

If a supplied air system is used, the system shall meet all requirements of 29 CFR 1910.134 and the ANSI/Compressed Gas Association (CGA) Commodity Specification for Air current requirements for Type 1 - Grade D breathing air. Low pressure systems are not allowed to be used on asbestos abatement projects. Supplied Air respirator use shall be in accordance with EPA/NIOSH publication EPA-560-OPTS-86-001 "A Guide to Respiratory Protection for the Asbestos Abatement Industry".

**1.8 WORKER PROTECTION**

**1.8.1 TRAINING OF ABATEMENT PERSONNEL**

Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

**1.8.2 MEDICAL EXAMINATIONS**

Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the opinion the person has been evaluated for working in a heat stress environment while wearing personal protective equipment and is able to perform the work.

**1.8.3 PERSONAL PROTECTIVE EQUIPMENT**

Provide whole body clothing, head coverings, gloves and foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.

**1.8.4 REGULATED AREA ENTRY PROCEDURE**

The Competent Person shall ensure that each time workers enter the regulated area, they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

**1.8.5 DECONTAMINATION PROCEDURE - PAPR**

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

A. When exiting the regulated area, remove disposable coveralls, and ALL other clothes, disposable head coverings, and foot coverings or boots in the equipment room.

B. Still wearing the respirator and completely naked, proceed to the shower. Showering is MANDATORY. Care must be taken to follow reasonable procedures in removing the respirator to avoid asbestos fibers wile showering. The following procedure is required as a minimum:

   1. Thoroughly wet body including hair and face. If using a PAPR hold blower above head to keep filters dry.
   2. With respirator still in place, thoroughly decontaminate body, hair, respirator face piece, and all other parts of the respirator except the blower and battery pack on a PAPR. Pay particular attention to cleaning the seal between the face and respirator facepiece and under the respirator straps.
   3. Take a deep breath, hold it and/or exhale slowly, completely wetting hair, face, and respirator. While still holding breath, remove the respirator and hold it away from the face before starting to breathe.

C. Carefully decontaminate the facepiece of the respirator inside and out. If using a PAPR, shut down using the following sequence: a) first cap inlets to filters; b) turn blower off to keep debris collected on the inlet side of the filter from dislodging and contaminating the outside

of the unit; c) thoroughly decontaminate blower and hoses; d) carefully decontaminate battery pack with a wet rag being cautious of getting water in the battery pack thus preventing destruction. **(THIS PROCEDURE IS NOT A SUBSTITUTE FOR RESPIRATOR CLEANING!).**

D. Shower and wash body completely with soap and water. Rinse thoroughly.

E. Rinse shower room walls and floor to drain prior to exiting.

F. Proceed from shower to clean room; dry off and change into street clothes or into new disposable work clothing.

**1.8.6 REGULATED AREA REQUIREMENTS**

The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for regulated areas at 29 CFR 1926.1101 (e) are met. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

**1.9 DECONTAMINATION FACILITIES**

**1.9.1 DESCRIPTION**

Provide each regulated area with separate personnel (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF are the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

**1.9.2 GENERAL REQUIREMENTS**

All personnel entering or exiting a regulated area must go through the PDF and shall follow the requirements at 29 CFR 1926.1101 (j)(1) and these specifications. All waste, equipment and contaminated materials must exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3 layers of 6 mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 6 mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weight inner doorway sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting and reduce potential for non-authorized personnel entering the regulated area.

**1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF**

The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141(d)(3). Provide adequate temporary overhead electric power with ground fault circuit interruption (GFCI) protection. Provide a sub-panel for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat, if needed, to maintain 70°F throughout the PDF and W/EDF.

**1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)**

The Competent Person shall provide a PDF consisting of shower room which is contiguous to a clean room and equipment room which is connected to the regulated area. The PDF must be sized to accommodate the number of personnel scheduled for the project. The shower room, located in the center of the PDF, shall be fitted with as many portable showers as necessary to insure all employees can complete the entire decontamination procedure within 15 minutes. The PDF shall be constructed of opaque poly for privacy. The PDF shall be constructed to eliminate any parallel routes of egress without showering.

1. Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 3 layers of 6 mil opaque fire retardant poly to provide an air tight room. Provide a minimum of 2 - 900 mm (3 foot) wide 6 mil poly opaque fire retardant doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry condition. Shower overflow shall not be allowed into the clean room. Provide 1 storage locker per person. A portable fire extinguisher, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at

both entry points to the PDF so no male can enter or exit the PDF during her stay in the PDF.

2. Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the equipment room to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using air tight walls made from at least 3 layers of 6 mil opaque fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter; and a final 5 micron filter. Filters will be changed a minimum of daily or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.
3. Equipment Room: The Competent Person shall provide an equipment room which shall be an air tight compartment for the storage of work equipment/tools, reusable personal protective equipment, except for a respirator and for use as a gross decontamination area for personnel exiting the regulated area. The equipment room shall be separated from the regulated area by a minimum 3 foot wide door made with 2 layers of 6 mil opaque fire retardant poly. The equipment room shall be separated from the regulated area, the shower room and the rest of the building by air tight walls and ceiling constructed of a minimum of 3 layers of 6 mil opaque fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 6 mil fire retardant poly per shift change and remove this layer after each shift. If needed, provide a temporary electrical sub-panel equipped with GFCI in the equipment room to accommodate any equipment required in the regulated area.

4. The PDF shall look like as follows: Clean room at the entrance followed by a shower room followed by an equipment room leading to the regulated area. Each doorway in the PDF is minimum of 2 layers of 6 mil opaque fire retardant poly.

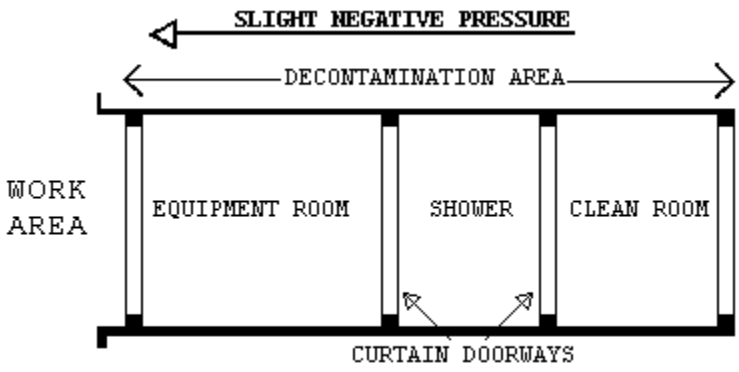


**1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF)**

The Competent Person shall provide an W/EDF consisting of a wash room, holding room, and clean room for removal of waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:

1. Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment bag and container cleaning station.
2. Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area. Construct the wash room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2 layers of 6 mil fire retardant poly.
3. Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. The holding room shall be located so that bagged material cannot be passed from the wash room to the clean room unless

it goes through the holding room. Doorways in the holding room shall be constructed of 2 layers of 6 mil fire retardant poly.

4. Clean Room: Provide a clean room to isolate the holding room from the exterior of the regulated area. Construct the clean room using 2 x 4 wood framing and 2 layers of 6 mil fire retardant poly. The clean room shall be located so as to provide access to the holding room from the building exterior. Doorways to the clean room shall be constructed of 2 layers of 6 mil fire retardant poly. When a negative pressure differential system is used, a rigid enclosure separation between the W/EDF clean room and the adjacent areas shall be provided.
5. The W/EDF shall be provided as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

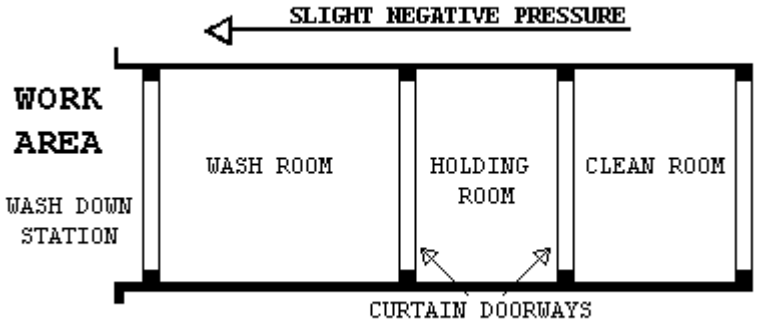


**1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES**

At washdown station in the regulated area, thoroughly wet clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and disposal. These personnel will not be required to wear PPE. At no

time shall personnel from the clean side be allowed to enter the Wash Room.

**PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT**

**2.1 MATERIALS AND EQUIPMENT**

**2.1.1 GENERAL REQUIREMENTS**

Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH has submitted verification to the VA's representative.

A. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).

B. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.

C. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized place.

D. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.

E. Polyethylene sheeting for walls in the regulated area shall be a minimum of 4-mils. For floors and all other uses, sheeting of at least 6-mils shall be used in widths selected to minimize the frequency of joints. Fire retardant poly shall be used throughout.

F. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or other effective procedures capable of sealing polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.

G. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 6 mil fire retardant poly.

H. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.

I. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.

J. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).

K. Disposal bags - 2 layers of 6 mil, for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.

L. The VA shall be provided a copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication. Chlorinated compounds shall not be used with any spray adhesive or other product. Appropriate encapsulant(s) shall be provided.

M. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k)(7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.

N. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a hazard assessment conducted under 29 CFR 1910.132(d).

**2.1.2 NEGATIVE PRESSURE FILTRATION SYSTEM**

The Contractor shall provide enough HEPA negative air machines to completely exchange the regulated area air volume 4 times per hour. The Competent Person shall determine the number of units needed for the regulated area by dividing the cubic feet in the regulated area by 15 and then dividing that result by the cubic feet per minute (CFM) for each unit to determine the number of units needed to effect 4 air changes per hour. Provide a standby unit in the event of machine failure and/or emergency in an adjacent area.

NIOSH has done extensive studies and has determined that negative air machines typically operate at ~50% efficiency. The contractor shall consider this in their determination of number of units needed to provide 4 air changes per hour. The contractor shall use 8 air changes per hour or double the number of machines based on their calculations or submit proof their machines operate at stated capacities at a 2" pressure drop across the filters.

**2.1.3 DESIGN AND LAYOUT**

A. Before start of work submit the design and layout of the regulated area and the negative air machines. The submittal shall indicate the number of, location of and size of negative air machines. The point(s) of exhaust, air flow within the regulated area, anticipated negative pressure differential, and supporting calculations for sizing shall be provided. In addition, submit the following:
   1. Method of supplying power to the units and designation/location of the panels.
   2. Description of testing method(s) for correct air volume and pressure differential.
   3. If auxiliary power supply is to be provided for the negative air machines, provide a schematic diagram of the power supply and manufacturer's data on the generator and switch.

**2.1.4 NEGATIVE AIR MACHINES (HEPA UNITS)**

A. Negative Air Machine Cabinet: The cabinet shall be constructed of steel or other durable material capable of withstanding potential damage from rough handling and transportation. The width of the cabinet shall be less than 30" in order to fit in standard doorways. The cabinet must be factory sealed to prevent asbestos fibers from being released during use, transport, or maintenance. Any access to and replacement of filters shall be from the inlet end. The unit must be on casters or wheels.

B. Negative Air Machine Fan: The rating capacity of the fan must indicate the CFM under actual operating conditions. Manufacturer's typically use "free-air" (no resistance) conditions when rating fans. The fan must be a centrifugal type fan.

C. Negative Air Machine Final Filter: The final filter shall be a HEPA filter. The filter media must be completely sealed on all edges within a structurally rigid frame. The filter shall align with a continuous flexible gasket material in the negative air machine housing to form an air tight seal. Each HEPA filter shall be certified by the manufacturer

to have an efficiency of not less than 99.97% when challenged with 0.3 µm dioctylphthalate (DOP) particles. Testing shall have been done in accordance with Military Standard MIL-STD-282 and Army Instruction Manual 136-300-175A. Each filter must bear a UL586 label to indicate ability to perform under specified conditions. Each filter shall be marked with the name of the manufacturer, serial number, air flow rating, efficiency and resistance, and the direction of test air flow.

D. Negative Air Machine Pre-filters: The pre-filters, which protect the final HEPA filter by removing larger particles, are required to prolong the operating life of the HEPA filter. Two stages of pre-filtration are required. A first stage pre-filter shall be a low efficiency type for particles 10 µm or larger. A second stage pre-filter shall have a medium efficiency effective for particles down to 5 µm or larger. Pre-filters shall be installed either on or in the intake opening of the NAM and the second stage filter must be held in place with a special housing or clamps.

E. Negative Air Machine Instrumentation: Each unit must be equipped with a gauge to measure the pressure drop across the filters and to indicate when filters have become loaded and need to be changed. A table indicating the cfm for various pressure readings on the gauge shall be affixed near the gauge for reference or the reading shall indicate at what point the filters shall be changed, noting cfm delivery. The unit must have an elapsed time meter to show total hours of operation.

F. Negative Air Machine Safety and Warning Devices: An electrical/ mechanical lockout must be provided to prevent the fan from being operated without a HEPA filter. Units must be equipped with an automatic shutdown device to stop the fan in the event of a rupture in the HEPA filter or blockage in the discharge of the fan. Warning lights are required to indicate normal operation; too high a pressure drop across filters; or too low of a pressure drop across filters.

G. Negative Air Machine Electrical: All electrical components shall be approved by the National Electrical Manufacturer's Association (NEMA) and Underwriter's Laboratories (UL). Each unit must be provided with overload protection and the motor, fan, fan housing, and cabinet must be grounded.

**2.1.5 PRESSURE DIFFERENTIAL**

The fully operational negative air system within the regulated area shall continuously maintain a pressure differential of -0.02" water column gauge. Before any disturbance of any asbestos material, this

shall be demonstrated to the VA by use of a pressure differential meter/manometer as required by OSHA 29 CFR 1926.1101(e)(5)(i). The Competent Person shall be responsible for providing, maintaining, and documenting the negative pressure and air changes as required by OSHA and this specification.

**2.1.6 MONITORING**

The pressure differential shall be continuously monitored and recorded between the regulated area and the area outside the regulated area with a monitoring device that incorporates a strip chart recorder. The strip chart recorder shall become part of the project log and shall indicate at least -0.02" water column gauge for the duration of the project.

**2.1.7 AUXILIARY GENERATOR**

If the building is occupied during abatement, provide an auxiliary gasoline/diesel generator located outside the building in an area protected from the weather. In the event of a power failure, the generator must automatically start and supply power to a minimum of 50% of the negative air machines in operation.

**2.1.8 SUPPLEMENTAL MAKE-UP AIR INLETS**

Provide, as needed for proper air flow in the regulated area, in a location approved by the VA, openings in the plastic sheeting to allow outside air to flow into the regulated area. Auxiliary makeup air inlets must be located as far from the negative air machines as possible, off the floor near the ceiling, and away from the barriers that separate the regulated area from the occupied clean areas. Cover the inlets with weighted flaps which will seal in the event of failure of the negative pressure system.

**2.1.9 TESTING THE SYSTEM**

The negative pressure system must be tested before any ACM is disturbed in any way. After the regulated area has been completely prepared, the decontamination units set up, and the negative air machines installed, start the units up one at a time. Demonstrate and document the operation and testing of the negative pressure system to the VA using smoke tubes and a negative pressure gauge. Testing must also be done at the start of each work shift.

**2.1.10 DEMONSTRATION OF THE NEGATIVE AIR PRESSURE SYSTEM**

The demonstration of the operation of the negative pressure system to the VA shall include, but not be limited to, the following:

A. Plastic barriers and sheeting move lightly in toward the regulated area.
B. Curtains of the decontamination units move in toward regulated area.

C. There is a noticeable movement of air through the decontamination units. Use the smoke tube to demonstrate air movement from the clean room to the shower room to the equipment room to the regulated area.

D. Use smoke tubes to demonstrate air is moving across all areas in which work is to be done. Use a differential pressure gauge to indicate a negative pressure of at least -0.02" across every barrier separating the regulated area from the rest of the building. Modify the system as necessary to meet the above requirements.

**2.1.11 USE OF SYSTEM DURING ABATEMENT OPERATIONS**

A. Start units before beginning any disturbance of ACM occurs. After work begins, the units shall run continuously, maintaining 4 actual air changes per hour at a negative pressure differential of -0.02" water column gauge, for the duration of the work until a final visual clearance and final air clearance has been completed.
The negative air machines shall not be shut down for the duration of the project unless authorized by the VA, in writing.

B. Abatement work shall begin at a location farthest from the units and proceed towards them. If an electric failure occurs, the Competent Person shall stop all abatement work and immediately begin wetting all exposed asbestos materials for the duration of the power outage. Abatement work shall not resume until power is restored and all units are operating properly again.

C. The negative air machines shall continue to run after all work is completed and until a final visual clearance and a final air clearance has been completed for that regulated area.

**2.1.12 DISMANTLING THE SYSTEM**

After completion of the final visual and final air clearance has been obtained by the VPIH/CIH, the units may be shut down. The units shall have been **completely decontaminated**, all pre-filters removed and disposed of as asbestos waste, asbestos labels attached and the units inlet/outlet sealed with 2 layers of 6 mil poly.

**2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA**

**2.2.1 GENERAL**

Seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All surfaces in the regulated area must be covered to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated as a result of the work, shall immediately stop work and clean up the contamination at no additional cost to the VA. Provide firestopping and identify all fire barrier

penetrations due to abatement work as specified in Section 2.2.8; FIRESTOPPING.

**2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA**

Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. All uncontaminated removable furniture, equipment and/or supplies shall be removed by the VA from the regulated area before commencing work. Any objects remaining in the regulated area shall be completely covered with 2 layers of 6-mil fire retardant poly sheeting and secured with duct tape. Lock out and tag out any HVAC/electrical systems in the regulated area.

**2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA**

Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA DANGER demarcation signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid and capable of withstanding the negative pressure.

**2.2.4 CRITICAL BARRIERS**

Completely separate any operations in the regulated area from adjacent areas using 2 layers of 6 mil fire retardant poly and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects/openings in the regulated area. Heat must be shut off any objects covered with poly.

**2.2.5 PRIMARY BARRIERS**

A. Cover the regulated area with two layers of 6 mil fire retardant poly on the floors and two layers of 4 mil fire retardant poly on the walls, unless otherwise directed in writing by the VA representative. Floor layers must form a right angle with the wall and turn up the wall at least 300 mm (12"). Seams must overlap at least 1800 mm (6') and must be spray glued and taped. Install sheeting so that layers can be removed independently from each other. Carpeting shall be covered with three layers of 6 mil poly. Corrugated cardboard sheets must be placed between the bottom and middle layers of poly. Mechanically support and seal with duct tape and glue all wall layers.

B. If stairs and ramps are covered with 6 mil plastic, two layers must be used. Provide 19 mm (3/4") exterior grade plywood treads held in place with duct tape/glue on the plastic. Do not cover rungs or rails with any isolation materials.

**2.2.6 SECONDARY BARRIERS**

A loose layer of 6 mil shall be used as a drop cloth to protect the primary layers from debris generated during the abatement. This layer shall be replaced as needed during the work minimally once per work day.

**2.2.7 EXTENSION OF THE REGULATED AREA**

If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. Decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

**2.2.8 FIRESTOPPING**

A. Through penetrations caused by cables, cable trays, pipes, sleeves must be firestopped with a fire-rated firestop system providing an air tight seal.

B. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the VA representative immediately. All walls, floors and ceilings are considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.

C. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

**2.3 MONITORING, INSPECTION AND TESTING**

**2.3.1 GENERAL**

A. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. The CPIH shall is responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH shall personally manage air sample

collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.

B. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.

C. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH with review and approval of the VPIH/CIH. An agreement between the CPIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

**2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT**

A. The purpose of the work of the VPIH/CIH is to: assure quality; adherence to the specification; resolve problems; prevent the spread of

contamination beyond the regulated area; and assure clearance at the end of the project. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:

1. Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
2. Task 2: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
3. Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
4. Task 4: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of conflicts, interpret data, etc.
5. Task 5: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area at the conclusion of the abatement to certify compliance with all regulations and VA requirements/specifications.
6. Task 6: Issue certificate of decontamination for each regulated area and project report.

B. All documentation, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.

C. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

**2.3.3 MONITORING, INSPECTION AND TESTING BY CONTRACTOR CPIH**

The Contractor’s CPIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the

Contractor's personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in air sampling and analysis. The IH Technician shall have a NIOSH 582 Course or equivalent and show proof. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA/State Contractor/Supervisor and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation. The analytical laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT. A daily log documenting all OSHA requirements for air monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH. The log will contain, at a minimum, information on personnel or area sampled, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH responsibilities.

**2.4 STANDARD OPERATING PROCEDURES**

The Contractor shall have established Standard Operating Procedures (SOP's) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the procedures to be followed during all phases of the work by the Contractor's personnel. The SOP's must be modified as needed to address specific requirements of this project and the specifications. The SOP's shall be submitted for review and approval prior to the start

of any abatement work. The minimum topics and areas to be covered by the SOP's are:

A. Minimum Personnel Qualifications
B. Emergency Action Plan/Contingency Plans and Arrangements
C. Security and Safety Procedures
D. Respiratory Protection/Personal Protective Equipment Program and Training
E. Medical Surveillance Program and Recordkeeping
F. Regulated Area Requirements - Containment Barriers/Isolation of Regulated Area
G. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
H. Negative Pressure Systems Requirements
I. Monitoring, Inspections, and Testing
J. Removal Procedures for ACM
K. Removal of Contaminated Soil (if applicable)
L. Encapsulation Procedures for ACM
M. Disposal of ACM waste/equipment
N. Regulated Area Decontamination/Clean-up
O. Regulated Area Visual and Air Clearance
P. Project Completion/Closeout

**2.5 SUBMITTALS**

**2.5.1 PRE-START MEETING SUBMITTALS**

Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:

A. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
B. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
C. Submit Standard Operating Procedures developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH.

D. Submit the specifics of the materials and equipment to be used for this project with brand names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
   1. Supplied air system, if used, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.
   2. Waste water filtration system, shower system, containment barriers.
   3. Encapsulants, surfactants, hand held sprayers, airless sprayers, glovebags, fire extinguishers.
   4. Respirators, protective clothing, personal protective equipment.
   5. Fire safety equipment to be used in the regulated area.

E. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.

F. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.

G. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A.

H. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
   1. Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; Completion Date
   2. List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; Resolution
   3. List asbestos regulatory citations, penalties, damages paid and legal actions taken against the company in the last 3 years. Provide copies and all information needed for verification.

I. Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.

1. CPIH: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials; samples of SOP's developed; medical opinion; current respirator fit test.
2. Competent Person(s)/Supervisor(s): Number; names; years of abatement experience as Competent Person/Supervisor; list of similar projects as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion; current respirator fit test.
3. Workers: Numbers; names; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion; current respirator fit test.

J. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain English the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of SOP's incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who does and how is air monitoring conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and standard operating procedures; copies of monitoring results of the five referenced projects listed and analytical method(s) used.

K. Rented equipment must be decontaminated prior to returning to the rental agency.

L. Submit, before the start of work, the manufacturer's technical data for all types of encapsulants and the MSDS. Provide application instructions also.

**2.5.2 SUBMITTALS DURING ABATEMENT**

A. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breeching, equipment failures, emergencies, and any cause for stopping work; representative air monitoring and results/TWA's/EL's. Submit this information daily to the VPIH/CIH.

B. The CPIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.
   1. Removal of any poly barriers.
   2. Visual inspection/testing by the CPIH prior to application of lockdown.
   3. Packaging and removal of ACM waste from regulated area.
   4. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

**2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT**

The CPIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. The report shall include a certificate of completion, signed and dated by the CPIH, in accordance with Attachment #1. All clearance and perimeter samples must be submitted. The VA Representative will retain the abatement report after completion of the project.

**2.6 ENCAPSULANTS**

**2.6.1 TYPES OF ENCAPSULANTS**

A. The following four types of encapsulants, if used, must comply with comply with performance requirements as stated in paragraph 2.6.2:
   1. Removal encapsulant - used as a wetting agent to remove ACM.
   2. Bridging encapsulant - provides a tough, durable coating on ACM.
   3. Penetrating encapsulant - penetrates/encapsulates ACM at least 13 mm (1/2").
   4. Lockdown encapsulant - seals microscopic fibers on surfaces after ACM removal.

**2.6.2 PERFORMANCE REQUIREMENTS**

Encapsulants shall meet the latest requirements of EPA; shall not contain toxic or hazardous substances; or solvents; and shall comply with the following performance requirements:

A. General Requirements for all Encapsulants:
   1. ASTM E84: Flame spread of 25; smoke emission of 50.
   2. University of Pittsburgh Protocol: Combustion Toxicity; zero mortality.
   3. ASTM C732: Accelerated Aging Test; Life Expectancy - 20 years.
   4. ASTM E96: Permeability - minimum of 0.4 perms.

B. Bridging/Penetrating Encapsulants:
   1. ASTM E736: Cohesion/Adhesion Test - 24 kPa (50 lbs/ft$^2$).
   2. ASTM E119: Fire Resistance - 3 hours (Classified by UL for use on fibrous/cementitious fireproofing).
   3. ASTM D2794: Gardner Impact Test; Impact Resistance - minimum 11.5 kg-mm (43 in/lb).
   4. ASTM D522: Mandrel Bend Test; Flexibility - no rupture or cracking.

C. Lockdown Encapsulants:
   1. ASTM E119: Fire resistance - 3 hours (tested with fireproofing over encapsulant applied directly to steel member).
   2. ASTM E736: Bond Strength - 48 kPa (100 lbs/ft$^2$) (test compatibility with cementitious and fibrous fireproofing).
   3. In certain situations, encapsulants may have to be applied to hot pipes/equipment. The encapsulant must be able to withstand high temperatures without cracking or off-gassing any noxious vapors during application.

**2.6.3 CERTIFICATES OF COMPLIANCE**

The Contractor shall submit to the VA representative certification from the manufacturer indicating compliance with performance requirements for encapsulants when applied according to manufacturer recommendations.

**PART 3 - EXECUTION**

**3.1 PRE-ABATEMENT ACTIVITIES**

**3.1.1 PRE-ABATEMENT MEETING**

The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals

needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

**3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS**

Before any work begins on the construction of the regulated area, the Contractor will:

A. Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.

B. The VA Representative, the Contractor, and the VPIH/CIH must be aware of 10/95 A/E Quality Alert indicating the failure to identify asbestos in the areas listed. Make sure these areas are looked at/reviewed on the project: Lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside chases/walls; transite piping/ductwork/sheets; behind radiators; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawl spaces( previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior insulated wall panels; on underground fuel tanks; steam line trench coverings.

C. Clean and remove or properly protect from contamination all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects required to be removed from the regulated area.

D. If present and required, remove and dispose of carpeting from floors in the regulated area.

E. Inspect existing firestopping in the regulated area. Correct as needed.

**3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS**

A. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.

B. Upon completion of all preparatory work, the CPIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative

may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved SOP's, especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation. The operational systems for respiratory protection and the negative pressure system shall be demonstrated for proper performance.

C. The CPIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.

D. Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification and all applicable regulations.

**3.2 REGULATED AREA PREPARATIONS**

A. Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed ambient background levels. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.

B. Shut down and lock out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code requirements and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.

C. Shut down and lock out heating, cooling, and air conditioning system (HVAC) components that are in, supply or pass through the regulated area. Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil polyethylene disposal bags for staging and eventual disposal as asbestos waste.

D. The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

E. The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.

F. Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location. Drapes, clothing, upholstered furniture and other fabric items should be disposed of as asbestos contaminated waste. Cleaning these asbestos contaminated items utilizing HEPA vacuum techniques and off-premises steam cleaning is very difficult and cannot guarantee decontamination. Since adequate cleaning of contaminated fabrics is difficult, the VA will determine whether this option is an appropriate one. Carpeting will be disposed of prior to abatement if in the regulated area.

G. Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After precleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements.

H. Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

**3.3 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA GENERAL**

Follow requirements of Section 2.2 - Containment Barriers and Coverings. The containment barriers and coverings shall be constructed and maintained in such a manner as to prevent disturbances, damage, or openings in the containment. The containment barriers and coverings shall be inspected on an ongoing basis to ensure the integrity of the containment barriers.

**3.4 REMOVAL OF ACM**

**3.4.1 WETTING ACM**

A. Use amended water for the wetting of ACM prior to removal. The Competent Person shall assure the wetting of ACM meets the definition of "adequately wet" in the EPA NESHAP's regulation and OSHA's "wet methods" for the duration of the project. A removal encapsulant may be used instead of amended water with written approval of the VA's representative.

B. Amended Water: Provide water to which a surfactant has been added shall be used to wet the ACM and reduce the potential for fiber release during disturbance of ACM. The mixture must be equal to or greater than the wetting provided by water amended by a surfactant consisting one ounce of 50% polyoxyethylene ester and 50% polyoxyethylene ether mixed with 5 gallons (19L) of water.

C. Removal Encapsulant: Provide a penetrating encapsulant designed specifically for the removal of ACM. The material must, when used, result in adequate wetting of the ACM and retard fiber release during removal.

**3.4.2 SECONDARY BARRIER AND WALKWAYS**

A. Install as a drop cloth a 6 mil poly sheet at the beginning of each work shift where removal is to be done during that shift. Completely cover floors and any walls within 10 feet (3M) of the area where work is to done. Secure the secondary barrier with duct tape to prevent debris from getting behind it. Remove the secondary barrier at the end of the shift or as work in the area is completed. Keep residue on the secondary barrier wetted. When removing, fold inward to prevent spillage and place in a disposal bag.

B. Install walkways using 6 mil black poly between the regulated area and the decontamination facilities (PDF and W/EDF) to protect the primary layers from contamination and damage. Install the walkways at the beginning of each shift and remove at the end of each shift.

**3.4.3 WET REMOVAL OF ACM**

A. Adequately and thoroughly wet the ACM to be removed prior to removal to reduce/prevent fiber release to the air. Adequate time must be allowed for the amended water to saturate the ACM. Abatement personnel must not disturb dry ACM. Use a fine spray of amended water or removal encapsulant. Saturate the material sufficiently to wet to the substrate without causing excessive dripping. The material must be sprayed repeatedly/continuously during the removal process in order to maintain

adequately wet conditions. Removal encapsulants must be applied in accordance with the manufacturer's written instructions. Perforate or carefully separate, using wet methods, an outer covering that is painted or jacketed in order to allow penetration and wetting of the material. Where necessary, carefully remove covering while wetting to minimize fiber release. **In no event shall dry removal occur except in the case of electrical hazards or a greater safety issue is possible!**

B. If ACM does not wet well with amended water due to coating or jacketing, remove as follows:
   1. Mist work area continuously with amended water whenever necessary to reduce airborne fiber levels.
   2. Remove saturated ACM in small sections. Do not allow material to dry out. As material is removed, bag material while still wet into disposal bags. Twist tightly the bag neck, bend over (gooseneck) and seal with a minimum of three tight wraps of duct tape. Clean /decontaminate the outside of any residue and move to washdown station adjacent to W/EDF.
   3. Fireproofing or Architectural Finish on Scratch Coat: Spray with a fine mist of amended water or removal encapsulant. Allow time for saturation to the substrate. Do not oversaturate causing excess dripping. Scrape material from substrate. Remove material in manageable quantities and control falling to staging or floor. If the falling distance is over 20 feet (6M), use a drop chute to contain material through descent. Remove residue remaining on the scratch coat after scraping is done using a stiff bristle hand brush. If a removal encapsulant is used, remove residue completely before the encapsulant dries. Re-wet the substrate as needed to prevent drying before the residue is removed.
   4. Fireproofing or Architectural Finish on Wire Lath: Spray with a fine mist of amended water or removal encapsulant. Allow time to completely saturate the material. Do not oversaturate causing excess dripping. If the surface has been painted or otherwise coated, cut small holes as needed and apply amended water or removal encapsulant from above. Cut saturated wire lath into 2' x 6' (50mm x 150mm) sections and cut hanger wires. Roll up complete with ACM, cover in burlap and hand place in disposal bag. Do not drop to floor. After removal of lath/ACM, remove any overspray on decking and structure using stiff bristle nylon brushes. Depending on hardness of overspray, scrapers may be needed for removal.

5. Pipe/Tank/Vessel/Boiler Insulation: Remove the outer layer of wrap while spraying with amended water in order to saturate the ACM. Spray ACM with a fine mist of amended water or removal encapsulant. Allow time to saturate the material to the substrate. Cut bands holding pre-formed pipe insulation sections. Slit jacketing at the seams, remove and hand place in a disposal bag. Do not allow dropping to the floor. Remove molded fitting insulation/mud in large pieces and hand place in a disposal bag. Remove any residue on pipe or fitting with a stiff bristle nylon brush. In locations where pipe fitting insulation is removed from fibrous glass or other non-asbestos insulated straight runs of pipe, remove fibrous material at least 6" from the point it contacts the ACM.

**3.4.4 WET REMOVAL OF AMOSITE**

A. Amosite-containing material will require local exhaust ventilation and collection as described below, in addition to wet removal. Amosite-containing materials were not identified in the materials designated as containing greater than one percent asbestos. However, it is possible that amosite is present in materials designated as assumed to contain (ATC) greater than one percent asbestos or which have not been identified and evaluated for asbestos. Any material determined to contain amosite either during the initial asbestos inspection or subsequent inspections shall comply with the following requirements.

B. Provide local exhaust ventilation and collection systems to assure collection of amosite fibers at the point of generation. A 300 mm (12") flexible rigid non-collapsing duct shall be shall be located no more than 600 mm (2') from any scraping/brushing activity. Primary filters must be replaced every 30 minutes on the negative air machines. Each scraping/brushing activity must have a negative air machine devoted to it. For pre-molded pipe insulation or cutting wire lathe attach a 1200 mm (4') square flared end piece on the intake of the duct. Support the duct horizontally at a point 600 mm (2') below the work to effect capture. One person in the crew shall be assigned to operate the duct collection system on a continual basis.

C. Amosite does not wet well with amended water. Submit full information/documentation on the wetting agent proposed prior to start for review and approval by the VA Representative. Insure that the material is worked on in small sections and is thoroughly and continuously wetted. Package as soon as possible while wet. Remove as required.

**3.4.5 DISCOVERED MATERIALS**

During abatement, demolition, renovation, and/or further inspection, a potential exists for encountering materials not previously identified to become revealed. Upon discovery of a material not previously identified, the contractor shall immediately notify the owner who will arrange for and coordinate materials sample collection and analysis if necessary. The contractor is not permitted to collect any material samples for asbestos or other hazardous material analysis.

**3.4.6 REPLACEMENT OF DIELECTRIC UNIONS**

Replace dielectric unions during the abatement process. Allow for 15% of the dielectric unions to be replaced after demolition and full abatement of the area. Glovebag each fitting and have a plumber on standby to replace any unions.

**3.5 LOCKDOWN ENCAPSULATION**

**3.5.1 GENERAL**

Lockdown encapsulation is an integral part of the ACM removal. At the conclusion of ACM removal and before removal of the primary barriers, all surfaces shall be encapsulated with a bridging encapsulant.

**3.5.2 DELIVERY AND STORAGE**

Deliver materials to the job site in original, new and unopened containers bearing the manufacturer's name and label as well as the following information: name of material, manufacturer's stock number, date of manufacture, thinning instructions, application instructions and the MSDS for the material.

**3.5.3 WORKER PROTECTION**

Before beginning work with any material for which an MSDS has been submitted, provide workers with any required personal protective equipment. The required personal protective equipment shall be used whenever exposure to the material might occur. In addition to OSHA/specification requirements for respiratory protection, a paint pre-filter and an organic vapor cartridge, at a minimum, shall used in addition to the HEPA filter when a solvent based encapsulant is used. The CPIH shall be responsible for provision of adequate respiratory protection.

**3.5.4 ENCAPSULATION OF SCRATCH COAT PLASTER OR PIPING**

A. Apply two coats of encapsulant to the scratch coat plaster or piping after all ACM has been removed. Apply in strict accordance with the manufacturer's instructions. Any deviation from the instructions must be

approved by the VA's representative in writing prior to commencing the work.

B. Apply the encapsulant with an airless sprayer at a pressure and using a nozzle orifice as recommended by the manufacturer. Apply the first coat while the while the scratch coat is still damp from the asbestos removal process, after passing the visual inspection. If the surface has been allowed to dry, wet wipe or HEPA vacuum prior to spraying with encapsulant. Apply a second coat over the first coat in strict conformance with the manufacturer's instructions. Color the encapsulant and contrast the color in the second coat so that visual confirmation of completeness and uniform coverage of each coat is possible. Adhere to the manufacturer's instructions for coloring. At the completion of the encapsulation, the surface must be a uniform third color produced by the mixture.

**3.5.5 SEALING EXPOSED EDGES**

Seal edges of ACM exposed by removal work which is inaccessible, such as a sleeve, wall penetration, etc., with two coats of encapsulant. Prior to sealing, permit the exposed edges to dry completely to permit penetration of the encapsulant. Apply in accordance with 3.5.4 (B).

**3.6 DISPOSAL OF ACM WASTE MATERIALS**

**3.6.1 GENERAL**

Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

**3.6.2 PROCEDURES**

A. Asbestos waste shall be packaged and moved through the W/EDF into a covered transport container in accordance with procedures is this specification. Waste shall be double-bagged prior to disposal. Wetted waste can be very heavy. Bags shall not be overfilled. Bags shall securely sealed to prevent accidental opening and/or leakage. The top shall be tightly twisted and goosenecked prior to tightly sealing with at least three wraps of duct tape. Ensure that unauthorized persons do not have access to the waste material once it is outside the regulated area. All transport containers must be covered at all times when not in use. NESHAP's signs must be on containers during loading and unloading. Material shall not be transported in open vehicles. If drums are used

for packaging, the drums shall be labeled properly and shall not be re-used.

B. Waste Load Out: Waste load out shall be done in accordance with the procedures in W/EDF Decontamination Procedures. Bags shall be decontaminated on exterior surfaces by wet cleaning and/or HEPA vacuuming before being placed in the second bag.

C. Asbestos waste with sharp edged components, i.e., nails, screws, lath, strapping, tin sheeting, jacketing, metal mesh, etc., which might tear poly bags shall be wrapped securely in burlap before packaging and, if needed, use a poly lined fiber drum as the second container, prior to disposal.

**3.7 PROJECT DECONTAMINATION**

**3.7.1 GENERAL**

A. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH.

B. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.

C. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

**3.7.2 REGULATED AREA CLEARANCE**

Air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

**3.7.3 WORK DESCRIPTION**

Decontamination includes the clearance of the air in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities, and negative pressure systems.

**3.7.4 PRE-DECONTAMINATION CONDITIONS**

A. Before decontamination starts, all ACM waste from the regulated area shall be removed, all waste collected and removed, and the loose 6 mil layer of poly removed and disposed of along with any gross debris generated by the work.

B. At the start of decontamination, the following shall be in place:

1. Primary barriers consisting of 2 layers of 6 mil poly on the floor and 4 mil poly on the walls.
2. Critical barriers consisting of 2 layers of 6 mil poly which is the sole barrier between the regulated area and openings to the rest of the building or outside.
4. Decontamination facilities for personnel and equipment in operating condition and the negative pressure system in operation.

**3.7.5 FIRST CLEANING**

Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping methods. Use each surface of a cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. If determined by the CPIH/VPIH/CIH additional cleaning(s) may be needed.

**3.7.6 PRE-CLEARANCE INSPECTION AND TESTING**

The CPIH and VPIH/CIH will perform a thorough and detailed visual inspection at the end of the cleaning to determine whether there is any visible residue in the regulated area. If the visual inspection is acceptable, the CPIH will perform pre-clearance sampling using aggressive clearance as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). If the sampling results show values below 0.01 f/cc, then the Contractor shall notify the VA's representative of the results with a brief report from the CPIH documenting the inspection and sampling results and a statement verifying that the regulated area is ready for lockdown encapsulation. The VA reserves the right to utilize their own VPIH/CIH to perform a pre-clearance inspection and testing for verification.

**3.7.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES**

With the express written permission of the VA's representative, perform lockdown encapsulation of all surfaces from which asbestos was abated in accordance with the procedures in this specification. Negative pressure shall be maintained in the regulated area during the lockdown application.

**3.8 FINAL VISUAL INSPECTION AND AIR CLEARANCE TESTING**

**3.8.1 GENERAL**

Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH starting after the final cleaning.

**3.8.2 FINAL VISUAL INSPECTION**

Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no cost to the VA. Dust/material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

**3.8.3 FINAL AIR CLEARANCE TESTING**

A. After an acceptable final visual inspection by the VPIH/CIH and VA Representative AE Project Engineer, the VPIH/CIH will perform the final testing. Air samples will be collected and analyzed in accordance with procedures for AHERA in this specification. If work is less than 260 1f/160 sf, 5 PCM samples may be collected for clearance. If work is equal to or more than 260 1f/160 sf, TEM sampling shall be done for clearance. TEM analysis shall be done in accordance with procedures in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures until clearance is achieved. All **additional inspection and testing costs will be borne by the Contractor.**

B. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

**3.8.4 FINAL AIR CLEARANCE PROCEDURES**

A. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured with PCM/TEM methods and as verified by VPIH/CIH. The asbestos containment is to remain in place and under negative pressure until inspected and removal of the containment is authorized by the VPIH/CIH.

B. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations

have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:

1. Fibers Counted: “Fibers” referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method or asbestos fibers counted using the AHERA TEM method.
2. Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques except where soil is not encapsulated or enclosed. Samples will be collected on 0.8µ MCE filters for PCM analysis and 0.45µ Polycarbonate filters for TEM. A minimum of 1200 Liters of air shall be collected for clearance samples. Before pumps are started, initiate aggressive sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). Air samples will be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off. The negative pressure system shall continue to operate.

**3.8.5 CLEARANCE SAMPLING USING PCM – LESS THAN 260LF/160SF**

A. The VPIH/CIH will perform clearance samples as indicated by the specification.

B. The NIOSH 7400 PCM method will be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 5 PCM clearance samples shall be collected. All samples must be equal to or less than 0.01 f/cc to clear the regulated area.

**3.8.6 CLEARANCE SAMPLING USING TEM – EQUAL TO OR MORE THAN 260LF/160SF**

Clearance requires 13 samples be collected; 5 inside the regulated area; 5 outside the regulated area; and 3 field blanks.

**3.8.7 LABORATORY TESTING OF PCM CLEARANCE SAMPLES**

The services of an AIHA accredited laboratory will be employed by the VA to perform analysis for the air samples. Samples will be sent daily by the VPIH/CIH so that verbal/faxed reports can be received within 24 hours. A complete record, certified by the laboratory, of all air monitoring tests and results will be furnished to the VA’s representative and the Contractor.

**3.8.8 LABORATORY TESTING OF TEM SAMPLES**

Samples shall be sent by the VPIH/CIH to an accredited laboratory for analysis by TEM. Verbal/faxed results from the laboratory shall be available within 24 hours after receipt of the samples. A complete

record, certified by the laboratory, of all TEM results shall be furnished to the VA's representative and the Contractor.

**3.9 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE**

**3.9.1 COMPLETION OF ABATEMENT WORK**

After thorough decontamination, seal negative air machines with 2 layers of 6 mil poly and duct tape to form a tight seal at the intake/outlet ends before removal from the regulated area. Complete asbestos abatement work upon meeting the regulated area visual and air clearance criteria and fulfilling the following:

A. Remove all equipment and materials from the project area.
B. Dispose of all packaged ACM waste as required.
C. Repair or replace all interior finishes damaged during the abatement work, as required.
D. Fulfill other project closeout requirements as required in this specification.

**3.9.2 CERTIFICATE OF COMPLETION BY CONTRACTOR**

The CPIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

**3.9.3 WORK SHIFTS**

All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday -Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

**3.9.4 RE-INSULATION**

Replace all asbestos-containing insulation/fire-proofing with suitable non-asbestos material which is to remain and not be modified by the mechanical contractor. Provide MSDS’s for all replacement materials. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.

**ATTACHMENT #1**

**CERTIFICATE OF COMPLETION**

DATE:

PROJECT NAME:

VAMC/ADDRESS:

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building): which took place from / / / to / /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That the negative pressure system was installed, operated and maintained in order to provide a minimum of 4 actual air changes per hour with a continuous -0.02" of water column pressure.

Signature/Date:

Signature/Date:

**ATTACHMENT #2**

**CERTIFICATE OF WORKER'S ACKNOWLEDGMENT**

PROJECT NAME: DATE:

PROJECT ADDRESS:

ABATEMENT CONTRACTOR'S NAME:

WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

Physical Characteristics and Background Information on Asbestos
Potential Health Effects Related to Exposure to Asbestos
Employee Personal Protective Equipment
Establishment of a Respiratory Protection Program
State of the Art Work Practices
Personal Hygiene
Additional Safety Hazards
Medical Monitoring
Air Monitoring
Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature:

Printed Name:

Witness:

**ATTACHMENT #3**

**AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION**

VA PROJECT NAME AND NUMBER:

VA MEDICAL FACILITY:

ABATEMENT CONTRACTOR'S NAME AND ADDRESS:

1. I verify that the following individual

   Name:

   who is proposed to be employed in asbestos abatement work associated with the above project by the named. Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Contractor at the following address.

   Address:

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

   Signature of CPIH: Date:

   Printed Name of CPIH:

   Signature of Contractor: Date:

   Printed Name of Contractor:

**ATTACHMENT #4**

**ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S ASBESTOS SPECIFICATIONS**

VA Project Location:

VA Project #:

VA Project Description:

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature Date

Abatement Contractor Competent Person(s) Date

Date

Date

- - - E N D - - -

**SECTION 02 82 13.13**
**GLOVEBAG ASBESTOS ABATEMENT**

TABLE OF CONTENTS

PART 1 - GENERAL..... 1
1.1 SUMMARY OF THE WORK..... 1
1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS..... 1
1.1.2 EXTENT OF WORK..... 1
1.1.3 RELATED WORK..... 1
1.1.4 TASKS..... 2
1.1.5 ABATEMENT CONTRACTOR USE OF PREMISES..... 2
1.2 VARIATIONS IN QUANTITY..... 2
1.3 STOP ASBESTOS REMOVAL..... 3
1.4 DEFINITIONS..... 3
1.4.1 GENERAL..... 3
1.4.2 GLOSSARY..... 4
1.4.3 REFERENCED STANDARDS ORGANIZATIONS..... 11
1.5 APPLICABLE CODES AND REGULATIONS..... 13
1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS..... 13
1.5.2 CONTRACTOR RESPONSIBILITY..... 14
1.5.3 FEDERAL REQUIREMENTS..... 14
1.5.4 STATE REQUIREMENTS:..... 14
1.5.5 STANDARDS..... 15
1.5.6 EPA GUIDANCE DOCUMENTS..... 15
1.5.7 NOTICES..... 15
1.5.8 PERMITS/LICENSES..... 15
1.5.9 POSTING AND FILING OF REGULATIONS..... 16
1.5.10 VA RESPONSIBILITIES..... 16
1.5.11 SITE SECURITY..... 16
1.5.12 EMERGENCY ACTION PLAN AND ARRANGEMENTS..... 17
1.5.13 PRE-CONSTRUCTION MEETING..... 18
1.6 PROJECT COORDINATION..... 19
1.6.1 PERSONNEL..... 19
1.7 RESPIRATORY PROTECTION..... 20
1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM..... 20
1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR..... 21
1.7.3 SELECTION AND USE OF RESPIRATORS..... 21
1.7.4 MINIMUM RESPIRATORY PROTECTION..... 21

1.7.5 MEDICAL WRITTEN OPINION..... 21
1.7.6 RESPIRATOR FIT TEST..... 21
1.7.7 RESPIRATOR FIT CHECK..... 21
1.7.8 MAINTENANCE AND CARE OF RESPIRATORS..... 22
1.8 WORKER PROTECTION..... 22
1.8.1 TRAINING OF ABATEMENT PERSONNEL..... 22
1.8.2 MEDICAL EXAMINATIONS..... 22
1.8.3 PERSONAL PROTECTIVE EQUIPMENT..... 22
1.8.4 REGULATED AREA ENTRY PROCEDURE..... 22
1.8.5 DECONTAMINATION PROCEDURE - PAPR..... 23
1.8.6 REGULATED AREA REQUIREMENTS..... 23
1.9 DECONTAMINATION FACILITIES..... 24
1.9.1 DESCRIPTION..... 24
1.9.2 GENERAL REQUIREMENTS..... 24
1.9.3 TEMPORARY FACILITIES TO THE PDF AND w/EDF..... 24
1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)..... 24
1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (w/EDF)..... 26
1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES..... 28
PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT..... 28
2.1 MATERIALS AND EQUIPMENT..... 28
2.1.1 GENERAL REQUIREMENTS (ALL ABATEMENT PROJECTS)..... 28
2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA..... 30
2.2.1 GENERAL..... 30
2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA..... 30
2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA..... 30
2.2.4 CRITICAL BARRIERS..... 30
2.2.5 SECONDARY BARRIERS..... 31
2.2.6 EXTENSION OF THE REGULATED AREA..... 31
2.2.7 FIRESTOPPING..... 31
2.3 MONITORING, INSPECTION AND TESTING..... 31
2.3.1 GENERAL..... 31
2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT..... 32
2.3.3 MONITORING, INSPECTION AND TESTING BY ABATEMENT CONTRACTOR CPIH..... 33
2.4 STANDARD OPERATING PROCEDURES..... 34
2.5 SUBMITTALS..... 35
2.5.1 PRE-CONSTRUCTION MEETING SUBMITTALS..... 35
2.5.2 SUBMITTALS DURING ABATEMENT..... 37
2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT..... 38

2.6 ENCAPSULANTS..... 38
2.6.1 TYPES OF ENCAPSULANTS..... 38
2.6.2 PERFORMANCE REQUIREMENTS..... 38
2.7 CERTIFICATES OF COMPLIANCE..... 39
2.8 RECYCLABLE PROTECTIVE CLOTHING..... 39
PART 3 - EXECUTION..... 39
3.1 PRE-ABATEMENT ACTIVITIES..... 39
3.1.1 PRE-ABATEMENT MEETING..... 39
3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS..... 40
3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS..... 41
3.2 REGULATED AREA PREPARATIONS..... 41
3.2.1 OSHA DANGER SIGNS..... 41
3.2.2 SHUT DOWN - LOCK OUT ELECTRICAL..... 41
3.2.3 SHUT DOWN - LOCK OUT HVAC..... 41
3.2.4 SANITARY FACILITIES..... 42
3.2.5 WATER FOR ABATEMENT..... 42
3.2.6 PRE-CLEANING MOVABLE OBJECTS..... 42
3.2.7 PRE-CLEANING FIXED OBJECTS..... 42
3.2.8 PRE-CLEANING SURFACES IN THE REGULATED AREA..... 42
3.3 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA..... 43
3.3.1 GENERAL..... 43
3.3.2 PREPARATION PRIOR TO SEALING OFF..... 43
3.3.3 CONTROLLING ACCESS TO THE REGULATED AREA..... 43
3.3.4 CRITICAL BARRIERS..... 43
3.3.5 EXTENSION OF THE REGULATED AREA..... 44
3.3.6 FLOOR BARRIERS..... 44
3.4 REMOVAL OF PIPING ACM..... 44
3.4.1 WETTING MATERIALS..... 44
3.4.2 SECONDARY BARRIER AND WALKWAYS..... 45
3.4.3 WET REMOVAL OF ACM..... 45
3.4.4 DISCOVERED MATERIALS..... 45
3.4.5 REPLACEMENT OF DIELECTRIC UNIONS..... 46
3.5 GLOVEBAG REMOVAL PROCEDURES..... 46
3.5.1 GENERAL..... 46
3.5.2 NEGATIVE PRESSURE GLOVEBAG PROCEDURE..... 47
3.6 LOCKDOWN ENCAPSULATION..... 47
3.6.1 GENERAL..... 47
3.6.2 SEALING EXPOSED EDGES..... 47

3.7 DISPOSAL OF ACM WASTE MATERIALS..... 47
3.7.1 GENERAL..... 47
3.7.2 PROCEDURES..... 48
3.8 PROJECT DECONTAMINATION..... 48
3.8.1 GENERAL..... 48
3.8.2 REGULATED AREA CLEARANCE..... 49
3.8.3 WORK DESCRIPTION..... 49
3.8.4 PRE-DECONTAMINATION CONDITIONS..... 49
3.8.5 FIRST CLEANING..... 49
3.8.6 PRE-CLEARANCE INSPECTION AND TESTING..... 49
3.8.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES..... 50
3.9 FINAL VISUAL INSPECTIONS AND AIR CLEARANCE TESTING..... 50
3.9.1 GENERAL..... 50
3.9.2 FINAL VISUAL INSPECTION..... 50
3.9.3 FINAL AIR CLEARANCE TESTING..... 50
3.9.4 FINAL AIR CLEARANCE PROCEDURES..... 51
3.9.5 CLEARANCE SAMPLING USING PCM..... 51
3.9.6 CLEARANCE SAMPLING USING TEM..... 51
3.9.7 LABORATORY TESTING OF PCM SAMPLES..... 51
3.9.8 LABORATORY TESTING OF TEM SAMPLES..... 52
3.10 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE..... 52
3.10.1 COMPLETION OF ABATEMENT WORK..... 52
3.10.2 CERTIFICATE OF COMPLETION BY CONTRACTOR..... 52
3.10.3 WORK SHIFTS..... 52
3.10.4 RE-INSULATION..... 52
ATTACHMENT #1..... 53
ATTACHMENT #2..... 54
ATTACHMENT #3..... 55
ATTACHMENT #4..... 56

**PART 1 - GENERAL**

**1.1 SUMMARY OF THE WORK**

**1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS**

Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor (Contractor) discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Contractor. All cost incurred due to such action are also the responsibility of the Contractor.

**1.1.2 EXTENT OF WORK**

A. Below is a brief description of the estimated quantities of asbestos containing materials to be abated by the glovebag method. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.

B. Removal, clean-up and disposal of ACM piping and fittings and asbestos contaminated elements in an appropriate regulated area in the following approximate quantities;

( 30 ) linear feet of >150 mm (>6") diameter pipe insulation

( 25 ) fittings of >150 mm (>6") in diameter

**1.1.3 RELATED WORK**

A. Section 07 84 00; FIRESTOPPING.

B. Section 02 41 00; DEMOLITION.

C. Division 09; FINISHES.

D. Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.

E. Section 23 21 13, HYDRONIC PIPING.

F. Section 23 31 00, HVAC DUCTS AND CASINGS / Section 23 37 00, AIR OUTLETS AND INLETS.

**1.1.4 TASKS**

The work tasks are summarized briefly as follows:

A. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, work-site preparations, emergency procedures arrangements, and standard operating procedures for glovebag asbestos abatement work.

B. Abatement activities including removal, clean-up and disposal of ACM waste, recordkeeping, security, monitoring, and inspections.

C. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

**1.1.5 ABATEMENT CONTRACTOR USE OF PREMISES**

A. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State, and Local regulations and requirements.

B. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved pre-abatement work plan. Asbestos abatement drawings of partially occupied buildings will show the limits of regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action. The following limitations of use shall apply to existing facilities shown on drawings:

Reference Section 028211-A, the asbestos inspection report, “Limited Asbestos Inventory Summary: Building 112 Emergency Elevator Project VA#695-12-117, VA Medical Center, Building 112, 5000 W. National Avenue, Milwaukee, Wisconsin”, prepared by Sigma Environmental Services, Inc.

**1.2 VARIATIONS IN QUANTITY**

The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimates which are limited by the physical constraints imposed by occupancy of the buildings. Accordingly, minor variations (+/- 5%) in quantities of ACM within the regulated area are considered as having no impact on contract price and

time requirements of this contract. Where additional work is required beyond the above variation, the Contractor shall provide unit prices for additional footage for newly discovered materials and those prices will be used for additional work under the contract.

Additionally, it may be later determined that materials designated as Assumed to Contain (ATC) do not contain greater than one percent asbestos. As such, the contractor shall provide unit pricing for all materials designated as POS and ATC. Materials designated as ATC which are later determined to contain less than one percent asbestos may be removed from the contract at the discretion of the owner. The dollar amount deducted from the contract will be determined by multiplying the quantity of ATC materials determined to be non-ACM by the unit costs.

**1.3 STOP ASBESTOS REMOVAL**

If the Contracting Officer or their field representative presents a written **Stop Asbestos Removal Order,** the Abatement Contractor/Personnel shall immediately stop all asbestos removal and adequately wet any exposed ACM. The Contractor shall not resume any asbestos removal activity until authorized to do so by the VA. A stop asbestos removal order may be issued at any time the VA determines abatement conditions/activities are not within specification requirements. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the industrial hygienist's time. The occurrence of any of the following events shall be reported immediately by the Contractor in writing to the VA representative and shall require the Contractor to immediately stop asbestos removal activities and initiate fiber reduction activities:

A. =/> 0.01 f/cc outside a regulated area or >0.05 f/cc inside a regulated area;
B. breach/break in regulated area critical barrier(s)/floor;
C. serious injury/death at the site;
D. fire/safety emergency at the site;
E. respiratory protection system failure;
F. power failure or loss of wetting agent; or
G. any visible emissions observed outside the regulated area.

**1.4 DEFINITIONS**

**1.4.1 GENERAL**

Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in

nature and not completely descriptive of the requirements indicated therein.

**1.4.2 GLOSSARY**

**Abatement** - Procedures to control fiber release from asbestos-containing materials, typically during removal. Includes removal, encapsulation, enclosure, demolition and renovation activities related to asbestos.

**ACE** - Asbestos contaminated elements.

**ACM** - Asbestos containing material.

**Aerosol** - Solid or liquid particulate suspended in air.

**Adequately wet** - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

**Aggressive method** - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

**Aggressive sampling** - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

**AHERA** - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

**Aircell** - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

**Air monitoring** - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air.

**Air sample filter** - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

**Amended water** - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

**Asbestos** - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

**Asbestos-containing material (ACM)** - Any material containing more than one percent asbestos.

**Asbestos contaminated elements (ACE)** - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

**Asbestos-containing waste material** - Asbestos-containing material or asbestos contaminated objects requiring disposal.

**Asbestos waste decontamination facility** - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

**Authorized person** - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

**Authorized visitor** - Any person approved by the VA; the contractor; or any government agency having jurisdiction over the regulated area.

**Barrier** - Any surface the isolates the regulated area and inhibits fiber migration from the regulated area.

**Containment Barrier** - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

**Critical Barrier** - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting secured in place at openings such as doors, windows, or any other opening into the regulated area.

**Primary Barrier** - Barriers placed over critical barriers and exposed directly to abatement work.

**Secondary Barrier** - Any additional sheeting used to isolate and provide protection from debris during abatement work.

**Breathing zone** - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

**Bridging encapsulant** - An encapsulant that forms a layer on the surface of the ACM.

**Building/facility owner** - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

**Bulk testing** - The collection and analysis of suspect asbestos containing materials.

**Certified Industrial Hygienist (CIH)** - One certified in practice of industrial hygiene by the American Board of Industrial Hygiene. An

industrial hygienist Certified in Comprehensive Practice by the American Board of Industrial Hygiene.

**Class I asbestos work** - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

**Class II asbestos work** - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

**Clean room/Changing room** - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

**Clearance sample** - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's industrial hygiene consultant (VPIH/CIH).

**Closely resemble** - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

**Competent person** - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

**Contractor's Professional Industrial Hygienist (CPIH)** - The Contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of the PIH.

**Count** - Refers to the fiber count or the average number of fibers greater than five microns in length per cubic centimeter of air.

**Decontamination area/unit** - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

**Demolition** - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

**Disposal bag** - Typically 6 mil thick siftproof, dustproof, leaktight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

**Disturbance** - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag which shall not exceed 60 inches in length or width.

**Drum** - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be siftproof, dustproof, and leaktight.

**Employee exposure** - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

**Encapsulant** - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

**Encapsulation** - Treating ACM with an encapsulant.

**Enclosure** - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

**Equipment room** - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

**Fiber** - A particulate form of asbestos, 5 microns or longer, with a length to width ratio of at least 3 to 1.

**Fibers per cubic centimeter (f/cc)** - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

**Filter** - Media used in respirators, vacuums, or other machines to remove particulate from air.

**Firestopping** - Material used to close the open parts of a structure in order to prevent a fire from spreading.

**Friable asbestos containing material** - Any material containing more than 1 percent asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

**Glovebag** - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

**High efficiency particulate air (HEPA) filter** - A filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 microns or greater in diameter.

**HEPA vacuum** - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

**Homogeneous area** - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

**HVAC** - Heating, Ventilation and Air Conditioning

**Industrial hygienist** - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

**Industrial hygienist technician** - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned.

**Intact** - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

**Lockdown** - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

**National Emission Standards for Hazardous Air Pollutants (NESHAP's)** - EPA's rule to control emissions of asbestos to the environment.

**Negative initial exposure assessment** - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL's.

**Negative pressure** - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02" water gauge inside the negative pressure enclosure.

**Negative pressure respirator** - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air outside the respirator.

**Non-friable ACM** - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

**Organic vapor cartridge** - The type of cartridge used on air purifying respirators for organic vapor exposures.

**Outside air** - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

**Owner/operator** - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

**Penetrating encapsulant** - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

**Personal sampling/monitoring** - Representative air samples obtained in the breathing zone of the person using a cassette and battery operated pump to determine asbestos exposure.

**Permissible exposure limit (PEL)** - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the PEL is 0.1 fibers per cc.

**Polarized light microscopy (PLM)** - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

**Polyethylene sheeting** - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, sometimes flame retardant in compliance with NFPA 241.

**Positive/negative fit check** - A method of verifying the fit of a respirator by closing off the filters and breathing in or closing off the exhalation valve and breathing out while detecting leakage of the respirator.

**Presumed ACM (PACM)** - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (k)(5).

**Professional IH** - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal

training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH.

**Project designer** - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B)(5).

**Protection factor** - A value assigned by OSHA/NIOSH to indicate the assigned protection a respirator should provide if worn properly. The number indicates the reduction of exposure level from outside to inside the respirator.

**Qualitative fit test (QLFT)** - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

**Quantitative fit test (QNFT)** - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

**Regulated area** - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

**Regulated ACM (RACM)** - Friable ACM; Category I nonfriable ACM that has become friable; Category I nonfriable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II nonfriable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

**Removal** - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

**Renovation** - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

**Repair** - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

**Shower room** - The portion of the PDF where personnel shower before leaving the regulated area. Also used for bag/drum decontamination in the EDF.

**Standard operating procedures (SOP's)** - Asbestos work procedures required to be submitted by the contractor before work begins.

**Supplied air respirator (SAR)** - A respirator that utilizes an air supply separate from the air in the regulated area.

**Surfacing ACM** - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

**Surfactant** - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

**Thermal system ACM** - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

**Transmission electron microscopy (TEM)** - A microscopy method that can identify and count asbestos fibers.

**VA Industrial Hygienist (VPIH/CIH)** - Department of Veterans Affairs Professional Industrial Hygienist.

**VA Representative** - The VA official responsible for on-going project work.

**Visible emissions** - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM or ACM waste material.

**Waste generator** - Any owner or operator whose act or process produces asbestos-containing waste material.

**Waste/Equipment decontamination facility (W**/EDF) - The area in which equipment is decontaminated before removal from the regulated area.

**Waste shipment record** - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

**Wet cleaning** - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

**1.4.3 REFERENCED STANDARDS ORGANIZATIONS**

The following acronyms or abbreviations as referenced in contract/ specification documents are defined to mean the associated names. Names and addresses may be subject to change.

A. VA Department of Veterans Affairs
810 Vermont Avenue, NW
Washington, DC 20420

B. AIHA American Industrial Hygiene Association
2700 Prosperity Avenue, Suite 250
Fairfax, VA 22031
703-849-8888

C. ANSI American National Standards Institute
1430 Broadway
New York, NY 10018
212-354-3300

D. ASTM American Society for Testing and Materials
1916 Race St.
Philadelphia, PA 19103
215-299-5400

E. CFR Code of Federal Regulations
Government Printing Office
Washington, DC 20420

F. CGA Compressed Gas Association
1235 Jefferson Davis Highway
Arlington, VA 22202
703-979-0900

G. CS Commercial Standard of the National Institute of Standards and Technology(NIST)
U. S. Department of Commerce
Government Printing Office
Washington, DC 20420

H. EPA Environmental Protection Agency
401 M St., SW
Washington, DC 20460
202-382-3949

I. MIL-STD Military Standards/Standardization Division
Office of the Assistant Secretary of Defense
Washington, DC 20420

J. MSHA Mine Safety and Health Administration
Respiratory Protection Division
Ballston Tower #3
Department of Labor
Arlington, VA 22203
703-235-1452

K. NIST National Institute for Standards and Technology
U. S. Department of Commerce
Gaithersburg, MD 20234
301-921-1000

L. NEC National Electrical Code (by NFPA)

M. NEMA National Electrical Manufacturer's Association
2101 L Street, NW
Washington, DC 20037

N. NFPA National Fire Protection Association
1 Batterymarch Park
P.O. Box 9101
Quincy, MA 02269-9101
800-344-3555

O. NIOSH National Institutes for Occupational Safety and Health
4676 Columbia Parkway
Cincinnati, OH 45226
513-533-8236

P. OSHA Occupational Safety and Health Administration
U.S. Department of Labor
Government Printing Office
Washington, DC 20402

Q. UL Underwriters Laboratory
333 Pfingsten Rd.
Northbrook, IL 60062
312-272-8800

R. USA United States Army
Army Chemical Corps
Department of Defense
Washington, DC 20420

**1.5 APPLICABLE CODES AND REGULATIONS**

**1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS**

A. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.

B. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specification exists, the most stringent requirement(s) shall be utilized.

C. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5

shall be available at the worksite in the clean change area of the worker decontamination system.

**1.5.2 CONTRACTOR RESPONSIBILITY**

The Contractor shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the abatement project. The contractor is responsible for providing and maintaining training, accreditation, medical exams, medical records, personal protective equipment as required by applicable Federal, State and Local regulations. The contractor shall hold the VA and VPIH/CIH consultants harmless for any failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The contractor will incur all costs of the CPIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements.

**1.5.3 FEDERAL REQUIREMENTS**

Federal requirements which govern some aspect of asbestos abatement include, but are not limited to, the following regulations.

A. Occupational Safety and Health Administration **(OSHA)**
   1. Title 29 CFR 1926.1101 - Construction Standard for Asbestos
   2. Title 29 CFR 1910.132 - Personal Protective Equipment
   3. Title 29 CFR 1910.134 - Respiratory Protection
   4. Title 29 CFR 1926 - Construction Industry Standards
   5. Title 29 CFR 1910.20 - Access to Employee Exposure and Medical Records
   6. Title 29 CFR 1910.1200 - Hazard Communication
   7. Title 29 CFR 1910.151 - Medical and First Aid
B. Environmental Protection Agency **(EPA)**
   1. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
   2. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)
C. Department of Transportation **(DOT)**
   Title 49 CFR 100 - 185 - Transportation

**1.5.4 STATE REQUIREMENTS:**

State requirements that apply to the asbestos abatement work, disposal, clearance, etc., include, but are not limited to, the following:
Wisconsin Administrative Code NR 447
Wisconsin State Statues 285.11, 285.13, 285.17 and 285.27
Wisconsin Department of Health Services DHS 159

**1.5.5 STANDARDS**

A. Standards which govern asbestos abatement activities include, but are not limited to, the following:
   1. American National Standards Institute (ANSI)Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems Z88.2 - Practices for Respiratory Protection.
   2. Underwriters Laboratories (UL)586-90 - UL Standard for Safety of HEPA filter Units, 7th Edition.

B. Standards which govern encapsulation work include, but are not limited to, the following:
   1. American Society for Testing and Materials (ASTM)

C. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
   1. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
   2. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
   3. NFPA 101 - Life Safety Code

**1.5.6 EPA GUIDANCE DOCUMENTS**

A. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.

B. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024

C. Asbestos Waste Management Guidance EPA 530-SW-85-007.

D. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001

E. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

**1.5.7 NOTICES**

A. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM as follows:

B. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification is given to EPA, State, and Local authorities.

**1.5.8 PERMITS/LICENSES**

The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

**1.5.9 POSTING AND FILING OF REGULATIONS**

Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

**1.5.10 VA RESPONSIBILITIES**

Prior to commencement of work:

A. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipment and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**

B. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized and method of analysis.

C. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

**1.5.11 SITE SECURITY**

A. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.

B. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent Person shall immediately notify the VA.

C. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.

D. Access to the regulated area shall be through a single decontamination unit, if required. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment

load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall not be locked from the inside, however, they shall be sealed with poly sheeting and taped until needed.

E. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.

F. The Abatement Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.

G. The regulated area shall be locked during non-working hours and secured by VA security guards.

**1.5.12 EMERGENCY ACTION PLAN AND ARRANGEMENTS**

A. An Emergency Action Plan shall be developed by the Contractor prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a);(b).

B. Emergency procedures shall be in written form and prominently posted and available in the regulated area. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.

C. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule and layout of regulated area, particularly barriers that may affect response capabilities.

D. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.

E. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.

1. For non life-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with

assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.

2. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, remove them from the regulated area, and secure proper medical treatment.

F. Telephone numbers of all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.

G. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.

H. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the standard operating procedures during abatement. Such incidents include, but are not limited to, fire; accident; and power failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that work is stopped and wetting is continued until correction of the problem.

**1.5.13 PRE-CONSTRUCTION MEETING**

Prior to commencing the work, the Contractor shall meet with the VPCIH to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

A. Proof of Contractor licensing.

B. Proof the Competent Person is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person shall also be presented.

C. A list of all workers who will participate in the project, including experience and verification of training and accreditation.

D. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.

E. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).

F. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.

G. A copy of the Contractor's Standard Operating Procedures for Class I Glovebag Asbestos Abatement. In these procedures, the following information must be detailed, specific for this project.

1. Regulated area preparation procedures;
2. Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
3. If required, decontamination area set-up/layout and decontamination procedures for employees;
4. Glovebag abatement methods/procedures and equipment to be used;
5. Personal protective equipment to be used;

H. At this meeting the Contractor shall provide all submittals as required.

I. Procedures for handling, packaging and disposal of asbestos waste.

J. Emergency Action Plan and Contingency Plan Procedures.

**1.6 PROJECT COORDINATION**

The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

**1.6.1 PERSONNEL**

A. Administrative and supervisory personnel shall consist of a qualified Competent Person as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.

B. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; qualifications; accreditation card with picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.

C. Minimum qualifications for Contractor and assigned personnel are:

1. The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of asbestos regulations in the past three (3) years; has adequate

liability/occurrence insurance for asbestos work; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive standard operating procedures for asbestos work; has adequate materials, equipment and supplies to perform the work.

2. The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
3. The Contractor Professional Industrial Hygienist (CPIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete standard operating procedure for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.
4. The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the standard operating procedures of the Contractor; has one year of asbestos abatement experience; has applicable medical and respiratory protection documentation; has certificate of training/current refresher and State accreditation/license.

**1.7 RESPIRATORY PROTECTION**

**1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM**

The Contractor shall develop and implement a Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.132;134. ANSI Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program All respirators used must be NIOSH approved for asbestos abatement activities. The written respiratory protection shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c)(1)(i - ix) - Respiratory Protection Program.

**1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR**

The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years experience coordinating the program. The RPPC must provide a signed statement attesting to the fact that the program meets the above requirements.

**1.7.3 SELECTION AND USE OF RESPIRATORS**

The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualification. The procedure must written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit for reference by employees or authorized visitors.

**1.7.4 MINIMUM RESPIRATORY PROTECTION**

Minimum respiratory protection shall be a full face powered air purifying respirator when fiber levels are maintained consistently at or above 0.5 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

**1.7.5 MEDICAL WRITTEN OPINION**

No employee shall be allowed to wear a respirator unless a physician has determined they are capable of doing so and has issued a written opinion for that person.

**1.7.6 RESPIRATOR FIT TEST**

All personnel wearing respirators shall have a current quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Fit tests shall be done for PAPR's which have been put into a failure mode.

**1.7.7 RESPIRATOR FIT CHECK**

The Competent Person shall assure that the positive/negative fit check is done each time the respirator is donned by an employee. Headcoverings must cover respirator headstraps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a fit check shall preclude that person from wearing a respirator until resolution of the problem.

**1.7.8 MAINTENANCE AND CARE OF RESPIRATORS**

The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) maintenance and care of respirators.

**1.8 WORKER PROTECTION**

**1.8.1 TRAINING OF ABATEMENT PERSONNEL**

Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

**1.8.2 MEDICAL EXAMINATIONS**

Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. The physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the opinion the person has been evaluated for working in a heat stress environment while wearing personal protective equipment and is able to perform the work.

**1.8.3 PERSONAL PROTECTIVE EQUIPMENT**

Provide whole body clothing, head coverings, foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.

**1.8.4 REGULATED AREA ENTRY PROCEDURE**

Worker protection shall meet the most stringent requirement. The Competent Person shall ensure that each time workers enter the regulated area, they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

**1.8.5 DECONTAMINATION PROCEDURE - PAPR**

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

A. When exiting the regulated area, remove disposable coveralls, and ALL other clothes, disposable head coverings, and foot coverings or boots in the equipment room.

B. Still wearing the respirator and completely naked, proceed to the shower. Showering is MANDATORY. Care must be taken to follow reasonable procedures in removing the respirator to avoid asbestos fibers wile showering. The following procedure is required as a minimum:

1. Thoroughly wet body including hair and face. If using a PAPR hold blower above head to keep filters dry.
2. With respirator still in place, thoroughly decontaminate body, hair, respirator face piece, and all other parts of the respirator except the blower and battery pack on a PAPR. Pay particular attention to cleaning the seal between the face and respirator facepiece and under the respirator straps.
3. Take a deep breath, hold it and/or exhale slowly, completely wetting hair, face, and respirator. While still holding breath, remove the respirator and hold it away from the face before starting to breathe.

C. Carefully decontaminate the facepiece of the respirator inside and out. If using a PAPR, shut down using the following sequence: a) first cap inlets to filters; b) turn blower off to keep debris collected on the inlet side of the filter from dislodging and contaminating the outside of the unit; c) thoroughly decontaminate blower and hoses; d) carefully decontaminate battery pack with a wet rag being cautious of getting water in the battery pack thus preventing destruction. **THIS PROCEDURE IS NOT A SUBSTITUTE FOR RESPIRATOR CLEANING!**

D. Shower and wash body completely with soap and water. Rinse thoroughly.

E. Rinse shower room walls and floor to drain prior to exiting.

F. Proceed from shower to clean room; dry off and change into street clothes or into new disposable work clothing.

**1.8.6 REGULATED AREA REQUIREMENTS**

The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for Class I glovebag regulated areas at 29 CFR 1926.1101 (e) are met. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

**1.9 DECONTAMINATION FACILITIES**

**1.9.1 DESCRIPTION**

Provide each regulated area with separate personnel (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF is the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

**1.9.2 GENERAL REQUIREMENTS**

All personnel entering or exiting a regulated area shall follow the requirements at 29 CFR 1926.1101 (j)(1) and these specifications. All equipment and materials must exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3 layers of 6 mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 6 mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weigh sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting.

**1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF**

The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141(d)(3). Provide adequate temporary electric power with ground fault protection and overhead wiring in the PDF and W/EDF. Provide a sub-panel for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat to maintain 70°F throughout the PDF and W/EDF.

**1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)**

The Competent Person shall provide a PDF consisting of shower room which is contiguous to a clean room and equipment room. The PDF must be sized to accommodate the number of personnel scheduled for the project. The shower room, located in the center of the PDF, shall be fitted with as many portable showers as necessary to insure all employees can complete the entire decontamination procedure within 15 minutes. The PDF shall be

constructed of opaque poly for privacy. The PDF shall be constructed to eliminate any parallel routes of egress without showering.

1. Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 2 layers of 6 mil fire retardant poly to provide an air tight room. Provide a minimum of 2 - 900 mm (3 foot) wide flapped doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry condition. Shower overflow shall not be allowed into the clean room. An adequate supply of disposable towels shall be provided. Provide storage lockers per person. A portable fire extinguisher, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at both entry points to the PDF so no male can enter or exit the PDF during her stay in the PDF.
2. Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the regulated area to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using air tight walls made from at least 3 layers of 6 mil fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter;

and a final 5 micron filter. Filters will be changed a minimum of daily or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.

3. Equipment Room: The Competent Person shall provide an equipment room which shall be an air tight compartment for the storage of work equipment, reusable footwear and for use as a change station for personnel exiting the regulated area. The equipment room shall be separated from the regulated area by a minimum 3 foot wide door made of 2 layers of 6 mil fire retardant poly. The equipment room shall be separated from the regulated area, the shower room and the rest of the building by air tight walls and ceiling constructed of a minimum of 3 layers of 6 mil fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 6 mil fire retardant poly per shift change and remove this layer after each shift. Provide a temporary electrical sub-panel equipped with GFCI in this room to accommodate any equipment required in the regulated area.
4. The PDF shall consist of the following: Clean room at the entrance followed by a shower room followed by an equipment room leading to the regulated area. Each doorway in the PDF is minimum of 2 layers of 6 mil fire retardant poly.

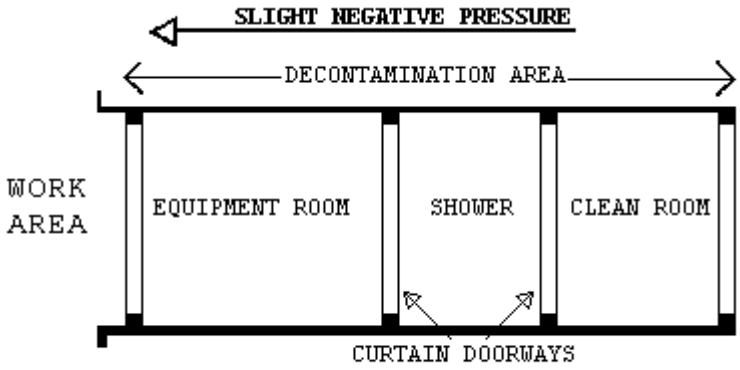


**1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF)**

The Competent Person shall provide a W/EDF consisting of a wash room, holding room, and clean room for removal of all waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and

residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:

1. Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment, bag and container cleaning station.
2. Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area. Construct the wash room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2 layers of 6 mil fire retardant poly.
3. Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. The holding room shall be located so that bagged material cannot be passed from the wash room to the clean room unless it goes through the holding room. Doorways in the holding room shall be constructed of 2 layers of 6 mil fire retardant poly.
4. Clean Room: Provide a clean room to isolate the holding room from the building exterior. Construct the clean room using 2 x 4 wood framing and 2 layers of 6 mil fire retardant poly. The clean room shall be located so as to provide access to the holding room from the building exterior. Doorways to the clean room shall be constructed of two layers of 6 mil fire retardant poly.
5. The W/EDF shall be provided as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

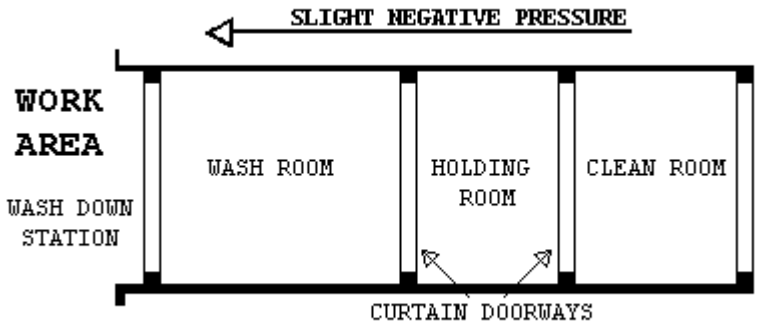


**1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES**

At washdown station in the regulated area, thoroughly wet clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and disposal. These personnel will not be required to wear PPE. At no time shall personnel from the clean side be allowed to enter the Wash Room.

**PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT**

**2.1 MATERIALS AND EQUIPMENT**

**2.1.1 GENERAL REQUIREMENTS (ALL ABATEMENT PROJECTS)**

Prior to the start of work, the Contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH has submitted verification to the VA's representative to this effect:

A. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).

B. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or

contamination. Flammable materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated/work area until abatement is completed.

C. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized place.

D. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.

E. Poly sheeting put under the glovebag regulated area shall be a minimum of 6 mils in thickness.

F. If required, the method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces.

G. Polyethylene sheeting utilized for personnel decontamination facility shall be opaque white or black in color, 6 mil fire retardant poly.

H. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.

I. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements shall be provided. Fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project shall also be provided. All electrically operated hand tools, equipment, electric cords shall be equipped with GFCI protection.

J. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water, and falling material).

K. Disposal bags - 2 layers of 6 mil, for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.

L. The VA shall be provided a copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication. Chlorinated compounds shall not be used with any spray adhesive or other product. Appropriate encapsulant(s) shall be provided.

M. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k)(7) shall be provided and placed by the Competent Person.

All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.

N. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a hazard assessment conducted under 29 CFR 1910.132(d).

**2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA**

**2.2.1 GENERAL**

Using critical barriers, seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All horizontal surfaces in the regulated area must be covered with 2 layers of 6 mil fire retardant poly to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated, immediately stop work and clean up the contamination at no additional cost to the Government. Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Section 2.2.8; FIRESTOPPING.

**2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA**

A. Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. Remove all uncontaminated removable furniture, equipment and/or supplies from the regulated area before commencing work, or completely cover with 2 layers of 6-mil fire retardant poly sheeting and secure with duct tape. Lock out and tag out any HVAC systems in the regulated area.

**2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA**

A. Access to the regulated area is allowed only through the personnel decontamination facility (PDF), if required. All other means of access shall be eliminated and OSHA Danger demarcation signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly sheeting to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid.

**2.2.4 CRITICAL BARRIERS**

A. Completely separate any openings into the regulated area from adjacent areas using fire retardant poly at least 6 mils thick and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other

objects in the regulated area. Heat must be shut off any objects covered with poly.

**2.2.5 SECONDARY BARRIERS**

A. A loose layer of 6 mil fire retardant poly shall be used as a drop cloth to protect the floor/horizontal surfaces from debris generated during the glovebag abatement. This layer shall be replaced as needed during the work.

**2.2.6 EXTENSION OF THE REGULATED AREA**

A. If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. If the affected area cannot be added to the regulated area, decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

**2.2.7 FIRESTOPPING**

A. Through penetrations caused by cables, cable trays, pipes, sleeves must be firestopped with a fire-rated firestop system providing an air tight seal.

B. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The Contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the VA Representative immediately. All walls, floors and ceilings are considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.

C. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

**2.3 MONITORING, INSPECTION AND TESTING**

**2.3.1 GENERAL**

A. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. The CPIH shall periodically inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH shall personally manage air sample collection,

analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.

B. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.

C. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH with review and approval of the VPIH/CIH. An agreement between the CPIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

**2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT**

A. The purpose of the work of the VPIH/CIH is to: Assure quality; resolve problems; and prevent the spread of contamination beyond the regulated

area. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:

1. Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
2. Task 2: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
3. Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
4. Task 4: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of unforeseen developments, etc.
5. Task 5: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area or building at the conclusion of the abatement and clean-up work to certify compliance with all regulations and the VA requirements/specifications.
6. Task 6: Issue certificate of decontamination for each regulated area or building and project report.

B. All data, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.

C. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

**2.3.3 MONITORING, INSPECTION AND TESTING BY ABATEMENT CONTRACTOR CPIH**

The CPIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's

personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor /Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in air sampling and analysis. The IH Technician shall have a NIOSH 582 Course or equivalent and show proof. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA/State Contractor/Supervisor and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation. The analytic laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT. A daily log documenting all OSHA requirements for air monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH. The log will contain, at a minimum, information on personnel or area sampled, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH responsibilities.

**2.4 STANDARD OPERATING PROCEDURES**

The Contractor shall have established Standard Operating Procedures (SOP's) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the ways and procedures to be followed during all phases of the work by the Contractor's personnel. The SOP's must be modified as needed to address specific requirements of the project. The SOP's shall be submitted for review and approval prior to the start of any abatement work. The minimum topics and areas to be covered by the SOP's are:

A. Minimum Personnel Qualifications
B. Contingency Plans and Arrangements
C. Security and Safety Procedures
D. Respiratory Protection/Personal Protective Equipment Program and Training
E. Medical Surveillance Program and Recordkeeping
F. Regulated Area Requirements for Glovebag Abatement
G. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
H. Monitoring, Inspections, and Testing
I. Removal Procedures For Piping ACM Using the Glovebag Method
J. Disposal of ACM waste
K. Regulated Area Decontamination/Clean-up
L. Regulated Area Visual and Air Clearance
M. Project Completion/Closeout

**2.5 SUBMITTALS**

**2.5.1 PRE-CONSTRUCTION MEETING SUBMITTALS**

Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project.

A. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
B. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
C. Submit Standard Operating Procedures developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH.
D. Submit the specifics of the materials and equipment to be used for this project with brand names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
   1. HEPA vacuums, air monitoring pumps, calibration devices, and emergency power generating system.
   2. Waste water filtration system, shower system, critical/floor barriers.
   3. Encapsulants, surfactants, hand held sprayers, airless sprayers, glovebags, fire extinguishers.

4. Personal protective equipment.
5. Fire safety equipment to be used in the regulated area.

E. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.

F. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.

G. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A.

H. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
   1. Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project:
      Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; Completion Date
   2. List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years:
      Project Name; Reason; Date; Reference Name/Number; Resolution
   3. List asbestos regulatory citations, penalties, damages paid and legal actions taken against the company in the last 3 years. Provide copies and all information needed for verification.

I. Submit information on personnel: Provide a resume; address each item completely; provide references; phone numbers; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.

1. CPIH: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials; samples of SOP's developed; medical opinion; current respirator fit test.
2. Competent Person(s)/Supervisor(s): Number; names; years of abatement experience as Competent Person /Supervisor; list of similar projects as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion; current respirator fit test.
3. Workers: Numbers; names; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion; current respirator fit test.

J. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain English the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of SOP's incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who does and how is air monitoring conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and standard operating procedures; copies of monitoring results of the five referenced projects listed and analytical method(s) used.

K. When rental equipment is to be used in regulated areas or used to transport asbestos waste, the contractor shall assure complete decontamination of the rental equipment before return to the rental agency.

1. Submit, before the start of work, the manufacturer's technical data and MSDS for encapsulants used on the project. Provide application instructions also.

**2.5.2 SUBMITTALS DURING ABATEMENT**

A. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as critical barrier breeching, equipment failures, emergencies, and any cause for stopping work; representative

air monitoring and results/TWA's/EL's. Submit this daily log to VA's representative.

B. The CPIH shall document and maintain the following during abatement and submit as appropriate to the VA's representative.
   1. Inspection and approval of the regulated area preparation prior to start of work and daily during work.
   2. Removal of any poly critical/floor barriers.
   3. Visual inspection/testing by the CPIH prior to application of lockdown encapsulation.
   4. Packaging and removal of ACM waste from regulated area.
   5. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

**2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT**

The CPIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. The report shall include a certificate of completion, signed and dated by the CPIH, in accordance with Attachment #1. The VA Representative will forward the abatement report to the Medical Center after completion of the project.

**2.6 ENCAPSULANTS**

**2.6.1 TYPES OF ENCAPSULANTS**

A. The following four types of encapsulants must comply with comply with performance requirements as stated in paragraph 2.6.2:
   1. Removal encapsulant - used as a wetting agent to remove ACM.
   2. Bridging encapsulant - provides a tough, durable coating on ACM.
   3. Penetrating encapsulant - penetrates/encapsulates ACM at least 13 mm (1/2").
   4. Lockdown encapsulant - seals microscopic fibers on surfaces after ACM removal.

**2.6.2 PERFORMANCE REQUIREMENTS**

Encapsulants shall meet the latest requirements of EPA; shall not contain toxic or hazardous substances; or solvents; and shall comply with the following performance requirements:

A. General Requirements for all Encapsulants:
   1. ASTM E84: Flame spread of 25; smoke emission of 50.
   2. University of Pittsburgh Protocol: Combustion Toxicity; zero mortality.

3. ASTM C732: Accelerated Aging Test; Life Expectancy - 20 years.
4. ASTM E96: Permeability - minimum of 0.4 perms.

B. Bridging/Penetrating Encapsulants:
1. ASTM E736: Cohesion/Adhesion Test - 24 kPa (50 lbs/ft$^2$).
2. ASTM E119: Fire Resistance - 3 hours (Classified by UL for use on fibrous/cementitious fireproofing).
3. ASTM D2794: Gardner Impact Test; Impact Resistance - minimum 11.5 kg-mm (43 in/lb).
4. ASTM D522: Mandrel Bend Test; Flexibility - no rupture or cracking.

C. Lockdown Encapsulants:
1. ASTM E119: Fire resistance - 3 hours (tested with fireproofing over encapsulant applied directly to steel member).
2. ASTM E736: Bond Strength - 48 kPa (100 lbs/ft$^2$) (test compatibility with cementitious and fibrous fireproofing).
3. In certain situations, encapsulants may have to be applied to hot pipes/equipment. The encapsulant must be able to withstand high temperatures without cracking or off-gassing any noxious vapors during application.

**2.7 CERTIFICATES OF COMPLIANCE**

The Contractor shall submit to the VA representative certification from the manufacturer indicating compliance with performance requirements for encapsulants when applied according to manufacturer recommendations.

**2.8 RECYCLABLE PROTECTIVE CLOTHING**

If recyclable clothing is provided, all requirements of EPA, DOT and OSHA shall be met.

**PART 3 - EXECUTION**

**3.1 PRE-ABATEMENT ACTIVITIES**

**3.1.1 PRE-ABATEMENT MEETING**

The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding

issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

**3.1.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS**

Before any work begins on the construction of the regulated area, the Contractor will:

A. Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.

B. The VA Representative, the Contractor, and the VPIH/CIH must be aware of 10/95 A/E Quality Alert indicating the failure to identify asbestos as applicable to glovebag abatement in the areas listed. Make sure these areas are looked at/reviewed on the project: Lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside chases/walls; transite piping/ductwork/sheets; behind radiators; below window sills; water/sewer lines; electrical conduit coverings; steam line trench coverings.

C. Clean and remove or properly protect from contamination all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects which the Contractor is required to remove from the regulated area.

D. Shut down and seal with a minimum of 2 layers of 6 mil fire retardant poly all HVAC systems serving the regulated area. The regulated area critical barriers shall be completely isolated from any other air in the building. The VA's representative will monitor the isolation provision.

E. Shut down and lock out in accordance with 29 CFR 1910.147 all electrical circuits which pose a potential hazard. Electrical arrangements will be tailored to the particular regulated area and the systems involved. All electrical circuits affected will be turned off at the circuit box outside the regulated area, not just the wall switch. The goal is to eliminate the potential for electrical shock which is a major threat to life in the regulated area due to water use and possible energized circuits. Electrical lines used to power equipment in the regulated area shall conform to all electrical safety standards and shall be isolated by the use of a ground fault circuit interrupter (GFCI). All GFCI shall be tested prior to use. The VA's representative will monitor the electrical shutdown.

F. If required, remove and dispose of carpeting from floors in the regulated area.

G. Inspect existing firestopping in the regulated area. Correct as needed.

**3.1.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS**

A. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.

B. Upon completion of all preparatory work, the CPIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved SOP's, especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation.

C. The CPIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.

D. Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification.

**3.2 REGULATED AREA PREPARATIONS**

**3.2.1 OSHA DANGER SIGNS**

Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed ambient background levels. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.

**3.2.2 SHUT DOWN - LOCK OUT ELECTRICAL**

Shut down and lock out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code requirements and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.

**3.2.3 SHUT DOWN - LOCK OUT HVAC**

Shut down and lock out heating, cooling, and air conditioning system **(HVAC)** components that are in, supply or pass through the regulated area.

Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil poly disposal bags for disposal as asbestos waste.

**3.2.4 SANITARY FACILITIES**

The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

**3.2.5 WATER FOR ABATEMENT**

The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.

**3.2.6 PRE-CLEANING MOVABLE OBJECTS**

Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location.

**3.2.7 PRE-CLEANING FIXED OBJECTS**

Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After precleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements.

**3.2.8 PRE-CLEANING SURFACES IN THE REGULATED AREA**

Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

**3.3 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA**

**3.3.1 GENERAL**

Seal off any openings at the perimeter of the regulated area with critical barriers to completely isolate the regulated area and to contain all airborne asbestos contamination created by the abatement activities. Should the adjacent area past the regulated area become contaminated due to improper work activities, the Contractor shall suspend work inside the regulated area, continue wetting, and clean the adjacent areas in accordance with procedures described in these specifications. Any and all costs associated with the adjacent area cleanup shall not be borne by the VA.

**3.3.2 PREPARATION PRIOR TO SEALING OFF**

Place all materials, equipment and supplies necessary to isolate the regulated area inside the regulated area. Remove all movable material/equipment as described above and secure all unmovable material/equipment as described above. Properly secured material/ equipment shall be considered to be outside the regulated area.

**3.3.3 CONTROLLING ACCESS TO THE REGULATED AREA**

Access to the regulated area shall be permitted only through the PDF. All other means of access shall be closed off by proper sealing and DANGER signs posted on the clean side of the regulated area where it is adjacent to or within view of any occupiable area. An opaque visual barrier of 6 mil poly shall be provided so that the abatement work is not visible to any building occupants. If the area adjacent to the regulated area is accessible to the public, construct a solid barrier on the public side of the sheeting for protection and isolation of the project. The barrier shall be constructed with nominal 2" x 4" (50mm x 100mm) wood or metal studs 16" (400mm) on centers, securely anchored to prevent movement and covered with a minimum of 1/2" (12.5mm) plywood. Provide an appropriate number of OSHA DANGER signs for each visual and physical barrier. Any alternative method must be given a written approval by the VA's representative.

**3.3.4 CRITICAL BARRIERS**

The regulated area must be completely separated from the adjacent areas, and the outside by at least 2 layers of 6 mil fire retardant poly and duct tape/spray adhesive. Individually seal all supply and exhaust ventilation openings, lighting fixtures, clocks, doorways, windows, convectors, speakers, and other openings into the regulated area with 2 layers of 6 mil fire retardant poly, and taped securely in place with

duct tape/spray adhesive. Critical barriers must remain in place until all work and clearances have been completed. Light fixtures shall not be operational during abatement. Auxiliary lighting shall be provided. If needed, provide plywood squares 6" x 6" x 3/8" (150mm x 150mm x 18mm) held in place with one 6d smooth masonry/galvanized nail driven through the center of the plywood square and duct tape on the poly so as to clamp the poly to the wall/surface. Locate plywood squares at each end, corner, and 4' (1200mm) maximum on centers.

**3.3.5 EXTENSION OF THE REGULATED AREA**

If the regulated area barrier is breached in any manner that could allow the passage of asbestos fibers or debris, the Competent Person shall immediately stop work, continue wetting, and proceed to extend the regulated area to enclose the affected area as per procedures described in this specification. If the affected area cannot be enclosed, decontamination measures and cleanup shall start immediately. All personnel shall be isolated from the affected area until decontamination/cleanup is completed as verified by visual inspection and air monitoring. Air monitoring at completion must indicate background levels.

**3.3.6 FLOOR BARRIERS**

All floors within 10’ of glovebag work shall be covered with 2 layers of 6 mil fire retardant poly.

**3.4 REMOVAL OF PIPING ACM**

**3.4.1 WETTING MATERIALS**

A. Use amended water for the wetting of ACM prior to removal. The Competent Person shall assure the wetting of ACM meets the definition of "adequately wet" in the EPA NESHAP's regulation and OSHA’s “wet methods” for the duration of the project. A removal encapsulant may be used instead of amended water with written approval of the VA's representative.

B. Amended Water: Provide water to which a surfactant has been added shall be used to wet the ACM and reduce the potential for fiber release during disturbance of ACM. The mixture must be equal to or greater than the wetting provided by water amended by a surfactant consisting one ounce of 50% polyoxyethylene ester and 50% polyoxyethylene ether mixed with 5 gallons (19L) of water.

C. Removal Encapsulant: Provide a penetrating encapsulant designed specifically for the removal of ACM. The material must, when used, result in adequate wetting of the ACM and retard fiber release during

disturbance equal to or greater than the amended water described above in B.

**3.4.2 SECONDARY BARRIER AND WALKWAYS**

A. Install as a drop cloth a 6 mil poly sheet at the beginning of each work shift where removal is to be done during that shift. Completely floors within 10 feet (3M) of the area where work is to done. Secure the secondary barrier with duct tape to prevent debris from getting behind it. Remove the secondary barrier at the end of the shift or as work in the area is completed. Keep residue on the secondary barrier wetted. When removing, fold inward to prevent spillage and place in a disposal bag.

B. Install walkways using 6 mil poly between the regulated area and the decontamination facilities (PDF and W/EDF) to protect the floor from contamination and damage. Install the walkways at the beginning of each shift and remove at the end of each shift.

**3.4.3 WET REMOVAL OF ACM**

A. Using acceptable glovebag procedures, adequately and thoroughly wet the ACM to be removed prior to removal to reduce/prevent fiber release to the air. Adequate time must be allowed for the amended water to saturate the ACM. Abatement personnel must not disturb dry ACM. Use a fine spray of amended water or removal encapsulant. Saturate the material sufficiently to wet to the substrate without causing excessive dripping. The material must be sprayed repeatedly/continuously during the removal process in order to maintain adequately wet conditions. Removal encapsulants must be applied in accordance with the manufacturer's written instructions. Perforate or carefully separate, using wet methods, an outer covering that is painted or jacketed in order to allow penetration and wetting of the material. Where necessary, carefully remove covering while wetting to minimize fiber release. In no event shall dry removal occur except in the case of electrical hazards or a greater safety issue is possible!

**3.4.4 DISCOVERED MATERIALS**

During abatement, demolition, renovation, and/or further inspection, a potential exists for encountering materials not previously identified to become revealed. Upon discovery of a material not previously identified, the contractor shall immediately notify the owner who will arrange for and coordinate materials sample collection and analysis if necessary. The contractor is not permitted to collect any material samples for asbestos or other hazardous material analysis.

**3.4.5 REPLACEMENT OF DIELECTRIC UNIONS**

Replace dielectric unions during the abatement process. Allow for 15% of the dielectric unions to be replaced after demolition and full abatement of the area. Glovebag each fitting and have a plumber on standby to replace any unions.

**3.5 GLOVEBAG REMOVAL PROCEDURES**

**3.5.1 GENERAL**

All applicable OSHA requirements and glovebag manufacturer’s recommendations shall be met during glove bagging operations.

1. Mix the surfactant with water in the garden sprayer, following the manufacturer's directions.
2. Have each employee put on a HEPA filtered respirator approved for asbestos and check the fit using the positive/negative fit check.
3. Have each employee put on a disposable full-body suit. Remember, the hood goes over the respirator straps.
4. Check closely the integrity of the glove bag to be used. Check all seams, gloves, sleeves, and glove openings. OSHA requires the bottom of the bag to be seamless.
5. Check the pipe where the work will be performed. If it is damaged (broken lagging, hanging, etc.), wrap the entire length of the pipe in poly sheeting and "candy stripe" it with duct tape.
6. Attach glovebag with required tools per manufacturer’s instructions.
7. Using the smoke tube and aspirator bulb, test 10% of glovebags by placing the tube into the water porthole (two-inch opening to glove bag), and fill the bag with smoke and squeeze it. If leaks are found, they should be taped closed using duct tape and the bag should be retested with smoke.
8. Insert the wand from the water sprayer through the water porthole.
9. Insert the hose end from a HEPA vacuum into the upper portion of the glove bag.
10. Wet and remove the pipe insulation.
11. If the section of pipe is covered with an aluminum jacket, remove it first using the wire cutters to cut any bands and the tin snips to remove the aluminum. It is important to fold the sharp edges in to prevent cutting the bag when placing it in the bottom.
12. When the work is complete, spray the upper portion of the bag and clean-push all residue into the bottom of the bag with the other waste material. Be very thorough. Use adequate water.

13. Put all tools, after washing them off in the bag, in one of the sleeves of glove bag and turn it inside out, drawing it outside of the bag. Twist the sleeve tightly several times to seal it and tape it several tight turns with duct tape. Cut through the middle of the duct tape and remove the sleeve. Put the sleeve in the next glove bag or put it in a bucket of water to decontaminate the tools after cutting the sleeve open.
14. Turn on the HEPA vacuum and collapse the bag completely. Remove the vacuum nozzle, seal the hole with duct tape, twist the bag tightly several times in the middle, and tape it to keep the material in the bottom during removal of the glove bag from the pipe.
15. Slip a disposal bag over the glove bag (still attached to the pipe). Remove the tape securing the ends, and slit open the top of the glove bag and carefully fold it down into the disposal bag. Double bag and gooseneck waste materials.

**3.5.2 NEGATIVE PRESSURE GLOVEBAG PROCEDURE**

1. In addition to the above requirements, the HEPA vacuum shall be run continuously during the glovebag procedure until completion at which time the glovebag will be collapsed by the HEPA vacuum prior to removal from the pipe/component.
2. The HEPA vacuum shall be attached and operated as needed to prevent collapse of the glovebag during the removal process.

**3.6 LOCKDOWN ENCAPSULATION**

**3.6.1 GENERAL**

Lockdown encapsulation is an integral part of the ACM removal. At the conclusion of ACM removal and before removal of the primary barriers, all piping surfaces shall be encapsulated with a bridging encapsulant.

**3.6.2 SEALING EXPOSED EDGES**

Seal edges of ACM exposed by removal work with two coats of encapsulant. Prior to sealing, permit the exposed edges to dry completely to permit penetration of the encapsulant.

**3.7 DISPOSAL OF ACM WASTE MATERIALS**

**3.7.1 GENERAL**

Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Disposal shall be done at the approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

**3.7.2 PROCEDURES**

A. Asbestos waste shall be packaged and moved through the W/EDF into a covered transport container in accordance with procedures in this specification. Waste shall be double-bagged prior to disposal. Wetted waste can be very heavy. Bags shall not be overfilled. Bags shall securely sealed to prevent accidental opening and/or leakage. The top shall be tightly twisted and goosenecked prior to tightly sealing with at least three wraps of duct tape. Ensure that unauthorized persons do not have access to the waste material once it is outside the regulated area. All transport containers must be covered at all times when not in use. NESHAP's signs must be on containers during loading and unloading. Material shall not be transported in open vehicles. If drums are used for packaging, the drums shall be labeled properly and shall not be re-used.

B. Waste Load Out: Waste load out shall be done in accordance with the procedures in W/EDF Decontamination Procedures. Bags shall be decontaminated on exterior surfaces by wet cleaning and/or HEPA vacuuming before being placed in the second bag.

C. Asbestos waste with sharp edged components, i.e., nails, screws, lath, strapping, tin sheeting, jacketing, metal mesh, etc., which might tear poly bags shall be wrapped securely in burlap before packaging and, if needed, use a poly lined fiber drum as the second container, prior to disposal.

**3.8 PROJECT DECONTAMINATION**

**3.8.1 GENERAL**

A. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH.

B. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleaning of the regulated area surfaces after the primary barrier removal.

C. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

**3.8.2 REGULATED AREA CLEARANCE**

Air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

**3.8.3 WORK DESCRIPTION**

Decontamination includes the cleaning and clearance of the air in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities.

**3.8.4 PRE-DECONTAMINATION CONDITIONS**

A. Before decontamination starts, all ACM waste from the regulated area shall be removed, all waste collected and removed, and the secondary barrier of poly removed and disposed of along with any gross debris generated by the work.

B. At the start of decontamination, the following shall be in place:
   1. Critical barriers over all openings consisting of two layers of 6 mil poly which is the sole barrier between the regulated area and the rest of the building or outside.
   2. Decontamination facilities, if required for personnel and equipment in operating condition.

**3.8.5 FIRST CLEANING**

Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping methods. Use each surface of a cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. If determined by the CPIH/VPIH/CIH additional cleaning(s) may be needed.

**3.8.6 PRE-CLEARANCE INSPECTION AND TESTING**

The CPIH and VPIH/CIH will perform a thorough and detailed visual inspection after the first cleaning to determine whether there is any visible residue in the regulated area. If the visual inspection is acceptable, the CPIH will perform pre-clearance sampling using aggressive clearance as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A(III)(B)(7)(d). If the sampling results show values below 0.01 f/cc, then the Contractor shall notify the VA's representative of the results with a brief report from the CPIH documenting the inspection and sampling results and a statement verifying that the regulated area is

ready for lockdown encapsulation. The VA reserves the right to utilize their own VPIH/CIH to perform a pre-clearance inspection and testing for verification.

**3.8.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES**

With the express written permission of the VA's representative, perform lockdown encapsulation of all surfaces from which asbestos was abated in accordance with the procedures in this specification.

**3.9 FINAL VISUAL INSPECTIONS AND AIR CLEARANCE TESTING**

**3.9.1 GENERAL**

Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH after the final cleaning.

**3.9.2 FINAL VISUAL INSPECTION**

Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no cost to the VA. Dust/material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

**3.9.3 FINAL AIR CLEARANCE TESTING**

A. After an acceptable final visual inspection by the VPIH/CIH and VA Representative, the VPIH/CIH will perform the final testing. Air samples will be collected and analyzed in accordance with procedures for PCM/TEM in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures. Additional inspection and testing will be done at the expense of the Contractor.

B. If the results of the PCM/TEM are acceptable, remove the critical barriers. Any small quantities of residue material found upon removal of the poly shall be removed with a HEPA vacuum and localized isolation. If significant quantities are found as determined by the VPIH/CIH, then the entire area affected shall be cleaned as specified in the final cleaning.

C. When release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

**3.9.4 FINAL AIR CLEARANCE PROCEDURES**

A. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured with PCM/TEM methods and as verified by VPIH/CIH. The asbestos containment is to remain in place and under negative pressure until inspected and removal of the containment authorized by the VPIH/CIH.

B. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:

1. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method or asbestos fibers counted using the TEM method.
2. Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques. Samples will be collected on 0.8µ MCE filters for PCM analysis and 0.45µ Polycarbonate filters for TEM analysis. Before pumps are started, initiate aggressive sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). Air samples will be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off.

**3.9.5 CLEARANCE SAMPLING USING PCM**

The NIOSH 7400 method will be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 5 PCM clearance samples will be collected.

**3.9.6 CLEARANCE SAMPLING USING TEM**

TEM clearance requires a minimum of 13 samples taken and analyzed, including five samples in the regulated area, five samples outside the regulated area and three field blanks using polycarbonate filters.

**3.9.7 LABORATORY TESTING OF PCM SAMPLES**

The services of an AIHA accredited laboratory will be employed by the VA to perform analysis of the air samples. Samples will be sent by the VPIH/CIH so that verbal/faxed reports can be received within 24 hours. A complete record, certified by the laboratory, of all air monitoring tests and results will be furnished to the VA’s representative and the Contractor.

**3.9.8 LABORATORY TESTING OF TEM SAMPLES**

Samples shall be sent by the VPIH/CIH to an accredited laboratory for analysis by TEM. Verbal/faxed results from the laboratory shall be available within 24 hours after receipt of the samples. A complete record, certified by the laboratory, of all TEM results shall be furnished to the VA's representative and the Contractor.

**3.10 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE**

**3.10.1 COMPLETION OF ABATEMENT WORK**

After thorough decontamination, complete asbestos abatement work upon meeting the regulated area clearance criteria and fulfilling the following:

A. Remove all equipment, materials, and debris from the project area.
B. Package and dispose of all asbestos waste as required.
C. Repair or replace all interior finishes damaged during the abatement work.
D. Fulfill other project closeout requirements as specified elsewhere in this specification.

**3.10.2 CERTIFICATE OF COMPLETION BY CONTRACTOR**

The CPIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

**3.10.3 WORK SHIFTS**

All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday - Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

**3.10.4 RE-INSULATION**

Replace all asbestos-containing insulation/fire-proofing with suitable non-asbestos material which is to remain and not be modified by the mechanical contractor. Provide MSDS's for all replacement materials. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.

**ATTACHMENT #1**

**CERTIFICATE OF COMPLETION**

DATE:

PROJECT NAME:

VAMC/ADDRESS:

1. I certify that I have personally inspected, monitored and supervised the abatement work of

   (specify regulated area or Building):

   which took place from to.

2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That all glovebag work was done in accordance with OSHA requirements and the manufacturer’s recommendations.

CPIH Name:

Signature/Date:

Asbestos Abatement Contractor's Name:

Signature/Date:

**ATTACHMENT #2**

**CERTIFICATE OF WORKER'S ACKNOWLEDGMENT**
**DATE:**

PROJECT NAME:

PROJECT ADDRESS:

ABATEMENT CONTRACTOR'S NAME:

**WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.**

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

**RESPIRATORY PROTECTION:** I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

**TRAINING COURSE:** I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards
- Medical Monitoring
- Air Monitoring
- Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
- Asbestos Waste Disposal

**MEDICAL EXAMINATION:** I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature:

Printed Name: Witness:

**ATTACHMENT #3**

**AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION**

VA PROJECT NAME AND NUMBER:

VA MEDICAL FACILITY:

ABATEMENT CONTRACTOR'S NAME AND ADDRESS:

1. I verify that the following individual

   Name:

   who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

   Address:

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH: Date:

Printed Name of CPIH:

Signature of Contractor: Date:

Printed Name of Contractor:

**ATTACHMENT #4**

**ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S ASBESTOS SPECIFICATIONS**

VA Project Location:

VA Project #:

VA Project Description:

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature Date

Abatement Contractor Competent Person(s) Date

Date

Date

- E N D -

# SECTION 02 83 33.13
# LEAD-BASED PAINT REMOVAL AND DISPOSAL

## PART 1 - GENERAL

### 1.1 DESCRIPTION

This section specifies abatement and disposal of lead-based paint (LBP) and controls needed to limit occupational and environmental exposure to lead hazards.

### 1.2 RELATED WORK

A. Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.

B. Section 02 41 00, DEMOLITION.

C. Section 09 91 00, PAINTING.

### 1.3 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.

B. Code of Federal Regulations (CFR):

CFR 29 Part 1910.....Occupational Safety and Health Standards
CFR 29 Part 1926.....Safety and Health Regulations for Construction
CFR 40 Part 148.....Hazardous Waste Injection Restrictions
CFR 40 Part 260.....Hazardous Waste Management System: General
CFR 40 Part 261.....Identification and Listing of Hazardous Waste
CFR 40 Part 262.....Standards Applicable to Generators of Hazardous Waste
CRF 40 Part 263.....Standards Applicable to Transporters of Hazardous Waste
CFR 40 Part 264.....Standards for Owners and Operations of Hazardous Waste Treatment, Storage, and Disposal Facilities
CFR 40 Part 265.....Interim Status Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities
CFR 40 Part 268.....Land Disposal Restrictions
CFR 49 Part 172.....Hazardous Material Table, Special Provisions, Hazardous Material Communications, Emergency Response Information, and Training Requirements
CFR 49 Part 178.....Specifications for Packaging

C. National Fire Protection Association (NFPA):

NFPA 701-2004.....Methods of Fire Test for Flame-Resistant Textiles and Films

D. National Institute for Occupational Safety And Health (NIOSH)
NIOSH OSHA Booklet 3142. Lead in Construction

E. Underwriters Laboratories (UL)
UL 586-1996 (Rev 2004).. High-Efficiency, Particulate, Air Filter Units

F. American National Standards Institute
Z9.2-2001.....Fundamentals Governing the Design and Operation of Local Exhaust Systems
Z88.2-1992.....Respiratory Protection

**1.4 DEFINITIONS**

A. Action Level: Employee exposure, without regard to use of respirations, to an airborne concentration of lead of 30 micrograms per cubic meter of air averaged over an 8-hour period. As used in this section, ”30 micrograms per cubic meter of air" refers to the action level.

B. Area Monitoring: Sampling of lead concentrations within the lead control area and inside the physical boundaries which is representative of the airborne lead concentrations which may reach the breathing zone of personnel potentially exposed to lead.

C. Physical Boundary: Area physically roped or partitioned off around an enclosed lead control area to limit unauthorized entry of personnel. As used in this section, "inside boundary" shall mean the same as "outside lead control area."

D. Certified Industrial Hygienist (CIH): As used in this section, refers to an Industrial Hygienist employed by the Contractor and is certified by the American Board of Industrial Hygiene in comprehensive practice.

E. Change Rooms and Shower Facilities: Rooms within the designated physical boundary around the lead control area equipped with separate storage facilities for clean protective work clothing and equipment and for street clothes which prevent cross- contamination.

F. Competent Person: A person capable of identifying lead hazards in the work area and is authorized by the contractor to take corrective action.

G. Decontamination Room: Room for removal of contaminated personal protective equipment (PPE).

H. Eight-Hour Time Weighted Average (TWA): Airborne concentration of lead averaged over an 8-hour workday to which an employee is exposed.

I. High Efficiency Particulate Air (HEPA) Filter Equipment: HEPA filtered vacuuming equipment with a UL 586 filter system capable of collecting and retaining lead-contaminated paint dust. A high efficiency

particulate filter means 99.97 percent efficient against 0.3 micron size particles.

J. Lead: Metallic lead, inorganic lead compounds, and organic lead soaps. Excluded from this definition are other organic lead compounds.

K. Lead Control Area: An enclosed area or structure with full containment to prevent the spread of lead dust, paint chips, or debris of lead-containing paint removal operations. The lead control area is isolated by physical boundaries to prevent unauthorized entry of personnel.

L. Lead Permissible Exposure Limit (PEL): Fifty micrograms per cubic meter of air as an 8-hour time weighted average as determined by 29 CFR 1910.1025. If an employee is exposed for more than 8 hours in a work day, the PEL shall be determined by the following formula. PEL (micrograms/cubic meter of air) = 400/No. of hrs worked per day

M. Personnel Monitoring: Sampling of lead concentrations within the breathing zone of an employee to determine the 8-hour time weighted average concentration in accordance with 29 CFR 1910.1025. Samples shall be representative of the employee's work tasks. Breathing zone shall be considered an area within a hemisphere, forward of the shoulders, with a radius of 150 mm to 225 mm (6 to 9 inches) and the center at the nose or mouth of an employee.

**1.5 QUALITY ASSURANCE**

A. Before exposure to lead-contaminated dust, provide workers with a comprehensive medical examination as required by 29 CFR 1926.62 (I) (1) (i) & (ii). The examination shall not be required if adequate records show that employees have been examined as required by 29 CFR 1926.62(I) without the last year.

B. Medical Records: Maintain complete and accurate medical records of employees in accordance with 29 CFR 1910.20.

C. CIH Responsibilities: The Contractor shall employ a certified Industrial Hygienist who will be responsible for the following:

1. Certify Training.
2. Review and approve lead-containing paint removal plan for conformance to the applicable referenced standards.
3. Inspect lead-containing paint removal work for conformance with the approved plan.
4. Direct monitoring.
5. Ensure work is performed in strict accordance with specifications at all times.

6. Ensure hazardous exposure to personnel and to the environment are adequately controlled at all times.

D. Training: Train each employee performing paint removal, disposal, and air sampling operations prior to the time of initial job assignment, in accordance with 29 CFR 1926.62.

E. Training Certification: Submit certificates signed and dated by the CIH and by each employee stating that the employee has received training.

F. Respiratory Protection Program:

1. Furnish each employee required to wear a negative pressure respirator or other appropriate type with a respirator fit test at the time of initial fitting and at least every 6 months thereafter as required by 29 CFR 1926.62.
2. Establish and implement a respiratory protection program as required by 29 CFR 1910.134, 29 CFR 1910.1025, and 29 CFR 1926.62.

G. Hazard Communication Program: Establish and implement a Hazard Communication Program as required by 29 CFR 1910.1200.

H. Hazardous Waste Management: The Hazardous Waste Management plan shall comply with applicable requirements of Federal, State, and local hazardous waste regulations and address:

1. Identification of hazardous wastes associated with the work.
2. Estimated quantities of wastes to be generated and disposed of.
3. Names and qualifications of each contractor that will be transporting, storing, treating, and disposing of the wastes. Include the facility location and a 24-hour point of contact. Furnish two copies of EPA hazardous waste permits and EPA Identification numbers.
4. Names and qualifications (experience and training) of personnel who will be working on-site with hazardous wastes.
5. List of waste handling equipment to be used in performing the work, to include cleaning, volume reduction, and transport equipment.
6. Spill prevention, containment, and cleanup contingency measures to be implemented.
7. Work plan and schedule for waste containment, removal and disposal. Wastes shall be cleaned up and containerized daily.
8. Cost for hazardous waste disposal according to this plan.

I. Safety and Health Compliance:

1. In addition to the detailed requirements of this specification, comply with laws, ordinances, rules, and regulations of federal, state, and local authorities regarding removing, handling, storing,

transporting, and disposing of lead waste materials. Comply with the applicable requirements of the current issue of 29 CFR 1910.1025. Submit matters regarding interpretation of standards to the Contracting Officer for resolution before starting work.

2. Where specification requirements and the referenced documents vary, the most stringent requirements shall apply.

J. Pre-Construction Conference: Along with the CIH, meet with the Contracting Officer to discuss in detail the lead-containing paint removal work plan, including work procedures and precautions for the work plan.

**1.6 SUBMITTALS**

A. Submit the following in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Catalog Data:
Vacuum filters
Respirators

C. Instructions: Paint removal materials. Include applicable material safety data sheets.

D. Statements Certifications and Statements:

1. Qualifications of CIH: Submit name, address, and telephone number of the CIH selected to perform responsibilities in paragraph entitled "CIH Responsibilities." Provide previous experience of the CIH. Submit proper documentation that the Industrial Hygienist is certified by the American Board of Industrial Hygiene in comprehensive practice, including certification number and date of certification/recertification.

2. Testing Laboratory: Submit the name, address, and telephone number of the testing laboratory selected to perform the monitoring, testing, and reporting of airborne concentrations of lead. Provide proper documentation that persons performing the analysis have been judged proficient by successful participation within the last year in the National Institute for Occupational Safety and Health (NIOSH) Proficiency Analytical Testing (PAT) Program. The laboratory shall be accredited by the American Industrial Hygiene Association (AIHA). Provide AIHA documentation along with date of accreditation/reaccreditation.

3. Lead-Containing Paint Removal Plan:

a. Submit a detailed job-specific plan of the work procedures to be used in the removal of lead-containing paint. The plan shall

include a sketch showing the location, size, and details of lead control areas, location and details of decontamination rooms, change rooms, shower facilities, and mechanical ventilation system.

b. Include in the plan, eating, drinking, smoking and restroom procedures, interface of trades, sequencing of lead related work, collected wastewater and paint debris disposal plan, air sampling plan, respirators, protective equipment, and a detailed description of the method of containment of the operation to ensure that airborne lead concentrations of 30 micrograms per cubic meter of air are not exceeded outside of the lead control area.

c. Include air sampling, training and strategy, sampling methodology, frequency, duration of sampling, and qualifications of air monitoring personnel in the air sampling portion on the plan.

4. Field Test Reports: Monitoring Results: Submit monitoring results to the Contracting Officer within 3 working days, signed by the testing laboratory employee performing the air monitoring, the employee that analyzed the sample, and the CIH.

5. Records:

a. Completed and signed hazardous waste manifest from treatment or disposal facility.

b. Certification of Medical Examinations.

c. Employee training certification.

**PART 2 PRODUCTS**

PAINT REMOVAL PRODUCTS: Submit applicable Material Safety Data Sheets for paint removal products used in paint removal work. Use the least toxic product, suitable for the job and acceptable to the Industrial Hygienist.

**PART 3 EXECUTION**

**3.1 PROTECTION**

A. Notification: Notify the Contracting Officer 20 days prior to the start of any paint removal work.

B. Lead Control Area Requirements.

1. Establish a lead control area by completely enclosing with containment screens the area or structure where lead-containing paint removal operations will be performed.

2. Contain removal operations by the use of a negative pressure full containment system with at least one change room and with HEPA filtered exhaust.

C. Protection of Existing Work to Remain: Perform paint removal work without damage or contamination of adjacent areas. Where existing work is damaged or contaminated, restore work to its original condition.

D. Boundary Requirements: Provide physical boundaries around the lead control area by roping off the area [designated on the drawings] or providing curtains, portable partitions or other enclosures to ensure that airborne concentrations of lead will not reach 30 micrograms per cubic meter of air outside of the lead control area.

E. Heating, Ventilating and Air Conditioning (HVAC) Systems: Shut down, lock out, and isolate HVAC systems that supply, exhaust, or pass through the lead control areas. Seal intake and exhaust vents in the lead control area with 6-mil plastic sheet and tape. Seal seams in HVAC components that pass through the lead control area.

F. Change Room and Shower Facilities: Provide clean change rooms and shower facilities within the physical boundary around the designated lead control area in accordance with requirements of 29 CFR 1926.62.

G. Mechanical Ventilation System:

1. Use adequate ventilation to control personnel exposure to lead in accordance with 29 CFR 1926.57.
2. To the extent feasible, use fixed local exhaust ventilation connected to HEPA filters or other collection systems, approved by the industrial hygienist. Local exhaust ventilation systems shall be designed, constructed, installed, and maintained in accordance with ANSI Z9.2.
3. If air from exhaust ventilation is recirculated into the work place, the system shall have a high efficiency filter with reliable back-up filter and controls to monitor the concentration of lead in the return air and to bypass the recirculation system automatically if it fails. Air may be recirculated only where exhaust to the outside is not feasible.

H. Personnel Protection: Personnel shall wear and use protective clothing and equipment as specified herein. Eating, smoking, or drinking is not permitted in the lead control area. No one will be permitted in the lead control area unless they have been given appropriate training and protective equipment.

I. Warning Signs: Provide warning signs at approaches to lead control areas. Locate signs at such a distance that personnel may read the sign and take the necessary precautions before entering the area. Signs shall comply with the requirements of 29 CFR 1926.62.

**3.2 WORK PROCEDURES**

A. Perform removal of lead-containing paint in accordance with approved lead-containing paint removal plan. Use procedures and equipment required to limit occupational and environmental exposure to lead when lead- containing paint is removed in accordance with 29 CFR 1926.62, except as specified herein. Dispose of removed paint chips and associated waste in compliance with Environmental Protection Agency (EPA), federal, state, and local requirements.

B. Personnel Exiting Procedures:

1. Whenever personnel exit the lead-controlled area, they shall perform the following procedures and shall not leave the work place wearing any clothing or equipment worn during the work day:
   a. Vacuum themselves off.
   b. Remove protective clothing in the decontamination room, and place them in an approved impermeable disposal bag.
   c. Shower.
   d. Change to clean clothes prior to leaving the physical boundary designated around the lead-contaminated job site.

C. Monitoring: Monitoring of airborne concentrations of lead shall be in accordance with 29 CFR 1910.1025 and as specified herein. Air monitoring, testing, and reporting shall be performed by a CIH or an Industrial Hygiene (IH) Technician who is under the direction of the CIH:

1. The CIH or the IH Technician under the direction of the CIH shall be on the job site directing the monitoring, and inspecting the lead-containing paint removal work to ensure that the requirements of the Contract have been satisfied during the entire lead-containing paint removal operation.
2. Take personal air monitoring samples on employees who are anticipated to have the greatest risk of exposure as determined by the CIH. In addition, take air monitoring samples on at least 25 percent of the work crew or a minimum of two employees, whichever is greater, during each work shift.
3. Submit results of air monitoring samples, signed by the CIH, within 24 hours after the air samples are taken. Notify the Contracting

Officer immediately of exposure to lead at or in excess of the action level of 30 micrograms per cubic meter of air outside of the lead control area.

D. Monitoring During Paint Removal Work:

1. Perform personal and area monitoring during the entire paint removal operation. Sufficient area monitoring shall be conducted at the physical boundary to ensure unprotected personnel are not exposed above 30 micrograms per cubic meter of air at all times. If the outside boundary lead levels are at or exceed 30 micrograms per cubic meter of air, work shall be stopped and the CIH shall immediately correct the condition(s) causing the increased levels and notify the Contracting Officer immediately.
2. The CIH shall review the sampling data collected on that day to determine if condition(s) requires any further change in work methods. Removal work shall resume when approval is given by the CIH. The Contractor shall control the lead level outside of the work boundary to less than 30 micrograms per cubic meter of air at all times. As a minimum, conduct area monitoring daily on each shift in which lead paint removal operations are performed in areas immediately adjacent to the lead control area.
3. For outdoor operations, at least one sample on each shift shall be taken on the downwind side of the lead control area. If adjacent areas are contaminated, clean and visually inspect contaminated areas. The CIH shall certify that the area has been cleaned of lead contamination.

**3.3 LEAD-CONTAINING PAINT REMOVAL**

A. Remove paint within the areas designated on the drawings in order to completely expose the substrate. Take whatever precautions are necessary to minimize damage to the underlying substrate.

B. Indoor Lead Paint Removal: Select paint removal processes to minimize contamination of work areas with lead-contaminated dust or other lead-contaminated debris/waste. This paint removal process should be described in the lead-containing paint removal plan. Perform manual sanding and scraping to the maximum extent feasible.

C. Mechanical Paint Removal and Blast Cleaning: Perform mechanical paint removal and blast cleaning in lead control areas using negative pressure full containments with HEPA filtered exhaust. Collect paint residue and spent grit (used abrasive) from blasting operations for disposal in accordance with EPA, state and local requirements.

D. Outside Lead Paint Removal: Select removal processes to minimize contamination of work areas with lead-contaminated dust or other lead-contaminated debris/waste. This paint removal process should be described in the lead-containing paint removal plan. Perform manual sanding and scraping to the maximum extent feasible.

**3.4 SURFACE PREPARATIONS**

Avoid flash rusting or other deterioration of the substrate. Provide surface preparations for painting in accordance with Section 09 91 00, PAINTING.

**3.5 CLEANUP AND DISPOSAL**

A. Cleanup: Maintain surfaces of the lead control area free of accumulations of paint chips and dust. Restrict the spread of dust and debris; keep waste from being distributed over the work area. Do not dry sweep or use compressed air to clean up the area. At the end of each shift and when the paint removal operation has been completed, clean the area of visible lead paint contamination by vacuuming with a HEPA filtered vacuum cleaner and wet mopping the area.

B. Certification: The CIH shall certify in writing that the inside and outside the lead control area air monitoring samples are less than 30 micrograms per cubic meter of air, the respiratory protection for the employees was adequate, the work procedures were performed in accordance with 29 CFR 1926.62, and that there were no visible accumulations of lead-contaminated paint and dust on the worksite. Do not remove the lead control area or roped-off boundary and warning signs prior to the Contracting Officer's receipt of the CIH's certification. Reclean areas showing dust or residual paint chips.

C. Testing of Lead-Containing Paint Residue and Used Abrasive Where indicated or when directed by the Contracting Officer, test lead containing paint residue and used abrasive in accordance with 40 CFR 261 for hazardous waste.

D. Disposal:

1. Collect lead-contaminated waste, scrap, debris, bags, containers, equipment, and lead-contaminated clothing, which may produce airborne concentrations of lead particles.
2. Store removed paint, lead-contaminated clothing and equipment, and lead-contaminated dust and cleaning debris into U.S. Department of Transportation (49 CFR 178) approved 55-gallon drums. Properly labels each drum to identify the type of waste (49 CFR 172) and the date lead-contaminated wastes were first put into the drum. Obtain and

complete the Uniform Hazardous Waste Manifest forms from the Activity Staff Civil Engineer located at VA GEMS Coordinator. Comply with land disposal restriction notification requirements as required by 40 CFR 268:

a. At least 14 days prior to delivery, notify the Contracting Officer who will arrange for job site inspection of the drums and manifests by the VA GEMS Coordinator.
b. As necessary, make lot deliveries of hazardous wastes to the area(s) designated by the VA GEMS Coordinator to ensure that drums do not remain on the jobsite longer than 90 calendar days from the date affixed to each drum.
c. Collect lead-contaminated waste, scrap, debris, bags, containers, equipment, and lead-contaminated clothing which may produce airborne concentrations of lead particles. Label the containers in accordance with 29 CFR 1926.62. Dispose of lead-contaminated waste material at a EPA approved hazardous waste treatment, storage, or disposal facility off Government property.
d. Store waste materials in U.S. Department of Transportation (49 CFR 178) approved 55-gallon drums. Properly label each drum to identify the type of waste (49 CFR 172) and the date the drum was filled. The Contracting Officer or an authorized representative will assign an area for interim storage of waste-containing drums. Do not store hazardous waste drums in interim storage longer than 90 calendar days from the date affixed to each drum.
e. Handle, store, transport, and dispose lead or lead-contaminated waste in accordance with 40 CFR 260, 40 CFR 261, 40 CFR 262, 40 CFR 263, 40 CFR 264, and 40 CFR 265. Comply with land disposal restriction notification requirements as required by 40 CFR 268.

E. Disposal Documentation Submit written evidence that the hazardous waste treatment, storage, or disposal facility (TSD) is approved for lead disposal by the EPA and state or local regulatory agencies. Submit one copy of the completed manifest, signed and dated by the initial transporter in accordance with 40 CFR 262.

- - - E N D - - -

# SECTION 03 30 00
# CAST-IN-PLACE CONCRETE

## PART 1 - GENERAL

### 1.1 DESCRIPTION:

This section specifies cast-in-place structural concrete and materials and mixes for other concrete.

### 1.2 RELATED WORK:

A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.

B. Concrete roads, walks, and similar exterior site work: Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS.

### 1.3 TESTING AGENCY FOR CONCRETE MIX DESIGN:

A. Testing agency retained and reimbursed by the Contractor and approved by Resident Engineer.

B. Testing agency maintaining active participation in Program of Cement and Concrete Reference Laboratory (CCRL) of National Institute of Standards and Technology.

C. Testing agency shall furnish equipment and qualified technicians to establish proportions of ingredients for concrete mixes.

### 1.4 TOLERANCES:

A. Formwork: ACI 117, except the elevation tolerance of formed surfaces before removal of shores is +0 mm (+0 inch) and -20 mm (-3/4 inch).

B. Reinforcement Fabricating and Placing: ACI 117, except that fabrication tolerance for bar sizes Nos. 10, 13, and 16 (Nos. 3, 4, and 5) (Tolerance Symbol 1 in Fig. 2.1(a), ACI, 117) used as column ties or stirrups is +0 mm (+0 inch) and -13 mm (-1/2 inch) where gross bar length is less than 3600 mm (12 feet), or +0 mm (+0 inch) and -20 mm (-3/4 inch) where gross bar length is 3600 mm (12 feet) or more.

C. Cross-Sectional Dimension: ACI 117, except tolerance for thickness of slabs 12 inches or less is +20 mm (+3/4 inch) and - 6 mm (-1/4 inch). Tolerance of thickness of beams more than 300 mm (12 inch) but less than 900 mm (3 feet) is +20 mm (+3/4 inch) and -10 mm (-3/8 inch).

D. Slab Finishes: NOT USED.

### 1.5 REGULATORY REQUIREMENTS:

A. ACI SP-66 – ACI Detailing Manual.

B. ACI 318 - Building Code Requirements for Reinforced Concrete.

C. ACI 301 – Standard Specifications for Structural Concrete.

**1.6 SUBMITTALS:**

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Shop Drawings: Reinforcing steel: NOT USED

C. Mill Test Reports: NOT USED

D. Manufacturer's Certificates:

1. NOT USED
2. NOT USED
3. Air-entraining admixture.
4. Chemical admixtures, including chloride ion content.
5. Waterproof paper for curing concrete.
6. Liquid membrane-forming compounds for curing concrete.
7. Non-shrinking grout.
8. Mechanical Expansion Anchors, Submit current ICC-ES report for the specific product proposed.

**1.7 DELIVERY, STORAGE, AND HANDLING:**

A. Conform to ACI 304. Store aggregate separately for each kind or grade, to prevent segregation of sizes and avoid inclusion of dirt and other materials.

B. Deliver cement in original sealed containers bearing name of brand and manufacturer, and marked with net weight of contents. Store in suitable watertight building in which floor is raised at least 300 mm (1 foot) above ground. Store bulk cement and fly ash in separate suitable bins.

C. Deliver other packaged materials for use in concrete in original sealed containers, plainly marked with manufacturer's name and brand, and protect from damage until used.

**1.8 PRE-CONCRETE CONFERENCE: NOT USED**

**1.9 MOCK-UP: NOT USED**

**1.10 APPLICABLE PUBLICATIONS:**

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Concrete Institute (ACI):

117-10.....Tolerances for Concrete Construction and Materials

211.1-91(R2009).....Selecting Proportions for Normal, Heavyweight, and Mass Concrete
211.2-98(R2004).....Selecting Proportions for Structural Lightweight Concrete
214R-02.....Evaluation of Strength Test Results of Concrete
301-10.....Structural Concrete
304R-00(R2009).....Guide for Measuring, Mixing, Transporting, and Placing Concrete
305R-10.....Hot Weather Concreting
306R-10.....Cold Weather Concreting
308R-01(R2008).....Standard Practice for Curing Concrete
309R-05.....Guide for Consolidation of Concrete
318-08.....Building Code Requirements for Reinforced Concrete and Commentary
347-04.....Guide to Formwork for Concrete
SP-66-04.....ACI Detailing Manual

C. American National Standards Institute and American Hardboard Association (ANSI/AHA):
A135.4-2004.....Basic Hardboard

D. American Society for Testing and Materials (ASTM):
A82/A82M-07.....Steel Wire, Plain, for Concrete Reinforcement
A185/185M-07.....Steel Welded Wire Fabric, Plain, for Concrete Reinforcement
A615/A615M-09.....Deformed and Plain Billet-Steel Bars for Concrete Reinforcement
A653/A653M-09.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process
A706/A706M-09.....Low-Alloy Steel Deformed and Plain Bars for Concrete Reinforcement
A767/A767M-09.....Zinc-Coated (Galvanized) Steel Bars for Concrete Reinforcement
A775/A775M-07.....Epoxy-Coated Reinforcing Steel Bars
A820-06.....Steel Fibers for Fiber-Reinforced Concrete
A996/A996M-09.....Rail-Steel and Axle-Steel Deformed Bars for Concrete Reinforcement
C31/C31M-09.....Making and Curing Concrete Test Specimens in the field

C33-08.....Concrete Aggregates
C39/C39M-09.....Compressive Strength of Cylindrical Concrete Specimens
C94/C94M-09.....Ready-Mixed Concrete
C143/C143M-10.....Slump of Hydraulic Cement Concrete
C150-09.....Portland Cement
C171-07.....Sheet Materials for Curing Concrete
C172-08.....Sampling Freshly Mixed Concrete
C173-10.....Air Content of Freshly Mixed Concrete by the Volumetric Method
C192/C192M-07.....Making and Curing Concrete Test Specimens in the Laboratory
C231-09.....Air Content of Freshly Mixed Concrete by the Pressure Method
C260-06.....Air-Entraining Admixtures for Concrete
C309-07.....Liquid Membrane-Forming Compounds for Curing Concrete
C330-09.....Lightweight Aggregates for Structural Concrete
C494/C494M-10.....Chemical Admixtures for Concrete
C618-08.....Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use as a Mineral Admixture in Concrete
C666/C666M-03.....Resistance of Concrete to Rapid Freezing and Thawing
C881/C881M-02.....Epoxy-Resin-Base Bonding Systems for Concrete
C1107/1107M-08.....Packaged Dry, Hydraulic-Cement Grout (Non-shrink)
C1315-08.....Liquid Membrane-Forming Compounds Having Special Properties for Curing and Sealing Concrete
D6-95(R2006).....Loss on Heating of Oil and Asphaltic Compounds
D297-93(R2006).....Rubber Products-Chemical Analysis
D1751-04(R2008).....Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Non-extruding and Resilient Bituminous Types)
D4397-09.....Polyethylene Sheeting for Construction, Industrial and Agricultural Applications
E1155-96(R2008).....Determining $F_F$ Floor Flatness and $F_L$ Floor Levelness Numbers

E. American Welding Society (AWS):
D1.4/D1.4M-11.....Structural Welding Code - Reinforcing Steel

F. Concrete Reinforcing Steel Institute (CRSI):
Handbook 2008

G. National Cooperative Highway Research Program (NCHRP):
Report On.....Concrete Sealers for the Protection of Bridge Structures

H. U. S. Department of Commerce Product Standard (PS):
PS 1.....Construction and Industrial Plywood
PS 20.....American Softwood Lumber

I. U. S. Army Corps of Engineers Handbook for Concrete and Cement:
CRD C513.....Rubber Waterstops
CRD C572.....Polyvinyl Chloride Waterstops

**PART 2 – PRODUCTS:**

**2.1 FORMS:**

A. Wood: PS 20 free from loose knots and suitable to facilitate finishing concrete surface specified; tongue and grooved.

B. Plywood: PS-1 Exterior Grade B-B (concrete-form) 16 mm (5/8 inch), or 20 mm (3/4 inch) thick for unlined contact form. B-B High Density Concrete Form Overlay optional.

C. Metal for Concrete Rib-Type Construction: Steel (removal type) of suitable weight and form to provide required rigidity.

D. Permanent Steel Form for Concrete Slabs: Corrugated, ASTM A653, Grade E, and Galvanized, ASTM A653, G90. Provide venting where insulating concrete fill is used.

**2.2 MATERIALS:**

A. Portland Cement: ASTM C150 Type I or II.

B. Fly Ash: ASTM C618, Class C or F including supplementary optional requirements relating to reactive aggregates and alkalies, and loss on ignition (LOI) not to exceed 5 percent.

C. Coarse Aggregate: ASTM C33.

1. Size 67 or Size 467 may be used for footings and walls over 300 mm (12 inches) thick.
2. Coarse aggregate for applied topping, encasement of steel columns, and metal pan stair fill shall be Size 7.
3. Maximum size of coarse aggregates not more than one-fifth of narrowest dimension between sides of forms, one-third of depth of

slabs, nor three-fourth of minimum clear spacing between reinforcing bars.

D. Lightweight Aggregates for Structural Concrete: ASTM C330, Table 1. Maximum size of aggregate not larger than one-fifth of narrowest dimension between forms, nor three-fourth of minimum clear distance between reinforcing bars. Contractor to furnish certified report to verify that aggregate is sound and durable, and has a durability factor of not less than 80 based on 300 cycles of freezing and thawing when tested in accordance with ASTM C666.

E. Fine Aggregate: ASTM C33. Fine aggregate for applied concrete floor topping shall pass a 4.75 mm (No. 4) sieve, 10 percent maximum shall pass a 150 µm (No. 100) sieve.

F. Mixing Water: Fresh, clean, and potable.

G. Admixtures:

1. Water Reducing Admixture: ASTM C494, Type A and not contain more chloride ions than are present in municipal drinking water.
2. Water Reducing, Retarding Admixture: ASTM C494, Type D and not contain more chloride ions than are present in municipal drinking water.
3. High-Range Water-Reducing Admixture (Superplasticizer): ASTM C494, Type F or G, and not contain more chloride ions than are present in municipal drinking water.
4. Non-Corrosive, Non-Chloride Accelerator: ASTM C494, Type C or E, and not contain more chloride ions than are present in municipal drinking water. Admixture manufacturer must have long-term non-corrosive test data from an independent testing laboratory of at least one year duration using an acceptable accelerated corrosion test method such as that using electrical potential measures.
5. Air Entraining Admixture: ASTM C260.
6. Prohibited Admixtures: Calcium chloride, thiocyanate or admixtures containing more than 0.05 percent chloride ions are not permitted.
7. Certification: Written conformance to the requirements above and the chloride ion content of the admixture prior to mix design review.

H. Vapor Barrier: ASTM D4397, 0.25 mm (10 mil).

I. Reinforcing Steel: ASTM A615, or ASTM A996, deformed, grade as shown.

J. Welded Wire Fabric: ASTM A185.

K. Reinforcing Bars to be Welded: ASTM A706.

L. Galvanized Reinforcing Bars: ASTM A767.

M. Epoxy Coated Reinforcing Bars: ASTM A775.

N. Cold Drawn Steel Wire: ASTM A82.

O. Supports, Spacers, and Chairs: Types which will hold reinforcement in position shown in accordance with requirements of ACI 318 except as specified.

P. Expansion Joint Filler: ASTM D1751.

Q. Sheet Materials for Curing Concrete: ASTM C171.

R. Liquid Membrane-forming Compounds for Curing Concrete: ASTM C309, Type I, with fugitive dye. Compound shall be compatible with scheduled surface treatment, such as paint and resilient tile, and shall not discolor concrete surface.

U. Abrasive Aggregate: Aluminum oxide grains or emery grits.

V. Moisture Vapor Emissions & Alkalinity Control Sealer: 100% active colorless aqueous siliconate solution concrete surface treatment applied the day of the concrete pour in lieu of other curing methods for all concrete slabs receiving resilient flooring, such as, sheet vinyl, vinyl composition tile, rubber, wood flooring, carpet, epoxy coatings and overlays .

1. ASTM C1315 Type 1 Class A, and ASTM C309 Type 1 Class A, penetrating product to have no less than 34% solid content, leaving no sheen, volatile organic compound (VOC) content rating as required to suite regulatory requirements. The product shall have at least a five (5) year documented history in controlling moisture vapor emission from damaging floor covering, compatible with all finish materials.

2. MVE 15-Year Warranty:

a. When a floor covering is installed on a below grade, on grade, or above grade concrete slab treated with Moisture Vapor Emissions & Alkalinity Control Sealer according to manufacturer’s instruction, sealer manufacturer shall warrant the floor covering system against failure due to moisture vapor migration or moisture-born contaminates for a period of fifteen (15) years from the date of original installation. The warranty shall <u>cover all labor and materials</u> needed to replace all floor covering that fails due to moisture vapor emission & moisture born contaminates.

X. Penetrating Sealer: For use on parking garage ramps and decks. High penetration silane sealer providing minimum 95 percent screening per National Cooperative Highway Research Program (NCHRP) No. 244 standards

for chloride ion penetration resistance. Requires moist (non-membrane) curing of slab.

Y. Non-Shrink Grout:

1. ASTM C1107, pre-mixed, produce a compressive strength of at least 18 MPa at three days and 35 MPa (5000 psi) at 28 days. Furnish test data from an independent laboratory indicating that the grout when placed at a fluid consistency shall achieve 95 percent bearing under a 1200 mm x 1200 mm (4 foot by 4 foot) base plate.
2. Where high fluidity or increased placing time is required, furnish test data from an independent laboratory indicating that the grout when placed at a fluid consistency shall achieve 95 percent under an 450 mm x 900 mm (18 inch by 36 inch) base plate.

Z. Mechanical Anchors

1. Provide the size, finish, type, and manufacturer listed on the drawings. If no manufacturer is listed provide expansion anchors manufactured by Hilti Corporation. Substitutions are permitted subject to approval.

**2.3 CONCRETE MIXES:**

A. Mix Designs: Proportioned in accordance with Section 5.3, "Proportioning on the Basis of Field Experience and/or Trial Mixtures" of ACI 318.

1. If trial mixes are used, make a set of at least 6 cylinders in accordance with ASTM C192 for test purposes from each trial mix; test three for compressive strength at 7 days and three at 28 days.
2. Submit a report of results of each test series, include a detailed listing of the proportions of trial mix or mixes, including cement, fly ash, admixtures, weight of fine and coarse aggregate per $m^3$ (cubic yard) measured dry rodded and damp loose, specific gravity, fineness modulus, percentage of moisture, air content, water-cement -fly ash ratio, and consistency of each cylinder in terms of slump.
3. Prepare a curve showing relationship between water-cement -fly ash ratio at 7-day and 28-day compressive strengths. Plot each curve using at least three specimens.
4. If the field experience method is used, submit complete standard deviation analysis.

B. After approval of mixes no substitution in material or change in proportions of approval mixes may be made without additional tests and approval of Resident Engineer or as specified. Making and testing of preliminary test cylinders may be carried on pending approval of cement

and fly ash, providing Contractor and manufacturer certify that ingredients used in making test cylinders are the same. Resident Engineer may allow Contractor to proceed with depositing concrete for certain portions of work, pending final approval of cement and fly ash and approval of design mix.

C. Cement Factor: Maintain minimum cement factors in Table I regardless of compressive strength developed above minimums. Use Fly Ash as an admixture with 20% replacement by weight in all structural work. Increase this replacement to 40% for mass concrete, and reduce it to 10% for drilled piers and caissons.

**TABLE I - CEMENT AND WATER FACTORS FOR CONCRETE**

| Concrete Strength | | Non-Air-Entrained | Air-Entrained | |
|---|---|---|---|---|
| Min. 28 Day Comp. Str. MPa (psi) | Min. Cement kg/m$^3$ (lbs/c. yd) | Max. Water Cement Ratio | Min. Cement kg/m$^3$ (lbs/c. yd) | Max. Water Cement Ratio |
| 35 (5000)[1,3] | 375 (630) | 0.45 | 385 (650) | 0.40 |
| 30 (4000)[1,3] | 325 (550) | 0.55 | 340 (570) | 0.50 |
| 25 (3000)[1,3] | 280 (470) | 0.65 | 290 (490) | 0.55 |
| 25 (3000)[1,2] | 300 (500) | * | 310 (520) | * |

1. If trial mixes are used, the proposed mix design shall achieve a compressive strength 8.3 MPa (1200 psi) in excess of f'c. For concrete strengths above 35 Mpa (5000 psi), the proposed mix design shall achieve a compressive strength 9.7 MPa (1400 psi) in excess of f’c.
2. Lightweight Structural Concrete. Pump mixes may require higher cement values.
3. For concrete exposed to high sulfate content soils maximum water cement ratio is 0.44.
4. Determined by Laboratory in accordance with ACI 211.1 for normal concrete or ACI 211.2 for lightweight structural concrete.

**2.4 BATCHING AND MIXING:**

A. General: Concrete shall be "Ready-Mixed" and comply with ACI 318 and ASTM C94, except as specified. Batch mixing at the site is permitted. Mixing process and equipment must be approved by Resident Engineer. With each batch of concrete, furnish certified delivery tickets listing information in Paragraph 16.1 and 16.2 of ASTM C94. Maximum delivery temperature of concrete is 38$^0$C (100 degrees Fahrenheit). Minimum delivery temperature as follows:

| Atmospheric Temperature | Minimum Concrete Temperature |
|---|---|
| -1. degrees to 4.4 degrees C (30 degrees to 40 degrees F) | 15.6 degrees C (60 degrees F.) |
| -17 degrees C to -1.1 degrees C (0 degrees to 30 degrees F.) | 21 degrees C (70 degrees F.) |

1. Services of aggregate manufacturer's representative shall be furnished during the design of trial mixes and as requested by the Resident Engineer for consultation during batching, mixing, and placing operations of lightweight structural concrete. Services will be required until field controls indicate that concrete of required quality is being furnished. Representative shall be thoroughly familiar with the structural lightweight aggregate, adjustment and control of mixes to produce concrete of required quality. Representative shall assist and advise Resident Engineer.

**PART 3 – EXECUTION**

**3.1 FORMWORK:**

A. General: Design in accordance with ACI 347 is the responsibility of the Contractor. The Contractor shall retain a registered Professional Engineer to design the formwork, shores, and reshores.
   1. Form boards and plywood forms may be reused for contact surfaces of exposed concrete only if thoroughly cleaned, patched, and repaired and Resident Engineer approves their reuse.
   2. Provide forms for concrete footings unless Resident Engineer determines forms are not necessary.
   3. Corrugated fiberboard forms: Place forms on a smooth firm bed, set tight, with no buckled cartons to prevent horizontal displacement, and in a dry condition when concrete is placed.

B. Treating and Wetting: Treat or wet contact forms as follows:
   1. Coat plywood and board forms with non-staining form sealer. In hot weather, cool forms by wetting with cool water just before concrete is placed.
   2. Clean and coat removable metal forms with light form oil before reinforcement is placed. In hot weather, cool metal forms by thoroughly wetting with water just before placing concrete.
   3. Use sealer on reused plywood forms as specified for new material.

C. Size and Spacing of Studs: Size and space studs, wales and other framing members for wall forms so as not to exceed safe working stress of kind of lumber used nor to develop deflection greater than 1/270 of free span of member.

D. Unlined Forms: Use plywood forms to obtain a smooth finish for concrete surfaces. Tightly butt edges of sheets to prevent leakage. Back up all

vertical joints solidly and nail edges of adjacent sheets to same stud with 6d box nails spaced not over 150 mm (6 inches) apart.

**3.2 PLACING REINFORCEMENT: NOT USED**

**3.3 VAPOR BARRIER: NOT USED**

**3.4 MOISTURE VAPOR EMISSIONS & ALKALINITY CONTROL SEALER: NOT USED**

**3.5 CONSTRUCTION JOINTS: NOT USED**

**3.6 EXPANSION JOINTS: NOT USED**

**3.7 PLACING CONCRETE:**

A. Preparation:
   1. Remove hardened concrete, wood chips, shavings and other debris from forms.
   2. Remove hardened concrete and foreign materials from interior surfaces of mixing and conveying equipment.
   3. Have forms and reinforcement inspected and approved by Resident Engineer before depositing concrete.
   4. Provide runways for wheeling equipment to convey concrete to point of deposit. Keep equipment on runways which are not supported by or bear on reinforcement. Provide similar runways for protection of vapor barrier on coarse fill.

B. Bonding: Before depositing new concrete on or against concrete which has been set, thoroughly roughen and clean existing surfaces of laitance, foreign matter, and loose particles.
   1. Preparing surface for applied topping:
      a. Remove laitance, mortar, oil, grease, paint, or other foreign material by sand blasting. Clean with vacuum type equipment to remove sand and other loose material.
      b. Broom clean and keep base slab wet for at least four hours before topping is applied.
      c. Use a thin coat of one part Portland cement, 1.5 parts fine sand, bonding admixture; and water at a 50: 50 ratio and mix to achieve the consistency of thick paint. Apply to a damp base slab by scrubbing with a stiff fiber brush. New concrete shall be placed while the bonding grout is still tacky.

C. Conveying Concrete: Convey concrete from mixer to final place of deposit by a method which will prevent segregation. Method of conveying concrete subject to approval of Resident Engineer.

D. Placing: For special requirements see Paragraphs, HOT WEATHER and COLD WEATHER.

1. Do not place concrete when weather conditions prevent proper placement and consolidation, or when concrete has attained its initial set, or has contained its water or cement content more than 1 1/2 hours.
2. Deposit concrete in forms as near as practicable in its final position. Prevent splashing of forms or reinforcement with concrete in advance of placing concrete.
3. Do not drop concrete freely more than 3000 mm (10 feet) for concrete containing the high-range water-reducing admixture (superplasticizer) or 1500 mm (5 feet) for conventional concrete. Where greater drops are required, use a tremie or flexible spout (canvas elephant trunk), attached to a suitable hopper.
4. Discharge contents of tremies or flexible spouts in horizontal layers not exceeding 500 mm (20 inches) in thickness, and space tremies such as to provide a minimum of lateral movement of concrete.
5. Continuously place concrete until an entire unit between construction joints is placed. Rate and method of placing concrete shall be such that no concrete between construction joints will be deposited upon or against partly set concrete, after it's initial set has taken place, or after 45 minutes of elapsed time during concrete placement.
6. On bottom of members with severe congestion of reinforcement, deposit 25 mm (1 inch) layer of flowing concrete containing the specified high-range water-reducing admixture (superplasticizer). Successive concrete lifts may be a continuation of this concrete or concrete with a conventional slump.
7. Concrete on metal deck:
   a. Concrete on metal deck shall be minimum thickness shown. Allow for deflection of steel beams and metal deck under the weight of wet concrete in calculating concrete quantities for slab.
      1) The Contractor shall become familiar with deflection characteristics of structural frame to include proper amount of additional concrete due to beam/deck deflection.

E. Consolidation: Conform to ACI 309. Immediately after depositing, spade concrete next to forms, work around reinforcement and into angles of forms, tamp lightly by hand, and compact with mechanical vibrator applied directly into concrete at approximately 450 mm (18 inch) intervals. Mechanical vibrator shall be power driven, hand operated type with minimum frequency of 5000 cycles per minute having an intensity

sufficient to cause flow or settlement of concrete into place. Vibrate concrete to produce thorough compaction, complete embedment of reinforcement and concrete of uniform and maximum density without segregation of mix. Do not transport concrete in forms by vibration.

1. Use of form vibration shall be approved only when concrete sections are too thin or too inaccessible for use of internal vibration.
2. Carry on vibration continuously with placing of concrete. Do not insert vibrator into concrete that has begun to set.

**3.8 HOT WEATHER:**

Follow the recommendations of ACI 305 or as specified to prevent problems in the manufacturing, placing, and curing of concrete that can adversely affect the properties and serviceability of the hardened concrete. Methods proposed for cooling materials and arrangements for protecting concrete shall be made in advance of concrete placement and approved by Resident Engineer.

**3.9 COLD WEATHER:**

Follow the recommendations of ACI 306 or as specified to prevent freezing of concrete and to permit concrete to gain strength properly. Use only the specified non-corrosive, non-chloride accelerator. Do not use calcium chloride, thiocyantes or admixtures containing more than 0.05 percent chloride ions. Methods proposed for heating materials and arrangements for protecting concrete shall be made in advance of concrete placement and approved by Resident Engineer.

**3.10 PROTECTION AND CURING:**

A. Conform to ACI 308: Initial curing shall immediately follow the finishing operation. Protect exposed surfaces of concrete from premature drying, wash by rain and running water, wind, mechanical injury, and excessively hot or cold temperatures. Keep concrete not covered with membrane or other curing material continuously wet for at least 7 days after placing, except wet curing period for high-early-strength concrete shall be not less than 3 days. Keep wood forms continuously wet to prevent moisture loss until forms are removed. Cure exposed concrete surfaces as described below. Other curing methods may be used if approved by Resident Engineer.
   1. Liquid curing and sealing compounds: Apply by power-driven spray or roller in accordance with the manufacturer’s instructions. Apply immediately after finishing. Maximum coverage $10m^2/L$ (400 square feet per gallon) on steel troweled surfaces and $7.5m^2/L$ (300 square feet

per gallon) on floated or broomed surfaces for the curing/sealing compound.

2. Plastic sheets: Apply as soon as concrete has hardened sufficiently to prevent surface damage. Utilize widest practical width sheet and overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with tape.
3. Paper: Utilize widest practical width paper and overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with sand, wood planks, pressure-sensitive tape, mastic or glue.

**3.11 REMOVAL OF FORMS:**

A. Remove in a manner to assure complete safety of structure after the following conditions have been met.
   1. Where structure as a whole is supported on shores, forms for beams and girder sides, columns, and similar vertical structural members may be removed after 24 hours, provided concrete has hardened sufficiently to prevent surface damage and curing is continued without any lapse in time as specified for exposed surfaces.
   2. Take particular care in removing forms of architectural exposed concrete to insure surfaces are not marred or gouged, and that corners and arises are true, sharp and unbroken.

B. Control Test: Use to determine if the concrete has attained sufficient strength and curing to permit removal of supporting forms. Cylinders required for control tests taken in accordance with ASTM C172, molded in accordance with ASTM C31, and tested in accordance with ASTM C39. Control cylinders cured and protected in the same manner as the structure they represent. Supporting forms or shoring not removed until strength of control test cylinders have attained at least 70 percent of minimum 28-day compressive strength specified. Exercise care to assure that newly unsupported portions of structure are not subjected to heavy construction or material loading.

C. Reshoring: Reshoring is required if superimposed load plus dead load of the floor exceeds the capacity of the floor at the time of loading. Reshoring accomplished in accordance with ACI 347 at no additional cost to the Government.

**3.12 CONCRETE SURFACE PREPARATION: NOT USED**

**3.13 CONCRETE FINISHES:**

A. Vertical and Overhead Surface Finishes:

1. Unfinished areas: Vertical and overhead concrete surfaces exposed in pipe basements, elevator and dumbwaiter shafts, pipe spaces, pipe trenches, above suspended ceilings, manholes, and other unfinished areas will not require additional finishing.
2. Interior and exterior exposed areas to be painted: Remove fins, burrs and similar projections on surfaces flush, and smooth by mechanical means approved by Resident Engineer, and by rubbing lightly with a fine abrasive stone or hone. Use ample water during rubbing without working up a lather of mortar or changing texture of concrete.
3. Interior and exterior exposed areas finished: Give a grout finish of uniform color and smooth finish treated as follows:
   a. After concrete has hardened and laitance, fins and burrs removed, scrub concrete with wire brushes. Clean stained concrete surfaces by use of a hone stone.
   b. Apply grout composed of one part of Portland cement, one part fine sand, smaller than a 600 µm (No. 30) sieve. Work grout into surface of concrete with cork floats or fiber brushes until all pits, and honeycombs are filled.
   c. After grout has hardened slightly, but while still plastic, scrape grout off with a sponge rubber float and, about 1 hour later, rub concrete vigorously with burlap to remove any excess grout remaining on surfaces.
   d. In hot, dry weather use a fog spray to keep grout wet during setting period. Complete finish of area in same day. Make limits of finished areas at natural breaks in wall surface. Leave no grout on concrete surface overnight.
4. Textured: Finish as specified. Maximum quantity of patched area 0.2 $m^2$ (2 square feet) in each 93 $m^2$ (1000 square feet) of textured surface.

B. Slab Finishes: NOT USED

**3.14 SURFACE TREATMENTS:**

A. Use on exposed concrete floors and concrete floors to receive carpeting except those specified to receive non-slip finish.
B. Liquid Densifier/Sealer: Apply in accordance with manufacturer's directions just prior to completion of construction.
C. Non-Slip Finish: Except where safety nosing and tread coverings are shown, apply non-slip abrasive aggregate to treads and platforms of concrete steps and stairs, and to surfaces of exterior concrete ramps

and platforms. Broadcast aggregate uniformly over concrete surface at rate of application of 8% per 1/10th $m^2$ (7.5 percent per square foot) of area. Trowel concrete surface to smooth dense finish. After curing, rub treated surface with abrasive brick and water to slightly expose abrasive aggregate.

**3.15 APPLIED TOPPING:**

A. Separate concrete topping on floor base slab of thickness and strength shown. Topping mix shall have a maximum slump of 200 mm (8 inches) for concrete containing a high-range water-reducing admixture (superplasticizer) and 100 mm (4 inches) for conventional mix. Neatly bevel or slope at door openings and at slabs adjoining spaces not receiving an applied finish.

B. Placing: Place continuously until entire section is complete, struck off with straightedge, leveled with a highway straightedge or highway bull float, floated and troweled by machine to a hard dense finish. Slope to floor drains as required. Do not start floating until free water has disappeared and no water sheen is visible. Allow drying of surface moisture naturally. Do not hasten by "dusting" with cement or sand.

**3.16 RESURFACING FLOORS: (NOT USED)**

**3.17 RETAINING WALLS: (NOT USED)**

**3.18 PRECAST CONCRETE ITEMS: (NOT USED)**

- - - E N D - - -

# SECTION 04 05 13
# MASONRY MORTARING

## PART 1 - GENERAL

### 1.1 DESCRIPTION:

Section specifies mortar materials and mixes.

### 1.2 RELATED WORK:

A. Mortar used in Section:
   1. Section 04 05 16, MASONRY GROUTING.
   2. Section 04 20 00, UNIT MASONRY.

B. Mortar Color: Section 09 06 00, SCHEDULE FOR FINISHES.

### 1.3 TESTING LABORATORY-CONTRACTOR RETAINED

A. Engage a commercial testing laboratory approved by Resident Engineer to perform tests specified below.

B. Submit information regarding testing laboratory's facilities and qualifications of technical personnel to Resident Engineer.

### 1.4 TESTS

A. Test mortar and materials specified.

B. Certified test reports.

C. Identify materials by type, brand name and manufacturer or by origin.

D. Do not use materials until laboratory test reports are approved by Resident Engineer.

E. After tests have been made and materials approved, do not change without additional test and approval of Resident Engineer.

F. Testing:
   1. Test materials proposed for use for compliance with specifications in accordance with test methods contained in referenced specifications and as follows:
   2. Mortar:
      a. Test for compressive strength and water retention; ASTM C270.
      b. Mortar compressive strengths 28 days as follows:
         Type M: Minimum 17230 kPa (2500 psi) at 28 days.
         Type S: Minimum 12400 kPa (1800 psi) at 28 days.
         Type N: Minimum 5170 kPa (750 psi) at 28 days.
   3. Cement:
      a. Test for water soluble alkali (nonstaining) when nonstaining cement is specified.

b. Nonstaining cement shall contain not more than 0.03 percent water soluble alkali.

4. Sand: Test for deleterious substances, organic impurities, soundness and grading.

5. High Bond Mortar: Test for compressive strength, tensile strength, flexural strength, and brick bond strength.

G. During progress of work, testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES, takes and tests samples as specified in that section. Testing procedures and test methods in ASTM C780.

**1.5 SUBMITTALS**

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Certificates:

1. Testing laboratory's facilities and qualifications of its technical personnel.

2. Indicating that following items meet specifications:

a. Portland cement.

b. Masonry cement.

c. Mortar cement.

d. Hydrated lime.

e. Fine aggregate (sand).

C. Laboratory Test Reports:

1. Mortar, each type.

2. Admixtures.

D. Manufacturer's Literature and Data:

1. Cement, each kind.

2. Hydrated lime.

3. Admixtures.

4. Liquid acrylic resin.

**1.6 PRODUCT DELIVERY, STORAGE AND HANDLING**

A. Deliver masonry materials in original sealed containers marked with name of manufacturer and identification of contents.

B. Store masonry materials under waterproof covers on planking clear of ground, and protect damage from handling, dirt, stain, water and wind.

**1.7 APPLICABLE PUBLICATIONS**

A. Publications listed below form a part of specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Society for Testing and Materials (ASTM):

C40-04.....Organic Impurities in Fine Aggregates for Concrete
C91-05.....Masonry Cement
C109-08.....Compressive Strength of Hydraulic Cement Mortars (Using 2-in. or 50-MM Cube Specimens)
C144-04.....Aggregate for Masonry Mortar
C150-09.....Portland Cement
C207-06.....Hydrated Lime for Masonry Purposes
C270-10.....Mortar for Unit Masonry
C307-03(R2008).....Tensile Strength of Chemical - Resistant Mortar, Grouts, and Monolithic Surfacing
C321-00(R2005).....Bond Strength of Chemical-Resistant Mortars
C348-08.....Flexural Strength of Hydraulic Cement Mortars
C595-10.....Blended Hydraulic Cement
C780-10.....Preconstruction and Construction Evaluation of Mortars for Plain and Reinforced Unit Masonry
C979-10.....Pigments for Integrally Colored Concrete
C1329-05.....Mortar Cement

**PART 2 - PRODUCTS**

**2.1 HYDRATED LIME**

ASTM C207, Type S.

**2.2 AGGREGATE FOR MASONRY MORTAR**

A. ASTM C144 and as follows:
   1. Light colored sand for mortar for laying face brick.
   2. White plastering sand meeting sieve analysis for mortar joints for pointing.
B. Test sand for color value in accordance with ASTM C40. Sand producing color darker than specified standard is unacceptable.

**2.3 BLENDED HYDRAULIC CEMENT**

ASTM C595, Type IS, IP.

**2.4 MASONRY CEMENT**

A. ASTM C91. Type N, S, or M.

**2.5 MORTAR CEMEMT**

ASTM C1329, Type N, S or M.

**2.6 PORTLAND CEMENT**

A. ASTM C150, Type I.

**2.7 LIQUID ACRYLIC RESIN**

A formulation of acrylic polymers and modifiers in liquid form designed for use as an additive for mortar to improve physical properties.

**2.8 WATER**

Potable, free of substances that are detrimental to mortar, masonry, and metal.

**2.9 POINTING MORTAR (NOT USED)**

**2.10 MASONRY MORTAR**

A. Conform to ASTM C270.
B. Admixtures:
   1. Do not use mortar admixtures, except for high bond mortar, and color admixtures unless approved by Resident Engineer.
   2. Submit laboratory test report showing effect of proposed admixture on strength, water retention, and water repellency of mortar.
   3. Do not use antifreeze compounds.
C. Colored Mortar:
   1. Maintain uniform mortar color for exposed work throughout.
   2. Match mortar color in approved sample or mock-up.
   3. Color of mortar for exposed work in alteration work to match color of existing mortar unless specified otherwise in section 09 06 00, SCHEDULE FOR FINISHES.
D. Color Admixtures:
   1. Proportion as specified by manufacturer.
   2. For color, see Section 09 06 00, SCHEDULE FOR FINISHES.

**2.11 HIGH BOND MORTAR**

A. Mixture by volume, one-part Portland cement, 1/4-part hydrated lime, three-parts sand, water, and liquid acrylic resin.
B. Mortar properties when tested in accordance with referenced specifications.
   1. Compressive Strength, ASTM C109: Minimum 19,305 kPa (2800 psi), using 50 mm (2 inch) cubes.
   2. Tensile Strength, ASTM C307: 3861 kPa Minimum (560 psi), using the 25mm (1 inch) briquettes.
   3. Flexural Strength, ASTM C348: Minimum 6067 kPa (880 psi), using flexural bar.
   4. Bond Strength, ASTM C321: Minimum 2965 kPa (430 psi), using crossed brick.

**2.12 COLOR ADMIXTURE**

A. Pigments: ASTM C979.

B. Use mineral pigments only. Organic pigments are not acceptable.

C. Pigments inert, stable to atmospheric conditions, nonfading, alkali resistant and water insoluble.

**PART 3 - EXECUTION**

**3.1 MIXING**

A. Mix in a mechanically operated mortar mixer.

1. Mix mortar for at least three minutes but not more than five minutes.

B. Measure ingredients by volume. Measure by the use of a container of known capacity.

C. Mix water with dry ingredients in sufficient amount to provide a workable mixture which will adhere to vertical surfaces of masonry units.

D. Mortar that has stiffened because of loss of water through evaporations:

1. Re-tempered by adding water to restore to proper consistency and workability.
2. Discard mortar that has reached its initial set or has not been used within two hours.

E. Pointing Mortar:

1. Mix dry ingredients with enough water to produce a damp mixture of workable consistency which will retain its shape when formed into a ball.
2. Allow mortar to stand in dampened condition for one to 1-1/2 hours.
3. Add water to bring mortar to a workable consistency prior to application.

**3.2 MORTAR USE LOCATION**

A. Use Type M mortar for precast concrete panels, and waterproof parging below grade, and Exterior Bearing Walls.

B. Use Type S mortar for masonry containing vertical reinforcing bars (non-engineered) for masonry below grade and for engineered reinforced unit masonry work.

C. For brick veneer over frame back up walls, use Type N portland cement-lime mortar or Type S masonry cement or mortar cement mortar.

D. Use Type N mortar for other masonry work, except as otherwise specified.

E. Use Type N mortar for tuck pointing work.

- - - E N D - - -

# SECTION 04 05 16
# MASONRY GROUTING

## PART 1 - GENERAL

### 1.1 DESCRIPTION:

Section specifies grout materials and mixes.

### 1.2 RELATED WORK:

A. Grout used in Section:
   1. Section 04 20 00, UNIT MASONRY.
B. Grout Color: Section 09 06 00, SCHEDULE FOR FINISHES.

### 1.3 TESTS:

A. Test grout and materials specified.
B. Certified test reports.
C. Identify materials by type, brand name and manufacturer or by origin.
D. Do not use materials until laboratory test reports are approved by Resident Engineer.
E. After tests have been made and materials approved, do not change without additional test and approval of Resident Engineer.
F. Testing:
   1. Test materials proposed for use for compliance with specifications in accordance with test methods contained in referenced specifications and as follows:
   2. Grout:
      a. Test for compressive strength; ASTM C1019.
      b. Grout compressive strength of 13790 kPa (2000 psi) at 28 days.
   3. Cement:
      a. Test for water soluble alkali (nonstaining) when nonstaining cement is specified.
      b. Nonstaining cement shall contain not more than 0.03 percent water soluble alkali.
   4. Sand: Test for deleterious substances, organic impurities, soundness and grading.

### 1.4 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
B. Certificates:
   1. Indicating that following items meet specifications:
      a. Portland cement.
      b. Masonry cement.

c. Grout.
d. Hydrated lime.
e. Fine aggregate (sand).
f. Coarse aggregate for grout.
g. Color admixture.

C. Laboratory Test Reports:
1. Grout, each type.
2. Admixtures.

D. Manufacturer's Literature and Data:
1. Cement, each kind.
2. Hydrated lime.
3. Admixtures.
4. Liquid acrylic resin.

**1.5 PRODUCT DELIVERY, STORAGE AND HANDLING:**

A. Deliver masonry materials in original sealed containers marked with name of manufacturer and identification of contents.

B. Store masonry materials under waterproof covers on planking clear of ground, and protect damage from handling, dirt, stain, water and wind.

**1.6 APPLICABLE PUBLICATIONS:**

A. Publications listed below form a part of specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Society for Testing and Materials (ASTM):

C40-04.....Organic Impurities in Fine Aggregates for Concrete
C91-05.....Masonry Cement
C150-09.....Portland Cement
C207-06.....Hydrated Lime for Masonry Purposes
C404-07.....Aggregate for Masonry Grout
C476-10.....Grout for Masonry
C595-10.....Blended Hydraulic Cement
C979-10.....Pigments for Integrally Colored Concrete
C1019-11.....Sampling and Testing Grout

**PART 2 - PRODUCTS**

**2.1 HYDRATED LIME:**

ASTM C207, Type S.

**2.2 AGGREGATE FOR MASONRY GROUT:**

ASTM C404, Size 8.

**2.3 BLENDED HYDRAULIC CEMENT:**

ASTM C595, Type IS, IP.

**2.4 MASONRY CEMENT:**

A. ASTM C91. Type N, S, or M.

**2.5 PORTLAND CEMENT:**

A. ASTM C150, Type I.

**2.6 LIQUID ACRYLIC RESIN:**

A formulation of acrylic polymers and modifiers in liquid form designed for use as an additive for mortar to improve physical properties.

**2.7 WATER:**

Potable, free of substances that are detrimental to grout, masonry, and metal.

**2.8 GROUT:**

A. Conform to ASTM C476 except as specified.
B. Grout type proportioned by volume as follows:
1. Fine Grout:
a. Portland cement or blended hydraulic cement: one part.
b. Hydrated lime: 0 to 1/10 part.
c. Fine aggregate: 2-1/4 to three times sum of volumes of cement and lime used.
2. Coarse Grout:
a. Portland cement or blended hydraulic cement: one part.
b. Hydrated lime: 0 to 1/10 part.
c. Fine aggregate: 2-1/4 to three times sum of volumes of cement and lime used.
d. Coarse aggregate: one to two times sum of volumes of cement and lime used.
3. Sum of volumes of fine and coarse aggregates: Do not exceed four times sum of volumes of cement and lime used.

**2.9 COLOR ADMIXTURE:**

A. Pigments: ASTM C979.
B. Use mineral pigments only. Organic pigments are not acceptable.
C. Pigments inert, stable to atmospheric conditions, nonfading, alkali resistant and water insoluble.

**PART 3 - EXECUTION**

**3.1 MIXING:**

A. Mix in a mechanically operated grout mixer.
1. Mix grout for at least five minutes.

B. Measure ingredients by volume. Measure by the use of a container of known capacity.

C. Mix water with grout dry ingredients in sufficient amount to bring grout mixture to a pouring consistency.

**3.2 GROUT USE LOCATIONS:**

A. Use fine grout for filling wall cavities and cells of concrete masonry units where the smallest dimension is 50 mm (2 inches) or less.

B. Use either fine grout or coarse grout for filling wall cavities and cells of concrete masonry units where the smallest dimension is greater than 50 mm (2 inches).

C. Do not use grout for filling bond beam or lintel units.

- - - E N D - - -

# SECTION 04 20 00
# UNIT MASONRY

## PART 1 - GENERAL

### 1.1 DESCRIPTION

This section specifies requirements for construction of masonry unit walls.

### 1.2 RELATED WORK

A. Mortars and grouts: Section 04 05 13, MASONRY MORTARING, Section 04 05 16, MASONRY GROUTING.

B. Steel lintels and shelf angles: Section 05 50 00, METAL FABRICATIONS.

C. Cavity insulation: Section 07 21 13, THERMAL INSULATION.

D. Flashing: Section 07 60 00, FLASHING AND SHEET METAL.

E. Sealants and sealant installation: Section 07 92 00, JOINT SEALANTS.

F. Color and texture of masonry units: Section 09 06 00, SCHEDULE FOR FINISHES.

### 1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

B. Samples:

1. Face brick, sample panel, 200 mm by 400 mm (8 inches by 16 inches,) showing full color range and texture of bricks, bond, and proposed mortar joints.
2. Concrete masonry units, when exposed in finish work.
3. Anchors, and ties, one each and joint reinforcing 1200 mm (48 inches) long.

C. Shop Drawings:

1. Special masonry shapes.
2. Drawings, showing reinforcement, applicable dimensions and methods of hanging soffit or lintel masonry and reinforcing masonry for embedment of anchors for hung fixtures.
3. Ceramic glazed structural facing tile or concrete masonry units for typical window and door openings, and, for special conditions as affected by structural conditions.

D. Certificates:

1. Certificates signed by manufacturer, including name and address of contractor, project location, and the quantity, and date or dates of shipment of delivery to which certificate applies.
2. Indicating that the following items meet specification requirements:

a. Face brick.
b. Solid and load-bearing concrete masonry units, including fire-resistant rated units.

3. Testing laboratories facilities and qualifications of its principals and key personnel to perform tests specified.

E. Laboratory Test Reports:
1. Brick for pre-built masonry panels.

F. Manufacturer's Literature and Data:
1. Anchors, ties, and reinforcement.
2. Shear keys.
3. Reinforcing bars.

**1.4 SAMPLE PANEL**

A. Before starting masonry, lay up a sample panel in accordance with Masonry Standards Joint Committee (MSJC) and Brick Industry Association (BIA).
1. Use masonry units from random cubes of units delivered on site.
2. Include reinforcing, ties, and anchors.

B. Use sample panels approved by COTR for standard of workmanship of new masonry work.

C. Use sample panel to test cleaning methods.

**1.5 WARRANTY**

Warrant exterior masonry walls against moisture leaks and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be five years.

**1.6 APPLICABLE PUBLICATIONS**

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):

A951-06.....Steel Wire for Masonry Joint Reinforcement.
A615/A615M-09.....Deformed and Plain Billet-Steel Bars for Concrete Reinforcement.
A675/A675M-03(R2009)....Standard Specification for Steel Bars, Carbon, Hot-Wrought, Special Quality, Mechanical PropertiesC34-03 Structural Clay Load-Bearing Wall Tile
C55-09.....Concrete Building Brick
C56-10.....Structural Clay Non-Load-Bearing Tile

C62-0.....Building Brick (Solid Masonry Units Made From Clay or Shale)
C67-09.....Sampling and Testing Brick and Structural Clay Tile
C90-11.....Load-Bearing Concrete Masonry Units
C126-10.....Ceramic Glazed Structural Clay Facing Tile, Facing Brick, and Solid Masonry Units
C216-10.....Facing Brick (Solid Masonry Units Made From Clay or Shale)
C476-10.....Standard Specification for Grout for Masonry
C612-10.....Mineral Fiber Block and Board Thermal Insulation
C744-10.....Prefaced Concrete and Calcium Silicate Masonry Units.
D1056-07.....Flexible Cellular Materials - Sponge or Expanded Rubber
D2000-08.....Rubber Products in Automotive Applications
D2240-05(R2010).....Rubber Property - Durometer Hardness
D3574-08.....Flexible Cellular Materials-Slab, Bonded, and Molded Urethane Foams
F1667-11.....Fasteners: Nails, Spikes and Staples

C. Masonry Industry Council:
Hot and Cold Weather Masonry Construction Manual-98 (R2000).

D. American Welding Society (AWS):
D1.4-11 Structural Welding Code – Reinforcing Steel.

E. Federal Specifications (FS):
FF-S-107C-00.....Screws, Tapping and Drive

F. Brick Industry Association - Technical Notes on Brick Construction (BIA):
11-2001.....Guide Specifications for Brick Masonry, Part I
11A–1988.....Guide Specifications for Brick Masonry, Part II
11B–1988.....Guide Specifications for Brick Masonry, Part III Execution
11C-1998.....Guide Specification for Brick Masonry Engineered Brick Masonry, Part IV
11D-1988.....Guide Specifications for Brick Masonry Engineered Brick Masonry, Part IV continued

G. Masonry Standards Joint Committee; Specifications for Masonry Structures TMS 602-08/ACI 530.1-08/ASCE 6-08 (2008 MSJC Book Version TMS-0402-08).

**PART 2 - PRODUCTS**

**2.1 BRICK (NOT USED)**

**2.2 CONCRETE MASONRY UNITS**

A. Hollow and Solid Load-Bearing Concrete Masonry Units: ASTM C90.
   1. Unit Weight: Normal weight.
   2. Sizes: Modular.
   3. For molded faces used as a finished surface, use concrete masonry units with uniform fine to medium surface texture unless specified otherwise.

**2.3 CLAY TILE UNITS (NOT USED)**

**2.4 SHEAR KEYS**

A. ASTM D2000, solid extruded cross-shaped section of rubber, neoprene, or polyvinyl chloride, with a durometer hardness of approximately 80 when tested in accordance with ASTM D2240, and a minimum shear strength of 3.5 MPa (500 psi).
B. Shear key dimensions: Approximately 70 mm by 8 mm for long flange and 38 mm by 16 mm for short flange (2-3/4 inches by 5/16 inch for long flange, and 1-1/2 inches by 5/8 inch for short flange).

**2.5 REINFORCEMENT:**

A. Steel Reinforcing Bars: ASTM A615, deformed bars, 420 MPa (Grade 60) for bars No. 10 to No. 57 (No. 3 to No. 18), except as otherwise indicated.
B. Where 6 mm diameter (No. 2) bars are shown, provide plain, round, carbon steel bars, ASTM A675, 550 MPa (Grade 80).
C. Shop-fabricate reinforcement bars which are shown to be bent or hooked.
D. Joint Reinforcement:
   1. Form from wire complying with ASTM A951.
   2. Galvanized after fabrication.
   3. Width of joint reinforcement 40 mm (1 5/8-inches) less than nominal width of masonry wall or partition.
   4. Cross wires welded to longitudinal wires.
   5. Joint reinforcing at least 3000 mm (10 feet) in length.
   6. Joint reinforcing in rolls is not acceptable.
   7. Joint reinforcing that is crimped to form drip is not acceptable.
   8. Maximum spacing of cross wires 400 mm (16 inches) to longitudinal wires.
   9. Ladder Design:
      a. Longitudinal wires deformed 5 mm (0.20 inch) diameter wire.
      b. Cross wires 4 mm (0.16 inch) diameter.
   10. Trussed Design (NOT USED)

11. Multiple Wythes and Cavity wall ties:
    a. Longitudinal wires 2.6 mm (0.10 inch), two in each wythe with ladder truss wires 2.6 mm (0.10 inch) overlay, welded to each longitudinal wire.
    b. Longitudinal wires 4 mm (0.16 inch) with U shape 2.6 mm (0.10 inch) rectangular ties extending into other wythe not less than 75 mm (3 inches) spaced 400 mm o.c. (16 inches). Adjustable type with U shape tie designed to receive 4 mm (0.16 inch) pintle projecting into other wythe 75 mm (3 inches) minimum.

**2.6 ANCHORS, TIES, AND REINFORCEMENT**

A. Steel Reinforcing Bars: ASTM A615M, deformed bars, grade as shown.

B. Joint Reinforcement:
1. Form from wire complying with ASTM A951.
2. Galvanized after fabrication.
3. Width of joint reinforcement 40 mm (0.16 inches) less than nominal width of masonry wall or partition.
4. Cross wires welded to longitudinal wires.
5. Joint reinforcement at least 3000 mm (10 feet) in length.
6. Joint reinforcement in rolls is not acceptable.
7. Joint reinforcement that is crimped to form drip is not acceptable.
8. Maximum spacing of cross wires 400 mm (16 inch) to longitudinal wires.
9. Ladder Design:
    a. Longitudinal wires deformed 5 mm (0.20 inch) diameter wire.
    b. Cross wires 4 mm (0.16 inch) diameter.
10. Trussed Design:
    a. Longitudinal and cross wires not less than 4 mm (0.16 inch nominal) diameter.
    b. Longitudinal wires deformed.
11. Multiple Wythes and Cavity wall ties:
    a. Longitudinal wires 4 mm (0.16 inch), two in each wythe with ladder truss wires 4 mm (0.16 inch) overlay, welded to each longitudinal wire.
    b. Longitudinal wires 4 mm (0.16 inch) with U shape 4 mm (0.16 inch) rectangular ties extending into other wythe not less than 75 mm (3 inches) spaced 400 mm o.c. (16 inches). Adjustable type with U shape tie designed to receive 4 mm (0.16 inch) pintle projecting into other wythe 75 mm (3 inches min.).

C. Adjustable Veneer Anchor for Frame Walls:

1. Two piece, adjustable anchor and tie.
2. Anchor and tie may be either type; use only one type throughout.
3. Loop Type:
   a. Anchor: Screw-on galvanized steel anchor strap 2.75 mm (0.11 inch) by 19 mm (3/4 inch) wide by 225 mm (9 inches) long, with 9 mm (0.35 inch) offset and 100 mm (4 inch) adjustment. Provide 5 mm (0.20 inch) hole at each end for fasteners.
   b. Ties: Triangular tie, fabricated of 5 mm (0.20 inch) diameter galvanized cold drawn steel wire. Ties long enough to engage the anchor and be embedded not less than 50 mm (2 inches) into the bed joint of the masonry veneer.
4. Angle Type:
   a. Anchor: Minimum 2 mm (16 gage) thick galvanized steel angle shaped anchor strap. Provide hole in vertical leg for fastener. Provide hole near end of outstanding leg to suit upstanding portion of tie.
   b. Tie: Fabricate from 5 mm (0.20 inch) diameter galvanized cold drawn steel wire. Form "L" shape to be embedded not less than 50 mm (2 inches) into the bed joint of the masonry veneer and provide upstanding leg to fit through hole in anchor and be long enough to allow 50 mm (2 inches) of vertical adjustment.

D. Dovetail Anchors:
1. Corrugated steel dovetail anchors formed of 1.5 mm (0.0598 inch) thick by 25 mm (1 inch) wide galvanized steel, 90 mm (3-1/2 inches) long where used to anchor 100 mm (4 inch) nominal thick masonry units, 140 mm (5-1/2 inches) long for masonry units more than 100 mm (4 inches) thick.
2. Triangular wire dovetail anchor 100 mm (4 inch) wide formed of 4 mm (9 gage) steel wire with galvanized steel dovetail insert. Anchor length to extend at least 75 mm (3 inches) into masonry, 25 mm (1 inch) into 40 mm (1-1/2 inch) thick units.
3. Form dovetail anchor slots from 0.6 mm (0.0239 inch) thick galvanized steel (with felt or fiber filler).

E. Individual ties:
1. Rectangular ties: Form from 5 mm (3/16 inch) diameter galvanized steel rod to a rectangular shape not less than 50 mm (2 inches) wide by sufficient length for ends of ties to extend within 25 mm (1 inch) of each face of wall. Ties that are crimped to form drip are not permitted.

2. Adjustable Cavity Wall Ties:
   a. Adjustable wall ties may be used at Contractor's option.
   b. Two piece type permitting up to 40 mm (1-1/2 inch) adjustment.
   c. Form ties from 5 mm (3/16 inch) diameter galvanized steel wire.
   d. Form one piece to a rectangular shape 105 mm (4-1/8 inches) wide by length required to extend into the bed joint 50 mm (2 inches).
   e. Form the other piece to a 75 mm (3 inch) long by 75 mm (3 inch) wide shape, having a 75 mm (3 inch) long bent section for engaging the 105 mm (4-1/8 inch) wide piece to form adjustable connection.

F. Wall Ties, (Mesh or Wire):
   1. Mesh wall ties formed of ASTM A82, W0.5, 2 mm, (16 gage) galvanized steel wire 13 mm by 13 mm (1/2 inch by 1/2 inch) mesh, 75 mm (3 inches) wide by 200 mm (8 inches) long.
   2. Rectangular wire wall ties formed of W1.4, 3 mm, (9 gage) galvanized steel wire 50 mm (2 inches) wide by 200 mm (8 inches) long.

G. Corrugated Wall Tie:
   1. Form from 1.5 mm (0.0598 inch) thick corrugated, galvanized steel 30 mm (1-1/4 inches) wide by lengths so as to extend at least 100 mm (4 inches) into joints of new masonry plus 38 mm (1-1/2 inch) turn-up.
   2. Provide 5 mm (3/16 inch) hole in turn-up for fastener attachment.

H. Adjustable Steel Column Anchor:
   1. Two piece anchor consisting of a 6 mm (1/4 inch) diameter steel rod to be welded to steel with offset ends, rod to permit 100 mm (4 inch) vertical adjustment of wire anchor.
   2. Triangular shaped wire anchor 100 mm (4 inches) wide formed from 5 (3/16 inch) diameter galvanized wire, to extend at least 75 mm (3 inches) into joints of masonry.

I. Adjustable Steel Beam Anchor:
   1. Z or C type steel strap, 30 mm (1 1/4 inches) wide, 3 mm (1/8 inch) thick.
   2. Flange hook not less than 38 mm (1 1/2 inches) long.
   3. Length to embed in masonry not less than 50 mm (2 inches) in 100 mm (4 inch) nominal thick masonry and 100 mm (4 inches) in thicker masonry.
   4. Bend masonry end not less than 40 mm (1 1/2 inches).

J. Ridge Wall Anchors:
   1. Form from galvanized steel not less than 25 mm (1 inch) wide by 5 mm (3/16 inch) thick by 600 mm (24 inches) long, plus 50 mm (2 inch) bends.

2. Other lengths as shown.

**2.7 PREFORMED COMPRESSIBLE JOINT FILLER**

A. Thickness and depth to fill the joint as specified.

B. Closed Cell Neoprene: ASTM D1056, Type 2, Class A, Grade 1, B2F1.

C. Non-Combustible Type: ASTM C612, Class 5, 1800 degrees F.

**2.8 ACCESSORIES**

A. Weep Hole Wicks: Glass fiber ropes, 10 mm (3/8 inch) minimum diameter, 300 mm (12 inches) long.

B. Box Board:

1. Mineral Fiber Board: ASTM C612, Class 1.
2. 25 mm (1 inch) thickness.
3. Other spacing material having similar characteristics may be used subject to the Resident Engineer's approval.

C. Masonry Cleaner:

1. Detergent type cleaner selected for each type masonry used.
2. Acid cleaners are not acceptable.
3. Use soapless type specially prepared for cleaning brick or concrete masonry as appropriate.

D. Fasteners:

1. Concrete Nails: ASTM F1667, Type I, Style 11, 19 mm (3/4 inch) minimum length.
2. Masonry Nails: ASTM F1667, Type I, Style 17, 19 mm (3/4 inch) minimum length.
3. Screws: FS-FF-S-107, Type A, AB, SF thread forming or cutting.

**2.9 PRE-BUILT MASONRY PANELS (NOT USED)**

**PART 3 - EXECUTION**

**3.1 JOB CONDITIONS**

A. Protection:

1. Cover tops of walls with nonstaining waterproof covering, when work is not in progress. Secure to prevent wind blow off.
2. On new work protect base of wall from mud, dirt, mortar droppings, and other materials that will stain face, until final landscaping or other site work is completed.

B. Cold Weather Protection:

1. Masonry may be laid in freezing weather when methods of protection are utilized.
2. Comply with MSJC and “Hot and Cold Weather Masonry Construction Manual”.

**3.2 CONSTRUCTION TOLERANCES**

A. Lay masonry units plumb, level and true to line within the tolerances as per MSJC requirements and as follows:

B. Maximum variation from plumb:
   1. In 3000 mm (10 feet) - 6 mm (1/4 inch).
   2. In 6000 mm (20 feet) - 10 mm (3/8 inch).
   3. In 12 000 mm (40 feet) or more - 13 mm (1/2 inch).

C. Maximum variation from level:
   1. In any bay or up to 6000 mm (20 feet) - 6 mm (1/4 inch).
   2. In 12 000 mm (40 feet) or more - 13 mm (1/2 inch).

D. Maximum variation from linear building lines:
   1. In any bay or up to 6000 mm (20 feet) - 13 mm (1/2 inch).
   2. In 12 000 mm (40 feet) or more - 19 mm (3/4 inch).

E. Maximum variation in cross-sectional dimensions of columns and thickness of walls from dimensions shown:
   1. Minus 6 mm (1/4 inch).
   2. Plus 13 mm (1/2 inch).

F. Maximum variation in prepared opening dimensions:
   1. Accurate to minus 0 mm (0 inch).
   2. Plus 6 mm (1/4 inch).

**3.3 INSTALLATION GENERAL**

A. Keep finish work free from mortar smears or spatters, and leave neat and clean.

B. Anchor masonry as specified in Paragraph, ANCHORAGE.

C. Wall Openings:
   1. Fill hollow metal frames built into masonry walls and partitions solid with mortar as laying of masonry progresses.
   2. If items are not available when walls are built, prepare openings for subsequent installation.

D. Tooling Joints:
   1. Do not tool until mortar has stiffened enough to retain thumb print when thumb is pressed against mortar.
   2. Tool while mortar is soft enough to be compressed into joints and not raked out.
   3. Finish joints in exterior face masonry work with a jointing tool, and provide smooth, water-tight concave joint unless specified otherwise.
   4. Tool Exposed interior joints in finish work concave unless specified otherwise.

E. Partition Height:
   1. Extend partitions at least 100 mm (four inches) above suspended ceiling or to overhead construction where no ceiling occurs.
   2. Extend following partitions to overhead construction.
      a. Where noted smoke partitions, FHP (full height partition), and FP (fire partition) and smoke partitions (SP) on drawings.
      b. Both walls at expansion joints.
      c. Corridor walls.
      d. Walls at stairway and stair halls, elevators, dumbwaiters, trash and laundry chute shafts, and other vertical shafts.
      e. Walls at refrigerator space.
      g. Reinforced masonry partitions
   3. Extend finish masonry partitions at least four-inches above suspended ceiling and continue with concrete masonry units or structural clay tile to overhead construction:

F. Lintels:
   1. Lintels are not required for openings less than 1000 mm (3 feet 4 inches) wide that have hollow metal frames.
   2. Openings 1025 mm (3 feet 5 inches) wide to 1600 m (5 feet 4 inches) wide with no structural steel lintel or frames, require a lintel formed of concrete masonry lintel or bond beam units filled with grout per ASTM C476 and reinforced with 1- #15m (1-#5) rod top and bottom for each 100 mm (4 inches) of nominal thickness unless shown otherwise.
   3. Precast lintels of 25 Mpa (3000 psi) concrete, of same thickness as partition, and with one Number 5 deformed bar top and bottom for each 100 mm (4 inches) of nominal thickness, may be used in lieu of reinforced CMU masonry lintels.
   4. Use steel lintels, for openings over 1600 m (5 feet 4 inches) wide, brick masonry, and elevator openings unless shown otherwise.
   5. Doors having overhead concealed door closers require a steel lintel, and a pocket for closer box.
   6. Length for minimum bearing of 100 mm (4 inches) at ends.
   7. Build masonry openings or arches over wood or metal centering and supports when steel lintels are not used.

G. Wall, Furring, and Partition Units:
   1. Lay out field units to provide for running bond of walls and partitions, with vertical joints in second course centering on first course units unless specified otherwise.

2. Align head joints of alternate vertical courses.
3. At sides of openings, balance head joints in each course on vertical center lines of openings.
4. Use no piece shorter than 100 mm (4 inches) long.
5. On interior partitions provide a 6 mm (1/4 inch) open joint for caulking between exterior walls, concrete work, and abutting masonry partitions.
6. Use not less than 100 mm (4 inches) nominal thick masonry for free standing furring unless shown otherwise.
7. Do not abut existing plastered surfaces except suspended ceilings with new masonry partitions.

H. Use not less than 100 mm (4 inches) nominal thick masonry for fireproofing steel columns unless shown otherwise.

I. Before connecting new masonry with previously laid, remove loosened masonry or mortar, and clean and wet work in place as specified under wetting.

J. Structural Steel Encased in Masonry: (NOT USED)

K. Chases:
1. Do not install chases in masonry walls and partitions exposed to view in finished work, including painted or coated finishes on masonry.
2. Masonry 100 mm (4 inch) nominal thick may have electrical conduits 25 mm (1 inch) or less in diameter when covered with soaps, or other finishes.
3. Full recess chases after installation of conduit, with mortar and finish flush.
4. When pipes or conduits, or both occur in hollow masonry unit partitions retain at least one web of the hollow masonry units.

L. Wetting and Wetting Test:
1. Test and wet brick or clay tile in accordance with BIA 11B.
2. Do not wet concrete masonry units or glazed structural facing tile before laying.

M. Temporary Formwork: Provide formwork and shores as required for temporary support of reinforced masonry elements.

N. Construct formwork to conform to shape, line and dimensions shown. Make sufficiently tight to prevent leakage of mortar, grout, or concrete (if any). Brace, tie and support as required to maintain position and shape during construction and curing of reinforced masonry.

O. Do not remove forms and shores until reinforced masonry members have hardened sufficiently to carry their own weight and all other reasonable temporary loads that may be placed on them during construction.

Q. Allow not less than the following minimum time to elapse after completion of members before removing shores or forms, provided suitable curing conditions have been obtained during the curing period.
   1. 10 days for girders and beams.
   2. 7 days for slabs.
   3. 7 days for reinforced masonry soffits.

**3.4 ANCHORAGE**

A. Veneer to Frame Walls: (NOT USED)

B. Veneer to Concrete Walls:
   1. Install dovetail slots in concrete vertically at 600 mm (2 feet) on centers.
   2. Locate dovetail anchors at 400 mm (16 inch) maximum vertical intervals.
   3. Anchor new masonry facing to existing concrete with corrugated wall ties spaced at 400 mm, (16 inch) maximum vertical intervals, and at 600 mm (2 feet) maximum horizontal intervals. Fasten ties to concrete with power actuated fasteners or concrete nails.

C. Masonry Facing to Backup and Cavity Wall Ties:
   1. Use individual ties for new work.
   2. Stagger ties in alternate courses, and space at 400 mm (16 inches) maximum vertically, and 600 mm (2 feet) horizontally.
   3. At openings, provide additional ties spaced not more than 900 mm (3 feet) apart vertically around perimeter of opening, and within 300 mm (12 inches) from edge of opening.
   4. Anchor new masonry facing to existing masonry with corrugated wall ties spaced at 400 mm (16 inch) maximum vertical intervals and at every second masonry unit horizontally. Fasten ties to masonry with masonry nails.
   5. Option: Use joint reinforcing for multiple wythes and cavity wall ties spaced not more than 400 mm (16 inches) vertically.
   6. Tie interior and exterior wythes of reinforced masonry walls together with individual ties. Provide ties at intervals not to exceed 600 mm (24 inches) on center horizontally, and 400 mm (16 inches) on center vertically. Lay ties in the same line vertically in order to facilitate vibrating of the grout pours.

D. Anchorage of Abutting Masonry:
   1. Anchor interior 100 mm (4 inch) thick masonry partitions to exterior masonry walls with wall ties. Space ties at 600 mm (2 foot) maximum vertical intervals. Extend ties 100 mm (4 inches) minimum into masonry.
   2. Anchor interior masonry bearing walls or interior masonry partitions over 100 mm (4 inches) thick to masonry walls with rigid wall anchors spaced at 400 mm (16 inch) maximum vertical intervals.
   3. Anchor abutting masonry walls and partitions to concrete with dovetail anchors. Install dovetail slots vertically in concrete at centerline of abutting wall or partition. Locate dovetail anchors at 400 mm (16 inch) maximum vertical intervals. Secure anchors to existing wall with two 9 mm (3/8 inch) by 75 mm (3 inch) expansion bolts or two power-driven fasteners.
   4. Anchor abutting interior masonry partitions to existing concrete and existing masonry construction, with corrugated wall ties. Extend ties at least 100 mm (4 inches) into joints of new masonry. Fastened to existing concrete and masonry construction, with powder actuated drive pins, nail or other means that provides rigid anchorage. Install anchors at 400 mm (16 inch) maximum vertical intervals.

E. Masonry Furring: (NOT USED)

F. Anchorage to Steel Beams or Columns:
   1. Use adjustable beam anchors on each flange.
   2. At columns weld the 6 mm (1/4 inch) steel rod to steel columns at 300 mm (12 inch) intervals, and place wire ties in masonry courses at 400 mm (16 inches) maximum vertically.

**3.5 REINFORCEMENT**

A. Joint Reinforcement:
   1. Use as joint reinforcement in CMU wythe of combination brick and CMU, cavity walls, and single wythe concrete masonry unit walls or partitions.
   2. Reinforcing may be used in lieu of individual ties for anchoring brick facing to CMU backup in exterior masonry walls.
   3. Brick veneer over frame backing walls does not require joint reinforcement.
   4. Locate joint reinforcement in mortar joints at 400 mm (16 inch) maximum vertical intervals.
   5. Additional joint reinforcement is required in mortar joints at both 200 mm (8 inches) and 400 (16 inches) above and below windows, doors,

louvers and similar openings in masonry, except where other type anchors are required for anchorage of masonry to concrete structure.

6. Joint reinforcement is required in every other course of stack bond CMU masonry.
7. Wherever brick masonry is backed up with stacked bond masonry, joint reinforcement is required in every other course of CMU backup, and in corresponding joint of facing brick.

B. Steel Reinforcing Bars:

1. Install in cells of hollow masonry units where required for vertical reinforcement and in bond beam units for lintels and bond beam horizontal reinforcement. Install in wall cavities of reinforced masonry walls where shown.
2. Use grade 60 bars if not specified otherwise.
3. Bond Beams:
   a. Form Bond beams of load-bearing concrete masonry units filled with ASTM C476 grout and reinforced with 2-#15m (#5) reinforcing steel unless shown otherwise. Do not cut reinforcement.
   b. Brake bond beams only at expansion joints and at control joints, if shown.
4. Stack Bond: (NOT USED)
5. Grout openings:
   a. Leave cleanout holes in double wythe walls during construction by omitting units at the base of one side of the wall.
   b. Locate 75 mm x 75 mm (3 in. x 3 in.) min. clean-out holes at location of vertical reinforcement.
   c. Keep grout space clean of mortar accumulation and sand debris. Clean the grout space every day using a high pressure jet stream of water, or compressed air, or industrial vacuum, or by laying wood strips on the metal ties as the wall is built. If wood strips are used, lift strips with wires as the wall progresses and before placing each succeeding course of wall ties.

**3.6 BRICK EXPANSION AND CMU CONTROL JOINTS.**

A. Provide brick expansion (BEJ) and CMU control (CJ) joints where shown on drawings.

B. Keep joint free of mortar and other debris.

C. Where joints occur in masonry walls.

1. Install preformed compressible joint filler in brick wythe.

2. Install cross shaped shear keys in concrete masonry unit wythe with preformed compressible joint filler on each side of shear key unless otherwise specified.
3. Install filler, backer rod, and sealant on exposed faces.

D. Use standard notched concrete masonry units (sash blocks) made in full and half-length units where shear keys are used to create a continuous vertical joint.

E. Interrupt steel joint reinforcement at expansion and control joints unless otherwise shown.

F. Fill opening in exposed face of expansion and control joints with sealant as specified in Section 07 92 00, JOINT SEALANTS.

**3.7 BUILDING EXPANSION AND SEISMIC JOINTS (NOT USED)**

**3.8 ISOLATION SEAL (NOT USED)**

**3.9 BRICKWORK**

A. Lay clay brick in accordance with BIA Technical Note 11 series.

B. Laying:
1. Lay brick in running bond with course of masonry bonded at corners unless shown otherwise.
2. Maintain bond pattern throughout.
3. Do not use brick smaller than half-brick at any angle, corner, break or jamb.
4. Where length of cut brick is greater than one half but less than a whole brick, maintain the vertical joint location of such units.
5. Lay exposed brickwork joints symmetrical about center lines of openings.
6. Do not structural bond multi wythe brick walls unless shown.
7. Before starting work, lay facing brick on foundation wall and adjust bond to openings, angles, and corners.
8. Lay brick for sills with wash and drip.
9. Build solid brickwork as required for anchorage of items.

C. Joints:
1. Exterior and interior joint widths: Lay for three equal joints in 200 mm (eight inches) vertically, unless shown otherwise.
2. Rake joints for pointing with colored mortar when colored mortar is not full depth.
3. Arches:
   a. Flat arches (jack arches) lay with camber of 1 in 200 (1/16 inch per foot) of span.

b. Face radial arches with radial brick with center line of joints on radial lines.
c. Form Radial joints of equal width.
d. Bond arches into backing with metal ties in every other joint.

D. Weep Holes:
1. Install weep holes at 600 mm (24 inches) on center in bottom of vertical joints of exterior masonry veneer or cavity wall facing over foundations, bond beams, and other water stops in the wall.
2. Form weep holes using wicks made of mineral fiber insulation strips turned up 200 mm (8 inches) in cavity. Anchor top of strip to backup to securely hold in place.
3. Install sand or pea gravel in cavity approximately 75 mm (3 inches) high between weep holes.

E. Solid Exterior Walls: (NOT USED

F. Cavity Type Exterior Walls:
1. Keep air space clean of mortar accumulations and debris.
a. Clean cavity by use of hard rubber, wood or metal channel strips having soft material on sides contacting wythes.
b. Lift strips with wires before placing next courses of horizontal joint reinforcement or individual ties.
2. For each lift lay two courses of concrete masonry units, followed by six courses of brick facing.
3. Insulated Cavity Type Exterior Walls:
a. Install the insulation against the cavity face of inner masonry wythe.
b. Place insulation between rows of ties or joint reinforcing or bond to masonry surface with a bonding agent as recommended by the manufacturer of the insulation.
c. Lay the outer masonry wythe up with an air space between insulation and masonry units.

**3.10 CONCRETE MASONRY UNITS**

A. Kind and Users:
1. Provide special concrete masonry shapes as required, including lintel and bond beam units, sash units, and corner units. Use solid concrete masonry units, where full units cannot be used, or where needed for anchorage of accessories.
2. Provide solid load-bearing concrete masonry units or grout the cell of hollow units at jambs of openings in walls, where structural members impose loads directly on concrete masonry, and where shown.

3. Provide rounded corner (bullnose) shapes at opening jambs in exposed work and at exterior corners.
4. Do not use brick jambs in exposed finish work.
5. Use concrete building brick only as filler in backup material where not exposed.
6. Masonry assemblies shall meet the required fire resistance in fire rated partitions of type and construction that will provide fire rating as shown.
7. Structural Clay Tile Units (NOT USED)

B. Laying:

1. Lay concrete masonry units with 10 mm (3/8 inch) joints, with a bond overlap of not less than 1/4 of the unit length, except where stack bond is required.
2. Do not wet concrete masonry units before laying.
3. Bond external corners of partitions by overlapping alternate courses.
4. Lay first course in a full mortar bed.
5. Set anchorage items as work progress.
6. Where ends of anchors, bolts, and other embedded items, project into voids of units, completely fill such voids with mortar or grout.
7. Provide a 6 mm (1/4 inch) open joint for caulking between exterior walls, concrete work, and abutting masonry partitions.
8. Lay concrete masonry units with full face shell mortar beds and fill head joint beds for depth equivalent to face shell thickness.
9. Lay concrete masonry units so that cores of units, that are to be filled with grout, are vertically continuous with joints of cross webs of such cores completely filled with mortar. Unobstructed core openings not less than 50 mm (2 inches) by 75 mm (3 inches).
10. Do not wedge the masonry against the steel reinforcing. Minimum 13 mm (1/2 inch) clear distance between reinforcing and masonry units.
11. Install deformed reinforcing bars of sizes shown.
12. Steel reinforcement, at time of placement, free of loose flaky rust, mud, oil, or other coatings that will destroy or reduce bond.
13. Steel reinforcement in place before grouting.
14. Minimum clear distance between parallel bars: One bar diameter.
15. Hold vertical steel reinforcement in place by centering clips, caging devices, tie wire, or other approved methods, vertically at spacings noted.
16. Support vertical bars near each end and at intermediate intervals not exceeding 192 bar diameters.

17. Reinforcement shall be fully encased by grout or concrete.
18. Splice reinforcement or attach reinforcement to dowels by placing in contact and secured or by placing the reinforcement within 1/5 of the required bar splice length.
19. Stagger splices in adjacent horizontal reinforcing bars. Lap reinforcing bars at splices a minimum of 40 bar diameters.
20. Grout cells of concrete masonry units, containing the reinforcing bars, solid as specified under grouting.
21. Cavity and joint horizontal reinforcement may be placed as the masonry work progresses.
22. Rake joints 6 to 10 mm (1/4 to 3/8 inch) deep for pointing with colored mortar when colored mortar is not full depth.

**3.11 GLAZED STRUCTURAL FACING TILE (GSFT) (NOT USED)**

**3.12 POINTING**

A. Fill joints with pointing mortar using rubber float trowel to rub mortar solidly into raked joints.
B. Wipe off excess mortar from joints of glazed masonry units with dry cloth.
C. Finish exposed joints in finish work with a jointing tool to provide a smooth concave joint unless specified otherwise.

**3.13 GROUTING**

A. Preparation:
   1. Clean grout space of mortar droppings before placing grout.
   2. Close cleanouts.
   3. Install vertical solid masonry dams across grout space for full height of wall at intervals of not more than 9000 mm (30 feet). Do not bond dam units into wythes as masonry headers.
   4. Verify reinforcing bars are in cells of units or between wythes as shown.

B. Placing:
   1. Place grout by hand bucket, concrete hopper, or grout pump.
   2. Consolidate each lift of grout after free water has disappeared but before plasticity is lost.
   3. Do not slush with mortar or use mortar with grout.
   4. Interruptions:
      a. When grouting must be stopped for more than an hour, top off grout 40 mm (1-1/2 inch) below top of last masonry course.
      b. Grout from dam to dam on high lift method.

c. A longitudinal run of masonry may be stopped off only by raking back one-half a masonry unit length in each course and stopping grout 100 mm (4 inches) back of rake on low lift method.

C. Puddling Method:
1. Double wythe masonry constructed grouted in lifts not to exceed 300 mm (12 inches) or less than 50 mm (2 inches) wide.
2. Consolidate by puddling with a grout stick during and immediately after placing.
3. Grout the cores of concrete masonry units containing the reinforcing bars solid as the masonry work progresses.

D. Low Lift Method:
1. Construct masonry to a height of 1.5 m (5 ft) maximum before grouting.
2. Grout in one continuous operation and consolidate grout by mechanical vibration and reconsolidate after initial water loss and settlement has occurred.

E. High Lift Method:
1. Do not pour grout until masonry wall has properly cured a minimum of 4 hours.
2. Place grout in lifts not exceeding 1.5 m (5 ft).
3. Exception:
Where the following conditions are met, place grout in lifts not exceeding 3.86 m (12.67 ft).
a. The masonry has cured for at least 4 hours.
b. The grout slump is maintained between 254 and 279 mm (10 and 11 in).
c. No intermediate reinforced bond beams are placed between the top and the bottom of the pour height.
4. When vibrating succeeding lifts, extend vibrator 300 to 450 mm (12 to 18 inches) into the preceding lift to close any shrinkage cracks or separation from the masonry units.

**3.14 PLACING REINFORCEMENT**

A. General: Clean reinforcement of loose rust, mill scale, earth, ice or other materials which will reduce bond to mortar or grout. Do not use reinforcement bars with kinks or bends not shown on the Contract Drawings or final shop drawings, or bars with reduced cross-section due to excessive rusting or other causes.

B. Position reinforcement accurately at the spacing indicated. Support and secure vertical bars against displacement. Horizontal reinforcement may

be placed as the masonry work progresses. Where vertical bars are shown in close proximity, provide a clear distance between bars of not less than the nominal bar diameter or 25 mm (1 inch), whichever is greater.

C. For columns, piers and pilasters, provide a clear distance between vertical bars as indicated, but not less than 1 1/2 times the nominal bar diameter or 38 mm (1-1/2 inches), whichever is greater. Provide lateral ties as indicated.

D. Splice reinforcement bars where shown; do not splice at other places unless accepted by the Resident Engineer. Provide lapped splices, unless otherwise indicated. In splicing vertical bars or attaching to dowels, lap ends, place in contact and wire tie.

E. Provide not less than minimum lap as indicated on shop drawings, or if not indicated, as required by governing code.

F. Weld splices where indicated. Comply with the requirements of AWS D1.4 for welding materials and procedures.

G. Embed metal ties in mortar joints as work progresses, with a minimum mortar cover of 15 mm (5/8 inch) on exterior face of walls and 13 mm (1/2 inch) at other locations.

H. Embed prefabricated horizontal joint reinforcement as the work progresses, with a minimum cover of 15 mm (5/8 inch) on exterior face of walls and 13 mm (1/2 inch) at other locations. Lap joint reinforcement not less than 150 mm (6 inches) at ends. Use prefabricated “L” and “T” sections to provide continuity at corners and intersections. Cut and bend joint reinforcement as recommended by manufacturer for continuity at returns, offsets, column fireproofing, pipe enclosures and other special conditions.

I. Anchoring: Anchor reinforced masonry work to supporting structure as indicated.

J. Anchor reinforced masonry walls to non-reinforced masonry where they intersect.

3.15 INSTALLATION OF REINFORCED BRICK MASONRY (NOT USED)

**3.16 INSTALLATION OF REINFORCED CONCRETE UNIT MASONRY**

A. Do not wet concrete masonry units (CMU).

B. Lay CMU units with full-face shell mortar beds. Fill vertical head joints (end joints between units) solidly with mortar from face of unit to a distance behind face equal to not less than the thickness of longitudinal face shells. Solidly bed cross-webs of starting courses in mortar. Maintain head and bed joint widths shown, or if not shown, provide 10 mm (3/8 inch) joints.

C. Where solid CMU units are shown, lay with full mortar head and bed joints.

D. Walls:

1. Pattern Bond: Lay CMU wall units in 1/2-running bond with vertical joints in each course centered on units in courses above and below, unless otherwise indicated. Bond and interlock each course at corners and intersections. Use special-shaped units where shown, and as required for corners, jambs, sash, control joints, lintels, bond beams and other special conditions.
2. Maintain vertical continuity of core or cell cavities, which are to be reinforced and grouted, to provide minimum clear dimension indicated and to provide minimum clearance and grout coverage for vertical reinforcement bars. Keep cavities free of mortar. Solidly bed webs in mortar where adjacent to reinforced cores or cells.
3. Where horizontal reinforced beams (bond beams) are shown, use special units or modify regular units to allow for placement of continuous horizontal reinforcement bars. Place small mesh expanded metal lath or wire screening in mortar joints under bond beam courses over cores or cells of non-reinforced vertical cells, or provide units with solid bottoms.

E. Columns, Piers and Pilasters:

1. Use CMU units of the size, shape and number of vertical core spaces shown. If not shown, use units which provide minimum clearances and grout coverage for number and size of vertical reinforcement bars shown.
2. Provide pattern bond shown, or if not shown, alternate head joints in vertical alignment.
3. Where bonded pilaster construction is shown, lay wall and pilaster units together to maximum pour height specified.

F. Grouting:

1. Use “Fine Grout” per ASTM C476 for filling spaces less than 100 mm (4 inches) in one or both horizontal directions.
2. Use “Coarse Grout” per ASTM C476 for filling 100 mm (4 inch) spaces or larger in both horizontal directions.
3. Grouting Technique: At the Contractor’s option, use either low-lift or high-lift grouting techniques subject to requirements which follow.

G. Low-Lift Grouting:

1. Provide minimum clear dimension of 50 mm (2 inches) and clear area of 5160 $mm^2$ (8 square inches) in vertical cores to be grouted.
2. Place vertical reinforcement prior to grouting of CMU. Extend above elevation of maximum pour height as required for splicing. Support in position at vertical intervals not exceeding 192 bar diameters nor 3 m (10 feet).
3. Lay CMU to maximum pour height. Do not exceed 1.5 m (5 foot) height, or if bond beam occurs below 1.5 m (5 foot) height, stop pour 38 mm (1-1/2 in) below top of bond beam.
4. Pour grout using chute container with spout or pump hose. Rod or vibrate grout during placing. Place grout continuously; do not interrupt pouring of grout for more than one hour. Terminate grout pours 38 mm (1-1/2 inches) below top course of pour.
5. Bond Beams: Stop grout in vertical cells 38 mm (1-1/2 inches) below bond beam course. Place horizontal reinforcement in bond beams; lap at corners and intersections as shown. Place grout in bond beam course before filling vertical cores above bond beam.

H. High-Lift Grouting:

1. Do not use high-lift grouting technique for grouting of CMU unless minimum cavity dimension and area is 75 mm (3 inches) and 6450 $mm^2$ (10 square inches), respectively.
2. Provide cleanout holes in first course at all vertical cells which are to be filled with grout.
3. Use units with one face shell removed and provide temporary supports for units above, or use header units with concrete brick supports, or cut openings in one face shell.
4. Construct masonry to full height of maximum grout pour specified, prior to placing grout.
5. Limit grout lifts to a maximum height of 1.5 m (5 feet) and grout pour to a maximum height of 7.3 m (24 feet), for single wythe hollow concrete masonry walls, unless otherwise indicated.
6. Place vertical reinforcement before grouting. Place before or after laying masonry units, as required by job conditions. Tie vertical reinforcement to dowels at base of masonry where shown and thread CMU over or around reinforcement. Support vertical reinforcement at intervals not exceeding 192 bar diameters nor 3 m (10 feet).
7. Where individual bars are placed after laying masonry, place wire loops extending into cells as masonry is laid and loosed before

mortar sets. After insertion of reinforcement bar, pull loops and bar to proper position and tie free ends.

8. Where reinforcement is prefabricated into cage units before placing, fabricate units with vertical reinforcement bars and lateral ties of the size and spacing indicated.
9. Place horizontal beam reinforcement as the masonry units are laid.
10. Embed lateral tie reinforcement in mortar joints where indicated. Place as masonry units are laid, at vertical spacing shown.
11. Where lateral ties are shown in contact with vertical reinforcement bars, embed additional lateral tie reinforcement in mortar joints. Place as shown, or if not shown, provide as required to prevent grout blowout or rupture of CMU face shells, but provide not less than 4.1 mm diameter (8 gage) wire ties spaced 400 mm (16 inches) o.c. for members with 500 mm (20 inches) or less side dimensions, and 200 mm (8 inches) o.c. for members with side dimensions exceeding 500 mm (20 inches).
12. Preparation of Grout Spaces: Prior to grouting, inspect and clean grout spaces. Remove dust, dirt, mortar droppings, loose pieces of masonry and other foreign materials from grout spaces. Clean reinforcement and adjust to proper position. Clean top surface of structural members supporting masonry to ensure bond. After final cleaning and inspection, close cleanout holes and brace closures to resist grout pressures.
13. Do not place grout until entire height of masonry to be grouted has attained sufficient strength to resist displacement of masonry units and breaking of mortar bond. Install shores and bracing, if required, before starting grouting operations.
14. Place grout by pumping into grout spaces unless alternate methods are acceptable to the Resident Engineer.
15. Limit grout pours to sections which can be completed in one working day with not more than one hour interruption of pouring operation. Place grout in lifts which do not exceed 1.5 m (5 feet). Allow not less than 30 minutes, nor more than one hour between lifts of a given pour. Mechanically consolidate each grout lift during pouring operation.
16. Place grout in lintels or beams over openings in one continuous pour.
17. Where bond beam occurs more than one course below top of pour, fill bond beam course to within 25 mm (1 inch) of vertically reinforced cavities, during construction of masonry.

18. When more than one pour is required to complete a given section of masonry, extend reinforcement beyond masonry as required for splicing. Pour grout to within 38 mm (1-1/2 inches) of top course of first pour. After grouted masonry is cured, lay masonry units and place reinforcement for second pour section before grouting. Repeat sequence if more pours are required.

**3.17 CLEANING AND REPAIR**

A. General:
   1. Clean exposed masonry surfaces on completion.
   2. Protect adjoining construction materials and landscaping during cleaning operations.
   3. Cut out defective exposed new joints to depth of approximately 19 mm (3/4 inch) and repoint.
   4. Remove mortar droppings and other foreign substances from wall surfaces.

B. Brickwork:
   1. First wet surfaces with clean water, then wash down with a solution of soapless detergent. Do not use muriatic acid.
   2. Brush with stiff fiber brushes while washing, and immediately thereafter hose down with clean water.
   3. Free clean surfaces of traces of detergent, foreign streaks, or stains of any nature.

C. Concrete Masonry Units:
   1. Immediately following setting, brush exposed surfaces free of mortar or other foreign matter.
   2. Allow mud to dry before brushing.

**3.18 WATER PENETRATION TESTING (NOT USED)**

- - - E N D - - -

# SECTION 07 60 00
# FLASHING AND SHEET METAL

## PART 1 - GENERAL

### 1.1 DESCRIPTION

Formed sheet metal work for wall and roof flashing, copings, roof edge metal, fasciae, drainage specialties, and formed expansion joint covers are specified in this section.

### 1.2 RELATED WORK

A. Joint Sealants: Section 07 92 00, JOINT SEALANTS.

B. Color of factory coated exterior architectural metal and anodized aluminum items: Section 09 06 00, SCHEDULE FOR FINISHES.

C. Integral flashing components of manufactured roof specialties and accessories or equipment: Division 22, PLUMBING sections and Division 23 HVAC sections.

D. Paint materials and application: Section 09 91 00, PAINTING.

### 1.3 APPLICABLE PUBLICATIONS.

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.

B. Aluminum Association (AA):

AA-C22A41.....Aluminum Chemically etched medium matte, with clear anodic coating, Class I Architectural, 0.7-mil thick

AA-C22A42.....Chemically etched medium matte, with integrally colored anodic coating, Class I Architectural, 0.7 mils thick

AA-C22A44.....Chemically etched medium matte with electrolytically deposited metallic compound, integrally colored coating Class I Architectural, 0.7-mil thick finish

C. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):

ANSI/SPRI ES-1-03.....Wind Design Standard for Edge Systems Used with Low Slope Roofing Systems

D. American Architectural Manufacturers Association (AAMA):

AAMA 620.....Voluntary Specification for High Performance Organic Coatings on Coil Coated Architectural Aluminum

AAMA 621.....Voluntary Specification for High Performance Organic Coatings on Coil Coated Architectural Hot Dipped Galvanized (HDG) and Zinc-Aluminum Coated Steel Substrates

E. ASTM International (ASTM):

A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

A653/A653M-09.....Steel Sheet Zinc-Coated (Galvanized) or Zinc Alloy Coated (Galvanized) by the Hot- Dip Process

B32-08.....Solder Metal

B209-07.....Aluminum and Aluminum-Alloy Sheet and Plate

B370-09.....Copper Sheet and Strip for Building Construction

D173-03.....Bitumen-Saturated Cotton Fabrics Used in Roofing and Waterproofing

D412-06.....Vulcanized Rubber and Thermoplastic Elastomers-Tension

D1187-97(R2002).....Asphalt Base Emulsions for Use as Protective Coatings for Metal

D1784-08.....Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly (Vinyl Chloride) (CPVC) Compounds

D3656-07.....Insect Screening and Louver Cloth Woven from Vinyl-Coated Glass Yarns

D4586-07.....Asphalt Roof Cement, Asbestos Free

F. Sheet Metal and Air Conditioning Contractors National Association (SMACNA): Architectural Sheet Metal Manual.

G. National Association of Architectural Metal Manufacturers (NAAMM):

AMP 500-06.....Metal Finishes Manual

H. Federal Specification (Fed. Spec):
A-A-1925A.....Shield, Expansion; (Nail Anchors)
UU-B-790A.....Building Paper, Vegetable Fiber

I. International Code Commission (ICC): International Building Code, Current Edition

**1.4 PERFORMANCE REQUIREMENTS**

A. Wind Uplift Forces: Resist the following forces per FM Approvals 1-49:
1. Wind Zone 1: 0.48 to 0.96 kPa (10 to 20 lbf/sq. ft.): 1.92-kPa (40-lbf/sq. ft.) perimeter uplift force, 2.87-kPa (60-lbf/sq. ft.) corner uplift force, and 0.96-kPa (20-lbf/sq. ft.) outward force.
2. Wind Zone 1: 1.00 to 1.44 kPa (21 to 30 lbf/sq. ft.): 2.87-kPa (60-lbf/sq. ft.) perimeter uplift force, 4.31-kPa (90-lbf/sq. ft.) corner uplift force, and 1.44-kPa (30-lbf/sq. ft.) outward force.
3. Wind Zone 2: 1.48 to 2.15 kPa (31 to 45 lbf/sq. ft.): 4.31-kPa (90-lbf/sq. ft.) perimeter uplift force, 5.74-kPa (120-lbf/sq. ft.) corner uplift force, and 2.15-kPa (45-lbf/sq. ft.) outward force.
4. Wind Zone 3: 2.20 to 4.98 kPa (46 to 104 lbf/sq. ft.): 9.96-kPa (208-lbf/sq. ft.) perimeter uplift force, 14.94-kPa (312-lbf/sq. ft.) corner uplift force, and 4.98-kPa (104-lbf/sq. ft.) outward force.

B. Wind Design Standard: Fabricate and install copings and roof-edge flashingstested per ANSI/SPRI ES-1 to resist design pressure as indicated on Drawings.

**1.5 SUBMITTALS**

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings: For all specified items, including:
1. Flashings
2. Copings
3. Gravel Stop-Fascia
4. Gutter and Conductors
5. Expansion joints
6. Fascia-cant

C. Manufacturer's Literature and Data: For all specified items, including:
1. Two-piece counterflashing

2. Thru wall flashing
3. Expansion joint cover, each type
4. Nonreinforced, elastomeric sheeting
5. Copper clad stainless steel
6. Polyethylene coated copper
7. Bituminous coated copper
8. Copper covered paper
9. Fascia-cant

D. Certificates: Indicating compliance with specified finishing requirements, from applicator and contractor.

**PART 2 - PRODUCTS**

**2.1 FLASHING AND SHEET METAL MATERIALS**

A. Stainless Steel: ASTM A167, Type 302B, dead soft temper.

B. Copper ASTM B370, cold-rolled temper.

C. Bituminous Coated Copper: Minimum copper ASTM B370, weight not less than 1 kg/m² (3 oz/sf). Bituminous coating shall weigh not less than 2 kg/m² (6 oz/sf); or, copper sheets may be bonded between two layers of coarsely woven bitumen-saturated cotton fabric ASTM D173. Exposed fabric surface shall be crimped.

D. Copper Covered Paper: Fabricated of electro-deposit pure copper sheets ASTM B 370, bonded with special asphalt compound to both sides of creped, reinforced building paper, UU-B-790, Type I, style 5, or to a three ply sheet of asphalt impregnated creped paper. Grooves running along the width of sheet.

E. Polyethylene Coated Copper: Copper sheet ASTM B370, weighing 1 Kg/m² (3 oz/sf) bonded between two layers of (two mil) thick polyethylene sheet.

F. Aluminum Sheet: ASTM B209, alloy 3003-H14.

G. Galvanized Sheet: ASTM, A653.

H. Nonreinforced, Elastomeric Sheeting: Elastomeric substances reduced to thermoplastic state and extruded into continuous homogenous sheet (0.056 inch) thick. Sheeting shall have not less than 7 MPa (1,000 psi) tensile strength and not more than seven percent tension-set at 50 percent elongation when tested in accordance with ASTM D412. Sheeting shall show no cracking or flaking when bent through 180 degrees over a 1 mm (1/32 inch) diameter mandrel and then bent at same point over same

size mandrel in opposite direction through 360 degrees at temperature of -30°C (-20 °F).

**2.2 FLASHING ACCESSORIES**

A. Solder: ASTM B32; flux type and alloy composition as required for use with metals to be soldered.

B. Rosin Paper: Fed-Spec. UU-B-790, Type I, Grade D, Style 1b, Rosin-sized sheathing paper, weighing approximately 3 Kg/10 $m^2$( 6 lbs/100 sf).

C. Bituminous Paint: ASTM D1187, Type I.

D. Fasteners:

1. Use copper, copper alloy, bronze, brass, or stainless steel for copper and copper clad stainless steel, and stainless steel for stainless steel and aluminum alloy. Use galvanized steel or stainless steel for galvanized steel.
2. Nails:
   a. Minimum diameter for copper nails: 3 mm (0.109 inch).
   b. Minimum diameter for aluminum nails 3 mm (0.105 inch).
   c. Minimum diameter for stainless steel nails: 2 mm (0.095 inch) and annular threaded.
   d. Length to provide not less than 22 mm (7/8 inch) penetration into anchorage.
3. Rivets: Not less than 3 mm (1/8 inch) diameter.
4. Expansion Shields: Fed Spec A-A-1925A.

E. Sealant: As specified in Section 07 92 00, JOINT SEALANTS for exterior locations.

F. Insect Screening: ASTM D3656, 18 by 18 regular mesh.

G. Roof Cement: ASTM D4586.

**2.3 SHEET METAL THICKNESS**

A. Except as otherwise shown or specified use thickness or weight of sheet metal as follows:

B. Concealed Locations (Built into Construction):

1. Copper: 30g (10 oz) minimum 0.33 mm (0.013 inch thick).
2. Stainless steel: 0.25 mm (0.010 inch) thick.
3. Copper clad stainless steel: 0.25 mm (0.010 inch) thick.
4. Galvanized steel: 0.5 mm (0.021 inch) thick.

C. Exposed Locations:

1. Copper: 0.4 Kg (16 oz).
2. Stainless steel: 0.4 mm (0.015 inch).
3. Copper clad stainless steel: 0.4 mm (0.015 inch).

D. Thickness of aluminum or galvanized steel is specified with each item.

**2.4 FABRICATION, GENERAL**

A. Jointing:

1. In general, copper, stainless steel and copper clad stainless steel joints, except expansion and contraction joints, shall be locked and soldered.
2. Jointing of copper over 0.5 Kg (20 oz) weight or stainless steel over 0.45 mm (0.018 inch) thick shall be done by lapping, riveting and soldering.
3. Joints shall conform to following requirements:
   a. Flat-lock joints shall finish not less than 19 mm (3/4 inch) wide.
   b. Lap joints subject to stress shall finish not less than 25 mm (one inch) wide and shall be soldered and riveted.
   c. Unsoldered lap joints shall finish not less than 100 mm (4 inches) wide.
4. Flat and lap joints shall be made in direction of flow.
5. Edges of bituminous coated copper, copper covered paper, nonreinforced elastomeric sheeting and polyethylene coated copper shall be jointed by lapping not less than 100 mm (4 inches) in the direction of flow and cementing with asphalt roof cement or sealant as required by the manufacturer's printed instructions.
6. Soldering:
   a. Pre tin both mating surfaces with solder for a width not less than 38 mm (1 1/2 inches) of uncoated copper, stainless steel, and copper clad stainless steel.
   b. Wire brush to produce a bright surface before soldering lead coated copper.
   c. Treat in accordance with metal producers recommendations other sheet metal required to be soldered.
   d. Completely remove acid and flux after soldering is completed.

B. Expansion and Contraction Joints:

1. Fabricate in accordance with the Architectural Sheet Metal Manual recommendations for expansion and contraction of sheet metal work in continuous runs.
2. Space joints as shown or as specified.
3. Space expansion and contraction joints for copper, stainless steel, and copper clad stainless steel at intervals not exceeding 7200 mm (24 feet).
4. Space expansion and contraction joints for aluminum at intervals not exceeding 5400 mm (18 feet), except do not exceed 3000 mm (10 feet) for gravel stops and fascia-cant systems.
5. Fabricate slip-type or loose locked joints and fill with sealant unless otherwise specified.
6. Fabricate joint covers of same thickness material as sheet metal served.

C. Cleats:
1. Fabricate cleats to secure flashings and sheet metal work over 300 mm (12 inches) wide and where specified.
2. Provide cleats for maximum spacing of 300 mm (12 inch) centers unless specified otherwise.
3. Form cleats of same metal and weights or thickness as the sheet metal being installed unless specified otherwise.
4. Fabricate cleats from 50 mm (2 inch) wide strip. Form end with not less than 19 mm (3/4 inch) wide loose lock to item for anchorage. Form other end of length to receive nails free of item to be anchored and end edge to be folded over and cover nail heads.

D. Edge Strips or Continuous Cleats:
1. Fabricate continuous edge strips where shown and specified to secure loose edges of the sheet metal work.
2. Except as otherwise specified, fabricate edge strips or minimum 0.6 mm (0.024 inch) thick stainless steel.
3. Use material compatible with sheet metal to be secured by the edge strip.
4. Fabricate in 3000 mm (10 feet) maximum lengths with not less than 19 mm (3/4 inch) loose lock into metal secured by edge strip.

5. Fabricate Strips for fascia anchorage to extend below the supporting wood construction to form a drip and to allow the flashing to be hooked over the lower edge at least 19 mm (3/4-inch).
6. Fabricate anchor edge maximum width of 75 mm (3 inches) or of sufficient width to provide adequate bearing area to insure a rigid installation using 0.8 mm (0.031 inch) thick stainless steel.

E. Drips:
1. Form drips at lower edge of sheet metal counter-flashings (cap flashings), fascias, gravel stops, wall copings, by folding edge back 13 mm (1/2 inch) and bending out 45 degrees from vertical to carry water away from the wall.
2. Form drip to provide hook to engage cleat or edge strip for fastening for not less than 19 mm (3/4 inch) loose lock where shown.

F. Edges:
1. Edges of flashings concealed in masonry joints opposite drain side shall be turned up 6 mm (1/4 inch) to form dam, unless otherwise specified or shown otherwise.
2. Finish exposed edges of flashing with a 6 mm (1/4 inch) hem formed by folding edge of flashing back on itself when not hooked to edge strip or cleat. Use 6 mm (1/4 inch) minimum penetration beyond wall face with drip for through-wall flashing exposed edge.
3. All metal roof edges shall meet requirements of IBC, current edition.

G. Metal Options:
1. Where options are permitted for different metals use only one metal throughout.
2. Stainless steel may be used in concealed locations for fasteners of other metals exposed to view.
3. Where copper gravel stops, copings and flashings will carry water onto cast stone, stone, or architectural concrete, or stainless steel.

**2.5 FINISHES**

A. Use same finish on adjacent metal or components and exposed metal surfaces unless specified or shown otherwise.
B. In accordance with NAAMM Metal Finishes Manual AMP 500, unless otherwise specified.

C. Finish exposed metal surfaces as follows, unless specified otherwise:
   1. Copper: Mill finish.
   2. Stainless Steel: Finish No. 2B or 2D.
   3. Aluminum:
      a. Clear Finish: AA-C22A41 medium matte, clear anodic coating, Class 1 Architectural, 18 mm (0.7 mils) thick.
      b. Colored Finish: AA-C22A42 (anodized) or AA-C22A44 (electrolytically deposited metallic compound) medium matte, integrally colored coating, Class 1 Architectural, 18 mm (0.7 mils) thick. Dyes will not be accepted.
      c. Fluorocarbon Finish: AAMA 620, high performance organic coating.
      d. Mill finish.
   4. Steel and Galvanized Steel:
      a. Finish painted under Section 09 91 00, PAINTING unless specified as prefinished item.
      b. Manufacturer's finish:
         1) Baked on prime coat over a phosphate coating.
         2) Baked-on prime and finish coat over a phosphate coating.
         3) Fluorocarbon Finish: AAMA 621, high performance organic coating.

**2.6 THROUGH-WALL FLASHINGS**

A. Form through-wall flashing to provide a mechanical bond or key against lateral movement in all directions. Install a sheet having 2 mm (1/16 inch) deep transverse channels spaced four to every 25 mm (one inch), or ribbed diagonal pattern, or having other deformation unless specified otherwise.
   1. Fabricate in not less than 2400 mm (8 feet) lengths; 3000 mm (10 feet) maximum lengths.
   2. Fabricate so keying nests at overlaps.
B. For Masonry Work When Concealed Except for Drip:
   1. Either copper, stainless steel, or copper clad stainless steel.
   2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
   3. Form exposed portions of flashing with drip, approximately 6 mm (1/4 inch) projection beyond wall face.
C. For Masonry Work When Exposed Edge Forms a Receiver for Counter Flashing:

1. Use same metal and thickness as counter flashing.
2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
3. Form exposed portion as snap lock receiver for counter flashing upper edge.

D. For Flashing at Architectural Precast Concrete Panels or Stone Panels.
1. Use plan flat sheet of stainless steel.
2. Form exposed portions with drip as specified or receiver.

E. Window Sill Flashing and Lintel Flashing:
1. Use either copper, stainless steel, copper clad stainless steel plane flat sheet, or nonreinforced elastomeric sheeting, bituminous coated copper, copper covered paper, or polyethylene coated copper.
2. Fabricate flashing at ends with folded corners to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening.
3. Turn up back edge as shown.
4. Form exposed portion with drip as specified or receiver.

F. Door Sill Flashing:
1. Where concealed, use either 0.5 Kg (20 oz) copper, 0.5 mm (0.018 inch) thick stainless steel, or 0.5 mm (0.018 inch) thick copper clad stainless steel.
2. Where shown on drawings as combined counter flashing under threshold, sill plate, door sill, or where subject to foot traffic, use either 0.6 Kg (24 ounce) copper, 0.6 mm (0.024 inch) stainless steel, or 0.6 mm (0.024 inch) thick stainless steel.
3. Fabricate flashing at ends to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening with folded corners.

**2.7 BASE FLASHING**

A. Use metal base flashing at vertical surfaces intersecting built-up roofing without cant strips or where shown.
1. Use either copper, or stainless steel, thickness specified unless specified otherwise.
2. When flashing is over 250 mm (10 inches) in vertical height or horizontal width use either 0.5 Kg (20 oz) copper or 0.5 mm (0.018 inch) stainless steel.
3. Use stainless steel at aluminum roof curbs where flashing contacts the aluminum.
4. Use either copper, or stainless steel at pipe flashings.

B. Fabricate metal base flashing up vertical surfaces not less than 200 mm (8 inch) nor more than 400 mm (16 inch).
C. Fabricate roof flange not less than 100 mm (4 inches) wide unless shown otherwise. When base flashing length exceeds 2400 mm (8 feet) form flange edge with 13 mm (1/2 inch) hem to receive cleats.
D. Form base flashing bent from strip except pipe flashing. Fabricate ends for riveted soldered lap seam joints. Fabricate expansion joint ends as specified.
E. Pipe Flashing: (Other than engine exhaust or flue stack)
   1. Fabricate roof flange not less than 100 mm (4 inches) beyond sleeve on all sides.
   2. Extend sleeve up and around pipe and flange out at bottom not less than 13 mm (1/2 inch) and solder to flange and sleeve seam to make watertight.
   3. At low pipes 200 mm (8 inch) to 450 mm (18 inch) above roof:
      a. Form top of sleeve to turn down into the pipe at least 25 mm (one inch).
      b. Allow for loose fit around and into the pipe.
   4. At high pipes and pipes with goosenecks or other obstructions which would prevent turning the flashing down into the pipe:
      a. Extend sleeve up not less than 300 mm (12 inch) above roofing.
      b. Allow for loose fit around pipe.

**2.8 COUNTERFLASHING (CAP FLASHING OR HOODS)**

A. Either copper or stainless steel, unless specified otherwise.
B. Fabricate to lap base flashing a minimum of 100 mm (4 inches) with drip:
   1. Form lock seams for outside corners. Allow for lap joints at ends and inside corners.
   2. In general, form flashing in lengths not less than 2400 mm (8 feet) and not more than 3000 mm (10 feet).
   3. Two-piece, lock in type flashing may be used in-lieu-of one piece counter-flashing.
   4. Manufactured assemblies may be used.
   5. Where counterflashing is installed at new work use an integral flange at the top designed to be extended into the masonry joint or reglet in concrete.

6. Where counterflashing is installed at existing work use surface applied type, formed to provide a space for the application of sealant at the top edge.

C. One-piece Counterflashing:
1. Back edge turned up and fabricate to lock into reglet in concrete.
2. Upper edge formed to extend full depth of masonry unit in mortar joint with back edge turned up 6 mm (1/4 inch).

D. Two-Piece Counterflashing:
1. Receiver to extend into masonry wall depth of masonry unit with back edge turned up 6 mm (1/4 inch) and exposed edge designed to receive and lock counterflashing upper edge when inserted.
2. Counterflashing upper edge designed to snap lock into receiver.

E. Surface Mounted Counterflashing; one or two piece:
1. Use at existing or new surfaces where flashing can not be inserted in vertical surface.
2. One piece fabricate upper edge folded double for 65 mm (2 1/2 inches) with top 19 mm (3/4 inch) bent out to form "V" joint sealant pocket with vertical surface. Perforate flat double area against vertical surface with horizontally slotted fastener holes at 400 mm (16 inch) centers between end holes. Option: One piece surface mounted counter-flashing (cap flashing) may be used. Fabricate as detailed on Plate 51 of SMACNA Architectural Sheet Metal Manual.
3. Two pieces: Fabricate upper edge to lock into surface mounted receiver. Fabricate receiver joint sealant pocket on upper edge and lower edge to receive counterflashing, with slotted fastener holes at 400 mm (16 inch) centers between upper and lower edge.

F. Pipe Counterflashing:
1. Form flashing for water-tight umbrella with upper portion against pipe to receive a draw band and upper edge to form a "V" joint sealant receiver approximately 19 mm (3/4 inch) deep.
2. Fabricate 100 mm (4 inch) over lap at end.
3. Fabricate draw band of same metal as counter flashing. Use 0.6 Kg (24 oz) copper or 0.33 mm (0.013 inch) thick stainless steel or copper coated stainless steel.
4. Use stainless steel bolt on draw band tightening assembly.

5. Vent pipe counter flashing may be fabricated to omit draw band and turn down 25 mm (one inch) inside vent pipe.

G. Where vented edge decks intersect vertical surfaces, form in one piece, shape to slope down to a point level with and in front of edge-set notched plank; then, down vertically, overlapping base flashing.

**2.9 GRAVEL STOPS (NOT USED)**

**2.10 BITUMEN STOPS (NOT USED(**

**2.11 HANGING GUTTERS (NOT USED)**

**2.12 CONDUCTORS (DOWNSPOUTS)(NOT USED)**

**2.13 SPLASHPANS (NOT USED)**

**2.14 REGLETS**

A. Fabricate reglets of one of the following materials:
   1. 0.4 Kg (16 ounce) copper.
   2. Stainless steel, not less than 0.3 mm (0.012 inch) thick.
   3. Plastic coated extruded aluminum, not less than 1.4 mm (0.055 inch) thick prefilled with butyl rubber sealer and complete with plastic wedges inserted at 1000 mm (40 inches) on centers.
   4. Plastic, ASTM D1784, Type II, not less than 2 mm (0.075 inch) thick.

B. Fill open-type reglets with fiberboard or other suitable separator, to prevent crushing of the slot during installation.

C. Bend edges of reglets for setting into concrete to an angle of not less than 45 degrees, and make wide enough to provide firm anchorage in the concrete.

D. Fabricate reglets for building into horizontal masonry mortar joints not less than 19 mm (3/4 inch) deep, nor more than 25 mm (one inch) deep.

E. Fabricate mitered corners, fittings, and special shapes as may be required by details.

F. Reglets for concrete may be formed to receive flashing and have a 10 mm (3/8 inch), 45 degree snap lock.

**2.15 INSULATED EXPANSION JOINT COVERS (NOT USED)**

**2.16 ENGINE EXHAUST PIPE OR FLUE OR STACK FLASHING**

A. Flashing at penetrations through roofing shall consist of a metal collar, sheet metal flashing sleeve and hood.

B. Fabricate collar with roof flange of 1.2 mm (0.047 inch) minimum thick black iron or galvanized steel sheet.
   1. Fabricate inside diameter of collar 100 mm (4 inches) larger than the outside diameter of the item penetration the roofing.
   2. Extend collar height from structural roof deck to not less than 350 mm (14 inches) above roof surface.
   3. Fabricate collar roof flange not less than 100 mm (4 inches) wide.
   4. Option: Collar may be of steel tubing 3 mm (0.125 inch) minimum wall thickness, with not less than four, 50 mm x 100 mm x 3 mm (2 inch by 4 inch by 0.125 inch) thick tabs bottom edge evenly spaced around tube in lieu of continuous roof flange. Full butt weld joints of collar.

C. Fabricate sleeve base flashing with roof flange of either copper, stainless steel, or copper clad stainless steel.
   1. Fabricate sleeve roof flange not less than 100 mm (4 inches) wide.
   2. Extend sleeve around collar up to top of collar.
   3. Flange bottom of sleeve out not less than 13 mm (1/24 inch) and soldered to 100 mm (4 inch) wide flange to make watertight.
   4. Fabricate interior diameter 50 mm (2 inch) greater than collar.

D. Fabricate hood counter flashing from same material and thickness as sleeve.
   1. Fabricate the same as pipe counter flashing except allow not less than 100 mm (4 inch) lap below top of sleeve and to form vent space minimum of 100 mm (4 inch) wide.
   2. Hem bottom edge of hood 13 mm (1/2 inch).
   3. Provide a 50 mm (2 inch) deep drawband.

E. Fabricate insect screen closure between sleeve and hood. Secure screen to sleeve with sheet metal screws.

**2.17 SCUPPERS (NOT USED)**

**2.18 GOOSENECK ROOF VENTILATORS (NOT USED)**

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. General:

1. Install flashing and sheet metal items as shown in Sheet Metal and Air Conditioning Contractors National Association, Inc., publication, ARCHITECTURAL SHEET METAL MANUAL, except as otherwise shown or specified.
2. Apply Sealant as specified in Section 07 92 00, JOINT SEALANTS.
3. Apply sheet metal and other flashing material to surfaces which are smooth, sound, clean, dry and free from defects that might affect the application.
4. Remove projections which would puncture the materials and fill holes and depressions with material compatible with the substrate. Cover holes or cracks in wood wider than 6 mm (1/4 inch) with sheet metal compatible with the roofing and flashing material used.
5. Coordinate with masonry work for the application of a skim coat of mortar to surfaces of unit masonry to receive flashing material before the application of flashing.
6. Apply a layer of 7 Kg (15 pound) saturated felt followed by a layer of rosin paper to wood surfaces to be covered with copper. Lap each ply 50 mm (2 inch) with the slope and nail with large headed copper nails.
7. Confine direct nailing of sheet metal to strips 300 mm (12 inch) or less wide. Nail flashing along one edge only. Space nail not over 100 mm (4 inches) on center unless specified otherwise.
8. Install bolts, rivets, and screws where indicated, specified, or required in accordance with the SMACNA Sheet Metal Manual. Space rivets at 75 mm (3 inch) on centers in two rows in a staggered position. Use neoprene washers under fastener heads when fastener head is exposed.

9. Coordinate with roofing work for the installation of metal base flashings and other metal items having roof flanges for anchorage and watertight installation.
10. Nail continuous cleats on 75 mm (3 inch) on centers in two rows in a staggered position.
11. Nail individual cleats with two nails and bend end tab over nail heads. Lock other end of cleat into hemmed edge.
12. Install flashings in conjunction with other trades so that flashings are inserted in other materials and joined together to provide a water tight installation.
13. Where required to prevent galvanic action between dissimilar metal isolate the contact areas of dissimilar metal with sheet lead, waterproof building paper, or a coat of bituminous paint.
14. Isolate aluminum in contact with dissimilar metals others than stainless steel, white bronze or other metal compatible with aluminum by:
    a. Paint dissimilar metal with a prime coat of zinc-chromate or other suitable primer, followed by two coats of aluminum paint.
    b. Paint dissimilar metal with a coat of bituminous paint.
    c. Apply an approved caulking material between aluminum and dissimilar metal.
15. Paint aluminum in contact with or built into mortar, concrete, plaster, or other masonry materials with a coat of bituminous paint.
16. Paint aluminum in contact with absorptive materials that may become repeatedly wet with two coats of bituminous paint or two coats of aluminum paint.
17. Bitumen Stops:
    a. Install bitumen stops for built-up roof opening penetrations through deck and at formed sheet metal gravel stops.
    b. Nail leg of bitumen stop at 300 mm (12 inch) intervals to nailing strip at roof edge before roofing material is installed.

**3.2 THROUGH-WALL FLASHING**

A. General:

1. Install continuous through-wall flashing between top of concrete foundation walls and bottom of masonry building walls; at top of

concrete floors; under masonry, concrete, or stone copings and elsewhere as shown.

2. Where exposed portions are used as a counterflashings, lap base flashings at least 100 mm (4 inches)and use thickness of metal as specified for exposed locations.
3. Exposed edge of flashing may be formed as a receiver for two piece counter flashing as specified.
4. Terminate exterior edge beyond face of wall approximately 6 mm (1/4 inch) with drip edge where not part of counter flashing.
5. Turn back edge up 6 mm (1/4 inch) unless noted otherwise where flashing terminates in mortar joint or hollow masonry unit joint.
6. Terminate interior raised edge in masonry backup unit approximately 38 mm (1 1/2 inch) into unit unless shown otherwise.
7. Under copings terminate both edges beyond face of wall approximately 6 mm (1/4 inch) with drip edge.
8. Lap end joints at least two corrugations, but not less than 100 mm (4 inches). Seal laps with sealant.
9. Where dowels, reinforcing bars and fastening devices penetrate flashing, seal penetration with sealing compound. Sealing compound is specified in Section 07 92 00, JOINT SEALANTS.
10. Coordinate with other work to set in a bed of mortar above and below flashing so that total thickness of the two layers of mortar and flashing are same as regular mortar joint.
11. Where ends of flashing terminate turn ends up 25 mm (1 inch) and fold corners to form dam extending to wall face in vertical mortar or veneer joint.
12. Turn flashing up not less than 200 mm (8 inch) between masonry or behind exterior veneer.
13. When flashing terminates in reglet extend flashing full depth into reglet and secure with lead or plastic wedges spaced 150 mm (6 inch) on center.
14. Continue flashing around columns:
    a. Where flashing cannot be inserted in column reglet hold flashing vertical leg against column.
    b. Counterflash top edge with 75 mm (3 inch) wide strip of saturated cotton unless shown otherwise. Secure cotton strip with roof

cement to column. Lap base flashing with cotton strip 38 mm (1 1/2 inch).

B. Flashing at Top of Concrete Foundation Walls Where concrete is exposed. Turn up not less than 200 mm (8 inch) high and into masonry backup mortar joint or reglet in concrete backup as specified.

C. Flashing at Top of Concrete Floors (except where shelf angles occur): Place flashing in horizontal masonry joint not less than 200 mm (8 inch) below floor slab and extend into backup masonry joint at floor slab 38 mm (1 1/2 inch).

D. Flashing at Cavity Wall Construction: Where flashing occurs in cavity walls turn vertical portion up against backup under waterproofing, if any, into mortar joint. Turn up over insulation, if any, and horizontally through insulation into mortar joint.

E. Flashing at Veneer Walls:
   1. Install near line of finish floors over shelf angles or where shown.
   2. Turn up against sheathing.
   3. At stud framing, hem top edge 19 mm (3/4 inch) and secure to each stud with stainless steel fasteners through sheathing.
   4. At concrete backing, extend flashing into reglet as specified.
   5. Coordinate with installation of waterproofing or asphalt felt for lap over top of flashing.

F. Lintel Flashing when not part of shelf angle flashing:
   1. Install flashing full length of lintel to nearest vertical joint in masonry over veneer.
   2. Turn ends up 25 mm (one inch) and fold corners to form dam and extend end to face of wall.
   3. Turn back edge up to top of lintel; terminate back edge as specified for back-up wall.

G. Window Sill Flashing:
   1. Install flashing to extend not less than 100 mm (4 inch) beyond ends of sill into vertical joint of masonry or veneer.
   2. Turn back edge up to terminate under window frame.
   3. Turn ends up 25 mm (one inch) and fold corners to form dam and extend to face of wall.

H. Door Sill Flashing:

1. Install flashing under bottom of plate sills of doors over curbs opening onto roofs. Extend flashing out to form counter flashing or receiver for counter flashing over base flashing. Set in sealant.
2. Extend sill flashing 200 mm (8 inch) beyond jamb opening. Turn ends up one inch in vertical masonry joint, extend end to face of wall. Join to counter flashing for water tight joint.
3. Where doors thresholds cover over waterproof membranes install sill flashing over water proof membrane under thresholds. Extend beyond opening to cover exposed portion of waterproof membrane and not less than 150 mm (6 inch) beyond door jamb opening at ends. Turn up approximately 6 mm (1/4 inch) under threshold.

I. Flashing at Masonry, Stone, or Precast Concrete Copings:
1. Install flashing with drips on both wall faces unless shown otherwise.
2. Form penetration openings to fit tight against dowel or other item with edge turned up. Seal penetrations with sealant.

**3.3 BASE FLASHING**

A. Install where roof membrane type base flashing is not used and where shown.
1. Install flashing at intersections of roofs with vertical surfaces or at penetrations through roofs, to provide watertight construction.
2. Install metal flashings and accessories having flanges extending out on top of the built-up roofing before final bituminous coat and roof aggregate is applied.
3. Set flanges in heavy trowel coat of roof cement and nail through flanges into wood nailers over bituminous roofing.
4. Secure flange by nailing through roofing into wood blocking with nails spaced 75 mm (3 inch) on centers or, when flange over 100 mm (4 inch) wide terminate in a 13 mm (1/2 inch) folded edge anchored with cleats spaced 200 mm (8 inch) on center. Secure one end of cleat over nail heads. Lock other end into the seam.

B. For long runs of base flashings install in lengths of not less than 2400 mm (8 feet) nor more than 3000 mm (ten feet). Install a 75 mm (3 inch) wide slip type, loose lock expansion joint filled with sealant in joints of base flashing sections over 2400 mm (8 feet) in length. Lock and solder corner joints at corners.

C. Extend base flashing up under counter flashing of roof specialties and accessories or equipment not less than 75 mm (3 inch).

**3.4 COUNTERFLASHING (CAP FLASHING OR HOODS)**

A. General:
1. Install counterflashing over and in conjunction with installation of base flashings, except as otherwise specified or shown.
2. Install counterflashing to lap base flashings not less than 100 mm (4 inch).
3. Install upper edge or top of counterflashing not less than 225 mm (9 inch) above top of the roofing.
4. Lap joints not less than 100 mm (4 inch). Stagger joints with relation to metal base flashing joints.
5. Use surface applied counterflashing on existing surfaces and new work where not possible to integrate into item.
6. When fastening to concrete or masonry, use screws driven in expansion shields set in concrete or masonry. Use screws to wood and sheet metal. Set fasteners in mortar joints of masonry work.

B. One Piece Counterflashing:
1. Where flashing is installed at new masonry, coordinate to insure proper height, embed in mortar, and end lap.
2. Where flashing is installed in reglet in concrete insert upper edge into reglet. Hold flashing in place with lead wedges spaced not more than 200 mm (8 inch) apart. Fill joint with sealant.
3. Where flashing is surface mounted on flat surfaces.
   a. When top edge is double folded anchor flat portion below sealant "V" joint with fasteners spaced not over 400 mm (16 inch) on center:
      1) Locate fasteners in masonry mortar joints.
      2) Use screws to sheet metal or wood.
   b. Fill joint at top with sealant.
4. Where flashing or hood is mounted on pipe.
   a. Secure with draw band tight against pipe.
   b. Set hood and secure to pipe with a one by 25 mm x 3 mm (1 x 1/8 inch) bolt on stainless steel draw band type clamp, or a stainless worm gear type clamp.
   c. Completely fill joint at top with sealant.

C. Two-Piece Counterflashing:
   1. Where receiver is installed at new masonry coordinate to insure proper height, embed in mortar, and lap.
   2. Surface applied type receiver:
      a. Secure to face construction in accordance, with manufacturers instructions.
      b. Completely fill space at the top edge of receiver with sealant.
   3. Insert counter flashing in receiver in accordance with fabricator or manufacturer's instructions and to fit tight against base flashing.
D. Where vented edge occur install so lower edge of counterflashing is against base flashing.
E. When counter flashing is a component of other flashing install as shown.

**3.5 REGLETS**

A. Install reglets in a manner to provide a watertight installation.
B. Locate reglets not less than 225 mm (9 inch) nor more than 400 mm (16 inch) above roofing, and not less than 125 mm (5 inch) nor more than 325 mm (13 inch) above cant strip.
C. Butt and align end joints or each section of reglet and securely hold in position until concrete or mortar are hardened:
   1. Coordinate reglets for anchorage into concrete with formwork construction.
   2. Coordinate reglets for masonry to locate horizontally into mortar joints.

**3.6 GRAVEL STOPS (NOT USED)**

**3.7 COPINGS (NOT USED)**

**3.8 EXPANSION JOINT COVERS, INSULATED (NOT USED)**

**3.9 ENGINE EXHAUST PIPE OR STACK FLASHING**

A. Set collar where shown and secure roof tabs or flange of collar to structural deck with 13 mm (1/2 inch) diameter bolts.
B. Set flange of sleeve base flashing not less than 100 mm (4 inch) beyond collar on all sides as specified for base flashing.

C. Install hood to above the top of the sleeve 50 mm (2 inch) and to extend from sleeve same distance as space between collar and sleeve beyond edge not sleeve:
   1. Install insect screen to fit between bottom edge of hood and side of sleeve.
   2. Set collar of hood in high temperature sealant and secure with one by 3 mm (1/8 inch) bolt on stainless steel draw band type, or stainless steel worm gear type clamp. Install sealant at top of head.

**3.10 HANGING GUTTERS (NOT USED)**

**3.11 CONDUCTORS (DOWNSPOUTS) (NOT USED)**

**3.12 SPLASH PANS (NOT USED)**

**3.13 GOOSENECK ROOF VENTILATORS (NOT USED)**

- - - E N D - - -

# SECTION 07 84 00
# FIRESTOPPING

## PART 1 GENERAL

### 1.1 DESCRIPTION

A. Closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction.

B. Closure of openings in walls against penetration of gases or smoke in smoke partitions.

### 1.2 RELATED WORK

B. Spray applied fireproofing: Section 07 81 00, APPLIED FIREPROOFING

C. Sealants and application: Section 07 92 00, JOINT SEALANTS.

D. Fire and smoke damper assemblies in ductwork: Section 23 31 00, HVAC DUCTS AND CASINGS Section 23 37 00, AIR OUTLETS AND INLETS.

### 1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturers literature, data, and installation instructions for types of firestopping and smoke stopping used.

C. List of FM, UL, or WH classification number of systems installed.

D. Certified laboratory test reports for ASTM E814 tests for systems not listed by FM, UL, or WH proposed for use.

### 1.4 DELIVERY AND STORAGE

A. Deliver materials in their original unopened containers with manufacturer’s name and product identification.

B. Store in a location providing protection from damage and exposure to the elements.

### 1.5 WARRANTY

Firestopping work subject to the terms of the Article “Warranty of Construction”, FAR clause 52.246-21, except extend the warranty period to five years.

### 1.6 QUALITY ASSURANCE

FM, UL, or WH or other approved laboratory tested products will be acceptable.

**1.7 APPLICABLE PUBLICATIONS**

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):
E84-10.....Surface Burning Characteristics of Building Materials
E814-11.....Fire Tests of Through-Penetration Fire Stops

C. Factory Mutual Engineering and Research Corporation (FM):
Annual Issue Approval Guide Building Materials

D. Underwriters Laboratories, Inc. (UL):
Annual Issue Building Materials Directory
Annual Issue Fire Resistance Directory
1479-10.....Fire Tests of Through-Penetration Firestops

E. Warnock Hersey (WH):
Annual Issue Certification Listings

**PART 2 - PRODUCTS**

**2.1 FIRESTOP SYSTEMS**

A. Use either factory built (Firestop Devices) or field erected (through-Penetration Firestop Systems) to form a specific building system maintaining required integrity of the fire barrier and stop the passage of gases or smoke.

B. Through-penetration firestop systems and firestop devices tested in accordance with ASTM E814 or UL 1479 using the "F" or "T" rating to maintain the same rating and integrity as the fire barrier being sealed. "T" ratings are not required for penetrations smaller than or equal to 100 mm (4 in) nominal pipe or 0.01 $m^2$ (16 sq. in.) in overall cross sectional area.

C. Products requiring heat activation to seal an opening by its intumescence shall exhibit a demonstrated ability to function as designed to maintain the fire barrier.

D. Firestop sealants used for firestopping or smoke sealing shall have following properties:
1. Contain no flammable or toxic solvents.
2. Have no dangerous or flammable out gassing during the drying or curing of products.

3. Water-resistant after drying or curing and unaffected by high humidity, condensation or transient water exposure.
4. When used in exposed areas, shall be capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

E. Firestopping system or devices used for penetrations by glass pipe, plastic pipe or conduits, unenclosed cables, or other non-metallic materials shall have following properties:
1. Classified for use with the particular type of penetrating material used.
2. Penetrations containing loose electrical cables, computer data cables, and communications cables protected using firestopping systems that allow unrestricted cable changes without damage to the seal.
3. Intumescent products which would expand to seal the opening and act as fire, smoke, toxic fumes, and, water sealant.

F. Maximum flame spread of 25 and smoke development of 50 when tested in accordance with ASTM E84.

G. FM, UL, or WH rated or tested by an approved laboratory in accordance with ASTM E814.

H. Materials to be asbestos free.

**2.2 SMOKE STOPPING IN SMOKE PARTITIONS**

A. Use silicone sealant in smoke partitions as specified in Section 07 92 00, JOINT SEALANTS.

B. Use mineral fiber filler and bond breaker behind sealant.

C. Sealants shall have a maximum flame spread of 25 and smoke developed of 50 when tested in accordance with E84.

D. When used in exposed areas capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

**PART 3 - EXECUTION**

**3.1 EXAMINATION**

Submit product data and installation instructions, as required by article, submittals, after an on site examination of areas to receive firestopping.

**3.2 PREPARATION**

A. Remove dirt, grease, oil, loose materials, or other substances that prevent adherence and bonding or application of the firestopping or smoke stopping materials.

B. Remove insulation on insulated pipe for a distance of 150 mm (six inches) on either side of the fire rated assembly prior to applying the firestopping materials unless the firestopping materials are tested and approved for use on insulated pipes.

**3.3 INSTALLATION**

A. Do not begin work until the specified material data and installation instructions of the proposed firestopping systems have been submitted and approved.

B. Install firestopping systems with smoke stopping in accordance with FM, UL, WH, or other approved system details and installation instructions.

C. Install smoke stopping seals in smoke partitions.

**3.4 CLEAN-UP AND ACCEPTANCE OF WORK**

A. As work on each floor is completed, remove materials, litter, and debris.

B. Do not move materials and equipment to the next-scheduled work area until completed work is inspected and accepted by the Resident Engineer.

C. Clean up spills of liquid type materials.

- - - E N D - - -

# SECTION 07 92 00
# JOINT SEALANTS

## PART 1 - GENERAL

### 1.1 DESCRIPTION:

Section covers all sealant and caulking materials and their application, wherever required for complete installation of building materials or systems.

### 1.2 RELATED WORK:

A. Sealing of site work concrete paving: Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS.

B. Masonry control and expansion joint: Section 04 20 00, UNIT MASONRY.

C. Firestopping penetrations: Section 07 84 00, FIRESTOPPING.

D. Glazing: Section 08 80 00, GLAZING.

E. Mechanical Work: Section 21 05 11, COMMON WORK RESULTS FOR FIRE SUPPRESSION Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING Section 23 05 11.

### 1.3 QUALITY CONTROL:

A. Installer Qualifications: An experienced installer who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance.

B. Source Limitations: Obtain each type of joint sealant through one source from a single manufacturer.

C. Product Testing: Obtain test results from a qualified testing agency based on testing current sealant formulations within a 12-month period.

1. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021.
2. Test elastomeric joint sealants for compliance with requirements specified by reference to ASTM C920, and where applicable, to other standard test methods.
3. Test elastomeric joint sealants according to SWRI’s Sealant Validation Program for compliance with requirements specified by reference to ASTM C920 for adhesion and cohesion under cyclic movement, adhesion-in peel, and indentation hardness.

4. Test other joint sealants for compliance with requirements indicated by referencing standard specifications and test methods.

D. Preconstruction Field-Adhesion Testing: Before installing elastomeric sealants, field test their adhesion to joint substrates in accordance with sealant manufacturer’s recommendations:
1. Locate test joints where indicated or, if not indicated, as directed by Contracting Officer.
2. Conduct field tests for each application indicated below:
   a. Each type of elastomeric sealant and joint substrate indicated.
   b. Each type of non-elastomeric sealant and joint substrate indicated.
3. Notify Resident Engineer seven days in advance of dates and times when test joints will be erected.

E. VOC: Acrylic latex and Silicon sealants shall have less than 50g/l VOC content.

F. Mockups: Before installing joint sealants, apply elastomeric sealants as follows to verify selections made under sample Submittals and to demonstrate aesthetic effects and qualities of materials and execution:
1. Joints in mockups of assemblies specified in other Sections that are indicated to receive elastomeric joint sealants, which are specified by reference to this section.

**1.4 SUBMITTALS:**

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's installation instructions for each product used.

C. Cured samples of exposed sealants for each color where required to match adjacent material.

D. Manufacturer's Literature and Data:
1. Caulking compound
2. Primers
3. Sealing compound, each type, including compatibility when different sealants are in contact with each other.

**1.5 PROJECT CONDITIONS:**

A. Environmental Limitations:
1. Do not proceed with installation of joint sealants under following conditions:

a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 °C (40 °F).

b. When joint substrates are wet.

B. Joint-Width Conditions:

1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.

C. Joint-Substrate Conditions:

1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

**1.6 DELIVERY, HANDLING, AND STORAGE:**

A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.

B. Carefully handle and store to prevent inclusion of foreign materials.

C. Do not subject to sustained temperatures exceeding 32° C (90° F) or less than 5° C (40° F).

**1.7 DEFINITIONS:**

A. Definitions of terms in accordance with ASTM C717 and as specified.

B. Back-up Rod: A type of sealant backing.

C. Bond Breakers: A type of sealant backing.

D. Filler: A sealant backing used behind a back-up rod.

**1.8 WARRANTY:**

A. Warranty exterior sealing against leaks, adhesion, and cohesive failure, and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be extended to two years.

B. General Warranty: Special warranty specified in this Article shall not deprive Government of other rights Government may have under other provisions of Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contractor under requirements of Contract Documents.

**1.9 APPLICABLE PUBLICATIONS:**

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American Society for Testing and Materials (ASTM):

C509-06.....Elastomeric Cellular Preformed Gasket and Sealing Material.

C612-10.....Mineral Fiber Block and Board Thermal Insulation.

C717-10.....Standard Terminology of Building Seals and Sealants.

C834-10.....Latex Sealants.

C919-08.....Use of Sealants in Acoustical Applications.

C920-10.....Elastomeric Joint Sealants.

C1021-08.....Laboratories Engaged in Testing of Building Sealants.

C1193-09.....Standard Guide for Use of Joint Sealants.

C1330-02 (R2007).....Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants.

D1056-07.....Specification for Flexible Cellular Materials—Sponge or Expanded Rubber.

E84-09.....Surface Burning Characteristics of Building Materials.

C. Sealant, Waterproofing and Restoration Institute (SWRI).
The Professionals’ Guide

**PART 2 - PRODUCTS**

**2.1 SEALANTS:**

A. S-1:

1. ASTM C920, polyurethane or polysulfide.
2. Type M.
3. Class 25.

4. Grade NS.
5. Shore A hardness of 20-40

B. S-2:
1. ASTM C920, polyurethane or polysulfide.
2. Type M.
3. Class 25.
4. Grade P.
5. Shore A hardness of 25-40.

C. S-3:
1. ASTM C920, polyurethane or polysulfide.
2. Type S.
3. Class 25, joint movement range of plus or minus 50 percent.
4. Grade NS.
5. Shore A hardness of 15-25.
6. Minimum elongation of 700 percent.

D. S-4:
1. ASTM C920 polyurethane or polysulfide.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-40.

E. S-5:
1. ASTM C920, polyurethane or polysulfide.
2. Type S.
3. Class 25.
4. Grade P.
5. Shore hardness of 15-45.

F. S-6:
1. ASTM C920, silicone, neutral cure.
2. Type S.
3. Class: Joint movement range of plus 100 percent to minus 50 percent.
4. Grade NS.
5. Shore A hardness of 15-20.
6. Minimum elongation of 1200 percent.

G. S-7:
1. ASTM C920, silicone, neutral cure.

2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Structural glazing application.

H. S-8:
1. ASTM C920, silicone, acetoxy cure.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Structural glazing application.

I. S-9:
1. ASTM C920 silicone.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-30.
6. Non-yellowing, mildew resistant.

J. S-10:
1. ASTMC C920, coal tar extended fuel resistance polyurethane.
2. Type M/S.
3. Class 25.
4. Grade P/NS.
5. Shore A hardness of 15-20.

K. S-11:
1. ASTM C920 polyurethane.
2. Type M/S.
3. Class 25.
4. Grade P/NS.
5. Shore A hardness of 35 to 50.

L. S-12:
1. ASTM C920, polyurethane.
2. Type M/S.
3. Class 25, joint movement range of plus or minus 50 percent.
4. Grade P/NS.

5. Shore A hardness of 25 to 50.

**2.2 CAULKING COMPOUND:**

A. C-1: ASTM C834, acrylic latex.

B. C-2: One component acoustical caulking, non drying, non hardening, synthetic rubber.

**2.3 COLOR:**

A. Sealants used with exposed masonry shall match color of mortar joints.

B. Sealants used with unpainted concrete shall match color of adjacent concrete.

C. Color of sealants for other locations shall be light gray or aluminum, unless specified otherwise.

D. Caulking shall be light gray or white, unless specified otherwise.

**2.4 JOINT SEALANT BACKING:**

A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.

B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:

1. Type C: Closed-cell material with a surface skin.

C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056, nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32° C (minus 26° F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.

D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

**2.5 FILLER:**

A. Mineral fiber board: ASTM C612, Class 1.

B. Thickness same as joint width.

C. Depth to fill void completely behind back-up rod.

**2.6 PRIMER:**

A. As recommended by manufacturer of caulking or sealant material.

B. Stain free type.

**2.7 CLEANERS-NON POUROUS SURFACES:**

Chemical cleaners acceptable to manufacturer of sealants and sealant backing material, free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

**PART 3 - EXECUTION**

**3.1 INSPECTION:**

A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.

B. Coordinate for repair and resolution of unsound substrate materials.

C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

**3.2 PREPARATIONS:**

A. Prepare joints in accordance with manufacturer's instructions and SWRI.

B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer paint, or other foreign matter that would tend to destroy or impair adhesion.

1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include the following:
   a. Concrete.
   b. Masonry.
   c. Unglazed surfaces of ceramic tile.
3. Remove laitance and form-release agents from concrete.
4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.
   a. Metal.

b. Glass.

c. Porcelain enamel.

d. Glazed surfaces of ceramic tile.

C. Do not cut or damage joint edges.

D. Apply masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.

1. Do not leave gaps between ends of sealant backings.
2. Do not stretch, twist, puncture, or tear sealant backings.
3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.

E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions.

1. Apply primer prior to installation of back-up rod or bond breaker tape.
2. Use brush or other approved means that will reach all parts of joints.

F. Take all necessary steps to prevent three sided adhesion of sealants.

**3.3 BACKING INSTALLATION:**

A. Install back-up material, to form joints enclosed on three sides as required for specified depth of sealant.

B. Where deep joints occur, install filler to fill space behind the back-up rod and position the rod at proper depth.

C. Cut fillers installed by others to proper depth for installation of back-up rod and sealants.

D. Install back-up rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.

E. Where space for back-up rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.

F. Take all necessary steps to prevent three sided adhesion of sealants.

**3.4 SEALANT DEPTHS AND GEOMETRY:**

A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.

B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

**3.5 INSTALLATION:**

A. General:

1. Apply sealants and caulking only when ambient temperature is between 5° C and 38° C (40° and 100° F).
2. Do not use polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
3. Do not use sealant type listed by manufacture as not suitable for use in locations specified.
4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.
5. Avoid dropping or smearing compound on adjacent surfaces.
6. Fill joints solidly with compound and finish compound smooth.
7. Tool joints to concave surface unless shown or specified otherwise.
8. Finish paving or floor joints flush unless joint is otherwise detailed.
9. Apply compounds with nozzle size to fit joint width.
10. Test sealants for compatibility with each other and substrate. Use only compatible sealant.

B. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise.

C. Where gypsum board partitions are of sound rated, fire rated, or smoke barrier construction, follow requirements of ASTM C919 only to seal all cut-outs and intersections with the adjoining construction unless specified otherwise.

1. Apply a 6 mm (1/4 inch) minimum bead of sealant each side of runners (tracks), including those used at partition intersections with dissimilar wall construction.
2. Coordinate with application of gypsum board to install sealant immediately prior to application of gypsum board.
3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing or application of veneer plaster-joint reinforcing.
4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cut-outs to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.

5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

**3.6 FIELD QUALITY CONTROL:**

A. Field-Adhesion Testing: Field-test joint-sealant adhesion to joint substrates as recommended by sealant manufacturer:
   1. Extent of Testing: Test completed elastomeric sealant joints as follows:
      a. Perform 10 tests for first 300 m (1000 feet) of joint length for each type of elastomeric sealant and joint substrate.
      b. Perform one test for each 300 m (1000 feet) of joint length thereafter or one test per each floor per elevation.

B. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements. Record results in a field adhesion test log.

C. Inspect tested joints and report on following:
   1. Whether sealants in joints connected to pulled-out portion failed to adhere to joint substrates or tore cohesively. Include data on pull distance used to test each type of product and joint substrate.
   2. Compare these results to determine if adhesion passes sealant manufacturer’s field-adhesion hand-pull test criteria.
   3. Whether sealants filled joint cavities and are free from voids.
   4. Whether sealant dimensions and configurations comply with specified requirements.

D. Record test results in a field adhesion test log. Include dates when sealants were installed, names of persons who installed sealants, test dates, test locations, whether joints were primed, adhesion results and percent elongations, sealant fill, sealant configuration, and sealant dimensions.

E. Repair sealants pulled from test area by applying new sealants following same procedures used to originally seal joints. Ensure that original sealant surfaces are clean and new sealant contacts original sealant.

F. Evaluation of Field-Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements, will be considered satisfactory. Remove sealants that

fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

**3.7 CLEANING:**

A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by the caulking or sealant manufacturer.

B. After filling and finishing joints, remove masking tape.

C. Leave adjacent surfaces in a clean and unstained condition.

**3.8 LOCATIONS:**

A. Exterior Building Joints, Horizontal and Vertical:

1. Metal to Metal: Type S-1, S-2
2. Metal to Masonry or Stone: Type S-1
3. Masonry to Masonry or Stone: Type S-1
4. Stone to Stone: Type S-1
5. Cast Stone to Cast Stone: Type S-1
6. Threshold Setting Bed: Type S-1, S-3, S-4
7. Masonry Expansion and Control Joints: Type S-6
8. Wood to Masonry: Type S-1

B. Metal Reglets and Flashings:

1. Flashings to Wall: Type S-6
2. Metal to Metal: Type S-6

C. Sanitary Joints:

1. Walls to Plumbing Fixtures: Type S-9
2. Counter Tops to Walls: Type S-9
3. Pipe Penetrations: Type S-9

D. Horizontal Traffic Joints:

1. Concrete Paving, Unit Pavers: Type S-11 or S-12
2. Garage/Parking Decks: Type S-10

E. High Temperature Joints over 204 degrees C (400 degrees F):

1. Exhaust Pipes, Flues, Breech Stacks: Type S-7 or S-8

F. Interior Caulking:

1. Typical Narrow Joint 6 mm, (1/4 inch) or less at Walls and Adjacent Components: Types C-1 and C-2.
2. Perimeter of Doors, Windows, Access Panels which Adjoin Concrete or Masonry Surfaces: Types C-1 and C-2.

3. Joints at Masonry Walls and Columns, Piers, Concrete Walls or Exterior Walls: Types C-1 and C-2.
4. Perimeter of Lead Faced Control Windows and Plaster or Gypsum Wallboard Walls: Types C-1 and C-2.
5. Exposed Isolation Joints at Top of Full Height Walls: Types C-1 and C-2.
6. Exposed Acoustical Joint at Sound Rated Partitions Type C-2.
7. Concealed Acoustic Sealant Types S-4, C-1 and C-2.

- - - E N D - - -

# SECTION 08 11 13
# HOLLOW METAL DOORS AND FRAMES

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This section specifies steel doors, steel frames and related components.

B. Terms relating to steel doors and frames as defined in ANSI A123.1 and as specified.

### 1.2 RELATED WORK

A. Door Hardware: Section 08 71 00, DOOR HARDWARE.

B. Glazing and ballistic rated glazing: Section 08 80 00, GLAZING.

C. Card readers and biometric devices: Section 28 13 00, ACCESS CONTROL.

### 1.3 TESTING

An independent testing laboratory shall perform testing.

### 1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturers Literature and Data:

1. Fire rated doors and frames, showing conformance with NFPA 80 and Underwriters Laboratory, Inc., or Intertek Testing Services or Factory Mutual fire rating requirements and temperature rise rating for stairwell doors. Submit proof of temperature rating.
2. Sound rated doors, including test report from Testing Laboratory.

### 1.5 SHIPMENT

A. Prior to shipment label each door and frame to show location, size, door swing and other pertinent information.

B. Fasten temporary steel spreaders across the bottom of each door frame.

### 1.6 STORAGE AND HANDLING

A. Store doors and frames at the site under cover.

B. Protect from rust and damage during storage and erection until completion.

### 1.7 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. Federal Specifications (Fed. Spec.):
L-S-125B.....Screening, Insect, Nonmetallic

C. Door and Hardware Institute (DHI):
A115 Series.....Steel Door and Frame Preparation for Hardware, Series A115.1 through A115.17 (Dates Vary)

D. Steel Door Institute (SDI):
113-01.....Thermal Transmittance of Steel Door and Frame Assemblies
128-1997.....Acoustical Performance for Steel Door and Frame Assemblies
A250.8-03.....Standard Steel Doors and Frames

E. American Society for Testing and Materials (ASTM):
A167-99(R2004).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
A568/568-M-07.....Steel, Sheet, Carbon, and High-Strength, Low-alloy, Hot-Rolled and Cold-Rolled
A1008-08.....Steel, sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy and High Strength Low Alloy with Improved Formability
B209/209M-07.....Aluminum and Aluminum-Alloy Sheet and Plate
B221/221M-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles and Tubes
D1621-04.....Compressive Properties of Rigid Cellular Plastics
D3656-07.....Insect Screening and Louver Cloth Woven from Vinyl Coated Glass Yarns
E90-04.....Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions

F. The National Association Architectural Metal Manufactures (NAAMM):
Metal Finishes Manual (1988 Edition)

G. National Fire Protection Association (NFPA):
80-09.....Fire Doors and Fire Windows

H. Underwriters Laboratories, Inc. (UL):
Fire Resistance Directory

I. Intertek Testing Services (ITS):
Certifications Listings…Latest Edition

J. Factory Mutual System (FM):
Approval Guide

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

A. Stainless Steel: ASTM A167, Type 302 or 304; finish, NAAMM Number 4.
B. Sheet Steel: ASTM A1008, cold-rolled for panels (face sheets) of doors.
C. Anchors, Fastenings and Accessories: Fastenings anchors, clips connecting members and sleeves from zinc coated steel.
D. Insect Screening: ASTM D3656, 18 by 18 regular mesh.
E. Aluminum Sheet: ASTM B209/209M.
F. Aluminum, Extruded: ASTM B221/221M.
G. Prime Paint: Paint that meets or exceeds the requirements of A250.8.

**2.2 FABRICATION GENERAL**

A. GENERAL:
1. Follow SDI A250.8 for fabrication of standard steel doors, except as specified otherwise. Doors to receive hardware specified in Section 08 71 00, DOOR HARDWARE. Tolerances as per SDI A250.8. Thickness, 44 mm (1-3/4 inches), unless otherwise shown.
2. Close top edge of exterior doors flush and seal to prevent water intrusion.
3. When vertical steel stiffeners are used for core construction, fill spaces between stiffeners with mineral fiber insulation.

B. Standard Duty Doors: SDI A250.8, Level 1, Model 2 of size and design shown. Use for interior locations only. Do not use for stairwell doors, security doors and detention doors.
C. Heavy Duty Doors: SDI A250.8, Level 2, Model 2 of size and design shown. Core construction types a, d, or f, for interior doors, and, types b, c, e, or f, for exterior doors.
D. Extra Heavy Duty Doors: (NOT USED)
E. Smoke Doors: (NOT USED)
F. Fire Rated Doors (Labeled):
1. Conform to NFPA 80 when tested by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual for the class of door or door opening shown.
2. Fire rated labels of metal, with raised or incised markings of approving laboratory shall be permanently attached to doors.

3. Close top and vertical edges of doors flush. Vertical edges shall be seamless. Apply steel astragal to the meeting stile of the active leaf of pairs of fire rated doors, except where vertical rod exit devices are specified for both leaves swinging in the same direction.
4. Construct fire rated doors in stairwell enclosures for maximum transmitted temperature rise of 230 °C (450 °F) above ambient temperature at end of 30 minutes of fire exposure when tested in accordance with ASTM E152.
5. All Doors & Frames located in 1 hour walls to have min. 45 minute rating

G. Custom Metal Hollow Doors: (NOT USED)
H. Sound Rated Doors: (NOT USED)
I. Detention Doors (Type 22): (NOT USED)
J. Tubular Steel Doors: (NOT USED)

**2.3 METAL FRAMES**

A. General:
1. SDI A250.8, 1.3 mm (0.053 inch) thick sheet steel, types and styles as shown or scheduled.
2. Frames for exterior doors: Fabricate from 1.7 mm (0.067 inch) thick galvanized steel conforming to ASTM A525.
3. Frames for labeled fire rated doors.
   a. Comply with NFPA 80. Test by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual.
   b. Fire rated labels of approving laboratory permanently attached to frames as evidence of conformance with these requirements. Provide labels of metal or engraved stamp, with raised or incised markings.
4. All Doors & Frames located in 1 hour walls to have min. 45 minute rating.

B. Reinforcement and Covers:
1. SDI A250.8 for, minimum thickness of steel reinforcement welded to back of frames.
2. Provide mortar guards securely fastened to back of hardware reinforcements except on lead-lined frames.

3. Where concealed door closers are installed within the head of the door frames, prepare frames for closers and provide 1 mm (0.042 inch) thick steel removable stop sections for access to concealed face plates and control valves, except when cover plates are furnished with closer.
4. All hollow metal door frames to be fully grouted.

C. Terminated Stops: SDI A250.8.

D. Glazed Openings (NOT USED)

E. Two piece frames:
   a. One piece unequal leg finished rough buck sub-frames as shown, drilled for anchor bolts.
   b. Unequal leg finished frames formed to fit subframes and secured to subframe legs with countersunk, flat head screws, spaced 300 mm (12 inches) on center at head and jambs on each side.
   c. Preassemble at factory for alignment.

F. Frame Anchors:
   1. Floor anchors:
      a. Where floor fills occur, provide extension type floor anchors to compensate for depth of fill.
      b. At bottom of jamb use 1.3 mm (0.053 inch) thick steel clip angles welded to jamb and drilled to receive two 6 mm (1/4 inch) floor bolts. Use 50 mm x 50 mm (2 inch by 2 inch) 9 mm by (3/8 inch) clip angle for lead lined frames, drilled for 9 mm (3/8 inch) floor bolts.
      c. Where mullions occur, provide 2.3 mm (0.093 inch) thick steel channel anchors, drilled for two 6 mm (1/4 inch) floor bolts and frame anchor screws.
      d. Where sill sections occur, provide continuous 1 mm (0.042 inch) thick steel rough bucks drilled for 6 mm (1/4 inch) floor bolts and frame anchor screws. Space floor bolts at 50 mm (24 inches) on center.
   2. Jamb anchors:
      a. Locate anchors on jambs near top and bottom of each frame, and at intermediate points not over 600 mm (24 inches) apart,except for fire rated frames space anchors as required by labeling authority.

b. Form jamb anchors of not less than 1 mm (0.042 inch) thick steel unless otherwise specified.

c. Anchors set in masonry: Use adjustable anchors designed for friction fit against the frame and for extension into the masonry not less than 250 mm (10 inches). Use one of following type:

1) Wire loop type of 5 mm (3/16 inch) diameter wire.

2) T-shape or strap and stirrup type of corrugated or perforated sheet steel.

d. Anchors for stud partitions: Either weld to frame or use lock-in snap-in type. Provide tabs for securing anchor to the sides of the studs.

e. Anchors for frames set in prepared openings:

1) Steel pipe spacers with 6 mm (1/4 inch) inside diameter welded to plate reinforcing at jamb stops or hat shaped formed strap spacers, 50 mm (2 inches) wide, welded to jamb near stop.

2) Drill jamb stop and strap spacers for 6 mm (1/4 inch) flat head bolts to pass thru frame and spacers.

3) Two piece frames: Subframe or rough buck drilled for 6 mm (1/4 inch) bolts.

f. Anchors for observation windows and other continuous frames set in stud partitions.

1) In addition to jamb anchors, weld clip anchors to sills and heads of continuous frames over 1200 mm (4 feet) long.

2) Anchors spaced 600 mm (24 inches) on centers maximum.

g. Modify frame anchors to fit special frame and wall construction and provide special anchors where shown or required.

**2.4 TRANSOM PANELS (NOT USED)**

**2.5 LOUVERS (NOT USED)**

**2.6 SHOP PAINTING**

SDI A250.8.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Plumb, align and brace frames securely until permanent anchors are set.

1. Use triangular bracing near each corner on both sides of frames with temporary wood spreaders at midpoint.

2. Use wood spreaders at bottom of frame if the shipping spreader is removed.
3. Protect frame from accidental abuse.
4. Where construction will permit concealment, leave the shipping spreaders in place after installation, otherwise remove the spreaders after the frames are set and anchored.
5. Remove wood spreaders and braces only after the walls are built and jamb anchors are secured.

B. Floor Anchors:
1. Anchor the bottom of door frames to floor with two 6 mm (1/4 inch) diameter expansion bolts. Use 9 mm (3/8 inch) bolts on lead lined frames.
2. Power actuated drive pins may be used to secure frame anchors to concrete floors.

C. Jamb Anchors:
1. Anchors in masonry walls: Embed anchors in mortar. Fill space between frame and masonry wall with grout or mortar as walls are built.
2. Coat frame back with a bituminous coating prior to lining of grout filling in masonry walls.
3. Secure anchors to sides of studs with two fasteners through anchor tabs. Use steel drill screws to steel studs.
4. Frames set in prepared openings of masonry or concrete: Expansion bolt to wall with 6 mm (1/4 inch) expansion bolts through spacers. Where subframes or rough bucks are used, 6 mm (1/4 inch) expansion bolts on 600 mm (24 inch) centers or power activated drive pins 600 mm (24 inches) on centers. Secure two piece frames to subframe or rough buck with machine screws on both faces.

D. Install anchors for labeled fire rated doors to provide rating as required.

E. Frames for Sound Rated Doors: Coordinate to line frames for sound rated doors with insulation.

F. Overhead Bracing (Lead Lined Frames): Where jamb extensions extend to structure above, anchor clip angles with not less than two, 9 mm (3/8 inch) expansion bolts or power actuated drive pins to concrete slab. Weld to steel overhead members.

**3.2 INSTALLATION OF DOORS AND APPLICATION OF HARDWARE**

Install doors and hardware as specified in Sections Section 08 11 13, HOLLOW METAL DOORS AND FRAMES and Section 08 71 00, DOOR HARDWARE.

- - - E N D - - -

# SECTION 08 71 00
# DOOR HARDWARE

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. Door hardware and related items necessary for complete installation and operation of doors.

### 1.2 RELATED WORK

A. Caulking: Section 07 92 00 JOINT SEALANTS.

B. Application of Hardware: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES

C. Finishes: Section 09 06 00, SCHEDULE FOR FINISHES.

D. Painting: Section 09 91 00, PAINTING.

E. Card Readers: Section 28 13 11, PHYSICAL ACCESS CONTROL SYSTEMS.

F. Electrical: Division 26, ELECTRICAL.

### 1.3 GENERAL

A. All hardware shall comply with UFAS, (Uniform Federal Accessible Standards) unless specified otherwise.

B. Provide rated door hardware assemblies where required by most current version of the International Building Code (IBC).

C. Hardware for Labeled Fire Doors and Exit Doors: Conform to requirements of NFPA 80 for labeled fire doors and to NFPA 101 for exit doors, as well as to other requirements specified. Provide hardware listed by UL, except where heavier materials, large size, or better grades are specified herein under paragraph HARDWARE SETS. In lieu of UL labeling and listing, test reports from a nationally recognized testing agency may be submitted showing that hardware has been tested in accordance with UL test methods and that it conforms to NFPA requirements.

D. Hardware for application on metal and wood doors and frames shall be made to standard templates. Furnish templates to the fabricator of these items in sufficient time so as not to delay the construction.

E. The following items shall be of the same manufacturer, except as otherwise specified:

1. Mortise locksets.
2. Hinges for hollow metal and wood doors.
3. Surface applied overhead door closers.
4. Exit devices.

5. Floor closers.

**1.4 WARRANTY**

A. Automatic door operators shall be subject to the terms of FAR Clause 52.246-21, except that the Warranty period shall be two years in lieu of one year for all items except as noted below:
   1. Locks, latchsets, and panic hardware: 5 years.
   2. Door closers and continuous hinges: 10 years.

**1.5 MAINTENANCE MANUALS**

A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on all door hardware. Provide installation instructions with the submittal documentation.

**1.6 SUBMITTALS**

A. Submittals shall be in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. Submit 6 copies of the schedule per Section 01 33 23. Submit 2 final copies of the final approved schedules to VAMC Locksmith as record copies (VISN Locksmith if the VAMC does not have a locksmith).

B. Hardware Schedule: Prepare and submit hardware schedule in the following form:

| Hardware Item | Quantity | Size | Reference Publication Type No. | Finish | Mfr. Name and Catalog No. | Key Control Symbols | UL Mark (if fire rated and listed) | ANSI/BHMA Finish Designation |
|---|---|---|---|---|---|---|---|---|
| | | | | | | | | |
| | | | | | | | | |
| | | | | | | | | |

C. Samples and Manufacturers' Literature:
   1. Samples: All hardware items (proposed for the project) that have not been previously approved by Builders Hardware Manufacturers Association shall be submitted for approval. Tag and mark all items with manufacturer's name, catalog number and project number.

2. Samples are not required for hardware listed in the specifications by manufacturer's catalog number, if the contractor proposes to use the manufacturer's product specified.

D. Certificate of Compliance and Test Reports: Submit certificates that hardware conforms to the requirements specified herein. Certificates shall be accompanied by copies of reports as referenced. The testing shall have been conducted either in the manufacturer's plant and certified by an independent testing laboratory or conducted in an independent laboratory, within four years of submittal of reports for approval.

**1.7 DELIVERY AND MARKING**

A. Deliver items of hardware to job site in their original containers, complete with necessary appurtenances including screws, keys, and instructions. Tag one of each different item of hardware and deliver to Resident Engineer for reference purposes. Tag shall identify items by Project Specification number and manufacturer's catalog number. These items shall remain on file in Resident Engineer's office until all other similar items have been installed in project, at which time the Resident Engineer will deliver items on file to Contractor for installation in predetermined locations on the project.

**1.8 PREINSTALLATION MEETING**

A. Convene a preinstallation meeting not less than 30 days before start of installation of door hardware. Require attendance of parties directly affecting work of this section, including Contractor and Installer, Architect, Project Engineer and VA Locksmith, Hardware Consultant, and Hardware Manufacturer’s Representative. Review the following:

1. Inspection of door hardware.
2. Job and surface readiness.
3. Coordination with other work.
4. Protection of hardware surfaces.
5. Substrate surface protection.
6. Installation.
7. Adjusting.
8. Repair.
9. Field quality control.
10. Cleaning.

**1.9 INSTRUCTIONS**

A. Hardware Set Symbols on Drawings: Except for protective plates, door stops, mutes, thresholds and the like specified herein, hardware requirements for each door are indicated on drawings by symbols. Symbols for hardware sets consist of letters (e.g., "HW") followed by a number. Each number designates a set of hardware items applicable to a door type.

B. Keying: A new Great Grandmaster key shall be established for this project. The key system shall be small format (Best size and profile) removable core type as previously described. The key blanks shall be protected by a utility patent with a minimum seven years remaining on the patent from the start of construction, and protected by contract-controlled distribution. The manufacturer shall furnish code pattern listings in both paper and electronic formats so keys may be reproduced by code.; provide electronic format in file type required by project’s key control software. The manufacturer shall design the new key system with the capacity to rekey the existing system and also provide for 25 percent expansion capability beyond this requirement. Submit a keying chart for approval showing proposed keying layout and listing expansion capacity.

1. Keying information will be furnished to the Contractor by the Resident Engineer.
2. Supply information regarding key control of cylinder locks to manufacturers of equipment having cylinder type locks. Notify Resident Engineer immediately when and to whom keys or keying information is supplied. Return all such keys to the Resident Engineer.

**1.10 COORDINATION AND INSTALLATION**

A. Prior to the start of the hardware installation, the General Contractor shall schedule and conduct a pre-installation meeting with the hardware supplier and the manufacturer representative whom supplied the commercial locks, the exit devices, the door controls/closers, etc.. The purpose is to coordinate materials and techniques, and sequence complex hardware items and systems installation. Proper and correct installation and adjustment of hardware is to be reviewed. Meeting to convene at least one week

prior to commencement of hardware installation and the Owner needs to be notified of date and time. Written documentation of date, attendees and participants is to be provided to architect and owner for record.

B. Prior to owner's occupancy, the general contractor shall schedule and conduct a post-installation meeting with the hardware supplier and the manufacturer representative who supplied the commercial locks, the exit devices, the door controls/closers, etc. for review of the installation of devices.

**1.11 APPLICABLE PUBLICATIONS**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. In text, hardware items are referred to by series, types, etc., listed in such specifications and standards, except as otherwise specified.

B. American Society for Testing and Materials (ASTM):

F883-04.....Padlocks

E2180-07.....Standard Test Method for Determining the Activity of Incorporated Antimicrobial Agent(s) In Polymeric or Hydrophobic Materials

C. American National Standards Institute/Builders Hardware Manufacturers Association (ANSI/BHMA):

A156.1-06.....Butts and Hinges

A156.2-03.....Bored and Pre-assembled Locks and Latches

A156.3-08.....Exit Devices, Coordinators, and Auto Flush Bolts

A156.4-08.....Door Controls (Closers)

A156.5-01.....Auxiliary Locks and Associated Products

A156.6-05.....Architectural Door Trim

A156.8-05.....Door Controls-Overhead Stops and Holders

A156.12-05 .....Interconnected Locks and Latches

A156.13-05.....Mortise Locks and Latches Series 1000

A156.14-07 .....Sliding and Folding Door Hardware

A156.15-06.....Release Devices-Closer Holder, Electromagnetic and Electromechanical

A156.16-08.....Auxiliary Hardware

A156.17-04 .....Self-Closing Hinges and Pivots
A156.18-06.....Materials and Finishes
A156.20-06 .....Strap and Tee Hinges, and Hasps
A156.21-09.....Thresholds
A156.22-05.....Door Gasketing and Edge Seal Systems
A156.23-04.....Electromagnetic Locks
A156.24-03.....Delayed Egress Locking Systems
A156.25-07 .....Electrified Locking Devices
A156.26-06.....Continuous Hinges
A156.28-07 .....Master Keying Systems
A156.29-07 .....Exit Locks and Alarms
A156.30-03 .....High Security Cylinders
A156.31-07 .....Electric Strikes and Frame Mounted Actuators
A250.8-03.....Standard Steel Doors and Frames

D. National Fire Protection Association (NFPA):
80-10.....Fire Doors and Fire Windows
101-09.....Life Safety Code

E. Underwriters Laboratories, Inc. (UL):
Building Materials Directory (2008)

**PART 2 - PRODUCTS**

**2.1 BUTT HINGES**

A. MANUFACTURER: Hager BB1168, minimum 2 ball-bearing

B. ANSI A156.1. Provide only three-knuckle hinges, except five-knuckle where the required hinge type is not available in a three-knuckle version (e.g., some types of swing-clear hinges). The following types of butt hinges shall be used for the types of doors listed, except where otherwise specified:

1. Exterior Doors: Type A2112/A5112 for doors 900 mm (3 feet) wide or less and Type A2111/A5111 for doors over 900 mm (3 feet) wide. Hinges for exterior outswing doors shall have non-removable pins. Hinges for exterior fire-rated doors shall be of stainless steel material.
2. Interior Doors: Type A8112/A5112 for doors 900 mm (3 feet) wide or less and Type A8111/A5111 for doors over 900 mm (3 feet) wide. Hinges for doors exposed to high humidity areas (shower rooms,

toilet rooms, kitchens, janitor rooms, etc. shall be of stainless steel material.

C. Provide quantity and size of hinges per door leaf as follows:
   1. Doors up to 1210 mm (4 feet) high: 2 hinges.
   2. Doors 1210 mm (4 feet) to 2260 mm (7 feet 5 inches) high: 3 hinges minimum.
   3. Doors greater than 2260 mm (7 feet 5 inches) high: 4 hinges.
   4. Doors up to 900 mm (3 feet) wide, standard weight: 114 mm x 114 mm (4-1/2 inches x 4-1/2 inches) hinges.
   5. Doors over 900 mm (3 feet) to 1065 mm (3 feet 6 inches) wide, standard weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
   6. Doors over 1065 mm (3 feet 6 inches) to 1210 mm (4 feet), heavy weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
   7. Provide heavy-weight hinges where specified.
   8. At doors weighing 330 kg (150 lbs.) or more, furnish 127 mm (5 inch) high hinges.

D. See Articles "MISCELLANEOUS HARDWARE" and "HARDWARE SETS" for pivots and hinges other than butts specified above and continuous hinges specified below.

**2.2 CONTINUOUS HINGES (NOT USED)**

**2.3 DOOR CLOSING DEVICES**

A. Closing devices shall be products of one manufacturer.

**2.4 OVERHEAD CLOSERS**

A. MANUFACTURER: LCN 4040/4040H

B. Conform to ANSI A156.4, Grade 1.

C. Closers shall conform to the following:
   1. The closer shall have minimum 50 percent adjustable closing force over minimum value for that closer and have adjustable hydraulic back check effective between 60 degrees and 85 degrees of door opening.
   2. Where specified, closer shall have hold-open feature.
   3. Size Requirements: Provide multi-size closers, sizes 1 through 6, except where multi-size closer is not available for the required application.
   4. Material of closer body shall be forged or cast.

5. Arm and brackets for closers shall be steel, malleable iron or high strength ductile cast iron.
6. Where closers are exposed to the exterior or are mounted in rooms that experience high humidity, provide closer body and arm assembly of stainless steel material.
7. Closers shall have full size metal cover; plastic covers will not be accepted.
8. Closers shall have adjustable hydraulic back-check, separate valves for closing and latching speed, adjustable back-check positioning valve, and adjustable delayed action valve.
9. Provide closers with any accessories required for the mounting application, including (but not limited to) drop plates, special soffit plates, spacers for heavy-duty parallel arm fifth screws, bull-nose or other regular arm brackets, longer or shorter arm assemblies, and special factory templating. Provide special arms, drop plates, and templating as needed to allow mounting at doors with overhead stops and/or holders.
10. Closer arms or backcheck valve shall not be used to stop the door from overswing, except in applications where a separate wall, floor, or overhead stop cannot be used.
11. Provide parallel arm closers with heavy duty rigid arm.
12. Where closers are to be installed on the push side of the door, provide parallel arm type except where conditions require use of top jamb arm.
13. Provide all surface closers with the same body attachment screw pattern for ease of replacement and maintenance.
14. All closers shall have a 1 ½″ (38mm) minimum piston diameter.

**2.5 FLOOR CLOSERS AND FLOOR PIVOT SETS (NOT USED)**

**2.6 DOOR STOPS**

A. Conform to ANSI A156.16.

B. Provide door stops wherever an opened door or any item of hardware thereon would strike a wall, column, equipment or other parts of building construction. For concrete, masonry or quarry tile construction, use lead expansion shields for mounting door stops.

C. Where cylindrical locks with turn pieces or pushbuttons occur, equip wall bumpers Type L02251 (rubber pads having concave face) to receive turn piece or button.

D. Provide floor stops (Type L02141 or L02161 in office areas; Type L02121 x 3 screws into floor elsewhere. Wall bumpers, where used, must be installed to impact the trim or the door within the leading half of its width. Floor stops, where used, must be installed within 4-inches of the wall face and impact the door within the leading half of its width.

E. Where drywall partitions occur, use floor stops, Type L02141 or L02161 in office areas, Type L02121 elsewhere.

F. Provide stop Type L02011, as applicable for exterior doors. At outswing doors where stop can be installed in concrete, provide stop mated to concrete anchor set in 76mm (3-inch) core-drilled hole and filled with quick-setting cement.

G. Omit stops where floor mounted door holders are required and where automatic operated doors occur.

H. Provide appropriate roller bumper for each set of doors (except where closet doors occur) where two doors would interfere with each other in swinging.

I. Provide appropriate door mounted stop on doors in individual toilets where floor or wall mounted stops cannot be used.

J. Provide overhead surface applied stop Type C02541, ANSI A156.8 on patient toilet doors in bedrooms where toilet door could come in contact with the bedroom door.

K. Provide door stops on doors where combination closer magnetic holders are specified, except where wall stops cannot be used or where floor stops cannot be installed within 4-inches of the wall.

L. Where the specified wall or floor stop cannot be used, provide concealed overhead stops (surface-mounted where concealed cannot be used).

**2.7 OVERHEAD DOOR STOPS AND HOLDERS**

A. Conform to ANSI Standard A156.8. Overhead holders shall be of sizes recommended by holder manufacturer for each width of door. Set overhead holders for 110 degree opening, unless limited by building construction or equipment. Provide Grade 1 overhead concealed slide type: stop-only

at rated doors and security doors, hold-open type with exposed hold-open on/off control at all other doors requiring overhead door stops.

**2.8 FLOOR DOOR HOLDERS (NOT USED)**

**2.9 LOCKS AND LATCHES**

A. MANUFACTURER: Best Lock

1. Cylindrical and Mortise Lock Set with Medeco 7-pin interchangeable cylindrical cores.

B. Conform to ANSI A156.2. Locks and latches for doors 45 mm (1-3/4 inch) thick or over shall have beveled fronts. Lock cylinders shall have not less than seven pins. Cylinders for all locksets shall be removable core type. Cylinder shall be removable by special key or tool. Construct all cores so that they will be interchangeable into the core housings of all mortise locks, rim locks, cylindrical locks, and any other type lock included in the Great Grand Master Key System. Disassembly of lever or lockset shall not be required to remove core from lockset. All locksets or latches on double doors with fire label shall have latch bolt with 19 mm (3/4 inch) throw, unless shorter throw allowed by the door manufacturer’s fire label. Provide temporary keying device or construction core of allow opening and closing during construction and prior to the installation of final cores.

C. In addition to above requirements, locks and latches shall comply with following requirements:

1. Mortise Lock and Latch Sets: Conform to ANSI/BHMA A156.13. Mortise locksets shall be series 1000, minimum Grade 2. All locksets and latchsets, except on designated doors in Psychiatric (Mental Health) areas, shall have lever handles fabricated from cast stainless steel. Provide sectional (lever x rose) lever design matching [_____]. No substitute lever material shall be accepted. All locks and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Lock function F02 shall be furnished with emergency tools/keys for emergency entrance. All lock cases installed on lead lined doors shall be lead lined before applying final hardware finish. Furnish armored fronts for all mortise locks. Where mortise locks are installed in high-humidity locations or

where exposed to the exterior on both sides of the opening, provide non-ferrous mortise lock case.

2. Cylindrical Lock and Latch Sets: levers shall meet ADA (Americans with Disabilities Act) requirements. Cylindrical locksets shall be series 4000 Grade I. All locks and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Provide lever design to match design selected by Architect or to match existing lever design. Where two turn pieces are specified for lock F76, turn piece on inside knob shall lock and unlock inside knob, and turn piece on outside knob shall unlock outside knob when inside knob is in the locked position. (This function is intended to allow emergency entry into these rooms without an emergency key or any special tool.)
3. Auxiliary locks shall be as specified under hardware sets and conform to ANSI A156.5.
4. Locks on designated doors in Psychiatric (Mental Health) areas shall be paddle type with arrow projection covers and be UL Listed. Provide these locks with paddle in the down position on both sides of the door. Locks shall be fabricated of wrought stainless steel.
5. Privacy locks in non-mental-health patient rooms shall have an inside thumbturn for privacy and an outside thumbturn for emergency entrance. Single occupancy patient privacy doors shall typically swing out; where such doors cannot swing out, provide center-pivoted doors with rescue hardware (see HW-2B).

**2.10 PUSH-BUTTON COMBINATION LOCKS (NOT USED)**

**2.11 ELECTROMAGNETIC LOCKS (NOT USED)**

**2.12 ELECTRIC STRIKES**

A. ANSI/ BHMA A156.31 Grade 1.

B. General: Use fail-secure electric strikes at fire-rated doors.

**2.13 KEYS**

A. Stamp all keys with change number and key set symbol. Furnish keys in quantities as follows:

| **Locks/Keys** | **Quantity** |
|---|---|
| Cylinder locks | 2 keys each |

| | |
|---|---|
| Cylinder lock change key blanks | 100 each different key way |
| Master-keyed sets | 6 keys each |
| Grand Master sets | 6 keys each |
| Great Grand Master set | 5 keys |
| Control key | 2 keys |

B. Psychiatric keys shall be cut so that first two bittings closest to the key shoulder are shallow to provide greater strength at point of greatest torque.

**2.14 KEY CABINET**

A. ANSI Standard A156.5. Provide key cabinet made of cold rolled, 1.2 mm (0.0478 inch) thick furniture steel electro-welded. Doors shall have "no sag" continuous brass-pin piano type hinge and be equipped with chrome plated locking door handles, hook cam and mechanical pushbutton door lock. Key Cabinet and Key Control System shall accommodate all keys for this project plus 25 percent. Provide minimum number of multiple cabinets where a single cabinet of largest size will not accommodate the required number of keys.

B. Key tags shall consist of two sets: Permanent self-locking and loan key snaphook type with tag colors as follows: Red fiber marker of the permanent self-locking type approximately 32 mm (1-1/4 inch) in diameter engraved with the legend "FILE KEY MUST NOT BE LOANED." Also furnish for each hook a white cloverleaf key marker with snap-hooks engraved with the legend "LOAN KEY."

C. The manufacturer of the lock cylinders and locks shall attach a key tag to keys of each lock cylinder and shall mark thereon the respective item number and key change number. Provide each group of keys in a key gathering envelope (supplied by Key Cabinet Manufacturer) in which the lock manufacturer shall include the following information: Item number, key change number and door number. The contractor shall furnish the Key Cabinet Manufacturer the hardware and keying schedules and change keys.

D. The Key Cabinet Manufacturer shall set up a three-way cross index system, including master keys, listing the keys alphabetically, the hooks numerically and the key changes numerically on different colored index cards. Index cards shall be typewritten and inserted in a durable

binder. Attach the keys to the two sets of numbered tags supplied with the cabinet. (The permanent tag and the loan key tag). Instruct the owner in proper use of the system. Install cabinet as directed by the Resident Engineer.

**2.15 ARMOR PLATES, KICK PLATES, MOP PLATES AND DOOR EDGING (NOT USED)**

**2.16 EXIT DEVICES**

A. MANUFACTURER: Von Duprin

B. Conform to ANSI Standard A156.3. Exit devices shall be Grade 1; type and function are specified in hardware sets. Provide flush with finished floor strikes for vertical rod exit devices in interior of building. Trim shall have cast satin stainless steel lever handles of design similar to locksets, unless otherwise specified. Provide key cylinders for keyed operating trim and, where specified, cylinder dogging.

C. Surface vertical rod panics shall only be provided less bottom rod; provide fire pins as required by exit device and door fire labels. Do not provide surface vertical rod panics at exterior doors.

D. Concealed vertical rod panics shall be provided less bottom rod at interior doors, unless lockable or otherwise specified; provide fire pins as required by exit device and door fire labels. Where concealed vertical rod panics are specified at exterior doors, provide with both top and bottom rods.

E. Where removable mullions are specified at pairs with rim panic devices, provide mullion with key-removable feature.

F. At non-rated openings with panic hardware, provide panic hardware with key cylinder dogging feature.

G. Exit devices for fire doors shall comply with Underwriters Laboratories, Inc., requirements for Fire Exit Hardware. Submit proof of compliance.

**2.17 FLUSH BOLTS (LEVER EXTENSION) (NOT USED)**

**2.18 FLUSH BOLTS (AUTOMATIC)**

A. Conform to ANSI A156.3. Dimension of flush bolts shall conform to ANSI A115. Bolts shall conform to Underwriters Laboratories, Inc., requirements for fire door hardware. Flush bolts shall automatically latch and unlatch. Furnish dustproof strikes conforming to ANSI A156.16

for bottom flushbolt. Face plates for dustproof strike shall be rectangular and not less than 38 mm by 90 mm (1-1/2 by 3-1/2 inches).

**2.19 DOOR PULLS WITH PLATES (NOT USED)**

**2.20 PUSH PLATES (NOT USED)**

**2.21 COMBINATION PUSH AND PULL PLATES (NOT USED)**

**2.22 COORDINATORS**

A. Conform to ANSI A156.16. Coordinators, when specified for fire doors, shall comply with Underwriters Laboratories, Inc., requirements for fire door hardware. Coordinator may be omitted on exterior pairs of doors where either door will close independently regardless of the position of the other door. Coordinator may be omitted on interior pairs of non-labeled open where open back strike is used. Open back strike shall not be used on labeled doors. Paint coordinators to match door frames, unless coordinators are plated. Provide bar type coordinators, except where gravity coordinators are required at acoustic pairs. For bar type coordinators, provide filler bars for full width and, as required, brackets for push-side surface mounted closers, overhead stops, and vertical rod panic strikes.

**2.23 THRESHOLDS**

A. Conform to ANSI A156.21, mill finish extruded aluminum, except as otherwise specified. In existing construction, thresholds shall be installed in a bed of sealant with ¼-20 stainless steel machine screws and expansion shields. In new construction, embed aluminum anchors coated with epoxy in concrete to secure thresholds. Furnish thresholds for the full width of the openings.

B. For thresholds at elevators entrances see other sections of specifications.

C. At exterior doors and any interior doors exposed to moisture, provide threshold with non-slip abrasive finish.

D. Provide with miter returns where threshold extends more than 12 mm (0.5 inch) from fame face.

**2.24 AUTOMATIC DOOR BOTTOM SEAL AND RUBBER GASKET FOR LIGHT PROOF OR SOUND CONTROL DOORS (NOT USED)**

**2.25 WEATHERSTRIPS (FOR EXTERIOR DOORS)**

A. Conform to ANSI A156.22. Air leakage shall not to exceed 0.50 CFM per foot of crack length (0.000774$m^3$/s/m).

**2.26 MISCELLANEOUS HARDWARE**

A. Floor Access Doors (including Sheet Metal, Screen and Woven Wire Mesh Types): Door Hardware and locking device by Manufacturer.

**2.27 PADLOCKS FOR VARIOUS DOORS, GATES AND HATCHES (NOT USED)**

**2.28 THERMOSTATIC TEMPERATURE CONTROL VALVE CABINETS (NOT USED)**

**2.29 HINGED WIRE GUARDS (FOR WINDOWS, DOORS AND TRANSOMS) AND WIRE PARTITION DOORS (NOT USED)**

**2.30 FINISHES**

A. Exposed surfaces of hardware shall have ANSI A156.18, finishes as specified below. Finishes on all hinges, pivots, closers, thresholds, etc., shall be as specified below under "Miscellaneous Finishes." For field painting (final coat) of ferrous hardware, see Section 09 91 00, PAINTING.

B. 626 or 630: All surfaces on exterior and interior of buildings, except where other finishes are specified.

C. Miscellaneous Finishes:

1. Hinges --exterior doors: 626 or 630.
2. Hinges --interior doors: 652 or 630.
3. Pivots: Match door trim.
4. Door Closers: Factory applied paint finish. Dull or Satin Aluminum color.
5. Thresholds: Mill finish aluminum.
6. Cover plates for floor hinges and pivots: 630.
7. Other primed steel hardware: 600.

D. Special Finish: Exposed surfaces of hardware for dark bronze anodized aluminum doors shall have oxidized oil rubbed bronze finish (dark bronze) finish on door closers shall closely match doors.

**2.31 BASE METALS**

A. Apply specified U.S. Standard finishes on different base metals as following:

| **Finish** | **Base Metal** |
|---|---|
| 652 | Steel |
| 626 | Brass or bronze |
| 630 | Stainless steel |

## PART 3 - EXECUTION

### 3.1 HARDWARE HEIGHTS

A. For new buildings locate hardware on doors at heights specified below, with all hand-operated hardware centered within 864 mm (34 inches) to 1200 mm (48 inches), unless otherwise noted:

B. Hardware Heights from Finished Floor:

1. Exit devices centerline of strike (where applicable) 1024 mm (40-5/16 inches).
2. Locksets and latch sets centerline of strike 1024 mm (40-5/16 inches).
3. Deadlocks centerline of strike 1219 mm (48 inches).
4. Hospital arm pull 1168 mm (46 inches) to centerline of bottom supporting bracket.
5. Centerline of door pulls to be 1016 mm (40 inches).
6. Push plates and push-pull shall be 1270 mm (50 inches) to top of plate.
7. Push-pull latch to be 1024 mm (40-5/16 inches) to centerline of strike.
8. Locate other hardware at standard commercial heights. Locate push and pull plates to prevent conflict with other hardware.

### 3.2 INSTALLATION

A. Closer devices, including those with hold-open features, shall be equipped and mounted to provide maximum door opening permitted by building construction or equipment. Closers shall be mounted on side of door inside rooms, inside stairs, and away from corridors. At exterior doors, closers shall be mounted on interior side. Where closers are mounted on doors they shall be mounted with sex nuts and bolts; foot shall be fastened to frame with machine screws.

B. Hinge Size Requirements:

| **Door Thickness** | **Door Width** | **Hinge Height** |
|---|---|---|
| 45 mm (1-3/4 inch) | 900 mm (3 feet) and less | 113 mm (4-1/2 inches) |
| 45 mm (1-3/4 inch) | Over 900 mm (3 feet) but not more than 1200 mm (4 feet) | 125 mm (5 inches) |
| 35 mm (1-3/8 inch) | Not over 1200 mm (4 feet) | 113 mm (4-1/2 inches) |

| | | |
|---|---|---|
| (hollow core wood doors) | | |

C. Hinge leaves shall be sufficiently wide to allow doors to swing clear of door frame trim and surrounding conditions.

D. Where new hinges are specified for new doors in existing frames or existing doors in new frames, sizes of new hinges shall match sizes of existing hinges; or, contractor may reuse existing hinges provided hinges are restored to satisfactory operating condition as approved by Resident Engineer. Existing hinges shall not be reused on door openings having new doors and new frames. Coordinate preparation for hinge cut-outs and screw-hole locations on doors and frames.

E. Hinges Required Per Door:

| | |
|---|---|
| Doors 1500 mm (5 ft) or less in height | 2 butts |
| Doors over 1500 mm (5 ft) high and not over 2280 mm (7 ft 6 in) high | 3 butts |
| Doors over 2280 mm (7 feet 6 inches) high | 4 butts |
| Dutch type doors | 4 butts |
| Doors with spring hinges 1370 mm (4 feet 6 inches) high or less | 2 butts |
| Doors with spring hinges over 1370 mm (4 feet 6 inches) | 3 butts |

F. Fastenings: Suitable size and type and shall harmonize with hardware as to material and finish. Provide machine screws and lead expansion shields to secure hardware to concrete, ceramic or quarry floor tile, or solid masonry. Fiber or rawl plugs and adhesives are not permitted. All fastenings exposed to weather shall be of nonferrous metal.

G. After locks have been installed; show in presence of Resident Engineer that keys operate their respective locks in accordance with keying requirements. (All keys, Master Key level and above shall be sent Registered Mail to the Medical Center Director along with the bitting list. Also a copy of the invoice shall be sent to the Resident Engineer for his records.) Installation of locks which do not meet specified keying requirements shall be considered sufficient justification for rejection and replacement of all locks installed on project.

**3.3 FINAL INSPECTION**

A. Installer to provide letter to VA Resident/Project Engineer that upon completion, installer has visited the Project and has accomplished the following:
   1. Re-adjust hardware.
   2. Evaluate maintenance procedures and recommend changes or additions, and instruct VA personnel.
   3. Identify items that have deteriorated or failed.
   4. Submit written report identifying problems.

**3.4 DEMONSTRATION**

A. Demonstrate efficacy of mechanical hardware and electrical, and electronic hardware systems, including adjustment and maintenance procedures, to satisfaction of Resident/Project Engineer and VA Locksmith.

**3.5 HARDWARE SETS**

A. Following sets of hardware correspond to hardware symbols shown on drawings. Only those hardware sets that are shown on drawings will be required. Disregard hardware sets listed in specifications but not shown on drawings.

B. Hardware Consultant working on a project will be responsible for providing additional information regarding these hardware sets. The numbers shown in the following sets come from BHMA standards.

ELECTRIC HARDWARE ABBREVIATIONS LEGEND:
ADO = Automatic Door Operator
EMCH = Electro-Mechanical Closer-Holder
MHO = Magnetic Hold-Open (wall- or floor-mounted)

**INTERIOR SINGLE DOORS**

| Each Door to Have: | HW-5K | RATED/NON-RATED |
|---|---|---|
| 1 Continuous Hinge | x INTEGRAL HINGE GUARD CHANNEL<br>X ADJUSTA-SCREWS | |
| 1 Security Storeroom Lock | F13-MOD x RIGID OUTSIDE LEVER x KEY<br>RETRACTS DEADBOLT AND LATCHBOLT | |
| 1 Closer | C02011/C02021 | |
| 1 Armor Plate | J101 x 1.275 MM (0.050 INCH) THICKNESS | |
| 1 Edge Guard (@ Wood Doors) | J208M / J211 (VERIFY), CUT: HARDWARE | |
| 1 Floor Stop | L02121 x 3 FASTENERS | |
| 1 Threshold | J32300 x 57 MM WIDTH (2-1/4 INCHES) | |
| 1 Auto Door Bottom | R0Y346 – HEAVY DUTY | |
| 2 Sets Self-Adhesive Seals | R0Y154 | |

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.

CARD READER BY DIVISION 28.

**EXTERIOR SINGLE DOORS**

| Each Door to Have: | HW-E4 | NON-RATED |
|---|---|---|
| 1 Continuous Hinge | | |
| 1 Anti-Vandal Pull | | |
| 1 Exit Device | TYPE 1 F03 LESS TRIM | |
| 1 Latch Protector (outswing dr.) | | |
| 1 Key Cylinder | TYPE AS REQUIRED | |
| 1 Closer | C02011 | |
| 1 Kick Plate | J102 | |
| 1 Floor Stop | L02121 x 3 FASTNERS | |
| 1 Threshold | J32120 x SILICONE GASKET | |
| 1 Door Sweep | R0Y416 | |
| 1 Set Frame Seals | R0Y164 | |
| 1 Drip | R0Y976 | |

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.

CARD READER BY DIVISION 28.

- - - E N D - - -

# SECTION 08 80 00
# GLAZING

## PART 1 - GENERAL

### 1.1 DESCRIPTION

This section specifies glass, plastic, related glazing materials and accessories. Glazing products specified apply to factory or field glazed items.

### 1.2 RELATED WORK

A. Factory glazed by manufacturer in following units:
   1. Color of spandrel glass, tinted (heat absorbing or light reducing) glass, and reflective (metallic coated) glass: Section 09 06 00, SCHEDULE FOR FINISHES.

### 1.3 LABELS

A. Temporary labels:
   1. Provide temporary label on each light of glass identifying manufacturer or brand and glass type, quality and nominal thickness.
   2. Label in accordance with NFRC (National Fenestration Rating Council) label requirements.
   3. Temporary labels shall remain intact until glass is approved by VA Project Manager.

B. Permanent labels:
   1. Locate in corner for each pane.
   2. Label in accordance with ANSI Z97.1 and SGCC (Safety Glass Certification Council) label requirements.
      a. Tempered glass.
      b. Laminated glass or have certificate for panes without permanent label.

### 1.4 PERFORMANCE REQUIREMENTS

A. Building Enclosure Vapor Retarder and Air Barrier:
   1. Utilize the inner pane of multiple pane sealed units for the continuity of the air barrier and vapor retarder seal.
   2. Maintain a continuous air barrier and vapor retarder throughout the glazed assembly from glass pane to heel bead of glazing sealant.

B. Thermal Performance Requirements:
   1. Glazing shall conform to the following minimum Thermal Performance requirements as certified by the National Fenestration Rating Council (NFRC):
      a. Maximum Allowable Solar Heat Gain Coefficient (SHGC) = .38
      b. Shading Coefficient = .44
      c. U-Value (Winter) = .29
      d. U-value (Summer) = .27
C. Glass Unit Construction:
   1. Outdoor Finish/Appearance = Clear
   2. Indoor Finish/Appearance = Clear
   3. Glass Thickness
      a. Exterior Panel = 1/4” (6 mm)
      a. Air Space = 1/2” (13 mm)
      a. Interior Panel = 1/4” (6 mm)
   4. Low-E Coating to be provided on the No. 2 surface of the Exterior Panel.
   5. Test in accordance with ASTM E 1300.

**1.5 SUBMITTALS**

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
B. Manufacturer's Certificates:
   1. Certificates stating that wire glass, meets requirements for safety glazing material as specified in ANSI Z97.1.
   2. Certificate on shading coefficient.
   3. Certificate on "R" value when value is specified.
   4. Certificate test reports confirming compliance’s with specified bullet resistive rating.
   5. Certificate that blast resistant glass meets the requirements of UFC4-010-01.
C. Warranty: Submit written guaranty, conforming to General Condition requirements, and to “Warranty of Construction” Article in this Section.
D. Manufacturer's Literature and Data:
   1. Glass, each kind required.
   2. Insulating glass units.

3. Transparent (one-way vision glass) mirrors.
4. Elastic compound for metal sash glazing.
5. Putty, for wood sash glazing.
6. Glazing cushion.
7. Sealing compound.
8. Bullet resistive material.
9. Plastic glazing material, each type required.

E. Samples:
1. Size: 150 mm by 150 mm (6 inches by 6 inches).
2. Tinted glass.

F. Preconstruction Adhesion and Compatibility Test Report: Submit glazing sealant manufacturer’s test report indicating glazing sealants were tested for adhesion to glass and glazing channel substrates and for compatibility with glass and other glazing materials.

**1.6 DELIVERY, STORAGE AND HANDLING**

A. Delivery: Schedule delivery to coincide with glazing schedules so minimum handling of crates is required. Do not open crates except as required for inspection for shipping damage.

B. Storage: Store cases according to printed instructions on case, in areas least subject to traffic or falling objects. Keep storage area clean and dry.

C. Handling: Unpack cases following printed instructions on case. Stack individual windows on edge leaned slightly against upright supports with separators between each.

D. Protect laminated security glazing units against face and edge damage during entire sequence of fabrication, handling, and delivery to installation location. Provide protective covering on exposed faces of glazing plastics, and mark inside as "INTERIOR FACE" or "PROTECTED FACE":
1. Treat security glazing as fragile merchandise, and packaged and shipped in export wood cases with width end in upright position and blocked together in a mass. Storage and handling shall comply with Manufacturer's directions and as required to prevent edge damage or other damage to glazing resulting from effects of moisture, condensation, temperature changes, direct exposure to sun, other environmental conditions, and contact with chemical solvents.

2. Protect sealed-air-space insulating glazing units from exposure to abnormal pressure changes, as could result from substantial changes in altitude during delivery by air freight. Provide temporary breather tubes which do not nullify applicable warranties on hermetic seals.
3. Temporary protections: The glass front and polycarbonate back of glazing shall be temporarily protected with compatible, peelable, heat-resistant film which will be peeled for inspections and re-applied and finally removed after doors and windows are installed at destination. Since many adhesives will attack polycarbonate, the film used on exposed polycarbonate surfaces shall be approved and applied by manufacturer.
4. Edge protection: To cushion and protect glass clad, polycarbonate, and Noviflex edges from contamination or foreign matter, the four edges shall be sealed the depth of glazing with continuous standard-thickness Santoprene tape. Alternatively, continuous channel shaped extrusion of Santoprene shall be used, with flanges extending into face sides of glazing.
5. Protect "Constant Temperature" units including every unit where glass sheet is directly laminated to or directly sealed with metal-tube type spacer bar to polycarbonate sheet, from exposures to ambient temperatures outside the range of 16 to 24 C, during the fabricating, handling, shipping, storing, installation, and subsequent protection of glazing.

**1.7 PROJECT CONDITIONS**

Field Measurements: Field measure openings before ordering tempered glass products. Be responsible for proper fit of field measured products.

**1.8 WARRANTY**

A. Warranty: Conform to terms of "Warranty of Construction", FAR clause 52.246-21, except extend warranty period for the following:
   1. Insulating glass units to remain sealed for 10 years.
   2. Laminated glass units to remain laminated for 5 years.
   3. Polycarbonate to remain clear and ultraviolet light stabilized for 5 years.

4. Insulating plastic to not have more than 6 percent decrease in light transmission and be ultraviolet light stabilized for 10 years.

**1.9 APPLICABLE PUBLICATIONS**

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American National Standards Institute (ANSI):

Z97.1-04.....Safety Glazing Material Used in Building - Safety Performance Specifications and Methods of Test.

C. American Society for Testing and Materials (ASTM):

C1363-05.....Thermal Performance of Building Assemblies, by Means of A Hot Box Apparatus

C542-05.....Lock-Strip Gaskets.

C716-06.....Installing Lock-Strip Gaskets and Infill Glazing Materials.

C794-06.....Adhesion-in-Peel of Elastomeric Joint Sealants.

C864-05.....Dense Elastomeric Compression Seal Gaskets, Setting Blocks, and Spacers.

C920-08.....Elastomeric Joint Sealants.

C964-07.....Standard Guide for Lock-Strip Gasket Glazing.

C1036-06.....Flat Glass.

C1048-04.....Heat-Treated Flat Glass-Kind HS, Kind FT Coated and Uncoated Glass.

C1172-09.....Laminated Architectural Flat Glass.

C1376-10.....Pyrolytic and Vacuum Deposition Coatings on Flat Glass.

D635-06.....Rate of Burning and/or Extent and Time of Burning of Self-Supporting Plastic in a Horizontal Position.

D4802-02.....Poly (Methyl Methacrylate) Acrylic Plastic Sheet.

E84-09.....Surface Burning Characteristics of Building Materials.

E1300-09.....Determining Load Resistance of Glass in Buildings.

E2190-08.....Insulating Glass Unit

D. Commercial Item Description (CID):
A-A-59502.....Plastic Sheet, Polycarbonate

E. Code of Federal Regulations (CFR):
16 CFR 1201 - Safety Standard for Architectural Glazing Materials; 1977, with 1984 Revision.

F. National Fire Protection Association (NFPA):
80-08.....Fire Doors and Windows.

G. National Fenestration Rating Council (NFRC)

H. Safety Glazing Certification Council (SGCC)2009:
Certified Products Directory (Issued Semi-Annually).

I. Underwriters Laboratories, Inc. (UL):
752-06.....Bullet-Resisting Equipment.

J. Unified Facilities Criteria (UFC):
4-010-01-2007.....DOD Minimum Antiterrorism Standards for Buildings

K. Glass Association of North America (GANA):
Glazing Manual (Latest Edition)
Sealant Manual (2008)

L. American Society of Civil Engineers (ASCE):
ASCE 7-10.....Wind Load Provisions

## PART 2 - PRODUCT

### 2.1 MANUFACTURERS

A. PPG Industries, Inc., Pittsburgh, PA
1. Product: Solarban 60 Solar Control, Low-E Exterior Glazing
(Reference VAAR 852.211-72 and FAR 52.211-6)
Bidding on: _____
Manufacturer name _____
Brand _____
No._____

### 2.2 GLASS

A. Use thickness stated unless specified otherwise in assemblies.

### 2.3 HEAT-TREATED GLASS

A. Clear Tempered Glass: (GL-1)

1. ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3.
2. Thickness, 6 mm (1/4 inch) unless indicated otherwise.

**2.4 COATED GLASS (NOT USED)**

**2.5 FIRE RESISTANT GLASS WITHOUT WIRE MESH (NOT USED)**

**2.6 GLAZING ACCESSORIES**

A. As required to supplement the accessories provided with the items to be glazed and to provide a complete installation. Ferrous metal accessories exposed in the finished work shall have a finish that will not corrode or stain while in service.

B. Setting Blocks: ASTM C864:
   1. Channel shape; having 6 mm (1/4 inch) internal depth.
   2. Shore a hardness of 80 to 90 Durometer.
   3. Block lengths: 50 mm (two inches) except 100 to 150 mm (four to six inches) for insulating glass.
   4. Block width: Approximately 1.6 mm (1/16 inch) less than the full width of the rabbet.
   5. Block thickness: Minimum 4.8 mm (3/16 inch). Thickness sized for rabbet depth as required.

C. Spacers: ASTM C864:
   1. Channel shape having a 6 mm (1/4 inch) internal depth.
   2. Flanges not less 2.4 mm (3/32 inch) thick and web 3 mm (1/8 inch) thick.
   3. Lengths: One to 25 to 76 mm (one to three inches).
   4. Shore a hardness of 40 to 50 Durometer.

D. Sealing Tapes:
   1. Semi-solid polymeric based material exhibiting pressure-sensitive adhesion and withstanding exposure to sunlight, moisture, heat, cold, and aging.
   2. Shape, size and degree of softness and strength suitable for use in glazing application to prevent water infiltration.

E. Spring Steel Spacer: Galvanized steel wire or strip designed to position glazing in channel or rabbeted sash with stops.

F. Glazing Gaskets: ASTM C864:
   1. Firm dense wedge shape for locking in sash.
   2. Soft, closed cell with locking key for sash key.

3. Flanges may terminate above the glazing-beads or terminate flush with top of beads.

G. Lock-Strip Glazing Gaskets: ASTM C542, shape, size, and mounting as indicated.

H. Glazing Sealants: ASTM C920, silicone neutral cure:

1. Type S.
2. Class 25
3. Grade NS.
4. Shore A hardness of 25 to 30 Durometer.

J. Neoprene, EPDM, or Vinyl Glazing Gasket: ASTM C864.

1. Channel shape; flanges may terminate above the glazing channel or flush with the top of the channel.
2. Designed for dry glazing.

K. Color:

1. Color of glazing compounds, gaskets, and sealants used for aluminum color frames shall match color of the finished aluminum and be nonstaining.
2. Color of other glazing compounds, gaskets, and sealants which will be exposed in the finished work and unpainted shall be black, gray, or neutral color.

L. Smoke Removal Unit Targets: Adhesive targets affixed to glass to identify glass units intended for removal for smoke control. Comply with requirements of local Fire Department.

## PART 3 - EXECUTION

### 3.1 EXAMINATION

A. Verification of Conditions:

1. Examine openings for glass and glazing units; determine they are proper size; plumb; square; and level before installation is started.
2. Verify that glazing openings conform with details, dimensions and tolerances indicated on manufacturer’s approved shop drawings.

B. Advise Contractor of conditions which may adversely affect glass and glazing unit installation, prior to commencement of installation: Do not proceed with installation until unsatisfactory conditions have been corrected.

C. Verify that wash down of adjacent masonry is completed prior to erection of glass and glazing units to prevent damage to glass and glazing units by cleaning materials.

**3.2 PREPARATION**

A. For sealant glazing, prepare glazing surfaces in accordance with GANA-02 Sealant Manual.

B. Determine glazing unit size and edge clearances by measuring the actual unit to receive the glazing.

C. Shop fabricate and cut glass with smooth, straight edges of full size required by openings to provide GANA recommended edge clearances.

D. Verify that components used are compatible.

E. Clean and dry glazing surfaces.

F. Prime surfaces scheduled to receive sealants, as determined by preconstruction sealant-substrate testing.

**3.3 INSTALLATION - GENERAL**

A. Install in accordance with GANA-01 Glazing Manual and GANA-02 Sealant Manual unless specified otherwise.

B. Glaze in accordance with recommendations of glazing and framing manufacturers, and as required to meet the Performance Test Requirements specified in other applicable sections of specifications.

C. Set glazing without bending, twisting, or forcing of units.

D. Do not allow glass to rest on or contact any framing member.

E. Tempered Glass: Install with roller distortions in horizontal position unless otherwise directed.

F. Transparent (One-Way Vision Glass) Mirror: Use continuous channel glazing gasket.

G. Laminated Glass:

1. Tape edges to seal interlayer and protect from glazing sealants.
2. Do not use putty or glazing compounds.

H. Fire Resistant Glass:

1. Wire glass: Glaze in accordance with NFPA 80.
2. Other fire resistant glass: Glaze in accordance with UL design requirements.

**3.4 GLAZING SCHEDULE**

A. Clear Tempered Glass: (GL-1)

1. Use Clear Tempered Glass in the following locations:

a. As shown and indicated on Construction Documents.

- - - E N D - - -

# SECTION 08 90 00
# LOUVERS AND VENTS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

This section specifies fixed and operable wall louvers, door louvers and wall vents.

### 1.2 RELATED WORK

A. Louvers in steel doors: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES.

B. Color of finish: Section 09 06 00, SCHEDULE FOR FINISHESS.

### 1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Shop Drawings:
Each type, showing material, finish, size of members, operating devices, method of assembly, and installation and anchorage details.

C. Manufacturer's Literature and Data:
Each type of louver and vent.

### 1.4 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. The Master Painters Institute (MPI):
Approved Product List – September 2011

C. American Society for Testing and Materials (ASTM):
A167-99(R2009).....Stainless and Heat-Resisting Chromium - Nickel Steel Plate, Sheet, and Strip
A1008/A1008M-10.....Steel, Sheet, Carbon, Cold Rolled, Structural, and High Strength Low-Alloy with Improved Formability
B209/B209M-03(R2007)....Aluminum and Aluminum Alloy, Sheet and Plate
B221-08.....Aluminum and Aluminum Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
B221M-07.....Aluminum and Aluminum Alloy Extruded Bars, Rods, Wire Shapes, and Tubes

D. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Metal Finishes Manual

E. National Fire Protection Association (NFPA):

90A-09.....Installation of Air Conditioning and Ventilating Systems

G. American Architectural Manufacturers Association (AAMA):
2605-11.....High Performance Organic Coatings on Architectural Extrusions and Panels

H. Air Movement and Control Association, Inc. (AMCA):
500-L-07.....Testing Louvers

**PART 2 - PRODUCTS**

**2.1 MATERIALS**

A. Aluminum, Extruded: ASTM B221/B221M.
B. Stainless Steel: ASTM A167, Type 302B.
C. Carbon Steel: ASTM A1008/A1008M.
D. Aluminum, Plate and Sheet: ASTM B209/B209M.
E. Fasteners: Fasteners for securing louvers and wall vents to adjoining construction, except as otherwise specified or shown, shall be toggle or expansion bolts, of size and type as required for each specific type of installation and service condition.
   1. Where type, size, or spacing of fasteners is not shown or specified, submit shop drawings showing proposed fasteners, and method of installation.
   2. Fasteners for louvers, louver frames, and wire guards shall be of stainless steel or aluminum.
F. Inorganic Zinc Primer: MPI No. 19.

**2.2 EXTERIOR WALL LOUVERS**

A. General:
   1. Provide fixed and operable type louvers of size and design shown.
   2. Finish & Color to match existing adjacent wall finishes.
   3. Heads, sills and jamb sections shall have formed caulking slots or be designed to retain caulking. Head sections shall have exterior drip lip, and sill sections an integral water stop.
   4. Furnish louvers with sill extension or separate sill as shown.
   5. Frame shall be mechanically fastened or welded construction with welds dressed smooth and flush.
   6. All louvers to be furnished with integral Insect Screens.
B. Performance Characteristics:
   1. Weather louvers shall meet the minimum design requirements shown and noted on the Mechanical Drawings.

2. Louvers shall bear AMCA certified rating seals for air performance and water penetration ratings.

C. Aluminum Louvers:

1. General: Frames, blades, sills and mullions (sliding interlocking type); 2 mm (0.081-inch) thick extruded aluminum. Blades shall be standard type and have reinforcing bosses.
2. Louvers, fixed: Make frame sizes 13 mm (1/2-inch) smaller than openings. Single louvers frames shall not exceed 1700 mm (66 inches) wide. When openings exceed 1700 mm (66 inches), provide twin louvers separated by mullion members.
3. Louvers, operable: Louver frame opening sizes, single louver sizes and mullion requirements shall be as specified for fixed louvers.
   a. Blades: Attach blades to frame with aluminum pivot pins through nylon bearings. Fasten each blade to stainless steel operation arms that are connected to minimum 3 mm (1/8-inch) thick stainless steel operating bar arranged for simultaneous operation of blades.

D. Stainless Steel Louvers: From stainless steel louvers using 1.6 mm (0.063-inch) thick sheet for frames, blades, sills and mullions.

1. Louver shall have fixed 45 degree standard blades with water baffle. Make overall frame size 13 mm (1/2-inch) less than opening, unless otherwise shown.
2. Single louver sections shall not exceed 1700 mm (66 inches) in width. For openings larger than 1700 mm (66 inches) wide, provide multiple sections not larger than 1700 mm (66 inches) wide separated by mullions.

**2.3 CLOSURE ANGLES AND CLOSURE PLATES**

A. Fabricate from 2 mm (0.074-inch) thick stainless steel or aluminum.

B. Provide continuous closure angles and closure plates on inside head, jambs and sill of exterior wall louvers.

C. Secure angles and plates to louver frames with screws, and to masonry or concrete with fasteners as specified.

**2.4 WIRE GUARDS**

A. Provide wire guards on outside of all exterior louvers, except on exhaust air louvers.

B. Fabricate frames from 1.5 mm (0.059-inch) thick stainless steel designed to retain wire mesh.

C. Wire mesh shall be woven from not less than 1.3 mm (0.05-inch) diameter stainless steel wire in 13 mm (1/2-inch) square mesh.

D. Miter corners and join by concealed corner clips or locks extending about 57 mm (2-1/4 inches) into rails and stiles. Equip wire guards over four feet in height with a mid-rail constructed as specified for frame components.

E. Fasten frames to outside of louvers with aluminum or stainless steel devices designed to allow removal and replacement without damage to the wire guard or the louver.

**2.5 EXTERIOR DOOR LOUVERS (NOT USED)**

**2.6 INTERIOR DOOR LOUVERS (NOT USED)**

**2.7 WALL VENTS**

A. Fabricate exterior wall vents from either 4.7 mm (0.187-inch) thick aluminum plate of 6 mm (1/4-inch) thick cast iron, perforated in diamond lattice pattern, with not over 19 mm (3/4-inch) openings.

B. Vents shall have aluminum screen frame with aluminum alloy insect screening mounted on back of vent by means of 19 mm x 5 mm (3/4-inch by 3/16-inch) top and bottom bars screwed to grille.

C. Vent Frames In Masonry: Fabricate of 45 mm x 30 mm x 5 mm (1-3/4 inch by 1-1/4 inch by 3/16-inch) steel angles bolted with 6 mm (1/4-inch) diameter expansion bolts at jambs.

**2.8 AIR INTAKE VENTS**

A. Fabricate exterior louvered wall ventilators for fresh air intake for air conditioning units from extruded aluminum, ASTM B221. Form with integral horizontal louvers and frame, with drip extending beyond face of wall and integral water stops.

B. Provide aluminum closures where shown for inside face of dummy vents.

C. Provide 0.8 m (0.032-inch) thick aluminum sleeves where shown.

**2.9 BRICK VENTS (NOT USED)**

**2.10 FINISH**

A. In accordance with NAAMM Metal Finishes Manual: AMP 500-505

B. Aluminum Louvers:

1. Anodized finish

a. AA-M1X Mill finish, as fabricated.

2. Organic Finish: AAMA 2605 (Fluorocarbon coating).

C. Aluminum Wall Vents and Brick Vents: Sand blasted satin finish.

D. Stainless Steel: Mechanical finish No. 4 in accordance with NAAMM Metal Finishes Manual.

E. Sheet Steel: Baked-on or oven dried shop prime coat.

1. Paint interior surfaces of lightproof louvers with two additional finish shop coats of baked-on flat black enamel.

2. Finish painting of exposed surfaces of shop primed louvers is specified in Section 09 91 00, PAINTING.

F. Steel: Surfaces of steel work, for which no other finish is specified, shall be cleaned free from scale, rust, oil and grease, and then given a light colored prime paint after fabrication, except ferrous metals concealed in finished work. Paint all contact surfaces of assembled work (except welded contact surfaces) with an additional shop coat of similar paint.

**2.11 PROTECTION**

A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with a heavy coat of bituminous paint (complete coverage), or by separating the contact surfaces with a performed synthetic rubber tape having pressure sensitive adhesive coating on one side.

B. Isolate the aluminum from plaster, concrete and masonry by coating aluminum with zinc-chromate primer.

C. Protect finished surfaces from damage during fabrication, erection, and after completion of the work.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Set work accurately, in alignment and where shown. Items shall be plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.

B. Furnish setting drawings and instructions for installation of anchors and for the positioning of items having anchors to be built into masonry construction. Provide temporary bracing for such items until masonry is set.

C. Provide anchoring devices and fasteners as shown and as necessary for securing louvers and vents to building construction as specified. Power actuated drive pins may be used, except for removal items and where members would be deformed or substrate damaged by their use.

D. Generally, set wall louvers and vents in masonry walls during progress of the work. If wall louvers and vents are not delivered to job in time for installation in prepared openings, make provision for later installation. Set in cast-in-place concrete in prepared openings.

**3.2 CLEANING AND ADJUSTING**

A. After installation, all exposed prefinished and plated items and all items fabricated from stainless steel and aluminum shall be cleaned as

recommended by the manufacturer and protected from damage until completion of the project.

B. All movable parts, including hardware, shall be cleaned and adjusted to operate as designed without binding or deformation of the members, so as to be centered in the opening of frame, and where applicable, to have all contact surfaces fit tight and even without forcing or warping the components.

- - - E N D - - -

**SECTION 09 06 00**
**SCHEDULE FOR FINISHES**

# SECTION 09 06 00-SCHEDULE FOR FINISHES

VAMC: CLEMENT J. ZABLOCKI
Location: Milwaukee, Wisconsin
Project no. and Name: 695-12-117 (Replace 112 Generator)
Submission
Date: May 25, 2012

# SECTION 09 06 00
# SCHEDULE FOR FINISHES

## PART I – GENERAL

### 1.1 DESCRIPTION

This section contains a coordinated system in which requirements for materials specified in other sections shown are identified by abbreviated material names and finish codes in the room finish schedule or shown for other locations.

### 1.2 MANUFACTURERS

Manufacturer’s trade names and numbers used herein are only to identify colors, finishes, textures and patterns. Products of other manufacturer’s equivalent to colors, finishes, textures and patterns of manufacturers listed that meet requirements of technical specifications will be acceptable upon approval in writing by contracting officer for finish requirements.

### 1.3 SUBMITALS

Submit in accordance with SECTION 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES—provide quadruplicate samples for color approval of materials and finishes specified in this section.

1. DIGITAL COLOR PHOTOS-INTERIOR VIEWS:

| Room Number and Name | Item/View to be Photographed |
|---|---|
| 1. | |
| 2. | |
| 3. | |
| 4. | |

**1.4 APPLICABLE PUBLICATIONS**

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.

B. MASTER PAINTING INSTITUTE: (MPI)

2001.....Architectural Painting Specification Manual

**PART 2- PRODUCTS**

**2.1 DIGITAL COLOR PHOTOS**

A. Size 24 x 35 mm.

B. Labeled for:

1. Building name and Number.
2. Room Name and Number.

**2.2 DIVISION 31 - EARTHWORK**

A. SECTION 32 31 13, CHAIN LINK FENCES AND GATES (NOT USED)

B. SECTION 32 14 16, BRICK UNIT PAVING. (NOT USED)

C. SECTION 32 17 23, PAVEMENT MARKINGS. (NOT USED)

D. ASPHALTIC BLOCK PAVER (NOT USED)

E. CONCRETE PAVERS (NOT USED)

F. BOLLARDS (NOT USED)

G. SITE AND STREET FURNISHINGS (NOT USED)

**2.3 DIVISION 03 – CONCRETE (NOT USED_**

A. SECTION 03 30 00, CAST IN PLACE CONCRETE (NOT USED)

B. SECTION 03 45 00, PRECAST ARCHITECTURAL CONCRETE (NOT USED)

**2.4 DIVISON 04 – MASONRY**

A. Section 04 05 13, MASONRY MORTARING and Section 04 05 16, MASONRY GROUTING

| Finish Code | Manufacturer | Mfg. Color Name |
|---|---|---|
| | | |
| | | |

B. Section 04 20 00, UNIT MASONRY

1. FACE BRICK (FB) (NOT USED)

| Finish Code | Size (H x D x L) | Pattern | Manufacturer | Mfg. Color Name/No. |
|---|---|---|---|---|
| | | | | |

2.CONCRETE MASONRY UNIT (CMU)

| Type | Size (H x D x L) | Pattern | Finish | Mfg. Color Name/No. |
|---|---|---|---|---|
| CMU Standard | 8″ CMU<br>7 5/8″x 7 5/8″x 15 5/8″ | | Natural Finish (NF) | |

**2.5 DIVISION 05 – METALS**

A. SECTION 05 12 00, STRUCTURAL STEEL FRAMING (NOT USED)

B. SECTION 05 21 00, STEEL JOIST FRAMING (NOT USED)

C. SECTION 05 36 00, COMPOSITE METAL DECKING (NOT USED)

D. SECTION 05 40 00, COLD-FORMED METAL FRAMING (NOT USED)

E. SECTION 05 50 00, METAL FABRICATION

| Item | Finish |
|---|---|
| Channel Door Frames | Painted (P) |
| Guard Angles for Overhead Doors | Painted (P) |
| Edge Guards Angles for Opening in Slabs | Painted (P) |
| Steel Covers and Frames for pits and trenches | Painted (P) |
| Steel Grating and Frames | Painted (P) |
| Steel Plank Gratings | Painted (P) |
| Loose Lintels | Painted (P) |
| Steel Plate Door Sill | Painted (P) |
| Steel Ladders | Painted (P) |
| Steel Ladder Rungs | Painted (P) |
| Floor Access Door | Painted (P) |

F. SECTION 05 51 00, METAL STAIRS (NOT USED)

G. SECTION 07 95 13, EXPANSION JOINT COVER ASSEMBLIES (NOT USED)

**2.6 DIVISION 06 WOOD, PLASTICS, AND COMPOSITES**

A. SECTION 06 10 00, ROUGH CARPENTRY (NOT USED)

B. SECTION 06 20 00, FINISH CARPENTRY (NOT USED)

**2.7 DIVISION 07 - THERMAL AND MOISTURE PROTECTION**

A. SECTION 07 31 13, ASPHALT SHINGLES (NOT USED)

B. SECTION 07 31 29.13, WOOD SHINGLES (NOT USED)

C. SECTION 07 31 26, SLATE SHINGLES (NOT USED)

D. SECTION 07 32 13, CLAY ROOF TILES (NOT USED)

E. SECTION 07 40 00, ROOFING AND SIDING PANELS

| Type | Shape | Ext. Finish | Int. Finish | Manufacturer | Mfg. Color Name/No. |
|---|---|---|---|---|---|
| 24 Gage Metal Wall Panels | | Standard Smooth Finish | Standard Smooth Finish | MBCI Corporation | Match Existing |

F. SECTION 07 24 00, EXTERIOR INSULATION AND FINISH SYSTEMS (NOT USED)

G. SECTION 07 54 19, POLYVINYL-CHLORIDE ROOFING (NOT USED)

H. SETION 07 53 23, ETHYLENE-PROPYLENE-DIENE-MONOMER ROOFING (NOT USED)

I. SECTION 07 57 13, SPRAYED POLYURETHANE FOAM ROOFING (NOT USED)

J. SECTION 07 56 00, FLUID-APPLIED ROOFING (NOT USED)

K. BUILT-UP BITUMINOUS ROOFING (07 51 00 ) (NOT USED)

L. SECTION 07 14 21, LATEX MASTIC DECK COVERING (NOT USED)

M. SECTION 07 18 13, PEDESTRIAN TRAFFIC COATINGS (NOT USED)

N. SECTION 07 60 00, FLASHING AND SHEET METAL

| Item | Material | Finish |
|---|---|---|
| Prefinished Aluminum Sill/Head Flashing | Prefinished Aluminum | Finish to Match Existing Metal Wall Panels |

O. SECTION 07 61 16, BATTEN SEAM SHEET METAL ROOFING (NOT USED)

P. STANDING SEAM ROOFING (NO VA GUIDE SECTION) (NOT USED)

Q. SECTION 07 71 00 / 07 72 00, ROOF SPECIALITIES AND ACCESSORIES (NOT USED)

R. SECTION 07 92 00, JOINT SEALANTS

| Location | Color | Manufacturer | Manufacturer Color |
|---|---|---|---|
| Perimeter of Door & Louver Openings | | Sonneborn | Sonolastic HP-1 |
| CMU Control Joints | | Sonneborn | Sonolastic HP-1 |
| New Walls to New Walls | | Sonneborn | Sonolastic HP-1 |
| New Walls to Existing Walls | | Sonneborn | Sonolastic HP-1 |

**2.8 DIVISION 08 - OPENINGS**

A. SECTION 08 11 13, HOLLOW METAL DOORS AND FRAMES

| Paint both sides of door and frames same color including ferrous metal louvers, and hardware attached to door | |
|---|---|
| Component | Color of Paint Type and Gloss |
| Door | Benjamin Moore (P-1) |
| Frame | Benjamin Moore (P-2) |

B. SECTION 08 14 00, WOOD DOORS (NOT USED)

C. SECTION 08 31 10, FLOOR ACCESS DOORS (NOT USED)

D. SECTION 08 11 73, SLIDING METAL FIRE DOORS (NOT USED)

E. SECTION 08 33 00, COILING DOORS AND GRILLES (NOT USED)

F. SECTION 08 33 13, COILING COUNTER DOORS (NOT USED)

G. SECTION Doors 08 35 13.13, Accordion Folding (NOT USED)

H. SECTION 08 38 16, FLEXIBLE TRAFFIC DOORS (NOT USED)

I. SECTION 08 36 13, SECTIONAL DOORS (NOT USED)

J. SECTION 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS (NOT USED)

K. SECTION 08 42 33, REVOLVING DOOR ENTRANCES (NOT USED)

L. SECTION 08 51 23, STEEL WINDOW (NOT USED)

M. SECTION 08 51 13, ALUMINUM WINDOWS (NOT USED)

N. SECTION 08 51 13.11, SIDE-HINGED ALUMINUM WINDOWS (NOT USED)

O. SECTION 08 51 69.11, ALUMINUM STORM WINDOWS (NOT USED)

P. SECTION 08 63 00, METAL-FRAMED SKYLIGHTS (NOT USED)

Q. SECTION 08 51 69.11, ALUMINUM STORM WINDOWS (NOT USED)

R. SECTION 08 56 19, PASS WINDOWS (NOT USED)

S. WINDOW SILLS (NOT USED)

T. WINDOW STOOLS (NOT USED)

U. SECTION 08 71 00, BUILDERS HARDWARE

| Item | Material | Finish |
|---|---|---|
| Hinges | Metal | Stainless Steel (630) |
| Door Closers | Metal | Stainless Steel (630) |
| Closer/ Holder | Metal | Stainless Steel (630) |
| Door Holders | Metal | Stainless Steel (630) |
| Lock/ Latches | Metal | Stainless Steel (630) |
| Door Edging | Metal | Stainless Steel (630) |
| Exit Device | Metal | Stainless Steel (630) |
| Coordinators | Metal | Stainless Steel (630) |
| Weather Strip | Metal | Stainless Steel (630) |
| Threshold | Metal | Stainless Steel (630) |

V. SECTION 08 80 00, GLAZING

| Glazing Type | Manufacturer | Mfg. Color Name/No. |
|---|---|---|
| GL-1(Clear Tempered) | PPG Industries, Inc. | Solarban 60 |

W. SECTION 08 44 13, GLAZED ALUMINUM CURTAIN WALLS (NOT USED)

**2.9 DIVISION 09 - FINISHES**

A. SECTION 09 24 00, PORTLAND CEMENT PLASTERING (NOT USED)

B. SECTION 09 30 13, CERAMIC TILING (NOT USED)

C. SECTION 09 66 13, PORTLAND CEMENT TERRAZZO FLOORING (NOT USED)

D. SECTION 09 66 16, TERRAZZO TILE (TT) (NOT USED)

E. SECTION 09 66 16, TERRAZZO TILE GROUT (NOT USED)

F. SECTION 09 51 00, ACOUSTICAL CEILINGS (NOT USED)

G. SECTION 09 54 23, LINEAR METAL CEILINGS (LMC) (NOT USED)

H. SECTION 09 63 13 / 09 63 40, BRICK FLOORING / STONE FLOORING (NOT USED)

I. SECTION 09 65 19, RESILIENT TILE FLOORING (NOT USED)

J. SECTION 09 65 16, VINYL SHEET FLOORING (VSF) (NOT USED)

K. SECTION 09 65 16, VINYL SHEET FLOORING, HEAT WELDED SEAMS (WSF) (NOT USED)

L. SECTION 09 65 13, RESILIENT BASE STAIR TREADS AND ACCESSORIES (NOT USED)

M. SECTION 09 68 00, CARPET (CP) (NOT USED)

N. SECTION 09 68 00, CARPET MODULES (CFT) (NOT USED)

O. SECTION 09 68 21, CARPET ATHELETIC FLOORING (CAF) (NOT USED)

P. SECTION 09 77 01, LATEX MASTIC FLOORING (LM) (NOT USED)

Q. SECTION 09 67 23, EPOXY RESINOUS FLOORING (ERF) (NOT USED)

R. SECTION 09 96 59, HIGH-BUILD GLASED COATING (SC) (NOT USED)

S. SECTION 09 94 19, MULTI-COLOR COATING (MC) (NOT USED)

T. SECTION 09 91 00, PAINT AND COATINGS

1. MPI Gloss and Sheen Standards

| | | Gloss @60 | Sheen @85 |
|---|---|---|---|
| Gloss Level 1 | a traditional matte finish-flat | max 5 units, and | max 10 units |
| Gloss Level 2 | a high side sheen flat-“a velvet-like” finish | max 10 units, and | 10-35 units |
| Gloss Level 3 | a traditional “egg-shell like” finish | 10-25 units, and | 10-35 units |
| Gloss Level 4 | a “satin-like” finish | 20-35 units, and | min. 35 units |
| Gloss Level 5 | a traditional semi-gloss | 35-70 units | |
| Gloss Level 6 | a traditional gloss | 70-85 units | |

Gloss level 7 a high gloss more than 85 units

| 2. Paint code | Gloss | Manufacturer | Mfg. Color Name/No. |
|---|---|---|---|
| P-1 | Pro Mar 200 Egg Shell | Benjamin Moore | Ivory White (925) |
| P-2 | Semi Gloss | Benjamin Moore | Woodcliff Lake (980) |

U. SECTION 09 72 16, VINYL COATED FABRIC WALLCOVERING (W) (NOT USED)

V. SECTION 09 72 16, EDGE GUARD OR TRIM (W) (NOT USED)

W. SECTION 09 72 31, POLYPROPYLENE FABRIC WALLCOVERING (PFW) (NOT USED)

X. SECTION 09 72 31, EDGE GUARDS (PFW) (NOT USED)

Y. SECTION 09 72 31, WAINSCOT CAP (PEW) (NOT USED)

Z. SECTION 09 84 33, ACCOUSTICAL WALL PANELLING (AWF) (NOT USED)

**2.10 DIVISION 10 - SPECIALTIES**

A. SECTION 10 11 13 / 10 11 23, CHALKBOARDS / TACKBOARDS (NOT USED)

B. SECTION 10 21 23, HOSPITAL CUBILCE CURTAINS AND INTRAVENOUS SUPPORT TRACKS (NOT USED)

C. SECTION 10 22 26.13, ACCORDION FOLDING PARTITION (AFP) (NOT USED)

D. SECTION 10 21 16, PREFABRICATED SHOWER AND DRESSING COMPARTMENTS (NOT USED)

E. SECTION 08 90 00, LOUVERS AND WALL VENTS

| Item | Material | Finish | Manufacturer | Mfg. Color Name/No. |
|---|---|---|---|---|
| Exterior Wall Louver | Galvanized Steel | Color & Finish to match existing Metal Wall Panels. | | |
| | | | | |

F. SECTION 10 26 00, WALL GUARDS AND CORNER GUARDS (NOT USED)

G. SECTION 09 69 00, ACCESS FLOORING (AF) (NOT USED)

H. SECTION 10 28 00 / 10 14 00 / 11 17 36, MISCELLANEOUS SPECIALITIES (NOT USED)

I. SECTION 10 13 00 / 10 14 00, EXTERIOR SIGNS (NOT USED)

J. SECTION 10 13 00 / 10 14 00, INTERIOR SIGNS (NOT USED)

K. SECTION 10 44 13, FIRE EXTNGUISHER CABINETS (NOT USED)

L. SECTION 10 22 13, WIRE MESH PARTITIONS (NOT USED)

M. SECTION 10 22 19.13, MOVABLE METAL PARTITIONS (NOT USED)

N. SECTION 10 22 26.13, FOLDING PANEL PARTITION (FP) (NOT USED)

O. SECTION 10 28 00, TOILET AND BATH ACCESSORIES

P. SECTION 10 28 00, TOILET AND BATH ACCESSORIES (NOT USED)

Q. SECTION 10 28 00, CUSTOM TOILET ACCESSORIES (NOT USED)

**2.11 DIVISION II – EQUIPMENT**

A. SECTION 11 12 00, PARKING CONTROL EQUIPMENT (NOT USED)

B. SECTION 08 11 61 / 08 56 66, DETENTION AND PROTECTION SCREENS (NOT USED)

C. SECTION 11 41 00, FOOD SERVICE SELF CONTAINED REFRIGERATION EQUIPMENT (NOT USED)

D. SECTION 11 40 21, FOOD SERVICE EQUIPMENT-UTILITY DISTRIBUTION SYSTEMS (NOT USED)

E. SECTION 11 26 00, UNIT KITCHEN TYPE 22 (NOT USED)

F. SECTION 11 27 00, PHOTOGRAPHIC PROCESSING EQUIPMENT (NOT USED)

G. SECTION 11 53 53, BIOLOGICAL SAFETY CABINETS (NOT USED)

H. SECTION 11 53 13, LAB FUME HOODS (NOT USED)

I. SECTION 13 21 29, LABORATORY CONTROLLED TEMPERATURE ROOMS AND REFRIGERATORS (NOT USED)

**2.12 DIVISION 12- FURNISHINGS**

A. SECTION 12 31 00, METAL CASEWORK (NOT USED)

B. SECTION 12 32 00, WOOD CASEWORK (NOT USED)

C. SECTION 12 36 00, COUNTERTOPS AND ACCESSORIES (NOT USED)

D. SECTION 12 34 00, MOLDED PLASTIC CASEWORK (NOT USED)

E. SECTION 12 22 16, DRAPERY HARDWARE (NOT USED)

F. SECTION 12 24 00, WINDOW SHADES (NOT USED)

G. SECTION 12 24 21, LIGHTPROOF SHADES

H. SECTION 12 56 70.11, SUSPENDED TABLE (NOT USED)

**2.13 DIVISION 13 - SPECIAL CONSTRUCTION**

A. SECTION 11 41 21 / 11 53 23 / 11 78 13, WALK – IN REFRIGERATORS AND FREEZERS (NOT USED)

B. SECTION 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON STRUCTURAL COMPONENETS (NOT USED)

C. SECTION 13 34 19, PRE ENGINEERED METAL BUILDINGS (NOT USED)

D. SECTION 22 12 16, ELEVATED WATER TANK (NOT USED)

E. SECTION 13 17 23.11, THERAPEUTIC POOL ACCESSORIES (NOT USED)

F. SECTION 14 21 00, ELECTRIC TRACTION ELEVATORS (NOT USED)

G. SECTION 14 24 00, HYDRAULIC ELEVATORS (NOT USED)

**2.15 DIVISION 22 – PLUMBING (NOT USED)**

**2.16 DIVISON 26 – ELECTRICAL (NOT USED)**

**PART III EXECUTION**

**3.1 FINISH SCHEDULES & MISCELLANEOUS ABBREVIATIONS**

| FINISH SCHEDULE & MISCELLANEOUS ABBREVIATIONS | |
|---|---|
| Term | Abbreviation |
| | |
| Access Flooring | AF |
| Accordion Folding Partition | AFP |
| Acoustical Ceiling | AT |
| Acoustical Ceiling, Special Faced | AT (SP) |
| Acoustical Metal Pan Ceiling | AMP |
| Acoustical Wall Panel | AWP |
| Acoustical Wall Treatment | AWT |
| Acoustical Wallcovering | AWF |
| Anodized Aluminum Colored | AAC |
| Anodized Aluminum Natural Finish | AA |
| Baked On Enamel | BE |
| Brick Face | BR |
| Brick Flooring | BF |
| Brick Paving | BP |
| Carpet | CP |
| Carpet Athletic Flooring | CAF |
| Carpet Module Tile | CPT |
| Ceramic Glazed Facing Brick | CGFB |
| Ceramic Mosaic Tile | FTCT |
| Concrete | C |
| Concrete Masonry Unit | CMU |
| Divider Strips Marble | DS MB |
| Epoxy Coating | EC |
| Epoxy Resin Flooring | ERF |
| Existing | E |
| Exposed Divider Strips | EXP |
| Exterior | EXT |
| Exterior Finish System | EFS |
| Exterior Paint | EXT-P |
| Exterior Stain | EXT-ST |
| Fabric Wallcovering | WF |
| Facing Tile | SCT |
| Feature Strips | FS |
| Floor Mats & Frames | FM |
| Floor Tile, Mosaic | FT |
| Fluorocarbon | FC |
| Folding Panel Partition | FP |
| Foot Grille | FG |
| Glass Masonry Unit | GUMU |
| Glazed Face CMU | GCMU |
| Glazed Structural Facing Tile | SFTU |
| Granite | GT |
| Gypsum Wallboard | GWB |
| High Glazed Coating | SC |
| Latex Mastic Flooring | LM |
| Linear Metal Ceiling | LMC |
| Linear Wood Ceiling | LWC |
| Marble | MB |
| Material | MAT |
| Mortar | M |
| Multi-Color Coating | MC |
| Natural Finish | NF |
| Paint | P |

| | |
|---|---|
| Paver Tile | PVT |
| Perforated Metal Facing (Tile or Panels) | PMF |
| Plaster | PL |
| Plaster High Strength | HSPL |
| Plaster Keene Cement | KC |
| Plastic Laminate | HPDL |
| Polypropylene Fabric Wallcovering | PFW |
| Porcelain Paver Tile | PPT |
| Quarry Tile | QT |
| Radiant Ceiling Panel System | RCP |
| Resilient Stair Tread | RST |
| Rubber Base | RB |
| Rubber Tile Flooring | RT |
| Spandrel Glass | SLG |
| Stain | ST |
| Stone Flooring | SF |
| Structural Clay | SC |
| Suspension Decorative | SDG |

| | |
|---|---|
| Grids<br>Grids | |
| Terrazzo Portland Cement | PCT |
| Terrazzo Tile | TT |
| Terrazzo, Thin Set | |
| Textured Gypsum Ceiling Panel | TGC |
| Textured Metal Ceiling Panel | TMC |
| Thin set Terrazzo | TST |
| Veneer Plaster | VP |
| Vinyl Base | VB |
| Vinyl Coated Fabric Wallcovering | W |
| Vinyl Composition Tile | VCT |
| Vinyl Sheet Flooring | VSF |
| Vinyl Sheet Flooring (Welded Seams) | WSF |
| Wall Border | WB |
| Wood | WD |

**3.2 FINSIH SCHEDULE SYMBOLS**

Symbol Definition
** Same finish as adjoining walls
- No color required
E Existing
XX To match existing
EFTR Existing finish to remain
RM Remove

3.3 ROOM FINISH SCHEDULE

A. ROOM FINISH SCHEDULE

| Room No. and Name | | FLOOR | | | BASE | | WALL | | WAINSCOT | | CEILING | REMARKS |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 100 GENERATOR ROOM | N E W | E | N/A | N | N/A | N/A | E | P-1 | N/A | N/A | EXPOSED STRUCTURE | |
| | | | | E | N/A | N/A | GWB | P-1 | N/A | N/A | | |
| | | | | S | N/A | N/A | GWB | P-1 | N/A | N/A | | |
| | | | | W | N/A | N/A | CMU | P-1 | N/A | N/A | | |
| 101 EQUIPMENT ROOM | N E W | E | N/A | N | N/A | N/A | E | P-1 | N/A | N/A | EXPOSED STRUCTURE | |
| | | | | E | N/A | N/A | CMU | P-1 | N/A | N/A | | |
| | | | | S | N/A | N/A | GWB | P-1 | N/A | N/A | | |
| | | | | W | N/A | N/A | CMU | P-1 | N/A | N/A | | |
| 102 I.T. ROOM | N E W | E | N/A | N | N/A | N/A | CMU | P-1 | N/A | N/A | EXPOSED STRUCTURE | |
| | | | | E | N/A | N/A | CMU | P-1 | N/A | N/A | | |
| | | | | S | N/A | N/A | GWB | P-1 | N/A | N/A | | |
| | | | | W | N/A | N/A | CMU | P-1 | N/A | N/A | | |

**--- E N D---**

# SECTION 09 22 16
# NON-STRUCTURAL METAL FRAMING

## PART 1 - GENERAL

### 1.1 DESCRIPTION

This section specifies steel studs wall systems, shaft wall systems, ceiling or soffit suspended or furred framing, wall furring, fasteners, and accessories for the screw attachment of gypsum board, plaster bases or other building boards.

### 1.2 RELATED WORK

A. Acoustical Sealants: Section 07 92 00, JOINT SEALANTS.

B. GYPSUM BOARD WALL PARTITIONS Section 09 29 00, GYPSUM BOARD.

### 1.3 TERMINOLOGY

A. Description of terms shall be in accordance with ASTM C754, ASTM C11, ASTM C841 and as specified.

B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by beams, trusses, or bar joists. In interstitial spaces with walk-on floors the underside of the walk-on floor is the underside of structure overhead.

C. Thickness of steel specified is the minimum bare (uncoated) steel thickness.

### 1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Studs, runners and accessories.
2. Hanger inserts.
3. Channels (Rolled steel).
4. Furring channels.
5. Screws, clips and other fasteners.

C. Shop Drawings:

1. Typical ceiling suspension system.
2. Typical metal stud and furring construction system including details around openings and corner details.
3. Typical shaft wall assembly
4. Typical fire rated assembly and column fireproofing showing details of construction same as that used in fire rating test.

D. Test Results: Fire rating test designation, each fire rating required for each assembly.

**1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE**

In accordance with the requirements of ASTM C754.

**1.6 APPLICABLE PUBLICATIONS**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society For Testing And Materials (ASTM)

A123-09.....Zinc (Hot-dip Galvanized) Coatings on Iron and Steel Products

A653/A653M-09.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot-Dip Process

A641-09.....Zinc-Coated (Galvanized) Carbon Steel Wire

C11-10.....Terminology Relating to Gypsum and Related Building Materials and Systems

C635-07.....Manufacture, Performance, and Testing of Metal Suspension System for Acoustical Tile and Lay-in Panel Ceilings

C636-06.....Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels

C645-09.....Non-Structural Steel Framing Members

C754-09.....Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products

C841-03(R2008).....Installation of Interior Lathing and Furring

C954-07.....Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness

C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs

E580-09.....Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Moderate Seismic Restraint.

**PART 2 - PRODUCTS**

**2.1 PROTECTIVE COATING**

Galvanize steel studs, runners (track), rigid (hat section) furring channels, "Z" shaped furring channels, and resilient furring channels, with coating designation of G-60 minimum, per ASTM 123.

**2.2 STEEL STUDS AND RUNNERS (TRACK)**

A. ASTM C645, modified for thickness specified and sizes as shown.
   1. Use ASTM A525 steel, 0.8 mm (0.0329-inch) thick bare metal (33 mil).
   2. Runners same thickness as studs.
B. Provide not less than two cutouts in web of each stud, approximately 300 mm (12 inches) from each end, and intermediate cutouts on approximately 600 mm (24-inch) centers.
C. Doubled studs for openings and studs for supporting concrete backer-board.
D. Studs 3600 mm (12 feet) or less in length shall be in one piece.
E. Shaft Wall Framing:
   1. Conform to rated wall construction.
   2. C-H Studs.
   3. E Studs.
   4. J Runners.
   5. Steel Jamb-Strut.

**2.3 FURRING CHANNELS**

A. Rigid furring channels (hat shape): ASTM C645.
B. Resilient furring channels:
   1. Not less than 0.45 mm (0.0179-inch) thick bare metal.
   2. Semi-hat shape, only one flange for anchorage with channel web leg slotted on anchorage side, channel web leg on other side stiffens fastener surface but shall not contact anchorage surface other channel leg is attached to.
C. "Z" Furring Channels:
   1. Not less than 0.45 mm (0.0179-inch)-thick bare metal, with 32 mm (1-1/4 inch) and 19 mm (3/4-inch) flanges.
   2. Web furring depth to suit thickness of insulation with slotted perforations.
D. Rolled Steel Channels: ASTM C754, cold rolled; or, ASTM C841, cold rolled.

**2.4 FASTENERS, CLIPS, AND OTHER METAL ACCESSORIES**

A. ASTM C754, except as otherwise specified.

B. For fire rated construction: Type and size same as used in fire rating test.

C. Fasteners for steel studs thicker than 0.84 mm (0.033-inch) thick. Use ASTM C954 steel drill screws of size and type recommended by the manufacturer of the material being fastened.

D. Clips: ASTM C841 (paragraph 6.11), manufacturer's standard items. Clips used in lieu of tie wire shall have holding power equivalent to that provided by the tie wire for the specific application.

E. Concrete ceiling hanger inserts (anchorage for hanger wire and hanger straps): Steel, zinc-coated (galvanized), manufacturers standard items, designed to support twice the hanger loads imposed and the type of hanger used.

F. Tie Wire and Hanger Wire:

1. ASTM A641, soft temper, Class 1 coating.
2. Gage (diameter) as specified in ASTM C754 or ASTM C841.

G. Attachments for Wall Furring:

1. Manufacturers standard items fabricated from zinc-coated (galvanized) steel sheet.
2. For concrete or masonry walls: Metal slots with adjustable inserts or adjustable wall furring brackets. Spacers may be fabricated from 1 mm (0.0396-inch) thick galvanized steel with corrugated edges.

H. Power Actuated Fasteners: Type and size as recommended by the manufacturer of the material being fastened.

**2.5 SUSPENDED CEILING SYSTEM FOR GYPSUM BOARD (OPTION)**

A. Conform to ASTM C635, heavy duty, with not less than 35 mm (1-3/8 inch) wide knurled capped flange face designed for screw attachment of gypsum board.

B. Wall track channel with 35 mm (1-3/8 inch) wide flange.

**PART 3 - EXECUTION**

**3.1 INSTALLATION CRITERIA**

A. Where fire rated construction is required for walls, partitions, columns, beams and floor-ceiling assemblies, the construction shall be same as that used in fire rating test.

B. Construction requirements for fire rated assemblies and materials shall be as shown and specified, the provisions of the Scope paragraph (1.2) of ASTM C754 and ASTM C841 regarding details of construction shall not apply.

**3.2 INSTALLING STUDS**

A. Install studs in accordance with ASTM C754, except as otherwise shown or specified.

B. Space studs not more than 610 mm (24 inches) on center.

C. Cut studs 6 mm to 9 mm (1/4 to 3/8-inch) less than floor to underside of structure overhead when extended to underside of structure overhead.

D. Where studs are shown to terminate above suspended ceilings, provide bracing as shown or extend studs to underside of structure overhead.

E. Extend studs to underside of structure overhead for fire, rated partitions, smoke partitions, shafts, and sound rated partitions.

F. NOT USED

G. Openings:

1. Frame jambs of openings in stud partitions and furring with two studs placed back to back or as shown.
2. Fasten back to back studs together with 9 mm (3/8-inch) long Type S pan head screws at not less than 600 mm (two feet) on center, staggered along webs.
3. Studs fastened flange to flange shall have splice plates on both sides approximately 50 X 75 mm (2 by 3 inches) screwed to each stud with two screws in each stud. Locate splice plates at 600 mm (24 inches) on center between runner tracks.

H. Fastening Studs:

1. Fasten studs located adjacent to partition intersections, corners and studs at jambs of openings to flange of runner tracks with two screws through each end of each stud and flange of runner.
2. Do not fasten studs to top runner track when studs extend to underside of structure overhead.

I. Chase Wall Partitions:

1. Locate cross braces for chase wall partitions to permit the installation of pipes, conduits, carriers and similar items.
2. Use studs or runners as cross bracing not less than 63 mm (2-1/2 inches wide).

J. Form building seismic or expansion joints with double studs back to back spaced 75 mm (three inches) apart plus the width of the seismic or expansion joint.

K. Form control joint, with double studs spaced 13 mm (1/2-inch) apart.

**3.3 INSTALLING WALL FURRING FOR FINISH APPLIED TO ONE SIDE ONLY**

A. In accordance with ASTM C754, or ASTM C841 except as otherwise specified or shown.

B. Wall furring-Stud System:
   1. Framed with 63 mm (2-1/2 inch) or narrower studs, 600 mm (24 inches) on center.
   2. Brace as specified in ASTM C754 for Wall Furring-Stud System or brace with sections or runners or studs placed horizontally at not less than three foot vertical intervals on side without finish.
   3. Securely fasten braces to each stud with two Type S pan head screws at each bearing.
C. Direct attachment to masonry or concrete; rigid channels or "Z" channels:
   1. Install rigid (hat section) furring channels at 600 mm (24 inches) on center, horizontally or vertically.
   2. Install "Z" furring channels vertically spaced not more than 600 mm (24 inches) on center.
   3. At corners where rigid furring channels are positioned horizontally, provide mitered joints in furring channels.
   4. Ends of spliced furring channels shall be nested not less than 200 mm (8 inches).
   5. Fasten furring channels to walls with power-actuated drive pins or hardened steel concrete nails. Where channels are spliced, provide two fasteners in each flange.
   6. Locate furring channels at interior and exterior corners in accordance with wall finish material manufacturers printed erection instructions. Locate "Z" channels within 100 mm (4 inches) of corner.
D. Installing Wall Furring-Bracket System: Space furring channels not more than 400 mm (16 inches) on center.

**3.4 INSTALLING SUPPORTS REQUIRED BY OTHER TRADES**

A. Provide for attachment and support of electrical outlets, plumbing, laboratory or heating fixtures, recessed type plumbing fixture accessories, access panel frames, wall bumpers, wood seats, toilet stall partitions, dressing booth partitions, urinal screens, chalkboards, tackboards, wall-hung casework, handrail brackets, recessed fire extinguisher cabinets and other items like auto door buttons and auto door operators supported by stud construction.
B. Provide additional studs where required. Install metal backing plates, or special metal shapes as required, securely fastened to metal studs.

**3.5 INSTALLING SHAFT WALL SYSTEM (NOT USED)**

**3.6 INSTALLING FURRED AND SUSPENDED CEILINGS OR SOFFITS (NOT USED)**

**3.7 TOLERANCES**

A. Fastening surface for application of subsequent materials shall not vary more than 3 mm (1/8-inch) from the layout line.

B. Plumb and align vertical members within 3 mm (1/8-inch.)

C. Level or align ceilings within 3 mm (1/8-inch.)

- - - E N D - - -

# SECTION 09 29 00
# GYPSUM BOARD

## PART 1 - GENERAL

### 1.1 DESCRIPTION

This section specifies installation and finishing of gypsum board.

### 1.2 RELATED WORK

A. Installation of steel framing members for walls, partitions, furring, soffits, and ceilings: Section 09 22 16, NON-STRUCTURAL METAL FRAMING.

B. Acoustical Sealants: Section 07 92 00, JOINT SEALANTS.

### 1.3 TERMINOLOGY

A. Definitions and description of terms shall be in accordance with ASTM C11, C840, and as specified.

B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by the trusses or bar joists.

C. "Yoked": Gypsum board cut out for opening with no joint at the opening (along door jamb or above the door).

### 1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:
   1. Cornerbead and edge trim.
   2. Finishing materials.
   3. Laminating adhesive.
   4. Gypsum board, each type.

C. Shop Drawings:
   1. Typical gypsum board installation, showing corner details, edge trim details and the like.
   2. Typical sound rated assembly, showing treatment at perimeter of partitions and penetrations at gypsum board.
   3. Typical shaft wall assembly.
   4. Typical fire rated assembly and column fireproofing, indicating details of construction same as that used in fire rating test.

D. Samples:
   1. Cornerbead.
   2. Edge trim.
   3. Control joints.

E. Test Results:

1. Fire rating test, each fire rating required for each assembly.
2. Sound rating test.

**1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE**

In accordance with the requirements of ASTM C840.

**1.6 ENVIRONMENTAL CONDITIONS**

In accordance with the requirements of ASTM C840.

**1.7 APPLICABLE PUBLICATIONS**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society for Testing And Materials (ASTM):

C11-08.....Terminology Relating to Gypsum and Related Building Materials and Systems
C475-02.....Joint Compound and Joint Tape for Finishing Gypsum Board
C840-08.....Application and Finishing of Gypsum Board
C919-08.....Sealants in Acoustical Applications
C954-07.....Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Stud from 0.033 in. (0.84mm) to 0.112 in. (2.84mm) in thickness
C1002-07.....Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
C1047-05.....Accessories for Gypsum Wallboard and Gypsum Veneer Base
C1177-06.....Glass Mat Gypsum Substrate for Use as Sheathing
C1658-06.....Glass Mat Gypsum Panels
C1396-06.....Gypsum Board
E84-08.....Surface Burning Characteristics of Building Materials

C. Underwriters Laboratories Inc. (UL):

Latest Edition.....Fire Resistance Directory

D. Inchcape Testing Services (ITS):

Latest Editions.....Certification Listings

**PART 2 - PRODUCTS**

**2.1 GYPSUM BOARD**

A. Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick unless shown otherwise. Shall contain a minimum of 20 percent recycled gypsum.

B. Coreboard or Shaft Wall Liner Panels.

1. ASTM C1396, Type X.
2. ASTM C1658: Glass Mat Gypsum Panels,
3. Coreboard for shaft walls 300, 400, 600 mm (12, 16, or 24 inches) wide by required lengths 25 mm (one inch) thick with paper faces treated to resist moisture.

C. Water Resistant Gypsum Backing Board: ASTM C620, Type X, 16 mm (5/8 inch) thick.

D. Gypsum cores shall contain a minimum of 95 percent post industrial recycled gypsum content. Paper facings shall contain 100 percent post-consumer recycled paper content.

**2.2 GYPSUM SHEATHING BOARD**

A. ASTM C1396, Type X, water-resistant core, 16 mm (5/8 inch) thick.

B. ASTM C1177, Type X.

**2.3 ACCESSORIES**

A. ASTM C1047, except form of 0.39 mm (0.015 inch) thick zinc coated steel sheet or rigid PVC plastic.

B. Flanges not less than 22 mm (7/8 inch) wide with punchouts or deformations as required to provide compound bond.

**2.4 FASTENERS**

A. ASTM C1002 and ASTM C840, except as otherwise specified.

B. ASTM C954, for steel studs thicker than 0.04 mm (0.33 inch).

C. Select screws of size and type recommended by the manufacturer of the material being fastened.

D. For fire rated construction, type and size same as used in fire rating test.

E. Clips: Zinc-coated (galvanized) steel; gypsum board manufacturer's standard items.

**2.5 FINISHING MATERIALS AND LAMINATING ADHESIVE**

ASTM C475 and ASTM C840. Free of antifreeze, vinyl adhesives, preservatives, biocides and other VOC. Adhesive shall contain a maximum VOC content of 50 g/l.

## PART 3 - EXECUTION

### 3.1 GYPSUM BOARD HEIGHTS

A. Extend all layers of gypsum board from floor to underside of structure overhead on following partitions and furring:
   1. Two sides of partitions:
      a. Fire rated partitions.
      b. Smoke partitions.
      c. Sound rated partitions.
      d. Full height partitions shown (FHP).
   2. One side of partitions or furring:
      a. Inside of exterior wall furring or stud construction.
      b. Room side of room without suspended ceilings.
      c. Furring for pipes and duct shafts, except where fire rated shaft wall construction is shown.
   3. Extend all layers of gypsum board construction used for fireproofing of columns from floor to underside of structure overhead, unless shown otherwise.

B. In locations other than those specified, extend gypsum board from floor to heights as follows:
   1. Not less than 100 mm (4 inches) above suspended acoustical ceilings.
   2. At ceiling of suspended gypsum board ceilings.
   3. At existing ceilings.

### 3.2 INSTALLING GYPSUM BOARD

A. Coordinate installation of gypsum board with other trades and related work.

B. Install gypsum board in accordance with ASTM C840, except as otherwise specified.

C. Moisture and Mold–Resistant Assemblies: Provide and install moisture and mold-resistant glass mat gypsum wallboard products with moisture-resistant surfaces complying with ASTM C1658 where shown and in locations which might be subject to moisture exposure during construction.

D. Use gypsum boards in maximum practical lengths to minimize number of end joints.

E. Bring gypsum board into contact, but do not force into place.

F. Ceilings:
   1. For single-ply construction, use perpendicular application.

2. For two-ply assembles:
   a. Use perpendicular application.
   b. Apply face ply of gypsum board so that joints of face ply do not occur at joints of base ply with joints over framing members.

G. Walls (Except Shaft Walls):
1. When gypsum board is installed parallel to framing members, space fasteners 300 mm (12 inches) on center in field of the board, and 200 mm (8 inches) on center along edges.
2. When gypsum board is installed perpendicular to framing members, space fasteners 300 mm (12 inches) on center in field and along edges.
3. Stagger screws on abutting edges or ends.
4. For single-ply construction, apply gypsum board with long dimension either parallel or perpendicular to framing members as required to minimize number of joints except gypsum board shall be applied vertically over "Z" furring channels.
5. For two-ply gypsum board assemblies, apply base ply of gypsum board to assure minimum number of joints in face layer. Apply face ply of wallboard to base ply so that joints of face ply do not occur at joints of base ply with joints over framing members.
6. For three-ply gypsum board assemblies, apply plies in same manner as for two-ply assemblies, except that heads of fasteners need only be driven flush with surface for first and second plies. Apply third ply of wallboard in same manner as second ply of two-ply assembly, except use fasteners of sufficient length enough to have the same penetration into framing members as required for two-ply assemblies.
7. No offset in exposed face of walls and partitions will be permitted because of single-ply and two-ply or three-ply application requirements.
8. Installing Two Layer Assembly Over Sound Deadening Board:
   a. Apply face layer of wallboard vertically with joints staggered from joints in sound deadening board over framing members.
   b. Fasten face layer with screw, of sufficient length to secure to framing, spaced 300 mm (12 inches) on center around perimeter, and 400 mm (16 inches) on center in the field.

H. Acoustical or Sound Rated Partitions, Fire and Smoke Partitions:
1. Cut gypsum board for a space approximately 3 mm to 6 mm (1/8 to 1/4 inch) wide around partition perimeter.

2. Coordinate for application of caulking or sealants to space prior to taping and finishing.
3. For sound rated partitions, use sealing compound (ASTM C919) to fill the annular spaces between all receptacle boxes and the partition finish material through which the boxes protrude to seal all holes and/or openings on the back and sides of the boxes. STC minimum values as shown.

I. Electrical and Telecommunications Boxes:
1. Seal annular spaces between electrical and telecommunications receptacle boxes and gypsum board partitions.

J. Accessories:
1. Set accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified.
2. Install in one piece, without the limits of the longest commercially available lengths.
3. Corner Beads:
   a. Install at all vertical and horizontal external corners and where shown.
   b. Use screws only. Do not use crimping tool.
4. Edge Trim (casings Beads):
   a. At both sides of expansion and control joints unless shown otherwise.
   b. Where gypsum board terminates against dissimilar materials and at perimeter of openings, except where covered by flanges, casings or permanently built-in equipment.
   c. Where gypsum board surfaces of non-load bearing assemblies abut load bearing members.
   d. Where shown.

**3.3 INSTALLING GYPSUM SHEATHING**

A. Install in accordance with ASTM C840, except as otherwise specified or shown.
B. Use screws of sufficient length to secure sheathing to framing.
C. Space screws 9 mm (3/8 inch) from ends and edges of sheathing and 200 mm (8 inches) on center. Space screws a maximum of 200 mm (8 inches) on center on intermediate framing members.
D. Apply 600 mm by 2400 mm (2 foot by 8 foot) sheathing boards horizontally with tongue edge up.

E. Apply 1200 mm by 2400 mm or 2700 mm (4 ft. by 8 ft. or 9 foot) gypsum sheathing boards vertically with edges over framing.

**3.4 CAVITY SHAFT WALL (NOT USED)**

**3.5 FINISHING OF GYPSUM BOARD**

A. Finish joints, edges, corners, and fastener heads in accordance with ASTM C840. Use Level 4 finish for al finished areas open to public view.

B. Before proceeding with installation of finishing materials, assure the following:

1. Gypsum board is fastened and held close to framing or furring.
2. Fastening heads in gypsum board are slightly below surface in dimple formed by driving tool.

C. Finish joints, fasteners, and all openings, including openings around penetrations, on that part of the gypsum board extending above suspended ceilings to seal surface of non decorated gypsum board construction. After the installation of hanger rods, hanger wires, supports, equipment, conduits, piping and similar work, seal remaining openings and maintain the integrity of the construction. Sanding is not required of non decorated surfaces.

**3.6 REPAIRS**

A. After taping and finishing has been completed, and before decoration, repair all damaged and defective work, including nondecorated surfaces.

B. Patch holes or openings 13 mm (1/2 inch) or less in diameter, or equivalent size, with a setting type finishing compound or patching plaster.

C. Repair holes or openings over 13 mm (1/2 inch) diameter, or equivalent size, with 16 mm (5/8 inch) thick gypsum board secured in such a manner as to provide solid substrate equivalent to undamaged surface.

D. Tape and refinish scratched, abraded or damaged finish surfaces including cracks and joints in non decorated surface to provide smoke tight construction and fire protection equivalent to the fire rated construction.

**3.7 UNACCESSIBLE CEILINGS (NOT USED)**

- - - E N D - - -

# SECTION 09 91 00
# PAINTING

## PART 1-GENERAL

### 1.1 DESCRIPTION

A. Section specifies field painting.

B. Section specifies prime coats which may be applied in shop under other sections.

C. Painting includes shellacs, stains, varnishes, coatings specified, and striping or markers and identity markings.

### 1.2 RELATED WORK

A. Shop prime painting of steel and ferrous metals: Division 05 - METALS,Division 11 - EQUIPMENT, Division 21 – FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 – HEATING, VENTILATION AND AIR-CONDITIONING, and Division 26 - ELECTRICAL.

B. Type of Finish, Color, and Gloss Level of Finish Coat: Section 09 06 00, SCHEDULE FOR FINISHES.

### 1.3 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:
Before work is started, or sample panels are prepared, submit manufacturer's literature, the current Master Painters Institute (MPI) "Approved Product List" indicating brand label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use subsequent MPI "Approved Product List", however, only one list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI "Approved Product List" where applicable is acceptable.

C. Paint Formula for each color to be provided.

D. Sample Panels:

1. After painters' materials have been approved and before work is started submit sample panels showing each type of finish and color specified.
2. Panels to show color: Composition board, 100 by 250 by 3 mm (4 inch by 10 inch by 1/8 inch).
3. Panel to show transparent finishes: Wood of same species and grain pattern as wood approved for use, 100 by 250 by 3 mm (4 inch by 10 inch

face by 1/4 inch) thick minimum, and where both flat and edge grain will be exposed, 250 mm (10 inches) long by sufficient size, 50 by 50 mm (2 by 2 inch) minimum or actual wood member to show complete finish.

4. Attach labels to panel stating the following:
   a. Federal Specification Number or manufacturers name and product number of paints used.
   b. Specification code number specified in Section 09 06 00, SCHEDULE FOR FINISHES.
   c. Product type and color.
   d. Name of project.
5. Strips showing not less than 50 mm (2 inch) wide strips of undercoats and 100 mm (4 inch) wide strip of finish coat.

D. Sample of identity markers if used.

E. Manufacturers' Certificates indicating compliance with specified requirements:
   1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified.
   2. High temperature aluminum paint.
   3. Epoxy coating.
   4. Intumescent clear coating or fire retardant paint.
   5. Plastic floor coating.

**1.4 DELIVERY AND STORAGE**

A. Deliver materials to site in manufacturer's sealed container marked to show following:
   1. Name of manufacturer.
   2. Product type.
   3. Batch number.
   4. Instructions for use.
   5. Safety precautions.

B. In addition to manufacturer's label, provide a label legibly printed as following:
   1. Federal Specification Number, where applicable, and name of material.
   2. Surface upon which material is to be applied.
   3. If paint or other coating, state coat types; prime, body or finish.

C. Maintain space for storage, and handling of painting materials and equipment in a neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.

D. Store materials at site at least 24 hours before using, at a temperature between 18 and 30 degrees C (65 and 85 degrees F).

**1.5 MOCK-UP PANEL**

A. Before starting application of water paint mixtures, apply paint as specified to an area, not to exceed 9 $m^2$ (100 $ft^2$), selected by Resident Engineer.

B. Finish and texture approved by Resident Engineer will be used as a standard of quality for remainder of work.

**1.6 APPLICABLE PUBLICATIONS**

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.

B. American Conference of Governmental Industrial Hygienists (ACGIH):
ACGIH TLV-BKLT-2008.....Threshold Limit Values (TLV) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs)
ACGIH TLV-DOC-2008.....Documentation of Threshold Limit Values and Biological Exposure Indices, (Seventh Edition)

C. American National Standards Institute (ANSI):
A13.1-07.....Scheme for the Identification of Piping Systems

D. American Society for Testing and Materials (ASTM):
D260-86.....Boiled Linseed Oil

E. Commercial Item Description (CID):
A-A-1555.....Water Paint, Powder (Cementitious, White and Colors) (WPC) (cancelled)
A-A-3120.....Paint, For Swimming Pools (RF) (cancelled)

F. Federal Specifications (Fed Spec):
TT-P-1411A.....Paint, Copolymer-Resin, Cementitious (For Waterproofing Concrete and Masonry Walls) (CEP)

G. Master Painters Institute (MPI):
No. 1-07.....Aluminum Paint (AP)
No. 4-07.....Interior/ Exterior Latex Block Filler
No. 5-07.....Exterior Alkyd Wood Primer
No. 7-07.....Exterior Oil Wood Primer
No. 8-07.....Exterior Alkyd, Flat MPI Gloss Level 1 (EO)
No. 9-07.....Exterior Alkyd Enamel MPI Gloss Level 6 (EO)
No. 10-07.....Exterior Latex, Flat (AE)
No. 11-07.....Exterior Latex, Semi-Gloss (AE)
No. 18-07.....Organic Zinc Rich Primer
No. 22-07.....Aluminum Paint, High Heat (up to 590% - 1100F) (HR)

No. 26-07.....Cementitious Galvanized Metal Primer
No. 27-07.....Exterior / Interior Alkyd Floor Enamel, Gloss (FE)
No. 31-07.....Polyurethane, Moisture Cured, Clear Gloss (PV)
No. 36-07.....Knot Sealer
No. 43-07.....Interior Satin Latex, MPI Gloss Level 4
No. 44-07.....Interior Low Sheen Latex, MPI Gloss Level 2
No. 45-07.....Interior Primer Sealer
No. 46-07.....Interior Enamel Undercoat
No. 47-07.....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5 (AK)
No. 48-07.....Interior Alkyd, Gloss, MPI Gloss Level 6 (AK)
No. 49-07.....Interior Alkyd, Flat, MPI Gloss Level 1 (AK)
No. 50-07.....Interior Latex Primer Sealer
No. 51-07.....Interior Alkyd, Eggshell, MPI Gloss Level 3
No. 52-07.....Interior Latex, MPI Gloss Level 3 (LE)
No. 53-07.....Interior Latex, Flat, MPI Gloss Level 1 (LE)
No. 54-07.....Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)
No. 59-07.....Interior/Exterior Alkyd Porch & Floor Enamel, Low Gloss (FE)
No. 60-07.....Interior/Exterior Latex Porch & Floor Paint, Low Gloss
No. 66-07.....Interior Alkyd Fire Retardant, Clear Top-Coat (ULC Approved) (FC)
No. 67-07.....Interior Latex Fire Retardant, Top-Coat (ULC Approved) (FR)
No. 68-07.....Interior/ Exterior Latex Porch & Floor Paint, Gloss
No. 71-07.....Polyurethane, Moisture Cured, Clear, Flat (PV)
No. 74-07.....Interior Alkyd Varnish, Semi-Gloss
No. 77-07.....Epoxy Cold Cured, Gloss (EC)
No. 79-07.....Marine Alkyd Metal Primer
No. 90-07.....Interior Wood Stain, Semi-Transparent (WS)
No. 91-07.....Wood Filler Paste
No. 94-07.....Exterior Alkyd, Semi-Gloss (EO)
No. 95-07.....Fast Drying Metal Primer
No. 98-07.....High Build Epoxy Coating
No. 101-07.....Epoxy Anti-Corrosive Metal Primer
No. 108-07.....High Build Epoxy Coating, Low Gloss (EC)
No. 114-07.....Interior Latex, Gloss (LE) and (LG)
No. 119-07.....Exterior Latex, High Gloss (acrylic) (AE)

No. 135-07.....Non-Cementitious Galvanized Primer
No. 138-07.....Interior High Performance Latex, MPI Gloss Level 2 (LF)
No. 139-07.....Interior High Performance Latex, MPI Gloss Level 3 (LL)
No. 140-07.....Interior High Performance Latex, MPI Gloss Level 4
No. 141-07.....Interior High Performance Latex (SG) MPI Gloss Level 5

H. Steel Structures Painting Council (SSPC):
SSPC SP 1-04 (R2004)....Solvent Cleaning
SSPC SP 2-04 (R2004)....Hand Tool Cleaning
SSPC SP 3-04 (R2004)....Power Tool Cleaning

**PART 2 – PRODUCTS**

**2.1 MANUFACTURER**

A. Benjamin Moore Paints

**2.2 MATERIALS**

A. Plastic Tape:
1. Pigmented vinyl plastic film in colors as specified in Section 09 06 00, SCHEDULE FOR FINISHES or specified.
2. Pressure sensitive adhesive back.
3. Widths as shown.

B. Identity markers options:
1. Pressure sensitive vinyl markers.
2. Snap-on coil plastic markers.

C. Aluminum Paint (AP): MPI 1.
D. Exterior Alkyd, Flat (EO): MPI 8.
E. Exterior Alkyd Enamel (EO): MPI 9.
F. Exterior Latex, Flat (AE): MPI 10.
G. Exterior Latex, Semi-Gloss (AE): MPI 11.
H. Cementitious Galvanized Metal Primer: MPI 26.
I. Interior Satin Latex: MPI 43.
J. Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE): MPI 54.
K. Interior Alkyd Fire Retardant, Clear Top-Coat (ULC Approved) (FC): MPI 66.
L. Interior Latex Fire Retardant, Top-Coat (ULC Approved) (FR): MPI 67.
M. Exterior Alkyd, Semi-Gloss (EO): MPI 94.
N. Fast Drying Metal Primer: MPI 95.
O. Epoxy Anti-Corrosive Metal Primer: MPI 101.

**2.2 PAINT PROPERTIES**

A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.

B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.

**2.3 REGULATORY REQUIREMENTS/QUALITY ASSURANCE**

A. Paint materials shall conform to the restrictions of the local Environmental and Toxic Control jurisdiction.

1. Volatile Organic Compounds (VOC): VOC content of paint materials shall not exceed 10g/l for interior latex paints/primers and 50g/l for exterior latex paints and primers.
2. Lead-Base Paint:
   a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.
   b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.
   c. For lead-paint removal, see Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
3. Asbestos: Materials shall not contain asbestos.
4. Chromate, Cadmium, Mercury, and Silica: Materials shall not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
5. Human Carcinogens: Materials shall not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
6. Use high performance acrylic paints in place of alkyd paints, where possible.
7. VOC content for solvent-based paints shall not exceed 250g/l and shall not be formulated with more than one percent aromatic hydro carbons by weight.

**PART 3 - EXECUTION**

**3.1 JOB CONDITIONS**

A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.

1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each days work.

B. Atmospheric and Surface Conditions:
1. Do not apply coating when air or substrate conditions are:
   a. Less than 3 degrees C (5 degrees F) above dew point.
   b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the Contracting Officer and the product manufacturer. Under no circumstances shall application conditions exceed manufacturer recommendations.
2. Maintain interior temperatures until paint dries hard.
3. Do no exterior painting when it is windy and dusty.
4. Do not paint in direct sunlight or on surfaces that the sun will soon warm.
5. Apply only on clean, dry and frost free surfaces except as follows:
   a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces where allowed by manufacturer's printed instructions.
   b. Dampened with a fine mist of water on hot dry days concrete and masonry surfaces to which water thinned acrylic and cementitious paints are applied to prevent excessive suction and to cool surface.
6. Varnishing:
   a. Apply in clean areas and in still air.
   b. Before varnishing vacuum and dust area.
   c. Immediately before varnishing wipe down surfaces with a tack rag.

**3.2 SURFACE PREPARATION**

A. Method of surface preparation is optional, provided results of finish painting produce solid even color and texture specified with no overlays.

B. General:
1. Remove prefinished items not to be painted such as lighting fixtures, escutcheon plates, hardware, trim, and similar items for reinstallation after paint is dried.
2. Remove items for reinstallation and complete painting of such items and adjacent areas when item or adjacent surface is not accessible or finish is different.
3. See other sections of specifications for specified surface conditions and prime coat.

4. Clean surfaces for painting with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry.

C. Wood: (NOT USED)

D. Ferrous Metals:

1. Remove oil, grease, soil, drawing and cutting compounds, flux and other detrimental foreign matter in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Remove loose mill scale, rust, and paint, by hand or power tool cleaning, as defined in SSPC-SP 2 (Hand Tool Cleaning) and SSPC-SP 3 (Power Tool Cleaning). Exception: where high temperature aluminum paint is used, prepare surface in accordance with paint manufacturer's instructions.
3. Fill dents, holes and similar voids and depressions in flat exposed surfaces of hollow steel doors and frames, access panels, roll-up steel doors and similar items specified to have semi-gloss or gloss finish with TT-F-322D (Filler, Two-Component Type, For Dents, Small Holes and Blow-Holes). Finish flush with adjacent surfaces.
   a. This includes flat head countersunk screws used for permanent anchors.
   b. Do not fill screws of item intended for removal such as glazing beads.
4. Spot prime abraded and damaged areas in shop prime coat which expose bare metal with same type of paint used for prime coat. Feather edge of spot prime to produce smooth finish coat.
5. Spot prime abraded and damaged areas which expose bare metal of factory finished items with paint as recommended by manufacturer of item.

E. Zinc-Coated (Galvanized) Meta and Aluminum surfaces Specified Painted:

1. Clean surfaces to remove grease, oil and other deterrents to paint adhesion in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Spot coat abraded and damaged areas of zinc-coating which expose base metal on hot-dip zinc-coated items with MPI 18 (Organic Zinc Rich Coating). Prime or spot prime with MPI 134 (Waterborne Galvanized Primer) or MPI 135 (Non- Cementitious Galvanized Primer) depending on finish coat compatibility.

F. Masonry, Concrete, Cement Board, Cement Plaster and Stucco:

1. Clean and remove dust, dirt, oil, grease efflorescence, form release agents, laitance, and other deterrents to paint adhesion.

2. Use emulsion type cleaning agents to remove oil, grease, paint and similar products. Use of solvents, acid, or steam is not permitted.
3. Remove loose mortar in masonry work.
4. Replace mortar and fill open joints, holes, cracks and depressions with new mortar specified in Section 04 05 13, MASONRY MORTARING. Finish to match adjacent surfaces.
5. Neutralize Concrete floors to be painted by washing with a solution of 1.4 Kg (3 pounds) of zinc sulfate crystals to 3.8 L (1 gallon) of water, allow to dry three days and brush thoroughly free of crystals.
6. Repair broken and spalled concrete edges with concrete patching compound to match adjacent surfaces as specified in CONCRETE Sections. Remove projections to level of adjacent surface by grinding or similar methods.

G. Gypsum Plaster and Gypsum Board:
1. Remove efflorescence, loose and chalking plaster or finishing materials.
2. Remove dust, dirt, and other deterrents to paint adhesion.
3. Fill holes, cracks, and other depressions with CID-A-A-1272A [Plaster, Gypsum (Spackling Compound) finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for plaster or gypsum board.

**3.3 PAINT PREPARATION**

A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.
C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.
D. Mix two component and two part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.
E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

**3.4 APPLICATION**

A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.

B. Unless otherwise specified, apply paint in three coats; prime, body, and finish. When two coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.
C. Apply each coat evenly and cover substrate completely.
D. Allow not less than 48 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by Resident Engineer.
E. Finish surfaces to show solid even color, free from runs, lumps, brushmarks, laps, holidays, or other defects.
F. Apply by brush, roller or spray, except as otherwise specified.

G. Do not spray paint in existing occupied spaces unless approved by Resident Engineer, except in spaces sealed from existing occupied spaces.
   1. Apply painting materials specifically required by manufacturer to be applied by spraying.
   2. In areas, where paint is applied by spray, mask or enclose with polyethylene, or similar air tight material with edges and seams continuously sealed including items specified in WORK NOT PAINTED, motors, controls, telephone, and electrical equipment, fronts of sterilizes and other recessed equipment and similar prefinished items.
I. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items except overhead roll-up doors and shutters.

**3.5 PRIME PAINTING**

A. After surface preparation prime surfaces before application of body and finish coats, except as otherwise specified.
B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.
C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.
D. Prime rebates for stop and face glazing of wood, and for face glazing of steel.
E. Wood and Wood Particleboard: (NOT USED)
F. Metals except boilers, incinerator stacks, and engine exhaust pipes:
   1. Steel and iron: MPI 95 (Fast Drying Metal Primer) finish is specified.
   2. Zinc-coated steel and iron: MPI 134 (Waterborne Galvanized Primer)
   3. Aluminum scheduled to be painted: MPI 95 (Fast Drying Metal Primer).

G. Gypsum Board:
   1. Surfaces scheduled to have MPI 53 (Interior Latex, Flat, MPI Gloss Level 1 LE)), MPI 52 (Interior Latex, MPI Gloss Level 3 (LE)), MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)), MPI 114 (Interior Latex, Gloss (LE) and (LG)) finish: Use MPI 53 (Interior Latex, MPI Gloss Level 3 (LE)), MPI 52 (Interior Latex, MPI Gloss Level 3 (LE)), MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)), MPI 114 (Interior Latex, Gloss (LE) and (LG)) respectively.
   2. Primer: MPI 50(Interior Latex Primer Sealer) except use MPI 45 (Interior Primer Sealer)

**3.6 EXTERIOR FINISHES**

A. Apply following finish coats where specified in Section 09 06 00, SCHEDULE FOR FINISHES.
B. Wood: (NOT USED)
C. Steel and Ferrous Metal:
   1. Two coats of MPI 8 MPI 94 (Exterior Alkyd, Semi-Gloss (EO)) on exposed surfaces, except on surfaces over 94 degrees C (200 degrees F).
D. Concrete:
   1. General:
      a. Where specified in Section 09 06 00, SCHEDULE FOR FINISHES or shown.
      b. Mix as specified in manufacturer's printed directions.
      c. Do not mix more paint at one time than can be used within four hours after mixing. Discard paint that has started to set.
      d. Dampen warm surfaces above 24 degrees C (75 degrees F) with fine mist of water before application of paint. Do not leave free water on surface.
      e. Cure paint with a fine mist of water as specified in manufacturer's printed instructions.
   2. Use two coats of TT-P-1411 (Paint, Co-polymer-Resin, Cementitious (CEP)), unless specified otherwise.

**3.7 INTERIOR FINISHES**

A. Apply following finish coats over prime coats in spaces or on surfaces specified in Section 09 06 00, SCHEDULE FOR FINISHES.
B. Metal Work:
   1. Apply to exposed surfaces.
   2. Omit body and finish coats on surfaces concealed after installation except electrical conduit containing conductors over 600 volts.
   3. Ferrous Metal, Galvanized Metal, and Other Metals Scheduled:

a. Apply two coats of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) unless specified otherwise.
b. Two coats of MPI 51 (Interior Alkyd, Eggshell (AK)).
c. One coat of MPI 46 (Interior Enamel Undercoat) plus one coat of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) on exposed interior surfaces of alkyd-amine enamel prime finished windows.

C. Gypsum Board
1. One coat of MPI 45 (Interior Primer Sealer)
2. Two coats of MPI 54 (Interior Latex, Semi-gloss).

D. Plaster: (NOT USED)

E. Masonry and Concrete Walls:
1. Over MPI 4 (Interior/Exterior Latex Block Filler) on CMU surfaces.
2. Two coats of MPI 53 (Interior Latex, Flat, MPI Gloss Level 1 (LE))
3. Two coats of MPI 138 (Interior High Performance Latex, MPI Gloss Level 2 (LF))

F. Wood: (NOT USED)

G. Cement Board: (NOT USED)

H. Concrete Floors: MPI 68 (Interior/ Exterior Latex Porch & Floor Paint)

I. Miscellaneous:
1. Apply where specified in Section 09 06 00, SCHEDULE FOR FINISHES.
2. MPI 1 (Aluminum Paint): Two coats of aluminum paint.

**3.8 REFINISHING EXISTING PAINTED SURFACES**

A. Clean, patch and repair existing surfaces as specified under surface preparation.

B. Remove and reinstall items as specified under surface preparation.

C. Remove existing finishes or apply separation coats to prevent non compatible coatings from having contact.

D. Patched or Replaced Areas in Surfaces and Components: Apply spot prime and body coats as specified for new work to repaired areas or replaced components.

E. Except where scheduled for complete painting apply finish coat over plane surface to nearest break in plane, such as corner, reveal, or frame.

F. In existing rooms and areas where alterations occur, clean existing stained and natural finished wood retouch abraded surfaces and then give entire surface one coat of MPI 31 (Polyurethane, Moisture Cured, Clear Gloss).

G. Refinish areas as specified for new work to match adjoining work unless specified or scheduled otherwise.

H. Coat knots and pitch streaks showing through old finish with MPI 36 (Knot Sealer) before refinishing.
I. Sand or dull glossy surfaces prior to painting.
J. Sand existing coatings to a feather edge so that transition between new and existing finish will not show in finished work.

**3.9 PAINT COLOR**

A. Color and gloss of finish coats is specified in Section 09 06 00, SCHEDULE FOR FINISHES.
B. For additional requirements regarding color see Articles, REFINISHING EXISTING PAINTED SURFACE and MECHANICAL AND ELECTRICAL FIELD PAINTING SCHEDULE.
C. Coat Colors:
   1. Color of priming coat: Lighter than body coat.
   2. Color of body coat:  Lighter than finish coat.
   3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.

**3.10 MECHANICAL AND ELECTRICAL WORK FIELD PAINTING SCHEDULE**

A. Field painting of mechanical and electrical consists of cleaning, touching-up abraded shop prime coats, and applying prime, body and finish coats to materials and equipment if not factory finished in space scheduled to be finished.
B. In spaces not scheduled to be finish painted in Section 09 06 00, SCHEDULE FOR FINISHES paint as specified under paragraph H, colors.
C. Paint various systems specified in Division 02 – EXISTING CONDITIONS, Division 21 – FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 – HEATING, VENTILATION AND AIR-CONDITIONING, and Division 26 - ELECTRICAL,
D. Paint after tests have been completed.
E. Omit prime coat from factory prime-coated items.
F. Finish painting of mechanical and electrical equipment is not required when located in interstitial spaces, above suspended ceilings, in concealed areas such as pipe and electric closets, pipe basements, pipe tunnels, trenches, attics, roof spaces, shafts and furred spaces except on electrical conduit containing feeders 600 volts or more.
G. Omit field painting of items specified in paragraph, Building and Structural WORK NOT PAINTED.
H. Color:
   1. Paint items having no color specified in Section 09 06 00, SCHEDULE FOR FINISHES to match surrounding surfaces.

2. Paint colors as specified in Section 09 06 00, SCHEDULE FOR FINISHES except for following:
   a. White .....Exterior unfinished surfaces of enameled plumbing fixtures. Insulation coverings on breeching and uptake inside boiler house, drums and drum-heads, oil heaters, condensate tanks and condensate piping.
   b. Gray: .....Heating, ventilating, air conditioning and refrigeration equipment (except as required to match surrounding surfaces), and water and sewage treatment equipment and sewage ejection equipment.
   c. Aluminum Color: Ferrous metal on outside of boilers and in connection with boiler settings including supporting doors and door frames and fuel oil burning equipment, and steam generation system (bare piping, fittings, hangers, supports, valves, traps and miscellaneous iron work in contact with pipe).
   d. Federal Safety Red: Exposed fire protection piping hydrants, post indicators, electrical conducts containing fire alarm control wiring, and fire alarm equipment.
   e. Federal Safety Orange: .Entire lengths of electrical conduits containing feeders 600 volts or more.
   f. Color to match brickwork sheet metal covering on breeching outside of exterior wall of boiler house.

I. Apply paint systems on properly prepared and primed surface as follows:
   1. Exterior Locations:
      a. Apply two coats of MPI 94 (Exterior Alkyd, Semi-gloss (EO)) to the following ferrous metal items:
         Vent and exhaust pipes with temperatures under 94 degrees C (200 degrees F), roof drains, fire hydrants, post indicators, yard hydrants, exposed piping and similar items.
      b. Apply two coats of MPI 11 (Exterior Latex, Semi Gloss (AE)) to the following metal items:
         Galvanized and zinc-copper alloy metal.
      c. Apply one coat of MPI 22 (High Heat Resistant Coating (HR)), 650 degrees C (1200 degrees F) to incinerator stacks, boiler stacks, and engine generator exhaust.
   2. Interior Locations:
      a. Apply two coats of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) to following items:

1) Metal under 94 degrees C (200 degrees F) of items such as bare piping, fittings, hangers and supports.
2) Equipment and systems such as hinged covers and frames for control cabinets and boxes, cast-iron radiators, electric conduits and panel boards.
3) Heating, ventilating, air conditioning, plumbing equipment, and machinery having shop prime coat and not factory finished.

b. Paint electrical conduits containing cables rated 600 volts or more using two coats of MPI 9 (Exterior Alkyd Enamel (EO)) in the Federal Safety Orange color in exposed and concealed spaces full length of conduit.

3. Other exposed locations:

b. Cloth jackets of insulation of ducts and pipes in connection with plumbing, air conditioning, ventilating refrigeration and heating systems: One coat of MPI 50 (Interior Latex Primer Sealer) and one coat of MPI 11 (Exterior Latex Semi-Gloss (AE).

**3.11 BUILDING AND STRUCTURAL WORK FIELD PAINTING**

A. Painting and finishing of interior and exterior work except as specified under paragraph 3.11 B.

1. Painting and finishing of new and existing work including colors and gloss of finish selected is specified in Finish Schedule, Section 09 06 00, SCHEDULE FOR FINISHES.
2. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.
3. Painting of ferrous metal and galvanized metal.
4. Painting of wood with fire retardant paint exposed in attics, when used as mechanical equipment space.
5. Identity painting and safety painting.

B. Building and Structural Work not Painted:

1. Prefinished items:

a. Casework, doors, elevator entrances and cabs, metal panels, wall covering, and similar items specified factory finished under other sections.

b. Factory finished equipment and pre-engineered metal building components such as metal roof and wall panels.

2. Finished surfaces:

a. Hardware except ferrous metal.

b. Anodized aluminum, stainless steel, chromium plating, copper, and brass, except as otherwise specified.

c. Signs, fixtures, and other similar items integrally finished.

3. Concealed surfaces:
   a. Inside duct shafts, interstitial spaces, pipe basements, crawl spaces, pipe tunnels, above ceilings, attics, except as otherwise specified.
   b. Inside walls or other spaces behind access doors or panels.
   c. Surfaces concealed behind permanently installed equipment.
4. Moving and operating parts:
   a. Shafts, chains, gears, mechanical and electrical operators, linkages, and sprinkler heads, and sensing devices.
5. Labels:
   a. Code required label, such as Underwriters Laboratories Inc., Inchcape Testing Services, Inc., or Factory Mutual Research Corporation.
   b. Identification plates, instruction plates, performance rating, and nomenclature.
6. Gaskets.
7. Concrete curbs, gutters, pavements, retaining walls, exterior exposed foundations walls and interior walls in pipe basements.
8. Face brick.
9. Structural steel encased in concrete, masonry, or other enclosure.
10. Structural steel to receive sprayed-on fire proofing.

**3.12 IDENTITY PAINTING SCHEDULE**

A. Identify designated service in accordance with ANSI A13.1, unless specified otherwise, on exposed piping, piping above removable ceilings, piping in accessible pipe spaces, interstitial spaces, and piping behind access panels.
   1. All utility piping shall be labeled as to flow (if applicable) and service on each side of each wall it penetrates and every 20 feet on center.
   2. Legend may be identified using 2.1 G options or by stencil applications.
   3. Apply legends adjacent to changes in direction, on branches, where pipes pass through walls or floors, adjacent to operating accessories such as valves, regulators, strainers and cleanouts a minimum of 12 000 mm (40 feet) apart on straight runs of piping. Identification next to plumbing fixtures is not required.
   4. Locate Legends clearly visible from operating position.
   5. Use arrow to indicate direction of flow.

6. Identify pipe contents with sufficient additional details such as temperature, pressure, and contents to identify possible hazard. Insert working pressure shown on drawings where asterisk appears for High, Medium, and Low Pressure designations as follows:
   a. High Pressure - 414 kPa (60 psig) and above.
   b. Medium Pressure - 104 to 413 kPa (15 to 59 psig).
   c. Low Pressure - 103 kPa (14 psig) and below.
   d. Add Fuel oil grade numbers.
7. Legend name in full or in abbreviated form as follows:

| PIPING | COLOR OF EXPOSED PIPING | COLOR OF BACKGROUND | COLOR OF LETTERS | LEGEND BBREVIATIONS |
|---|---|---|---|---|
| Blow-off | | Yellow | Black | Blow-off |
| Boiler Feedwater | | Yellow | Black | Blr Feed |
| A/C Condenser Water Supply | | Green | White | A/C Cond Wtr Sup |
| A/C Condenser Water Return | | Green | White | A/C Cond Wtr Ret |
| Chilled Water Supply | | Green | White | Ch. Wtr Sup |
| Chilled Water Return | | Green | White | Ch. Wtr Ret |
| Shop Compressed Air | | Yellow | Black | Shop Air |
| Air-Instrument Controls | | Green | White | Air-Inst Cont |
| Drain Line | | Green | White | Drain |
| Emergency Shower | | Green | White | Emg Shower |
| High Pressure Steam | | Yellow | Black | H.P. _____* |
| High Pressure Condensate Return | | Yellow | Black | H.P. Ret ____* |
| Medium Pressure Steam | | Yellow | Black | M. P. Stm ____* |
| Medium Pressure Condensate Return | | Yellow | Black | M.P. Ret _____* |
| Low Pressure Steam | | Yellow | Black | L.P. Stm _____* |
| Low Pressure Condensate Return | | Yellow | Black | L.P. Ret _____* |
| High Temperature Water Supply | | Yellow | Black | H. Temp Wtr Sup |
| High Temperature Water Return | | Yellow | Black | H. Temp Wtr Ret |
| Hot Water Heating Supply | | Yellow | Black | H. W. Htg Sup |
| Hot Water Heating Return | | Yellow | Black | H. W. Htg Ret |
| Gravity Condensate Return | | Yellow | Black | Gravity Cond Ret |
| Pumped Condensate Return | | Yellow | Black | Pumped Cond Ret |
| Vacuum Condensate Return | | Yellow | Black | Vac Cond Ret |
| Fuel Oil - Grade | | Green | White | Fuel Oil-Grade __* |
| Boiler Water Sampling | | Yellow | Black | Sample |

| | | | | |
|---|---|---|---|---|
| Chemical Feed | | Yellow | Black | Chem Feed |
| Continuous Blow-Down | | Yellow | Black | Cont. B D |
| Pumped Condensate | | Black | | Pump Cond |
| Pump Recirculating | | Yellow | Black | Pump-Recirc. |
| Vent Line | | Yellow | Black | Vent |
| Alkali | | Yellow | Black | Alk |
| Bleach | | Yellow | Black | Bleach |
| Detergent | | Yellow | Black | Det |
| Liquid Supply | | Yellow | Black | Liq Sup |
| Reuse Water | | Yellow | Black | Reuse Wtr |
| Cold Water (Domestic) | White | Green | White | C.W. Dom |
| Hot Water (Domestic) | | | | |
| Supply | White | Yellow | Black | H.W. Dom |
| Return | White | Yellow | Black | H.W. Dom Ret |
| Tempered Water | White | Yellow | Black | Temp. Wtr |
| Ice Water | | | | |
| Supply | White | Green | White | Ice Wtr |
| Return | White | Green | White | Ice Wtr Ret |
| Reagent Grade Water | | Green | White | RG |
| Reverse Osmosis | | Green | White | RO |
| Sanitary Waste | | Green | White | San Waste |
| Sanitary Vent | | Green | White | San Vent |
| Storm Drainage | | Green | White | St Drain |
| Pump Drainage | | Green | White | Pump Disch |
| Chemical Resistant Pipe | | | | |
| Waste | | Yellow | Black | Acid Waste |
| Vent | | Yellow | Black | Acid Vent |
| Atmospheric Vent | | Green | White | ATV |
| Silver Recovery | | Green | White | Silver Rec |
| Oral Evacuation | | Green | White | Oral Evac |
| Fuel Gas | | Yellow | Black | Gas |
| Fire Protection Water | | | | |
| Sprinkler | | Red | White | Auto Spr |
| Standpipe | | Red | White | Stand |
| Sprinkler | | Red | White | Drain |
| Exposed New Sprinkler Piping | | Red | White | |
| Exposed Existing | | Red | White | |

Sprinkler Piping

B. Fire and Smoke Partitions:
   1. Identify partitions above ceilings on both sides of partitions except within shafts in letters not less than 64 mm (2 1/2 inches) high.
   2. Stenciled message: "SMOKE BARRIER" or, "FIRE BARRIER" as applicable.
   3. Locate not more than 6100 mm (20 feet) on center on corridor sides of partitions, and with a least one message per room on room side of partition.
   4. Use semigloss paint of color that contrasts with color of substrate.

**3.14 PROTECTION CLEAN UP, AND TOUCH-UP**

A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.
B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.
C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

**APPENDIX**

Coordinate the following abbreviations used in Section 09 91 00, PAINTING, with other Sections, especially Section 09 06 00, SCHEDULE FOR FINISHES and other COATING SECTIONS listed. Use the same abbreviation and terms consistently.

| Paint or coating | Abbreviation |
|---|---|
| Acrylic Emulsion | AE (MPI 10 – flat/MPI 11 – semigloss/MPI 119 - gloss) |
| Alkyd Flat | Ak (MPI 49) |
| Alkyd Gloss Enamel | G (MPI 48) |
| Alkyd Semigloss Enamel | SG (MPI 47) |
| Aluminum Paint | AP (MPI 1) |
| Cementitious Paint | CEP (TT-P-1411) |
| Exterior Latex | EL??(MPI 10 / 11 / 119)?? |
| Exterior Oil | EO (MPI 9 – gloss/MPI 8 – flat/MPI 94 – semigloss) |
| Epoxy Coating | EC (MPI 77 – walls, floors/MPI 108 – CMU, concrete) |
| Fire Retardant Paint | FR (MPI 67) |
| Fire Retardant Coating (Clear) | FC (MPI 66, intumescent type) |

Floor Enamel FE (MPI 27 – gloss/MPI 59 – eggshell)
Heat Resistant Paint HR (MPI 22)
Latex Emulsion LE (MPI 53, flat/MPI 52, eggshell/MPI 54, semigloss/MPI 114, gloss Level 6
Latex Flat LF (MPI 138)
Latex Gloss LG (MPI 114)
Latex Semigloss SG (MPI 141)
Latex Low Luster LL (MPI 139)
Plastic Floor Coating PL
Polyurethane Varnish PV (MPI 31 – gloss/MPI 71 - flat)
Rubber Paint RF (CID-A-A-3120 - Paint for Swimming Pools (RF)).
Water Paint, Cement WPC (CID-A-A-1555 - Water Paint, Powder).
Wood Stain WS (MPI 90)
Verify abbreviations used in the following coating sections:
Section 09 96 59, HIGH-BUILD GLAZED COATINGS GC
Section 09 94 19, MULTICOLOR INTERIOR FINISHING MC

- - - E N D - - -

# SECTION 23 05 11
# COMMON WORK RESULTS FOR HVAC

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. The requirements of this Section apply to all sections of Division 23.

B. Definitions:

1. Exposed: Piping, ductwork, and equipment exposed to view in finished rooms.
2. Option or optional: Contractor's choice of an alternate material or method.
3. RE: Resident Engineer
4. COTR: Contracting Officer’s Technical Representative.

### 1.2 RELATED WORK

A. Section 00 72 00, GENERAL CONDITIONS

B. Section 01 00 00, GENERAL REQUIREMENTS

C. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES

D. Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT

E. Section 03 30 00, CAST-IN-PLACE CONCRETE: Concrete and Grout

F. Section 05 50 00, METAL FABRICATIONS

G. Section 07 84 00, FIRESTOPPING

H. Section 07 60 00, FLASHING AND SHEET METAL: Flashing for Wall and Roof Penetrations

I. Section 07 92 00, JOINT SEALANTS

J. Section 09 91 00, PAINTING

K. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC and STEAM GENERATION

L. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT

M. Section 23 07 11, HVAC, PLUMBING, and Boiler Plant Insulation

N. Section 23 10 00, FACILITY FUEL SYSTEMS

O. Section 23 22 13, STEAM and CONDENSATE HEATING PIPING

P. Section 23 31 00, HVAC DUCTS and CASINGS

Q. Section 23 34 00, HVAC FANS

R. Section 23 37 00, AIR OUTLETS and INLETS

S. Section 23 51 00, BREECHINGS, CHIMNEYS, and STACKS

T. Section 23 81 43, AIR-SOURCE UNITARY HEAT PUMPS

U. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training

V. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS

W. Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS

**1.3 QUALITY ASSURANCE**

A. Mechanical, electrical and associated systems shall be safe, reliable, efficient, durable, easily and safely operable and maintainable, easily and safely accessible, and in compliance with applicable codes as specified. The systems shall be comprised of high quality institutional-class and industrial-class products of manufacturers that are experienced specialists in the required product lines. All construction firms and personnel shall be experienced and qualified specialists in industrial and institutional HVAC

B. Flow Rate Tolerance for HVAC Equipment: Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.

C. Equipment Vibration Tolerance:

1. Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT. Equipment shall be factory-balanced to this tolerance and re-balanced on site, as necessary.
2. After HVAC air balance work is completed and permanent drive sheaves are in place, perform field mechanical balancing and adjustments required to meet the specified vibration tolerance.

D. Products Criteria:

1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 3 years (or longer as specified elsewhere). The design, model and size of each item shall have been in satisfactory and efficient operation on at least three installations for approximately three years. However, digital electronics devices, software and systems such as controls, instruments, computer work station, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least three years. See other specification sections for any exceptions and/or additional requirements.
2. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
3. Conform to codes and standards as required by the specifications. Conform to local codes, if required by local authorities such as the natural gas supplier, if the local codes are more stringent then those specified. Refer any conflicts to the Resident Engineer.

4. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be products of one manufacturer.
5. Assembled Units: Manufacturers of equipment assemblies, which use components made by others, assume complete responsibility for the final assembled product.
6. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
7. Asbestos products or equipment or materials containing asbestos shall not be used.

E. Equipment Service Organizations:
1. HVAC: Products and systems shall be supported by service organizations that maintain a complete inventory of repair parts and are located within 50 miles to the site.

F. HVAC Mechanical Systems Welding: Before any welding is performed, contractor shall submit a certificate certifying that welders comply with the following requirements:
1. Qualify welding processes and operators for piping according to ASME "Boiler and Pressure Vessel Code", Section IX, "Welding and Brazing Qualifications".
2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
3. Certify that each welder has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.

G. Execution (Installation, Construction) Quality:
1. Apply and install all items in accordance with manufacturer's written instructions. Refer conflicts between the manufacturer's instructions and the contract drawings and specifications to the Resident Engineer for resolution. Provide written hard copies or computer files of manufacturer’s installation instructions to the Resident Engineer at least two weeks prior to commencing installation of any item. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations is a cause for rejection of the material.
2. Provide complete layout drawings required by Paragraph, SUBMITTALS. Do not commence construction work on any system until the layout drawings have been approved.

H. Upon request by Government, provide lists of previous installations for selected items of equipment. Include contact persons who will serve as references, with telephone numbers and e-mail addresses.

**1.4 SUBMITTALS**

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, and with requirements in the individual specification sections.

B. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements.

C. If equipment is submitted which differs in arrangement from that shown, provide drawings that show the rearrangement of all associated systems. Approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.

D. Prior to submitting shop drawings for approval, contractor shall certify in writing that manufacturers of all major items of equipment have each reviewed drawings and specifications, and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.

E. Submittals and shop drawings for interdependent items, containing applicable descriptive information, shall be furnished together and complete in a group. Coordinate and properly integrate materials and equipment in each group to provide a completely compatible and efficient.

F. Layout Drawings:

1. Submit complete consolidated and coordinated layout drawings for all new systems, and for existing systems that are in the same areas. Refer to Section 00 72 00, GENERAL CONDITIONS, Article, SUBCONTRACTS AND WORK COORDINATION.

2. The drawings shall include plan views, elevations and sections of all systems and shall be on a scale of not less than 1:32 (3/8-inch equal to one foot). Clearly identify and dimension the proposed locations of the principal items of equipment. The drawings shall clearly show locations and adequate clearance for all equipment, piping, valves, control panels and other items. Show the access means for all items requiring access for operations and maintenance. Provide detailed layout drawings of all piping and duct systems.

3. Do not install equipment foundations, equipment or piping until layout drawings have been approved.
4. In addition, for HVAC systems, provide details of the following:
   a. Electrical equipment rooms.
   b.Not Usedc. Hangers, inserts, supports, and bracing.
   d. Pipe sleeves.
   e. Duct or equipment penetrations of floors, walls, ceilings, or roofs.

G. Manufacturer's Literature and Data: Submit under the pertinent section rather than under this section.
1. Submit belt drive with the driven equipment. Submit selection data for specific drives when requested by the Resident Engineer.
2. Submit electric motor data and variable speed drive data with the driven equipment.
3. Equipment and materials identification. Each new equipment item to be labeled as to equipment identification number, installation date, area serving, feeder services, etc.
4. Fire-stopping materials.
5. Hangers, inserts, supports and bracing. Provide load calculations for variable spring and constant support hangers.
6. Wall, floor, and ceiling plates.
7. Training, manuals, schematics, maintenance schedules are required on all new equipment installed.

H. HVAC Maintenance Data and Operating Instructions:
1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.
2. Provide a listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment. Include in the listing belts for equipment: Belt manufacturer, model number, size and style, and distinguished whether of multiple belt sets.

I. Provide copies of approved HVAC equipment submittals to the Testing, Adjusting and Balancing Subcontractor.

**1.5 APPLICABLE PUBLICATIONS**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. Air Conditioning, Heating and Refrigeration Institute (AHRI):
430-2009.....Central Station Air-Handling Units

C. American National Standard Institute (ANSI):
B31.1-2007.....Power Piping

D. Rubber Manufacturers Association (ANSI/RMA):
IP-20-2007.....Specifications for Drives Using Classical V-Belts and Sheaves
IP-21-2009.....Specifications for Drives Using Double-V (Hexagonal) Belts
IP-22-2007.....Specifications for Drives Using Narrow V-Belts and Sheaves

E. Air Movement and Control Association (AMCA):
410-96.....Recommended Safety Practices for Air Moving Devices

F. American Society of Mechanical Engineers (ASME):
Boiler and Pressure Vessel Code (BPVC):
Section I-2007.....Power Boilers
Section IX-2007.....Welding and Brazing Qualifications
Code for Pressure Piping:
B31.1-2007.....Power Piping

G. American Society for Testing and Materials (ASTM):
A36/A36M-08.....Standard Specification for Carbon Structural Steel
A575-96(2007).....Standard Specification for Steel Bars, Carbon, Merchant Quality, M-Grades
E84-10.....Standard Test Method for Surface Burning Characteristics of Building Materials
E119-09c.....Standard Test Methods for Fire Tests of Building Construction and Materials

H. Manufacturers Standardization Society (MSS) of the Valve and Fittings Industry, Inc:
SP-58-2009.....Pipe Hangers and Supports-Materials, Design and Manufacture, Selection, Application, and Installation
SP 69-2003.....Pipe Hangers and Supports-Selection and Application
SP 127-2001.....Bracing for Piping Systems, Seismic – Wind – Dynamic, Design, Selection, Application

I. National Electrical Manufacturers Association (NEMA):
MG-1-2009.....Motors and Generators

J. National Fire Protection Association (NFPA):

31-06.....Standard for Installation of Oil-Burning Equipment

54-09.....National Fuel Gas Code

70-08.....National Electrical Code

85-07.....Boiler and Combustion Systems Hazards Code

90A-09.....Standard for the Installation of Air Conditioning and Ventilating Systems

101-09.....Life Safety Code

**1.6 DELIVERY, STORAGE AND HANDLING**

A. Protection of Equipment:

1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage.
2. Place damaged equipment in first class, new operating condition; or, replace same as determined and directed by the Resident Engineer. Such repair or replacement shall be at no additional cost to the Government.
3. Protect interiors of new equipment and piping systems against entry of foreign matter. Clean both inside and outside before painting or placing equipment in operation.
4. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.

B. Cleanliness of Piping and Equipment Systems:

1. Exercise care in storage and handling of equipment and piping material to be incorporated in the work. Remove debris arising from cutting, threading and welding of piping.
2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.
3. Clean interior of all tanks prior to delivery for beneficial use by the Government.
4. Boilers shall be left clean following final internal inspection by Government insurance representative or inspector.
5. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

**1.7 JOB CONDITIONS – WORK IN EXISTING BUILDING**

A. Building Operation: Government employees will be continuously operating and managing all facilities, including temporary facilities, that serve the medical center.

B. Maintenance of Service: Schedule all work to permit continuous service as required by the medical center.

C. Steam and Condensate Service Interruptions: Limited steam and condensate service interruptions, as required for interconnections of new and existing systems, will be permitted by the Resident Engineer during periods when the demands are not critical to the operation of the medical center. These non-critical periods are limited to between 8 pm and 5 am in the appropriate off-season (if applicable). Provide at least one week advance notice to the Resident Engineer.

D. Phasing of Work: Comply with all requirements shown on drawings or specified.

E. Building Working Environment: Maintain the architectural and structural integrity of the building and the working environment at all times. Maintain the interior of building at 18 degrees C (65 degrees F) minimum. Limit the opening of doors, windows or other access openings to brief periods as necessary for rigging purposes. No storm water or ground water leakage permitted. Provide daily clean-up of construction and demolition debris on all floor surfaces and on all equipment being operated by VA.

F. Acceptance of Work for Government Operation: As new facilities are made available for operation and these facilities are of beneficial use to the Government, inspections will be made and tests will be performed. Based on the inspections, a list of contract deficiencies will be issued to the Contractor. After correction of deficiencies as necessary for beneficial use, the Contracting Officer will process necessary acceptance and the equipment will then be under the control and operation of Government personnel.

**PART 2 - PRODUCTS**

**2.1 FACTORY-ASSEMBLED PRODUCTS**

A. Provide maximum standardization of components to reduce spare part requirements.

B. Manufacturers of equipment assemblies that include components made by others shall assume complete responsibility for final assembled unit.

1. All components of an assembled unit need not be products of same manufacturer.
2. Constituent parts that are alike shall be products of a single manufacturer.
3. Components shall be compatible with each other and with the total assembly for intended service.
4. Contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.

C. Components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a name plate securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.

D. Major items of equipment, which serve the same function, must be the same make and model. Exceptions will be permitted if performance requirements cannot be met.

**2.2 COMPATIBILITY OF RELATED EQUIPMENT**

A. Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational plant that conforms to contract requirements.

**2.3 BELT DRIVES NOT USED**

**2.4 DRIVE GUARDS**

A. For machinery and equipment, provide guards as shown in AMCA 410 for belts, chains, couplings, pulleys, sheaves, shafts, gears and other moving parts regardless of height above the floor to prevent damage to equipment and injury to personnel. Drive guards may be excluded where motors and drives are inside factory fabricated air handling unit casings.

B. Pump shafts and couplings shall be fully guarded by a sheet steel guard, covering coupling and shaft but not bearings. Material shall be minimum 16-gage sheet steel; ends shall be braked and drilled and attached to pump base with minimum of four 6 mm (1/4-inch) bolts. Reinforce guard as necessary to prevent side play forcing guard onto couplings.

C. V-belt and sheave assemblies shall be totally enclosed, firmly mounted, non-resonant. Guard shall be an assembly of minimum 22-gage sheet steel and expanded or perforated metal to permit observation of belts. 25 mm (one-inch) diameter hole shall be provided at each shaft centerline to permit speed measurement.

D. Materials: Sheet steel, cast iron, expanded metal or wire mesh rigidly secured so as to be removable without disassembling pipe, duct, or electrical connections to equipment.

E. Access for Speed Measurement: 25 mm (One inch) diameter hole at each shaft center.

**2.5 LIFTING ATTACHMENTS**

A. Provide equipment with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

**2.6 ELECTRIC MOTORS**

A. All material and equipment furnished and installation methods shall conform to the requirements of Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT; Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS; and, Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems. Provide special energy efficient premium efficiency type motors as scheduled.

**2.7 VARIABLE SPEED MOTOR CONTROLLERS**

A. Refer to Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS and Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS for specifications.

B. The combination of controller and motor shall be provided by the manufacturer of the driven equipment, such as pumps and fans, and shall be rated for 100 percent output performance. Multiple units of the same class of equipment, i.e. air handlers, fans, pumps, shall be product of a single manufacturer.

C. Motors shall be premium efficiency type and be approved by the motor controller manufacturer. The controller-motor combination shall be guaranteed to provide full motor nameplate horsepower in variable frequency operation. Both driving and driven motor/fan sheaves shall be fixed pitch.

D. Controller shall not add any current or voltage transients to the input AC power distribution system, DDC controls, sensitive medical equipment, etc., nor shall be affected from other devices on the AC power system.

E. Controller shall be provided with the following operating features and accessories:

1. Suitable for variable torque load.

2. Provide thermal magnetic circuit breaker or fused switch with external operator and incoming line fuses. Unit shall be rated for minimum 30,000 AIC. Provide AC input line reactors (3% impedance) filters on incoming power line. Provide output line reactors on line between drive and motor where the distance between the breaker and motor exceeds 50 feet.

**2.8 EQUIPMENT AND MATERIALS IDENTIFICATION**

A. Use symbols, nomenclature and equipment numbers specified, shown on the drawings and shown in the maintenance manuals. In addition, provide bar code identification nameplate for all equipment which will allow the equipment identification code to be scanned into the system for maintenance and inventory tracking. Identification for piping is specified in Section 09 91 00, PAINTING. B. Interior (Indoor) Equipment: Engraved nameplates, with letters not less than 48 mm (3/16-inch) high of brass with black-filled letters, or rigid black plastic with white letters specified in Section 09 91 00, PAINTING permanently fastened to the equipment. Identify unit components such as coils, filters, fans, etc.

B. Exterior (Outdoor) Equipment: Brass nameplates, with engraved black filled letters, not less than 48 mm (3/16-inch) high riveted or bolted to the equipment.

C. Control Items: Label all temperature and humidity sensors, controllers and control dampers. Identify and label each item as they appear on the control diagrams.

D. Valve Tags and Lists:

1. HVAC and Boiler Plant: Provide for all valves other than for equipment in Section 23 82 00, CONVECTION HEATING AND COOLING UNITS.
2. Valve tags: Engraved black filled numbers and letters not less than 13 mm (1/2-inch) high for number designation, and not less than 6.4 mm(1/4-inch) for service designation on 19 gage 38 mm (1-1/2 inches) round brass disc, attached with brass "S" hook or brass chain.
3. Valve lists: Typed or printed plastic coated card(s), sized 216 mm(8-1/2 inches) by 280 mm (11 inches) showing tag number, valve function and area of control, for each service or system. Punch sheets for a 3-ring notebook.
4. Provide detailed plan for each floor of the building indicating the location and valve number for each valve. Identify location of each valve with a color coded thumb tack in ceiling.

**2.9 FIRESTOPPING**

A. Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke and gases where penetrations occur for piping and ductwork. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION, for firestop pipe and duct insulation.

**2.10 GALVANIZED REPAIR COMPOUND**

A. Mil. Spec. DOD-P-21035B, paint form.

**2.11 HVAC PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS**

A. Vibration Isolators: Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.

B. Supports for Roof Mounted Items:

1. Equipment: Equipment rails shall be galvanized steel, minimum 1.3 mm (18 gauge), with integral baseplate, continuous welded corner seams, factory installed 50 mm by 100 mm (2 by 4) treated wood nailer, 1.3 mm (18 gauge) galvanized steel counter flashing cap with screws, built-in cant strip, (except for gypsum or tectum deck), minimum height 280 mm (11 inches). For surface insulated roof deck, provide raised cant strip to start at the upper surface of the insulation.
2. Pipe/duct pedestals: Provide a galvanized Unistrut channel welded to U-shaped mounting brackets which are secured to side of rail with galvanized lag bolts.

C. Pipe Supports: Comply with MSS SP-58. Type Numbers specified refer to this standard. For selection and application comply with MSS SP-69. Refer to Section 05 50 00, METAL FABRICATIONS, for miscellaneous metal support materials and prime coat painting requirements.

D. Attachment to Concrete Building Construction:

1. Concrete insert: MSS SP-58, Type 18.
2. Self-drilling expansion shields and machine bolt expansion anchors: Permitted in concrete not less than 102 mm (four inches) thick when approved by the Resident Engineer for each job condition.
3. Power-driven fasteners: Permitted in existing concrete or masonry not less than 102 mm (four inches) thick when approved by the Resident Engineer for each job condition.

E. Attachment to Steel Building Construction:

1. Welded attachment: MSS SP-58, Type 22.
2. Beam clamps: MSS SP-58, Types 20, 21, 28 or 29. Type 23 C-clamp may be used for individual copper tubing up to 23mm (7/8-inch) outside diameter.

F. Not Used

G. Attachment to existing structure: Support from existing floor/roof frame.

H. Not Used

I. Hanger Rods: Hot-rolled steel, ASTM A36 or A575 for allowable load listed in MSS SP-58. For piping, provide adjustment means for controlling level or slope. Types 13 or 15 turn-buckles shall provide 38 mm (1-1/2 inches) minimum of adjustment and incorporate locknuts. All-thread rods are acceptable.

J. Hangers Supporting Multiple Pipes (Trapeze Hangers): Galvanized, cold formed, lipped steel channel horizontal member, not less than 41 mm by 41 mm (1-5/8 inches by 1-5/8 inches), 2.7 mm (No. 12 gage), designed to accept special spring held, hardened steel nuts. Not permitted for steam supply and condensate piping.

1. Allowable hanger load: Manufacturers rating less 91kg (200 pounds).
2. Guide individual pipes on the horizontal member of every other trapeze hanger with 6 mm (1/4-inch) U-bolt fabricated from steel rod. Provide Type 40 insulation shield, secured by two 13mm (1/2-inch) galvanized steel bands, or preinsulated calcium silicate shield for insulated piping at each hanger.

K. Supports for Piping Systems:

1. Select hangers sized to encircle insulation on insulated piping. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION for insulation thickness. To protect insulation, provide Type 39 saddles for roller type supports or preinsulated calcium silicate shields. Provide Type 40 insulation shield or preinsulated calcium silicate shield at all other types of supports and hangers including those for preinsulated piping.
2. Piping Systems except High and Medium Pressure Steam (MSS SP-58):
   a. Standard clevis hanger: Type 1; provide locknut.
   b. Riser clamps: Type 8.
   c. Wall brackets: Types 31, 32 or 33.
   d. Roller supports: Type 41, 43, 44 and 46.
   e. Saddle support: Type 36, 37 or 38.
   f. Turnbuckle: Types 13 or 15. Preinsulate.
   g. U-bolt clamp: Type 24.
   h. Copper Tube:
      1) Hangers, clamps and other support material in contact with tubing shall be painted with copper colored epoxy paint,

plastic coated or taped with non adhesive isolation tape to prevent electrolysis.

2) For vertical runs use epoxy painted or plastic coated riser clamps.

3) For supporting tube to strut: Provide epoxy painted pipe straps for copper tube or plastic inserted vibration isolation clamps.

4) Insulated Lines: Provide pre-insulated calcium silicate shields sized for copper tube.

i. Supports for plastic or glass piping: As recommended by the pipe manufacturer with black rubber tape extending one inch beyond steel support or clamp.

L. Pre-insulated Calcium Silicate Shields:

1. Provide 360 degree water resistant high density 965 kPa (140 psi) compressive strength calcium silicate shields encased in galvanized metal.
2. Pre-insulated calcium silicate shields to be installed at the point of support during erection.
3. Shield thickness shall match the pipe insulation.
4. The type of shield is selected by the temperature of the pipe, the load it must carry, and the type of support it will be used with.
   a. Shields for supporting chilled or cold water shall have insulation that extends a minimum of 1 inch past the sheet metal. Provide for an adequate vapor barrier in chilled lines.
   b. The pre-insulated calcium silicate shield shall support the maximum allowable water filled span as indicated in MSS-SP 69. To support the load, the shields may have one or more of the following features: structural inserts 4138 kPa (600 psi) compressive strength, an extra bottom metal shield, or formed structural steel (ASTM A36) wear plates welded to the bottom sheet metal jacket.
5. Shields may be used on steel clevis hanger type supports, roller supports or flat surfaces.

**2.12 PIPE PENETRATIONS**

A. Install sleeves during construction for other than blocked out floor openings for risers in mechanical bays.

B. To prevent accidental liquid spills from passing to a lower level, provide the following:

1. For sleeves: Extend sleeve 25 mm (one inch) above finished floor and provide sealant for watertight joint.

2. For blocked out floor openings: Provide 40 mm (1-1/2 inch) angle set in silicone adhesive around opening.
3. For drilled penetrations: Provide 40 mm (1-1/2 inch) angle ring or square set in silicone adhesive around penetration.

C. Penetrations are not allowed through beams or ribs, but may be installed in concrete beam flanges. Any deviation from these requirements must receive prior approval of Resident Engineer.

D. Sheet Metal, Plastic, or Moisture-resistant Fiber Sleeves: Provide for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.

E. Cast Iron or Zinc Coated Pipe Sleeves: Provide for pipe passing through exterior walls below grade. Make space between sleeve and pipe watertight with a modular or link rubber seal. Seal shall be applied at both ends of sleeve.

F. Galvanized Steel or an alternate Black Iron Pipe with asphalt coating Sleeves: Provide for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. Provide sleeve for pipe passing through floor of mechanical rooms, laundry work rooms, and animal rooms above basement. Except in mechanical rooms, connect sleeve with floor plate.

G. Brass Pipe Sleeves: Provide for pipe passing through quarry tile, terrazzo or ceramic tile floors. Connect sleeve with floor plate.

H. Sleeves are not required for wall hydrants for fire department connections or in drywall construction.

I. Sleeve Clearance: Sleeve through floors, walls, partitions, and beam flanges shall be one inch greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation. Interior openings shall be caulked tight with fire stopping material and sealant to prevent the spread of fire, smoke, and gases.

J. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS.

**2.13 DUCT PENETRATIONS**

A. Provide curbs for roof mounted piping, ductwork and equipment. Curbs shall be 18 inches high with continuously welded seams, built-in cant strip, interior baffle with acoustic insulation, curb bottom, hinged curb adapter.

B. Provide firestopping for openings through fire and smoke barriers, maintaining minimum required rating of floor, ceiling or wall assembly. See section 07 84 00, FIRESTOPPING.

**2.14 SPECIAL TOOLS AND LUBRICANTS**

A. Furnish, and turn over to the Resident Engineer, tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.

B. Grease Guns with Attachments for Applicable Fittings: One for each type of grease required for each motor or other equipment.

C. Refrigerant Tools: Provide system charging/Evacuation equipment, gauges, fittings, and tools required for maintenance of furnished equipment.

D. Tool Containers: Hardwood or metal, permanently identified for in tended service and mounted, or located, where directed by the Resident Engineer.

E. Lubricants: A minimum of 0.95 L (one quart) of oil, and 0.45 kg (one pound) of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application.

**2.15 WALL, FLOOR AND CEILING PLATES**

A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.

B. Thickness: Not less than 2.4 mm (3/32-inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025-inch) for up to 80 mm (3-inch pipe), 0.89 mm (0.035-inch) for larger pipe.

C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Provide a watertight joint in spaces where brass or steel pipe sleeves are specified.

**2.16 ASBESTOS**

A. Materials containing asbestos are not permitted.

**PART 3 - EXECUTION**

**3.1 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING**

A. Coordinate location of piping, sleeves, inserts, hangers, ductwork and equipment. Locate piping, sleeves, inserts, hangers, ductwork and equipment clear of windows, doors, openings, light outlets, and other services and utilities. Prepare equipment layout drawings to coordinate proper location and personnel access of all facilities. Submit the drawings for review as required by Part 1. Follow manufacturer's

published recommendations for installation methods not otherwise specified.

B. Operating Personnel Access and Observation Provisions: Select and arrange all equipment and systems to provide clear view and easy access, without use of portable ladders, for maintenance and operation of all devices including, but not limited to: all equipment items, valves, filters, strainers, transmitters, sensors, control devices. All gages and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Do not reduce or change maintenance and operating space and access provisions that are shown on the drawings.

C. Equipment and Piping Support: Coordinate structural systems necessary for pipe and equipment support with pipe and equipment locations to permit proper installation.

D. Location of pipe sleeves, trenches and chases shall be accurately coordinated with equipment and piping locations.

E. Cutting Holes:

1. Cut holes through concrete and masonry by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill will not be allowed, except as permitted by Resident Engineer where working area space is limited.
2. Locate holes to avoid interference with structural members such as beams or grade beams. Holes shall be laid out in advance and drilling done only after approval by Resident Engineer. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to Resident Engineer for approval.
3. Do not penetrate membrane waterproofing.

F. Interconnection of Instrumentation or Control Devices: Generally, electrical and pneumatic interconnections are not shown but must be provided.

G. Minor Piping: Generally, small diameter pipe runs from drips and drains, water cooling, and other service are not shown but must be provided.

H. Not Used

I. Protection and Cleaning:

1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the Resident Engineer. Damaged or defective items in the opinion of the Resident Engineer, shall be replaced.

2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Tightly cover and protect fixtures and equipment against dirt, water chemical, or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.

J. Concrete and Grout: Use concrete and shrink compensating grout 25 MPa (3000 psi) minimum, specified in Section 03 30 00, CAST-IN-PLACE CONCRETE.

K. Install gages, thermometers, valves and other devices with due regard for ease in reading or operating and maintaining said devices. Locate and position thermometers and gages to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.

L. Install steam piping expansion joints as per manufacturer’s recommendations.

M. Work in Existing Building:

1. Perform as specified in Article, OPERATIONS AND STORAGE AREAS, Article, ALTERATIONS, and Article, RESTORATION of the Section 01 00 00, GENERAL REQUIREMENTS for relocation of existing equipment, alterations and restoration of existing building(s).
2. As specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, OPERATIONS AND STORAGE AREAS, make alterations to existing service piping at times that will least interfere with normal operation of the facility.
3. Cut required openings through existing masonry and reinforced concrete using diamond core drills. Use of pneumatic hammer type drills, impact type electric drills, and hand or manual hammer type drills, will be permitted only with approval of the Resident Engineer. Locate openings that will least effect structural slabs, columns, ribs or beams. Refer to the Resident Engineer for determination of proper design for openings through structural sections and opening layouts approval, prior to cutting or drilling into structure. After Resident Engineer's approval, carefully cut opening through construction no larger than absolutely necessary for the required installation.

N. Not Used

O. Switchgear/Electrical Equipment Drip Protection: Every effort shall be made to eliminate the installation of pipe above electrical and

telephone switchgear. If this is not possible, encase pipe in a second pipe with a minimum of joints. Installation of piping, ductwork, leak protection apparatus or other installations foreign to the electrical installation shall be located in the space equal to the width and depth of the equipment and extending from to a height of 1.8 m (6 ft.) above the equipment of to ceiling structure, whichever is lower (NFPA 70).

P. Inaccessible Equipment:
   1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, equipment shall be removed and reinstalled or remedial action performed as directed at no additional cost to the Government.
   2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as motors, fans, pumps, belt guards, transformers, high voltage lines, piping, and ductwork.

**3.2 TEMPORARY PIPING AND EQUIPMENT**

A. Continuity of operation of existing facilities will generally require temporary installation or relocation of equipment and piping.

B. The Contractor shall provide all required facilities in accordance with the requirements of phased construction and maintenance of service. All piping and equipment shall be properly supported, sloped to drain, operate without excessive stress, and shall be insulated where injury can occur to personnel by contact with operating facilities. The requirements of Paragraph 3.1 apply.

C. Temporary facilities and piping shall be completely removed and any openings in structures sealed. Provide necessary blind flanges and caps to seal open piping remaining in service.

**3.3 RIGGING**

A. Design is based on application of available equipment. Openings in building structures are planned to accommodate design scheme.

B. Alternative methods of equipment delivery may be offered by Contractor and will be considered by Government under specified restrictions of phasing and maintenance of service as well as structural integrity of the building.

C. Close all openings in the building when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.

D. Contractor shall provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for

rigging purposes and support of equipment on structures shall be Contractor's full responsibility. Upon request, the Government will check structure adequacy and advise Contractor of recommended restrictions.

E. Contractor shall check all clearances, weight limitations and shall offer a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, shall be at Contractor's cost, time and responsibility.

F. Rigging plan and methods shall be referred to Resident Engineer for evaluation prior to actual work.

G. Restore building to original condition upon completion of rigging work.

**3.4 PIPE AND EQUIPMENT SUPPORTS**

A. Where hanger spacing does not correspond with joist or rib spacing, use structural steel channels secured directly to joist and rib structure that will correspond to the required hanger spacing, and then suspend the equipment and piping from the channels. Drill or burn holes in structural steel only with the prior approval of the Resident Engineer.

B. Use of chain, wire or strap hangers; wood for blocking, stays and bracing; or, hangers suspended from piping above will not be permitted. Replace or thoroughly clean rusty products and paint with zinc primer.

C. Use hanger rods that are straight and vertical. Turnbuckles for vertical adjustments may be omitted where limited space prevents use. Provide a minimum of 15 mm (1/2-inch) clearance between pipe or piping covering and adjacent work.

D. HVAC Horizontal Pipe Support Spacing: Refer to MSS SP-69. Provide additional supports at valves, strainers, in-line pumps and other heavy components. Provide a support within one foot of each elbow.

E. HVAC Vertical Pipe Supports:

1. Up to 150 mm (6-inch pipe), 9 m (30 feet) long, bolt riser clamps to the pipe below couplings, or welded to the pipe and rests supports securely on the building structure.
2. Vertical pipe larger than the foregoing, support on base elbows or tees, or substantial pipe legs extending to the building structure.

F. Overhead Supports:

1. The basic structural system of the building is designed to sustain the loads imposed by equipment and piping to be supported overhead.
2. Provide steel structural members, in addition to those shown, of adequate capability to support the imposed loads, located in accordance with the final approved layout of equipment and piping.

3. Tubing and capillary systems shall be supported in channel troughs.

G. Floor Supports:

1. Provide concrete bases, concrete anchor blocks and pedestals, and structural steel systems for support of equipment and piping. Anchor and dowel concrete bases and structural systems to resist forces under operating and seismic conditions (if applicable) without excessive displacement or structural failure.
2. Do not locate or install bases and supports until equipment mounted thereon has been approved. Size bases to match equipment mounted thereon plus 50 mm (2 inch) excess on all edges. Boiler foundations shall have horizontal dimensions that exceed boiler base frame dimensions by at least 150 mm (6 inches) on all sides. Refer to structural drawings. Bases shall be neatly finished and smoothed, shall have chamfered edges at the top, and shall be suitable for painting.
3. All equipment shall be shimmed, leveled, firmly anchored, and grouted with epoxy grout. Anchor bolts shall be placed in sleeves, anchored to the bases. Fill the annular space between sleeves and bolts with a granular material to permit alignment and realignment.
4. For seismic anchoring, refer to Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS.

**3.5 MECHANICAL DEMOLITION**

A. Rigging access, other than indicated on the drawings, shall be provided by the Contractor after approval for structural integrity by the Resident Engineer. Such access shall be provided without additional cost or time to the Government. Where work is in an operating plant, provide approved protection from dust and debris at all times for the safety of plant personnel and maintenance of plant operation and environment of the plant.

B. In an operating facility, maintain the operation, cleanliness and safety. Government personnel will be carrying on their normal duties of operating, cleaning and maintaining equipment and plant operation. Confine the work to the immediate area concerned; maintain cleanliness and wet down demolished materials to eliminate dust. Do not permit debris to accumulate in the area to the detriment of plant operation. Perform all flame cutting to maintain the fire safety integrity of this plant. Adequate fire extinguishing facilities shall be available at all times. Perform all work in accordance with recognized fire protection standards. Inspection will be made by personnel of the VA Medical

Center, and Contractor shall follow all directives of the RE or COTR with regard to rigging, safety, fire safety, and maintenance of operations.

C. Completely remove all piping, wiring, conduit, and other devices associated with the equipment not to be re-used in the new work. This includes all pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. Seal all openings, after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with plans and specifications where specifically covered. Structural integrity of the building system shall be maintained. Reference shall also be made to the drawings and specifications of the other disciplines in the project for additional facilities to be demolished or handled.

D. All valves including gate, globe, ball, butterfly and check, all pressure gages and thermometers with wells shall remain Government property and shall be removed and delivered to Resident Engineer and stored as directed. The Contractor shall remove all other material and equipment, devices and demolition debris under these plans and specifications. Such material shall be removed from Government property expeditiously and shall not be allowed to accumulate.

E. Asbestos Insulation Removal: Conform to Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT.

**3.6 CLEANING AND PAINTING**

A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.

B. In addition, the following special conditions apply:

1. Cleaning shall be thorough. Use solvents, cleaning materials and methods recommended by the manufacturers for the specific tasks. Remove all rust prior to painting and from surfaces to remain unpainted. Repair scratches, scuffs, and abrasions prior to applying prime and finish coats.
2. Material And Equipment Not To Be Painted Includes:
   a. Motors, controllers, control switches, and safety switches.
   b. Control and interlock devices.
   c. Regulators.
   d. Pressure reducing valves.

e. Control valves and thermostatic elements.
f. Lubrication devices and grease fittings.
g. Copper, brass, aluminum, stainless steel and bronze surfaces.
h. Valve stems and rotating shafts.
i. Pressure gauges and thermometers.
j. Glass.
k. Name plates.

3. Control and instrument panels shall be cleaned, damaged surfaces repaired, and shall be touched-up with matching paint obtained from panel manufacturer.
4. Pumps, motors, steel and cast iron bases, and coupling guards shall be cleaned, and shall be touched-up with the same color as utilized by the pump manufacturer
5. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats.
6. Paint shall withstand the following temperatures without peeling or discoloration:
   a. Condensate and feedwater -- 38 degrees C (100 degrees F) on insulation jacket surface and 120 degrees C (250 degrees F) on metal pipe surface.
   b. Steam -- 52 degrees C (125 degrees F) on insulation jacket surface and 190 degrees C (375 degrees F) on metal pipe surface.
7. Final result shall be smooth, even-colored, even-textured factory finish on all items. Completely repaint the entire piece of equipment if necessary to achieve this.

**3.7 IDENTIFICATION SIGNS**

A. Provide laminated plastic signs, with engraved lettering not less than 5 mm (3/16-inch) high, designating functions, for all equipment, switches, motor controllers, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols shall correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.
B. Factory Built Equipment: Metal plate, securely attached, with name and address of manufacturer, serial number, model number, size, performance.
C. Pipe Identification: Refer to Section 09 91 00, PAINTING.

**3.8 MOTOR AND DRIVE ALIGNMENT**

A. Belt Drive: Set driving and driven shafts parallel and align so that the corresponding grooves are in the same plane.

B. Direct-connect Drive: Securely mount motor in accurate alignment so that shafts are free from both angular and parallel misalignment when both motor and driven machine are operating at normal temperatures.

**3.9 LUBRICATION**

A. Lubricate all devices requiring lubrication prior to initial operation. Field-check all devices for proper lubrication.

B. Equip all devices with required lubrication fittings or devices. Provide a minimum of one liter (one quart) of oil and 0.5 kg (one pound) of grease of manufacturer's recommended grade and type for each different application; also provide 12 grease sticks for lubricated plug valves. Deliver all materials to Resident Engineer in unopened containers that are properly identified as to application.

C. Provide a separate grease gun with attachments for applicable fittings for each type of grease applied.

D. All lubrication points shall be accessible without disassembling equipment, except to remove access plates.

**3.10 COMMISSIONING**

A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specifications will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

**3.11 STARTUP AND TEMPORARY OPERATION**

Start up equipment as described in equipment specifications. Verify that vibration is within specified tolerance prior to extended operation. Temporary use of equipment is specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.

**3.12 OPERATING AND PERFORMANCE TESTS**

A. Prior to the final inspection, perform required tests as specified in Section 01 00 00, GENERAL REQUIREMENTS and submit the test reports and records to the Resident Engineer.

B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs or replacements, and repeat tests at no additional cost to the Government.

C. When completion of certain work or system occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then make performance tests for heating systems and for cooling systems respectively during first actual seasonal use of respective systems following completion of work.

**3.13 INSTRUCTIONS TO VA PERSONNEL**

Provide in accordance with Article, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS, and Section 23 08 11, DEMONSTRATIONS AND TESTS FOR BOILER PLANT.

- - - E N D - - -

# SECTION 23 05 12
# GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT

## PART 1 - GENERAL

### 1.1 DESCRIPTION:

This section specifies the furnishing, installation and connection of motors for HVAC and steam generation equipment.

### 1.2 RELATED WORK:

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements common to more than one Section of Division 26.

B. Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS: Starters, control and protection for motors.

C. Section 26 24 19, MOTOR-CONTROL CENTERS: Multiple motor control assemblies, which include motor starters.

D. Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

E. Section 23 34 00, HVAC FANS.

R. Section 23 81 43, AIR-SOURCE UNITARY HEAT PUMPS.

VH. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.

### 1.3 SUBMITTALS:

A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

B. Shop Drawings:

1. Provide documentation to demonstrate compliance with drawings and specifications.
2. Include electrical ratings, efficiency, bearing data, power factor, frame size, dimensions, mounting details, materials, horsepower, voltage, phase, speed (RPM), enclosure, starting characteristics, torque characteristics, code letter, full load and locked rotor current, service factor, and lubrication method.

C. Manuals:

1. Submit simultaneously with the shop drawings, companion copies of complete installation, maintenance and operating manuals, including technical data sheets and application data.

D. Certification: Two weeks prior to final inspection, unless otherwise noted, submit four copies of the following certification to the Resident Engineer:

1. Certification that the motors have been applied, installed, adjusted, lubricated, and tested according to manufacturer published recommendations.

E. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.

**1.4 APPLICABLE PUBLICATIONS:**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. National Electrical Manufacturers Association (NEMA):
MG 1-2006 Rev. 1 2009 ..Motors and Generators
MG 2-2001 Rev. 1 2007...Safety Standard for Construction and Guide for Selection, Installation and Use of Electric Motors and Generators

C. National Fire Protection Association (NFPA):
70-2008.....National Electrical Code (NEC)

D. Institute of Electrical and Electronics Engineers (IEEE):
112-04.....Standard Test Procedure for Polyphase Induction Motors and Generators

E. American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE):
90.1-2007.....Energy Standard for Buildings Except Low-Rise Residential Buildings

**PART 2 - PRODUCTS**

**2.1 MOTORS:**

A. For alternating current, fractional and integral horsepower motors, NEMA Publications MG 1 and MG 2 shall apply.

B. All material and equipment furnished and installation methods shall conform to the requirements of Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS; and Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems. Provide premium efficiency type motors as scheduled. Unless otherwise specified for a particular application, use electric motors with the following requirements.

C. Single-phase Motors: Motors for centrifugal fans and pumps may be split phase or permanent split capacitor (PSC) type. Provide capacitor-start type for hard starting applications.

1. Contractor's Option - Electrically Commutated motor (EC Type): Motor shall be brushless DC type specifically designed for applications with heavy duty ball bearings and electronic commutation. The motor shall be speed controllable down to 20% of full speed and 85% efficient at all speeds.

D. Poly-phase Motors: NEMA Design B, Squirrel cage, induction type.
   1. Two Speed Motors: Each two-speed motor shall have two separate windings. Provide a time- delay (20 seconds minimum) relay for switching from high to low speed.

E. Voltage ratings shall be as follows:
   1. Single phase:
      a. Motors connected to 120-volt systems: 115 volts.
      b. Motors connected to 208-volt systems: 200 volts.
      c. Motors connected to 240 volt or 480 volt systems: 230/460 volts, dual connection.

F. Number of phases shall be as follows:
   1. Motors,: Single phase.

G. Motors shall be designed for operating the connected loads continuously in a 40°C (104°F) environment, where the motors are installed, without exceeding the NEMA standard temperature rises for the motor insulation. If the motors exceed 40°C (104°F), the motors shall be rated for the actual ambient temperatures.

H. Motor designs, as indicated by the NEMA code letters, shall be coordinated with the connected loads to assure adequate starting and running torque.

I. Motor Enclosures:
   1. Shall be the NEMA types as specified and/or shown on the drawings.
   2. Where the types of motor enclosures are not shown on the drawings, they shall be the NEMA types, which are most suitable for the environmental conditions where the motors are being installed. Enclosure requirements for certain conditions are as follows:
      a. Motors located outdoors, indoors in wet or high humidity locations, or in unfiltered airstreams shall be totally enclosed type.
      b. Where motors are located in an NEC 511 classified area, provide TEFC explosion proof motor enclosures.
      c. Where motors are located in a corrosive environment, provide TEFC enclosures with corrosion resistant finish.

3. Enclosures shall be primed and finish coated at the factory with manufacturer's prime coat and standard finish.

J. Special Requirements:

1. Where motor power requirements of equipment furnished deviate from power shown on plans, provide electrical service designed under the requirements of NFPA 70 without additional time or cost to the Government.
2. Assemblies of motors, starters, controls and interlocks on factory assembled and wired devices shall be in accordance with the requirements of this specification.
3. Wire and cable materials specified in the electrical division of the specifications shall be modified as follows:
   a. Not Used
   b. Other wiring at boilers and to control panels shall be NFPA 70 designation THWN.
   c. Provide shielded conductors or wiring in separate conduits for all instrumentation and control systems where recommended by manufacturer of equipment.
4. Select motor sizes so that the motors do not operate into the service factor at maximum required loads on the driven equipment. Motors on pumps shall be sized for non-overloading at all points on the pump performance curves.
5. Motors utilized with variable frequency drives shall be rated “inverter-duty” per NEMA Standard, MG1, Part 31.4.4.2. Provide motor shaft grounding apparatus that will protect bearings from damage from stray currents.

K. Additional requirements for specific motors, as indicated in the other sections listed in Article 1.2, shall also apply.

L. Energy-Efficient Motors (Motor Efficiencies): All permanently wired polyphase motors of 746 Watts (1 HP) or more shall meet the minimum full-load efficiencies as indicated in the following table. Motors of 746 Watts or more with open, drip-proof or totally enclosed fan-cooled enclosures shall be NEMA premium efficiency type, unless otherwise indicated. Motors provided as an integral part of motor driven equipment are excluded from this requirement if a minimum seasonal or overall efficiency requirement is indicated for that equipment by the provisions of another section. Motors not specified as “premium efficiency” shall comply with the Energy Policy Act of 2005 (EPACT).

| Minimum Premium Efficiencies Open Drip-Proof | | | | Minimum Premium Efficiencies Totally Enclosed Fan-Cooled | | | |
|---|---|---|---|---|---|---|---|
| **Rating kW (HP)** | **1200 RPM** | **1800 RPM** | **3600 RPM** | **Rating kW (HP)** | **1200 RPM** | **1800 RPM** | **3600 RPM** |
| 0.746 (1) | 82.5% | 85.5% | 77.0% | 0.746 (1) | 82.5% | 85.5% | 77.0% |
| 1.12 (1.5) | 86.5% | 86.5% | 84.0% | 1.12 (1.5) | 87.5% | 86.5% | 84.0% |
| 1.49 (2) | 87.5% | 86.5% | 85.5% | 1.49 (2) | 88.5% | 86.5% | 85.5% |
| 2.24 (3) | 88.5% | 89.5% | 85.5% | 2.24 (3) | 89.5% | 89.5% | 86.5% |
| 3.73 (5) | 89.5% | 89.5% | 86.5% | 3.73 (5) | 89.5% | 89.5% | 88.5% |
| 5.60 (7.5) | 90.2% | 91.0% | 88.5% | 5.60 (7.5) | 91.0% | 91.7% | 89.5% |
| 7.46 (10) | 91.7% | 91.7% | 89.5% | 7.46 (10) | 91.0% | 91.7% | 90.2% |
| 11.2 (15) | 91.7% | 93.0% | 90.2% | 11.2 (15) | 91.7% | 92.4% | 91.0% |
| 14.9 (20) | 92.4% | 93.0% | 91.0% | 14.9 (20) | 91.7% | 93.0% | 91.0% |
| 18.7 (25) | 93.0% | 93.6% | 91.7% | 18.7 (25) | 93.0% | 93.6% | 91.7% |
| 22.4 (30) | 93.6% | 94.1% | 91.7% | 22.4 (30) | 93.0% | 93.6% | 91.7% |
| 29.8 (40) | 94.1% | 94.1% | 92.4% | 29.8 (40) | 94.1% | 94.1% | 92.4% |
| 37.3 (50) | 94.1% | 94.5% | 93.0% | 37.3 (50) | 94.1% | 94.5% | 93.0% |
| 44.8 (60) | 94.5% | 95.0% | 93.6% | 44.8 (60) | 94.5% | 95.0% | 93.6% |
| 56.9 (75) | 94.5% | 95.0% | 93.6% | 56.9 (75) | 94.5% | 95.4% | 93.6% |
| 74.6 (100) | 95.0% | 95.4% | 93.6% | 74.6 (100) | 95.0% | 95.4% | 94.1% |
| 93.3 (125) | 95.0% | 95.4% | 94.1% | 93.3 (125) | 95.0% | 95.4% | 95.0% |
| 112 (150) | 95.4% | 95.8% | 94.1% | 112 (150) | 95.8% | 95.8% | 95.0% |
| 149.2 (200) | 95.4% | 95.8% | 95.0% | 149.2 (200) | 95.8% | 96.2% | 95.4% |

M. Minimum Power Factor at Full Load and Rated Voltage: 90 percent at 1200 RPM, 1800 RPM and 3600 RPM.

**PART 3 - EXECUTION**

**3.1 INSTALLATION:**

Install motors in accordance with manufacturer’s recommendations, the NEC, NEMA, as shown on the drawings and/or as required by other sections of these specifications.

**3.2 FIELD TESTS**

A. Perform an electric insulation resistance Test using a megohmmeter on all motors after installation, before start-up. All shall test free from grounds.

B. Perform Load test in accordance with ANSI/IEEE 112, Test Method B, to determine freedom from electrical or mechanical defects and compliance with performance data.

C. Insulation Resistance: Not less than one-half meg-ohm between stator conductors and frame, to be determined at the time of final inspection.

**3.3 STARTUP AND TESTING**

A. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with Resident Engineer and Commissioning Agent. Provide a minimum of 7 days prior notice.

**3.4 COMMISSIONING**

A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

**3.5 DEMONSTRATION AND TRAINING**

A. Provide services of manufacturer’s technical representative for four hours to instruct VA personnel in operation and maintenance of units.

B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

# SECTION 23 05 41
# NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT

## PART 1 - GENERAL

### 1.1 DESCRIPTION

Noise criteria, vibration tolerance and vibration isolation for HVAC and plumbing work.

### 1.2 RELATED WORK

A. Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION: General mechanical requirements and items, which are common to more than one section of Division 23.

B. Section 23 22 13, STEAM and CONDENSATE HEATING PIPING: Requirements for flexible pipe connectors to reciprocating and rotating mechanical equipment.

C. Section 23 31 00, HVAC DUCTS and CASINGS: requirements for flexible duct connectors, sound attenuators and sound absorbing duct lining.

D. SECTION 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC: requirements for sound and vibration tests.

E. SECTION 23 37 00, AIR OUTLETS and INLETS: noise requirements for G-grilles.

F. SECTION 23 34 00, HVAC FANS: sound and vibration isolation requirements for fans.

G. SECTION 26 32 13, ENGINER GENERATORS: requirements for sound and vibration isolation.

H. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.

### 1.3 QUALITY ASSURANCE

A. Refer to article, QUALITY ASSURANCE in specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

B. Noise Criteria:

1. Noise levels in all 8 octave bands due to equipment (excluding the emergency generator) and duct systems shall not exceed 50 NC levels:
2. For equipment which has no sound power ratings scheduled on the plans, the contractor shall select equipment such that the fore-going noise criteria, local ordinance noise levels, and OSHA re-quirements are not exceeded. Selection procedure shall be in

accordance with ASHRAE Fundamentals Handbook, Chapter 7, Sound and Vibration.

3. An allowance, not to exceed 5db, may be added to the measured value to compensate for the variation of the room attenuating effect between room test condition prior to occupancy and design condition after occupancy which may include the addition of sound absorbing material, such as, furniture. This allowance may not be taken after occupancy. The room attenuating effect is defined as the difference between sound power level emitted to room and sound pressure level in room.
4. In absence of specified measurement requirements, measure equipment noise levels three feet from equipment and at an elevation of maximum noise generation.

C. Not Used

D. Allowable Vibration Tolerances for Rotating, Non-reciprocating Equipment: Not to exceed a self-excited vibration maximum velocity of 5 mm per second (0.20 inch per second) RMS, filter in, when measured with a vibration meter on bearing caps of machine in vertical, horizontal and axial directions or measured at equipment mounting feet if bearings are concealed. Measurements for internally isolated fans and motors may be made at the mounting feet.

**1.4 SUBMITTALS**

A. Submit in accordance with specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data:

1. Vibration isolators:
   a. Floor mountings
   b. Hangers
   c. Snubbers
   d. Thrust restraints

C. Isolator manufacturer shall furnish with submittal load calculations for selection of isolators, including supplemental bases, based on lowest operating speed of equipment supported.

**1.5 APPLICABLE PUBLICATIONS**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc. (ASHRAE):
2009 .....Fundamentals Handbook, Chapter 7, Sound and Vibration

C. American Society for Testing and Materials (ASTM):
A123/A123M-09.....Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
A307-07b.....Standard Specification for Carbon Steel Bolts and Studs, 60,000 PSI Tensile Strength
D2240-05(2010).....Standard Test Method for Rubber Property - Durometer Hardness

D. Manufacturers Standardization (MSS):
SP-58-2009.....Pipe Hangers and Supports-Materials, Design and Manufacture

E. Occupational Safety and Health Administration (OSHA):
29 CFR 1910.95.....Occupational Noise Exposure

F. American Society of Civil Engineers (ASCE):
ASCE 7-10 .....Minimum Design Loads for Buildings and Other Structures.

G. American National Standards Institute / Sheet Metal and Air Conditioning Contractor's National Association (ANSI/SMACNA):
001-2008.....Seismic Restraint Manual: Guidelines for Mechanical Systems, 3rd Edition.

H. International Code Council (ICC):
2009 IBC.....International Building Code.

I. Department of Veterans Affairs (VA):
H-18-8 2010.....Seismic Design Requirements.

**PART 2 - PRODUCTS**

**2.1 GENERAL REQUIREMENTS**

A. Type of isolator, base, and minimum static deflection shall be as required for each specific equipment application as recommended by isolator or equipment manufacturer but subject to minimum requirements indicated herein and in the schedule on the drawings.

B. Elastometric Isolators shall comply with ASTM D2240 and be oil resistant neoprene with a maximum stiffness of 60 durometer and have a straight-line deflection curve.

C. Exposure to weather: Isolator housings to be either hot dipped galvanized or powder coated to ASTM B117 salt spray testing standards.

Springs to be powder coated or electro galvanized. All hardware to be electro galvanized. In addition provide limit stops to resist wind velocity. Velocity pressure established by wind shall be calculated in accordance with section 1609 of the International Building Code. A minimum wind velocity of 75 mph shall be employed.

D. Uniform Loading: Select and locate isolators to produce uniform loading and deflection even when equipment weight is not evenly distributed.

E. Color code isolators by type and size for easy identification of capacity.

**2.2 NOT USED**

**2.3 VIBRATION ISOLATORS**

A. Floor Mountings:

1. Double Deflection Neoprene (Type N): Shall include neoprene covered steel support plated (top and bottom), friction pads, and necessary bolt holes.
2. Spring Isolators (Type S): Shall be free-standing, laterally stable and include acoustical friction pads and leveling bolts. Isolators shall have a minimum ratio of spring diameter-to-operating spring height of 1.0 and an additional travel to solid equal to 50 percent of rated deflection.
3. Captive Spring Mount for Seismic Restraint (Type SS):
   a. Design mounts to resiliently resist seismic forces in all directions. Snubbing shall take place in all modes with adjustment to limit upward, downward, and horizontal travel to a maximum of 6 mm (1/4-inch) before contacting snubbers. Mountings shall have a minimum rating of one G coefficient of gravity as calculated and certified by a registered structural engineer.
   b. All mountings shall have leveling bolts that must be rigidly bolted to the equipment. Spring diameters shall be no less than 0.8 of the compressed height of the spring at rated load. Springs shall have a minimum additional travel to solid equal to 50 percent of the rated deflection. Mountings shall have ports for spring inspection. Provide an all directional neoprene cushion collar around the equipment bolt.
4. Spring Isolators with Vertical Limit Stops (Type SP): Similar to spring isolators noted above, except include a vertical limit stop to limit upward travel if weight is removed and also to reduce

movement and spring extension due to wind loads. Provide clearance around restraining bolts to prevent mechanical short circuiting.

5. Pads (Type D), Washers (Type W), and Bushings (Type L): Pads shall be natural rubber or neoprene waffle, neoprene and steel waffle, or reinforced duck and neoprene. Washers and bushings shall be reinforced duck and neoprene. Washers and bushings shall be reinforced duck and neoprene. Size pads for a maximum load of 345 kPa (50 pounds per square inch).

B. Hangers: Shall be combination neoprene and springs unless otherwise noted and shall allow for expansion of pipe.

1. Combination Neoprene and Spring (Type H): Vibration hanger shall contain a spring and double deflection neoprene element in series. Spring shall have a diameter not less than 0.8 of compressed operating spring height. Spring shall have a minimum additional travel of 50 percent between design height and solid height. Spring shall permit a 15 degree angular misalignment without rubbing on hanger box.
2. Spring Position Hanger (Type HP): Similar to combination neoprene and spring hanger except hanger shall hold piping at a fixed elevation during installation and include a secondary adjustment feature to transfer load to spring while maintaining same position.
3. Neoprene (Type HN): Vibration hanger shall contain a double deflection type neoprene isolation element. Hanger rod shall be separated from contact with hanger bracket by a neoprene grommet.
4. Spring (Type HS): Vibration hanger shall contain a coiled steel spring in series with a neoprene grommet. Spring shall have a diameter not less than 0.8 of compressed operating spring height. Spring shall have a minimum additional travel of 50 percent between design height and solid height. Spring shall permit a 15 degree angular misalignment without rubbing on hanger box.
5. Hanger supports for piping 50 mm (2 inches) and larger shall have a pointer and scale deflection indicator.

C. Snubbers: Each spring mounted base shall have a minimum of four all-directional or eight two directional (two per side) seismic snubbers that are double acting. Elastomeric materials shall be shock absorbent neoprene bridge quality bearing pads, maximum 60 durometer, replaceable and have a minimum thickness of 6 mm (1/4 inch). Air gap between hard and resilient material shall be not less than 3 mm (1/8 inch) nor more

than 6 mm (1/4 inch). Restraints shall be capable of withstanding design load without permanent deformation.

D. Thrust Restraints (Type THR): Restraints shall provide a spring element contained in a steel frame with neoprene pads at each end attachment. Restraints shall have factory preset thrust and be field adjustable to allow a maximum movement of 6 mm (1/4 inch) when the fan starts and stops. Restraint assemblies shall include rods, angle brackets and other hardware for field installation.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Vibration Isolation:

1. No metal-to-metal contact will be permitted between fixed and floating parts.
2. Connections to Equipment: Allow for deflections equal to or greater than equipment deflections. Electrical, drain, piping connections, and other items made to rotating or reciprocating equipment (pumps, compressors, etc.) which rests on vibration isolators, shall be isolated from building structure for first three hangers or supports with a deflection equal to that used on the corresponding equipment.
3. Common Foundation: Mount each electric motor on same foundation as driven machine. Hold driving motor and driven machine in positive rigid alignment with provision for adjusting motor alignment and belt tension. Bases shall be level throughout length and width. Provide shims to facilitate pipe connections, leveling, and bolting.
4. Provide heat shields where elastomers are subject to temperatures over 38 degrees C (l00 degrees F).
5. Extend bases for pipe elbow supports at discharge and suction connections at pumps. Pipe elbow supports shall not short circuit pump vibration to structure.
6. Non-rotating equipment such as heat exchangers and convertors shall be mounted on isolation units having the same static deflection as the isolation hangers or support of the pipe connected to the equipment.

B. Inspection and Adjustments: Check for vibration and noise transmission through connections, piping, ductwork, foundations, and walls. Adjust, repair, or replace isolators as required to reduce vibration and noise transmissions to specified levels.

**3.2 ADJUSTING**

A. Adjust vibration isolators after piping systems are filled and equipment is at operating weight.

B. Adjust limit stops on restrained spring isolators to mount equipment at normal operating height. After equipment installation is complete, adjust limit stops so they are out of contact during normal operation.

C. Attach thrust limits at centerline of thrust and adjust to a maximum of 1/4inch (6-mm) movement during start and stop.

D. Adjust active height of spring isolators.

E. Adjust snubbers according to manufacturer's recommendations.

F. Adjust seismic restraints to permit free movement of equipment within normal mode of operation.

G. Torque anchor bolts according to equipment manufacturer's recommendations to resist seismic forces.

**3.3 COMMISSIONING**

A. Provide commissioning documentation in accordance with the requirements of section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - - E N D - - -

**SELECTION GUIDE FOR VIBRATION ISOLATORS**

| EQUIPMENT | | ON GRADE | | | 20FT FLOOR SPAN | | | 30FT FLOOR SPAN | | | 40FT FLOOR SPAN | | | 50FT FLOOR SPAN | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL |
| **REFRIGERATION MACHINES** | | | | | | | | | | | | | | | | |
| ABSORPTION | | --- | D | 0.3 | --- | SP | 0.8 | --- | SP | 1.5 | --- | SP | 1.5 | --- | SP | 2.0 |
| PACKAGED HERMETIC | | --- | D | 0.3 | --- | SP | 0.8 | --- | SP | 1.5 | --- | SP | 1.5 | R | SP | 2.5 |
| OPEN CENTRIFUGAL | | B | D | 0.3 | B | SP | 0.8 | --- | SP | 1.5 | B | SP | 1.5 | B | SP | 3.5 |
| RECIPROCATING: | | | | | | | | | | | | | | | | |
| ALL | | --- | D | 0.3 | --- | SP | 0.8 | R | SP | 2.0 | R | SP | 2.5 | R | SP | 3.5 |
| **COMPRESSORS AND VACUUM PUMPS** | | | | | | | | | | | | | | | | |
| UP THROUGH 1-1/2 HP | | --- | D,L, W | 0.8 | ---- | D,L, W | 0.8 | --- | D,L, W | 1.5 | --- | D,L, W | 1.5 | --- | D,L, W | --- |
| 2 HP AND OVER: | | | | | | | | | | | | | | | | |
| 500 - 750 RPM | | --- | D | 0.8 | --- | S | 0.8 | --- | S | 1.5 | --- | S | 1.5 | --- | S | 2.5 |
| 750 RPM & OVER | | --- | D | 0.8 | --- | S | 0.8 | --- | S | 1.5 | --- | S | 1.5 | --- | S | 2.5 |
| **PUMPS** | | | | | | | | | | | | | | | | |
| CLOSE COUPLED | UP TO 1-1/2 HP | --- | --- | --- | --- | D,L, W | --- | --- | D,L, W | --- | --- | D,L, W | --- | --- | D,L, W | --- |

| EQUIPMENT | | ON GRADE | | | 20FT FLOOR SPAN | | | 30FT FLOOR SPAN | | | 40FT FLOOR SPAN | | | 50FT FLOOR SPAN | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL |
| | 2 HP & OVER | --- | --- | --- | I | S | 0.8 | I | S | 1.5 | I | S | 1.5 | I | S | 2.0 |
| LARGE INLINE | Up to 25 HP | --- | --- | --- | --- | S | 0.75 | --- | S | 1.50 | --- | S | 1.50 | --- | --- | NA |
| | 26 HP THRU 30 HP | --- | --- | --- | --- | S | 1.0 | --- | S | 1.50 | --- | S | 2.50 | --- | --- | NA |
| BASE MOUNTED | UP TO 10 HP | --- | --- | --- | --- | D,L, W | --- | --- | D,L, W | --- | --- | D,L, W | --- | --- | D,L, W | --- |
| | 15 HP THRU 40 HP | I | S | 1.0 | I | S | 1.0 | I | S | 2.0 | I | S | 2.0 | I | S | 2.0 |
| | 50 HP & OVER | I | S | 1.0 | I | S | 1.0 | I | S | 2.0 | I | S | 2.5 | I | S | 2.5 |
| **ROOF FANS** | | | | | | | | | | | | | | | | |
| ABOVE OCCUPIED AREAS: | | | | | | | | | | | | | | | | |
| 5 HP & OVER | | --- | --- | --- | CB | S | 1.0 | CB | S | 1.0 | CB | S | 1.0 | CB | S | 1.0 |
| **CENTRIFUGAL FANS** | | | | | | | | | | | | | | | | |
| UP TO 50 HP: | | | | | | | | | | | | | | | | |
| UP TO 200 RPM | | B | N | 0.3 | B | S | 2.5 | B | S | 2.5 | B | S | 3.5 | B | S | 3.5 |
| 201 - 300 RPM | | B | N | 0.3 | B | S | 2.0 | B | S | 2.5 | B | S | 2.5 | B | S | 3.5 |

| EQUIPMENT | ON GRADE | | | 20FT FLOOR SPAN | | | 30FT FLOOR SPAN | | | 40FT FLOOR SPAN | | | 50FT FLOOR SPAN | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL |
| 301 - 500 RPM | B | N | 0.3 | B | S | 2.0 | B | S | 2.0 | B | S | 2.5 | B | S | 3.5 |
| 501 RPM & OVER | B | N | 0.3 | B | S | 2.0 | B | S | 2.0 | B | S | 2.0 | B | S | 2.5 |
| 60 HP & OVER: | | | | | | | | | | | | | | | |
| UP TO 300 RPM | B | S | 2.0 | I | S | 2.5 | I | S | 3.5 | I | S | 3.5 | I | S | 3.5 |
| 301 - 500 RPM | B | S | 2.0 | I | S | 2.0 | I | S | 2.5 | I | S | 3.5 | I | S | 3.5 |
| 501 RPM & OVER | B | S | 1.0 | I | S | 2.0 | I | S | 2.0 | I | S | 2.5 | I | S | 2.5 |
| | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | |
| **COOLING TOWERS** | | | | | | | | | | | | | | | |
| UP TO 500 RPM | --- | --- | --- | --- | SP | 2.5 | --- | SP | 2.5 | --- | SP | 2.5 | --- | SP | 3.5 |
| 501 RPM & OVER | --- | --- | --- | --- | SP | 0.75 | --- | SP | 0.75 | --- | SP | 1.5 | --- | SP | 2.5 |
| **INTERNAL COMBUSTION ENGINES** | | | | | | | | | | | | | | | |
| UP TO 25 HP | I | N | 0.75 | I | N | 1.5 | I | S | 2.5 | I | S | 3.5 | I | S | 4.5 |
| 30 THRU 100 HP | I | N | 0.75 | I | N | 1.5 | I | S | 2.5 | I | S | 3.5 | I | S | 4.5 |
| 125 HP & OVER | I | N | 0.75 | I | N | 1.5 | I | S | 2.5 | I | S | 3.5 | I | S | 4.5 |
| **AIR HANDLING UNIT PACKAGES** | | | | | | | | | | | | | | | |
| SUSPENDED: | | | | | | | | | | | | | | | |
| UP THRU 5 HP | --- | --- | --- | --- | H | 1.0 | --- | H | 1.0 | --- | H | 1.0 | --- | H | 1.0 |
| 7-1/2 HP & OVER: | | | | | | | | | | | | | | | |
| UP TO 500 RPM | --- | --- | --- | --- | H, THR | 1.5 | --- | H, THR | 2.5 | --- | H, THR | 2.5 | --- | H, THR | 2.5 |

| EQUIPMENT | ON GRADE | | | 20FT FLOOR SPAN | | | 30FT FLOOR SPAN | | | 40FT FLOOR SPAN | | | 50FT FLOOR SPAN | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL | BASE TYPE | ISOL TYPE | MIN DEFL |
| 501 RPM & OVER | --- | --- | --- | --- | H, THR | 0.8 | --- | H, THR | 0.8 | --- | H,THR | 0.8 | --- | H,THR | 2.0 |
| FLOOR MOUNTED: | | | | | | | | | | | | | | | |
| UP THRU 5 HP | --- | D | --- | --- | S | 1.0 | --- | S | 1.0 | --- | S | 1.0 | --- | S | 1.0 |
| 7-1/2 HP & OVER: | | | | | | | | | | | | | | | |
| UP TO 500 RPM | --- | D | --- | R | S, THR | 1.5 | R | S, THR | 2.5 | R | S, THR | 2.5 | R | S, THR | 2.5 |
| 501 RPM & OVER | --- | D | --- | --- | S, THR | 0.8 | --- | S, THR | 0.8 | R | S, THR | 1.5 | R | S, THR | 2.0 |
| **HEAT PUMPS** | | | | | | | | | | | | | | | |
| ALL | --- | S | 0.75 | --- | S | 0.75 | --- | S | 0.75 | CB | S | 1.5 | --- | --- | NA |
| **CONDENSING UNITS** | | | | | | | | | | | | | | | |
| ALL | --- | SS | 0.25 | --- | SS | 0.75 | --- | SS | 1.5 | CB | SS | 1.5 | --- | --- | NA |
| **IN-LINE CENTRIFUGAL AND VANE AXIAL FANS, FLOOR MOUNTED: (APR 9)** | | | | | | | | | | | | | | | |
| UP THRU 50 HP: | | | | | | | | | | | | | | | |
| UP TO 300 RPM | --- | D | --- | R | S | 2.5 | R | S | 2.5 | R | S | 2.5 | R | S | 3.5 |
| 301 - 500 RPM | --- | D | --- | R | S | 2.0 | R | S | 2.0 | R | S | 2.5 | R | S | 2.5 |
| 501 - & OVER | --- | D | --- | --- | S | 1.0 | --- | S | 1.0 | R | S | 2.0 | R | S | 2.5 |
| 60 HP AND OVER: | | | | | | | | | | | | | | | |
| 301 - 500 RPM | R | S | 1.0 | R | S | 2.0 | R | S | 2.0 | R | S | 2.5 | R | S | 3.5 |
| 501 RPM & OVER | R | S | 1.0 | R | S | 2.0 | R | S | 2.0 | R | S | 2.0 | R | S | 2.5 |

# SECTION 23 07 11
# HVAC AND BOILER PLANT INSULATION

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. Field applied insulation for thermal efficiency and condensation control for
   1. HVAC piping, ductwork and equipment.

B. Definitions
   1. ASJ: All service jacket, white finish facing or jacket.
   2. Air conditioned space: Space having air temperature and/or humidity controlled by mechanical equipment.
   3. Cold: Equipment, ductwork or piping handling media at design temperature of 16 degrees C (60 degrees F) or below.
   4. Concealed: Ductwork and piping above ceilings and in chases, and pipe spaces.
   5. Exposed: Piping, ductwork, and equipment exposed to view in finished areas including mechanical, Boiler Plant and electrical equipment rooms or exposed to outdoor weather. Attics and crawl spaces where air handling units are located are considered to be mechanical rooms. Shafts, chases, unfinished attics, crawl spaces and pipe basements are not considered finished areas.
   6. FSK: Foil-scrim-kraft facing.
   7. Hot: HVAC Ductwork handling air at design temperature above 16 degrees C (60 degrees F);HVAC equipment or piping handling media above 41 degrees C (105 degrees F).
   8. Density: $kg/m^3$ - kilograms per cubic meter (Pcf - pounds per cubic foot).
   9. Runouts: Branch pipe connections up to 25-mm (one-inch) nominal size to fan coil units or reheat coils for terminal units.
   10. Thermal conductance: Heat flow rate through materials.
      a. Flat surface: Watt per square meter (BTU per hour per square foot).
      b. Pipe or Cylinder: Watt per square meter (BTU per hour per linear foot).

11. Thermal Conductivity (k): Watt per meter, per degree C (BTU per inch thickness, per hour, per square foot, per degree F temperature difference).
12. Vapor Retarder (Vapor Barrier): A material which retards the transmission (migration) of water vapor. Performance of the vapor retarder is rated in terms of permeance (perms). For the purpose of this specification, vapor retarders shall have a maximum published permeance of 0.1 perms and vapor barriers shall have a maximum published permeance of 0.001 perms.
13. LPS: Low pressure steam (103 kPa [15 psig] and below).
14. LPR: Low pressure steam condensate gravity return.
15. FOS: Fuel oil supply.
16. FOR: Fuel oil return.
17. RS: Refrigerant suction.

**1.2 RELATED WORK**

A. Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT: Insulation containing asbestos material.

B. Section 02 82 13.13, GLOVEBAG ASBESTOS ABATEMENT: Insulation containing asbestos material.

C. Section 07 84 00, FIRESTOPPING: Mineral fiber and bond breaker behind sealant.

D. Not Used

E. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.

F. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT

G. Section 23 22 13, STEAM and CONDENSATE HEATING PIPING

H. Section 23 51 00, BREECHINGS, CHIMNEYS, and STACKS

I. Section 23 21 13, HYDRONIC PIPING and Section 23 22 13, STEAM and CONDENSATE HEATING PIPING: Piping and equipment.

K. Section 23 31 00, HVAC DUCTS AND CASINGS: Ductwork, plenum and fittings.

L. Section 26 32 13, ENGINE GENERATORS: Exhaust stacks and muffler.

M. Section 23 08 00, COMMISSIONING OF HVAC SYSTEMS. Requirements for commissioning, systems readiness checklists, and training.

**1.3 QUALITY ASSURANCE**

A. Refer to article QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

B. Criteria:

1. Comply with NFPA 90A, particularly paragraphs 4.3.3.1 through 4.3.3.6, 4.3.10.2.6, and 5.4.6.4, parts of which are quoted as follows:

**4.3.3.1** Pipe insulation and coverings, duct coverings, duct linings, vapor retarder facings, adhesives, fasteners, tapes, and supplementary materials added to air ducts, plenums, panels, and duct silencers used in duct systems, unless otherwise provided for in 4.3.3.1.1 or 4.3.3.1.2., shall have, in the form in which they are used, a maximum flame spread index of 25 without evidence of continued progressive combustion and a maximum smoke developed index of 50 when tested in accordance with NFPA 255, *Standard Method of Test of Surface Burning Characteristics of Building Materials*.

**4.3.3.1.1** Where these products are to be applied with adhesives, they shall be tested with such adhesives applied, or the adhesives used shall have a maximum flame spread index of 25 and a maximum smoke developed index of 50 when in the final dry state. *(See 4.2.4.2.)*

**4.3.3.1.2** The flame spread and smoke developed index requirements of 4.3.3.1.1 shall not apply to air duct weatherproof coverings where they are located entirely outside of a building, do not penetrate a wall or roof, and do not create an exposure hazard.

4.3.3.2 Closure systems for use with rigid and flexible air ducts tested in accordance with UL 181, Standard for Safety Factory-Made Air Ducts and Air Connectors, shall have been tested, listed, and used in accordance with the conditions of their listings, in accordance with one of the following:

(1) UL 181A, Standard for Safety Closure Systems for Use with Rigid Air Ducts and Air Connectors

(2) UL 181B, Standard for Safety Closure Systems for Use with Flexible Air Ducts and Air Connectors

4.3.3.3 Air duct, panel, and plenum coverings and linings, and pipe insulation and coverings shall not flame, glow, smolder, or smoke when tested in accordance with a similar test for pipe covering, ASTM C 411, Standard Test Method for Hot-Surface Performance of High-Temperature Thermal Insulation, at the temperature to which they are exposed in service.

4.3.3.3.1 In no case shall the test temperature be below 121°C (250°F).

4.3.3.4 Air duct coverings shall not extend through walls or floors that are required to be fire stopped or required to have a

fire resistance rating, unless such coverings meet the requirements of 5.4.6.4.

4.3.3.5* Air duct linings shall be interrupted at fire dampers to prevent interference with the operation of devices.

4.3.3.6 Air duct coverings shall not be installed so as to conceal or prevent the use of any service opening.

4.3.10.2.6 Materials exposed to the airflow shall be noncombustible or limited combustible and have a maximum smoke developed index of 50 or comply with the following.

4.3.10.2.6.1 Electrical wires and cables and optical fiber cables shall be listed as noncombustible or limited combustible and have a maximum smoke developed index of 50 or shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with NFPA 262, Standard Method of Test for Flame Travel and Smoke of Wires and Cables for Use in Air-Handling Spaces.

4.3.10.2.6.4 Optical-fiber and communication raceways shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with UL 2024, Standard for Safety Optical-Fiber Cable Raceway.

4.3.10.2.6.6 Supplementary materials for air distribution systems shall be permitted when complying with the provisions of 4.3.3.

5.4.6.4 Where air ducts pass through walls, floors, or partitions that are required to have a fire resistance rating and where fire dampers are not required, the opening in the construction around the air duct shall be as follows:

(1) Not exceeding a 25.4 mm (1 in.) average clearance on all sides

(2) Filled solid with an approved material capable of preventing the passage of flame and hot gases sufficient to ignite cotton waste when subjected to the time-temperature fire conditions required for fire barrier penetration as specified in NFPA 251, *Standard Methods of Tests of Fire Endurance of Building Construction and Materials*

2. Test methods: ASTM E84, UL 723, or NFPA 255.
3. Specified k factors are at 24 degrees C (75 degrees F) mean temperature unless stated otherwise. Where optional thermal insulation material is used, select thickness to provide thermal conductance no greater than that for the specified material. For pipe, use insulation manufacturer's published heat flow tables. For domestic hot water supply and return, run out insulation and condensation control insulation, no thickness adjustment need be made.

4. All materials shall be compatible and suitable for service temperature, and shall not contribute to corrosion or otherwise attack surface to which applied in either the wet or dry state.

C. Every package or standard container of insulation or accessories delivered to the job site for use must have a manufacturer's stamp or label giving the name of the manufacturer and description of the material.

**1.4 SUBMITTALS**

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Shop Drawings:

1. All information, clearly presented, shall be included to determine compliance with drawings and specifications and ASTM, federal and military specifications.
   a. Insulation materials: Specify each type used and state surface burning characteristics.
   b. Insulation facings and jackets: Each type used. Make it clear that white finish will be furnished for exposed ductwork, casings and equipment.
   c. Insulation accessory materials: Each type used.
   d. Manufacturer's installation and fitting fabrication instructions for flexible unicellular insulation.
   e. Make reference to applicable specification paragraph numbers for coordination.

C. Samples:

1. Each type of insulation: Minimum size 100 mm (4 inches) square for board/block/ blanket; 150 mm (6 inches) long, full diameter for round types.
2. Each type of facing and jacket: Minimum size 100 mm (4 inches square).
3. Each accessory material: Minimum 120 ML (4 ounce) liquid container or 120 gram (4 ounce) dry weight for adhesives / cement / mastic.

**1.5 STORAGE AND HANDLING OF MATERIAL**

Store materials in clean and dry environment, pipe covering jackets shall be clean and unmarred. Place adhesives in original containers. Maintain ambient temperatures and conditions as required by printed

instructions of manufacturers of adhesives, mastics and finishing cements.

**1.6 APPLICABLE PUBLICATIONS**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.

B. Federal Specifications (Fed. Spec.):

L-P-535E (2)- 99.....Plastic Sheet (Sheeting): Plastic Strip; Poly (Vinyl Chloride) and Poly (Vinyl Chloride - Vinyl Acetate), Rigid.

C. Military Specifications (Mil. Spec.):

MIL-A-3316C (2)-90.....Adhesives, Fire-Resistant, Thermal Insulation

MIL-A-24179A (1)-87.....Adhesive, Flexible Unicellular-Plastic Thermal Insulation

MIL-C-19565C (1)-88.....Coating Compounds, Thermal Insulation, Fire-and Water-Resistant, Vapor-Barrier

MIL-C-20079H-87.....Cloth, Glass; Tape, Textile Glass; and Thread, Glass and Wire-Reinforced Glass

D. American Society for Testing and Materials (ASTM):

A167-99(2004).....Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

B209-07.....Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate

C411-05.....Standard test method for Hot-Surface Performance of High-Temperature Thermal Insulation

C449-07.....Standard Specification for Mineral Fiber Hydraulic-Setting Thermal Insulating and Finishing Cement

C533-09.....Standard Specification for Calcium Silicate Block and Pipe Thermal Insulation

C534-08.....Standard Specification for Preformed Flexible Elastomeric Cellular Thermal Insulation in Sheet and Tubular Form

C547-07.....Standard Specification for Mineral Fiber pipe Insulation

C552-07.....Standard Specification for Cellular Glass Thermal Insulation

C553-08.....Standard Specification for Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications

C585-09.....Standard Practice for Inner and Outer Diameters of Rigid Thermal Insulation for Nominal Sizes of Pipe and Tubing (NPS System) R (1998)

C612-10.....Standard Specification for Mineral Fiber Block and Board Thermal Insulation

C1126-04.....Standard Specification for Faced or Unfaced Rigid Cellular Phenolic Thermal Insulation

C1136-10.....Standard Specification for Flexible, Low Permeance Vapor Retarders for Thermal Insulation

D1668-97a (2006).....Standard Specification for Glass Fabrics (Woven and Treated) for Roofing and Waterproofing

E84-10.....Standard Test Method for Surface Burning Characteristics of Building Materials

E119-09c.....Standard Test Method for Fire Tests of Building Construction and Materials

E136-09b.....Standard Test Methods for Behavior of Materials in a Vertical Tube Furnace at 750 degrees C (1380 F)

E. National Fire Protection Association (NFPA):

90A-09.....Standard for the Installation of Air Conditioning and Ventilating Systems

96-08.....Standard~~s~~ for Ventilation Control and Fire Protection of Commercial Cooking Operations

101-09.....Life Safety Code

251-06.....Standard methods of Tests of Fire Endurance of Building Construction Materials

255-06.....Standard Method of tests of Surface Burning Characteristics of Building Materials

F. Underwriters Laboratories, Inc (UL):

723.....UL Standard for Safety Test for Surface Burning Characteristics of Building Materials with Revision of 09/08

G. Manufacturer's Standardization Society of the Valve and Fitting Industry (MSS):

SP58-2009.....Pipe Hangers and Supports Materials, Design, and Manufacture

**PART 2 - PRODUCTS**

**2.1 MINERAL FIBER OR FIBER GLASS**

A. ASTM C612 (Board, Block), Class 1 or 2, density 48 kg/m$^3$ (3 pcf), k = 0.037 (0.26) at 24 degrees C (75 degrees F), external insulation for temperatures up to 204 degrees C (400 degrees F) with foil scrim (FSK) facing.

B. ASTM C553 (Blanket, Flexible) Type I, Class B-5, Density 32 kg/m$^3$ (2 pcf), k = 0.04 (0.27) at 24 degrees C (75 degrees F), for use at temperatures up to 204 degrees C (400 degrees F) with foil scrim (FSK) facing.

C. ASTM C547 (Pipe Fitting Insulation and Preformed Pipe Insulation), Class 1, k = 0.037 (0.26) at 24 degrees C (75 degrees F), for use at temperatures up to 230 degrees C (450 degrees F) with an all service vapor retarder jacket with polyvinyl chloride premolded fitting covering.

**2.2 MINERAL WOOL OR REFRACTORY FIBER**

A. Comply with Standard ASTM C612, Class 3, 450 degrees C (850 degrees F).

**2.3 RIGID CELLULAR PHENOLIC FOAM**

A. Preformed (molded) pipe insulation, ASTM C1126, type III, grade 1, k = 0.021(0.15) at 10 degrees C (50 degrees F), for use at temperatures up to 121 degrees C (250 degrees F) with all service vapor retarder jacket with polyvinyl chloride premolded fitting covering.

B. Equipment and Duct Insulation, ASTM C 1126, type II, grade 1, k = 0.021 (0.15) at 10 degrees C (50 degrees F), for use at temperatures up to

121 degrees C (250 degrees F) with rigid cellular phenolic insulation and covering, and all service vapor retarder jacket.

**2.4 CELLULAR GLASS CLOSED-CELL**

A. Comply with Standard ASTM C177, C518, density 120 kg/m$^3$ (7.5 pcf) nominal, k = 0.033 (0.29) at 24~~0~~ degrees C (75 degrees F).

B. Pipe insulation for use at temperatures up to 200 degrees C (400 degrees F) with all service vapor retarder jacket.

**2.5 FLEXIBLE ELASTOMERIC CELLULAR THERMAL**

ASTM C177, C518, k = 0.039 (0.27) at 24 degrees C (75 degrees F), flame spread not over 25, smoke developed not over 50, for temperatures from minus 4 degrees C (40 degrees F) to 93 degrees C (200 degrees F). No jacket required.

**2.6 INSULATION FACINGS AND JACKETS**

A. Vapor Retarder, higher strength with low water permeance = 0.02 or less perm rating, Beach puncture 50 units for insulation facing on exposed ductwork, casings and equipment, and for pipe insulation jackets. Facings and jackets shall be all service type (ASJ) or PVDC Vapor Retarder jacketing.

B. ASJ jacket shall be white kraft bonded to 0.025 mm (1 mil) thick aluminum foil, fiberglass reinforced, with pressure sensitive adhesive closure. Comply with ASTM C1136. Beach puncture 50 units, Suitable for painting without sizing. Jackets shall have minimum 40 mm (1-1/2 inch) lap on longitudinal joints and minimum 75 mm (3 inch) butt strip on end joints. Butt strip material shall be same as the jacket. Lap and butt strips shall be self-sealing type with factory-applied pressure sensitive adhesive.

C. Not Used

D. Field applied vapor barrier jackets shall be provided, in addition to the specified facings and jackets, on all exterior piping and ductwork as well as on interior piping and ductwork exposed to outdoor air (i.e.; in ventilated attics, piping in ventilated (not air conditioned) spaces, etc.)in high humidity areasconveying fluids below ambient temperature. The vapor barrier jacket shall consist of a multi-layer laminated cladding with a maximum water vapor permeance of 0.001 perms. The minimum puncture resistance shall be 35 cm-kg (30 inch-pounds) for

interior locations and 92 cm-kg (80 inch-pounds) for exterior or exposed locations or where the insulation is subject to damage.

E. Glass Cloth Jackets: Presized, minimum 0.18 kg per square meter (7.8 ounces per square yard), 2000 kPa (300 psig) bursting strength with integral vapor retarder where required or specified. Weather proof if utilized for outside service.

F. Canvas Jackets: Use UL listed fabric 1.83 kg/m5 (6 oz/ft2) fire retardant canvas covering.

G Factory composite materials may be used provided that they have been tested and certified by the manufacturer.

H. Pipe fitting insulation covering (jackets): Fitting covering shall be premolded to match shape of fitting and shall be polyvinyl chloride (PVC) conforming to Fed Spec L-P-335, composition A, Type II Grade GU, and Type III, minimum thickness 0.7 mm (0.03 inches). Provide color matching vapor retarder pressure sensitive tape.

**2.7 PIPE COVERING PROTECTION SADDLES**

A. Cold pipe support: Premolded pipe insulation 180 degrees (half-shells) on bottom half of pipe at supports. Material shall be cellular glass or high density Polyisocyanurate insulation of the same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m$^3$ (3.0 pcf).

| **Nominal Pipe Size and Accessories Material (Insert Blocks)** | |
|---|---|
| Nominal Pipe Size mm (inches) | Insert Blocks mm (inches) |
| Up through 125 (5) | 150 (6) long |
| 150 (6) | 150 (6) long |
| 200 (8), 250 (10), 300 (12) | 225 (9) long |
| 350 (14), 400 (16) | 300 (12) long |
| 450 through 600 (18 through 24) | 350 (14) long |

B. Warm or hot pipe supports: Premolded pipe insulation (180 degree half-shells) on bottom half of pipe at supports. Material shall be high density Polyisocyanurate (for temperatures up to 149 degrees C [300 degrees F]), cellular glass or calcium silicate. Insulation at supports shall have same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 48 kg/m$^3$ (3.0 pcf).

C. Boiler Plant Pipe supports: MSS SP58, Type 39. Apply at all pipe support points, except where MSS SP58, Type 3 pipe clamps provided as part of the support system.

**2.8 ADHESIVE, MASTIC, CEMENT**

A. Mil. Spec. MIL-A-3316, Class 1: Jacket and lap adhesive and protective finish coating for insulation.

B. Mil. Spec. MIL-A-3316, Class 2: Adhesive for laps and for adhering insulation to metal surfaces.

C. Mil. Spec. MIL-A-24179, Type II Class 1: Adhesive for installing flexible unicellular insulation and for laps and general use.

D. Mil. Spec. MIL-C-19565, Type I: Protective finish for outdoor use.

E. Mil. Spec. MIL-C-19565, Type I or Type II: Vapor barrier compound for indoor use.

F. ASTM C449: Mineral fiber hydraulic-setting thermal insulating and finishing cement.

G. Other: Insulation manufacturers' published recommendations.

**2.9 MECHANICAL FASTENERS**

A. Pins, anchors: Welded pins, or metal or nylon anchors with galvanized steel-coated or fiber washer, or clips. Pin diameter shall be as recommended by the insulation manufacturer.

B. Staples: Outward clinching galvanized steel.

C. Wire: 1.3 mm thick (18 gage) soft annealed galvanized or 1.9 mm (14 gage) copper clad steel or nickel copper alloy.

D. Bands: 13 mm (0.5 inch) nominal width, brass, galvanized steel, aluminum or stainless steel.

**2.10 REINFORCEMENT AND FINISHES**

A. Glass fabric, open weave: ASTM D1668, Type III (resin treated) and Type I (asphalt treated).

B. Glass fiber fitting tape: Mil. Spec MIL-C-20079, Type II, Class 1.

C. Tape for Flexible Elastomeric Cellular Insulation: As recommended by the insulation manufacturer.

D. Hexagonal wire netting: 25 mm (one inch) mesh, 0.85 mm thick (22 gage) galvanized steel.

E. Corner beads: 50 mm (2 inch) by 50 mm (2 inch), 0.55 mm thick (26 gage) galvanized steel; or, 25 mm (1 inch) by 25 mm (1 inch), 0.47 mm thick

(28 gage) aluminum angle adhered to 50 mm (2 inch) by 50 mm (2 inch) Kraft paper.

F. PVC fitting cover: Fed. Spec L-P-535, Composition A, 11-86 Type II, Grade GU, with Form B Mineral Fiber insert, for media temperature 4 degrees C (40 degrees F) to 121 degrees C (250 degrees F). Below 4 degrees C (40 degrees F) and above 121 degrees C (250 degrees F). Provide double layer insert. Provide color matching vapor barrier pressure sensitive tape.

**2.11 FIRESTOPPING MATERIAL**

Other than pipe and duct insulation, refer to Section 07 84 00 FIRESTOPPING.

**2.12 FLAME AND SMOKE**

Unless shown otherwise all assembled systems shall meet flame spread 25 and smoke developed 50 rating as developed under ASTM, NFPA and UL standards and specifications. See paragraph 1.3 "Quality Assurance".

**PART 3 - EXECUTION**

**3.1 GENERAL REQUIREMENTS**

A. Required pressure tests of duct and piping joints and connections shall be completed and the work approved by the Resident Engineer for application of insulation. Surface shall be clean and dry with all foreign materials, such as dirt, oil, loose scale and rust removed.

B. Except for specific exceptions, insulate entire specified equipment, piping (pipe, fittings, valves, accessories), and duct systems. Insulate each pipe and duct individually. Do not use scrap pieces of insulation where a full length section will fit.

C. Where removal of insulation of piping, ductwork and equipment is required to comply with Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT and Section 02 82 13.13, GLOVEBAG ASBESTOS ABATEMENT, such areas shall be reinsulated to comply with this specification.

D. Insulation materials shall be installed in a first class manner with smooth and even surfaces, with jackets and facings drawn tight and smoothly cemented down at all laps. Insulation shall be continuous through all sleeves and openings, except at fire dampers and duct heaters (NFPA 90A). Vapor retarders shall be continuous and uninterrupted throughout systems with operating temperature 16 degrees C (60 degrees F) and below. Lap and seal vapor retarder over ends and

exposed edges of insulation. Anchors, supports and other metal projections through insulation on cold surfaces shall be insulated and vapor sealed for a minimum length of 150 mm (6 inches).

E. Install vapor stops at all insulation terminations on either side of valves, pumps and equipment and particularly in straight lengths of pipe insulation.

F. Construct insulation on parts of equipment such as chilled water pumps and heads of chillers, convertors and heat exchangers that must be opened periodically for maintenance or repair, so insulation can be removed and replaced without damage. Install insulation with bolted 1 mm thick (20 gage) galvanized steel or aluminum covers as complete units, or in sections, with all necessary supports, and split to coincide with flange/split of the equipment.

G. Insulation on hot piping and equipment shall be terminated square at items not to be insulated, access openings and nameplates. Cover all exposed raw insulation with white sealer or jacket material.

H. Protect all insulations outside of buildings with aluminum jacket using lock joint or other approved system for a continuous weather tight system. Access doors and other items requiring maintenance or access shall be removable and sealable.

I. Insulate PRVs, flow meters, and steam traps.

J. HVAC work not to be insulated:

1. In hot piping: Unions, flexible connectors, control valves, safety valves and discharge vent piping, vacuum breakers, thermostatic vent valves, steam traps 20 mm (3/4 inch) and smaller, exposed piping through floor for convectors and radiators. Insulate piping to within approximately 75 mm (3 inches) of uninsulated items.

K. Apply insulation materials subject to the manufacturer's recommended temperature limits. Apply adhesives, mastic and coatings at the manufacturer's recommended minimum coverage.

L. Elbows, flanges and other fittings shall be insulated with the same material as is used on the pipe straights. The elbow/ fitting insulation shall be field-fabricated, mitered or factory prefabricated to the necessary size and shape to fit on the elbow/ fitting. Use of polyurethane spray-foam to fill a PVC elbow jacket is prohibited on cold applications.

M. Firestop Pipe and Duct insulation:

1. Provide firestopping insulation at fire and smoke barriers through penetrations. Fire stopping insulation shall be UL listed as defines in Section 07 84 00, FIRESTOPPING.
2. Pipe and duct penetrations requiring fire stop insulation including, but not limited to the following:
   a. Pipe risers through floors
   b. Pipe or duct chase walls and floors
   c. Smoke partitions

O. Provide vapor barrier jackets over insulation as follows:

1. All piping and ductwork exposed to outdoor weather.

**3.2 INSULATION INSTALLATION**

A. Mineral Fiber Board:

1. Faced board: Apply board on pins spaced not more than 300 mm (12 inches) on center each way, and not less than 75 mm (3 inches) from each edge of board. In addition to pins, apply insulation bonding adhesive to entire underside of horizontal metal surfaces. Butt insulation edges tightly and seal all joints with laps and butt strips. After applying speed clips cut pins off flush and apply vapor seal patches over clips.
2. Plain board:
   a. Insulation shall be scored, beveled or mitered to provide tight joints and be secured to equipment with bands spaced 225 mm (9 inches) on center for irregular surfaces or with pins and clips on flat surfaces. Use corner beads to protect edges of insulation.
   b. For hot equipment: Stretch 25 mm (1 inch) mesh wire, with edges wire laced together, over insulation and finish with insulating and finishing cement applied in one coat, 6 mm (1/4 inch) thick, trowel led to a smooth finish.
   c. For cold equipment: Apply meshed glass fabric in a tack coat 1.5 to 1.7 square meter per liter (60 to 70 square feet per gallon) of vapor mastic and finish with mastic at 0.3 to 0.4 square meter per liter (12 to 15 square feet per gallon) over the entire fabric surface.

3. Exposed, unlined ductwork and equipment in unfinished areas, mechanical and electrical equipment rooms and attics, and duct work exposed to outdoor weather:
   a. Exposed, unlined ductwork at louver intake and louver exhaust exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with a reinforcing membrane and two coats of vapor barrier mastic or multi-layer vapor barrier with a maximum water vapor permeability of 0.001 perms.

B. Molded Mineral Fiber Pipe and Tubing Covering:
   1. Fit insulation to pipe or duct, aligning longitudinal joints. Seal longitudinal joint laps and circumferential butt strips by rubbing hard with a nylon sealing tool to assure a positive seal. Staples may be used to assist in securing insulation. Seal all vapor retarder penetrations on cold piping with a generous application of vapor barrier mastic. Provide inserts and install with metal insulation shields at outside pipe supports. Install freeze protection insulation over heating cable.
   2. Contractor's options for fitting, flange and valve insulation:
      a. Insulating and finishing cement for sizes less than 100 mm (4 inches) operating at surface temperature of 16 degrees C (61 degrees F) or more.
      b. Factory premolded, one piece PVC covers with mineral fiber, (Form B), inserts. Provide two insert layers for pipe temperatures below 4 degrees C (40 degrees F), or above 121 degrees C (250 degrees F). Secure first layer of insulation with twine. Seal seam edges with vapor barrier mastic and secure with fitting tape.
      c. Factory molded, ASTM C547 or field mitered sections, joined with adhesive or wired in place. For hot piping finish with a smoothing coat of finishing cement. For cold fittings, 16 degrees C (60 degrees F) or less, vapor seal with a layer of glass fitting tape imbedded between two 2 mm (1/16 inch) coats of vapor barrier mastic.
      d. Fitting tape shall extend over the adjacent pipe insulation and overlap on itself at least 50 mm (2 inches).

3. Nominal thickness in millimeters and inches specified in the schedule at the end of this section.

C. Rigid Cellular Phenolic Foam:

1. Rigid closed cell phenolic insulation may be provided for piping, ductwork and equipment for temperatures up to 121 degrees C (250 degrees F).
2. Note the NFPA 90A burning characteristics requirements of 25/50 in paragraph 1.3.B
3. Provide secure attachment facilities such as welding pins.
4. Apply insulation with joints tightly drawn together
5. Apply adhesives, coverings, neatly finished at fittings, and valves.
6. Final installation shall be smooth, tight, neatly finished at all edges.
7. Minimum thickness in millimeters (inches) specified in the schedule at the end of this section.
8. Exposed, unlined supply and return ductwork exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with a multi-layer vapor barrier with a maximum water vapor permeance of 0.00 perms.
9. Condensation control insulation: Minimum 25 mm (1.0 inch) thick for all pipe sizes.
   a. HVAC: Cooling coil condensation piping to waste piping fixture or drain inlet. Omit insulation on plastic piping in mechanical rooms.

D. Cellular Glass Insulation:

1. Pipe and tubing, covering nominal thickness in millimeters and inches as specified in the schedule at the end of this section.
2. Cold equipment: 50 mm (2 inch) thick insulation faced with ASJ for chilled water pumps, water filters, chemical feeder pots or tanks, expansion tanks, air separators DX RS Piping and air purgers.

E. Flexible Elastomeric Cellular Thermal Insulation:

1. Apply insulation and fabricate fittings in accordance with the manufacturer's installation instructions and finish with two coats of weather resistant finish as recommended by the insulation manufacturer.
2. Pipe and tubing insulation:
   a. Use proper size material. Do not stretch or strain insulation.

b. To avoid undue compression of insulation, provide cork stoppers or wood inserts at supports as recommended by the insulation manufacturer. Insulation shields are specified under Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

c. Where possible, slip insulation over the pipe or tubing prior to connection, and seal the butt joints with adhesive. Where the slip-on technique is not possible, slit the insulation and apply it to the pipe sealing the seam and joints with contact adhesive. Optional tape sealing, as recommended by the manufacturer, may be employed. Make changes from mineral fiber insulation in a straight run of pipe, not at a fitting. Seal joint with tape.

3. Apply sheet insulation to flat or large curved surfaces with 100 percent adhesive coverage. For fittings and large pipe, apply adhesive to seams only.

4. Pipe insulation: nominal thickness in millimeters (inches as specified in the schedule at the end of this section.

5. Minimum 20 mm (0.75 inch) thick insulation for pneumatic control lines for a minimum distance of 6 m (20 feet) from discharge side of the refrigerated dryer.

6. Use Class S (Sheet), 20 mm (3/4 inch) thick for the following:

a. Chilled water pumps

b. Bottom and sides of metal basins for winterized cooling towers (where basin water is heated).

c. Chillers, insulate any cold chiller surfaces subject to condensation which has not been factory insulated.

d. Piping inside refrigerators and freezers: Provide heat tape under insulation.

7. Exposed, unlined supply and return ductwork exposed to outdoor weather: 50 mm (2 inch) thick insulation faced with a multi-layer vapor barrier with a water vapor permeance of 0.00 perms.

F. Calcium Silicate:

1. Minimum thickness in millimeter (inches) specified in the schedule at the end of this section for piping other than in boiler plant. See paragraphs 3.3 through 3.7 for Boiler Plant Applications.

2. Engine Exhaust Insulation for Emergency Generator and Diesel Driven Fire Pump: Type II, Class D, 65 mm (4 inch) nominal thickness. Cover

exhaust completely from engine through roof or wall construction, including muffler. Secure with 16 AWG galvanized annealed wire or 0.38 x 12 mm 0.015 x 1/2 IN wide galvanized bands on 300 mm 12 IN maximum centers. Anchor wire and bands to welded pins, clips or angles. Apply 25 mm 1 IN hex galvanized wire over insulation. Fill voids with 6 mm 1/4 IN insulating cement.

**3.3 COMMISSIONING**

A. Provide commissioning documentation in accordance with the requirements of section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

**3.4 PIPE INSULATION SCHEDULE**

Provide insulation for piping systems as scheduled below:

| **Insulation Thickness Millimeters (Inches)** | | | | | |
|---|---|---|---|---|---|
| | | Nominal Pipe Size Millimeters (Inches) | | | |
| Operating Temperature Range/Service | Insulation Material | Less than 25 (1) | 25 - 32 (1 - 1¼) | 38 - 75 (1½ - 3) | 100 (4) and Above |
| | | | | | |
| | | | | | |
| 537 degrees C (1000 degrees F)<br>(Generator Breaching) | Calcium Silicate<br>Indoors only | 100 (4) | 100 (4) | 100 (4) | 100 (4) |
| | | | | | |
| 100-121 degrees C (212-250 degrees F)<br>(HPR, MPR, LPS, vent piping from PRV Safety Valves, Condensate receivers and flash tanks) | Mineral Fiber (Above ground piping only) | 62 (2.5) | 62 (2.5) | 75 (3.0) | 75 (3.0) |
| 100-121 degrees C (212-250 degrees F) | Rigid Cellular Phenolic Foam | 50 (2.0) | 50 (2.0) | 75 (3.0) | 75 (3.0) |

| | | | | | |
|---|---|---|---|---|---|
| (HPR, MPR, LPS, vent piping from PRV Safety Valves, Condensate receivers and flash tanks) | | | | | |
| | | | | | |
| 38-94 degrees C (100-200 degrees F)<br>(LPR, PC, HWH, HWHR, GH and GHR) | Mineral Fiber (Above ground piping only) | 38 (1.5) | 38 (1.5) | 50 (2.0) | 50 (2.0) |
| 38-99 degrees C<br>(100-211 degrees F)<br>(LPR, PC, HWH, HWHR, GH and GHR) | Rigid Cellular Phenolic Foam | 38 (1.5) | 38 (1.5) | 50 (2.0) | 50 (2.0) |
| 38-94 degrees C (100-200 degrees F)<br>(LPR, PC, HWH, HWHR, GH and GHR) | Flexible Elastomeric Cellular Thermal (Above ground piping only) | 38 (1.5) | 38 (1.5) | ---- | ---- |
| | | | | | |
| 4-16 degrees C<br>(40-60 degrees F)<br>(CH, CHR, GC, GCR and RS for DX refrigeration) | Rigid Cellular Phenolic Foam | 38 (1.5) | 38 (1.5) | 38 (1.5) | 38 (1.5) |
| 4-16 degrees C<br>(40-60 degrees F)<br>(CH, CHR, GC, GCR and RS for DX refrigeration) | Cellular Glass Closed-Cell | 38 (1.5) | 38 (1.5) | 38 (1.5) | 38 (1.5) |
| (40-60 degrees F)<br>(CH, CHR, GC, GCR and RS for DX refrigeration) | Flexible Elastomeric Cellular Thermal (Above ground piping only) | 38 (1.5) | 38 (1.5) | 38 (1.5) | 38 (1.5) |

- - - E N D - - -

# SECTION 23 08 00

# COMMISSIONING OF HVAC SYSTEMS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. The requirements of this Section apply to all sections of Division 23.

B. This project will have selected building systems commissioned. The complete list of equipment and systems to be commissioned are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. The commissioning process, which the Contractor is responsible to execute, is defined in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS. A Commissioning Agent (CxA) appointed by the Department of Veterans Affairs will manage the commissioning process.

### 1.2 RELATED WORK

A. Section 01 00 00 GENERAL REQUIREMENTS.

B. Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

C. Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

### 1.3 SUMMARY

A. This Section includes requirements for commissioning the HVAC systems, subsystems and equipment. This Section supplements the general requirements specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

B. The commissioning activities have been developed to support the VA requirements to meet guidelines for Federal Leadership in Environmental, Energy, and Economic Performance.

C. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for more specifics regarding processes and procedures as well as roles and responsibilities for all Commissioning Team members.

### 1.4 DEFINITIONS

A. Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for definitions.

### 1.5 COMMISSIONED SYSTEMS

A. Commissioning of a system or systems specified in this Division is part of the construction process. Documentation and testing of these systems, as well as training of the VA’s Operation and Maintenance

personnel, is required in cooperation with the VA and the Commissioning Agent.

B. The following HVAC systems will be commissioned:

1. Air Systems (Fans, motors, heating coils and control valves, dampers, , controls, gages, and vibration isolation).

5. Fuel Delivery and Storage Systems for Boilers and Standby Generators (Fuel level monitoring/controls/alarms, transfer pumps and motors, leak detection monitoring/alarms, and fill systems)

**1.6 SUBMITTALS**

A. The commissioning process requires review of selected Submittals. The Commissioning Agent will provide a list of submittals that will be reviewed by the Commissioning Agent. This list will be reviewed and approved by the VA prior to forwarding to the Contractor. Refer to Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, and SAMPLES for further details.

B. The commissioning process requires Submittal review simultaneously with engineering review. Specific submittal requirements related to the commissioning process are specified in Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS.

**PART 2 - PRODUCTS (NOT USED)**

**PART 3 - EXECUTION**

**3.1 PRE-FUNCTIONAL CHECKLISTS**

A. The Contractor shall complete Pre-Functional Checklists to verify systems, subsystems, and equipment installation is complete and systems are ready for Systems Functional Performance Testing. The Commissioning Agent will prepare Pre-Functional Checklists to be used to document equipment installation. The Contractor shall complete the checklists. Completed checklists shall be submitted to the VA and to the Commissioning Agent for review. The Commissioning Agent may spot check a sample of completed checklists. If the Commissioning Agent determines that the information provided on the checklist is not accurate, the Commissioning Agent will return the marked-up checklist to the Contractor for correction and resubmission. If the Commissioning Agent determines that a significant number of completed checklists for similar equipment are not accurate, the Commissioning

Agent will select a broader sample of checklists for review. If the Commissioning Agent determines that a significant number of the broader sample of checklists is also inaccurate, all the checklists for the type of equipment will be returned to the Contractor for correction and resubmission. Refer to SECTION 01 91 00 GENERAL COMMISSIONING REQUIREMENTS for submittal requirements for Pre-Functional Checklists, Equipment Startup Reports, and other commissioning documents.

**3.2 CONTRACTORS TESTS**

A. Contractor tests as required by other sections of Division 23 shall be scheduled and documented in accordance with Section 01 00 00 GENERAL REQUIREMENTS. The Commissioning Agent will witness selected Contractor tests. Contractor tests shall be completed prior to scheduling Systems Functional Performance Testing.

**3.3 SYSTEMS FUNCTIONAL PERFORMANCE TESTING:**

A. The Commissioning Process includes Systems Functional Performance Testing that is intended to test systems functional performance under steady state conditions, to test system reaction to changes in operating conditions, and system performance under emergency conditions. The Commissioning Agent will prepare detailed Systems Functional Performance Test procedures for review and approval by the Resident Engineer. The Contractor shall review and comment on the tests prior to approval. The Contractor shall provide the required labor, materials, and test equipment identified in the test procedure to perform the tests. The Commissioning Agent will witness and document the testing. The Contractor shall sign the test reports to verify tests were performed. See Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS, for additional details.

**3.4 TRAINING OF VA PERSONNEL**

A. Training of the VA’s operation and maintenance personnel is required in cooperation with the Resident Engineer and Commissioning Agent. Provide competent, factory authorized personnel to provide instruction to operation and maintenance personnel concerning the location, operation, and troubleshooting of the installed systems. The instruction shall be scheduled in coordination with the Resident Engineer after submission and approval of formal training plans.

Refer to Section 01 91 00 GENERAL COMMISSIONING REQUIREMENTS and Division 23 Sections for additional Contractor training requirements.

----- END -----

# SECTION 23 10 00
# FACILITY FUEL SYSTEMS

## PART 1 – GENERAL:

### 1.1 DESCRIPTION:

A. Diesel fuel oil and unheated burner fuel oil tanks, piping, and accessories located outside, underground or aboveground as shown on contract drawings. Refer to contract drawings for type of fuel and for tank capacities.

B. Tank fluid level monitoring and alarm systems.

C. Leak detection system for tanks and underground piping.

D. Fuel oil quality maintenance system (water and particulate removal).

### 1.2 RELATED WORK:

A. Sealing of pipe penetrations: Section 07 92 00, JOINT SEALANTS.

B. Primer and finish painting: Section 09 91 00, PAINTING.

### 1.3 QUALITY ASSURANCE:

A. Approval by Contracting Officer is required of products or services of proposed manufacturers, suppliers and installers, and will be based on Contractor’s certification that:

1. Manufacturers regularly and currently manufacture tanks, tank and piping accessories, tank fluid level monitoring and leak detection systems, fuel quality management systems.
2. Manufacturers of steel tanks participate in the Quality Assurance Program of the Steel Tank Institute (STI).
3. The design and size of each item of equipment provided for this project is of current production and has been in satisfactory operation on at least three installations for approximately three years. Current models of fluid level and leak detection systems with less than three years service experience are acceptable if similar previous models from the same manufacturer have at least three years service experience.

B. Apply and install materials, equipment and specialties in accordance with manufacturer’s written instructions. Conflicts between the manufacturer’s instructions and the contract drawings and specifications shall be referred to the Resident Engineer (RE)/Contracting Officers Technical Representative (COTR) for

resolution. Provide copies of installation instructions to the RE/COTR two weeks prior to commencing installation of any item.

C. All equipment shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components or overall assembly.

D. Not Used

F. Entire installation shall conform to requirements of local and state pollution control authorities.

G. Pipe Welding: Conform to requirements of ASME B31.1. Welders shall show evidence of qualification. Welders shall utilize a stamp to identify their work. Unqualified personnel will be rejected.

I. Where specified codes or standards conflict, consult the RE/COTR.

J. Label of Conformance (definition): Labels of accredited testing laboratories showing conformance to the standards specified.

K. Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a safe, complete and fully operational system which conforms to contract requirements and in which no item is subject to conditions beyond its design capabilities.

**1.4 SUBMITTALS:**

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Not Used

C. Not Used

D. Fuel Piping:

1. ASTM and UL compliance.
2. Grade, class or type, schedule number.
3. Manufacturer.

E. Pipe Fittings, Unions, Flanges:

1. ASTM and UL compliance.
2. ASTM standards number.
3. Catalog cuts.
4. Pressure and temperature rating.

F. Foot Valves, Check Valves, Overfill Prevention Valves:

1. Catalog cuts showing design and construction.
2. Pressure and temperature ratings.

3. Pressure loss and flow rate data.
4. Materials of construction.
5. Accessories.

G. Secondary Containment System for Fuel Piping:
1. Sizes, materials, construction of containment system including end seals, sumps, coatings and pipe supports.
2. Layout of system.
3. Installation instructions.
4. Design of cathodic protection system (steel casing).

H. Leak Detection System:
1. Drawings, description and performance data on sensors, control units.
2. Description of operation.
3. Layout of system.
4. Installation and operating instructions.
5. Data on interconnecting wiring systems to be furnished.

I. Not Used

**1.5 DELIVERY, STORAGE AND HANDLING:**

A. Protection of Equipment:
1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage.
2. Place damaged equipment in first class, new operating condition; or, replace same as determined and directed by the RE/COTR. Such repair or replacement shall be at no additional cost to the Government.
3. Protect new equipment and piping systems against entry of foreign matter on the inside. Clean both inside and outside before painting or placing equipment in operation.
4. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.
5. Protect plastic piping and tanks from ultraviolet light (sunlight).

B. Cleanliness of Equipment and Piping:

1. Exercise care in storage and handling of equipment and piping material to be incorporated in the work. Remove debris arising from cutting, threading and welding of piping.
2. Piping systems shall be flushed, blown or pigged as necessary to provide clean systems.
3. Clean interior of all tanks prior to delivery for beneficial use by the Government.
4. Contractor shall be fully responsible for all costs, damages and delay arising from failure to provide clean systems and equipment.

**1.6 APPLICABLE PUBLICATIONS:**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.

B. Federal Specifications (Fed. Spec.):

A-A-60005.....Frames, Covers, Grating, Steps, Sump and Catch Basin, Manhole

C. ASTM International (ASTM):

A36/A36M-08.....Carbon Structural Steel

A53/A53M-10.....Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless

A106/A106M-10.....Seamless Carbon Steel Pipe for High Temperature Service

A126-04(R2009).....Gray Iron Castings for Valves, Flanges and Pipe Fittings

A234/A234M-10.....Piping Fittings of Wrought Carbon Steel and Alloy Steel for Moderate and High Temperature Service

B62-09.....Composition Bronze or Ounce Metal Castings

D2996-01(2007).....Filament-Wound “Fiberglass” (Glass-Fiber-Reinforced-Thermosetting-Resin) Pipe

D. American Society of Mechanical Engineers (ASME):

B16.5-09.....Pipe Flanges and Flanged Fittings (NPS ½-24).

B16.11-09.....Forged Fittings, Socket-Welding and Threaded

B31.1-10.....Code for Pressure Piping, Power Piping with Current Amendments

E. National Electrical Manufacturers Association (NEMA):

250-08.....Enclosures for Electrical Equipment (1000 Volts Maximum)

F. National Fire Protection Association (NFPA):

30-12.....Flammable and Combustible Liquids Code

31-11.....Installation of Oil Burning Equipment

70-11.....National Electrical Code

G. Underwriters Laboratories Inc. (UL):

58-98.....Steel Underground Tanks for Flammable and Combustible Liquids

142-10.....Steel Aboveground Tanks for Flammable and Combustible Liquids

971-06.....Non-Metallic Underground Piping for Flammable Liquids

1316-06.....Glass-Fiber-Reinforced Plastic Underground Storage Tanks for Petroleum Products

1746-07.....External Corrosion Protection System for Steel Underground Storage Tanks

2085-10.....Protected Above-ground Tanks for Flammable and Combustible Liquids

H. Steel Tank Institute (STI):

F001.....Standard for Fire Resistant Tanks

F841.....Dual Wall Underground Steel Storage Tanks

F894.....ACT-100 Specification for External Corrosion Protection of FRP Composite Steel Underground Storage Tanks

F911.....Standard for Diked Aboveground Storage Tank System

F941.....Standard for Fireguard Thermally Insulated Aboveground Storage Tanks

F961.....ACT-100-U Specification for External Corrosion Protection of Composite Steel Underground Storage Tanks

P3.....STI-P3 Specification and Manual for External Corrosion Protection of Underground Steel Storage Tanks

R891.....Recommended Practice for Hold Down Strap Isolation

I. NACE International (Corrosion Engineers) (NACE):

SP0169-07.....Control of External Corrosion on Underground or Submerged Metallic Piping Systems

NACE 3/SSPC-SP6-07.....Commercial Blast Cleaning

NACE 4/SSPC-SP7-07.....Brush-off Blast Cleaning

J. American Petroleum Institute (API):

1631-01.....Interior Lining and Periodic Inspection of Underground Storage Tanks

**1.7 PERMITS:**

A. Contractor shall obtain and complete all tank permit and registration forms required by governmental authorities.

**PART - 2 PRODUCTS:**

**2.1 NOT USED:**

**2.2 NOT USED:**

**2.3 NOT USED**

**2.4 NOT USED**

**2.5 NOT USED:**

**2.6 NOT USED**

**2.7 PIPING, VALVES, FITTINGS:**

A. Fuel supply and return, tank fill, vents, sounding, pump out, steam and condensate.

B. Steel Pipe and Fittings:

1. Piping: Steel, seamless or electric resistance welded (ERW), ASTM A53 Grade B or ASTM A106 Grade B, Schedule 40. Aboveground piping shall be painted. Refer to Section 09 91 00, PAINTING.
2. Joints: Socket or butt-welded. Threaded joints not permitted except at valves, unions and tank connections.
3. Fittings:
   a. Butt-welded joints: Steel, ASTM A234, Grade B, ASME B16.9, same schedule as adjoining pipe.
   b. Socket-welded joints: Forged steel, ASME B16.11, 13 700 kPa (2000 psi) class.
4. Unions: Malleable iron, 2050 kPa (300 psi) class.
5. Companion flanges: Flanges and bolting, ASME B16.5.

6. Welding flanges: Weld neck, ASME B16.5, forged steel ASTM A105, 1025 kPa (150 psi).

D. Check Valves - Fuel Pump Suction.

1. Pipe Sizes 50 mm (2 inches) and under: Rated for 1375 kPa (200 psi) water-oil-gas, swing-type, threaded ends, ASTM B62 bronze body. Provide union adjacent to valve.
2. Pipe Sizes 65 mm (2 1/2 inches) and above: Rated for 1375 kPa (200 psi) water-oil-gas, swing-type, 850 kPa (125 pounds) ASME flanged ends, ASTM A126 class B cast iron body.

**PART 3 - NOT USED**

- - - E N D - - -

# SECTION 23 22 13
# STEAM AND CONDENSATE HEATING PIPING

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. Steam, condensate and vent piping inside buildings. Boiler plant and outside steam distribution piping is covered in specification Section 33 63 00, STEAM ENERGY DISTRIBUTION and Section 23 21 11, BOILER PLANT PIPING SYSTEMS.

B. Relocated steam equipment and standalone control requirements.

### 1.2 RELATED WORK

A. General mechanical requirements and items, which are common to more than one section of Division 23: Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

B. Piping insulation: Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.

C. SECTION 23 31 00, HVAC DUCTS AND CASING.

D. Section 26 05 21, Low-Voltage Electrical Power Conductors and Cables (600 Volts and Below).

E. Section 26 05 26, Grounding and Bonding for Electrical Systems.

F. Section 26 05 33, Raceway and Boxes for Electrical Systems.

G. Section 26 22 21, Specialty Transformers.

H. Section 26 27 26, Wiring Devices.

### 1.3 QUALITY ASSURANCE

A. Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION, which includes welding qualifications.

### 1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data:

1. Pipe and equipment supports. Submit calculations for variable spring and constant support hangers.
2. Pipe and tubing, with specification, class or type, and schedule.
3. Pipe fittings, including miscellaneous adapters and special fittings.
4. Flanges, gaskets and bolting.
5. Valves of all types.
6. Strainers.
11. All specified steam system components.

C. Manufacturer's certified data report, Form No. U-1, for ASME pressure vessels:
   1. Heat Exchangers (Steam-to-Hot Water).
   2. Flash tanks.
D. Coordination Drawings: Refer to Article, SUBMITTALS of Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.
E. As-Built Piping Diagrams: Provide drawing as follows for steam and steam condensate piping and other central plant equipment.
   1. One wall-mounted stick file for prints. Mount stick file in the chiller plant or adjacent control room along with control diagram stick file.
   2. One set of reproducible drawings.

**1.5 APPLICABLE PUBLICATIONS**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
B. American Society of Mechanical Engineers/American National Standards Institute (ASME/ANSI):
   B1.20.1-83(R2006).....Pipe Threads, General Purpose (Inch)
   B16.4-2006.....Gray Iron Threaded Fittings
C. American Society of Mechanical Engineers (ASME):
   B16.1-2005.....Gray Iron Pipe Flanges and Flanged Fittings
   B16.3-2006.....Malleable Iron Threaded Fittings
   B16.9-2007.....Factory-Made Wrought Buttwelding Fittings
   B16.11-2005.....Forged Fittings, Socket-Welding and Threaded
   B16.14-91.....Ferrous Pipe Plugs, Bushings, and Locknuts with Pipe Threads
   B16.22-2001.....Wrought Copper and Copper Alloy Solder-Joint Pressure Fittings
   B16.23-2002.....Cast Copper Alloy Solder Joint Drainage Fittings
   B16.24-2006.....Cast Copper Alloy Pipe Flanges and Flanged Fittings, Class 150, 300, 400, 600, 900, 1500 and 2500
   B16.39-98.....Malleable Iron Threaded Pipe Unions, Classes 150, 250, and 300
   B31.1-2007.....Power Piping
   B31.9-2008.....Building Services Piping
   B40.100-2005.....Pressure Gauges and Gauge Attachments

Boiler and Pressure Vessel Code: SEC VIII D1-2001, Pressure Vessels, Division 1

D. American Society for Testing and Materials (ASTM):

A47-99.....Ferritic Malleable Iron Castings

A53-2007.....Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless

A106-2008.....Seamless Carbon Steel Pipe for High-Temperature Service

A126-2004.....Standard Specification for Gray Iron Castings for Valves, Flanges, and Pipe Fittings

A181-2006.....Carbon Steel Forgings, for General-Purpose Piping

A183-2003 ..... Carbon Steel Track Bolts and Nuts

A216-2008 ..... Standard Specification for Steel Castings, Carbon, Suitable for Fusion Welding, for High Temperature Service

A285-01 ..... Pressure Vessel Plates, Carbon Steel, Low-and-Intermediate-Tensile Strength

A307-2007 ..... Carbon Steel Bolts and Studs, 60,000 PSI Tensile Strength

A516-2006 ..... Pressure Vessel Plates, Carbon Steel, for Moderate-and- Lower Temperature Service

A536-84(2004)e1 ..... Standard Specification for Ductile Iron Castings

B32-2008 ..... Solder Metal

B61-2008 ..... Steam or Valve Bronze Castings

B62-2009 ..... Composition Bronze or Ounce Metal Castings

B88-2003 ..... Seamless Copper Water Tube

F439-06 ..... Socket-Type Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe Fittings, Schedule 80

F441-02(2008) ..... Chlorinated Poly (Vinyl Chloride) (CPVC) Plastic Pipe, Schedules 40 and 80

E. American Welding Society (AWS):

A5.8-2004.....Filler Metals for Brazing and Braze Welding

B2.1-00.....Welding Procedure and Performance Qualifications

F. Manufacturers Standardization Society (MSS) of the Valve and Fitting Industry, Inc.:

SP-67-95.....Butterfly Valves

SP-70-98.....Cast Iron Gate Valves, Flanged and Threaded Ends

SP-71-97.....Gray Iron Swing Check Valves, Flanged and Threaded Ends
SP-72-99.....Ball Valves with Flanged or Butt-Welding Ends for General Service
SP-78-98.....Cast Iron Plug Valves, Flanged and Threaded Ends
SP-80-97.....Bronze Gate, Globe, Angle and Check Valves
SP-85-94.....Cast Iron Globe and Angle Valves, Flanged and Threaded Ends

G. Military Specifications (Mil. Spec.):
MIL-S-901D-1989.....Shock Tests, H.I. (High Impact) Shipboard Machinery, Equipment, and Systems

H. National Board of Boiler and Pressure Vessel Inspectors (NB): Relieving Capacities of Safety Valves and Relief Valves

I. Tubular Exchanger Manufacturers Association: TEMA 18th Edition, 2000

**PART 2 - PRODUCTS**

**2.1 PIPE AND EQUIPMENT SUPPORTS, PIPE SLEEVES, AND WALL AND CEILING PLATES**

A. Provide in accordance with Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

**2.2 PIPE AND TUBING**

A. Steam Piping: Steel, ASTM A53, Grade B, seamless or ERW; A106 Grade B, Seamless; Schedule 40.

B. Steam Condensate and Pumped Condensate Piping:
1. Concealed above ceiling, in wall or chase: Copper water tube ASTM B88, Type K, hard drawn.
2. All other locations: Copper water tube ASTM B88, Type K, hard drawn; or steel, ASTM A53, Grade B, Seamless or ERW, or A106 Grade B Seamless, Schedule 80.

C. Vent Piping: Steel, ASTM A53, Grade B, seamless or ERW; A106 Grade B, Seamless; Schedule 40, galvanized.

**2.3 FITTINGS FOR STEEL PIPE**

A. 50 mm (2 inches) and Smaller: Screwed or welded.
1. Butt welding: ASME B16.9 with same wall thickness as connecting piping.
2. Forged steel, socket welding or threaded: ASME B16.11.
3. Screwed: 150 pound malleable iron, ASME B16.3. 125 pound cast iron, ASME B16.4, may be used in lieu of malleable iron, except for steam and steam condensate piping. Provide 300 pound malleable iron, ASME B16.3 for steam and steam condensate piping. Cast iron fittings or piping is not acceptable for steam and steam condensate piping.

Bushing reduction of a single pipe size, or use of close nipples, is not acceptable.

4. Unions: ASME B16.39.
5. Steam line drip station and strainer quick-couple blowdown hose connection: Straight through, plug and socket, screw or cam locking type for 15 mm (1/2 inch) ID hose. No integral shut-off is required.

B. 65 mm (2-1/2 inches) and Larger: Welded or flanged joints.
1. Butt welding fittings: ASME B16.9 with same wall thickness as connecting piping. Elbows shall be long radius type, unless otherwise noted.
2. Welding flanges and bolting: ASME B16.5:
a. Steam service: Weld neck or slip-on, raised face, with non-asbestos gasket. Non-asbestos gasket shall either be stainless steel spiral wound strip with flexible graphite filler or compressed inorganic fiber with nitrile binder rated for saturated and superheated steam service 750 degrees F and 1500 psi.
b. Flange bolting: Carbon steel machine bolts or studs and nuts, ASTM A307, Grade B.

C. Welded Branch and Tap Connections: Forged steel weldolets, or branchlets and threadolets may be used for branch connections up to one pipe size smaller than the main. Forged steel half-couplings, ASME B16.11 may be used for drain, vent and gage connections.

**2.4 FITTINGS FOR COPPER TUBING**

A. Solder Joint:
1. Joints shall be made up in accordance with recommended practices of the materials applied. Apply 95/5 tin and antimony on all copper piping.

B. Bronze Flanges and Flanged Fittings: ASME B16.24.

C. Fittings: ANSI/ASME B16.18 cast copper or ANSI/ASME B16.22 solder wrought copper.

**2.5 DIELECTRIC FITTINGS**

A. Provide where copper tubing and ferrous metal pipe are joined.

B. 50 mm (2 inches) and Smaller: Threaded dielectric union, ASME B16.39.

C. 65 mm (2 1/2 inches) and Larger: Flange union with dielectric gasket and bolt sleeves, ASME B16.42.

D. Temperature Rating, 121 degrees C (250 degrees F) for steam condensate and as required for steam service.

E. Contractor's option: On pipe sizes 2" and smaller, screwed end brass gate valves or dielectric nipples may be used in lieu of dielectric unions.

**2.6 SCREWED JOINTS**

A. Pipe Thread: ANSI B1.20.

B. Lubricant or Sealant: Oil and graphite or other compound approved for the intended service.

**2.7 VALVES**

A. Asbestos packing is not acceptable.

B. All valves of the same type shall be products of a single manufacturer.

D. Shut-Off Valves

1. Gate Valves:

a. 50 mm (2 inches) and smaller: MSS-SP80, Bronze, 1034 kPa (150 lb.), wedge disc, rising stem, union bonnet.

b. 65 mm (2 1/2 inches) and larger: Flanged, outside screw and yoke.

1) High pressure steam 413 kPa (60 psig) and above nominal MPS system): Cast steel body, ASTM A216 grade WCB, 1034 kPa (150 psig) at 260 degrees C (500 degrees F), 11-1/2 to 13 percent chrome stainless steel solid disc and seats. Provide 25 mm (1 inch) factory installed bypass with globe valve on valves 100 mm (4 inches) and larger.

2) All other services: MSS-SP 70, iron body, bronze mounted, 861 kPa (125 psig) wedge disc.

E. Globe and Angle Valves:

1. Globe Valves:

a. 50 mm (2 inches) and smaller: MSS-SP 80, bronze, 1034 kPa (150 lb.) Globe valves shall be union bonnet with metal plug type disc.

b. 65 mm (2 1/2 inches) and larger:

1) Globe valves for high pressure steam 413 kPa (60 psig) and above nominal MPS system): Cast steel body, ASTM A216 grade WCB, flanged, OS&Y, 1034 kPa (150 psig) at 260 degrees C (500 degrees F), 11-1/2 to 13 percent chrome stainless steel disc and renewable seat rings.

2) All other services: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS-SP-85 for globe valves.

2. Angle Valves

a. 50 mm (2 inches) and smaller: MSS-SP 80, bronze, 1034 kPa (150 lb.) Angle valves shall be union bonnet with metal plug type disc.

b. 65 mm (2 1/2 inches) and larger:

1) Angle valves for high pressure steam 413 kPa (60 psig) and above nominal MPS system): Cast steel body, ASTM A216 grade WCB, flanged, OS&Y, 1034 kPa (150 psig) at 260 degrees C (500 degrees F), 11-1/2 to 13 percent chrome stainless steel disc and renewable seat rings.
2) All other services: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS-SP-85 for angle valves.

E. Control Valves:
1. Fail Safe Operation: Control valves shall provide "fail safe" operation in the normally open position for freeze protection.
2. Spring Ranges: Range as required for system sequencing and to provide tight shut-off.
3. 24 Volt two position actuator spring return, 60 sec cycle time max. Minimum valve close-off pressure shall be minimum 50 psig for valves smaller than 4 inches.
3. Valves shall be rated for a minimum of 150 percent of system operating pressure at the valve location but not less than 900 kPa (125 psig).
4. Valves 50 mm (2 inches) and smaller shall be bronze body with threaded or flare connections.
5. Stainless steel seats.
6. Flow characteristics:
a. Two-way 2-position valves shall be ball, gate or butterfly type.
7. Maximum pressure drop:
a. Two position steam control: 20 percent of inlet gauge pressure.

F. Swing Check Valves
1. 50 mm (2 inches) and smaller: MSS-SP 80, bronze, 1034 kPa (150 psig), 45 degree swing disc.
2. 65 mm (2-1/2 inches) and Larger:
a Check valves for high pressure steam 413 kPa (60 psig) and above nominal MPS system: Cast steel body, ASTM A216 grade WCB, flanged, OS&Y, 1034 kPa (150 psig) at 260 degrees C (500 degrees F), 11-1/2 to 13 percent chrome stainless steel disc and renewable seat rings.
b. All other services: 861 kPa (125 psig), flanged, iron body, bronze trim, MSS-SP-71 for check valves.

G. Manual Radiator/Convector Valves: Brass, packless, with position indicator.

**2.8 STRAINERS**

A. Basket or Y Type. Tee type is acceptable for gravity flow and pumped steam condensate service.

B. High Pressure Steam: Rated 1034 kPa (150 psig) saturated steam.

1. 50 mm (2 inches) and smaller: Iron, ASTM A116 Grade B, or bronze, ASTM B-62 body with screwed connections (250 psig).
2. 65 mm (2-1/2 inches) and larger: Flanged cast steel or 1723 kPa (250 psig) cast iron.

C. All Other Services: Rated 861 kPa (125 psig) saturated steam.

1. 50 mm (2 inches) and smaller: Cast iron or bronze.
2. 65 mm (2-1/2 inches) and larger: Flanged, iron body.

D. Screens: Bronze, monel metal or 18-8 stainless steel, free area not less than 2-1/2 times pipe area, with perforations as follows:

1. 75 mm (3 inches) and smaller: 20 mesh for steam and 1.1 mm (0.045 inch) diameter perforations for liquids.
2. 100 mm (4 inches) and larger: 1.1 mm (0.045) inch diameter perforations for steam and 3.2 mm (0.125 inch) diameter perforations for liquids.

**2.9 THERMOSTATS**

A. Relocated Unit Heater Work Room: Digital solid-state, microprocessor based, programmable to daily, weekend, and holiday schedules with backlit digital display and temperature adjustment.

B. Relocated Unit Heater Generator Room: Digital non-programmable thermostat heating only, digital display.

**2.10 NOT USED**

**2.11 NOT USED**

**2.12 STEAM SYSTEM COMPONENTS**

G. Steam Trap: Each type of trap shall be the product of a single manufacturer. Provide trap sets at all low points and at 61 m (200 feet) intervals on the horizontal main lines.

1. Floats and linkages shall provide sufficient force to open trap valve over full operating pressure range available to the system. Unless otherwise indicated on the drawings, traps shall be sized for capacities indicated at minimum pressure drop as follows:
   a. For equipment with modulating control valve: 1.7 kPa (1/4 psig), based on a condensate leg of 300 mm (12 inches) at the trap inlet and gravity flow to the receiver.

b. For main line drip trap sets and other trap sets at steam pressure: Up to 70 percent of design differential pressure. Condensate may be lifted to the return line.

2. Trap bodies: Bronze, cast iron, or semi-steel, constructed to permit ease of removal and servicing working parts without disturbing connecting piping. For systems without relief valve traps shall be 5. Mechanism: Brass, stainless steel or corrosion resistant alloy. rated for the pressure upstream of the PRV supplying the system.
3. Balanced pressure thermostatic elements: Phosphor bronze, stainless steel or monel metal.
4. Valves and seats: Suitable hardened corrosion resistant alloy.
6. Floats: Stainless steel.
7. Inverted bucket traps: Provide bi-metallic thermostatic element for rapid release of non-condensables.

H. Thermostatic Air Vent (Steam): Brass or iron body, balanced pressure bellows, stainless steel (renewable) valve and seat, rated 861 kPa (125 psig) working pressure, 20 mm (3/4 inch) screwed connections. Air vents shall be balanced pressure type that responds to steam pressure-temperature curve and vents air at any pressure.

**2.13 PRESSURE/TEMPERATURE TEST PROVISIONS**

A. Provide one each of the following test items to the Resident Engineer:
1. 6 mm (1/4 inch) FPT by 3 mm (1/8 inch) diameter stainless steel pressure gage adapter probe for extra long test plug. PETE'S 500 XL is an example.
2. 90 mm (3-1/2 inch) diameter, one percent accuracy, compound gage, 762 mm (30 inches) Hg to 689 kPa (100 psig) range.
3. 0 - 104 degrees C (32-220 degrees F) pocket thermometer one-half degree accuracy, 25 mm (one inch) dial, 125 mm (5 inch) long stainless steel stem, plastic case.

**2.14 FIRESTOPPING MATERIAL**

A. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

**PART 3 - EXECUTION**

**3.1 GENERAL**

A. The drawings show the general arrangement of pipe and equipment but do not show all required fittings and offsets that may be necessary to connect pipes to equipment, fan-coils, coils, radiators, etc., and to coordinate with other trades. Provide all necessary fittings, offsets

and pipe runs based on field measurements and at no additional cost to the government. Coordinate with other trades for space available and relative location of HVAC equipment and accessories to be connected on ceiling grid. Pipe location on the drawings shall be altered by contractor where necessary to avoid interferences and clearance difficulties.

B. Store materials to avoid excessive exposure to weather or foreign materials. Keep inside of piping relatively clean during installation and protect open ends when work is not in progress.

C. Support piping and equipment provide vibration isolation as required. Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION. Install unit heaters at height sufficient to provide gravity flow of condensate to the flash tank and condensate pump.

D. Install piping generally parallel to walls and column center lines, unless shown otherwise on the drawings. Space piping, including insulation, to provide 25 mm (one inch) minimum clearance between adjacent piping or other surface. Unless shown otherwise , slope steam, condensate and drain piping down in the direction of flow not less than 25 mm (one inch) in 12 m (40 feet). Provide eccentric reducers to keep bottom of sloped piping flat.

E. Locate and orient valves to permit proper operation and access for maintenance of packing, seat and disc. Generally locate valve stems in overhead piping in horizontal position. Provide a union adjacent to one end of all threaded end valves. Control valves usually require reducers to connect to pipe sizes shown on the drawing. Install butterfly valves with the valve open as recommended by the manufacturer to prevent binding of the disc in the seat.

F. Offset equipment connections to allow valving off for maintenance and repair with minimal removal of piping. Provide flexibility in equipment connections and branch line take-offs with 3-elbow swing joints where noted on the drawings.

G. Tee water piping runouts or branches into the side of mains or other branches. Avoid bull-head tees, which are two return lines entering opposite ends of a tee and exiting out the common side.

H. Connect piping to equipment as shown on the drawings. Install components furnished by others such as:

1. Flow elements (orifice unions), control valve bodies, flow switches, pressure taps with valve, and wells for sensors.

I. Firestopping: Fill openings around uninsulated piping penetrating floors or fire walls, with firestop material. For firestopping insulated piping refer to Section 23 07 11, HVAC, PLUMBING, and BOILER PLANT INSULATION.

J. Where copper piping is connected to steel piping, provide dielectric connections.

K. Pipe vents to the exterior. Where a combined vent is provided, the cross sectional area of the combined vent shall be equal to sum of individual vent areas. Slope vent piping one inch in 40 feet (0.25 percent) in direction of flow. Provide a drip trap elbow on relief valve outlets if the vent rises to prevent backpressure. Terminate vent minimum 0.3 M (12 inches) above the roof or through the wall minimum 2.5 M (8 feet) above grade with down turned elbow.

**3.2 PIPE JOINTS**

A. Welded: Beveling, spacing and other details shall conform to ASME B31.1 and AWS B2.1. See Welder’s qualification requirements under "Quality Assurance" in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

B. Screwed: Threads shall conform to ASME B1.20; joint compound shall be applied to male threads only and joints made up so no more than three threads show. Coat exposed threads on steel pipe with joint compound, or red lead paint for corrosion protection.

C. 125 Pound Cast Iron Flange (Plain Face): Mating flange shall have raised face, if any, removed to avoid overstressing the cast iron flange.

.

**3.4 STEAM TRAP PIPING**

A. Install to permit gravity flow to the trap. Provide gravity flow (avoid lifting condensate) from the trap where modulating control valves are used. Support traps weighing over 11 kg (25 pounds) independently of connecting piping.

**3.5 CONTROLS**

A. Wire in accordance with Section 26 05 21, Low-Voltage Electrical Power Conductors and Cables (600 Volts and Below)and applicable section of NFPA 70. Cabling for HVAC systems to be Gray and Tan in accordance with Zablocki VAMC standards.

**3.6 LEAK TESTING**

A. Inspect all joints and connections for leaks and workmanship and make corrections as necessary, to the satisfaction of the Resident Engineer in accordance with the specified requirements. Testing shall be performed in accordance with the specification requirements.

B. An operating test at design pressure, and for hot systems, design maximum temperature.

C. A hydrostatic test at 1.5 times design pressure. For water systems the design maximum pressure would usually be the static head, or expansion tank maximum pressure, plus pump head. Factory tested equipment (convertors, exchangers, coils, etc.) need not be field tested. Avoid excessive pressure on mechanical seals and safety devices.

**3.7 FLUSHING AND CLEANING PIPING SYSTEMS**

A. Steam, Condensate and Vent Piping: No flushing or chemical cleaning required. Accomplish cleaning by pulling all strainer screens and cleaning all scale/dirt legs during start-up operation.

**3.8 OPERATING AND PERFORMANCE TEST AND INSTRUCTION**

A. Refer to PART 3, Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

- - - E N D - - -

# SECTION 23 23 00
# REFRIGERANT PIPING

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. Field refrigerant piping for direct expansion HVAC systems.

B. Definitions:

1. Refrigerating system: Combination of interconnected refrigerant-containing parts constituting one closed refrigeration circuit in which a refrigerant is circulated for the purpose of extracting heat.
   a. Low side means the parts of a refrigerating system subjected to evaporator pressure.
   b. High side means the parts of a refrigerating system subjected to condenser pressure.
2. Brazed joint: A gas-tight joint obtained by the joining of metal parts with alloys which melt at temperatures higher than 449 degrees C (840 degrees F) but less than the melting temperatures of the joined parts.

### 1.2 RELATED WORK

A. Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION: General mechanical requirements and items, which are common to more than one section of Division 23.

B. Section 23 07 11, HVAC, PLUMBING, and BOILER PLANT INSULATION: Requirements for piping insulation.

C. Section 23 08 15, Unitary Air to Air Heatpumps

### 1.3 QUALITY ASSURANCE

A. Refer to specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

B. Comply with ASHRAE Standard 15, Safety Code for Mechanical Refrigeration. The application of this Code is intended to assure the safe design, construction, installation, operation, and inspection of every refrigerating system employing a fluid which normally is vaporized and liquefied in its refrigerating cycle.

C. Comply with ASME B31.5: Refrigerant Piping and Heat Transfer Components.

D. Products shall comply with UL 207 "Refrigerant-Containing Components and Accessories, "Nonelectrical"; or UL 429 "Electrical Operated Valves."

### 1.4 SUBMITTALS

A. Submit in accordance with specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Shop Drawings:
   1. Complete information for components noted, including valves and refrigerant piping accessories, clearly presented, shall be included to determine compliance with drawings and specifications for components noted below:
      a. Tubing and fittings
      b. Valves
      c. Strainers
      d. Moisture-liquid indicators
      e. Filter-driers
      f. Pipe and equipment supports
      g. Refrigerant and oil
      h. Pipe/conduit wall penetration detail
      i. Soldering and brazing materials
   2. Layout of refrigerant piping and accessories, including flow capacities, valves locations, and oil traps slopes of horizontal runs, floor/wall penetrations, and equipment connection details.

C. Certification: Copies of certificates for welding procedure, performance qualification record and list of welders' names and symbols.

D. Design Manual: Furnish two copies of design manual of refrigerant valves and accessories.

**1.5 APPLICABLE PUBLICATIONS**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. Air Conditioning, Heating, and Refrigeration Institute (ARI/AHRI):
   495-1999 (R2002).....Standard for Refrigerant Liquid Receivers
   730-2005.....Flow Capacity Rating of Suction-Line Filters and Suction-Line Filter-Driers
   750-2007.....Thermostatic Refrigerant Expansion Valves
   760-2007.....Performance Rating of Solenoid Valves for Use with Volatile Refrigerants

C. American Society of Heating Refrigerating and Air Conditioning Engineers (ASHRAE):
   ANSI/ASHRAE 15-2007.....Safety Standard for Refrigeration Systems (ANSI)
   ANSI/ASHRAE 17-2008.....Method of Testing Capacity of Thermostatic Refrigerant Expansion Valves (ANSI)
   63.1-95 (RA 01).....Method of Testing Liquid Line Refrigerant Driers (ANSI)

D. American National Standards Institute (ANSI):
ASME (ANSI)A13.1-2007...Scheme for Identification of Piping Systems
Z535.1-2006.....Safety Color Code

E. American Society of Mechanical Engineers (ASME):
ANSI/ASME B16.22-2001 (R2005)
Wrought Copper and Copper Alloy Solder-Joint Pressure Fittings (ANSI)
ANSI/ASME B16.24-2006 Cast Copper Alloy Pipe Flanges and Flanged Fittings, Class 150, 300, 400, 600, 900, 1500 and 2500 (ANSI)

ANSI/ASME B31.5-2006....Refrigeration Piping and Heat Transfer Components (ANSI)
ANSI/ASME B40.100-2005..Pressure Gauges and Gauge Attachments
ANSI/ASME B40.200-2008..Thermometers, Direct Reading and Remote Reading

F. American Society for Testing and Materials (ASTM)
A126-04.....Standard Specification for Gray Iron Castings for Valves, Flanges, and Pipe FittingsB32-08 Standard Specification for Solder Metal
B88-03.....Standard Specification for Seamless Copper Water Tube
B88M-05.....Standard Specification for Seamless Copper Water Tube (Metric)
B280-08.....Standard Specification for Seamless Copper Tube for Air Conditioning and Refrigeration Field Service

G. American Welding Society, Inc. (AWS):
Brazing Handbook
A5.8/A5.8M-04.....Standard Specification for Filler Metals for Brazing and Braze Welding

H. Federal Specifications (Fed. Spec.)
Fed. Spec. GG

I. Underwriters Laboratories (U.L.):
U.L.207-2009.....Standard for Refrigerant-Containing Components and Accessories, Nonelectrical
U.L.429-99 (Rev.2006)...Standard for Electrically Operated Valves

**PART 2 - PRODUCTS**

**2.1 PIPING AND FITTINGS**

A. Refrigerant Piping: For piping up to 100 mm (4 inch) use Copper refrigerant tube, ASTM B280, cleaned, dehydrated and sealed, marked ACR

on hard temper straight lengths. Coils shall be tagged ASTM B280 by the manufacturer. For piping over 100 mm (4 inch) use A53 Black SML steel.

B. Water and Drain Piping: Copper water tube, ASTM B88M, Type B or C (ASTM B88, Type M or L). Optional drain piping material: Schedule 80 flame retardant Polypropylene plastic.

C. Fittings, Valves and Accessories:

1. Copper fittings: Wrought copper fittings, ASME B16.22.
   a. Brazed Joints, refrigerant tubing: Cadmium free, AWS A5.8/A5.8M, 45 percent silver brazing alloy, Class BAg-5.
   b. Solder Joints, water and drain: 95-5 tin-antimony, ASTM B32 (95TA).

4. Refrigeration Valves:
   a. Stop Valves: Brass or bronze alloy, packless, or packed type with gas tight cap, frost proof, back seating.
   b. Pressure Relief Valves: Comply with ASME Boiler and Pressure Vessel Code; UL listed. Forged brass with nonferrous, corrosion resistant internal working parts of high strength, cast iron bodies conforming to ASTM A126, Grade B. Set valves in accordance with ASHRAE Standard 15.

6. Refrigerant Moisture/Liquid Indicators: Double-ported type having heavy sight glasses sealed into forged bronze body and incorporating means of indicating refrigerant charge and moisture indication. Provide screwed brass seal caps.

7. Refrigerant Filter-Dryers: UL listed, angle or in-line type, as shown on drawings. Conform to ARI Standard 730 and ASHRAE Standard 63.1. Heavy gage steel shell protected with corrosion-resistant paint; perforated baffle plates to prevent desiccant bypass. Size as recommended by manufacturer for service and capacity of system with connection not less than the line size in which installed. Filter driers with replaceable filters shall be furnished with one spare element of each type and size.

**2.2 PIPE SUPPORTS**

A. Refer to specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

**2.3 REFRIGERANTS AND OIL**

A. Provide EPA approved refrigerant and oil for proper system operation.

**2.4 PIPE INSULATION FOR DX HVAC SYSTEMS**

A. Refer to specification Section 23 07 11, HVAC, PLUMBING, and BOILER PLANT INSULATION.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Install refrigerant piping and refrigerant containing parts in accordance with ASHRAE Standard 15 and ASME B31.5
   1. Install piping as short as possible, with a minimum number of joints, elbow and fittings.
   2. Install piping with adequate clearance between pipe and adjacent walls and hangers to allow for service and inspection. Space piping, including insulation, to provide 25 mm (1 inch) minimum clearance between adjacent piping or other surface. Use pipe sleeves through walls, floors, and ceilings, sized to permit installation of pipes with full thickness insulation.
   3. Locate and orient valves to permit proper operation and access for maintenance of packing, seat and disc. Generally locate valve stems in overhead piping in horizontal position. Provide a union adjacent to one end of all threaded end valves. Control valves usually require reducers to connect to pipe sizes shown on the drawing.
   4. Use copper tubing in protective conduit when installed below ground.
   5. Install hangers and supports per ASME B31.5 and the refrigerant piping manufacturer's recommendations.

B. Joint Construction:
   1. Brazed Joints: Comply with AWS "Brazing Handbook" and with filler materials complying with AWS A5.8/A5.8M.
      a. Use Type BcuP, copper-phosphorus alloy for joining copper socket fittings with copper tubing.
      b. Use Type BAg, cadmium-free silver alloy for joining copper with bronze or steel.
      c. Swab fittings and valves with manufacturer's recommended cleaning fluid to remove oil and other compounds prior to installation.
      d. Pass nitrogen gas through the pipe or tubing to prevent oxidation as each joint is brazed. Cap the system with a reusable plug after each brazing operation to retain the nitrogen and prevent entrance of air and moisture.

C. Protect refrigerant system during construction against entrance of foreign matter, dirt and moisture; have open ends of piping and connections to compressors, condensers, evaporators and other equipment tightly capped until assembly.

D. Pipe relief valve discharge to outdoors for systems containing more than 45 kg (100 lbs) of refrigerant.

E. Firestopping: Fill openings around uninsulated piping penetrating floors or fire walls, with firestop material. For firestopping insulated piping refer to Section 23 07 11, HVAC, PLUMBING, and BOILER PLANT INSULATION.

**3.2 PIPE AND TUBING INSULATION**

A. Refer to specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

B. Apply two coats of weather-resistant finish as recommended by the manufacturer to insulation exposed to outdoor weather.

**3.3 SIGNS AND IDENTIFICATION**

A. Each refrigerating system erected on the premises shall be provided with an easily legible permanent sign securely attached and easily accessible, indicating thereon the name and address of the installer, the kind and total number of pounds of refrigerant required in the system for normal operations, and the field test pressure applied.

B. Systems containing more than 50 kg (110 lb) of refrigerant shall be provided with durable signs, in accordance with ANSI A13.1 and ANSI Z535.1, having letters not less than 13 mm (1/2 inch) in height designating:

1. Valves and switches for controlling refrigerant flow, the ventilation and the refrigerant compressor(s).
2. Signs on all exposed high pressure and low pressure piping installed outside the machinery room, with name of the refrigerant and the letters "HP" or "LP."

**3.4 FIELD QUALITY CONTROL**

Prior to initial operation examine and inspect piping system for conformance to plans and specifications and ASME B31.5. Correct equipment, material, or work rejected because of defects or nonconformance with plans and specifications, and ANSI codes for pressure piping.

A. After completion of piping installation and prior to initial operation, conduct test on piping system according to ASME B31.5. Furnish materials and equipment required for tests. Perform tests in the presence of Resident Engineer. If the test fails, correct defects and perform the test again until it is satisfactorily done and all joints are proved tight.

1. Every refrigerant-containing parts of the system that is erected on the premises, except compressors, condensers, evaporators, safety devices, pressure gages, control mechanisms and systems that are

factory tested, shall be tested and proved tight after complete installation, and before operation.

2. The high and low side of each system shall be tested and proved tight at not less than the lower of the design pressure or the setting of the pressure-relief device protecting the high or low side of the system, respectively, except systems erected on the premises using non-toxic and non-flammable Group A1 refrigerants with copper tubing not exceeding DN 18 (NPS 5/8). This may be tested by means of the refrigerant charged into the system at the saturated vapor pressure of the refrigerant at 20 degrees C (68 degrees F) minimum.

B. Test Medium: A suitable dry gas such as nitrogen or shall be used for pressure testing. The means used to build up test pressure shall have either a pressure-limiting device or pressure-reducing device with a pressure-relief device and a gage on the outlet side. The pressure relief device shall be set above the test pressure but low enough to prevent permanent deformation of the system components.

**3.5 SYSTEM TEST AND CHARGING**

A. System Test and Charging: As recommended by the equipment manufacturer or as follows:

1. Connect a drum of refrigerant to charging connection and introduce enough refrigerant into system to raise the pressure to 70 kPa (10 psi) gage. Close valves and disconnect refrigerant drum. Test system for leaks with halide test torch or other approved method suitable for the test gas used. Repair all leaking joints and retest.
2. Connect a drum of dry nitrogen to charging valve and bring test pressure to design pressure for low side and for high side. Test entire system again for leaks.
3. Evacuate the entire refrigerant system by the triplicate evacuation method with a vacuum pump equipped with an electronic gage reading in mPa (microns). Pull the system down to 665 mPa (500 microns) 665 mPa (2245.6 inches of mercury at 60 degrees F) and hold for four hours then break the vacuum with dry nitrogen (or refrigerant). Repeat the evacuation two more times breaking the third vacuum with the refrigeration to be charged and charge with the proper volume of refrigerant.

- - - E N D - - -

# SECTION 23 31 00
# HVAC DUCTS AND CASINGS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. Ductwork and accessories for HVAC including the following:
   1. Supply air, return air, outside air, exhaust, make-up air, and relief systems.

B. Definitions:
   1. SMACNA Standards as used in this specification means the HVAC Duct Construction Standards, Metal and Flexible.
   2. Seal or Sealing: Use of liquid or mastic sealant, with or without compatible tape overlay, or gasketing of flanged joints, to keep air leakage at duct joints, seams and connections to an acceptable minimum.
   3. Duct Pressure Classification: SMACNA HVAC Duct Construction Standards, Metal and Flexible.
   4. Exposed Duct: Exposed to view in a finished room, exposed to weather.

### 1.2 RELATED WORK

A. Fire Stopping Material: Section 07 84 00, FIRESTOPPING.

B. Outdoor and Exhaust Louvers: Section 08 90 00, LOUVERS and VENTS.

C. General Mechanical Requirements: Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

D. Noise Level Requirements: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.

E. Duct Insulation: Section 23 07 11, HVAC, PLUMBING, and BOILER PLANT INSULATION

F. Return Air and Exhaust Air Fans: Section 23 34 00, HVAC FANS.

G. Duct Mounted Instrumentation: Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

H. Testing and Balancing of Air Flows: Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

### 1.3 QUALITY ASSURANCE

A. Refer to article, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

B. Fire Safety Code: Comply with NFPA 90A.

C. Duct System Construction and Installation: Referenced SMACNA Standards are the minimum acceptable quality.

D. Duct Sealing, Air Leakage Criteria, and Air Leakage Tests: Ducts shall be sealed as per duct sealing requirements of SMACNA HVAC Air Duct Leakage Test Manual for duct pressure classes shown on the drawings.

E. Duct accessories exposed to the air stream, such as dampers of all types (except smoke dampers) and access openings, shall be of the same material as the duct or provide at least the same level of corrosion resistance.

**1.4 SUBMITTALS**

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data:

1. Rectangular ducts:
   a. Schedules of duct systems, materials and selected SMACNA construction alternatives for joints, sealing, gage and reinforcement.
   c. Sealants and gaskets.
   d. Access doors.
2. Motorized dampers
3. Upper hanger attachments.
4. Fire dampers, fire doors, and smoke dampers with installation instructions.
5. Flexible connections.
6 COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

C. Coordination Drawings: Refer to article, SUBMITTALS, in Section 23 05

**1.5 APPLICABLE PUBLICATIONS**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American Society of Civil Engineers (ASCE):

ASCE7-05.....Minimum Design Loads for Buildings and Other Structures

C. American Society for Testing and Materials (ASTM):

A167-99(2009).....Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip

A653-09.....Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy coated (Galvannealed) by the Hot-Dip process

A1011-09a.....Standard Specification for Steel, Sheet and Strip, Hot rolled, Carbon, structural, High-Strength Low-Alloy, High Strength Low-Alloy with Improved Formability, and Ultra-High Strength

B209-07.....Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate

C1071-05e1.....Standard Specification for Fibrous Glass Duct Lining Insulation (Thermal and Sound Absorbing Material)

E84-09a.....Standard Test Method for Surface Burning Characteristics of Building Materials

D. National Fire Protection Association (NFPA):

90A-09.....Standard for the Installation of Air Conditioning and Ventilating Systems

96-08.....Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations

E. Sheet Metal and Air Conditioning Contractors National Association (SMACNA):

2nd Edition – 2005.....HVAC Duct Construction Standards, Metal and Flexible

1st Edition - 1985.....HVAC Air Duct Leakage Test Manual

6th Edition – 2003.....Fibrous Glass Duct Construction Standards

F. Underwriters Laboratories, Inc. (UL):

181-08.....Factory-Made Air Ducts and Air Connectors

555-06 .....Standard for Fire Dampers

555S-06 .....Standard for Smoke Dampers

**PART 2 - PRODUCTS**

**2.1 DUCT MATERIALS AND SEALANTS**

A. General: Except for systems specified otherwise, construct ducts, casings, and accessories of galvanized sheet steel, ASTM A653, coating G90; or, aluminum sheet, ASTM B209, alloy 1100, 3003 or 5052.

B. Specified Corrosion Resistant Systems: Stainless steel sheet, ASTM A167, Class 302 or 304, Condition A (annealed) Finish No. 4 for exposed ducts and Finish No. 2B for concealed duct or ducts located in mechanical rooms.

C. Joint Sealing: Refer to SMACNA HVAC Duct Construction Standards, paragraph S1.9.

1. Sealant: Elastomeric compound, gun or brush grade, maximum 25 flame spread and 50 smoke developed (dry state) compounded specifically for

sealing ductwork as recommended by the manufacturer. Generally provide liquid sealant, with or without compatible tape, for low clearance slip joints and heavy, permanently elastic, mastic type where clearances are larger. Oil base caulking and glazing compounds are not acceptable because they do not retain elasticity and bond.

2. Tape: Use only tape specifically designated by the sealant manufacturer and apply only over wet sealant. Pressure sensitive tape shall not be used on bare metal or on dry sealant.
3. Gaskets in Flanged Joints: Soft neoprene.

D. Approved factory made joints may be used.

**2.2 DUCT CONSTRUCTION AND INSTALLATION**

A. Regardless of the pressure classifications outlined in the SMACNA Standards, fabricate and seal the ductwork in accordance with the following pressure classifications:

B. Duct Pressure Classification:
0 to 50 mm (2 inch)

C. Seal Class: All ductwork shall receive Class A Seal

D. Casings and Plenums: Construct in accordance with SMACNA HVAC Duct Construction Standards Section 6, including curbs, access doors, pipe penetrations, eliminators and drain pans. Access doors shall be hollow metal, insulated, with latches and door pulls, 500 mm (20 inches) wide by 1200 - 1350 mm (48 - 54 inches) high. Provide view port in the doors where shown. Provide drain for outside air louver plenum. Outside air plenum shall have exterior insulation. Drain piping shall be routed to the nearest floor drain.

**2.3 MOTORIZED DAMPERS:**

A. Fail Safe Operation: Dampers shall provide "fail safe" operation in either the normally open position as required for generator operation.

B. Spring Ranges: Range as required for system sequencing and to provide tight shut-off.

C. Factory fabricated, balanced type dampers. All dampers shall be parallel blade type, gasketed thermally broke and insulated.

1. Leakage: Maximum leakage in closed position shall not exceed 1.4 L/S (3 CFMs) differential pressure.
2. Aluminum or steel hat channel frame thermally broken and insulated on 4 sides with polystyrene or polyurethane foam.
3. Blades shall be galvanized steel or aluminum airfoil and thermally broken with polystyrene or polyurethane foam.
4. Bearing shall be nylon, bronze sleeve or ball type.

5. Hardware shall be zinc-plated steel. Connected rods and linkage shall be non-slip. Working parts of joints shall be brass, bronze, nylon or stainless steel.

D. 115 Volt Electric operator shall provide full modulating control of dampers s. A linkage and pushrod shall be furnished for mounting the actuator on the damper frame internally in the duct or externally in the duct or externally on the duct wall, or shall be furnished with a direct-coupled design. Metal parts shall be aluminum, mill finish galvanized steel, or zinc plated steel or stainless steel. Provide actuator heads which allow for electrical conduit attachment. The motors shall have sufficient closure torque to allow for complete closure damper under pressure. Provide multiple motors as required to achieve sufficient close-off torque.

E. Where multiple sections are operated by a single motor operator, that motor shall provide adequate torque as previously specified. Provide additional linkages, jackshafts as recommended by the damper manufacturer. All linkages shall be constructed of the same material as specified above.

F. Duct Hangers and Supports: Refer to SMACNA Standards Section IV. Avoid use of trapeze hangers for round duct.

**2.4 DUCT ACCESS DOORS, PANELS AND SECTIONS**

A. Provide access doors, sized and located for maintenance work, upstream, in the following locations:
   1. Each duct mounted coil and humidifier.
   2. Each fire damper (for link service), smoke damper and automatic control damper.
   3. Each duct mounted smoke detector.
   4. For cleaning operating room supply air duct and kitchen hood exhaust duct, locate access doors at 6 m (20 feet) intervals and at each change in duct direction.

B. Openings shall be as large as feasible in small ducts, 300 mm by 300 mm (12 inch by 12 inch) minimum where possible. Access sections in insulated ducts shall be double-wall, insulated. Transparent shatterproof covers are preferred for uninsulated ducts.
   1. For rectangular ducts: Refer to SMACNA HVAC Duct Construction Standards (Figure 2-12).
   2. For round and flat oval duct: Refer to SMACNA HVAC duct Construction Standards (Figure 2-11).

**2.5 FIRE DAMPERS**

A. Galvanized steel, interlocking blade type, UL listing and label, 1-1/2 hour rating, 70 degrees C (160 degrees F) fusible line, 100 percent free opening with no part of the blade stack or damper frame in the air stream.

B. Fire dampers in wet air exhaust shall be of stainless steel construction, all others may be galvanized steel.

C. Minimum requirements for fire dampers:

1. The damper frame may be of design and length as to function as the mounting sleeve, thus eliminating the need for a separate sleeve, as allowed by UL 555. Otherwise provide sleeves and mounting angles, minimum 1.9 mm (14 gage), required to provide installation equivalent to the damper manufacturer's UL test installation.

2. Submit manufacturer's installation instructions conforming to UL rating test.

**2.6 FIRESTOPPING MATERIAL**

Refer to Section 07 84 00, FIRESTOPPING.

**2.7 DUCT MOUNTEDTEMPERATURE SENSOR (AIR)**

Refer to Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

**2.8 INSTRUMENT TEST FITTINGS**

A. Manufactured type with a minimum 50 mm (two inch) length for insulated duct, and a minimum 25 mm (one inch) length for duct not insulated. Test hole shall have a flat gasket for rectangular ducts and a concave gasket for round ducts at the base, and a screw cap to prevent air leakage.

B. Provide instrument test holes at each duct or casing mounted temperature sensor or transmitter, and at entering and leaving side of each heating coil, cooling coil, and heat recovery unit.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Comply with provisions of Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION, particularly regarding coordination with other trades and work in existing buildings.

B. Fabricate and install ductwork and accessories in accordance with referenced SMACNA Standards:

1. Drawings show the general layout of ductwork and accessories but do not show all required fittings and offsets that may be necessary to connect ducts to equipment, boxes, diffusers, grilles, etc., and to coordinate with other trades. Fabricate ductwork based on field

measurements. Provide all necessary fittings and offsets at no additional cost to the government. Coordinate with other trades for space available and relative location of HVAC equipment and accessories on ceiling grid. Duct sizes on the drawings are inside dimensions which shall be altered by Contractor to other dimensions with the same air handling characteristics where necessary to avoid interferences and clearance difficulties.

2. Provide duct transitions, offsets and connections to dampers, coils, and other equipment in accordance with SMACNA Standards, Section II. Provide streamliner, when an obstruction cannot be avoided and must be taken in by a duct. Repair galvanized areas with galvanizing repair compound.
3. Provide bolted construction and tie-rod reinforcement in accordance with SMACNA Standards.
4. Construct casings, eliminators, and pipe penetrations in accordance with SMACNA Standards, Chapter 6. Design casing access doors to swing against air pressure so that pressure helps to maintain a tight seal.

C. Install duct hangers and supports in accordance with SMACNA Standards, Chapter 4.

D. Install fire dampers, smoke dampers and combination fire/smoke dampers in accordance with the manufacturer's instructions to conform to the installation used for the rating test. Install fire dampers, smoke dampers and combination fire/smoke dampers at locations indicated and where ducts penetrate fire rated and/or smoke rated walls, shafts and where required by the Resident Engineer. Install with required perimeter mounting angles, sleeves, breakaway duct connections, corrosion resistant springs, bearings, bushings and hinges per UL and NFPA. Demonstrate re-setting of fire dampers and operation of smoke dampers to the Resident Engineer.

E. Seal openings around duct penetrations of floors and fire rated partitions with fire stop material as required by NFPA 90A.

F. Not Used

G. Not Used

H. Control Damper Installation:

1. Provide necessary blank-off plates required to install dampers that are smaller than duct size. Provide necessary transitions required to install dampers larger than duct size.

2. Assemble multiple sections dampers with required interconnecting linkage and extend required number of shafts through duct for external mounting of damper motors.
3. Provide necessary sheet metal baffle plates to eliminate stratification and provide air volumes specified. Locate baffles by experimentation, and affix and seal permanently in place, only after stratification problem has been eliminated.
4. Install all damper control/adjustment devices on stand-offs to allow complete coverage of insulation.

I. Not Used

J. Low Pressure Duct Liner: Install in accordance with SMACNA, Duct Liner Application Standard.

K. Protection and Cleaning: Adequately protect equipment and materials against physical damage. Place equipment in first class operating condition, or return to source of supply for repair or replacement, as determined by Resident Engineer. Protect equipment and ducts during construction against entry of foreign matter to the inside and clean both inside and outside before operation and painting. When new ducts are connected to existing ductwork, clean both new and existing ductwork by mopping and vacuum cleaning inside and outside before operation.

**3.2 DUCT LEAKAGE TESTS AND REPAIR**

A. Ductwork leakage testing shall be performed by the Testing and Balancing Contractor directly contracted by the General Contractor and independent of the Sheet Metal Contractor.

B. Ductwork leakage testing shall be performed for the entire air distribution system (including all supply, return, exhaust and relief ductwork), section by section, including fans, coils and filter sections. Based upon satisfactory initial duct leakage test results, the scope of the testing may be reduced by the Resident Engineer on ductwork constructed to the 500 Pa (2" WG) duct pressure classification. In no case shall the leakage testing of ductwork constructed above the 500 Pa (2" WG) duct pressure classification or ductwork located in shafts or other inaccessible areas be eliminated.

C. Test procedure, apparatus and report shall conform to SMACNA Leakage Test manual. The maximum leakage rate allowed is 4 percent of the design air flow rate.

D. All ductwork shall be leak tested first before enclosed in a shaft or covered in other inaccessible areas.

E. All tests shall be performed in the presence of the Resident Engineer and the Test and Balance agency. The Test and Balance agency shall measure and record duct leakage and report to the Resident Engineer and identify leakage source with excessive leakage.

F. If any portion of the duct system tested fails to meet the permissible leakage level, the Contractor shall rectify sealing of ductwork to bring it into compliance and shall retest it until acceptable leakage is demonstrated to the Resident Engineer.

G. All tests and necessary repairs shall be completed prior to insulation or concealment of ductwork.

H. Make sure all openings used for testing flow and temperatures by TAB Contractor are sealed properly.

**3.4 TESTING, ADJUSTING AND BALANCING (TAB)**

A. Refer to Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

**3.5 OPERATING AND PERFORMANCE TESTS**

A. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION

- - - E N D - - -

# SECTION 23 34 00
# HVAC FANS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. Fans for heating, ventilating and air conditioning.

B. Product Definitions: AMCA Publication 99, Standard l-66.

### 1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS.

B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

C. Not Used

D. Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

E. Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT.

F. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.

### 1.3 QUALITY ASSURANCE

A. Refer to paragraph, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

B. Fans and power ventilators shall be listed in the current edition of AMCA 26l, and shall bear the AMCA performance seal.

C. Operating Limits for Centrifugal Fans: AMCA 99 (Class I, II, and III).

D. Fans and power ventilators shall comply with the following standards:

1. Testing and Rating: AMCA 2l0.
2. Sound Rating: AMCA 300.

E. Vibration Tolerance for Fans and Power Ventilators: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.

F. Performance Criteria:

1. The fan schedule shall show the design air volume and static pressure. Select the fan motor HP by increasing the fan BHP by 10 percent to account for the drive losses and field conditions.
2. Select the fan operating point as follows:
   a. Forward Curve and Axial Flow Fans: Right hand side of peak pressure point
   b. Air Foil, Backward Inclined, or Tubular: At or near the peak static efficiency

G. Safety Criteria: Provide manufacturer's standard screen on fan inlet and discharge where exposed to operating and maintenance personnel.

H. Corrosion Protection:

1. Except for fans in fume hood exhaust service, all steel shall be mill-galvanized, or phosphatized and coated with minimum two coats, corrosion resistant enamel paint. Manufacturers paint and paint system shall meet the minimum specifications of: ASTM D1735 water fog; ASTM B117 salt spray; ASTM D3359 adhesion; and ASTM G152 and G153 for carbon arc light apparatus for exposure of non-metallic material.
2. Fans for general purpose fume hoods, or chemical hoods, and radioisotope hoods shall be constructed of materials compatible with the chemicals being transported in the air through the fan.

**1.4 SUBMITTALS**

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturers Literature and Data:
   1. Fan sections, motors and drives.
   2. Centrifugal fans, motors, drives, accessories and coatings.
      a. In-line centrifugal fans.

C. Certified Sound power levels for each fan.

D. Motor ratings types, electrical characteristics and accessories.

E. Belt guards.

F. Maintenance and Operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

G. Certified fan performance curves for each fan showing cubic feet per minute (CFM) versus static pressure, efficiency, and horsepower for design point of operation.

**1.5 APPLICABLE PUBLICATIONS**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. Air Movement and Control Association International, Inc. (AMCA):
   99-86.....Standards Handbook
   210-06.....Laboratory Methods of Testing Fans for Aerodynamic Performance Rating
   261-09.....Directory of Products Licensed to bear the AMCA Certified Ratings Seal - Published Annually
   300-08.....Reverberant Room Method for Sound Testing of Fans

C. American Society for Testing and Materials (ASTM):

B117-07a.....Standard Practice for Operating Salt Spray (Fog) Apparatus

D1735-08.....Standard Practice for Testing Water Resistance of Coatings Using Water Fog Apparatus

D3359-08.....Standard Test Methods for Measuring Adhesion by Tape Test

G152-06.....Standard Practice for Operating Open Flame Carbon Arc Light Apparatus for Exposure of Non-Metallic Materials

G153-04.....Standard Practice for Operating Enclosed Carbon Arc Light Apparatus for Exposure of Non-Metallic Materials

D. National Fire Protection Association (NFPA):

NFPA 96-08.....Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations

E. National Sanitation Foundation (NSF):

37-07.....Air Curtains for Entrance Ways in Food and Food Service Establishments

F. Underwriters Laboratories, Inc. (UL):

181-2005.....Factory Made Air Ducts and Air Connectors

**1.6 EXTRA MATERIALS**

A. Provide one additional set of belts for all belt-driven fans.

**PART 2 - PRODUCTS**

**2.6 CENTRIFUGAL INLINE CABINET FANS**

A. Standards and Performance Criteria: Refer to Paragraph, QUALITY ASSURANCE.

B. Steel housing, baked enamel finish, direct connected fan assembly. Provide gravity back draft assembly.

C. Acoustical Lining: 12.5 mm (1/2 inch) thick mineral fiber, dark finish. Comply with UL 181 for erosion.

D. Motor: Shaded pole or permanent split capacitor, sleeve bearings, supported by steel brackets in combination with rubber isolators.

E. Controls: Provide two (2) line voltage digital thermostats. Coordinate installation with the electrical contractor.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Install fan, motor and drive in accordance with manufacturer's instructions.

B. Align fan and motor sheaves to allow belts to run true and straight.

C. Bolt equipment to curbs with galvanized lag bolts.

D. Install vibration control devices as shown on drawings and specified in Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.

**3.2 PRE-OPERATION MAINTENANCE**

A. Lubricate bearings, pulleys, belts and other moving parts with manufacturer recommended lubricants.

B. Rotate impeller by hand and check for shifting during shipment and check all bolts, collars, and other parts for tightness.

C. Clean fan interiors to remove foreign material and construction dirt and dust.

**3.3 START-UP AND INSTRUCTIONS**

A. Verify operation of motor, drive system and fan wheel according to the drawings and specifications.

B. Check vibration and correct as necessary for air balance work.

C. After air balancing is complete and permanent sheaves are in place perform necessary field mechanical balancing to meet vibration tolerance in Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.

- - - E N D - - -

# SECTION 23 37 00
# AIR OUTLETS AND INLETS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. Roof Curbs

B. Air Outlets and Inlets: Diffusers, Registers, and Grilles.

### 1.2 RELATED WORK

A. Outdoor and Exhaust Louvers: Section 08 90 00, LOUVERS AND VENTS.

B. General Mechanical Requirements: Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

C. Noise Level Requirements: Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.

D. Testing and Balancing of Air Flows: Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.

### 1.3 QUALITY ASSURANCE

A. Refer to article, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

B. Fire Safety Code: Comply with NFPA 90A.

### 1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data:

1. Air intake/exhaust hoods.
2. Diffusers, registers, grilles and accessories.

C. Coordination Drawings: Refer to article, SUBMITTALS, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

### 1.5 APPLICABLE PUBLICATIONS

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. Air Diffusion Council Test Code:

1062 GRD-84.....Certification, Rating, and Test Manual 4th Edition

C. American Society of Civil Engineers (ASCE):

ASCE7-05.....Minimum Design Loads for Buildings and Other Structures

D. American Society for Testing and Materials (ASTM):

A167-99 (2004).....Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip

B209-07.....Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate

E. National Fire Protection Association (NFPA):

90A-09.....Standard for the Installation of Air Conditioning and Ventilating Systems

F. Underwriters Laboratories, Inc. (UL):

181-08.....UL Standard for Safety Factory-Made Air Ducts and Connectors

**PART 2 - PRODUCTS**

**2.1 EQUIPMENT SUPPORTS**

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

**2.2 AIR OUTLETS AND INLETS**

A. Materials:

1. Steel or aluminum. Provide manufacturer's standard gasket.
2. Exposed Fastenings: The same material as the respective inlet or outlet. Fasteners for aluminum may be stainless steel.
3. Contractor shall review all ceiling drawings and details and provide all ceiling mounted devices with appropriate dimensions and trim for the specific locations.

B. Performance Test Data: In accordance with Air Diffusion Council Code 1062GRD. Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT for NC criteria.

C. Air Supply Outlets:

1. Not Used
2. Not Used
3. Not Used
4. Supply Registers: Double deflection type with horizontal face bars and opposed blade damper with removable key operator.
   a. Margin: Flat, 30 mm (1-1/4 inches) wide.
   b. Bar spacing: 20 mm (3/4 inch) maximum.
   c. Finish: Off white baked enamel for ceiling mounted units. Wall units shall have a prime coat for field painting, or shall be extruded with manufacturer's standard finish.
5. Supply Grilles: Same as registers but without the opposed blade damper.

D. Return and Exhaust Registers and Grilles: Provide opposed blade damper without removable key operator for registers.
   1. Finish: Off-white baked enamel for ceiling mounted units. Wall units shall have a prime coat for field painting, or shall be extruded aluminum with manufacturer's standard aluminum finish.
   2. Standard Type: Fixed horizontal face bars set at 30 to 45 degrees, approximately 30 mm (1-1/4 inch) margin.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Comply with provisions of Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION, particularly regarding coordination with other trades and work in existing buildings.

B. Protection and Cleaning: Protect equipment and materials against physical damage. Place equipment in first class operating condition, or return to source of supply for repair or replacement, as determined by Resident Engineer. Protect equipment during construction against entry of foreign matter to the inside and clean both inside and outside before operation and painting.

**3.2 TESTING, ADJUSTING AND BALANCING (TAB)**

Refer to Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.

**3.3 OPERATING AND PERFORMANCE TESTS**

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION

- - - E N D - - -

# SECTION 23 81 43
# AIR-SOURCE UNITARY HEAT PUMPS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This Section specifies electrically operated air-source unitary heat pumps.

B. Definitions:

1. Coefficient of Performance (COP) - Cooling: The ratio of the rate of heat removed to the rate of energy input in consistent units, for a complete refrigerating system or some specific portion of that system under designated operating conditions.
2. Coefficient of Performance (COP) - Heating: The ratio of the rate of heat delivered to the rate of energy input is consistent units for a complete heat pump system, including the compressor and, if applicable, auxiliary heat under designated operating conditions.
3. Energy Efficiency Ratio (EER): The ratio of net cooling capacity is Btu/h to total rate of electricity input in watts under designated operating conditions.
4. Heating Seasonal Performance Factor (HSPF) - Total heating output of heat pump during its normal annual usage period for heating in Btu/h divided by total electric energy input in watts during the same period.
5. Seasonal Energy Efficiency Ratio (SEER) - Total cooling output of an air conditioner during its normal annual usage period for cooling in Btu/h divided by total electric energy input in watts during the same period.
6. Air-Source Unitary Heat Pump: One or more factory made assemblies that normally include an indoor conditioning coil, compressor(s) and an outdoor refrigerant-to-air coil. These units provide both heating and cooling functions.

### 1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS: For pre-test requirements.

B. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.

C. Section 23 23 00, REFRIGERANT PIPING: Requirements for field refrigerant piping.

D. Section 23 31 00, HVAC DUCTS AND CASINGS: Requirements for sheet metal ductwork.

E. Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.
F. Section 01 91 00 – GENERAL COMMISSIONING REQUIREMENTS
G. Section 26 05 21, Low-Voltage Electrical Power Conductors and Cables (600 Volts and Below).
H. Section 26 05 26, Grounding and Bonding for Electrical Systems.
I. Section 26 05 33, Raceway and Boxes for Electrical Systems.
J. Section 26 22 21, Specialty Transformers.
K. Section 26 27 26, Wiring Devices.

**1.3 QUALITY ASSURANCE:**

A. Refer to specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC
B. Comply with ASHRAE Standard 15, Safety Code for Mechanical Refrigeration.
C. Comply with ASHRAE Standard 90.1-2010, Energy Standard for Buildings except Low-Rise Residential Buildings for cooling and heating performance requirements when tested in accordance with AHRI 210/240 and UL 1995.
D. Heating Performance shall conform to ASHRAE requirements when tested in accordance with AHRI 210/240/ and UL 1995.

**1.4 SUBMITTALS**

A. Submit in accordance with specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
B. Manufacturer’s Literature and Data.
   1. Air-Source Unitary Heat pump:
      a. Split system
C. Certification: Submit, simultaneously with shop drawings, a proof of certification that this product has been certified by AHRI.
D. Performance Rating: Submit catalog selection data showing equipment ratings and compliance with required cooling and heating capacities EER and COP values as applicable.
E. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.

**1.5 APPLICABLE PUBLICATIONS:**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
B. Federal Specification (Fed. Spec.):

A-A-50502-90.....Air-conditioner (UNITARY HEAT PUMP), AIR TO AIR (3000 TO 300,000 BTUH)

C. Air-Conditioning Heating and Refrigeration Institute (AHRI) Standards:
AHRI-DCPP.....Directory of Certified Product Performance - Applied Directory of Certified Products
210/240-08.....Performance Rating of Unitary Air-Conditioning and Air-Source Heat Pump Equipment
270-08.....Sound Rating of Outdoor Unitary Equipment
310/380-04.....Standard for Packaged Terminal Air-Conditioners and Heat Pumps (CSA-C744-04)
340/360-07.....Commercial and Industrial Unitary Air-Conditioning and Heat Pump Equipment

D. Air Movement and Control Association (AMCA):
210-07.....Laboratory Methods of Testing Fans for Aerodynamic Performance Rating (ANSI)
410-96.....Recommended Safety Practices for Users and Installers of Industrial and Commercial Fans

E. American National Standards Institute (ANSI):
S12.51-02 (R2007).....Acoustics - Determination of Sound Power Levels of Noise Sources Using Sound Pressure - Precision Method for Reverberation Rooms (same as ISO 3741:1999)

F. American Society of Heating, Refrigerating and Air-Conditioning Engineers Inc (ASHRAE):
15-10.....Safety Standard for Refrigeration Systems (ANSI)
62.1-10.....Ventilation for Acceptable Indoor Air Quality (ANSI)
90.1-07.....Energy Standard for Buildings except Low-Rise Residential Buildings
2008 Handbook.....HVAC Systems and Equipment

G. American Society of Testing and Materials (ASTM):
B117-09.....Standard Practice for Operating Salt Spray (Fog) Apparatus

H. National Electrical Manufacturer’s Association (NEMA):
MG 1-09 (R2010).....Motors and Generators (ANSI)
ICS 1-00 (R2005).....Industrial Controls and Systems: General Requirements

I. National Fire Protection Association (NFPA):

90A-09.....Standard for the Installation of Air-Conditioning and Ventilating Systems

J. Underwriters Laboratory (UL):
1995-05.....Heating and Cooling Equipment

**PART II- PRODUCTS**

**2.1 UNITARY HEAT PUMPS, AIR TO AIR**

A. Units shall comply with Fed Spec A-A-50502 Type II, (Split System) having remote outdoor section separate from indoor Section, Class 1, "Department of Energy" (DOE) covered products (units with cooling capacity up to 65000 Btu/hr.
   1. Unitary heat pumps shall bear the United States Environmental Protection Agency, Energy Star label and shall have a minimum Heating Season Performance Factor (HSPF) of 10 (Type II – Split System), and a minimum Seasonal Energy Efficiency Ratio (SEER) of 17 (Type II – Split System)//.

B. Applicable AHRI Standards: Units shall be listed in the corresponding ARI Directory of Certified products shown in paragraph, APPLICABLE PUBLICATIONS:
   1. Air Source Unitary heat pumps with capacity less than 19 KW (65,000 Btu/hr), Comply with AHRI 210/240.

C. Casing: Unit shall be constructed of zinc coated, heavy-gage galvanized steel. Exterior surfaces shall be cleaned, phosphatized, and finished with a weather-resistant baked enamel finish. Unit surfaces shall be tested 500 hours in a salt spray test in compliance with ASTM B117. Cabinet panels shall have lifting handles and shall be water- and air-tight seal. All exposed vertical, top covers and base pan shall be insulated with matt-faced, fire-resistant, odorless, glass fiber material. Surfaces in contact with the airstream shall comply with requirements in ASHRAE 62.1-2010. The base of the unit shall have provisions for forklift and crane lifting.

D. Filters: One inch, MERV 7, throwaway filter shall be standard on all units below 19kW (6 Tons).

E. Compressors: Compressors shall be inverter-drive, hermetic rotary type. Motor shall be suction gas-cooled. Internal overloads and crankcase heaters shall be utilized with all compressors.

F. Refrigerant Circuit: Each refrigerant circuit shall have independent fixed orifice or thermostatic expansion devices, service pressure ports, and refrigerant line filter driers factory installed as standard. An area shall be provided for replacement suction line driers.

G. Evaporator and Condenser Coils: Internally finned, DN 10 (NPS 3/8) copper tubes mechanically bonded to a configured aluminum plate fin shall be standard. The evaporated coil and condenser coil shall be leak tested at the factory to 1378 kPa (200 psig) and pressure tested to 2756 kPa (400 psig). All dual compressor units shall have intermingled evaporator coils. Sloped condensate drain pans shall be provided.

H. Outdoor fans: Direct driven, statically and dynamically balanced, draw-through in the vertical discharge position. The fan motors shall be permanently lubricated and shall have built-in thermal overload protection.

I. Indoor Fan:

1. Fans shall be centrifugal direct-drive blower type with air intakes on the sides of the blower housings and discharge at the front of the blower housings Automatic, motor-driven vertical air sweep shall be provided.

J. Defrost Controls: A time initiated, temperature terminated defrost system shall ship with a setting of 70-minute cycle, with a choice of 50- or 90-minute cycle. Timed override limits defrost cycle to 10 minutes shall be available on units from 35- to 70-kW (10 to 20 tons). Adaptive demand defrost shall be provided on units below 35 kW (10 Tons).

K. Unit Electrical

1. Provide single point unit power connection.
2. Unit control box shall be located within the unit and shall contain controls for compressor, reversing valve and fan motor operation and shall have a 50 VA 24-volt control circuit transformer and a terminal block for low voltage field wiring connections.
3. Safety Controls - High pressure, low temperature, and low pressure safety switches shall be wired through a latching lockout circuit to hold the conditioner off until it is reset electrically be interrupting the power supply to the conditioner. All safety switches shall be normally closed, opening upon fault detection.

L. Operating Controls

2. Low voltage, adjustable programmable room thermostat to control heating and cooling in sequence with delay between stages, compressor and supply fan to maintain temperature setting.

**PART 3- EXECUTION**

**3.1 INSTALLATION**

A. Install heat pumps according to manufacturers printed instructions.

B. Install electrical and control devices furnished by the manufacturer but not specified to be factory mounted. All electrical work shall comply with Division 26 Sections.

C. Ductwork: Comply with requirements in Section 23 31 00, HVAC DUCTS AND CASINGS.

D. Piping: Comply with requirements in Section 23 23 00, REFRIGERANT PIPING.

E. Mount thermostat where indicated on drawing and in accordance with ADA guidelines. All cabling shall be tan and or gray in accordance with Zablocki VAMC wiring requirements. Wiring shall also meet all the requirements of the applicable sections of Division 26 within this specification.

**3.2 STARTUP AND TESTING:**

A. Perform startup checks according to manufacturer’s written instructions.

B. Test controls and demonstrate its compliance with project requirements. Replace damaged or malfunctioning controls and equipment and retest the equipment to the satisfaction of the Resident Engineer.

C. Furnish test reports to the Senior Resident Engineer in accordance with specification Section 01 00 00, GENERAL REQUIREMENTS.

**3.3 INSTRUCTIONS**

Provide services of manufacturer’s technical representative for four hours to instruct VA personnel in operation and maintenance of heat pumps.

**3.4 STARTUP AND TESTING**

A. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the Resident Engineer and Commissioning Agent. Provide a minimum of 7 days prior notice.

**3.5 COMMISSIONING**

A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

**3.6 DEMONSTRATION AND TRAINING**

A. Provide services of manufacturer’s technical representative for four hours to instruct VA personnel in operation and maintenance of units.

B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

# SECTION 26 05 11
# REQUIREMENTS FOR ELECTRICAL INSTALLATIONS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This section applies to all sections of Division 26.

B. Furnish and install electrical wiring, systems, equipment and accessories in accordance with the specifications and drawings. Capacities and ratings of motors, transformers, cable, switchgear, panelboards, automatic transfer switches, and other items and arrangements for the specified items are shown on drawings.

C. Wiring ampacities specified or shown on the drawings are based on copper conductors, with the conduit and raceways accordingly sized. Aluminum conductors are prohibited.

### 1.2 MINIMUM REQUIREMENTS

A. References to the International Building Code (IBC), National Electrical Code (NEC), Underwriters Laboratories, Inc. (UL) and National Fire Protection Association (NFPA) are minimum installation requirement standards.

B. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

### 1.3 TEST STANDARDS

A. All materials and equipment shall be listed, labeled or certified by a nationally recognized testing laboratory to meet Underwriters Laboratories, Inc., standards where test standards have been established. Equipment and materials which are not covered by UL Standards will be accepted provided equipment and material is listed, labeled, certified or otherwise determined to meet safety requirements of a nationally recognized testing laboratory. Equipment of a class which no nationally recognized testing laboratory accepts, certifies, lists, labels, or determines to be safe, will be considered if inspected or tested in accordance with national industrial standards, such as NEMA, or ANSI. Evidence of compliance shall include certified test reports and definitive shop drawings.

B. Definitions:

1. Listed; Equipment, materials, or services included in a list published by an organization that is acceptable to the authority having jurisdiction and concerned with evaluation of products or

services, that maintains periodic inspection of production or listed equipment or materials or periodic evaluation of services, and whose listing states that the equipment, material, or services either meets appropriate designated standards or has been tested and found suitable for a specified purpose.

2. Labeled; Equipment or materials to which has been attached a label, symbol, or other identifying mark of an organization that is acceptable to the authority having jurisdiction and concerned with product evaluation, that maintains periodic inspection of production of labeled equipment or materials, and by whose labeling the manufacturer indicates compliance with appropriate standards or performance in a specified manner.
3. Certified; equipment or product which:
   a. Has been tested and found by a nationally recognized testing laboratory to meet nationally recognized standards or to be safe for use in a specified manner.
   b. Production of equipment or product is periodically inspected by a nationally recognized testing laboratory.
   c. Bears a label, tag, or other record of certification.
4. Nationally recognized testing laboratory; laboratory which is approved, in accordance with OSHA regulations, by the Secretary of Labor.

**1.4 QUALIFICATIONS (PRODUCTS AND SERVICES)**

A. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.

B. Product Qualification:
   1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
   2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.

C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of

notification that service is needed. Submit name and address of service organizations.

**1.5 APPLICABLE PUBLICATIONS**

Applicable publications listed in all Sections of Division are the latest issue, unless otherwise noted.

**1.6 MANUFACTURED PRODUCTS**

A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.

B. When more than one unit of the same class or type of equipment is required, such units shall be the product of a single manufacturer.

C. Equipment Assemblies and Components:

1. Components of an assembled unit need not be products of the same manufacturer.
2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
3. Components shall be compatible with each other and with the total assembly for the intended service.
4. Constituent parts which are similar shall be the product of a single manufacturer.

D. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.

E. When Factory Testing Is Specified:

1. The Government shall have the option of witnessing factory tests. The contractor shall notify the VA through the Resident Engineer a minimum of 15 working days prior to the manufacturers making the factory tests.
2. Four copies of certified test reports containing all test data shall be furnished to the Resident Engineer prior to final inspection and not more than 90 days after completion of the tests.
3. When equipment fails to meet factory test and re-inspection is required, the contractor shall be liable for all additional expenses, including expenses of the Government.

**1.7 EQUIPMENT REQUIREMENTS**

Where variations from the contract requirements are requested in accordance with Section 00 72 00, GENERAL CONDITIONS and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, the connecting work and

related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

**1.8 EQUIPMENT PROTECTION**

A. Equipment and materials shall be protected during shipment and storage against physical damage, vermin, dirt, corrosive substances, fumes, moisture, cold and rain.
   1. Store equipment indoors in clean dry space with uniform temperature to prevent condensation. Equipment shall include but not be limited to switchgear, panelboards, transformers, enclosures, controllers, circuit protective devices, cables, wire, light fixtures, electronic equipment, and accessories.
   2. During installation, equipment shall be protected against entry of foreign matter; and be vacuum-cleaned both inside and outside before testing and operating. Compressed air shall not be used to clean equipment. Remove loose packing and flammable materials from inside equipment.
   3. Damaged equipment shall be, as determined by the Resident Engineer, placed in first class operating condition or be returned to the source of supply for repair or replacement.
   4. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.
   5. Damaged paint on equipment and materials shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

**1.9 WORK PERFORMANCE**

A. All electrical work must comply with the requirements of NFPA 70 (NEC), NFPA 70B, NFPA 70E, OSHA Part 1910 subpart J, OSHA Part 1910 subpart S and OSHA Part 1910 subpart K in addition to other references required by contract.

B. Job site safety and worker safety is the responsibility of the contractor.

C. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished in this manner for the required work, the following requirements are mandatory:
   1. Electricians must use full protective equipment (i.e., certified and tested insulating material to cover exposed energized electrical

components, certified and tested insulated tools, etc.) while working on energized systems in accordance with NFPA 70E.

2. Electricians must wear personal protective equipment while working on energized systems in accordance with NFPA 70E.
3. Before initiating any work, a job specific work plan must be developed by the contractor with a peer review conducted and documented by the Resident Engineer and Medical Center staff. The work plan must include procedures to be used on and near the live electrical equipment, barriers to be installed, safety equipment to be used and exit pathways.
4. Work on energized circuits or equipment cannot begin until prior written approval is obtained from the Resident Engineer.

D. New work shall be installed and connected to existing work neatly, safely and professionally. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.

E. Coordinate location of equipment and conduit with other trades to minimize interferences.

**1.10 EQUIPMENT INSTALLATION AND REQUIREMENTS**

A. Equipment location shall be as close as practical to locations shown on the drawings.

B. Working spaces shall not be less than specified in the NEC for all voltages specified.

C. Inaccessible Equipment:

1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
2. "Conveniently accessible" is defined as being capable of being reached quickly for operation, maintenance, or inspections without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

**1.11 EQUIPMENT IDENTIFICATION**

A. In addition to the requirements of the NEC, install an identification sign which clearly indicates information required for use and maintenance of items such as switchboards, control devices and other significant equipment.

B. Nameplates for Normal Power System equipment shall be laminated blue phenolic resin with a white core with engraved lettering. Engraved lettering shall be a minimum of 1/2 inch [12mm] high. Nameplates shall indicate equipment designation, rated bus amperage, voltage, number of phases, number of wires, and type of EES power branch as applicable. Secure nameplates with screws.

C. Install adhesive arc flash warning labels on all equipment as required by NFPA 70E. Label shall indicate the arc hazard boundary (inches), working distance (inches), arc flash incident energy at the working distance (calories/$cm^2$), required PPE category and description including the glove rating, voltage rating of the equipment, limited approach distance (inches), restricted approach distance (inches), prohibited approach distance (inches), equipment/bus name, date prepared, and manufacturer name and address.

D. Each new equipment item to be labeled as to equipment identification number, installation date, area serving, feeder services, voltage, amperage, main breaker rating, etc.

**1.12 SUBMITTALS**

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. The Government's approval shall be obtained for all equipment and material before delivery to the job site. Delivery, storage or installation of equipment or material which has not had prior approval will not be permitted at the job site.

C. All submittals shall include adequate descriptive literature, catalog cuts, shop drawings and other data necessary for the Government to ascertain that the proposed equipment and materials comply with specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify equipment being submitted.

D. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.

1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
3. Submit each section separately.

E. The submittals shall include the following:
   1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, pictures, nameplate data and test reports as required.
   2. Elementary and interconnection wiring diagrams for communication and signal systems, control systems and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
   3. Parts list which shall include those replacement parts recommended by the equipment manufacturer.

F. Manuals: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.
   1. Maintenance and Operation Manuals: Submit as required for systems and equipment specified in the technical sections. Furnish four copies, bound in hardback binders, (manufacturer's standard binders) or an approved equivalent. Furnish one complete manual as specified in the technical section but in no case later than prior to performance of systems or equipment test, and furnish the remaining manuals prior to contract completion.
   2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, equipment, building, name of Contractor, and contract number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the system or equipment.
   3. Provide a "Table of Contents" and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
   4. The manuals shall include:
      a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
      b. A control sequence describing start-up, operation, and shutdown.
      c. Description of the function of each principal item of equipment.
      d. Installation instructions.
      e. Safety precautions for operation and maintenance.
      f. Diagrams and illustrations.
      g. Periodic maintenance and testing procedures and frequencies, including replacement parts numbers and replacement frequencies.

h. Performance data.

i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare parts, and name of servicing organization.

j. List of factory approved or qualified permanent servicing organizations for equipment repair and periodic testing and maintenance, including addresses and factory certification qualifications.

G. Approvals will be based on complete submission of manuals together with shop drawings.

H. After approval and prior to installation, furnish the Resident Engineer with one sample of each of the following:

1. A 300 mm (12 inch) length of each type and size of wire and cable along with the tag from the coils of reels from which the samples were taken.
2. Each type of conduit coupling, bushing and termination fitting.
3. Conduit hangers, clamps and supports.
4. Duct sealing compound.
5. Each type of receptacle, toggle switch, occupancy sensor, outlet box, manual motor starter, device wall plate, engraved nameplate, wire and cable splicing and terminating material, and branch circuit single pole molded case circuit breaker.

**1.13 SINGULAR NUMBER**

Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

**1.14 ACCEPTANCE CHECKS AND TESTS**

The contractor shall furnish the instruments, materials and labor for field tests.

**1.15 TRAINING**

A. Training shall be provided in accordance with Article 1.25, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.

B. Training shall be provided for the particular equipment or system as required in each associated specification.

C. A training schedule shall be developed and submitted by the contractor and approved by the Resident Engineer at least 30 days prior to the planned training.

- - - E N D - - -

# SECTION 26 05 21
# LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW)

## PART 1 - GENERAL

### 1.1 DESCRIPTION

This section specifies the furnishing, installation, and connection of the low voltage power.

### 1.2 RELATED WORK

A. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire-rated construction.

B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for cables and wiring.

### 1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

### 1.4 FACTORY TESTS

Low voltage cables shall be thoroughly tested at the factory per NEMA WC-70 to ensure that there are no electrical defects. Factory tests shall be certified.

### 1.5 SUBMITTALS

In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

1. Manufacturer's Literature and Data: Showing each cable type and rating.
2. Certifications: Two weeks prior to the final inspection, submit four copies of the following certifications to the RESIDENT ENGINEER:
   a. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
   b. Certification by the contractor that the materials have been properly installed, connected, and tested.

### 1.6 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are reference in the text by designation only.

B. American Society of Testing Material (ASTM):
D2301-04.....Standard Specification for Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape

C. National Fire Protection Association (NFPA):
70-08.....National Electrical Code (NEC)

D. National Electrical Manufacturers Association (NEMA):
WC 70-09.....Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy

E. Underwriters Laboratories, Inc. (UL):
44-05.....Thermoset-Insulated Wires and Cables
83-08.....Thermoplastic-Insulated Wires and Cables
467-071.....Electrical Grounding and Bonding Equipment
486A-486B-03.....Wire Connectors
486C-04.....Splicing Wire Connectors
486D-05.....Sealed Wire Connector Systems
486E-94.....Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors
493-07.....Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable
514B-04.....Conduit, Tubing, and Cable Fittings
1479-03.....Fire Tests of Through-Penetration Fire Stops

**PART 2 - PRODUCTS**

**2.1 CONDUCTORS AND CABLES**

A. Conductors and cables shall be in accordance with NEMA WC-70 and as specified herein.

B. Single Conductor:
1. Shall be annealed copper.
2. Shall be stranded for sizes No. 8 AWG and larger, solid for sizes No. 10 AWG and smaller.
3. Shall be minimum size No. 12 AWG, except where smaller sizes are allowed herein.

C. Insulation:
1. XHHW-2 or THHN-THWN shall be in accordance with NEMA WC-70, UL 44, and UL 83.

D. Color Code:
1. Secondary service feeder and branch circuit conductors shall be color-coded as follows:

| 208/120 volt | Phase | 480/277 volt |
|---|---|---|
| Black | A | Brown |
| Red | B | Yellow |
| Blue | C | Orange |
| White | Neutral | Gray * |
| * or white with colored (other than green) tracer. | | |

a. Lighting circuit “switch legs” and 3-way switch “traveling wires” shall have color coding that is unique and distinct (e.g., pink and purple) from the color coding indicated above. The unique color codes shall be solid and in accordance with the NEC. Coordinate color coding in the field with the Resident Engineer.

2. Use solid color insulation or solid color coating for No. 12 AWG and No. 10 AWG branch circuit phase, neutral, and ground conductors.
3. Conductors No. 8 AWG and larger shall be color-coded using one of the following methods:
   a. Solid color insulation or solid color coating.
   b. Stripes, bands, or hash marks of color specified above.
   c. Color as specified using 0.75 in [19 mm] wide tape. Apply tape in half-overlapping turns for a minimum of 3 in [75 mm] for terminal points, and in junction boxes, pull-boxes, troughs, and manholes. Apply the last two laps of tape with no tension to prevent possible unwinding. Where cable markings are covered by tape, apply tags to cable, stating size and insulation type.
4. For modifications and additions to existing wiring systems, color coding shall conform to the existing wiring system.

**2.2 SPLICES AND JOINTS**

A. In accordance with UL 486A, C, D, E, and NEC.
B. Aboveground Circuits (No. 10 AWG and smaller):
   1. Connectors: Solderless, screw-on, reusable pressure cable type, rated 600 V, 220° F [105° C], with integral insulation, approved for copper and aluminum conductors.
   2. The integral insulator shall have a skirt to completely cover the stripped wires.
   3. The number, size, and combination of conductors, as listed on the manufacturer's packaging, shall be strictly followed.

C. Aboveground Circuits (No. 8 AWG and larger):
1. Connectors shall be indent, hex screw, or bolt clamp-type of high conductivity and corrosion-resistant material, listed for use with copper and aluminum conductors.
2. Field-installed compression connectors for cable sizes 250 kcmil and larger shall have not fewer than two clamping elements or compression indents per wire.
3. Insulate splices and joints with materials approved for the particular use, location, voltage, and temperature. Splice and joint insulation level shall be not less than the insulation level of the conductors being joined.
4. Plastic electrical insulating tape: Per ASTM D2304, flame-retardant, cold and weather resistant.

**2.3 CONTROL WIRING**

A. Unless otherwise specified elsewhere in these specifications, control wiring shall be as specified for power and lighting wiring, except that the minimum size shall be not less than No. 14 AWG.
B. Control wiring shall be large enough such that the voltage drop under in-rush conditions does not adversely affect operation of the controls.

**2.4 WIRE LUBRICATING COMPOUND**

A. Lubricating compound shall be suitable for the wire insulation and conduit, and shall not harden or become adhesive.

**PART 3 - EXECUTION**

**3.1 GENERAL**

A. Install in accordance with the NEC, and as specified.
B. Install all wiring in raceway systems.
C. Splice cables and wires only in outlet boxes, junction boxes, pull-boxes, manholes, or handholes.
D. Wires of different systems (e.g., 120 V, 277 V) shall not be installed in the same conduit or junction box system.
E. Install cable supports for all vertical feeders in accordance with the NEC. Provide split wedge type which firmly clamps each individual cable and tightens due to cable weight.
F. For panel boards, cabinets, wireways, switches, and equipment assemblies, neatly form, train, and tie the cables in individual circuits.
G. Seal cable and wire entering a building from underground between the wire and conduit where the cable exits the conduit, with a non-hardening approved compound.

H. Wire Pulling:
   1. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling of cables. Use lubricants approved for the cable.
   2. Use nonmetallic ropes for pulling feeders.
   3. Attach pulling lines for feeders by means of either woven basket grips or pulling eyes attached directly to the conductors, as approved by the Resident Engineer.
   4. All cables in a single conduit shall be pulled simultaneously.
   5. Do not exceed manufacturer’s recommended maximum pulling tensions and sidewall pressure values.

I. No more than three single-phase branch circuits shall be installed in any one conduit.

J. Provide separate neutrals for all branch circuits. Shared neutral for multi-wire branch circuits shall not be permitted.

**3.2 SPLICE INSTALLATION**

A. Splices and terminations shall be mechanically and electrically secure.

B. Tighten electrical connectors and terminals according to manufacturer's published torque values.

C. Where the Government determines that unsatisfactory splices or terminations have been installed, remove the devices and install approved devices at no additional cost to the Government.

**3.3 FEEDER IDENTIFICATION**

A. In each interior pull-box and junction box, install metal tags on all circuit cables and wires to clearly designate their circuit identification and voltage. The tags shall be the embossed brass type, 1.5 in [40 mm] in diameter and 40 mils thick. Attach tags with plastic ties.

**3.4 EXISTING WIRING**

Unless specifically indicated on the plans, existing wiring shall not be reused for a new installation.

**3.5 CONTROL AND SIGNAL WIRING INSTALLATION**

A. Unless otherwise specified in other sections, install wiring and connect to equipment/devices to perform the required functions as shown and specified.

**3.6 CONTROL AND SIGNAL SYSTEM WIRING IDENTIFICATION**

A. Install a permanent wire marker on each wire at each termination.

B. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.

C. Wire markers shall retain their markings after cleaning.

D. In each manhole and handhole, install embossed brass tags to identify the system served and function.

**3.7 ACCEPTANCE CHECKS AND TESTS**

A. Feeders and branch circuits shall have their insulation tested after installation and before connection to utilization devices, such as fixtures, motors, or appliances. Test each conductor with respect to adjacent conductors and to ground. Existing conductors to be reused shall also be tested.

B. Applied voltage shall be 500VDC for 300-volt rated cable, and 1000VDC for 600-volt rated cable. Apply test for one minute or until reading is constant for 15 seconds, whichever is longer. Minimum insulation resistance values shall not be less than 25 megohms for 300-volt rated cable and 100 megohms for 600-volt rated cable.

C. Perform phase rotation test on all three-phase circuits.

D. The contractor shall furnish the instruments, materials, and labor for all tests.

- - - E N D - - -

# SECTION 26 05 26
# GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This section specifies the general grounding and bonding requirements for electrical equipment and operations to provide a low impedance path for possible ground fault currents.

B. “Grounding electrode system” refers to all electrodes required by NEC, as well as made, supplementary, and lightning protection system grounding electrodes.

C. The terms “connect” and “bond” are used interchangeably in this specification and have the same meaning.

### 1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.

B. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Low Voltage power and lighting wiring.

C. Section 26 32 13, ENGINE-GENERATORS: Engine-generators.

D. Section 26 36 23, AUTOMATIC TRANSFER SWITCHES: Automatic transfer switches.

E. Section 26 12 19, SUBSTATION STYLE LIQUID FILLED, MEDIUM VOLTAGE TRANSFORMERS.

### 1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

### 1.4 SUBMITTALS

A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

B. Shop Drawings:

1. Clearly present enough information to determine compliance with drawings and specifications.
2. Include the location of system grounding electrode connections and the routing of aboveground and underground grounding electrode conductors.

C. Test Reports: Provide certified test reports of ground resistance.

D. Certifications: Two weeks prior to final inspection, submit four copies of the following to the RESIDENT ENGINEER

1. Certification that the materials and installation are in accordance with the drawings and specifications.
2. Certification by the contractor that the complete installation has been properly installed and tested.

**1.5 APPLICABLE PUBLICATIONS**

Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

A. American Society for Testing and Materials (ASTM):

B1-07.....Standard Specification for Hard-Drawn Copper Wire

B3-07.....Standard Specification for Soft or Annealed Copper Wire

B8-04.....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

B. Institute of Electrical and Electronics Engineers, Inc. (IEEE):

81-1983.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System

C2-07.....National Electrical Safety Code

C. National Fire Protection Association (NFPA):

70-08.....National Electrical Code (NEC)

99-2005.....Health Care Facilities

D. Underwriters Laboratories, Inc. (UL):

44-05 .....Thermoset-Insulated Wires and Cables

83-08 .....Thermoplastic-Insulated Wires and Cables

467-07 .....Grounding and Bonding Equipment

486A-486B-03 .....Wire Connectors

**PART 2 - PRODUCTS**

**2.1 GROUNDING AND BONDING CONDUCTORS**

A. Equipment grounding conductors shall be UL 44 or UL 83 insulated stranded copper, except that sizes No. 10 AWG [6 mm²] and smaller shall be solid copper. Insulation color shall be continuous green for all equipment grounding conductors, except that wire sizes No. 4 AWG [25 mm²] and larger shall be identified per NEC.

B. Bonding conductors shall be ASTM B8 bare stranded copper, except that sizes No. 10 AWG [6 mm²] and smaller shall be ASTM B1 solid bare copper wire.

C. Conductor sizes shall not be less than shown on the drawings, or not less than required by the NEC, whichever is greater.

**2.2 GROUND RODS**

A. Sectional steel or copper clad steel, 0.75 in [19 mm] diameter by 20 ft [6 M] long, conforming to UL 467.

B. Quantity of rods shall be as required to obtain the specified ground resistance, as shown on the drawings.

**2.3 GROUND CONNECTIONS**

A. Below Grade: Exothermic-welded type connectors.

B. Above Grade:

1. Bonding Jumpers: Compression-type connectors, using zinc-plated fasteners and external tooth lockwashers.
2. Connection to Building Steel: Exothermic-welded type connectors.
3. Ground Busbars: Two-hole compression type lugs, using tin-plated copper or copper alloy bolts and nuts.
4. Rack and Cabinet Ground Bars: One-hole compression-type lugs, using zinc-plated or copper alloy fasteners.

**2.4 EQUIPMENT RACK AND CABINET GROUND BARS**

Provide solid copper ground bars designed for mounting on the framework of open or cabinet-enclosed equipment racks with minimum dimensions of 0.375 in [4 mm] thick x 0.75 in [19 mm] wide.

**2.5 GROUND TERMINAL BLOCKS**

At any equipment mounting location (e.g., backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted, provide screw lug-type terminal blocks.

**2.6 GROUNDING BUS**

Pre-drilled rectangular copper bar with stand-off insulators, minimum 0.25 in [6.3 mm] thick x 4 in [100 mm] high in cross-section, length as shown on drawings, with 0.281 in [7.1 mm] holes spaced 1.125 in [28 mm] apart.

**PART 3 - EXECUTION**

**3.1 GENERAL**

A. Ground in accordance with the NEC, as shown on drawings, and as specified herein.

B. System Grounding:

1. Secondary service neutrals: Ground at the supply side of the secondary disconnecting means and at the related transformers.
2. Separately derived systems (transformers downstream from the service entrance): Ground the secondary neutral.

C. Equipment Grounding: Metallic structures, including ductwork and building steel, enclosures, raceways, junction boxes, outlet boxes, cabinets, machine frames, and other conductive items in close proximity with electrical circuits, shall be bonded and grounded.

**3.2 INACCESSIBLE GROUNDING CONNECTIONS**

Make grounding connections, which are normally buried or otherwise inaccessible (except connections for which access for periodic testing is required), by exothermic weld.

**3.3 SECONDARY VOLTAGE EQUIPMENT AND CIRCUITS**

A. Main Bonding Jumper: Bond the secondary service neutral to the ground bus in the service equipment.

B. Metallic Piping, Building Steel, and Supplemental Electrode(s):

1. Provide a grounding electrode conductor sized per NEC between the service equipment ground bus and all metallic water pipe systems, building steel, and supplemental or made electrodes. Provide jumper insulating joints in the metallic piping. All connections to electrodes shall be made with fittings that conform to UL 467.
2. Provide a supplemental ground electrode and bond to the grounding electrode system.

C. Service Disconnect (Separate Individual Enclosure): Provide a ground bar bolted to the enclosure with lugs for connecting the various grounding conductors.

D. Switchgear and Switchboards, Unit Substations.
   1. Connect the various feeder equipment grounding conductors to the ground bus in the enclosure with suitable pressure connectors.
   2. For service entrance equipment, connect the grounding electrode conductor to the ground bus.
   3. Provide ground bars, bolted to the housing, with sufficient lugs to terminate the equipment grounding conductors.
   4. Connect metallic conduits that terminate without mechanical connection to the housing, by grounding bushings and grounding conductor to the equipment ground bus.

**3.4 RACEWAY**

A. Conduit Systems:
   1. Ground all metallic conduit systems. All metallic conduit systems shall contain an equipment grounding conductor.
   2. Non-metallic conduit systems, except non-metallic feeder conduits that carry a grounded conductor from exterior transformers to interior or building-mounted service entrance equipment, shall contain an equipment grounding conductor.
   3. Conduit that only contains a grounding conductor, and is provided for its mechanical protection, shall be bonded to that conductor at the entrance and exit from the conduit.
   4. Metallic conduits which terminate without mechanical connection to an electrical equipment housing by means of locknut and bushings or adapters, shall be provided with grounding bushings. Connect bushings with a bare grounding conductor to the equipment ground bus.

B. Feeders and Branch Circuits: Install equipment grounding conductors with all feeders and power and lighting branch circuits.

C. Boxes, Cabinets, Enclosures, and Panelboards:
   1. Bond the equipment grounding conductor to each pullbox, junction box, outlet box, device box, cabinets, and other enclosures through which the conductor passes
   2. Provide lugs in each box and enclosure for equipment grounding conductor termination.

**3.5 CORROSION INHIBITORS**

When making ground and ground bonding connections, apply a corrosion inhibitor to all contact surfaces. Use corrosion inhibitor appropriate for protecting a connection between the metals used.

**3.6 CONDUCTIVE PIPING**

A. Bond all conductive piping systems, interior and exterior, to the grounding electrode system. Bonding connections shall be made as close as practical to the equipment ground bus.

**3.7 LIGHTNING PROTECTION SYSTEM**

Bond the lightning protection system to the electrical grounding electrode system.

**3.8 ELECTRICAL ROOM GROUNDING**

Building Earth Ground Busbars: Provide ground busbar and mounting hardware at each electrical room and connect to pigtail extensions of the building grounding ring.

**3.9 GROUND RESISTANCE**

A. Grounding system resistance to ground shall not exceed 5 ohms. Make any modifications or additions to the grounding electrode system necessary for compliance without additional cost to the Government. Final tests shall ensure that this requirement is met.

B. Resistance of the grounding electrode system shall be measured using a four-terminal fall-of-potential method as defined in IEEE 81. Ground resistance measurements shall be made before the electrical distribution system is energized and shall be made in normally dry conditions not fewer than 48 hours after the last rainfall. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together below grade. The combined resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes must still be provided.

C. Services at power company interface points shall comply with the power company ground resistance requirements.

D. Below-grade connections shall be visually inspected by the RESIDENT ENGINEER prior to backfilling. The contractor shall notify the RESIDENT ENGINEER 24 hours before the connections are ready for inspection.

**3.10 GROUND ROD INSTALLATION**

A. For outdoor installations, drive each rod vertically in the earth, until top of rod is 24 in [609 mm] below final grade.

B. For indoor installations, leave 4 in [100 mm] of rod exposed.

C. Where permanently concealed ground connections are required, make the connections by the exothermic process, to form solid metal joints. Make accessible ground connections with mechanical pressure-type ground connectors.

D. Where rock prevents the driving of vertical ground rods, install angled ground rods or grounding electrodes in horizontal trenches to achieve the specified resistance.

- - - E N D - - -

# SECTION 26 05 33
# RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of conduit, fittings, and boxes, to form complete, coordinated, grounded raceway systems. Raceways are required for all wiring unless shown or specified otherwise.

B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

### 1.2 RELATED WORK.

A. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire rated construction.

B. Section 09 91 00, PAINTING: Identification and painting of conduit and other devices.

C. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.

D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

### 1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

### 1.4 SUBMITTALS

In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

A. Manufacturer's Literature and Data: Showing each cable type and rating. The specific item proposed and its area of application shall be identified on the catalog cuts.

B. Shop Drawings:

1. Size and location of main feeders.
2. Size and location of panels and pull-boxes.
3. Layout of required conduit penetrations through structural elements.

C. Certifications:

1. Two weeks prior to the final inspection, submit four copies of the following certifications to the Resident Engineer:

a. Certification by the manufacturer that the material conforms to the requirements of the drawings and specifications.
b. Certification by the contractor that the material has been properly installed.

**1.5 APPLICABLE PUBLICATIONS**

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American National Standards Institute (ANSI):
C80.1-05.....Electrical Rigid Steel Conduit
C80.3-05.....Steel Electrical Metal Tubing
C80.6-05.....Electrical Intermediate Metal Conduit

C. National Fire Protection Association (NFPA):
70-08.....National Electrical Code (NEC)

D. Underwriters Laboratories, Inc. (UL):
1-05.....Flexible Metal Conduit
5-04.....Surface Metal Raceway and Fittings
6-07.....Electrical Rigid Metal Conduit - Steel
50-95.....Enclosures for Electrical Equipment
360-093.....Liquid-Tight Flexible Steel Conduit
467-07.....Grounding and Bonding Equipment
514A-04.....Metallic Outlet Boxes
514B-04.....Conduit, Tubing, and Cable Fittings
514C-96.....Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers
651-05.....Schedule 40 and 80 Rigid PVC Conduit and Fittings
651A-00.....Type EB and A Rigid PVC Conduit and HDPE Conduit
797-07.....Electrical Metallic Tubing
1242-06.....Electrical Intermediate Metal Conduit - Steel

E. National Electrical Manufacturers Association (NEMA):
TC-2-03.....Electrical Polyvinyl Chloride (PVC) Tubing and Conduit
TC-3-04.....PVC Fittings for Use with Rigid PVC Conduit and Tubing
FB1-07.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

**PART 2 - PRODUCTS**

**2.1 MATERIAL**

A. Conduit Size: In accordance with the NEC, but not less than 0.75 in unless otherwise shown. Where permitted by the NEC, 0.5 in [13 mm] flexible conduit may be used for tap connections to recessed lighting fixtures.

B. Conduit:
   1. Rigid steel: Shall conform to UL 6 and ANSI C80.1.
   2. Rigid intermediate steel conduit (IMC): Shall conform to UL 1242 and ANSI C80.6.
   3. Electrical metallic tubing (EMT): Shall conform to UL 797 and ANSI C80.3. Maximum size not to exceed 4 in [105 mm] and shall be permitted only with cable rated 600 V or less.
   4. Flexible galvanized steel conduit: Shall conform to UL 1.
   5. Liquid-tight flexible metal conduit: Shall conform to UL 360.
   6. Direct burial plastic conduit: Shall conform to UL 651 and UL 651A, heavy wall PVC or high density polyethylene (PE).
   7. Surface metal raceway: Shall conform to UL 5.

C. Conduit Fittings:
   1. Rigid steel and IMC conduit fittings:
      a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
      b. Standard threaded couplings, locknuts, bushings, conduit bodies, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
      c. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
      d. Bushings: Metallic insulating type, consisting of an insulating insert, molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
      e. Erickson (union-type) and set screw type couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case-hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
      f. Sealing fittings: Threaded cast iron type. Use continuous drain-type sealing fittings to prevent passage of water vapor. In

concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.

2. Electrical metallic tubing fittings:
   a. Fittings and conduit bodies shall meet the requirements of UL 514B, ANSI C80.3, and NEMA FB1.
   b. Only steel or malleable iron materials are acceptable.
   c. Setscrew couplings and connectors: Use setscrews of case-hardened steel with hex head and cup point, to firmly seat in wall of conduit for positive grounding.
   d. Indent-type connectors or couplings are prohibited.
   e. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.
3. Flexible steel conduit fittings:
   a. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
   b. Clamp-type, with insulated throat.
4. Liquid-tight flexible metal conduit fittings:
   a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
   b. Only steel or malleable iron materials are acceptable.
   c. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.
5. Expansion and deflection couplings:
   a. Conform to UL 467 and UL 514B.
   b. Accommodate a 0.75 in [19 mm] deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.
   c. Include internal flexible metal braid, sized to guarantee conduit ground continuity and a low-impedance path for fault currents, in accordance with UL 467 and the NEC tables for equipment grounding conductors.
   d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat-resistant molded rubber material with stainless steel jacket clamps.

D. Conduit Supports:
1. Parts and hardware: Zinc-coat or provide equivalent corrosion protection.

2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
3. Multiple conduit (trapeze) hangers: Not less than 1.5 x 1.5 in [38 mm x 38 mm], 12-gauge steel, cold-formed, lipped channels; with not less than 0.375 in [9 mm] diameter steel hanger rods.
4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

E. Outlet, Junction, and Pull Boxes:
1. UL-50 and UL-514A.
2. Cast metal where required by the NEC or shown, and equipped with rustproof boxes.
3. Sheet metal boxes: Galvanized steel, except where otherwise shown.
4. Flush-mounted wall or ceiling boxes shall be installed with raised covers so that the front face of raised cover is flush with the wall. Surface-mounted wall or ceiling boxes shall be installed with surface-style flat or raised covers.

F. Wireways: Equip with hinged covers, except where removable covers are shown. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for a complete system.

**PART 3 - EXECUTION**

**3.1 PENETRATIONS**

A. Cutting or Holes:
1. Cut holes in advance where they should be placed in the structural elements, such as ribs or beams. Obtain the approval of the Resident Engineer prior to drilling through structural elements.
2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammers, impact electric, hand, or manual hammer-type drills are not allowed, except where permitted by the Resident Engineer as required by limited working space.

B. Firestop: Where conduits, wireways, and other electrical raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING.

**3.2 INSTALLATION, GENERAL**

A. In accordance with UL, NEC, as shown, and as specified herein.

B. Install conduit as follows:

1. In complete mechanically and electrically continuous runs before pulling in cables or wires.
2. Unless otherwise indicated on the drawings or specified herein, installation of all conduits shall be concealed within finished walls, floors, and ceilings.
3. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new undamaged material.
4. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
5. Cut square, ream, remove burrs, and draw up tight.
6. Independently support conduit at 8 ft [2.4 M] on centers. Do not use other supports, i.e., suspended ceilings, suspended ceiling supporting members, lighting fixtures, conduits, mechanical piping, or mechanical ducts.
7. Support within 12 in [300 mm] of changes of direction, and within 12 in [300 mm] of each enclosure to which connected.
8. Close ends of empty conduit with plugs or caps at the rough-in stage until wires are pulled in, to prevent entry of debris.
9. Conduit installations under fume and vent hoods are prohibited.
10. Secure conduits to cabinets, junction boxes, pull-boxes, and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
11. Conduit bodies shall only be used for changes in direction, and shall not contain splices.

C. Conduit Bends:

1. Make bends with standard conduit bending machines.
2. Conduit hickey may be used for slight offsets and for straightening stubbed out conduits.
3. Bending of conduits with a pipe tee or vise is prohibited.

D. Layout and Homeruns:

1. Install conduit with wiring, including homeruns, as shown on drawings.

2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted approved by the Resident Engineer.

**3.3 CONCEALED WORK INSTALLATION**

A. In Concrete:
   1. Conduit: Rigid steel, IMC, or EMT. Do not install EMT in concrete slabs that are in contact with soil, gravel, or vapor barriers.
   2. Align and run conduit in direct lines.
   3. Install conduit through concrete beams only:
      a. Where shown on the structural drawings.
      b. As approved by the Resident Engineer prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
   4. Installation of conduit in concrete that is less than 3 in [75 mm] thick is prohibited.
      a. Conduit outside diameter larger than one-third of the slab thickness is prohibited.
      b. Space between conduits in slabs: Approximately six conduit diameters apart, and one conduit diameter at conduit crossings.
      c. Install conduits approximately in the center of the slab so that there will be a minimum of 0.75 in [19 mm] of concrete around the conduits.
   5. Make couplings and connections watertight. Use thread compounds that are UL approved conductive type to ensure low resistance ground continuity through the conduits. Tightening setscrews with pliers is prohibited.

**3.4 EXPOSED WORK INSTALLATION**

A. Unless otherwise indicated on the drawings, exposed conduit is only permitted in mechanical and electrical rooms.
B. Conduit for Conductors 600 V and Below: Rigid steel, IMC, / or EMT. Mixing different types of conduits indiscriminately in the system is prohibited.
C. Align and run conduit parallel or perpendicular to the building lines.
D. Install horizontal runs close to the ceiling or beams and secure with conduit straps.
E. Support horizontal or vertical runs at not over 8 ft [2.4 M] intervals.
F. Surface metal raceways: Use only where shown.

G. Painting:
   1. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
   2. Paint all conduits containing cables rated over 600 V safety orange. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color. In addition, paint legends, using 2 in [50 mm] high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 20 ft [6 M] intervals in between.

**3.5 MOTORS AND VIBRATING EQUIPMENT**

A. Use flexible metal conduit for connections to motors and other electrical equipment subject to movement, vibration, misalignment, cramped quarters, or noise transmission.

B. Use liquid-tight flexible metal conduit for installation in exterior locations, moisture or humidity laden atmosphere, corrosive atmosphere, water or spray wash-down operations, inside airstream of HVAC units, and locations subject to seepage or dripping of oil, grease, or water. Provide a green equipment grounding conductor with flexible metal conduit.

**3.6 EXPANSION JOINTS**

A. Conduits 3 in [75 mm] and larger that are secured to the building structure on opposite sides of a building expansion joint require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.

B. Provide conduits smaller than 3 in [75 mm] with junction boxes on both sides of the expansion joint. Connect conduits to junction boxes with sufficient slack of flexible conduit to produce 5 in [125 mm] vertical drop midway between the ends. Flexible conduit shall have a bonding jumper installed. In lieu of this flexible conduit, expansion and deflection couplings as specified above for conduits 15 in [375 mm] and larger are acceptable.

C. Install expansion and deflection couplings where shown.

**3.7 CONDUIT SUPPORTS, INSTALLATION**

A. Safe working load shall not exceed one-quarter of proof test load of fastening devices.

B. Use pipe straps or individual conduit hangers for supporting individual conduits.

C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of

the weights of the conduits, wires, hanger itself, and 200 lbs [90 kg]. Attach each conduit with U-bolts or other approved fasteners.

D. Support conduit independently of junction boxes, pull-boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.

E. Fasteners and Supports in Solid Masonry and Concrete:

1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
2. Existing Construction:
   a. Steel expansion anchors not less than 0.25 in [6 mm] bolt size and not less than 1.125 in [28 mm] embedment.
   b. Power set fasteners not less than 0.25 in [6 mm] diameter with depth of penetration not less than 3 in [75 mm].
   c. Use vibration and shock-resistant anchors and fasteners for attaching to concrete ceilings.

F. Hollow Masonry: Toggle bolts.

G. Bolts supported only by plaster or gypsum wallboard are not acceptable.

H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.

I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.

J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.

K. Spring steel type supports or fasteners are prohibited for all uses except horizontal and vertical supports/fasteners within walls.

L. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

**3.8 BOX INSTALLATION**

A. Boxes for Concealed Conduits:

1. Flush-mounted.
2. Provide raised covers for boxes to suit the wall or ceiling, construction, and finish.

B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling-in operations.

C. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
D. Outlet boxes mounted back-to-back in the same wall are prohibited. A minimum 24 in [600 mm] center-to-center lateral spacing shall be maintained between boxes.
E. Minimum size of outlet boxes for ground fault interrupter (GFI) receptacles is 4 in [100 mm] square x 2.125 in [55 mm] deep, with device covers for the wall material and thickness involved.
F. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example "SIG-FA JB No. 1."
G. On all branch circuit junction box covers, identify the voltage, sevice breaker, panel and circuits with black marker.

- - - E N D - - -

# SECTION 26 05 71
# ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This section specifies the requirements of the Electrical System Protective Device Study (herein, “the study”).

B. A short-circuit and selective coordination study shall be prepared for the electrical overcurrent devices to be installed under this project. The protection devices to be studied shall be one-level up stream and one level downstream of the new overcurrent protection devices installed.

C. The study shall present an organized time-current analysis of each protective device in series from the individual device back to the utility. The study shall reflect the operation of each device during normal and abnormal current conditions.

### 1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.

B. Section 26 23 00, LOW-VOLTAGE SWITCHGEAR

C. Section 26 29 12, SUBSTATION STYLE LIQUID FILLED MEDIUM VOLTAGE TRANSFORMERS

### 1.3 QUALITY ASSURANCE

A. Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

B. The protective device study shall be prepared by the equipment manufacturer's qualified engineers or an approved consultant. The contractor is responsible for providing all pertinent information required by the preparers to complete the study.

### 1.4 SUBMITTALS

A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

1. Product data on the software program to be used for the study. Software shall be in mainstream use in the industry, shall provide device settings and ratings, and shall show selective coordination by time-current drawings.

2. Complete short-circuit and coordination study as described in paragraph 1.6.
3. Protective equipment shop drawings shall be submitted simultaneously with or after the protective device study. Protective equipment shop drawings will not be accepted prior to protective device study.
4. Certification: Two weeks prior to final inspection, submit four copies of the following to the Resident Engineer:
5. Certification by the contractor that the protective devices have been adjusted and set in accordance with the approved protective device study.

**1.5 APPLICABLE PUBLICATIONS**

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. Institute of Electrical and Electronics Engineers (IEEE):

242-01.....Recommended Practice for Protection and Coordination of Industrial and Commercial Power Systems

399-97.....Recommended Practice for Power Systems Analysis

1584a-04.....Guide for Performing Arc-Flash Hazard Calculations

**1.6 REQUIREMENTS**

A. The complete study shall include a system one line diagram, short-circuit and ground fault analysis, and protective coordination plots for all overcurrent protective devices.

B. One Line Diagram:

1. On the one line diagram, show all electrical equipment and wiring to be protected by the overcurrent devices installed under this project.
2. On the one line diagram, also show the following specific information:
   a. Calculated fault impedance, X/R ratios, and short-circuit values at each feeder and branch circuit bus.
   b. Breaker and fuse ratings.
   c. Generator kW and Transformer kVA and voltage ratings, percent impedance, X/R ratios, and wiring connections.
   d. Voltage at each bus.
   e. Identification of each bus, matching the identification on the construction drawings.

f. Conduit, cable, and busway material and sizes, length, and X/R ratios.

C. Short-Circuit Study:

1. Systematically calculate the fault impedance to determine the available short-circuit and ground fault currents at each bus. Incorporate the motor contribution in determining the momentary and interrupting ratings of the protective devices.
2. The study shall be calculated by means of a computer program. Pertinent data and the rationale employed in developing the calculations shall be incorporated in the introductory remarks of the study.
3. Present the data conclusions of the short-circuit study in a table format. Include the following:
   a. Device identification.
   b. Operating voltage.
   c. Protective device.
   d. Device rating.
   e. Calculated short-circuit current.

D. Coordination Curves:

1. Prepare the coordination curves to determine the required settings of protective devices to ensure selective coordination. Graphically illustrate on log-log paper that adequate time separation exists between series devices, including the utility company upstream device. Plot the specific time-current characteristics of each protective device in such a manner that all upstream devices are clearly depicted on one sheet.
2. The following specific information shall also be shown on the coordination curves:
   a. Device identification.
   b. Voltage and current ratio for curves.
   c. 3-phase and 1-phase ANSI damage points for each transformer.
   d. No-damage, melting, and clearing curves for fuses.
   e. Cable damage curves.
   f. Transformer in-rush points.
   g. Maximum short-circuit cutoff point.
3. Develop a table to summarize the settings selected for the protective devices. Include the following in the table:
   a. Device identification.
   b. Relay CT ratios, tap, time dial, and instantaneous pickup.

c. Circuit breaker sensor rating, long-time, short-time, and instantaneous settings, and time bands.
d. Fuse rating and type.
e. Ground fault pickup and time delay.

**1.7 ANALYSIS**

A. Analyze the short-circuit calculations, and highlight any equipment determined to be underrated as specified. Propose approaches to effectively protect the underrated equipment. Provide minor modifications to conform with the study (examples of minor modifications are trip sizes within the same frame, the time-current curve characteristics of induction relays, CT ranges, etc.).
B. After developing the coordination curves, highlight areas lacking coordination. Present a technical evaluation with a discussion of the logical compromises for best coordination.

**1.8 ADJUSTMENTS, SETTINGS AND MODIFICATIONS**

A. Necessary final field adjustments, settings, and minor modifications shall be made to conform with the study without additional cost to the Government.
B. All final circuit breaker and relay settings and fuse sizes shall be made in accordance with the recommendations of the study.

**1.9 ARC FLASH HAZARD STUDY**

A. Arc-Flash Hazard Analysis
1. The analysis shall be performed with the aid of computer software intended for this purpose in order to calculate Arc-Fault Incident Energy (AFIE) levels and flash protection boundary distances.
2. The analysis shall be performed on conjunction with the short-circuit analysis and the time-current coordination analysis.
3. Results of the analysis shall be submitted in tabular form, and shall include device or bus name, bolted fault and arcing fault current levels, flash protection boundary distances, personal-protective equipment classes and AFIE levels.
4. The analysis shall be performed under worst-case arc-flash conditions, and the final report shall describe, when applicable, how these conditions differ from worst-case bolted fault conditions.
5. The analysis shall include recommendations for reducing AFIE levels and enhancing worker safety.

6. The Electrical Contractor shall provide equipment labels in compliance with NEC Section 110 and ANSI Z535.4 to identify AFIE and appropriate Personal Protective Equipment classes.

- - - E N D - - -

# SECTION 26 09 13
# ELECTRICAL POWER MONITORING AND CONTROL

## PART 1 - GENERAL

### 1.1 DESCRIPTION:

A. This section specifies the furnishing, installation and connection of new switchgear circuit breaker trip units communications outputs and switchgear meter communications output to the Building 111 Electrical Monitoring and Control System. It shall include, but not be limited to, remote devices for monitoring, control and protection, device communication interface hardware, intercommunication wiring, ancillary equipment and startup and training services.

B. The electrical power monitoring system shall be an extension of the Eaton/Cutler Hammer Powerxpert system recently installed under the Building 111 Switchboard Replacement Project, Building 70 Standby Generator Project and Building 111 Emergency Generator Controls and Synchronization Project currently under construction.

### 1.2 RELATED WORK:

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that is common to more than one section of Division 26.

B. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits and outlet boxes.

C. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Low voltage cable.

### 1.3 SUBMITTALS

A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
   1. Product Data: For each type of product indicated.
   2. Attach copies of approved Product Data submittals for products that describe power monitoring and control features to illustrate coordination among related equipment and power monitoring and control.

B. Shop Drawings: For power monitoring and control equipment. Include plans, elevations, sections, details, and attachments to other work.
   1. Block Diagram: Show interconnections between components specified in this Section and devices furnished with power distribution system components.

2. Detail equipment assemblies and indicate dimensions, weights, loads, required clearances, components, and location and size of each field connection.
3. Detail shop drawings showing locations of devices and device address, connections, conduit runs, wiring type, etc. shall be submitted by the manufacturers.
4. Installations of devices, wirings, connections, programming, testing, troubleshooting, etc. shall be performed by factory certified technicians.
5. Certifications of the technicians shall be submitted.

C. Software and Firmware Operational Documentation:
1. Software operating and upgrade manuals.
2. Software Backup: On a magnetic media or compact disc, complete with Owner-selected options.
3. Device address list and the set point of each device and operator option, as set in applications software.

D. Any necessary Software licenses and upgrades required by and installed for operating and programming digital and analog devices.

E. Field quality-control test reports. Contractor shall perform complete programming of the system to show all functions, data, graphics, etc…

F. Maintenance and Operation Data: For power monitoring and control units, to include in emergency, operation, and maintenance manuals. In addition to items specified in Section 01 00 00, GENERAL REQUIREMENTS include the following:
1. Operating and applications software documentation.
2. Software licenses.
3. Hard copies of manufacturer's specification sheets, operating specifications, design guides, user's guides for software and hardware, and PDF files on compact disc of the hard-copy submittal.

G. Other Informational Submittals: System installation and setup guides, with data forms to plan and record options and setup decisions.

H. Qualifications: The manufacturer of the equipment required to communicate with the Building 111 Electrical Monitoring and Control System shall guarantee their devices can communicate with the Eaton 800E gateway through a Modbus RTU protocol and have been regularly engaged in the manufacture of the specified remote devices for a period of at least five (5) years and demonstrate that these products have been utilized in satisfactory use in functioning systems for similar applications. The

manufacturer shall have at least five (5) years demonstrated capability in PMS design, installation and start-up.

**1.4 APPLICABLE PUBLICATIONS:**

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata), form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.

B. Institute of Electrical and Electronic Engineers (IEEE):
802.3-02.....CSMA/CD Access Method and Physical Layer Specification
37.90-89.....Standard for Relays and Relay Systems Associated with Electric Power Apparatus

C. FCC Emission Standards (FCC):
15, Part J.....Radio Frequency Devices

D. National Fire Protection Association (NFPA):
70-05.....National Electrical Code (NEC)

**1.5 QUALITY ASSURANCE**

Electrical Components, Devices, and Accessories: Listed and labeled as defined in NFPA 70, Article 100, by a testing agency acceptable to authorities having jurisdiction, and marked for intended use.

**1.6 SOFTWARE SERVICE AGREEMENT**

A. Technical Support: Beginning with Substantial Completion, provide hardware and software support for two years by factory certified technicians. VA personnel shall be trained for a period of 40 hours for operation and maintenance by certified technicians.

B. Upgrade Service: Update software to latest version at Project completion. Install and program software upgrades that become available within two years from date of Substantial Completion. Upgrading software shall include the operating systems. Upgrade shall include new or revised licenses for use of software:
   1. Provide 30-day notice to Owner to allow scheduling and access to system and to allow Owner to upgrade computer equipment if necessary.

**1.7 WARRANTY**

A. The manufacturer shall warrant the equipment supplied hereunder. The warranty shall include:
   1. One (1) year free telephone technical support

2. Warranty on all hardware supplied under this system shall be for one (1) year from start- up or 18 months from shipment, whichever is less.
3. When the Manufacturer provides start-up service on the hardware supplied under this system, the standard warranty shall be for two (2) years from start-up or 30 months from shipment, whichever is less.
4. During the guarantee period, emergency service and routine maintenance calls shall be responded to within a 4-hour period during the hours of 7am-7pm. Between the hours of 7pm-7am, calls shall be responded within an 8-hour period.

**PART 2 - PRODUCTS**

**2.1 FUNCTIONAL DESCRIPTION:**

A. Instrumentation and Recording Devices: For each main circuit breaker, monitor and record load profiles and chart energy consumption patterns using imbedded web pages.
   1. Record the following:
      a. Load factor.
      b. Peak demand periods.
      c. Consumption correlated with facility activities.
      d. Power factor.
         1) Apparent power.
         2) Real power.
         3) Reactive power.
      e. Energy demand.

B. Power Quality Monitoring: Each Circuit breaker electronic trip in switchgears #1 and #2 shall identify power system anomalies and measure, display, and record trends and alarms of the following power quality parameters:
   1. Voltage regulation and unbalance.
   2. Continuous three-phase rms voltage.
   3. Periodic max./min./avg. samples of voltage, amperage and wattage.
   4. Instantaneous values of voltage (line to line and line to neutral), current per phase, 3 phase kVA, & 3 phase kVAr
   4. Harmonics.
   5. Voltage sags and swells.

**2.2 MAIN NETWORK**

A. The main network shall be a shared Ethernet network, utilizing Ethernet TCP/IP protocol communicating at 10/100 Mega Baud. The physical media used to form the network shall be 10Base-T. All required network hubs, routers, switches, media converts, etc will be either existing equipment or provided by the VA information technology department.
B. The network shall have the capability of being connected to a higher-level network by a router or gateway provided by others.
C. The system shall have the capability of being programmed and modified online. It shall not be necessary to shut down any part of the system during programming operations.

**2.3 POWER MONITORS**

A. Separately mounted, permanently installed instrument for power monitoring and control on the main bus of each switchgear line-up:
   1. Enclosure: NEMA 250, Type 1
B. Environmental Conditions: System components shall be capable of withstanding the following environmental conditions without mechanical or electrical damage or degradation of operating capability:
   1. Indoor installation in non-air-conditioned spaces that have environmental controls to maintain ambient conditions of 0 to 122 deg F (minus 18 to plus 50 deg C) dry bulb and 20 to 90 percent relative humidity, non-condensing.
C. RMS Real-Time Measurements:
   1. Current: Each phase, neutral, average of three phases, percent unbalance.
   2. Voltage: Line-to-line each phase, line-to-line average of three phases, line-to-neutral each phase, line-to-neutral average of three phases, line-to-neutral percent unbalance.
   3. Power: Per phase and three-phase total.
   4. Reactive Power: Per phase and three-phase total.
   5. Power Factor: Per phase and three-phase total.
   6. Frequency.
   7. THD: Current and voltage.
   8. Accumulated Energy: Real kWh, reactive kVARh, apparent kVAh (signed/absolute).
   9. Incremental Energy: Real kWh, reactive kVARh, apparent kVAh (signed/absolute).
D. Demand Current Calculations, per Phase, Three-Phase Average and Neutral:

1. Present.
2. Running average.
3. Last completed interval.
4. Peak.

E. Demand Real Power Calculations, Three-Phase Total:
1. Present.
2. Running average.
3. Last completed interval.
4. Predicted.
5. Peak.

F. Demand Reactive Power Calculations, Three-Phase Total:
1. Present.
2. Running average.
3. Last completed interval.
4. Predicted.
5. Peak.

G. Average Power Factor Calculations, Demand Coincident, Three-Phase Total:
1. Last completed interval.
2. Coincident with kW peak.

H. Power Demand Calculations: According to one of the following calculation methods, selectable by the user:
1. Block Interval with Optional Subintervals: Adjustable for 1-minute intervals, from 1 to 60 minutes. User-defined parameters for the following block intervals:
a. Sliding block that calculates demand every second, with intervals less than 15 minutes, and every 15 seconds with an interval between 15 and 60 minutes.
b. Fixed block that calculates demand at end of the interval.
c. Rolling block subinterval that calculates demand at end of each subinterval and displays it at end of the interval.
2. Demand Calculation Initiated by a Synchronization Signal:
a. Signal is a pulse from an external source. Demand period begins with every pulse. Calculation shall be configurable as either a block or rolling block calculation.
b. Signal is a communication signal. Calculation shall be configurable as either a block or rolling block calculation.

I. Sampling:
1. Current and voltage shall be digitally sampled at a rate high enough to provide accuracy to 63rd harmonic of 60-Hz fundamental.

2. Power monitor shall provide continuous sampling at a rate of 256 samples per cycle on all voltage and current channels in the meter.

J. Minimum and Maximum Values: Record monthly minimum and maximum values, including date and time of record. For three-phase measurements, identify phase of recorded value. Record the following parameters:
1. Line-to-line voltage.
2. Line-to-neutral voltage.
3. Current per phase.
4. Line-to-line voltage unbalance.
5. Line-to-neutral voltage unbalance.
6. Power factor.
7. Displacement power factor.
8. Total power.
9. Total reactive power.
10. THD voltage L-L.
11. THD voltage L-N.
12. THD current.
13. Frequency.

K. Harmonic Calculation: Display and record the following:
1. Harmonic magnitudes and angles for each phase voltage and current through 31st harmonic. Current and voltage information for all phases shall be obtained simultaneously from same cycle.
2. Harmonic magnitude reported as a percentage of the fundamental or as a percentage of rms values, as selected by user.

L. Current and Voltage Ratings:
1. Designed for use with current inputs from standard instrument current transformers with 5-A secondary and shall have a metering range of 0-10 A.
2. Withstand ratings shall be not less than 15 A, continuous; 50 A, lasting over 10 seconds, no more frequently than once per hour; 500 A, lasting 1 second, no more frequently than once per hour.
3. Designed for use with voltage inputs from standard instrument potential transformers with a 120-V secondary.

M. Accuracy:
1. Comply with ANSI C12.20, Class 0.5; and IEC 60687, Class 0.5 for revenue meters.
2. Accuracy from Light to Full Rating:
a. Power: Accurate to 0.25 percent of reading, plus 0.025 percent of full scale.

b. Voltage and Current: Accurate to 0.075 percent of reading, plus 0.025 percent of full scale.
c. Power Factor: Plus or minus 0.002, from 0.5 leading to 0.5 lagging.
d. Frequency: Plus or minus 0.01 Hz at 45 to 67 Hz.

N. Waveform Capture:
1. Capture and store steady-state waveforms of voltage and current channels; initiated manually. Each capture shall be for 3 cycles, 256 data points for each cycle, allowing resolution of harmonics to 31st harmonic of basic 60 Hz.
2. Store captured waveforms in internal nonvolatile memory; available for PC display, archiving, and analysis.

O. Input: Two digital input signal(s).
1. Normal mode for on/off signal.
2. Conditional energy signal to control conditional energy accumulation.

P. Outputs:
1. Operated either by user command sent via communication link, or set to operate in response to user-defined alarm or event.
2. Closed in either a momentary or latched mode as defined by user.
3. Each output relay used in a momentary contact mode shall have an independent timer that can be set by user.
4. One digital KY pulse to a user-definable increment of energy measurement. Output ratings shall be up to 120-V ac, 300-V dc, 50 mA, and provide 3500-V rms isolation.
5. Three relay output module(s), providing a load voltage range from 20- to 240-V ac or from 20- to 30-V dc, supporting a load current of 2 A.
6. Output Relay Control:
a. Relay outputs shall operate either by user command sent via communication link or in response to user-defined alarm or event.
b. Normally open and normally closed contacts, field configured to operate as follows:
1) Normal contact closure where contacts change state for as long as signal exists.
2) Latched mode when contacts change state on receipts of a pickup signal; changed state is held until a dropout signal is received.
3) Timed mode when contacts change state on receipt of a pickup signal; changed state is held for a preprogrammed duration.

4) End of power demand interval when relay operates as synchronization pulse for other devices.
5) Energy Pulse Output: Relay pulses quantities used for absolute kWh.
6) Output controlled by multiple alarms using Boolean-type logic.

Q. Onboard Data Logging:
1. Store logged data, alarms, events, and waveforms in 512 KB of onboard nonvolatile memory.
2. Stored Data:
a. Billing Log: User configurable; data shall be recorded every 15 minutes, identified by month, day, and 15-minute interval. Accumulate 24 months of monthly data, 32 days of daily data, and between 2 to 52 days of 15-minute interval data, depending on number of quantities selected.
b. Custom Data Logs: Three user-defined log(s) holding up to 96 parameters. Date and time stamp each entry to the second and include the following user definitions:
1) Schedule interval.
2) Event definition.
3) Configured as "fill-and-hold" or "circular, first-in first-out."
c. Alarm Log: Include time, date, event information, and coincident information for each defined alarm or event.
d. Waveform Log: Store captured waveforms configured as "fill-and-hold" or "circular, first-in first-out."
3. Default values for all logs shall be initially set at factory, with logging to begin on device power up.

R. Control Power: 90- to 457-V ac or 48-Vdc.

S. Communications:
1. Power monitor shall be permanently connected to communicate via Modbus TCP via a 100 Base-T Ethernet.
2. Local plug-in connections shall be for RS-232 and 100 Base-T Ethernet.

T. Display Monitor:
1. All monitored values and trending shall be viewable from the customer LAN network using the meter embedded web pages in addition to the local display.
2. Local Display

a. The local graphical meter display shall utilize a simple “twist and click” navigation control dial to easily navigate the menus, select links to related pages, and to drill down into increasing levels of further details. A “back” key shall be provided for easy navigation to higher level screens. The graphical display shall have the following features:
   1) Backlight LCD remote graphics display with 320 x 240 pixels.
   2) Capable of being mounted o the Meter base unit or remote mounting of display up to 2000 ft away with capability of displaying up to 16 base units or complete Meters.
   3) A set of screens including real time data, trend lots, waveform views and ITIC plot.
   4) Allow basic device setup and password protections resets.
   5) An audible alarm to annunciate alarm conditions.
b. The WEB server shall provide the user with remote WED access to all the metered, trend and waveform information. The WEB server shall include real time monitored information in both numeric and graphical visual formats.
c. The meter shall be capable of providing the graphical display of the following Main Meter Menu Screens:
   1) Meter Screen providing:
      a) Volts: L-L and L-N, and average
      b) Frequency
      c) Current and average phase A, B and C, N and G
   2) Power Screen providing:
      a) Energy
      b) Demand
      c) Power Factor
   3) Quality Screen providing:
      a) Total Harmonic Distortion (THD) of volts and current
      b) Flicker
      c) Percent Nines (9s) reliability
   4) Events screen providing:
      a) Latest events
      b) Enabled Triggers
      c) Historical Events
      d) Calendar view of Events
      e) Events Timeline screen
   5) Set-up screen providing:

a) View set-up
b) Edit set-up
c) Login
d) Logout

3. Reset: Allow reset of the following parameters at the display:
   a. Peak demand current.
   b. Peak demand power (kW) and peak demand apparent power (kVA).
   c. Energy (MWh) and reactive energy (MVARh).

**2.4 LOW-VOLTAGE WIRING**

A. Low-Voltage Control Cable: Multiple conductor, color-coded, No. 16 AWG copper, minimum.
   1. Sheath: PVC; except in plenum-type spaces, use sheath listed for plenums.
   2. Ordinary Switching Circuits: Three conductors, unless otherwise indicated.
   3. Switching Circuits with Pilot Lights or Locator Feature: Five conductors, unless otherwise indicated.
   4. Wires shall be all copper, stranded, unshielded twisted pairs. All wire shall be in conduit.

**PART 3 - EXECUTION**

**3.1 INSTALLATION:**

A. Comply with NECA 1.
B. Wiring Method: Install wiring in raceway and cable tray except within consoles, cabinets, desks, and counters. Conceal raceway and wiring except in unfinished spaces.
C. Wiring Method: Install wiring in raceway and cable tray except within consoles, cabinets, desks, and counters and except in accessible ceiling spaces and in gypsum board partitions where unenclosed wiring method may be used. Use NRTL-listed plenum cable in environmental air spaces, including plenum ceilings. Conceal raceway and cables except in unfinished spaces.
D. Identify components and power and control wiring according to Section 26 05 11 REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
E. Label each power monitoring and control module with a unique designation.
F. Grounding: Comply with IEEE 1100, "Power and Grounding Sensitive Electronic Equipment."
G. All cables shall be installed in conduits.

H. The contractor shall obtain a list of IP addresses available for each meter from the VA information technology department and program each meter with the proper IP address.
I. Coordinate the tie points of each gateway with the automatic transfer switch and engine generator set manufacturers.
J. Verify the point of connection / termination to the building Ethernet with the VA Information Technology Department.

**3.3 FIELD QUALITY CONTROL**

A. Perform tests and inspections and prepare test reports:
   1. Manufacturer's Field Service: Engage a factory-authorized service representative to inspect components, assemblies, and equipment installations, including connections, and to assist in testing.
B. Tests and Inspections:
   1. Electrical Tests: Use caution when testing devices containing solid-state components.
   2. Continuity tests of circuits.
   3. Operational Tests: Set and operate controls at workstation and at monitored and controlled devices to demonstrate their functions and capabilities. Use a methodical sequence that cues and reproduces actual operating functions as recommended by manufacturer. Submit sequences for approval. Note response to each test command and operation. Note time intervals between initiation of alarm conditions and registration of alarms at central-processing workstation.
      a. Coordinate testing required by this Section with that required by Sections specifying equipment being monitored and controlled.
      b. Test LANs according to requirements in Section 27 15 00, Communications Horizontal Cabling.
      c. System components with battery backup shall be operated on battery power for a period of not less than 10 percent of calculated battery operating time.
      d. Verify accuracy of graphic screens and icons.
      e. Metering Test: Load feeders, measure loads on feeder conductor with an rms reading clamp-on ammeter, and simultaneously read indicated current on the same phase at central-processing workstation. Record and compare values measured at the two locations. Resolve discrepancies greater than 5 percent and record resolution method and results.

f. Record metered values, control settings, operations, cues, time intervals, and functional observations and submit test reports printed by workstation printer.

C. Correct deficiencies, make necessary adjustments, and retest. Verify that specified requirements are met.

D. Test Labeling: After satisfactory completion of tests and inspections, apply a label to tested components indicating test results, date, and responsible agency and representative.

E. Reports: Written reports of tests and observations. Record defective materials and workmanship and unsatisfactory test results. Record repairs and adjustments.

F. Remove and replace malfunctioning devices and circuits and retest as specified above.

**3.4 DEMONSTRATION:**

A. Engage a factory-authorized service representative to train Owner's maintenance personnel to adjust, operate, and maintain systems. Refer to Section 01 00 00,"GENERAL REQUIREMENTS.

1. Train Owner's management and maintenance personnel in interpreting and using monitoring displays and in configuring and using software and reports. Include troubleshooting, servicing, adjusting, and maintaining equipment. Provide a minimum of 40 hours' training.
2. Training Aid: Use approved final versions of software and maintenance manuals as training aids.

3. Test and troubleshoot the system.

- - - E N D - - -

# SECTION 26 12 19
# SUBSTATION STYLE LIQUID-FILLED, MEDIUM-VOLTAGE TRANSFORMERS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of substation style transformers.

B. Sub-Station transformers shall be complete, outdoor type, continuous duty, integral assembly, grounded, tamper-resistant, and weatherproof with liquid immersed transformers.

### 1.2 RELATED WORK

A. Section 09 06 00, SCHEDULE FOR FINISHES: Finishes for electrical equipment.

C. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.

D. Section 26 05 13, MEDIUM-VOLTAGE CABLES: Medium-voltage cables.

E. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground currents.

G. Section 26 05 71, ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY: Short-circuit and coordination study.

### 1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

### 1.4 FACTORY TESTS

Transformers shall be thoroughly tested at the factory to ensure that there are no electrical or mechanical defects. Tests shall be conducted as per UL and ANSI Standards. Factory tests shall be certified. The following tests shall be performed:

1. Perform insulation-resistance tests, winding-to-winding and each winding-to-ground.
2. Perform turns-ratio tests at all tap positions.

### 1.5 SUBMITTALS

A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

B. Shop Drawings:

1. Clearly present sufficient information to determine compliance with drawings and specifications.
2. Submit physical dimensions in floor plan and elevation views. Dimensions shall include transformer throats and air terminal chambers.
2. Include electrical ratings, nameplate data, impedance, outline drawing with dimensions and front, top, and side views, weight, mounting details, decibel rating, termination information, temperature rise, no-load and full-load losses, regulation, overcurrent protection, connection diagrams, and accessories.
3. Complete nameplate data, including manufacturer’s name and catalog number.

C. Manuals:
1. When submitting the shop drawings, submit companion copies of complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.
   a. Identify terminals on wiring diagrams to facilitate installation, maintenance, and operation.
   b. Indicate on wiring diagrams the internal wiring for each piece of equipment and interconnections between the pieces of equipment.
   c. Approvals will be based on complete submissions of manuals, together with shop drawings.
2. Two weeks prior to the final inspection, submit four copies of the final up-dated maintenance and operation manuals to the Resident Engineer.
   a. Update the manual to include any information necessitated by shop drawing approval.
   b. Show all terminal identification.
   c. Include information for testing, repair, trouble-shooting, assembly, disassembly, and recommended maintenance intervals.
   d. Provide a replacement parts list with current prices. Include a list of recommended spare parts, tools, and instruments for testing and maintenance purposes.
   e. Furnish manuals in loose-leaf binder or manufacturer’s standard binder.

D. Certifications:
1. Two weeks prior to the final inspection, submit four copies of the following certifications to the Resident Engineer:

2. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
3. Certification by the contractor that the materials have been properly installed, connected, and tested.

**1.6 APPLICABLE PUBLICATIONS**

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American Concrete Institute (ACI):
318-05.....Building Code Requirements for Structural Concrete

C. American National Standards Institute (ANSI):
C37.47-00.....High Voltage Current-Limiting Type Distribution Class Fuses and Fuse Disconnecting Switches
C57.12.00-00.....General Requirements for Liquid-Immersed Distribution, Power and Regulating Transformers
C57.12.25-90.....Transformers-Pad-Mounted, Compartmental-Type, Self Cooled, Single-Phase Distribution Transformers with Separable Insulated High Voltage Connectors; High Voltage, 34500 Grd Y/19920 Volts and Below; Low-Voltage 240/120 Volts; 167 kVA and Smaller Requirements
C57.12.28-05.....Pad-Mounted Equipment Enclosure Integrity
C57.12.29-99.....Pad-Mounted Equipment – Enclosure Integrity for Coastal Environments
C57.12.34-04.....Pad-Mounted, Compartmental-Type, Self Cooled, Three-Phase Distribution Transformers, 2500kVA and Smaller – High Voltage 34500 Grd Y/19920 Volts and Below; Low-Voltage 480 Volts and Below

D. American Society for Testing and Materials (ASTM):
D3487-08.....Standard Specification for Mineral Insulating Oil Used in Electrical Apparatus

E. Institute of Electrical and Electronic Engineers (IEEE):
C2-07.....National Electrical Safety Code
C57.12.90.....Standard Test Code for Liquid Immersed Distribution, Power and Regulating Transformers and IEEE Guide for Short Circuit Testing of Distribution and Power Transformers

C62.11-99.....Metal-Oxide Surge Arresters for Alternating Current Power Circuits

48-09.....Test Procedures and Requirements for Alternating Current Cable Terminations Used on Shielded Cables Having Laminated Insulation Rated 2.5kV Through 765kV or Extruded Insulation Rated 2.5kV Through 500kV

386-06.....Standard for Separable Insulated Connector Systems for Power Distribution Systems Above 600V

592-96.....Standard for Exposed Semiconducting Shields on High Voltage Cable Joints and Separable Insulated Connectors

F. National Electrical Manufacturers Association (NEMA):

C57.12.26-87.....Pad-Mounted, Compartmental-Type, Self-Cooled, Three-Phase Distribution Transformers for Use with Separable Insulated High-Voltage Connectors, High-Voltage, 34500 Grd Y/19920 Volts and Below; 2500 kVA and Smaller

LA1-92.....Surge Arresters

TP1-02.....Guide for Determining Energy Efficiency for Distribution Transformers

TR1-00.....Transformers, Regulators, and Reactors

G. National Fire Protection Association (NFPA):

70-08.....National Electrical Code (NEC)

H. Underwriters Laboratories Inc. (UL):

467-07.....Grounding and Bonding Equipment

UL XPLH.....Guide for Transformers, Distribution, Liquid Filled, Type over 600V

**PART 2 - PRODUCTS**

**2.1 EQUIPMENT, GENERAL**

A. Equipment shall be in accordance with ANSI, ASTM, IEEE, NEMA, NFPA, UL, as shown on the drawings, and as specified herein. The transformer shall be assembled as an integral unit by a single manufacturer.

B. Ratings shall not be less than shown on the drawings.

C. Provide transformers designed to withstand the mechanical stresses caused by rough handling during shipment in addition to the electrical and mechanical stresses that may occur during operation.

D. Completely fabricate transformers at the factory so that only the external cable connections are required at the job site.

E. Thoroughly clean, phosphatize, and finish all the metal surfaces at the factory with a rust-resistant primer and dark green enamel finish coat, except where a different color is specified in Section 09 06 00, SCHEDULE FOR FINISHES. All surfaces of the unit that will be in contact with the concrete pad shall be treated with corrosion-resistant compounds and epoxy resin or a rubberized sealing compound.

**2.2 CONSTRUCTION**

A. Description

1. Three phase oil insulated, air cooled substation style transformer with side wall termination pads enclosed in air terminal cabinets. The termination pad shall be drilled to accommodate two-hole cable termination lugs.

B. Ratings

Ambient air cooled ratings

500 kVA at 55Deg C rise operation

Voltage: 13.2 kV primary; 480Y/277 volts secondary.

BIL: 95kV

Connections: Delta primary - Wye secondary.

Primary winding taps: four 2-1/2% - two above and two below rated voltage

Impedance:

Transformers rated above 500 kVA: 5.3% to 6.6%

55 Deg C at the base rating of 500 kVA.

C. Dimensions:

1. The dimensions of the footprint scaled off the floor plan drawing shall be assumed to be the maximum allowable footprint dimensions. There is flexibility in the height of the transformer to allow for internally mounted accessories or increased radiator area.

D. Sound Levels:

1. Isolate core and coil from enclosure using vibration absorbing mounts designed specifically to reduce 120 HZ and multiple harmonic sound. Provide maximum sound levels as follows:

   500 KVA @ 62 DBA Average Sound Pressure Level a 1 meter.

E. Ground core and coil assembly to enclosure by means of a visible flexible copper grounding strap.

**2.3 TRANSFORMER FLUID**

A. The dielectric coolant shall be listed less-flammable fluid meeting the requirements of National Code Section 450-23, including a minimum fire point of 300°C. The fluid shall be biodegradable, non-toxic, and non-bioaccumulating. The fluid shall be Factory Mutual Approved and UL Classified, Cooper Envirotemp FR3 fluid, ABB BIOTEMP fluid or equal.

**2.4 TANK, CORE AND TERMINAL COMPARTMENTS**

A. The core and coil shall be vacuum processed to ensure maximum penetration of insulating fluid into the coil insulation system. While under vacuum, the windings shall be energized to heat the coils and drive out moisture, and the transformer will be filled with preheated filtered degassed insulating fluid.

B. The core shall be manufactured from burr-free, grain-oriented silicon steel and shall be precisely stacked to eliminate gaps. The coil shall be insulated with B-stage, epoxy coated, diamond pattern, insulating paper, which shall be thermally cured under pressure to ensure proper bonding of conductor and paper. The winding shall be of aluminum or copper construction.

C. Panel type radiators or corrugate type cooling is welded directly to the tank when additional cooling is required. Provide valved bolt-on radiators allowing removal of radiator for transport into the electrical switchgear room without modification to building openings.

D. The tank must be welded using precision cut, cold-rolled steel plate and equipped with extra-heavy duty, welded-in-place lifting lugs and jacking pads. The tank base must be designed to allow skidding or rolling in any direction.

E. The transformer shall be of sealed tank construction of sufficient strength to withstand a pressure of 7 psig without permanent distortion, and 15 psig without rupturing.

F. The tank shall include a pressure relief device as a means to relieve tank pressure in excess of pressure resulting from normal operation. The transformer shall be shipped with a gasketed and bolted cover over the top opening for the pressure relief device.

G. The tank shall be cleaned with an alkaline cleaning agent to remove grease and oil. An iron phosphate coating shall then be chemically bonded to the metal to assure coating adhesion and retard corrosion. The tank shall be primed with an electro-deposited epoxy coating to

provide a barrier against moisture, salt, and corrosives. The top-coat shall be a liquid polyurethane coating to seal and add ultraviolet protection. The tank coating shall meet all performance requirements in ANSI C57.12.28 – latest revision.

H. Top entry Air Terminal Chamber – Secondary Connections:
   1. A full height top entry air terminal chamber with a weather-resistant metal enclosure around sidewall mounted bushings that extends downward to the transformer base level and upward approximately 10 inches above the bushing centerline. A double padlocked hinged door shall be provided.

I. Terminal Chamber – Primary Connection:
   1. Extending through throat flange couple with bus or cable to the medium voltage switchgear bus transition section.
   2. Coordinate the medium voltage connection placement with the switchgear manufacturer.

J. Nameplate: Include transformer connection data, ratings, and capacity based on rated allowable temperature rise. Provide nameplate indicating minimum code ventilation clearance per NEC Code Article 450-9.

K. Primary Terminations: Porcelain insulator with two bolt pad type connector.

L. Secondary Terminations: Multi-hole NEMA spade type connector.

M. The transformer shall be shipped with a nitrogen blanket in the air space above the transformer oil level.

**2.5 TRANSFORMER EFFICIENCY**

A. Transformers shall meet the minimum energy efficiency values per NEMA TP1:

| KVA | (%) |
|---|---|
| 500 | 99.3 |

**2.6 TRANSFORMER ACCESSORIES**

The following accessories shall be provided:

De-energized Tap Changer
1.0” Upper Fill Plug with Filter Press Connection
1.0” Drain/Sampling Valve
Removal - Automatic Pressure Relief Device
Lifting Lugs (4)

Liquid Level Gauge
Dial Type Thermometer Indicating Oil Temperature
Pressure/Vacuum Gauge
SS Ground Pads (4)
Bleeder Valve (Std on ≥ 2500kva)
Nitrogen Blanket with Bleeder and Purge Valve
Touch-up Paint
Detachable Radiators with Valved connections if required due to physical size limitations.

**2.7 LOW-VOLTAGE EQUIPMENT**

A. The low-voltage leads shall be brought out of the tank by epoxy pressure tight bushings, and shall be standard arrangement per ANSI.
B. Tin-plate the low-voltage neutral terminal and isolate from the transformer tank. Provide a removable ground strap sized in accordance with the NEC and connect between the neutral and ground pad.

**PART 3 – EXECUTION**

**3.1 EXAMINATION**

A. Verify field measurements are as shown on Drawings.
B. Verify that required utilities are available, in proper location and ready for use.
C. Beginning of installation means installer accepts conditions.

**3.2 INSTALLATION**

A. Install transformers as shown on the drawings, in accordance with the NEC, and as recommended by the manufacturer.
B. GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS, to maintain a maximum resistance of 5 ohms to ground.
   1. Independently connect cable shield grounding devices ground wires to ground with sufficient slack to permit elbow connector operation. Connect elbow connectors with a No. 14 AWG bare copper drain wire from its grounding eye to the related cable shield grounding device ground wire. Do not connect drain wires in any manner that could permit circulating currents, or cable fault currents, to pass through them.

A. Install to meet nameplate clearances.
B. Set transformer plumb and level.
C. Connect transformer to adjacent equipment using new cables on the primary side and on the secondary side.

D. After the transformer is place set and prior to testing and energization, a qualified testing and maintenance contractor with IETA certification add the necessary additional transformer fluid, purge air from the transformer tank and provide a nitrogen blanket in the air space between the top of the transformer and the top of the fluid level.

E. The contractor shall provide filter media on all ventilated openings during the construction stage. The contractor shall remove the filter media and thoroughly clean and vacuum the transformer upon completion of the project.

F. Install safety labels to NEMA 260.

**3.3 ACCEPTANCE CHECKS AND TESTS**

A. Perform tests in accordance with the manufacturer's recommendations. Include the following visual and mechanical inspections.

B. Transformers:

1. Compare equipment nameplate data with specifications and approved shop drawings.
2. Inspect physical and mechanical condition. Check for damaged or cracked bushings and liquid leaks.
3. Verify that control and alarm settings on temperature indicators are as specified.
4. Inspect all field-installed bolted electrical connections, using the calibrated torque-wrench method to verify tightness of accessible bolted electrical connections.
5. Verify correct liquid level in transformer tank.
6. Perform specific inspections and mechanical tests as recommended by manufacturer.
7. Verify correct equipment grounding per the requirements of Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.
8. Verify the presence of transformer surge arresters, if provided.
9. Verify that the tap-changer is set at specified ratio.
10. Verify and/or connect transformer "XO" to ground, load side of "WYE" systems.
11. Provide an oil analysis report to be performed by a certified testing laboratory to create a baseline for comparison of future test for percentage of soluble water, PH of oil, Fluid surface tension, fluid color and combustible gas content. The test parameters shall be received as part of the acceptance testing procedure.

**3.4 ADJUSTING**

A. Measure secondary voltage phase-to-phase and phase-to-ground after final energization and prior to loading.

B. Adjust primary taps so that secondary voltage is within 2 percent of rated voltage.

**3.5 OBSERVATION REQUIREMENTS**

A. Confirm on a daily basis the integrity of the transformer tank, tank penetrations and gaskets by visually monitoring for leaks.

B. Check the transformer pressure and vacuum gauges on a daily basis for any change in value which could indicate a leak or air intrusion into the tank.

C. Check temperature gauges to detect any deviation from a normal operating condition.

D. Report any unusual sound occurrences that could be attributed to a corona condition.

E. Prepare a daily report so any changes are documented on a day to day basis.

F. The contractor shall be responsible for these observations for a 10 day period after transformer energization.

G. The range of values for acceptable operation shall be confirmed with the manufacturer.

**3.3 FOLLOW-UP VERIFICATION**

A. Upon completion of acceptance checks, settings, and tests, the contractor shall demonstrate that the transformers are in good operating condition and properly performing the intended function..

**3.4 INSTRUCTIONS**

A. The contractor shall instruct maintenance personnel, for not less than one 2-hour period, on the maintenance and operation of the equipment on the date requested by the Resident Engineer

- - - E N D - - -

# SECTION 26 18 41
# MEDIUM-VOLTAGE SWITCHES

## PART 1 - GENERAL

### 1.1 DESCRIPTION

This section specifies the furnishing, installation and connection of medium voltage switches, fusible, outdoor type and weatherproof.

### 1.2 RELATED WORK

A. Section 09 06 00, SCHEDULE FOR FINISHES: Switch finishes.

B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more that one section of Division 26.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.

D. Section 26 05 71, ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY: Short circuit and coordination study.

### 1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

### 1.4 FACTORY TESTS

A. Medium voltage switches shall be thoroughly tested at the factory to assure that there are no electrical or mechanical defects. Tests shall be conducted as per UL and ANSI Standards. Factory tests shall be certified. The following tests shall be performed:

1. Verify that fuse sizes and types are in accordance with drawings and coordination study.
2. Verify tightness of bolted electrical connections by calibrated torque-wrench method in accordance with manufacturer’s published data.
3. Verify operation and sequencing of interlocking systems.
4. Verify correct phase barrier installation.
5. Verify correct operation of all indicating and control devices.
6. Verify appropriate lubrication on moving current-carrying parts and on moving and sliding surfaces.
7. Exercise all active components.

8. Perform insulation-resistance tests on each pole, phase-to-phase and phase-to-ground with switch closed, and across each open pole. Apply voltage in accordance with manufacturer’s published data.
9. Perform a dielectric withstand voltage test on each pole with switch closed. Test each pole-to-ground with all other poles grounded. Test voltage shall be in accordance with manufacturer’s published data.

B. Furnish four (4) copies of certified manufacturer's factory test reports to the Resident Engineer prior to shipment of the switches to ensure that the switches have been successfully tested as specified.

**1.5 SUBMITTALS**

A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

B. Shop Drawings:
1. Provide detailed drawings with sufficient information, clearly presented, to determine compliance with drawings and specifications.
2. Provide information such as complete electrical ratings, dimensions and approximate design weights, mounting details, materials, required clearances, cable terminations, fuse sizes and class, interrupting ratings, wiring and connection diagrams, front, side and rear elevations, sectional views, safety features, accessories and nameplate data.

C. Manuals:
1. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals including technical data sheets, wiring diagrams and information for ordering replacement parts.
2. Two weeks prior to the project final inspection, submit four copies of the final updated maintenance and operating manuals to the Resident Engineer. (Update the manuals to include any revisions necessitated by shop drawing approval).

D. Certification: Two weeks prior to final inspection, submit four copies of the following to the Resident Engineer:
1. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
2. Certification by the Contractor that the materials have been properly installed, adjusted, and tested.

**1.6 APPLICABLE PUBLICATIONS**

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American National Standards Institute (ANSI):

C37.47.....Medium voltage Current-Limiting Type Distribution Class Fuses and Fuse Disconnect Switches

C37.58.....Conformance Test Procedures for Indoor AC Medium-Voltage Switches for Use in Metal-Enclosed Switchgear

C. Institute of Electrical and Electronics Engineers (IEEE):

C37.20.3.....Metal-Enclosed Interrupter Switchgear

C37.48.....Guide for Application, Operation and Maintenance of Medium voltage Fuses, Distribution Enclosed Single Pole Air Switches, Fuse Disconnecting Switches and Accessories

D. National Electrical Manufacturers Association (NEMA):

C37.22.....Preferred Ratings and Required Capabilities for Indoor AC Medium-Voltage Switches Used in Metal-Enclosed Switchgear

SG 6.....Power Switching Equipment

E. National Fire Protection Association (NFPA):

70.....National Electrical Code (NEC)

**PART 2 - PRODUCTS**

**2.1 MEDIUM VOLTAGE AIR BREAK SWITCHES**

A. Shall be in accordance with ANSI, IEEE, NEMA, NFPA, as shown on the drawings and have the following features:

1. Deadfront air break, three-pole gang-operated, rated load interrupter type, with manual stored energy operator.
2. Copper blades.
3. A separate door for the fuse section. A mechanical interlock shall prevent opening the door unless the switch blades are open, and prevent closing the switch if the door is open.
4. Phase barriers for the full length of the blades and fuses for each pole.
5. Protective shield to cover the cable connections on the line terminals.

6. Quick-make, quick-break, stored energy type operation mechanism. The mechanism shall enable the switch to close against a fault equal to the momentary rating of the switch without affecting its continuous current carrying or load interrupting ability.
7. External manual operating handle with lock-open padlocking provisions.
8. When the switches are open, the fuses shall be de-energized.
9. Current limiting, power type fuses.
11. Enclosures:
    a. NEMA type 3R, outdoor and weatherproof.
    b. Doors:
        1) Concealed or semi-concealed hinges shall be used to attach doors. Weld hinges to the enclosure and door.
        2) Mechanically interlocked to prevent opening unless the switch blades are open.
        3) Three point door locking mechanism, suitable handles and padlocking provisions.
        4) Safety-glass window for viewing the switch blades.
        5) Door stops for the open position.
    c. Finish:
        1) All metal surfaces shall be thoroughly cleaned, phosphatized, primed and painted at the factory.
        2) Final finish shall be enamel, lacquer or powder coating. Enamel and powder coatings shall be oven baked. Color shall be light gray.

B. Minimum switch fault close and momentary current rating shall be 60kA with a 2 second current rating of 38kA.

C. Surge Arresters: 12 kV/ 10.2kV MCOV Distribution class, one for each phase, mounted on the load size of switch.

**2.2 NAMEPLATES AND MIMIC BUS**

A. Nameplates: For Normal Power system, provide laminated black phenolic resin with white core with 1/2 inch [12mm] engraved lettered nameplates next to each switch. For Essential Electrical System, provide laminated red phenolic resin with white core with 1/2 inch [12mm] engraved lettered nameplates next to each switch. Nameplates shall indicate equipment served, spaces, or spares in accordance with one line diagram shown on drawings. Nameplates shall be mounted with plated screws on

front of switches. Mounting nameplates only with adhesive is not acceptable.

B. Mimic Bus: Provide an approved mimic bus on front of each switch assembly. Color shall be black for the Normal Power system and red for the Essential Electrical System, either factory-painted plastic or metal strips. Plastic tape shall not be used. Use symbols similar to one line diagram shown on drawings. Plastic or metal strips shall be mounted with plated screws.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Install the switches in accordance with the NEC, manufacturer's instructions and recommendations and as shown on the drawings.

B. Anchor the units with rustproof bolts, nuts and washers not less than 1/2-inch [13mm] diameter.

C. Exterior Location. Mount switch on existing concrete slab.

**3.2 ACCEPTANCE CHECKS AND TESTS**

A. Perform in accordance with the manufacturer's recommendations. Include the following visual and mechanical inspections:

1. Compare equipment nameplate data with specifications and approved shop drawings.
2. Inspect physical and mechanical condition.
3. Confirm correct application of manufacturer's recommended lubricants.
4. Clean switches.
5. Verify appropriate anchorage and required area clearances.
6. Verify appropriate equipment grounding.
7. Verify correct blade alignment, blade penetration, travel stops, and mechanical operation.
9. Inspect all field-installed bolted electrical connections, verifying tightness of accessible bolted electrical connections by calibrated torque-wrench method, or performing thermographic survey after energization under load.
10. Exercise all active components.
11. Test interlocking systems for correct operation and sequencing.
12. Inspect all indicating devices for correct operation.

**3.3 FOLLOW-UP VERIFICATION**

Upon completion of acceptance checks, settings, and tests, the Contractor shall show by demonstration in service that switches are in good operating condition and properly performing the intended function.

**3.4 SPARE PARTS**

Two weeks prior to the final inspection, provide one (1) set of spare fuses for each fused switch installed on this project.

**3.5 INSTRUCTION**

Furnish the services of a factory certified instructor for one 4 hour period for instructing personnel in the operation and maintenance of the switchgear and related equipment on the date requested by the Resident Engineer.

- - - E N D - - -

# SECTION 26 22 00
# LOW-VOLTAGE TRANSFORMERS

## PART 1 – GENERAL

### 1.1 DESCRIPTION

This section specifies the furnishing, installation, and connection of dry-type general-purpose transformers.

### 1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items common to more than one section of Division 26.

B. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits and outlet boxes.

### 1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

### 1.4 SUBMITTALS

A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

B. Shop Drawings:

1. Clearly present sufficient information to determine compliance with drawings and specifications.
2. Include electrical ratings, impedance, dimensions, weight, mounting details, decibel rating, terminations, temperature rise, no load and full load losses, and connection diagrams.
3. Complete nameplate data, including manufacturer’s name and catalog number.

C. Manuals:

1. When submitting the shop drawings, submit companion copies of complete maintenance and operating manuals, including technical data sheets and wiring diagrams.
2. If changes have been made to the maintenance and operating manuals originally submitted, then submit four copies of the updated

maintenance and operating manuals to the Resident Engineer two weeks prior to final inspection.

D. Certifications: Two weeks prior to the final inspection, submit four copies of the following to the Resident Engineer:
   1. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
   2. Certification by the contractor that the equipment has been properly installed and tested.

**1.4 APPLICABLE PUBLICATIONS**

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. National Fire Protection Association (NFPA):
   70-08.....National Electrical Code (NEC)

C. National Electrical Manufacturers Association (NEMA):
   ST20-92.....Dry-Type Transformers for General Applications
   TP1-02.....Guide for Determining Energy Efficiency for Distribution Transformers
   TR1-00.....Transformers, Regulators, and Reactors

**PART 2 - PRODUCTS**

**2.1 GENERAL PURPOSE DRY-TYPE TRANSFORMERS**

A. Unless otherwise specified, dry-type transformers shall be in accordance with NEMA, NEC, and as shown on the drawings. Transformers shall be UL-listed and labeled.

B. Dry-type transformers shall have the following features:
   1. Transformers shall be self-cooled by natural convection, isolating windings, indoor dry-type. Autotransformers will not be accepted.
   2. Rating and winding connections shall be as shown on the drawings.
   3. Transformers shall have aluminum windings.
   4. Ratings shown on the drawings are for continuous duty without the use of cooling fans.
   5. Insulation systems:
      a. Transformers 30 kVA and larger: UL rated 220° C system with an average maximum rise by resistance of 150 ° C in a maximum ambient of 40 ° C.
      b. Transformers below 30 kVA: Same as for 30 kVA and larger or UL rated 185 ° C system with an average maximum rise by resistance of 115 ° C in a maximum ambient of 40 ° C.

6. Core and coil assemblies:
   a. Rigidly braced to withstand the stresses caused by short-circuit currents and rough handling during shipment.
   b. Cores shall be grain-oriented, non-aging, and silicon steel.
   c. Coils shall be continuous windings without splices except for taps.
   d. Coil loss and core loss shall be minimized for efficient operation.
   e. Primary and secondary tap connections shall be brazed or pressure type.
   f. Coil windings shall have end filters or tie-downs for maximum strength.
7. Certified sound levels determined in accordance with NEMA, shall not exceed the following:

| Transformer Rating | Sound Level Rating |
|---|---|
| 0 - 9 KVA | 40 dB |
| 10 - 50 KVA | 45 dB |
| 51 - 150 KVA | 50 dB |
| 151 - 300 KVA | 55 dB |
| 301 - 500 KVA | 60 dB |

8. If not shown on drawings, nominal impedance shall be as permitted by NEMA.
9. Single phase transformers rated 15 kVA through 25 kVA shall have two 5% full capacity taps below normal rated primary voltage. All transformers rated 30 kVA and larger shall have two 2.5% full capacity taps above, and four 2.5% full capacity taps below normal rated primary voltage.
10. Core assemblies shall be grounded to their enclosures with adequate flexible ground straps.
11. Enclosures:
    a. Comprised of not less than code gauge steel.
    b. Outdoor enclosures shall be NEMA 3R.
    c. Temperature rise at hottest spot shall conform to NEMA Standards, and shall not bake and peel off the enclosure paint after the transformer has been placed in service.

d. Ventilation openings shall prevent accidental access to live components.
e. The enclosure at the factory shall be thoroughly cleaned and painted with manufacturer's prime coat and standard finish.

12. Standard NEMA features and accessories, including ground pad, lifting provisions, and nameplate with the wiring diagram and sound level indicated on it.
13. Dimensions and configurations shall conform to the spaces designated for their installations.
14. Transformers shall meet the minimum energy efficiency values per NEMA TP1 as listed below:

| kVA Rating | Output efficiency (%) |
|---|---|
| 15 | 97 |
| 30 | 97.5 |
| 45 | 97.7 |
| 75 | 98 |
| 112.5 | 98.2 |
| 150 | 98.3 |
| 225 | 98.5 |
| 300 | 98.6 |
| 500 | 98.7 |
| 750 | 98.8 |

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Installation of transformers shall be in accordance with the NEC, as recommended by the equipment manufacturer and as shown on the drawings.
B. Install transformers with manufacturer's recommended clearance from wall and adjacent equipment for air circulation. Minimum clearance shall be 6 in [150 mm].
C. Install transformers on vibration pads designed to suppress transformer noise and vibrations.
D. Use flexible metal conduit to enclose the conductors from the transformer to the raceway systems.

**3.2 ACCEPTANCE CHECKS AND TESTS**

Perform tests in accordance with the manufacturer's recommendations. Include the following visual and mechanical inspections.

1. Compare equipment nameplate data with specifications and approved shop drawings.
2. Inspect physical and mechanical condition.
3. Inspect all field-installed bolted electrical connections, using the calibrated torque-wrench method to verify tightness of accessible bolted electrical connections.
4. Perform specific inspections and mechanical tests as recommended by manufacturer.
5. Verify correct equipment grounding.
6. Verify proper secondary phase-to-phase and phase-to-neutral voltage after energization and prior to connection to loads.

**3.3 FOLLOW-UP VERIFICATION**

Upon completion of acceptance checks, settings, and tests, the contractor shall demonstrate that the transformers are in good operating condition and properly performing the intended function.

- - - E N D - - -

# SECTION 26 24 16
# PANELBOARDS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

This section specifies the furnishing, installation, and connection of panelboards.

### 1.2 RELATED WORK

A. Section 09 91 00, PAINTING: Identification and painting of panelboards.

B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one Section of Division 26.

C. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.

D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

E. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits and outlet boxes.

F. Section 26 05 71, ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY: Requirements for installing the over-current protective devices to ensure proper equipment and personnel protection.//

### 1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

### 1.4 SUBMITTALS

A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

B. Shop Drawings:

1. Sufficient information shall be clearly presented to determine compliance with drawings and specifications.
2. Include electrical ratings, dimensions, mounting details, materials, wiring diagrams, accessories, and weights of equipment. Complete nameplate data, including manufacturer’s name and catalog number.

C. Manuals:
   1. When submitting the shop drawings, submit companion copies of complete maintenance and operating manuals, including technical data sheets and wiring diagrams.
   2. If changes have been made to the maintenance and operating manuals that were originally submitted, then submit four copies of updated maintenance and operating manuals to the Resident Engineer two weeks prior to final inspection.
D. Certification: Two weeks prior to final inspection, submit four copies of the following to the Resident Engineer:
   1. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
   2. Certification by the contractor that the materials have been properly installed, connected, and tested.

**1.5 APPLICABLE PUBLICATIONS**

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
B. National Electrical Manufacturers Association (NEMA):
   PB-1-06.....Panelboards
   250-08.....Enclosures for Electrical Equipment (1000V Maximum)
C. National Fire Protection Association (NFPA):
   70-2005 .....National Electrical Code (NEC)
   70E-2004.....Standard for Electrical Life Safety in the Workplace
D. Underwriters Laboratories, Inc. (UL):
   50-95.....Enclosures for Electrical Equipment
   67-09.....Panelboards
   489-09.....Molded Case Circuit Breakers and Circuit Breaker Enclosures

**PART 2 - PRODUCTS**

**2.1 PANELBOARDS**

A. Panelboards shall be in accordance with UL, NEMA, NEC, and as shown on the drawings.

B. Panelboards shall be standard manufactured products.

C. All panelboards shall be hinged “door in door” type with:

1. Interior hinged door with hand-operated latch or latches, as required to provide access only to circuit breaker operating handles, not to energized parts.
2. Outer hinged door shall be securely mounted to the panelboard box with factory bolts, screws, clips, or other fasteners, requiring a tool for entry. Hand-operated latches are not acceptable.
3. Push inner and outer doors shall open left to right.

D. All panelboards shall be completely factory-assembled with molded case circuit breakers. Include one-piece removable, inner dead front cover, independent of the panelboard cover.

E. Panelboards shall have main breaker or main lugs, bus size, voltage, phase, top or bottom feed, and flush or surface mounting as scheduled on the drawings.

F. Panelboards shall conform to NEMA PB-1, NEMA AB-1, and UL 67 and have the following features:

1. Non-reduced size copper bus bars with current ratings as shown on the panel schedules rigidly supported on molded insulators.
2. Bus bar connections to the branch circuit breakers shall be the “distributed phase” or “phase sequence” type.
3. Mechanical lugs furnished with panelboards shall be cast, stamped, or machined metal alloys of sizes suitable for the conductors to which they will be connected.
4. Neutral bus shall be 100% rated, mounted on insulated supports.
5. Grounding bus bar shall be equipped with screws or lugs for the connection of grounding wires.
6. Buses shall be braced for the available short-circuit current. Bracing shall not be less than 10,000 A symmetrical for 120/208 V and 120/240 V panelboards, and 14,000 A symmetrical for 277/480 V panelboards, or as indicated on the drawings.
7. Branch circuit panelboards shall have buses fabricated for bolt-on type circuit breakers.
8. Protective devices shall be designed so that they can easily be replaced.

9. Where designated on panel schedule "spaces," include all necessary bussing, device support, and connections. Provide blank cover for each space.
10. In two section panelboards, the main bus in each section shall be full size. The first section shall be furnished with subfeed lugs on the line side of main lugs only, or through-feed lugs for main breaker type panelboards, and have cable connections to the second section. Panelboard sections with tapped bus or crossover bus are not acceptable.
11. Series-rated panelboards are not permitted.

**2.2 CABINETS AND TRIMS**

Cabinets:

1. Provide galvanized steel cabinets to house panelboards. Cabinets for outdoor panelboards shall be factory primed and suitably treated with a corrosion-resisting paint finish meeting UL 50 and UL 67.
2. Cabinet enclosure shall not have ventilating openings.
3. Cabinets for panelboards may be of one-piece formed steel or of formed sheet steel with end and side panels welded, riveted, or bolted as required.

**2.3 MOLDED CASE CIRCUIT BREAKERS FOR PANELBOARDS**

A. Circuit breakers shall be per UL 489, in accordance with the NEC, as shown on the drawings, and as specified.
B. Circuit breakers in panelboards shall be bolt-on type.
C. Molded case circuit breakers shall have minimum interrupting rating as indicated on the drawings.
D. Molded case circuit breakers shall have automatic, trip free, non-adjustable, inverse time, and instantaneous magnetic trips for 100 A frame or lower. Magnetic trip shall be adjustable from 5x to 10x for breakers with 250 A frames and higher. Breaker trip setting shall be set in the field, based on the approved protective device study as specified in Section 26 05 71, ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY. Factory setting shall be HI, unless otherwise noted.
E. Breaker features shall be as follows:
   1. A rugged, integral housing of molded insulating material.
   2. Silver alloy contacts.
   3. Arc quenchers and phase barriers for each pole.

4. Quick-make, quick-break, operating mechanisms.
5. A trip element for each pole, thermal magnetic type with long time delay and instantaneous characteristics, a common trip bar for all poles and a single operator.
6. Electrically and mechanically trip free.
7. An operating handle which indicates ON, TRIPPED, and OFF positions.
8. An overload on one pole of a multipole breaker shall automatically cause all the poles of the breaker to open.

**2.5 SEPARATELY ENCLOSED MOLDED CASE CIRCUIT BREAKERS**

A. Where separately enclosed molded case circuit breakers are shown on the drawings, provide circuit breakers in accordance with the applicable requirements of those specified for panelboards.

B. Enclosures are to be of the NEMA types shown on the drawings. Where the types are not shown, they are to be the NEMA type most suitable for the environmental conditions where the circuit breakers are being installed.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Installation shall be in accordance with the manufacturer’s instructions, the NEC, as shown on the drawings, and as specified.

B. Locate panelboards so that the present and future conduits can be conveniently connected.

C. Install a printed schedule of circuits in each panelboard after approval by the Resident Engineer. Schedules shall be printed on the panelboard directory cards, installed in the appropriate panelboards, and incorporate all applicable contract changes. Information shall indicate motor loads, or other equipment controlled by each circuit, and the final equipment designation served by each circuit.

D. Mount the fully-aligned panelboard such that the maximum height of the top circuit breaker above the finished floor shall not exceed 78 in [1980 mm]. Mount panelboards that are too high such that the bottom of the cabinets will not be less than 6 in [150 mm] above the finished floor.

E. Panels shall be labeled as shown on the one line diagram plus the label shall also include panel, main breaker size, voltage, ampere rating, and the name and location of the source panel.

**3.2 ACCEPTANCE CHECKS AND TESTS**

Perform in accordance with the manufacturer's recommendations. Include the following visual and mechanical inspections and electrical tests:

1. Visual and Mechanical Inspection
   a. Compare equipment nameplate data with specifications and approved shop drawings.
   b. Inspect physical, electrical, and mechanical condition.
   c. Verify appropriate anchorage and required area clearances.
   d. Verify that circuit breaker sizes and types correspond to approved shop drawings.
   e. To verify tightness of accessible bolted electrical connections, use the calibrated torque-wrench method or perform thermographic survey after energization.
   f. Clean panelboard.

**3.3 FOLLOW-UP VERIFICATION**

Upon completion of acceptance checks, settings, and tests, the contractor shall demonstrate that the panelboards are in good operating condition and properly performing the intended function.

- - - E N D - - -

# SECTION 26 27 26
# WIRING DEVICES

## PART 1 - GENERAL

### 1.1 DESCRIPTION

This section specifies the furnishing, installation and connection of wiring devices.

### 1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.

B. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits and outlets boxes.

C. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.

D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.

### 1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

### 1.4 SUBMITTALS

A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

B. Shop Drawings:

1. Sufficient information, clearly presented, shall be included to determine compliance with drawings and specifications.
2. Include electrical ratings, dimensions, mounting details, construction materials, grade and termination information.

C. Manuals: Two weeks prior to final inspection, deliver four copies of the following to the Resident Engineer: Technical data sheets and information for ordering replacement units.

D. Certifications: Two weeks prior to final inspection, submit four copies of the following to the Resident Engineer: Certification by the Contractor that the devices comply with the drawings and specifications, and have been properly installed, aligned, and tested.

### 1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent

referenced. Publications are referenced in the text by basic designation only.

B. National Fire Protection Association (NFPA):
70.....National Electrical Code (NEC)

C. National Electrical Manufacturers Association (NEMA):
WD 1.....General Color Requirements for Wiring Devices
WD 6 .....Wiring Devices – Dimensional Requirements

D. Underwriter’s Laboratories, Inc. (UL):
5.....Surface Metal Raceways and Fittings
20.....General-Use Snap Switches
231.....Power Outlets
467.....Grounding and Bonding Equipment
498.....Attachment Plugs and Receptacles
943.....Ground-Fault Circuit-Interrupters

**PART 2 - PRODUCTS**

**2.1 RECEPTACLES**

A. General: All receptacles shall be listed by Underwriters Laboratories, Inc., and conform to NEMA WD 6.
   1. Mounting straps shall be plated steel, with break-off plaster ears and shall include a self-grounding feature. Terminal screws shall be brass, brass plated or a copper alloy metal.
   2. Receptacles shall have provisions for back wiring with separate metal clamp type terminals (four min.) and side wiring from four captively held binding screws.

B. Duplex Receptacles: Specifications grade, single phase, 20 ampere, 120 volts, 2-pole, 3-wire, and conform to the NEMA 5-20R configuration in NEMA WD 6. The duplex type shall have break-off feature for two-circuit operation. The ungrounded pole of each receptacle shall be provided with a separate terminal.
   1. Bodies shall be brown phenolic compound supported by a plated steel mounting strap having plaster ears.
   2. Duplex Receptacles on Emergency Circuit:
      a. In rooms without emergency powered general lighting, the emergency receptacles shall be of the self-illuminated type.
   4. Ground Fault Interrupter Duplex Receptacles: Shall be an integral unit, suitable for mounting in a standard outlet box.
      a. Ground fault interrupter shall consist of a differential current transformer, solid state sensing circuitry and a circuit interrupter switch. Device shall have nominal sensitivity to

ground leakage current of five milliamperes and shall function to interrupt the current supply for any value of ground leakage current above five milliamperes (+ or – 1 milliamp) on the load side of the device. Device shall have a minimum nominal tripping time of 1/30th of a second.

D. Weatherproof Receptacles: Shall consist of a duplex receptacle, mounted in box with a gasketed, weatherproof, cast metal cover plate and cap over each receptacle opening. The cap shall be permanently attached to the cover plate by a spring-hinged flap. The weatherproof integrity shall not be affected when heavy duty specification or hospital grade attachment plug caps are inserted. Cover plates on outlet boxes mounted flush in the wall shall be gasketed to the wall in a watertight manner.

**2.2 TOGGLE SWITCHES**

A. Toggle Switches: Shall be totally enclosed tumbler type with bodies of phenolic compound. Toggle handles shall be ivory in color unless otherwise specified. The rocker type switch is not acceptable and will not be approved.

1. Shall be single unit toggle, butt contact, quiet AC type, heavy-duty general-purpose use with an integral self grounding mounting strap with break-off plasters ears and provisions for back wiring with separate metal wiring clamps and side wiring with captively held binding screws.
2. Ratings:
   a. 120 volt circuits: 20 amperes at 120-277 volts AC.
   b. 277 volt circuits: 20 amperes at 120-277 volts AC.

**2.4 WALL PLATES**

A. Wall plates for switches and receptacles shall be type 302 stainless steel Oversize plates are not acceptable.

B. Standard NEMA design, so that products of different manufacturers will be interchangeable. Dimensions for openings in wall plates shall be accordance with NEMA WD 6.

C. For receptacles or switches mounted adjacent to each other, wall plates shall be common for each group of receptacles or switches.

D. Duplex Receptacles on Emergency Circuit:

1. Bodies shall be red in color. Wall plates shall be red with the word "EMERGENCY" engraved in 6 mm, (1/4 inch) white letters.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

A. Installation shall be in accordance with the NEC and as shown as on the drawings.

B. Ground terminal of each receptacle shall be bonded to the outlet box with an approved green bonding jumper, and also connected to the green equipment grounding conductor.

C. Outlet boxes for light switches shall be mounted on the strike side of doors.

D. Provide barriers in multigang outlet boxes to separate systems of different voltages, Normal Power and Emergency Power systems, and in compliance with the NEC.

E. Coordinate with other work, including painting, electrical boxes and wiring installations, as necessary to interface installation of wiring devices with other work. Coordinate the electrical work with the work of other trades to ensure that wiring device flush outlets are positioned with box openings aligned with the face of the surrounding finish material. Pay special attention to installations in cabinet work, and in connection with laboratory equipment.

F. Exact field locations of floors, walls, partitions, doors, windows, and equipment may vary from locations shown on the drawings. Prior to locating sleeves, boxes and chases for roughing-in of conduit and equipment, the Contractor shall coordinate exact field location of the above items with other trades. In addition, check for exact direction of door swings so that local switches are properly located on the strike side.

G. Install wall switches 48 inches [1200mm] above floor, OFF position down.

H. Install convenience receptacles 18 inches [450mm] above floor, and 6 inches [152mm] above counter backsplash or workbenches. Install specific-use receptacles at heights shown on the drawings.

I. Label device plates with a permanent adhesive label listing panel and circuit feeding the wiring device.

J. Test wiring devices for damaged conductors, high circuit resistance, poor connections, inadequate fault current path, defective devices, or similar problems using a portable receptacle tester. Correct circuit conditions, remove malfunctioning units and replace with new, and retest as specified above.

K. Test GFCI devices for tripping values specified in UL 1436 and UL 943.

- - - E N D - - -

# SECTION 26 29 11
# MOTOR STARTERS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

All motor starters and variable speed motor controllers, including installation and connection (whether furnished with the equipment specified in other Divisions or otherwise), shall meet these specifications.

### 1.2 RELATED WORK

A. Other sections which specify motor driven equipment, except elevator motor controllers.

B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one Section of Division 26.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

### 1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

### 1.4 SUBMITTALS

A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS:

B. Shop Drawings:

1. Sufficient information, clearly presented, shall be included to determine compliance with drawings and specifications.
2. Include electrical ratings, dimensions, weights, mounting details, materials, running over current protection, size of enclosure, over current protection, wiring diagrams, starting characteristics, interlocking and accessories.

C. Manuals:

1. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals, including technical data sheets, wiring diagrams and information for ordering replacement parts.
   a. Wiring diagrams shall have their terminals identified to facilitate installation, maintenance and operation.

b. Wiring diagrams shall indicate internal wiring for each item of equipment and interconnections between the items of equipment.
c. Elementary schematic diagrams shall be provided for clarity of operation.

2. Two weeks prior to the project final inspection, submit four copies of the final updated maintenance and operating manual to the Resident Engineer.

D. Certification: Two weeks prior to final inspection, unless otherwise noted, submit four copies of the following certifications to the Resident Engineer:
1. Certification that the equipment has been properly installed, adjusted, and tested.
2. Certification by the manufacturer that medium voltage motor controller(s) conforms to the requirements of the drawings and specifications. This certification must be furnished to the Resident Engineer prior to shipping the controller(s) to the job site.

**1.5 APPLICABLE PUBLICATIONS**

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.

B. Institute of Electrical and Electronic Engineers (IEEE):
519.....Recommended Practices and Requirements for Harmonic Control in Electrical Power Systems
C37.90.1.....Standard Surge Withstand Capability (SWC) Tests for Protective Relays and Relay Systems

C. National Electrical Manufacturers Association (NEMA):
ICS 1.....Industrial Control and Systems General Requirements
ICS 1.1.....Safety Guidelines for the Application, Installation and Maintenance of Solid State Control
ICS 2.....Industrial Control and Systems, Controllers, Contactors and Overload Relays Rated 600 Volts DC
ICS 6.....Industrial Control and Systems Enclosures
ICS 7.....Industrial Control and Systems Adjustable-Speed Drives

ICS 7.1.....Safety Standards for Construction and Guide for Selection, Installation and Operation of Adjustable-Speed Drive Systems

D. National Fire Protection Association (NFPA):
70.....National Electrical Code (NEC)

E. Underwriters Laboratories Inc. (UL):
508.....Industrial Control Equipment

**PART 2 - PRODUCTS**

**2.1 MOTOR STARTERS, GENERAL**

A. Shall be in accordance with the requirements of the IEEE, NEC, NEMA (ICS 1, ICS 1.1, ICS 2, ICS 6, ICS 7 and ICS 7.1) and UL.

B. Shall have the following features:
   1. Separately enclosed unless part of another assembly.
   2. Circuit breakers and safety switches within the motor controller enclosures shall have external operating handles with lock-open padlocking provisions and shall indicate the ON and OFF positions.
   3. Motor control circuits:
      a. Shall operate at not more than 120 volts.
      b. Shall be grounded except as follows:
         1) Where isolated control circuits are shown.
         2) Where manufacturers of equipment assemblies recommend that the control circuits be isolated.
      c. Incorporate a separate, heavy duty, control transformer within each motor controller enclosure to provide the control voltage for each motor operating over 120 volts.
      d. Incorporate over current protection for both primary and secondary windings of the control power transformers in accordance with the NEC.
   4. Overload current protective devices:
      b. Overload relay (solid state type.
      c. One for each pole.
      d. Manual reset on the door of each motor controller enclosure.
      e. Correctly sized for the associated motor's rated full load current.
      f. Check every motor controller after installation and verify that correct sizes of protective devices have been installed.
      g. Deliver four copies of a summarized list to the Resident Engineer, which indicates and adequately identifies every motor controller

installed. Include the catalog numbers for the correct sizes of protective devices for the motor controllers.

5. Hand-Off-Automatic (H-O-A) switch is required unless specifically stated on the drawings as not required for a particular starter. H-O-A switch is not required for manual motor starters.
6. Incorporate into each control circuit a 120-volt, solid state time delay relay (ON delay), minimum adjustable range from 0.3 to 10 minutes, with transient protection. Time delay relay is not required where H-O-A switch is not required.
7. Unless noted otherwise, equip with not less than two normally open and two normally closed auxiliary contacts. Provide green run pilot lights and H-O-A control devices as indicated, operable at front of enclosure without opening enclosure. Push buttons, selector switches, pilot lights, etc., shall be interchangeable.
8. Enclosures:
   a. Shall be the NEMA types shown on the drawings for the motor controllers and shall be the NEMA types which are the most suitable for the environmental conditions where the motor controllers are being installed.
   b. Doors mechanically interlocked to prevent opening unless the breaker or switch within the enclosure is open. Provision for padlock must be provided.
   c. Enclosures shall be primed and finish coated at the factory with the manufacturer’s prime coat and standard finish.

C. Motor controllers incorporated with equipment assemblies shall also be designed for the specific requirements of the assemblies.

D. For motor controllers being installed in existing motor control centers or panelboards, coordinate with the existing centers or panelboards.

E. Additional requirements for specific motor controllers, as indicated in other sections, shall also apply.

F. Provide a disconnecting means or safety switch near and within sight of each motor. Provide all wiring and conduit required to facilitate a complete installation.

**2.2 MANUAL MOTOR STARTERS**

A. Shall be in accordance with applicable requirements of 2.1 above.

B. Manual motor starters.

1. Starters shall be general-purpose Class A, manually operated type with full voltage controller for induction motors, rated in horsepower.
2. Units shall include overload and low voltage protection, red pilot light, NO NC auxiliary contact and toggle operator.

C. Fractional horsepower manual motor starters.
1. Starters shall be general-purpose Class A, manually operated with full voltage controller for fractional horsepower induction motors.
2. Units shall include thermal overload protection, red pilot light and toggle operator.

D. Motor starting switches.
1. Switches shall be general-purpose Class A, manually operated type with full voltage controller for fractional horsepower induction motors.
2. Units shall include thermal overload protection, red pilot light low voltage protection, NO NC auxiliary contact and toggle operator.

**2.3 MAGNETIC MOTOR STARTERS**

A. Shall be in accordance with applicable requirements of 2.1 above.
B. Starters shall be general-purpose, Class A magnetic controllers for induction motors rated in horsepower. Minimum size 0.
C. Where combination motor starters are used, combine starter with protective or disconnect device in a common enclosure.
D. Provide phase loss protection for each starter, with contacts to de-energize the starter upon loss of any phase.
E. Unless otherwise indicated, provide full voltage non-reversing across-the-line mechanisms for motors less than 75 HP, closed by coil action and opened by gravity. For motors 75 HP and larger, provide reduced voltage starters. Equip starters with 120V AC coils and individual control transformer unless otherwise noted. Locate "reset" button to be accessible without opening the enclosure.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Install motor control equipment in accordance with manufacturer’s recommendations, the NEC, NEMA and as shown on the drawings.
C. Furnish and install heater elements in motor starters and to match the installed motor characteristics. Submit a list of all motors listing motor nameplate rating and heater element installed.

D. Motor Data: Provide neatly-typed label inside each motor starter enclosure door identifying motor served, nameplate horsepower, full load amperes, code letter, service factor, voltage/phase rating and heater element installed.
E. Connect hand-off auto selector switches so that automatic control only is by-passed in "manual" position and any safety controls are not by-passed.
F. Install manual motor starters in flush enclosures in finished areas.
G. Examine control diagrams indicated before ordering motor controllers. Should conflicting data exist in specifications, drawings and diagrams, request corrected data prior to placing orders.

**3.2 ADJUSTING**

A. Set field-adjustable switches, auxiliary relays, time-delay relays, timers, and overload-relay pickup and trip ranges.
B. Adjust overload-relay heaters or settings if power factor correction capacitors are connected to the load side of the overload relays.
C. Adjust trip settings of MCPs and thermal-magnetic circuit breakers with adjustable instantaneous trip elements. Initially adjust at six times the motor nameplate full-load ampere ratings and attempt to start motors several times, allowing for motor cooldown between starts. If tripping occurs on motor inrush, adjust settings in increments until motors start without tripping. Do not exceed eight times the motor full-load amperes (or 11 times for NEMA Premium Efficient motors if required). Where these maximum settings do not allow starting of a motor, notify Resident Engineer before increasing settings.
E. In reduced-voltage solid-state controllers, set field-adjustable switches and program microprocessors for required start and stop sequences.

**3.3 ACCEPTANCE CHECKS AND TESTS**

A. Perform in accordance with the manufacturer's recommendations. Include the following visual and mechanical inspections and electrical tests:
   1. Visual and Mechanical Inspection
      a. Compare equipment nameplate data with specifications and approved shop drawings.
      b. Inspect physical, electrical, and mechanical condition.
      c. Inspect contactors.
      d. Clean motor starters and variable speed motor controllers.
      e. Verify overload element ratings are correct for their applications.

f. If motor-running protection is provided by fuses, verify correct fuse rating.

g. Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method in accordance with manufacturer's published data.

2. Variable speed motor controllers:

a. Final programming and connections to variable speed motor controllers shall be by a factory-trained technician. Set all programmable functions of the variable speed motor controllers to meet the requirements and conditions of use.

b. Test all control and safety features of the variable frequency drive.

**3.4 FOLLOW-UP VERIFICATION**

Upon completion of acceptance checks, settings, and tests, the Contractor shall show by demonstration in service that the motor starters and variable speed motor controllers are in good operating condition and properly performing the intended functions.

**3.5 SPARE PARTS**

Two weeks prior to the final inspection, provide one complete set of spare fuses (including heater elements) for each starter/controller installed on this project.

- - - E N D - - -

# SECTION 26 29 21
# DISCONNECT SWITCHES

## PART 1 - GENERAL

### 1.1 DESCRIPTION

This section specifies the furnishing, installation, and connection of low voltage disconnect switches.

### 1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that is common to more than one section of Division 26.

B. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES 600 VOLTS AND BELOW: Cables and wiring.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground faults.

D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for cables and wiring.

### 1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

### 1.4 SUBMITTALS

A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

B. Shop Drawings:

1. Clearly present sufficient information to determine compliance with drawings and specifications.
2. Include electrical ratings, dimensions, mounting details, materials, enclosure types, and fuse types and classes.
3. Show the specific switch and fuse proposed for each specific piece of equipment or circuit.

C. Manuals:

1. Provide complete maintenance and operating manuals for disconnect switches, including technical data sheets, wiring diagrams, and information for ordering replacement parts. Deliver four copies to the RESIDENT ENGINEER two weeks prior to final inspection.
2. Terminals on wiring diagrams shall be identified to facilitate maintenance and operation.

3. Wiring diagrams shall indicate internal wiring and any interlocking.

D. Certifications: Two weeks prior to the final inspection, submit four copies of the following certifications to the RESIDENT ENGINEER:

1. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
2. Certification by the contractor that the materials have been properly installed, connected, and tested.

**1.5 APPLICABLE PUBLICATIONS**

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. National Electrical Manufacturers Association (NEMA):

FU l-07.....Low Voltage Cartridge Fuses
KS l-06.....Enclosed and Miscellaneous Distribution Equipment Switches (600 Volts Maximum)

C. National Fire Protection Association (NFPA):

70-08.....National Electrical Code (NEC)

D. Underwriters Laboratories, Inc. (UL):

98-04.....Enclosed and Dead-Front Switches
248-00.....Low Voltage Fuses
977-94.....Fused Power-Circuit Devices

**PART 2 - PRODUCTS**

**2.1 LOW VOLTAGE FUSIBLE SWITCHES RATED 600 AMPERES AND LESS**

A. In accordance with UL 98, NEMA KS1, and NEC.

B. Shall have NEMA classification General Duty (GD) for 240 V switches and NEMA classification Heavy Duty (HD) for 480 V switches.

C. Shall be HP rated.

D. Shall have the following features:

1. Switch mechanism shall be the quick-make, quick-break type.
2. Copper blades, visible in the OFF position.
3. An arc chute for each pole.
4. External operating handle shall indicate ON and OFF position and have lock-open padlocking provisions.
5. Mechanical interlock shall permit opening of the door only when the switch is in the OFF position, defeatable to permit inspection.
6. Fuse holders for the sizes and types of fuses specified.
7. Solid neutral for each switch being installed in a circuit which includes a neutral conductor.

8. Ground lugs for each ground conductor.
9. Enclosures:
   a. Shall be the NEMA types shown on the drawings for the switches.
   b. Where the types of switch enclosures are not shown, they shall be the NEMA types most suitable for the ambient environmental conditions. Unless otherwise indicated on the plans, all outdoor switches shall be NEMA 3R.
   c. Shall be finished with manufacturer’s standard gray baked enamel paint over pretreated steel (for the type of enclosure required).

**2.2 LOW VOLTAGE UNFUSED SWITCHES RATED 600 AMPERES AND LESS**

Shall be the same as Low Voltage Fusible Switches Rated 600 Amperes and Less, but without provisions for fuses.

**2.3 LOW VOLTAGE FUSIBLE SWITCHES RATED OVER 600 AMPERES TO 1200 AMPERES**

Shall be the same as Low Voltage Fusible Switches Rated 600 Amperes and Less, except for the minimum duty rating which shall be NEMA classification Heavy Duty (HD). These switches shall also be HP rated.

**2.4 MOTOR RATED TOGGLE SWITCHES**

Refer to Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Install disconnect switches in accordance with the NEC and as shown on the drawings.
B. Fusible disconnect switches shall be furnished complete with fuses. Arrange fuses such that rating information is readable without removing the fuse.
C. Provide label including voltage, fuse size, ampere rating, the equipment it is feeding and the source name and location.

**3.2 SPARE PARTS**

Two weeks prior to the final inspection, furnish one complete set of spare fuses for each fusible disconnect switch installed on the project. Deliver the spare fuses to the Resident Engineer.

- - - E N D - - -

# SECTION 26 32 13
# ENGINE-GENERATORS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and testing of the low-voltage engine-generator system. This includes, but is not limited to: air filtration, starting system, generator controls, instrumentation, lubrication, fuel system, cooling system, and exhaust system.

B. The engine-generator system shall be fully automatic and shall constitute a unified and coordinated system ready for operation.

C. Where indicated on the plans, also provide a 250kW/313kVA 480Y/277V 3 phase 4 wire temporary diesel powered, standby, electrical power generator in an enclosure mounted on a trailer. Installation shall include generator set, switchgear and controls capable of providing standby power for a Hospital, generator fuel tank capable of providing 24 hours of fuel, 24 hours of fuel, piping, and all accessories.

D. The temporary generator shall be in operation prior to demolition and shall remain in operation until the new system has been fully tested and all loads have been transferred.

### 1.2 RELATED WORK

A. Section 26 36 23, AUTOMATIC TRANSFER SWITCHES: Requirements for automatic transfer switches for use with engine-generators.

B. Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT: Requirements for pipe and equipment support and noise control.

C. Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION: Requirements for hot piping and equipment insulation.

D. Section 23 10 00, FACILITY FUEL SYSTEMS: Fuel supply and storage requirements.

E. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items common to more than one section of Division 26.

F. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Low voltage conductors.

G. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

H. Section 26 05 71, ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY:
Requirements for protective coordination of a standby and/or essential electrical system.

**1.3 QUALITY ASSURANCE**

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

**1.4 QUALITY ASSURANCE**

A. The supplier of the engine-generator shall be responsible for satisfactory total operation of the system and its certification. This supplier shall have had experience with three or more installations of systems of comparable size and complexity. Each of these installations shall have been in successful operation for three or more years. Prior to review of submittals, the Government reserves the right to:
   1. Have the manufacturer submit a list of locations with similar installations.
   2. Inspect any of these installations and question the user concerning the installations without the presence of the supplier.

B. A factory-authorized representative shall be capable of providing emergency maintenance and repairs at the project site within 2hours maximum of notification.

**1.5 SUBMITTALS**

A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

B. Shop Drawings:
Scaled drawings, showing plan views, side views, elevations, and cross-sections.

C. Diagrams:
Control system diagrams, elementary diagrams, control sequence diagrams or tables, wiring diagrams, interconnections diagrams (between local control cubicles, remote annunciator panels, remote derangement panels, remote monitoring panels, remote exercising panel, automatic transfer switches, paralleling switchgear, and fuel storage tanks, as applicable), illustrative diagrams, flow diagrams, and other like items.

D. Technical Data:
   1. Published ratings, catalog cuts, pictures, and manufacturers' specifications for engine-generator, governor, voltage regulator,

radiator, muffler, dampers, day tank, pumps, fuel tank, batteries and charger, jacket heaters, torsional vibration, and control and supervisory equipment.

2. Description of operation.
3. Short-circuit current capacity and subtransient reactance.
4. Sound power level data.

E. Calculations:

Detailed engineering calculations with all equations, graphs, assumptions, and approximations shown and data sources referenced. Include any calculated performance derations appropriate to installed environment.

F. Manuals:

1. When submitting the shop drawings, submit complete maintenance and operating manuals of the engine-generator and auxiliaries, including technical data sheets, wiring diagrams, and information for ordering replacement parts.
2. Two weeks prior to the final inspection, submit four copies of the updated maintenance and operating manual to the Resident Engineer:
   a. Include complete "As Installed" diagrams, which indicate all items of equipment and their interconnecting wiring.
   b. Include complete diagrams of the internal wiring for each of the pieces of equipment, including "As Installed" revisions of the diagrams.
   c. The wiring diagrams shall identify the terminals to facilitate installation, maintenance, operation, and testing.
   d. Include complete lists of spare parts and special tools recommended for two years of normal operation of the complete system.

G. Certifications:

1. Prior to fabrication of the engine-generator, submit the following to the Resident Engineer for approval:
   a. A certification in writing that an engine-generator of the same model and configuration, with the same bore, stroke, number of cylinders, and equal or higher kW/kVA ratings as the proposed engine-generator, has been operating satisfactorily with connected loads of not less than 75% of the specified kW/kVA rating, for not fewer than 2,000 hours without any failure of a crankshaft, camshaft, piston, valve, injector, or governor system.

b. A certification in writing that devices and circuits will be incorporated to protect the voltage regulator and other components of the engine-generator during operation at speeds other than the rated RPM while performing maintenance. Submit thorough descriptions of any precautions necessary to protect the voltage regulator and other components of the system during operation of the engine-generator at speeds other than the rated RPM.

c. A certification from the engine manufacturer stating that the engine exhaust emissions meet the federal, state, and local regulations and restrictions specified. At a minimum, this certification shall include emission factors for criteria pollutants including nitrogen oxides, carbon monoxide, particulate matter, sulfur dioxide, non-methane hydrocarbon, and hazardous air pollutants (HPAs).

2. Prior to installation of the engine-generator at the job site, submit four copies of certified factory test data to the Resident Engineer.

3. Two weeks prior to the final inspection, submit four copies of the following to the Resident Engineer:

a. Certification by the engine-generator manufacturer that the equipment conforms to the requirements of the drawings and specifications.

b. A certified report of field tests from the contractor that the engine-generator has been properly installed, adjusted, and tested.

**1.6 STORAGE AND HANDLING**

A. Equipment shall withstand shipping and handling stresses in addition to the electrical and mechanical stresses which occur during operation of the system. Protect radiator core with wood sheet.

B. Store the equipment in a location approved by the Resident Engineer.

**1.7 JOB CONDITIONS**

Shall conform to the arrangements and details shown on the drawings. The dimensions, enclosures, and arrangements of the engine-generator system shall permit the operating personnel to safely and conveniently operate and maintain the system in the space designated for installation.

**1.8 APPLICABLE PUBLICATIONS**

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. American National Standards Institute (ANSI):

C37.50-00.....Low-Voltage AC Power Circuit Breakers Used In Enclosures-Test Procedures

C39.1-81 (R1992) .....Requirements for Electrical Analog Indicating Instruments

C. American Society of Testing Materials (ASTM):

A53/A53M-07.....Standard Specification for Pipe, Steel, Black, and Hot–Dipped, Zinc Coated Welded and Seamless.

B88-03.....Specification for Seamless Copper Water Tube

B88M-03.....Specification for Seamless Copper water Tube (Metric)

D975-09b.....Diesel Fuel Oils

D. Institute of Electrical and Electronic Engineers (IEEE):

C37.13-08.....Low Voltage AC Power Circuit Breakers Used In Enclosures

C37.90.1-02.....Surge Withstand Capability (SWC) Tests for Relays and Relay Systems Associated with Electric Power Apparatus

E. National Electrical Manufacturers Association (NEMA):

ICS 6-06.....Enclosures

ICS 4-05.....Terminal Blocks

MG 1-07.....Motor and Generators

MG 2-01.....Safety Standard and Guide for Selection, Installation and Use of Electric Motors and Generators

PB 2-06.....Dead-Front Distribution Switchboards

250-08.....Enclosures for Electrical Equipment (1000 Volts Maximum)

F. National Fire Protection Association (NFPA):

30-08.....Flammable and Combustible Liquids Code

37-06.....Installations and Use of Stationary Combustion Engine and Gas Turbines

70-08.....National Electrical Code (NEC)

99-05.....Health Care Facilities

110-10.....Standard for Emergency and Standby Power Systems

G. Underwriters Laboratories, Inc. (UL):

50-95.....Enclosures for Electrical Equipment

142-06.....Steel Aboveground Tanks for Flammable and Combustible Liquids

2085-97.....Insulated Aboveground Tanks for Flammable and Combustible Liquids

2200-98.....Stationery Engine Generator Assemblies

1236-06.....Battery Chargers for Charging Engine-Starter Batteries

467-07.....Grounding and Bonding Equipment

489-09.....Molded-Case Circuit Breakers, Molded-Case Switches and Circuit-Breaker Enclosures

508-99.....Industrial Control Equipment

891-05.....Switchboards

**PART 2 - PRODUCTS**

**2.1 ENGINE-GENERATOR**

A. The engine-generator system shall be in accordance with NFPA, UL, NEMA and ANSI, and as specified herein. All information required by these specifications shall be shown on the drawings.

B. Provide a factory-assembled, wired (except for field connections), complete, fully automatic engine-generator system.

C. Engine-Generator Parameter Schedule:

Power Rating: Emergency Standby

Voltage: 277/480V

Service Load: 313 kVA Motor Starting kVA (Max.): 313_kVA

Power Factor: 0.8lagging

Engine-Generator Application: stand-alone Fuel: diesel Maximum Speed: 1800RPM

Frequency Bandwidth (steady state): + 0.25 %

Voltage Regulation: + 2% (No Load to Full Load) Voltage Bandwidth: + 1% (steady state)

Frequency: 60 Hz

Phases: 3 Phase, Wye Minimum Generator Subtransient Reactance: 0.1%

Max Step Load Increase: 100 % of service load at 0.8__ PF

Transient Recovery Time with Step Load Increase (Voltage): ___0.5__ seconds

Transient Recovery Time with Step Load Increase (Frequency): __3___ seconds
Maximum Frequency Deviation with 50% Step Load Increase: 2.5% of rated frequency
Max Step Load Decrease (without shutdown): 100% of service load at _0.8____ PF
Max Time to Start and be Ready to Assume Load: 10seconds

D. Assemble, connect, and wire the equipment at the factory so that only the external connections need to be made at the construction site.
E. Unit shall be factory-painted with manufacturer's primer and standard finishes.
F. Connections between components of the system shall conform to the recommendations of the manufacturer.
G. Couplings, shafts, and other moving parts shall be enclosed and guarded. Guards shall be metal, ruggedly constructed, rigidly fastened, and readily removable for convenient servicing of the equipment without disassembling any pipes and fittings.
H. Engine-generator shall have the following features:
   1. Factory-mounted on a common, rigid, welded, structural steel base.
   2. Engine-generator shall be statically and dynamically balanced so that the maximum vibration in the horizontal, vertical, and axial directions shall be limited to 0.0059 in [0.15 mm], with an overall velocity limit of 0.866 in/sec [24 mm/sec] RMS, for all speeds.
   3. The isolators shall be constrained with restraints capable of withstanding static forces in any direction equal to twice the weight of the supported equipment.
   4. Shall be capable of operating satisfactorily as specified for not fewer than 10,000 hours between major overhauls.

I.

**2.2 ENGINE**

A. Coupled directly to a generator.
B. Minimum four cylinders.
C. The engine shall be able to start in a 40˚ F [4.5˚ C] () ambient temperature while using No. 2 diesel fuel oil without the use of starting aids such as glow plugs and ether injections.

D. Fuel oil consumption of the engine rate shall not exceed the following values:

| Size Range Net kW | % of Rated Output **capacity** | Fuel Usage kg/kWH (lbs/kWH) |
|---|---|---|
| 100 -299 | 75 and 100 | 0.272 (0.600) |
| | 50 | 0.292 (0.643) |
| 300 -999 | 75 and 100 | 0.261 (0.575) |
| | 50 | 0.272 (0.600) |
| 1000 -2500 | 75 and 100 | 0.243 (0.536) |
| | 50 | 0.260 (0.573) |

E. Equipped with electric heater for maintaining the coolant temperature between 90-100˚ F [32-38˚ C]), or as recommended by the manufacturer.
   1. Install thermostatic controls, contactors, and circuit breaker-protected circuits for the heaters.
   2. The heaters shall operate continuously except while the engine is operating or the water temperature is at the predetermined level.

**2.3 GOVERNOR**

A. Isochronous, electronic type.
B. Steady-state speed band at 60 Hz shall not exceed plus or minus one-third of 1%.
C. While the engine is running, manual speed adjustments may be made.

**2.4 LUBRICATION OIL SYSTEM**

A. Pressurized type.
B. Positive-displacement pump driven by engine crankshaft.
C. Full-flow strainer and full-flow or by-pass filters.
D. Filters shall be cleanable or replaceable type and shall remove particles as small as 3 microns without removing the additives in the oil. For by-pass filters, flow shall be diverted without flow interruption.
E. Extend lube oil sump drain line out through the skid base and terminate it with a drain valve and plug.

**2.5 FUEL SYSTEM**

B. Shall comply with NFPA 37 and NFPA 30, and have the following features:
   1. Injection pump(s) and nozzles.
   2. Plungers shall be carefully lapped for precision fit and shall not require any packing.

3. Filters or screensthat require periodic cleaning or replacement shall not be permitted in the injection system assemblies.
4. Return surplus oil from the injectors to the main storage tank by gravity or a pump.
5. Filter System:
   a. Dual primary filters shall be located between the main fuel oil storage and day tank.
   b. Secondary filters (engine-mounted) shall be located such that the oil will be thoroughly filtered before it reaches the injection system assemblies.
   c. Filters shall be cleanable or replaceable type and shall entrap and remove water from oil as recommended by the engine manufacturer.

C. Day Tank:
1. Day tank is existing to be reused.

**2.6 COOLING SYSTEM**

A. Liquid-cooled, closed loop, with fin-tube radiator mounted on the engine-generator, and integral engine driven circulating pump, as shown on the drawings.
B. Cooling capacity shall not be less than the cooling requirements of the engine-generator and its lubricating oil while operating continuously at 110% of its specified rating.
C. Water circulating pumps shall be the centrifugal type driven by engine. Incorporate pressure relief devices where required to prevent excessive pressure increase after the engine stops.
D. Coolant shall be extended-life antifreeze solution, 50% ethylene glycol and 50% soft water, with corrosion inhibitor additive as recommended by the manufacturer.
E. Fan shall be driven by a totally enclosed electric motor.
F. Coolant hoses shall be flexible, per manufacturer's recommendation.
G. Self-contained thermostatic-control valve shall modulate coolant flow to maintain optimum constant coolant temperature, as recommended by the engine manufacturer.
H. Motor-Operated Dampers:
1. Dampers, which are provided under Section 23 31 00, HVAC DUCTS AND CASINGS, shall be two-position, electric motor-operated.

2. Dampers shall open simultaneously with the starting of the diesel engine and shall close simultaneously with the stopping of the diesel engine.

**2.7 AIR INTAKE AND EXHAUST SYSTEMS**

A. Air Intake:
Provide an engine-mounted air cleaner with replaceable dry filter and dirty filter indicator.

B. Exhaust System:

2. Exhaust Muffler:
Shall be critical grade type and capable of the following noise attenuation:

| Octave Band Hertz (Mid Frequency) | Minimum db Attenuation (.0002 Microbar Reference) |
|---|---|
| 31 | 5 |
| 63 | 10 |
| 125 | 27 |
| 500 | 37 |
| 1000 | 31 |
| 2000 | 26 |
| 4000 | 25 |
| 8000 | 26 |

3. Pressure drop in the complete exhaust system shall be small enough for satisfactory operation of the engine-generator while it is delivering 110% of its specified rating.
4. Exhaust pipe size from the engine to the muffler shall be as recommended by the engine manufacturer. Pipe size from muffler to air discharge shall be two pipe sizes larger than engine exhaust pipe.
5. Connections at the engine exhaust outlet shall be made with a flexible exhaust pipe. Provide bolted type pipe flanges welded to each end of the flexible section.

C. Condensate drain at muffler shall be made with schedule 40 black steel pipe through a petcock.

D. Exhaust Piping and Supports: Black steel pipe, ASTM A-53 standard weight with welded fittings. Spring type hangers, as specified in Section 23 05

41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT, shall support the pipe.

E. Insulation for Exhaust Pipe and Muffler:
   1. Calcium silicate minimum 3 in [75 mm] thick.
   2. Insulation shall be as specified in Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.
   3. The installed insulation shall be covered with aluminum jacket 0.016 in [0.4 mm] thick. The jacket is to be held in place by bands of 0.015 in [0.38 mm] thick by 0.5 in [15 mm] wide aluminum.
   4. Insulation and jacket are not required on flexible exhaust sections.

F. Sleeves: Pipe sleeves (thimble) shall be Schedule 40 standard weight steel pipe. Flash exhaust pipe thimble through roof with 16 oz soft sheet copper, flanged, and made watertight under built-up roofing and extended up around pipe thimble. The exhaust pipe shall be positioned within the thimble by four 6 in [150 mm] wide spiders welded to the exhaust pipe.

G. Vertical exhaust piping shall be provided with a hinged, gravity-operated, self-closing rain cover.

**2.8 ENGINE STARTING SYSTEM**

A. Shall start the engine at any position of the flywheel.

B. Electric cranking motor:
   1. Shall be engine-mounted.
   2. Shall crank the engine via a gear drive.
   3. Rating shall be adequate for cranking the cold engine at the voltage provided by the battery system, and at the required RPM during five consecutive starting attempts of 10 seconds cranking each at 10-second intervals, for a total of 50 seconds of actual cranking without damage (the fifth starting attempt will be manually initiated upon failure of a complete engine cranking cycle).

C. Batteries shall be lead-acid high discharge rate type.
   1. Each battery cell shall have minimum and maximum electrolyte level indicators and a flip-top flame arrestor vent cap.
   2. Batteries shall have connector covers for protection against external short circuits.
   3. With the charger disconnected, the batteries shall have sufficient capacity so that the total system voltage does not fall below 85% of the nominal system voltage with the following demands:

Five consecutive starting attempts of 10 seconds cranking at 10second intervals for a total of 50 seconds of actual cranking (the fifth starting attempt will be manually initiated upon failure of a complete engine cranking cycle).

4. Battery racks shall be metal with an alkali-resistant finish and thermal insulation, and secured to the floor.

D. Battery Charger:

1. A current-limiting battery charger, conforming to UL 1236, shall be provided and shall automatically recharge the batteries. The charger shall be capable of an equalize-charging rate for recharging fully depleted batteries within 24 hours and a floating charge rate for maintaining the batteries at fully charged condition.
2. An ammeter shall be provided to indicate charging rate. A voltmeter shall be provided to indicate charging voltage.

**2.9 LUBRICATING OIL HEATERS**

Provide a thermostatically-controlled electric heater to automatically maintain the oil temperature within plus or minus 3˚ F [1.7˚ C] of the control temperature.

**2.10 JACKET COOLANT HEATERS**

Provide a thermostatically-controlled electric heater mounted in the engine coolant jacketing to automatically maintain the coolant within plus or minus 3˚ F [1.7˚ C] of the temperature recommended by the engine manufacturer to meet the starting time specified at the minimum winter outdoor temperature.

**2.11 GENERATOR**

A. Synchronous, amortisseur windings, bracket-bearing, self-venting, rotating-field type connected directly to the engine.

B. Lifting lugs designed for convenient connection to and removal from the engine.

C. Integral poles and spider, or individual poles dove-tailed to the spider.

D. Designed for sustained short-circuit currents in conformance with NEMA Standards.

E. Designed for sustained operation at 125% of the RPM specified for the engine-generator without damage.

F. Telephone influence factor shall conform to NEMA Standards.

G. Furnished with brushless excitation system or static-exciter-regulator assembly.
H. Nameplates attached to the generator and exciter shall show the manufacturer's name, equipment identification, serial number, voltage ratings, field current ratings, kW/kVA output ratings, power factor rating, time rating, temperature rise ratings, RPM ratings, full load current rating, number of phases and frequency, and date of manufacture.
I. The grounded (neutral) conductor shall be electrically isolated from equipment ground and terminated in the same junction box as the phase conductors.

**2.12 GENERATOR OVERCURRENT AND FAULT PROTECTION**

A. Integrate ground-fault indication with other engine-generator alarm indications.

**2.13 CONTROLS**

A. Shall include Engine Generator Control Cubicle(s) Remote Annunciator panel.
B. General:
1. Control Equipment shall be in accordance with UL 508, NEMA ICS-4, ICS-6, and ANSI C37.90.1.
2. Panels shall be in accordance with UL 50.
3. Cubicles shall be in accordance with UL 891.
4. Coordinate controls with the automatic transfer switches shown on the drawings so that the systems will operate as specified.
5. Cubicles:
a. Code gauge steel: manufacturer's recommended heavy gauge steel with factory primer and light gray finish.
b. Doors shall be gasketed, attached with concealed or semi-concealed hinges, and shall have a permanent means of latching in closed position.
c. Panels shall be wall-mounted or incorporated in other equipment as indicated on the drawings or as specified.
d. Door locks for panels and cubicles shall be keyed identically to operate from a single key.
6. Wiring: Insulated, rated at 600 V.
a. Install the wiring in vertical and horizontal runs, neatly harnessed.

b. Terminate all external wiring at heavy duty, pressure-type, terminal blocks.

7. The equipment, wiring terminals, and wires shall be clearly and permanently labelled.
8. The appropriate wiring diagrams shall be laminated or mounted under plexiglass within the frame on the inside of the cubicles and panels.
9. All indicating lamps and switches shall be accessible and mounted on the cubicle doors.
11. The manufacturer shall coordinate the interfacing of the control systems with all related equipment supplied in accordance with other sections of the project specification.

C. Engine-Generator Control Cubicle:

1. Starting and Stopping Controls:
   a. A three-position, maintained-contact type selector switch with positions marked "AUTOMATIC," "OFF," and "MANUAL." Provide flashing amber light for OFF and MANUAL positions.
   b. A momentary contact push-button switch with positions marked "MANUAL START" and "MANUAL STOP."
   c. Selector switch in AUTOMATIC position shall cause the engine to start automatically when a single pole contact in a remote device closes. When the generator's output voltage increases to not less than 90% of its rated voltage, and its frequency increases to not less than 58 Hz, the remote devices shall transfer the load to the generator. An adjustable time delay relay, in the 0 to 15 minute range, shall cause the engine-generator to continue operating without any load after completion of the period of operation with load. Upon completion of the additional 0 to 15 minute (adjustable) period, the engine-generator shall stop.
   d. Selector switch in OFF position shall prevent the engine from starting either automatically or manually. Selector switch in MANUAL position shall also cause the engine to start when the manual start push-button is depressed momentarily.
   e. With selector switch is in MANUAL position, depressing the MANUAL STOP push-button momentarily shall stop the engine after a cool-down period.

f. A maintained-contact, red mushroom-head push-button switch marked "EMERGENCY STOP" will cause the engine to stop without a cool down period, independent of the position of the selector switch.

2. Engine Cranking Controls:
   a. The cranking cycles shall be controlled by a timer that will be independent of the battery voltage fluctuations.
   b. The controls shall crank the engine through one complete cranking cycle, consisting of four starting attempts of 10 seconds each and 10 seconds between each attempt.
   c. Total actual cranking time for the complete cranking cycle shall be 40 seconds during a 70-second interval.
   d. Cranking shall terminate when the engine starts so that the starting system will not be damaged. Termination of the cranking shall be controlled by self-contained, speed-sensitive switch. The switch shall prevent re-cranking of the engine until after the engine stops.
   e. After the engine has stopped, the cranking control shall reset.
3. Supervisory Controls:
   a. Overcrank:
      1) When the cranking control system completes one cranking cycle (four starting attempts), without starting the engine, the OVERCRANK signal light and the audible alarm shall be energized.
      2) The cranking control system shall lock-out, and shall require a manual reset.
   b. Coolant Temperature:
      1) When the temperature rises to the predetermined first stage level, the HIGH COOLANT TEMPERATURE - FIRST STAGE signal light and the audible alarm shall be energized.
      2) When the temperature rises to the predetermined second stage level, which shall be low enough to prevent any damage to the engine and high enough to avoid unnecessary engine shutdowns, the HIGH COOLANT TEMPERATURE - SECOND STAGE signal light and the audible alarm shall be energized and the engine shall stop.
      3) The difference between the first and second stage temperature settings shall be approximately 10˚ F [-12˚ C].
      4) Permanently indicate the temperature settings near the associated signal light.

5) When the coolant temperature drops to below 70˚ F [21˚ C], the "LOW COOLANT TEMPERATURE" signal light and the audible alarm shall be energized.

c. Low Coolant Level: When the coolant level falls below the minimum level recommended by the manufacturer, the LOW COOLANT LEVEL signal light and audible alarm shall be energized.

d. Lubricating Oil Pressure:

1) When the pressure falls to the predetermined first stage level, the OIL PRESSURE - FIRST STAGE signal light and the audible alarm shall be energized.

2) When the pressure falls to the predetermined second stage level, which shall be high enough to prevent damage to the engine and low enough to avoid unnecessary engine shutdowns, the OIL PRESSURE - SECOND STAGE signal light and the audible alarm shall be energized and the engine shall stop.

3) The difference between the first and second stage pressure settings shall be approximately 15% of the oil pressure.

4) The pressure settings near the associated signal light shall be permanently displayed so that the running oil pressure can be compared to the target (setpoint) value.

e. Overspeed:

1) When the engine RPM exceeds the maximum RPM recommended by the manufacturer of the engine, the engine shall stop.

2) Simultaneously, the OVERSPEED signal light and the audible alarm shall be energized.

f. Low Fuel - Day Tank:

When the fuel oil level in the day tank decreases to less than the level at which the fuel oil transfer pump should start to refill the tank, the LOW FUEL DAY TANK light and the audible alarm shall be energized.

g. Low Fuel - Main Storage Tank:

When the fuel oil level in the storage tank decreases to less than one-third of total tank capacity, the LOW FUEL-MAIN STORAGE TANK signal light and audible alarm shall be energized.

h. Reset Alarms and Signals:

Overcrank, Coolant Temperature, Coolant Level, Oil Pressure, Overspeed, and Low Fuel signal lights and the associated audible alarms shall require manual reset. A momentary-contact silencing

switch and push-button shall silence the audible alarm by using relays of solid state devices to seal in the audible alarm in the de-energized condition. Elimination of the alarm condition shall automatically release the sealed-in circuit for the audible so that it will be automatically energized again when the next alarm condition occurs. The signal lights shall require manual reset after elimination of the condition which caused them to be energized. Install the audible alarm just outside the generator room in a location as directed by the Resident Engineer. The audible alarm shall be rated for 85 dB at 10 ft [3 M].

i. Generator Breaker Signal Light:
   1) A flashing green light shall be energized when the generator circuit breaker is in the OPEN or TRIPPED position.
   2) Simultaneously, the audible alarm shall be energized.

4. Monitoring Devices:
   a. Electric type gauges for the cooling water temperatures and lubricating oil pressures. These gauges may be engine mounted with proper vibration isolation.
   b. A NON-RESETTABLE running time indicator, totalizing not fewer than 9,999 hours, and an electric type tachometer.
   c. A voltmeter, ammeter, frequency meter, kilowatt meter, manual adjusting knob for the output voltage, and the other items shown on the drawings shall be mounted on the front of the generator control panels.
   d. Install potential and current transformers as required.
   e. Individual signal lights:
      1) OVER-CRANK
      2) HIGH COOLANT TEMPERATURE - FIRST STAGE
      3) HIGH COOLANT TEMPERATURE - SECOND STAGE
      4) LOW COOLANT TEMPERATURE
      5) OIL PRESSURE - FIRST STAGE
      6) OIL PRESSURE - SECOND STAGE
      7) LOW COOLANT LEVEL
      8) GENERATOR BREAKER
      9) OVERSPEED
      10) LOW FUEL - DAY TANK
      11) LOW FUEL – MAIN STORAGE TANK

f. Lamp Test: The LAMP TEST momentary contact switch shall momentarily actuate the alarm buzzer and all the indicating lamps.

5. Automatic Voltage Regulator:
   a. Shall correct voltage fluctuations rapidly and restore the output voltage to the predetermined level with a minimum amount of hunting.
   b. Shall include voltage level rheostat located inside the control cubicle.
   c. Provide a 3-phase automatic voltage regulator immune to waveform distortion.

**2.14 REMOTE ANNUNCIATOR PANEL**

A. A remote annunciator panel shall be installed atlocation as shown on the drawings.

B. The annunciator shall indicate alarm conditions of the engine-generator as follows:
   1. Individual visual signals shall indicate generator run.
   2. Individual visual signals plus a common audible alarm shall warn of the following:
      a. LOW LUBRICATING OIL PRESSURE
      b. LOW COOLANT
      c. HIGH COOLANT TEMPERATURE
      d. LOW FUEL - DAY TANK
      e. LOW FUEL – MAIN TANK
      f. FAILURE TO START
      g. OVERSPEED

C. The annunciator shall also have the following features:
   1. Lamp test momentary contact switch which will momentarily actuate the alarm buzzer and all indicating lamps.
   2. Audible Alarm: There shall be an audible alarm, rated for 85 dB at 10 feet, which shall become actuated whenever an alarm condition occurs. A momentary-contact acknowledge push-button shall silence the audible alarm, but not clear the alarm lamp. Elimination of the alarm condition shall automatically release the seal-in circuit for the audible alarm and extinguish the alarm lamp.

D. Include control wiring between the remote annunciator panel and the engine-generator. Wiring shall be as required by the manufacturer.

**2.18 SPARE PARTS**

A. For each engine generator:

1. Six lubricating oil filters.
2. Six primary fuel oil filters.
3. Six secondary fuel oil filters.
4. Six intake air filters.

B. For each battery charger:
Three complete sets of fuses.

C. For each control panel:
Three complete sets of fuses.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Install concrete bases of dimensions shown on the drawings.

B. Installation of the engine-generator shall comply with manufacturer's written instructions and with NFPA 110.

C. Mounting:
1. Support the base of engine-generator on vibration isolators, each isolator bolted to the floor (pad), and the generator base bolted to isolator.
2. Install sufficient isolators so that the floor (pad) bearing pressure under each isolator is within the floor (pad) loading specification.
3. Install equal number of isolators on each side of the engine-generator's base.
4. Locate isolators for approximately equal load distribution and deflection per isolator. The base of the engine-generator shall be drilled at the factory for the isolator bolts.
5. Isolators shall be shipped loose with the engine-generator.
6. All connections between the engine-generator and exterior systems, such as fuel lines, electrical connections, and engine exhaust system and air exhaust shroud, shall be flexible.

D. Balance:
The vibration velocity in the horizontal, vertical, and axial directions shall not exceed 0.65 in [16.25 mm] per second peak at any specific frequency. These limits apply to main structural components such as the engine block and the generator frame at the bearings.

E. Connect all components of the generator system so that they will continue to be energized during failure of the normal electrical power supply system.

F. Install piping between engine-generator and remote components of cooling, fuel, and exhaust systems.

G. Flexible connection between radiator and exhaust shroud at the wall damper:
   1. Install noncombustible flexible connections made of 20-oz neoprene-coated fiberglass fabric approximately 6 in [150 mm] wide.
   2. Crimp and fasten the fabric to the sheet metal with screws 2 in [50 mm] on center. The fabric shall not be stressed, except by the air pressure.

H. Exhaust System Insulation:
   1. Adhesive and insulation materials shall be applied on clean, dry surfaces from which loose scale and construction debris has been removed by wire brushing.
   2. Fill all cracks, voids, and joints of applied insulation material with high temperature 2000˚ F [1093˚ C] insulating cement before applying the outer covering.
   3. The installation shall be clean and free of debris, thermally and structurally tight without sag, neatly finished at all hangers or other penetrations, and shall provide a smooth finish surface.
   4. Insulation and jacket shall terminate hard and tight at all anchor points.
   5. Insulate completely from engine exhaust flexible connection through roof or wall construction, including muffler.

**3.2 ACCEPTANCE CHECKS AND TESTS**

A. Provide the services of a factory-authorized, factory-trained representative of the engine-generator manufacturer to inspect field-assembled components, and equipment installation and supervise the field tests.

B. When the complete engine-generator system has been installed and prior to the final inspection, test all components of the system in the presence of the Resident Engineerfor proper operation of the individual components and the complete system and to eliminate electrical and mechanical defects.

C. Furnish fuel oil, lubricating oil, anti-freeze liquid, water treatment, and rust-inhibitor and load bank for testing of the engine-generator.

D. Visual Inspection: Visually verify proper installation of engine-generator and all components per manufacturer’s pre-start installation checklist.

E. Set relays per this specification. Set engine-generator circuit breaker protective functions per Section 26 05 71, ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY.

F. Field Tests:

1. Perform manufacturer’s after-starting checks and inspections.
2. Test the engine-generator for eight hours of continuous operation as follows:
   a. First six hours while the engine-generator is delivering 100% of its specified kW rating.
   b. Last two hours while the engine-generator is delivering 110% of its specified kW rating.
   c. If during the 8-hour continuous test, a failure occurs, either the diesel engine shuts down or the full kW rating of the load bank is not achieved, the test is null and void. The test(s) shall be repeated at no additional cost to the Government until satisfactory results are attained.
3. Record the following test data at 30-minute intervals:
   a. Time of day, as well as reading of running time indicator.
   b. kW.
   c. Voltage on each phase.
   d. Amperes on each phase.
   e. Engine RPM.
   f. Frequency.
   g. Engine water temperature.
   h. Fuel pressure.
   i. Oil pressure.
   j. Outdoor temperature.
   k. Average ambient temperature in the vicinity of the engine-generator.
4. Demonstrate that the engine-generator will attain proper voltage, frequency, and will accept the specified block load within the specified time limit from a cold start after the closing of a single contact.
5. Furnish a resistance-type load for the testing of the engine-generator. Test loads shall always include adequate resistance to

assure stability of the loads and equipment during all of the testing operations. The test load kW rating shall not be less than 110% of the specified kW rating of the engine-generator.

G. Starting System Test:
   1. Demonstrate that the batteries and cranking motor are capable of five starting attempts of 10 seconds cranking each at 10-second intervals with the battery charger turned off.

H. Remote Monitoring Panel,Remote Annunciator PanelTests:
   Simulate conditions to verify proper operation of each indicating lamp, alarm device, meter, interconnecting hardware and software, and reset button.

I. Fuel systems shall be flushed and tested per Section 23 10 00, FACILITY FUEL SYSTEMS: Fuel supply and storage requirements.

J. Automatic Operation Tests:
   Test the engine-generator to demonstrate automatic starting, loading and unloading. The load for this test shall utilize both load banks and actual loads to be served. Initiate loss of normal source and verify the specified sequence of operation. Restore the normal power source and verify the specified sequence of operation. Verify resetting of controls to normal.

**3.3 FOLLOW-UP VERIFICATION**

Upon completion of acceptance checks, settings, and tests, the contractor shall demonstrate that the engine-generator(s) and control and annunciation components are in good operating condition and properly performing the intended function.

**3.4 INSTRUCTIONS AND FINAL INSPECTIONS**

A. Laminate or mount under acrylic resin a set of operating instructions for the system and install instructions within a frame mounted on the wall near the engine-generator at a location per the Resident Engineer.

B. Furnish the services of a competent, factory-trained technician for three 4-hour periods for instructions to VA personnel in operation and maintenance of the equipment, on the dates requested by the Resident Engineer.

- - - E N D - - -

# SECTION 26 36 23
# AUTOMATIC TRANSFER SWITCHES

## PART 1 - GENERAL

### 1.1 DESCRIPTION

This section specifies the furnishing, installation, connection, and testing of closed-transition automatic transfer switches with bypass isolation.

### 1.2 RELATED WORK

D. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section in Division 26.

E. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.

F. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personal safety and to provide a low impedance path for possible ground fault currents.

G. Section 26 05 33, RACEWAYS AND BOXES FOR ELECTRICAL SYSTEMS: Raceways for power and control wiring.

H. Section 26 05 71, ELECTRICAL SYSTEM PROTECTIVE DEVICE STUDY: Requirements for a coordinated electrical system.

J. Section 26 32 13, ENGINE-GENERATORS: Requirements for normal and emergency power generation.

K. Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS: General communications requirements that are common to more than one section in Division 27.

L. Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATION SYSTEMS: Raceways for communications cabling.

M. SECTION 27 15 00, COMMUNICATIONS HORIZONTAL CABLING: Communications media for interconnecting automatic transfer switches and remote control and annunciation components.

### 1.3 QUALITY ASSURANCE

A. **QUALITY ASSURANCE**

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

B. A factory-authorized representative shall maintain a service center capable of providing emergency maintenance and repair services at the project site within a 4hour maximum response time.

C. Automatic transfer switch, bypass/isolation switch, and annunciation control panels shall be products of same manufacturer.
D. Comply with OSHA – 29 CFR 1910.7 for the qualifications of the testing agency.

**1.4 FACTORY TESTS**

A. Automatic transfer switches shall be thoroughly tested at the factory to ensure that there are no electrical or mechanical defects. Tests shall be conducted per UL standards. Factory tests shall be certified. The following factory tests shall be performed:
   1. Visual inspection to verify that each ATS is as specified.
   2. Mechanical test to verify that ATS sections are free of mechanical hindrances.
   3. Insulation resistance test to ensure integrity and continuity of entire system.
   4. Main switch contact resistance test.
   5. Electrical tests to verify complete system electrical operation and to set up time delays and voltage sensing settings.

**1.5 SUBMITTALS**

A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
B. Shop Drawings:
   1. Clearly present sufficient information to determine compliance with drawings and specifications.
   2. Include electrical ratings (including withstand), dimensions, weights, mounting details, conduit entry provisions front view, side view, equipment and device arrangement, elementary and interconnection wiring diagrams, factory relay settings, and accessories.
   3. For automatic transfer switches that are networked together to a common means of annunciation and/or control, submit interconnection diagrams and site and building plans, showing connections for normal and emergency sources of power, load, control and annunciation components, and interconnecting communications paths. Equipment locations on the diagrams and plans shall match the site, building, and room designations on the construction drawings.
   4. Complete nameplate data, including manufacturer's name and catalog number.
   5. A copy of the markings that are to appear on the transfer switches when installed.

C. Manuals:
1. When submitting the shop drawings, submit companion copies of complete maintenance and operating and maintenance manuals, including technical data sheets, wiring diagrams and information, such as telephone number, fax number and web sites, for ordering replacement parts.
2. Two weeks prior to final inspection, submit four copies of a final updated maintenance and operating manual to the Resident Engineer.
   a. Include complete "As Installed" diagrams that indicate all pieces of equipment and their interconnecting wiring.
   b. Include complete diagrams of the internal wiring for each piece of equipment, including "As Installed" revisions of the diagrams.
   c. The wiring diagrams shall identify the terminals to facilitate installation, maintenance, operation, and testing.

D. Certifications:
1. When submitting the shop drawings, submit a certified test report from a recognized independent testing laboratory that a representative sample has passed UL 1008 prototype testing.
2. Two weeks prior to final inspection, submit four copies of the following to the Resident Engineer:
   a. Certification that no design changes have been made to the switch or its components since last certified by UL or tested by an independent laboratory.
   b. Certification by the manufacturer that the equipment conforms to the requirements of the drawings and specifications.
   c. Certification that the withstand current rating has been coordinated with upstream protective devices.
   d. Certification by the contractor that the equipment has been properly installed, adjusted, and tested.
   e. A certified test report from an independent laboratory that a representative sample has passed the ANSI surges withstand test for transfer switches which incorporate solid-state components.

**1.6 APPLICABLE PUBLICATIONS**

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only:

B. Institute of Electrical and Electronic Engineers (IEEE):
446-95.....Recommended Practice for Design and Maintenance of Emergency and Standby Power Systems

C37.90.1-02.....Surge Withstand Capability (SWC) Tests for Relays and Relay Systems Associated with Electric Power Apparatus
C62.41.1-02.....Guide on the Surges Environment in Low-Voltage (1000 V and Less) AC Power Circuits
C62.41.2.....Recommended Practice on Characterization of Surges in Low-Voltage (1000 V and Less) AC Power Circuits

C. National Electrical Manufacturers Association (NEMA):
250-03.....Enclosure for Electrical Equipment (1000 Volts Maximum)
ICS 6-06.....Enclosures
IC3 4-05.....Industrial Control and Systems: Terminal Blocks
MG 1-07.....Motors and Generators

D. National Fire Protection Association (NFPA):
70–08.....National Electrical Code (NEC)
99-05.....Health Care Facilities
110-10.....Emergency and Standby Power Systems

E. Underwriters Laboratories, Inc. (UL):
50-95.....Enclosures for Electrical Equipment
508-99.....Industrial Control Equipment
891-05.....Dead-Front Switchboards
1008-96.....Transfer Switch Equipment

**PART 2 - PRODUCTS**

**2.1 CLOSED -TRANSITION AUTOMATIC TRANSFER SWITCH**

A. General:
1. Comply with UL, NEMA, NEC, ANSI, IEEE, and NFPA.

2. Automatic transfer switches are to be 3pole draw-out construction, electrically operated, closed transition type, without integral overcurrent protection. Automatic transfer switches utilizing automatic or non-automatic molded case circuit breakers, insulated case circuit breakers, or power circuit breakers as switching mechanisms are not acceptable.
3. Automatic transfer switches shall be completely factory-assembled and wired such that only external circuit connections are required in the field.
4. Each automatic transfer switch shall be equipped with an integral bypass/isolation switch.

5. Switches shall be dual operator type with closed transition switching between two available sources for a period not exceeding 6 cycles (96 milli-seconds).

6. Ratings:
   a. Phases, voltage, ampere rating, poles, and withstand current rating shall be as shown on the drawings.
   b. Transfer switches are to be rated for continuous duty at specified continuous current rating on 60Hz systems.
   c. Maximum automatic transfer switch rating: 800 A.
7. Markings:
   a. Markings shall be in accordance with UL 1008.
   b. Markings for the additional withstand test specified below shall be included in the nameplate data.
8. Tests:
   Automatic transfer switches shall be tested in accordance with UL 1008. The contacts of the transfer switch shall not weld during the performance of withstand and closing tests when used with the upstream overcurrent device and available fault current specified.

9. Surge Withstand Test:
   Transfer switches utilizing solid-state devices in sensing, relaying, operating, or communication equipment or circuits shall comply with IEEE C37.90.1.
10. Housing:
   a. Enclose automatic transfer switches in wall- or floor-mounted steel cabinets, with metal gauge not less than No. 14, in accordance with UL 508, or in a switchboard assembly in accordance with UL 891, as shown on the drawings.
   b. Enclosure shall be constructed so that personnel are protected from energized bypass-isolation components during automatic transfer switch maintenance.
   c. Automatic transfer switch components shall be removable without disconnecting external source or load power conductors.
   d. Finish: Cabinets shall be given a phosphate treatment, painted with rust-inhibiting primer, and finish-painted with the manufacturer's standard enamel or lacquer finish.
   e. Viewing Ports: Provide viewing ports so that contacts may be inspected without disassembly.

B. Automatic transfer switches shall include the following features:

1. Operating Mechanism:
   a. Actuated by an electrical operator.
   b. Electrically and mechanically interlocked so that the main contact cannot be closed simultaneously in either normal and emergency position.
   c. Normal and emergency main contacts shall be mechanically locked in position by the operating linkage upon completion of transfer. Release of the locking mechanism shall be possible only by normal operating action.
   d. Contact transfer time shall not exceed six cycles.
   e. Operating mechanism components and mechanical interlocks shall be insulated or grounded.
2. Contacts:
   a. Main contacts: Silver alloy.
   b. Neutral contacts: Silver alloy, with same current rating as phase contacts.
   c. Current carrying capacity of arcing contacts shall not be used in the determination of the automatic transfer switch rating, and shall be separate from the main contacts.
   d. Main and arcing contacts shall be visible for inspection with cabinet door open and barrier covers removed.
3. Manual Operator:
   Capable of operation by one person in either direction under no load.
4. Replaceable Parts:
   a. Include the main and arcing contact individually or as units, relays, and control devices.
   b. Switch contacts and accessories shall be replaceable from the front without removing the switch from the cabinet and without removing main conductors.
5. Sensing Relays:
   a. Undervoltage Sensing for Each Phase of Normal Source: Sense low phase-to-ground voltage on each phase. Pickup voltage shall be adjustable from 85 to 100% of nominal, and dropout voltage is adjustable from 75 to 98% of pickup value. Factory set for pickup at 90% and dropout at 85%.
   b. Adjustable Time Delay: For override of normal-source voltage sensing to delay transfer and engine start signals. Adjustable from zero to six seconds, and factory set for one second.

c. Voltage/Frequency Lockout Relay: Prevent premature transfer to generator. Pickup voltage shall be adjustable from 85 to 100% of nominal. Factory set for pickup at 90%. Pickup frequency shall be adjustable from 90 to 100% of nominal. Factory set for pickup at 95%.
d. Time Delay for Retransfer to Normal Source: Adjustable from 0 to 30 minutes, and factory set for 10 minutes to automatically defeat delay on loss of voltage or sustained undervoltage of emergency source, provided normal supply has been restored.
e. Test Switch: Simulate normal-source failure.
f. Switch-Position Pilot Lights: Indicate source to which load is connected.
g. Source-Available Indicating Lights: Supervise sources via transfer switch normal- and emergency-source sensing circuits.
h. Normal Power Supervision: Green light with nameplate engraved "Normal Source Available."
i. Emergency Power Supervision: Red light with nameplate engraved "Emergency Source Available."
j. Transfer Override Switch: Overrides automatic retransfer control so that automatic transfer switch shall remain connected to emergency power source regardless of condition of normal source. Pilot light indicates override status.
k. Engine Starting Contacts: One isolated and normally closed and one isolated and normally open; rated 10 A at 32-V dc minimum.
l. Engine Shutdown Contacts: Time delay adjustable from zero to five minutes, and factory set for five minutes. Contacts shall initiate shutdown at remote engine-generator controls after retransfer of load to normal source.
m.

6. Controls:
   a. Control module shall provide indication of switch status and be equipped with alarm diagnostics.
   b. Control module shall control operation of the automatic transfer switches.
7. Factory Wiring: Train and bundle factory wiring and label either by color-code or by numbered/lettered wire markers. Labels shall match those on the shop drawings.
8. Annunciation, Control, and Programming Interface Components: Devices for communicating with remote programming devices, annunciators, or

control panelsshall have open-protocol communication capability matched with remote device.

9. Auxiliary Contacts:
   a. Provide contacts as necessary to accomplish the functions shown on the drawings, as specified herein, and as designated in other sections of these specifications, as well as one spare normally open contact and one normally closed contact.
   b. Provide remote contact to bypass retransfer time delay to normal source.

11. In-Phase Monitor: Factory-wired, internal relay controls transfer, so that it occurs only when the two sources are synchronized in phase. The relay compares phase relationship and frequency difference between normal and emergency sources and initiates transfer when both sources are within 15 electrical degrees, and only if transfer can be completed within 60 electrical degrees. Transfer is initiated only if both sources are within 2 Hz of nominal frequency and 70% or more of nominal voltage.

**2.2 SEQUENCE OF OPERATION**

A. The specified voltage decrease in one or more phases of the normal power source shall initiate the transfer sequence. The automatic transfer switch shall start the engine-generator(s) after a specified time delay to permit override of momentary dips in the normal power source.
B. The automatic transfer switch shall transfer the load from normal to emergency source when the frequency and voltage of the engine-generator(s) have attained the specified percent of rated value.
C. Engine Start: A voltage decrease, at any automatic transfer switch, in one or more phases of the normal power source to less than the specified value of normal shall start the engine-generator(s) after a specified time delay.
D. Transfer to Emergency System Loads: Automatic transfer switches for Emergency System loads shall transfer their loads from normal to emergency source when frequency and voltage of the engine-generator(s) have attained the specified percent of rated value. Only those switches with deficient normal source voltage shall transfer.
E. Transfer to Equipment Branch Loads: Automatic transfer switches for Equipment Branch loads shall transfer their loads to the generator on a time-delayed, staggered basis, after the Emergency System switches have

transferred. Only those switches with deficient normal source voltage shall transfer.

F. Retransfer to Normal (All Loads): Automatic transfer switches shall retransfer the load from emergency to normal source upon restoration of normal supply in all phases to the specified percent or more of normal voltage, and after a specified time delay. Should the emergency source fail during this time, the automatic transfer switches shall immediately transfer to the normal source whenever it becomes available. After restoring to normal source, the engine-generator(s) shall continue to run unloaded for a specified interval before shut-down.

G. Exercise Mode: Transfer to emergency power source shall be accomplished by remote manual test switches on a selective basis.

**2.3 BYPASS/ISOLATION SWITCH**

A. Provide each automatic transfer switch with two-way bypass/isolation manual type switch. The bypass-isolation switch shall permit load by-pass to either normal or emergency power source and complete isolation of the automatic transfer switch, independent of transfer switch position. Bypass and isolation shall be possible under all conditions including when the automatic transfer switch is removed from service.

B. Operation: The bypass/isolation switch shall have provisions for operation by one person through the movement of a maximum of two handles at a common dead front panel in no more than 15 seconds. Provide a lock, which must energize to unlock the bypass switch, to prevent bypassing to a dead source. Provide means to prevent simultaneous connection between normal and emergency sources.

1. Bypass to normal (or emergency): Operation of bypass handle shall allow direct connection of the load to the normal (or emergency) source, without load interruption or by using a break-before-make design, or provide separate load interrupter contacts to momentarily interrupt the load.
   a. Ensure continuity of auxiliary circuits necessary for proper operation of the system.
   b. A red indicating lamp shall light when the automatic transfer switch is bypassed.
   c. Bypassing source to source: If the power source is lost while in the bypass position, bypass to the alternate source shall be achievable without re-energization of the automatic transfer switch service and load connections.

2. Isolation: Operation of the isolating handle shall isolate all live power conductors to the automatic transfer switch without interruption of the load.
   a. Interlocking: Provide interlocking as part of the bypass/ isolation switch to eliminate personnel-controlled sequence of operation, and to prevent operation to the isolation position until the bypass function has been completed.
   b. Padlocking: Include provisions to padlock the isolating handle in the isolated position.
   c. Visual verification: The isolation blades shall be visible in the isolated position.
3. Testing: It shall be possible to test (normal electrical operation) the automatic transfer switch and engine–generator(s) with the isolation contacts closed and the load bypassed without interruption of power to the load.

C. Ratings: The electrical capabilities and ratings of the bypass/isolation switch shall be compatible with those of the associated automatic transfer switch, including any required additional withstand tests.

**2.6 SPARE PARTS**

Provide six control fuses for each automatic transfer switch with adifferent rating.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Install the automatic transfer switch in accordance with the NEC, as shown on the drawings, and as recommended by the manufacturer.

BB. Anchor automatic transfer switch to the slab with plated 0.5 in [12.5 mm] minimum anchor bolts, or as recommended by the manufacturer.

CMount automatic transfer switch on concrete slab. Unless otherwise indicated, the slab shall be at least 4 in [100 mm] thick. The top of the concrete slab shall be approximately 4 in [100 mm] above finished floor. Edges above floor shall have 0.5 in [12.5 mm] chamfer. The slab shall be of adequate size to project at least 8 in [200 mm] beyond the equipment. Provide conduit turnups and adequate cable entrance space required for the equipment to be mounted. Seal voids around conduit openings in slab with water- and oil-resistant caulking or sealant. Cut off and bush conduits 3 in [75 mm] above the slab surface. Concrete work shall be as specified in Section 03 30 00, CAST-IN-PLACE CONCRETE.

E. Set field-adjustable intervals and delays, relays, and engine exerciser.

**3.2 ACCEPTANCE CHECKS AND TESTS**

A factory-authorized service representative is required to inspect components, assemblies, and equipment installation, including connections, and to assist in testing.

1. Following completion of automatic transfer switch installation and after making proper adjustments and settings, site tests shall be performed by the manufacturer’s representative in accordance with manufacturer's written instructions to demonstrate that each automatic transfer switch functions satisfactorily and as specified. Advise Resident Engineerof the site testing within five days prior to its scheduled date, and provide certified field test reports within 14 days following successful completion of the site tests. Test reports shall describe adjustments and settings made and site tests performed. Minimum operational tests shall include the following:
   a. Insulation resistance shall be tested, both phase-to-phase and phase-to-ground.
   b. Inspect for physical damage, proper installation and connection, and integrity of barriers, covers, and safety features.
   c. Verify that manual transfer warnings are properly placed.
   d. Perform manual transfer operation.
2. After energizing circuits, demonstrate the interlocking sequence and operational function for each automatic transfer switch at least three times.
   a. Simulate power failures of normal source to automatic transfer switches and of emergency source with normal source available.
   b. Simulate loss of phase-to-ground voltage for each phase of normal source.
   c. Verify time-delay settings.
   d. Verify pickup and dropout voltages by data readout or inspection of control settings.
   e. Verify proper sequence and correct timing of automatic engine starting, transfer time delay, re-transfer time delay on restoration of normal power, and engine cool-down and shut-down.

**3.3 DEMONSTRATION**

At the final inspection in the presence of Resident Engineer, demonstrate that the complete auxiliary electrical power system operates properly in every respect. Coordinate this demonstration with the demonstration of the engine-generator(s).

**3.4 TRAINING**

Furnish the services of a competent, factory-trained engineer or technician for one 4-hour period to instruct VA personnel in the operation and maintenance of the equipment, including review of the operation and maintenance manual, on a date requested by the Resident Engineer. Coordinate this training with that of the generator training.

- - - E N D - - -

# SECTION 26 43 13
# TRANSIENT-VOLTAGE SURGE SUPPRESSION

## PART 1 - GENERAL

### 1.1 DESCRIPTION

Section includes transient voltage surge suppression equipment for low-voltage power distribution and control equipment.

### 1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General requirements that are common to more than one section of Division 26.

### 1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

### 1.4 SUBMITTALS

A. Include rated capacities, operating weights, electrical characteristics, furnished specialties, and accessories.

B. Operation and Maintenance Data: For TVSS devices to include in emergency, operation, and maintenance manuals.

C. Warranties: Sample of special warranties.

D. Certifications:

1. Two weeks prior to final inspection, submit four copies of the following to the Resident Engineer:

   a. Certification by the Contractor that the assemblies have been properly installed, adjusted and tested.3.

   b. Certified copies of all of the factory design and production tests, field test data sheets and reports for the assemblies.

### 1.5 APPLICABLE PUBLICATIONS

Publications listed below (including amendments, addenda, revisions, supplement and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

A. Institute of Engineering and Electronic Engineers (IEEE):

IEEE C62.41.2.....Recommended Practice on Characterization of Surges in Low-Voltage (1000 V and Less) AC Power Circuits

IEEE C62.45.....Recommended Practice on Surge Testing for Equipment Connected to Low-Voltage (1000 V and Less) AC Power Circuits

B. National Electrical Manufacturers Association (NEMA):
NEMA LS 1.....Low Voltage Surge Protective Devices

C. Underwriters Laboratories, Inc. (UL):
UL 1283.....Electromagnetic Interference Filters
UL 1449.....Surge Protective Devices

D. National Fire Protection Association (NFPA):
NFPA 70.....National Electrical Code (NEC)

**PART 2 - PRODUCTS**

**2.1 PANELBOARDSUPPRESSORS**

A. Surge Protection Devices:
1. Comply with UL 1449.
2. Modular design with field-replaceable modules.
3. Fuses, rated at 200-kA interrupting capacity.
4. Fabrication using bolted compression lugs for internal wiring.
5. Integral disconnect switch.
6. Redundant suppression circuits.
7. Redundant replaceable modules.
8. Arrangement with copper bus bars and for bolted connections to phase buses, neutral bus, and ground bus.
9. Arrangement with wire connections to phase buses, neutral bus, and ground bus.
10. LED indicator lights for power and protection status.
11. Audible alarm, with silencing switch, to indicate when protection has failed.
12. Form-C contacts rated at 5 A and 250-V ac, one normally open and one normally closed, for remote monitoring of protection status. Contacts shall reverse on failure of any surge diversion module or on opening of any current-limiting device. Coordinate with building power monitoring and control system.
13. Four-digit transient-event counter set to totalize transient surges.

B. Peak Single-Impulse Surge Current Rating: 240 kA per mode/480 kAper phase.

C. Minimum single impulse current ratings, using 8-by-20-mic.sec waveform described in IEEE C62.41.2
   1. Line to Neutral: 70,000 A.
   2. Line to Ground: 70,000 A.
   3. Neutral to Ground: 50,000 A.
D. Protection modes and UL 1449 SVR for grounded wye circuits shall be as follows:
   1. Line to Neutral: 800 V for 480Y/277 V, 400 V for 208Y/120 V.
   2. Line to Ground: 800 V for 480Y/277 V, 400 V for 208Y/120 V.
   3. Neutral to Ground: 800 V for 480Y/277 V, 400 V for 208Y/120 V.
E. Protection modes and UL 1449 SVR for 240/120 V, single-phase, 3-wire circuits shall be as follows:
   1. Line to Neutral: 400 V.
   2. Line to Ground: 400 V.
   3. Neutral to Ground: 400 V.
F. Protection modes and UL 1449 SVR for 240/120-V, 3-phase, 4-wire circuits with high leg shall be as follows:
   1. Line to Neutral: 400 V, 800 V from high leg.
   2. Line to Ground: 400 V.
   3. Neutral to Ground: 400 V.

**2.3 ENCLOSURES**

A. Indoor Enclosures: NEMA 250 Type 1.

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

B. Install TVSS devices for panelboards and auxiliary panels integral to panel or with conductors or buses between suppressor and points of attachment as short and straight as possible. Do not exceed manufacturer's recommended lead length. Do not bond neutral and ground.
   1. Provide a circuit breaker, sized by manufacturer, as a dedicated disconnecting means for TVSS unless otherwise shown on drawings.

**3.2 ACCEPTANCE CHECKS AND TESTS**

A. Perform in accordance with the manufacturer's recommendations. Include the following visual and mechanical inspections and electrical tests:
   1. Visual and Mechanical Inspection

a. Compare equipment nameplate data with specifications and approved shop drawings.
b. Inspect physical, electrical, and mechanical condition.
c. Verify that disconnecting means and feeder size and maximum to TVSS unit correspond to approved shop drawings.
d. Verifying tightness of accessible bolted electrical connections by calibrated torque-wrench method.
e. Clean TVSS unit.
f. Complete startup checks according to manufacturer's written instructions.
g. Verify the correct operation of all sensing devices, alarms, and indicating devices.

**3.3 STARTUP**

A. Do not energize or connect switchgear, switchboards, or panelboards to their sources until TVSS devices are installed and connected.
B. Do not perform insulation resistance tests of the distribution wiring equipment with the TVSS installed. Disconnect before conducting insulation resistance tests, and reconnect immediately after the testing is over.

**3.4 SPARE PARTS**

A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
   1. Replaceable Protection Modules: One of each size and type installed.

**3.5 INSTRUCTION**

Provide factory certified technician to train Government maintenance personnel to maintain TVSS devices. Training shall be provided for a total period of 4 hours of normal working time and shall start after the system is functionally complete but prior to final acceptance test. Training shall cover all essential items contained in the operation and maintenance manual.

- - -END OF SECTION - - -

# SECTION 26 51 00
# INTERIOR LIGHTING

## PART 1 - GENERAL

### 1.1 DESCRIPTION:

This section specifies the furnishing, installation and connection of the interior lighting systems.

### 1.2 RELATED WORK

A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General requirements that are common to more than one section of Division 26.

B. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.

C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.

D. Section 26 27 26, WIRING DEVICES: Wiring devices used for control of the lighting systems.

### 1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

### 1.4 SUBMITTALS

A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

B. Product Data: For each type of lighting fixture (luminaire) designated on the LIGHTING FIXTURE SCHEDULE, arranged in order of fixture designation, submit the following information.

1. Material and construction details include information on housing, optics system and lens/diffuser.
2. Physical dimensions and description.
3. Wiring schematic and connection diagram.
4. Installation details.
5. Energy efficiency data.
6. Photometric data based on laboratory tests complying with IESNA Lighting Measurements, testing and calculation guides.
7. Lamp data including lumen output (initial and mean), color rendition index (CRI), rated life (hours) and color temperature (degrees Kelvin).

8. Ballast data including ballast type, starting method, ambient temperature, ballast factor, sound rating, system watts and total harmonic distortion (THD).

C. Manuals:

1. Submit, simultaneously with the shop drawings companion copies of complete maintenance and operating manuals including technical data sheets, and information for ordering replacement parts.
2. Two weeks prior to the final inspection, submit four copies of the final updated maintenance and operating manuals, including any changes, to the Resident Engineer.

D. Certifications:

1. Two weeks prior to final inspection, submit four copies of the following certifications to the Resident Engineer:
   a. Certification by the Contractor that the equipment has been properly installed, adjusted, and tested.

**1.5 APPLICABLE PUBLICATIONS**

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. Institute of Electrical and Electronic Engineers (IEEE):

C62.41-91.....Guide on the Surge Environment in Low Voltage (1000V and less) AC Power Circuits

C. National Fire Protection Association (NFPA):

70.....National Electrical Code (NEC)
101.....Life Safety Code

D. National Electrical Manufacturer's Association (NEMA):

C82.1-97.....Ballasts for Fluorescent Lamps - Specifications
C82.2-02.....Method of Measurement of Fluorescent Lamp Ballasts
C82.4-02.....Ballasts for High-Intensity-Discharge and Low-Pressure Sodium Lamps
C82.11-02.....High Frequency Fluorescent Lamp Ballasts

E. Underwriters Laboratories, Inc. (UL):

496-96.....Edison-Base Lampholders
542-99.....Lampholders, Starters, and Starter Holders for Fluorescent Lamps
844-95.....Electric Lighting Fixtures for Use in Hazardous (Classified) Locations
924-95.....Emergency Lighting and Power Equipment

935-01.....Fluorescent-Lamp Ballasts
1029-94.....High-Intensity-Discharge Lamp Ballasts
1029A-06.....Ignitors and Related Auxiliaries for HID Lamp Ballasts
1598-00.....Luminaires
1574-04.....Standard for Track Lighting Systems
2108-04.....Standard for Low-Voltage Lighting Systems
8750-08.....Light Emitting Diode (LED) Light Sources for Use in Lighting Products

F. Federal Communications Commission (FCC):
Code of Federal Regulations (CFR), Title 47, Part 18

**PART 2 - PRODUCTS**

**2.1 LIGHTING FIXTURES (LUMINAIRES)**

A. Shall be in accordance with NFPA 70 and UL 1598, as shown on drawings, and as specified.
B. Sheet Metal:
1. Shall be formed to prevent warping and sagging. Housing, trim and lens frame shall be true, straight (unless intentionally curved) and parallel to each other as designed.
2. Wireways and fittings shall be free of burrs and sharp edges and shall accommodate internal and branch circuit wiring without damage to the wiring.
3. When installed, any exposed fixture housing surface, trim frame, door frame and lens frame shall be free of light leaks; lens doors shall close in a light tight manner.
4. Hinged door closure frames shall operate smoothly without binding when the fixture is in the installed position, latches shall function easily by finger action without the use of tools.
C. Ballasts shall be serviceable while the fixture is in its normally installed position, and shall not be mounted to removable reflectors or wireway covers unless so specified.
D. Lamp Sockets:
1. Fluorescent: Lampholder contacts shall be the biting edge type or phosphorous-bronze with silver flash contact surface type and shall conform to the applicable requirements of UL 542. Lamp holders for bi-pin lamps shall be of the telescoping compression type, or of the single slot entry type requiring a one-quarter turn of the lamp after insertion.

F. Mechanical Safety: Lighting fixture closures (lens doors, trim frame, hinged housings, etc.) shall be retained in a secure manner by captive screws, chains, captive hinges or fasteners such that they cannot be accidentally dislodged during normal operation or routine maintenance.

G. Metal Finishes:

1. The manufacturer shall apply standard finish (unless otherwise specified) over a corrosion resistant primer, after cleaning to free the metal surfaces of rust, grease, dirt and other deposits. Edges of pre-finished sheet metal exposed during forming, stamping or shearing processes shall be finished in a similar corrosion resistant manner to match the adjacent surface(s). Fixture finish shall be free of stains or evidence of rusting, blistering, or flaking, and shall be applied after fabrication.
2. Interior light reflecting finishes shall be white with not less than 85 percent reflectances, except where otherwise shown on the drawing.
3. Exterior finishes shall be as shown on the drawings.

H. Lighting fixtures shall have a specific means for grounding metallic wireways and housings to an equipment grounding conductor.

**2.2 BALLASTS**

A. Linear Fluorescent Lamp Ballasts: Multi-voltage (120 – 277V) electronic programmed-start type, complying with UL 935 and with ANSI C 82.11, designed for type and quantity of lamps indicated. Ballast shall be designed for full light output unless dimmer or bi-level control is indicated; including the following features:

1. Lamp end-of-life detection and shutdown circuit (T5 lamps only).
2. Automatic lamp starting after lamp replacement.
3. Sound Rating: Class A.
4. Total Harmonic Distortion Rating: 10 percent or less.
5. Transient Voltage Protection: IEEE C62.41.1 and IEEE C62.41.2, Category A or better.
6. Operating Frequency: 20 kHz or higher.
7. Lamp Current Crest Factor: 1.7 or less.
8. Ballast Factor: 0.87 or higher unless otherwise indicated.
9. Power Factor: 0.98 or higher.
10. Interference: Comply with 47 CFT 18, Ch.1, Subpart C, for limitations on electromagnetic and radio-frequency interference for non-consumer equipment.

11. To facilitate multi-level lamp switching, lamps within fixture shall be wired with the outermost lamp at both sides of the fixture on the same ballast, the next inward pair on another ballast and so on to the innermost lamp (or pair of lamps). Within a given room, each switch shall uniformly control the same corresponding lamp (or lamp pairs) in all fixture units that are being controlled.
12. Where three-lamp fixtures are indicated, unless switching arrangements dictate otherwise, utilize a common two-lamp ballast to operate the center lamp in pairs of adjacent units that are mounted in a continuous row. The ballast fixture and slave-lamp fixture shall be factory wired with leads or plug devices to facilitate this circuiting. Individually mounted fixtures and the odd fixture in a row shall utilize single-lamp ballast for operation of the center.

**2.4 EMERGENCY LIGHTING UNIT**

A. Complete, self-contained unit with batteries, battery charger, one or more local or remote lamp heads with lamps, under-voltage relay, and test switch. Comply with UL 924.
   1. Enclosure: Shall be impact-resistant thermoplastic which will protect components from dust, moisture, and oxidizing fumes from the battery. Enclosure shall be suitable for the environmental conditions in which installed.
   2. Lamp Heads: Horizontally and vertically adjustable, mounted on the face of the unit, except where otherwise indicated.
   3. Lamps: Shall be sealed-beam MR-16 halogen, rated not less than 12 watts at the specified DC voltage.
   4. Battery: Shall be maintenance-free lead-acid. Minimum normal life shall be 10 years.
   5. Battery Charger: Dry-type full-wave rectifier with charging rates to maintain the battery in fully-charged condition during normal operation, and to automatically recharge the battery within 12 hours following a 1-1/2 hour continuous discharge.
   6. Integral Self-Test: Automatically initiates test of unit emergency operation at required intervals. Test failure is annunciated by an integral audible alarm and a flashing LED.

**2.5 LAMPS**

A. Linear T5 and T8 Fluorescent Lamps:
   1. Rapid start fluorescent lamps shall comply with ANSI C78.1; and instant-start lamps shall comply with ANSI C78.3.

2. Chromacity of fluorescent lamps shall comply with ANSI C78.376.
3. Except as indicated below, lamps shall be low-mercury energy saving type, have a color temperature between 3500° and 4100°K, a Color Rendering Index (CRI) of greater than 70, average rated life of 20,000 hours, and be suitable for use with dimming ballasts, unless otherwise indicated. Low mercury lamps shall have passed the EPA Toxicity Characteristic Leachate Procedure (TCLP) for mercury by using the lamp sample preparation procedure described in NEMA LL

**2.9 EXIT LIGHT FIXTURES**

A. Exit light fixtures shall meet applicable requirements of NFPA 101 and UL 924.
B. Housing and Canopy:
   1. Shall be made of die-cast aluminum.
   2. Optional steel housing shall be minimum 20 gauge thick or equivalent strength aluminum.
   3. Steel housing shall have baked enamel over corrosion resistant, matte black or ivory white primer.
C. Door frame shall be cast or extruded aluminum, and hinged with latch.
D. Finish shall be satin or fine-grain brushed aluminum.
E. There shall be no radioactive material used in the fixtures.
F. Fixtures:
   1. Maximum fixture wattage shall be 1 watt or less.
   2. Inscription panels shall be cast or stamped aluminum a minimum of 0.090 inch [2.25mm] thick, stenciled with 6 inch [150mm] high letters, baked with red color stable plastic or fiberglass. Lamps shall be luminous Light Emitting Diodes (LED) mounted in center of letters on red color stable plastic or fiberglass. The LED shall be rated minimum 25 years life.
   3. Double-Faced Fixtures: Provide double-faced fixtures where required or as shown on drawings.
   4. Directional Arrows: Provide directional arrows as part of the inscription panel where required or as shown on drawings. Directional arrows shall be the "chevron-type" of similar size and width as the letters and meet the requirements of NFPA 101.
G. Voltages – multi-tap at 120v or 277V

**PART 3 - EXECUTION**

**3.1 INSTALLATION**

A. Installation shall be in accordance with the NEC, manufacturer's instructions and as shown on the drawings or specified.

B. Align, mount and level the lighting fixtures uniformly.

C. Fluorescent bed light fixtures shall be attached to the studs in the walls. Attachment to gypsum board only is not acceptable.

D. Lighting Fixture Supports:

1. Shall provide support for all of the fixtures. Supports may be anchored to channels of the ceiling construction, to the structural slab or to structural members within a partition, or above a suspended ceiling.
2. Shall maintain the fixture positions after cleaning and relamping.
3. Surface mounted lighting fixtures:
   a. Fixtures shall be bolted against the ceiling independent of the outlet box at four points spaced near the corners of each unit. The bolts (or stud-clips) shall be minimum 1/4-20 [6mm] bolt, secured to main ceiling runners and/or secured to cross runners. Non-turning studs may be attached to the main ceiling runners and cross runners with special non-friction clip devices designed for the purpose, provided they bolt through the runner, or are also secured to the building structure by 12 gauge safety hangers. Studs or bolts securing fixtures weighing in excess of 56 pounds [25kg] shall be supported directly from the building structure.
   b. Where ceiling cross runners are installed for support of lighting fixtures they must have a carrying capacity equal to that of the main ceiling runners and be rigidly secured to the main runners.
   c. Fixtures less than 15 pounds [6.8kg] in weight and occupying less than two square feet [600mm x 600mm] of ceiling area may, (when designed for the purpose) be supported directly from the outlet box when all the following conditions are met.
      1) Screws attaching the fixture to the outlet box pass through round holes (not key-hole slots) in the fixture body.
      2) The outlet box is attached to a main ceiling runner (or cross runner) with approved hardware.
      3) The outlet box is supported vertically from the building structure.

d. Fixtures mounted in open construction shall be secured directly to the building structure with approved bolting and clamping devices.

8. Single or double pendant-mounted lighting fixtures:
   a. Each stem shall be supported by an approved outlet box, mounted swivel joint and canopy which holds the stem captive and provides spring load (or approved equivalent) dampening of fixture oscillations. Outlet box shall be supported vertically from the building structure.
9. Outlet boxes for support of lighting fixtures (where permitted) shall be secured directly to the building structure with approved devices or supported vertically in a hung ceiling from the building structure with a nine gauge wire hanger, and be secured by an approved device to a main ceiling runner or cross runner to prevent any horizontal movement relative to the ceiling. //

E. Furnish and install the specified lamps for all lighting fixtures installed and all existing lighting fixtures reinstalled under this project.

F. Coordinate between the electrical and ceiling trades to ascertain that approved lighting fixtures are furnished in the proper sizes and installed with the proper devices (hangers, clips, trim frames, flanges), to match the ceiling system being installed.

G. Bond lighting fixtures and metal accessories to the grounding system as specified in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

H. Burn-in all lamps that require specific aging period to operate properly, prior to occupancy by Government. Burn-in period to be 40 hours minimum, unless a lesser period is specifically recommended by lamp manufacturer. Burn-in fluorescent and compact fluorescent lamps intended to be dimmed, for at least 100 hours at full voltage. Replace any lamps and ballasts which fail during burn-in.

J. At completion of project, relamp/reballast fixtures which have failed lamps/ballasts. Clean fixtures, lenses, diffusers and louvers that have accumulated dust/dirt/fingerprints during construction. Replace damaged lenses, diffusers and louvers with new.

K. Dispose of lamps per requirements of Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.

- - - E N D - - -

# SECTION 27 05 11
# REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This Section, Requirements for Communications Installations, applies to all sections of Division 27.

B. Furnish and install communications cabling, systems, equipment, and accessories in accordance with the specifications and drawings. Capacities and ratings of transformers, cable, and other items and arrangements for the specified items are shown on drawings.

### 1.2 MINIMUM REQUIREMENTS

A. References to industry and trade association standards and codes are minimum installation requirement standards.

B. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

### 1.3 QUALIFICATIONS (PRODUCTS AND SERVICES)

A. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.

B. Product Qualification:

1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.

C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

### 1.4 MANUFACTURED PRODUCTS

A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.

B. When more than one unit of the same class of equipment is required, such units shall be the product of a single manufacturer.

C. Equipment Assemblies and Components:

1. Components of an assembled unit need not be products of the same manufacturer.
2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
3. Components shall be compatible with each other and with the total assembly for the intended service.
4. Constituent parts which are similar shall be the product of a single manufacturer.

D. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.

E. When Factory Testing Is Specified:

1. The Government shall have the option of witnessing factory tests. The contractor shall notify the VA through the Resident Engineer a minimum of 15 working days prior to the manufacturers making the factory tests.
2. Four copies of certified test reports containing all test data shall be furnished to the Resident Engineer prior to final inspection and not more than 90 days after completion of the tests.
3. When equipment fails to meet factory test and re-inspection is required, the contractor shall be liable for all additional expenses, including expenses of the Government.

**1.5 EQUIPMENT REQUIREMENTS**

Where variations from the contract requirements are requested in accordance with the GENERAL CONDITIONS and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

**1.6 EQUIPMENT PROTECTION**

A. Equipment and materials shall be protected during shipment and storage against physical damage, dirt, moisture, cold and rain:

1. During installation, enclosures, equipment, controls, controllers, circuit protective devices, and other like items, shall be protected against entry of foreign matter; and be vacuum cleaned both inside and outside before testing and operating and repainting if required.

2. Damaged equipment shall be, as determined by the Resident Engineer, placed in first class operating condition or be returned to the source of supply for repair or replacement.
3. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.
4. Damaged paint on equipment and materials shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

**1.7 WORK PERFORMANCE**

A. Job site safety and worker safety is the responsibility of the contractor.
B. For work on existing stations, arrange, phase and perform work to assure communications service for other buildings at all times. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.
C. New work shall be installed and connected to existing work neatly and carefully. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.
D. Coordinate location of equipment and pathways with other trades to minimize interferences. See the GENERAL CONDITIONS.

**1.8 EQUIPMENT INSTALLATION AND REQUIREMENTS**

A. Equipment location shall be as close as practical to locations shown on the drawings.
B. Inaccessible Equipment:
   1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
   2. "Conveniently accessible" is defined as being capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

**1.9 EQUIPMENT IDENTIFICATION**

A. Install an identification sign which clearly indicates information required for use and maintenance of equipment.
B. Nameplates shall be laminated black phenolic resin with a white core with engraved lettering, a minimum of 6 mm (1/4 inch) high. Secure nameplates with screws. Nameplates that are furnished by manufacturer as

a standard catalog item, or where other method of identification is herein specified, are exceptions.

**1.10 SUBMITTALS**

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. The Government's approval shall be obtained for all equipment and material before delivery to the job site. Delivery, storage, or installation of equipment or material which has not had prior approval will not be permitted at the job site.

C. All submittals shall include adequate descriptive literature, catalog cuts, shop drawings, and other data necessary for the Government to ascertain that the proposed equipment and materials comply with specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify equipment being submitted.

D. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.

1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
3. Submit each section separately.

E. The submittals shall include the following:

1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, pictures, nameplate data and test reports as required.
3. Elementary and interconnection wiring diagrams for communication and signal systems, control system and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
4. Parts list which shall include those replacement parts recommended by the equipment manufacturer, quantity of parts, current price and availability of each part.

F. Manuals: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

1. Maintenance and Operation Manuals: Submit as required for systems and equipment specified in the technical sections. Furnish four copies, bound in hardback binders, (manufacturer's standard binders) or an approved equivalent. Furnish one complete manual as specified in the

technical section but in no case later than prior to performance of systems or equipment test, and furnish the remaining manuals prior to contract completion.

2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, equipment, building, name of Contractor, and contract number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the system or equipment.
3. Provide a "Table of Contents" and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
4. The manuals shall include:
   a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
   b. A control sequence describing start-up, operation, and shutdown.
   c. Description of the function of each principal item of equipment.
   d. Installation and maintenance instructions.
   e. Safety precautions.
   f. Diagrams and illustrations.
   g. Testing methods.
   h. Performance data.
   i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare parts, and name of servicing organization.
   j. Appendix; list qualified permanent servicing organizations for support of the equipment, including addresses and certified qualifications.

G. Approvals will be based on complete submission of manuals together with shop drawings.

H. After approval and prior to installation, furnish the Resident Engineer with one sample of each of the following:
   1. A 300 mm (12 inch) length of each type and size of wire and cable along with the tag from the coils of reels from which the samples were taken.
   2. Each type of conduit and pathway coupling, bushing and termination fitting.

3. Raceway and pathway hangers, clamps and supports.
4. Duct sealing compound.

**1.11 SINGULAR NUMBER**

Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

**1.12 TRAINING**

A. Training shall be provided in accordance with Article, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.
B. Training shall be provided for the particular equipment or system as required in each associated specification.
C. A training schedule shall be developed and submitted by the contractor and approved by the Resident Engineer at least 30 days prior to the planned training.

- - - E N D - - -

# SECTION 27 05 33
# RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This section specifies the furnishing, installation, and connection of conduit, fittings, and boxes to form complete, coordinated, raceway systems. Raceways are required for all communications cabling unless shown or specified otherwise.

B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

### 1.2 RELATED WORK

A. Bedding of conduits: Section 31 20 00, EARTH MOVING.

B. Sealing around conduit penetrations through the building envelope to prevent moisture migration into the building: Section 07 92 00, JOINT SEALANTS.

C. Identification and painting of conduit and other devices: Section 09 91 00, PAINTING.

D. General electrical requirements and items that is common to more than one section of Division 27: Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.

E. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

### 1.3 SUBMITTALS

In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

A. Shop Drawings:

1. Size and location of panels and pull boxes
2. Layout of required conduit penetrations through structural elements.
3. The specific item proposed and its area of application shall be identified on the catalog cuts.

B. Certification: Prior to final inspection, deliver to the Resident Engineer four copies of the certification that the material is in accordance with the drawings and specifications and has been properly installed.

### 1.4 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent

referenced. Publications are referenced in the text by the basic designation only.

B. National Fire Protection Association (NFPA):
70-05.....National Electrical Code (NEC)

C. Underwriters Laboratories, Inc. (UL):

5-01.....Surface Metal Raceway and Fittings
6-03.....Rigid Metal Conduit
50-03.....Enclosures for Electrical Equipment
467-01.....Grounding and Bonding Equipment
514A-01.....Metallic Outlet Boxes
514B-02.....Fittings for Cable and Conduit
651-02.....Schedule 40 and 80 Rigid PVC Conduit
651A-03.....Type EB and A Rigid PVC Conduit and HDPE Conduit
797-03.....Electrical Metallic Tubing
1242-00.....Intermediate Metal Conduit

D. National Electrical Manufacturers Association (NEMA):
TC-3-04.....PVC Fittings for Use with Rigid PVC Conduit and Tubing
FB1-03.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

**PART 2 - PRODUCTS**

**2.1 MATERIAL**

A. Conduit Size: In accordance with the NEC, but not less than 3/4 inch) unless otherwise shown.

B. Conduit:
1. Rigid galvanized steel: Shall Conform to UL 6, ANSI C80.1.
2. Rigid aluminum: Shall Conform to UL 6A, ANSI C80.5.
3. Rigid intermediate steel conduit (IMC): Shall Conform to UL 1242, ANSI C80.6.
4. Electrical metallic tubing (EMT): Shall Conform to UL 797, ANSI C80.3. Maximum size not to exceed 105 mm (4 inch) and shall be permitted only with cable rated 600 volts or less.
5. Direct burial plastic conduit: Shall conform to UL 651 and UL 651A, heavy wall PVC or high density polyethylene (PE).

C. Conduit Fittings:

1. Rigid steel and IMC conduit fittings:
   a. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
   a. Standard threaded couplings, locknuts, bushings, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
   b. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
   c. Bushings: Metallic insulating type, consisting of an insulating insert molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
   d. Erickson (union-type) and set screw type couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
   e. Sealing fittings: Threaded cast iron type. Use continuous drain type sealing fittings to prevent passage of water vapor.
2. Rigid aluminum conduit fittings:
   a. Standard threaded couplings, locknuts, bushings, and elbows: Malleable iron, steel or aluminum alloy materials; Zinc or cadmium plate iron or steel fittings. Aluminum fittings containing more than 0.4 percent copper are prohibited.
   b. Locknuts and bushings: As specified for rigid steel and IMC conduit.
   c. Set screw fittings: Not permitted for use with aluminum conduit.
3. Electrical metallic tubing fittings:
   a. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
   b. Only steel or malleable iron materials are acceptable.
   c. Couplings and connectors: Concrete tight and rain tight, with connectors having insulated throats. Use gland and ring compression type couplings and connectors for conduit sizes 50 mm (2 inches) and smaller. Use set screw type couplings with four set screws each for conduit sizes over 50 mm (2 inches). Use set screws of case-hardened steel with hex head and cup point to firmly seat in wall of conduit for positive grounding.

d. Indent type connectors or couplings are prohibited.
e. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.

4. Direct burial plastic conduit fittings:
a. Fittings shall meet the requirements of UL 514C and NEMA TC3.
b. As recommended by the conduit manufacturer.

D. Conduit Supports:
1. Parts and hardware: Zinc-coat or provide equivalent corrosion protection.
2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
3. Multiple conduit (trapeze) hangers: Not less than 38 mm by 38 mm (1-1/2 by 1-1/2 inch), 12 gage steel, cold formed, lipped channels; with not less than 9 mm (3/8 inch) diameter steel hanger rods.
4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

E. Outlet, Junction, and Pull Boxes:
1. UL-50 and UL-514A.
2. Cast metal where required by the NEC or shown, and equipped with rustproof boxes.
3. Sheet metal boxes: Galvanized steel, except where otherwise shown.

F. Warning Tape: Standard, 4-Mil polyethylene 76 mm (3 inch) wide tape detectable type, red with black letters, and imprinted with “CAUTION BURIED COMMUNICATIONS CABLE BELOW”.

**PART 3 - EXECUTION**

**3.1 PENETRATIONS**

A. Cutting or Holes:
1. Locate holes in advance where they are proposed in the structural sections such as ribs or beams. Obtain the approval of the Resident Engineer prior to drilling through structural sections.
2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammer, impact electric, hand or manual hammer type drills are not allowed, except where permitted by the Resident Engineer as required by limited working space.

C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal clearances around the conduit and make watertight as specified in Section 07 92 00, JOINT SEALANTS.

**3.2 INSTALLATION, GENERAL**

A. Install conduit as follows:
   1. In complete runs before pulling in cables or wires.
   2. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new undamaged material.
   3. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
   4. Cut square with a hacksaw, ream, remove burrs, and draw up tight.
   5. Mechanically continuous.
   6. Independently support conduit at 8’0” on center. Do not use other supports i.e., , lighting fixtures, conduits, mechanical piping, or mechanical ducts).
   7. Support within 300 mm (1 foot) of changes of direction, and within 300 mm (1 foot) of each enclosure to which connected.
   8. Close ends of empty conduit with plugs or caps at the rough-in stage to prevent entry of debris, until wires are pulled in.
   9. Secure conduits to cabinets, junction boxes, pull boxes and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
   10. Do not use aluminum conduits in wet locations.

B. Conduit Bends:
   1. Make bends with standard conduit bending machines.
   2. Conduit hickey may be used for slight offsets, and for straightening stubbed out conduits.
   3. Bending of conduits with a pipe tee or vise is prohibited.

C. Layout and Homeruns:
   2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted approved by the Resident Engineer.

**3.3 CONCEALED WORK INSTALLATION**

A. In Concrete:
   1. Conduit: Rigid steel, IMC or EMT. Do not install EMT in concrete slabs that are in contact with soil, gravel or vapor barriers.

2. Align and run conduit in direct lines.
3. Install conduit through concrete beams only when the following occurs:
   a. Where shown on the structural drawings.
   b. As approved by the Resident Engineer prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
4. Installation of conduit in concrete that is less than 75 mm (3 inches) thick is prohibited.
   a. Conduit outside diameter larger than 1/3 of the slab thickness is prohibited.
   b. Space between conduits in slabs: Approximately six conduit diameters apart, except one conduit diameter at conduit crossings.
   c. Install conduits approximately in the center of the slab so that there will be a minimum of 19 mm (3/4 inch) of concrete around the conduits.
5. Make couplings and connections watertight. Use thread compounds that are UL approved conductive type to insure low resistance ground continuity through the conduits. Tightening set screws with pliers is prohibited.

**3.4 EXPOSED WORK INSTALLATION**

A. Unless otherwise indicated on the drawings, exposed conduit is only permitted in mechanical and electrical rooms.
B. Align and run conduit parallel or perpendicular to the building lines.
C. Install horizontal runs close to the ceiling or beams and secure with conduit straps.
D. Support horizontal or vertical runs at not over 2400 mm (eight foot) intervals.
E. Painting:
   1. Paint exposed conduit as specified in Section09 91 00, PAINTING.
   Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (two inch) high black numerals and letters, showing the cable voltage rating.

**3.5 CONDUIT SUPPORTS, INSTALLATION**

A. Safe working load shall not exceed 1/4 of proof test load of fastening devices.
B. Use pipe straps or individual conduit hangers for supporting individual conduits. Maximum distance between supports is 2.5 m (8 foot) on center.

C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and 90 kg (200 pounds). Attach each conduit with U-bolts or other approved fasteners.
D. Support conduit independently of junction boxes, pull boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.
E. Fasteners and Supports in Solid Masonry and Concrete:
   1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
   2. Existing Construction:
      a. Steel expansion anchors not less than 6 mm (1/4 inch) bolt size and not less than 28 mm (1-1/8 inch) embedment.
      b. Power set fasteners not less than 6 mm (1/4 inch) diameter with depth of penetration not less than 75 mm (3 inches).
      c. Use vibration and shock resistant anchors and fasteners for attaching to concrete ceilings.
F. Hollow Masonry: Toggle bolts are permitted.
G. Bolts supported only by plaster or gypsum wallboard are not acceptable.
H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.
I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.

**3.6 BOX INSTALLATION**

A. Boxes for Concealed Conduits:
   2. Provide raised covers for boxes to suit the wall or ceiling, construction and finish.
B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling in operations.
C. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
D. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example "SIG-FA JB No. 1".

**3.7 COMMUNICATION SYSTEM CONDUIT**

A. Install the communication raceway system as shown on drawings.

B. Minimum conduit size of 19 mm (3/4 inch), but not less than the size shown on the drawings.
C. All conduit ends shall be equipped with insulated bushings.
D. All 100 mm (four inch) conduits within buildings shall include pull boxes after every two 90 degree bends. Size boxes per the NEC.
E. Vertical conduits/sleeves through ~~closets~~ floors shall terminate not less than 75 mm (3 inches) below the floor and not less than 75 mm (3 inches) below the ceiling of the floor below.
G. Where drilling is necessary for vertical conduits, locate holes so as not to affect structural sections such as ribs or beams.
H. All empty conduits located in communication closets shall be sealed with a standard non-hardening duct seal compound to prevent the entrance of moisture and gases and to meet fire resistance requirements.
I. Conduit runs shall contain no more than four quarter turns (90 degree bends) between pull boxes/backboards. Minimum radius of communication conduit bends shall be as follows (special long radius):

| Sizes of Conduit Trade Size | Radius of Conduit Bends mm, Inches |
|---|---|
| 3/4 | 150 (6) |
| 1 | 230 (9) |
| 1-1/4 | 350 (14) |
| 1-1/2 | 430 (17) |
| 2 | 525 (21) |
| 2-1/2 | 635 (25) |
| 3 | 775 (31) |
| 3-1/2 | 900 (36) |
| 4 | 1125 (45) |

J. Furnish and install 19 mm (3/4 inch) thick fire retardant plywood specified in Section 06 10 00, ROUGH CARPENTRY on the wall of communication closets where shown on drawings.
K. Furnish and pull wire in all empty conduits. (Sleeves through floor are exceptions).

- - - E N D - - -

**SECTION 27 15 00**
**COMMUNICATIONS HORIZONTAL CABLING**

**PART 1 - GENERAL**

## 1.1 DESCRIPTION

A. This Section includes the minimum requirements for the equipment and cable installations for data cabling system, including the work area requirements.

B. This Document specifies the furnishing, installing, certification, testing, and guaranty of a complete and operating Voice and Digital Cable Distribution System (here-in-after referred to as "the System"), and associated equipment and hardware to be installed in new building 115 (Medium Voltage switchgear Building)here-in-after referred to as "the Facility". The System shall include, but not be limited to: equipment cabinets, interface enclosures, and relay racks; and necessary passive devices such as: cable "patch", "punch down", and cross-connector blocks or devices, voice and data distribution sub-systems, and associated hardware. The System shall additionally include, but not be limited to: telecommunication closets (TC); telecommunications outlets (TCO); copper and fiber optic distribution cables, connectors, "patch" cables, and/or "break out" devices.

C. The System shall be delivered free of engineering, manufacturing, installation, and functional defects. It shall be designed, engineered and installed for ease of operation, maintenance, and testing.

D. The term "provide", as used herein, shall be defined as: designed, engineered, furnished, installed, certified, and tested, by the Contractor.

E. The Voice and Digital Telecommunication Distribution Cable Equipment and System provides the media which voice and data information travels over and connects to the Telephone System which is defined as an Emergency Critical Care Communication System by the National Fire Protection Association (NFPA). Therefore, since the System connects to or extends the telephone system, the System's installation and operation shall adhere to all appropriate National, Government, and/or Local Life Safety and/or Support Codes, which ever are the more stringent for this Facility. At a minimum , the System shall be installed according to NFPA, Section 70, National Electrical Code (NEC), Article 517 and Chapter 7; NFPA, Section 99, Health Care Facilities, Chapter 3-4; NFPA, Section 101, Life Safety Code, Chapters 7, 12, and/or 13; Joint Commission on Accreditation of Health Care Organization (JCAHCO), Manual for Health Care Facilities, all necessary Life Safety and/or Support guidelines; this specification; and the original equipment manufacturer's (OEM) suggested installation design, recommendations, and instructions. The OEM and Contractor shall ensure that all management, sales, engineering, and installation personnel have read and understand the requirements of this specification before the System is designed, engineered, delivered, and provided.

F. The VA Project Manager (PM) and/or if delegated, Resident Engineer (RE) are the approving authorities for all contractual and mechanical changes to the System. The Contractor is cautioned to obtain in writing, all approvals for system changes relating to the published contract specifications and drawings, from the PM and/or the RE before proceeding with the change.

## 1.2 QUALITY ASSURANCE

A. All cable and equipment shall be installed in a neat and workman like manner. All methods of construction that are not specifically described or indicated in the contract documents shall be subject to the control and approval of the Owner or Owner's Representative. Equipment and materials shall be of the quality or exceed the quality indicated. Where "approved equal" is stated, equipment shall be equivalent in every way to that of the equipment specified and subject to approval.

B. Strictly adhere to all BICSI and TIA installation practices when installing UTP data cabling.

C. Material and work specified herein shall comply with the applicable requirements listed below unless otherwise indicated by the VA:

1) ANSI/TIA/EIA – 568-A Telecommunications Cabling Standard and addendum ANSI /TIA/EIA 568-A-5

2) ANSI/TIA/EIA –569-A Pathway and Spaces

3) NFPA 70 – 1996

4) ISO – 11801

5) BICSI Telecommunications Distribution Methods Manual

6) FCC 47 CFR 68

7) NEMA –250

8) NEC –Articles 770 and 800

9) ANSI/TIA/EIA 569-A

10) ANSI/TIA/EIA –606

## 1.3 INSTALLATION-JACKS, WALL BOXES AND CABLE

A. Jacks shall be installed to provide minimal signal impairment by preserving wire pair twists as closely as possible to the point of mechanical termination. The amount of untwisting in a pair as a result of termination of the jack IDC shall be no greater 0.25 inches.

B. Jacks shall be installed according to manufacturer's instructions and properly mounted in plates, frames housings or other appropriate mounting device. All cables are to be neatly laced,

dressed and adequately supported per applicable local, sate, and federal codes. Where conduit or tray is not available, the cable contractor shall be responsible for providing and installing D rings, J hooks or bridal type rings every 5’ to adequately support all stations. Cable support rings shall be attached to building structure, not duct or other building systems. All new routes will be mounted just above the drop ceiling level.

C. The wall box will be a single gang box, to enable proper storage of cable. A single telco ivory 4-module wall plate will be used to cover the single gang box.

D. The contractor is responsible for making detailed site survey to determine specific modification required to route and conceal horizontal distribution wiring.

E. No exposed cables shall be run.

F. A cable run shall NOT exceed 275’ in total length from the patch panel to the station wall plate.

G. The “blue” jacketed (Telephone) cable will be terminated (punched down) at the communications closet on the 110 or 210 block and marked with the same location as indicated on the wall plate.

H. The “workstation” end of the blue jacketed cable will be terminated on ports 1 & 2 of the wall plate as follows:

| PIN | PAIR |
|---|---|
| 5 | White/blue |
| 4 | Blue |
| 3 | White-Orange |
| 6 | Orange |
| 1 | White-Green |
| 2 | Green |
| 7 | White-Brown |
| 8 | Brown |

I. The termination procedure described in paragraph H above is an established VA standard which shall be followed for all voice cable installations and terminations.

J. The white jacketed (data) cable will be terminated (punched down) at the communications closet to the patch panel, 24 port, 1U, low profile, patch panel and each cable will be marked at the module and on the front face panel with the room number and location.

K. The white jacketed (data) cables will be terminated on the wall plate modules in accordance to 568A EIA/TIA standards and marked with the room number and location in that room.

L. Category 5e or greater, cable will be used for the installation of ancillary devices such as bells, chimes and beehive lamps unless otherwise specified by the VAMC.

M. To reduce or eliminate EMI, the following minimum separation distances for power lines shall be adhered to:

1) Maintain at least an 18” separation from fluorescent or neon lighting fixtures.
2) Maintain at least a 3.3’ separation from transformers, motor or other sources of electromagnetic fields.
3) Maintain separation from under cabinet fluorescent fixtures installed on modular furniture.

N. Cable ceiling paths shall be perpendicular and/or parallel to ceiling structure.

**1.4 TESTING**

A. Jacks shall be tested as part of the installed horizontal cabling system.
B. Category 5e jacks shall be tested as part of the link or channel for length, DC continuity, NEXT, PSNEXT, Attenuation, return Loss, ELFEXT, and PSELFEXT using a level 11e tester for category 5e link or channel compliance.
C. A “PASS” indication shall be obtained for all link or channel tests when tested using the appropriate level tester for the appropriate category.
D. Testers shall be correctly set to test the type and manufacturer of the horizontal cable used in the link or channel being tested, including the correct NVP.
E. Documentation, indicating the location and test results will be provided to Information Resource Management (IRM) Service at this facility.

**1.5 LABELING-JACKS/OUTLETS AND PATCH PANELS**

A. Each installed outlet will be labeled in a permanent fashion using the room number, jack number and corresponding port assignment number, (see below example):

| Room | Jack | Port |
|---|---|---|
| 1222 | 1 | 1 through 4 (1222-1-1) Voice |
| 1223 | 1 | 1 through 4 (1223-1-4) Data |

B. In rooms with existing jacks installed, contractor must ensure that new jacks are incorporated into existing numbering scheme.
C. Patch panels will also be labeled according to the above numbering standard.
D. IDF/110 blocks will be labeled using the above numbering standard for each corresponding jack installed and/or reinstalled.

**PART 2 - PRODUCTS**

**2.1 MODULAR JACKS**

A. The modular connector shall meet or exceed the requirements for channel and component performance described in the most recent TIA/EIA Category 5e standards. The modular connector shall be individual snap-in style. The connectors shall also be in compliance with all national Electrical Codes; compliant with FCC Part 68: UL listed; and independently certified. In addition to proposed Category 6 compliance, the connector shall have the ability to support high megabit and shared-sheath applications. All plastics used in construction of the connector bodies shall

be fire-retardant with UL flammability rating of 94V-O. Termination of all connectors shall be 110-type insulation displacement connectors (IDC). The connector shall provide a ledge directly adjacent to the 110-style termination against which the wires can be directly terminated and cut in one action by the installation craftsperson. The termination field shall be in the rear for easy access. Colors will be 2 orange in slots 1 & 2 on the top of the wall plate, and 2 black in slots 3 & 4 in the middle of the 6-module wall plate. The manufacturer shall provide a one-year limited product warranty and 15-year product performance guarantee. The manufacturer shall provide a lifetime warranty against defects in material and workmanship, and an application guarantee when installed as part of the certified system.

B. Jacks will be Category 5e Jacks – UTP
C. Jacks shall be 8 position keyed
D. Each jack shall be an individually constructed unit and shall snap mount in an industry standard keystone opening (.760”X 580”).
E. Each jack shall be high impact 94 VO rated thermoplastic.
F. Jack housings shall have an operating temperature range of – 10 C (-14 F) to 60 C (140 F)
G. Jacks shall utilize a four (4) layer printed circuit board technology.
H. Jack housings shall fully encase and protect printed circuit boards and IDC fields.
I. Module jack contacts shall accept a minimum of 2500 plug insertions without degradation of electrical or mechanical performance.
J. Contacts shall maintain a minimum vertical deflection force of 110 grams.
K. Modular jack contact wires shall be formed flat for increased surface contact with mated plugs. These contacts shall be arranged on the PC board in 2 staggered arrays of 4 to maximize contract spacing and minimize crosstalk.
L. Modular jack contacts shall be constructed of Beryllium copper for maximum spring force and resilience.
M. Contact Plating shall be minimum of 50 micro inches of gold in the contact area over 100 micro-inches of nickel.
N. Jacks shall utilize a paired punch down sequence. Cable pairs shall be maintained up to the IDC, terminating all conductors adjacent to its pair mate to better maintain pair characteristics designed by the cable manufacturer.
O. Jacks shall terminate 22-26 AWG stranded or solid conductors
P. Jacks shall terminate insulated conductors with outside diameters up to .050”.
Q. Jacks shall be compatible to single conductor 110 impact termination tools.

R. Jacks shall be compatible with EIA/TIA 606 color code labeling and accept snap on icons for identification or designation of applications.

S. Jacks shall be available in black and orange colors for identification or designation of applications at the workstation or closet.
T. Jacks shall be marked as either T568A or T568B wiring.
U. Jacks shall be supplied with wire retention caps.
V. Jacks shall be supplied with installed dust covers to protect the jack opening and internal elements during installation until the jack is in use.

**2.2 WALL PLATES**

A. 4 port wall plates will be used and have a 45 degree angle to prevent cables from being damaged by furniture. The plates will be designed for high-density Jacks, and snap fittings. The plates will be single-gang, covering the double gang box, 4 port, Telco Ivory in color.
B. The wall plates will be labeled with the room number and plate location identical to the markings at the patch panel i.e.; 1234-1, 2334-2 etc.

**2.3 CABLE**

**A.** Cable-Twisted Pair Category 5 Enhanced UTP Cable
Meet ANSI/EIA/TIA 568B.2-1 Cat 5e specifications, 350MHz or better, NEMA low-loss Extended Frequency, PSUM cross talk compliant.
**B.** Cable-Multimode, Fiber Optic

1) **Attenuation**
The attenuation, of the cabled fiber, shall not exceed 3.5 dB/km at 850 nm and 1.5 dB/km at 1300 nm. The maximum typical attenuation values should be 3.0 dB/km at 850nm and 0.9 dB/km at 1300 nm. Attenuation measurements shall be made in accordance with either EIA-455-46 *Spectral Attenuation Measurement for Long-Length, Graded Index Optical Fiber,* or EIA-455-53, *Attenuation by Substitution Measurement for Multimode Graded-Index Optical Fibers or fiber Assemblies used in Long Length Communication Systems,* or EIA-455-61, *OTDR Measurement of Fiber or Cable Attenuation.*

2) Bandwidth
Bandwidth Distances for Gigabit Ethernet The minimum distance for 1000BaseSX and 1000BaseLX shall be 300 and 700 meters respectively. These distances will be applicable within system attenuation constraints.

3) Laser Certification
All fibers shall be certified to have laser optimized cores. This laser certification is critical for high-speed applications such as Gigabit Ethernet and 10-Gigabit Ethernet that require laser or vertical cavity surface emitting lasers (VCSELs) transmitting devices.

4) **Numerical Aperture**
The numerical aperture shall be .275 ± 0.015 µm.

5) **Macro bending Attenuation**

The maximum induced attenuation shall be less than or equal 0.5 dB at 850 and 1300 nm when wound 100 turns on a 75 mm diameter mandrel.

6) **Zero Dispersion Wavelength and Slope**

The zero dispersion wavelength shall be between 1320 nm and 1365 nm. The maximum zero dispersion slope shall be 0.097 psec/nm-2 km.

7) **Group Refractive Index**

The group refractive index shall be 1.497 at 850 nm and 1.493 at 1300 nm.

**C. GEOMETRICAL REQUIREMENTS**

1) **Core Diameter**

The core diameter shall be 62.5 ± 3 µm. The core diameter shall be measured in accordance with EIA-455-45A, Microscopic Method for Measuring Fiber Geometry of Optical Waveguides.

2) **Core Non-Circularity**

The core non-circularity shall be less than or equal 6%. The core diameter shall be measured in accordance with EIA-455-45A, *Microscopic Method for Measuring Fiber Geometry of Optical Waveguides*.

3) **Cladding Diameter**

The cladding outside diameter shall be 125 ± 2 µm. The cladding diameter shall be measured in accordance with EIA-455-45A, *Microscopic Method for Measuring Fiber Geometry of Optical Waveguides*.

4) **Cladding Non-Circularity**

The cladding non-circularity shall be less than 1%. Measurements shall be in accordance with EIA-455-45A, *Microscopic Method for Measuring Fiber Geometry of Optical Waveguides*.

5) Core/Cladding Concentricity Error

The offset between the center of the core and the center of the cladding shall be less than 1.5 µm.

6) Coating

The coating shall be a UV curable acrylic and shall be 245 ± 10 µm in diameter. The coating shall be readily removable with commercially available stripping tools. Measurements shall be in accordance with either EIA-455-55A, *Methods for Measuring the Coating Geometry of Optical Fibers*. Coating Non-Circularity and Concentricity Error. The coating non-circularity shall be less than or equal 6%. The coating concentricity error shall be less than or equal 12.5 µm. Measurements shall be in accordance with either EIA-455-55A, *Methods for Measuring the Coating Geometry of Optical Fibers.*

Coating Strip Force: The force required to remove the acrylic coating shall be no less than 0.30 lbf and no more than 2.0 lbf.

D. MECHANICAL REQUIREMENTS

1) Fiber Tensile Proof Test

The individual fibers shall be subjected to minimum proof stress of 0.70 $GN/m^2$ (100 kpsi). Testing shall be in accordance with EIA-455-31A, *Fiber Tensile Proof Test Method.*

2) Minimum Bend Radius

The minimum bend radius for unloaded, installed cable, shall be 10 times the cable outside diameter. The minimum bend radius for loaded, cable during installation, shall be 20 times the cable outside diameter. The average increase in attenuation shall no be greater than 0.20 dB. No mechanical damage shall occur to the cable jacket.

3) Impact Resistance

A representative sample of the cable shall withstand the requirements of impact testing without exhibiting an increase in attenuation greater than specified in GR-409-CORE, Section 6.3.2. Testing shall be done in accordance with TIA/EIA-455-25A, *Impact Testing of Fiber Optic Cables and Cable Assemblies*. Total impact energy delivered shall be as shown below:

| Cable Type | Impact Energy |
|---|---|
| **Plenum** | 2.94 N□m (2.17 lbf□ft) |
| **Riser** | 5.88 N□m (4.34 lbf□ft) |
| **Interconnect** | 0.74 N□m (0.54 lbf□ft) |

4) **Compressive Strength**

A representative sample of the cable shall be capable of withstanding a compressive load without exhibiting an increase in attenuation as specified in Section 6.3.2 of GR-409-CORE. Testing shall be done in accordance with TIA/EIA-455-41A, *Compressive Loading Resistance of Fiber Optic Cable*. The minimum resistance to compressive loading shall be as follows:

| Cable Type | Compressive Load |
|---|---|
| **Plenum** | 10 N/mm (57 lbf/in) |

| | |
|---|---|
| **Riser** | 10 N/mm (57 lbf/in) |

5) Tensile Strength
Cables subjected to the minimum rated tensile load defined in GR-409-CORE, Section 6.3.6 (Tensile Strength of Cable) shall not exhibit an increase in attenuation greater than specified by GR-409-CORE, Section 6.3.2. Testing shall be done in accordance with TIA/EIA-455-33A, *Fiber Optic Cable Tensile Loading and Bending Test*.

6) Cable Twist
The cable shall be capable of withstanding mechanical twisting without experiencing an attenuation increase greater than specified by GR-409-CORE, Section 6.3.2. After the cable is subjected to the twist test, the cable jacket shall not exhibit evidence of cracking or splitting when observed under 5x magnification. Testing shall be done in accordance with TIA/EIA-455-85A, *Fiber Optic Cable Twist Test*.

7) Cable Cyclic Flexing
The cable shall be capable of withstanding mechanical flexing without experiencing an increase in attenuation greater than specified by GR-409-CORE, Section 6.3.2. After the cable is subjected to the flex test, the cable jacket shall not exhibit evidence of cracking or splitting when observed under 5x magnification. Testing shall be performed in accordance with EIA-455-104A, *Fiber Optic Cable Cyclic Test*. The cable shall be flexed for the number of cycles specified below and the sheave diameter shall be a maximum of 20 times the cable diameter.

| Cable Type | # of Cycles |
|---|---|
| **Plenum** | 100 |
| **Riser** | 25 |
| **Interconnect** | 300 |

8) Outer Jacket Yield Strength and Ultimate Elongation
The minimum tensile strength shall be 13.8 MPA (2000 psi). After aging, the minimum jacket elongation-at-break shall be greater than 100 percent. The elongation-at-break of the aged jacket shall be greater than 60 percent of the elongation-at-break of the un-aged jacket. Testing shall be done in accordance with EIA-455-89A, *Fiber Optic Cable Jacket Elongation and Tensile Strength.* The following is required to

conduct the test: 1) The speed of jaw separation shall be 50 mm (2 in) per minute; 2) Plenum and Riser cable aged samples shall be conditioned in a circulating air oven at 110 ± 2□C (230 ± 4□F) for seven days.

9) Jacket Shrinkage
The maximum cable jacket shrink back shall be less than 5%. Testing shall be done in accordance with EIA-455-86, *Fiber Optic Cable Jacket Shrinkage*.

10) Temperature
The cable shall maintain optical and mechanical integrity over the following temperature ranges:

| | |
|---|---|
| Operation: | -20□C to +70□C |
| Installation: | 0□C to +70□C |
| Storage: | -40□C to +70□C |

11) Packaging

a. Cable Reels
The cable shall be shipped on non-returnable wooden reels designed to prevent damage to the cable during shipment and installation. Each reel should be clearly marked to indicate the direction in which it should be unrolled to prevent loosening of the cable on the reel.

b. Reel Covering
A covering shall be placed between the flanges over the exposed cable. The covering shall be weather resistance and shall limit solar heating of the cable. Wooden lagging boards may be fastened across the reel flanges or a hard protective wrap will cover the reel.

c. Cable End Requirements
The cable ends shall be securely fastened and positioned in such a way as to allow access for testing.

d. Reel Identification
Each reel of cable shall be stenciled or have a data sheet attached (packaged in a waterproof wrapping) uniquely identifying the reel of cable. The following information must be included: Reel identification number; measured attenuation of each fiber; and length of cable.

e. Quality Control
Each master reel shall be tested to ensure fiber integrity, attenuation, and cable length. Multimode fibers shall be tested at both 850 and 1300 nm. Single mode fibers shall be tested at both 1310 and 1550 nm. Each master reel will be given a unique identification and the test results documented. The manufacture shall maintain documentation such that the cable history may be traced to the individual

fibers used in construction of the cable.

f. Test Report
A test report shall be included with each reel of cable. This test report will include the cable description, unique reel identification, measured length of the cable in meters and feet, attenuation measurements at wavelengths tested and the manufacturer name and address.

**2.4. CABLE -FIBER OPTIC, SINGLE MODE**

A. Optical Parameters

1) Attenuation
The attenuation, of the cabled fiber, shall not exceed 0.7 dB/km at 1310 nm and 1550 nm. Attenuation measurements shall be made in accordance with either EIA-455-78 (Spectral Attenuation Cutback Measurement for Single-Mode Optical Fibers) or with EIA-455-59 (Generic Description of Optical Time Domain Reflectometry ).

2) Attenuation Variation
The attenuation variation shall be less than 0.1 dB/km for wavelengths between 1285 nm and 1330 nm compared to the attenuation at 1310 nm. The attenuation variation shall be less than 0.5 dB/km for wavelengths between 1525 nm and 1575 nm compared to the attenuation at 1550nm. Attenuation variation measurements shall be made in accordance with EIA-455-78, Spectral Attenuation Cutback Measurement for Single-Mode Optical Fibers.

3) Attenuation at Water Peak
The attenuation shall not exceed 2.0 dB/Km at 1383 nm ±3 nm.

4) Attenuation Uniformity
The attenuation discontinuity shall not exceed 0.1 dB at 1310 nm or 1550 nm throughout the cable length. Attenuation Uniformity measurements shall be made in accordance with EIA-455-59, Generic Description of Optical Time Domain Reflectometry.

5) Macro bending Attenuation
The maximum induced attenuation shall be less than or equal 0.5 dB at 1310 and 0.10 dB at 1550 nm when wound 100 turns on a 75 mm diameter mandrel.

6) Index of Refraction
The effective group index of refraction will be 1.464 at 1310 nm and 1.465 at 1550 nm.

7) Chromatic Dispersion
The zero dispersion wavelength shall be between 1300 to 1320 nm, and the nominal zero dispersion wavelength should be 1310 nm. The maximum value of the dispersion slope shall not be greater than 0.092 psec/(nm-2 km) at the zero dispersion wavelength.
The dispersion measurements shall be made in accordance with EIA-455-168, Chromatic Dispersion Measurement of Multimode Graded-Index and Single-Mode Optical Fibers by Phase- Revision 1, May 18, 2000 Shift Method, or EIA-455-

175, Chromatic Dispersion Measurement of Optical Fibers by The Differential Phase Shift Method.

8) Cut-off Wavelength
The cut-off wavelength shall be less than or equal to 1260 nm for the cabled fiber. Measurement shall be made on a routine basis according to EIA-455-170, Cut-off Wavelength of Single-Mode Fiber Cable by Transmitted Power, or EIA-455-80, Cut-off Wavelength of Uncabled Single-Mode Fiber by Transmitted Power.

B. Geometrical Parameters

1) Cladding Diameter
The cladding outside diameter shall be 125 ± 1.0 µm. The cladding diameter shall be measured in accordance with EIA-455-45A, Microscopic Method for Measuring Fiber Geometry of Optical Waveguide Fibers.

2) Cladding Non-circularity
The cladding non-circularity shall be less than 1%. Measurement shall be in accordance with EIA-455-45A, Microscopic Method for Measuring Fiber Geometry of Optical Waveguide Fibers.

3) Core/Cladding Concentricity Error
The offset between the center of the core and the center of the cladding shall be less than 0.6 µm.

4) Coating
The coating shall be a UV curable acrylic and shall be 245 ± 10 µm in diameter. The coating shall be readily removable with commercially available stripping tools. Measurements shall be in accordance with either EIA-455-55A, Methods for Measuring the Coating Geometry of Optical Fibers or EIA-455-48A, On-Line Diameter Measurement of Optical Waveguides.

C. Mechanical Parameters

1) Fiber Tensile Proof Test
The individual fibers shall be subjected to minimum proof stress of 0.70 GN/m2 (100 kpsi). Testing shall be in accordance with EIA-455-31A.

**2.5 PATCH PANELS**

A. The Cat 6 Patch Panel will be 19” rack mount 24 port, 1U, with a 1U cable management rack, meeting or exceeding all proposed TIA/EIA and ISO/IEC Category 6 component-level standards specifications. Leviton product “extreme 6, 24 port, 1u is recommended.

B. All installed horizontal voice cable (Blue) will be terminated on existing or contractor provided 110 \blocks in the designated communications closet.

C. All installed horizontal data cable (White) will be terminated on existing or contractor provided patch panels meeting the above Category 5e component level standards in the designated communications closet.

D. The fiber optic patch panel will be a 1U, 24 ports, and fully loaded unit, with SC connectors.

- - - E N D - - -

# SECTION 28 05 00
# COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This Section, Common Work Results for Electronic Safety and Security (ESS), applies to all sections of Division 28.

B. Furnish and install fully functional electronic safety and security cabling system(s), equipment and approved accessories in accordance with the specification section(s), drawing(s), and referenced publications. Capacities and ratings of cable and other items and arrangements for the specified items are shown on each system's required Bill of Materials (BOM) and verified on the approved system drawing(s). If there is a conflict between contract's specification(s) and drawings(s), the contract's specification requirements shall prevail.

C. The Contractor shall provide an ESS, installed, programmed, configured, documented, and tested. The security system shall include but not limited to: physical access control, video assessment and surveillance, video recording and storage, fire alarm interface, equipment cabinetry, and associated live camera, interface. Operator training shall not be required as part of the Security Contractors scope and shall be provided by the Owner. The Security Contractor shall still be required to provide necessary maintenance and troubleshooting manuals as well as submittals as identified herein. The work shall include the procurement and installation of electrical wire and cables, the installation and testing of all system components. Inspection, testing, demonstration, and acceptance of equipment, software, materials, installation, documentation, and workmanship, shall be as specified herein. The Contractor shall provide all associated installation support, including the provision of primary electrical input power circuits.

D. Repair Service Replacement Parts On-site service during the warranty period shall be provided as specified under "Emergency Service". The Contractor shall guarantee all parts and labor for a term of one (1) year, unless dictated otherwise in this specification from the acceptance date of the system as described in Part 5 of this Specification. The Contractor shall be responsible for all equipment, software, shipping, transportation charges, and expenses associated with the service of the system for one (1) year. The Contractor shall provide 24-hour telephone support for the software program at no

additional charge to the owner. Software support shall include all software updates that occur during the warranty period.

F. Section Includes:
   1. Description of Work for Electronic Security Systems,
   2. Electronic security equipment coordination with relating Divisions,
   3. Submittal Requirements for Electronic Security,
   4. Miscellaneous Supporting equipment and materials for Electronic Security,
   5. Electronic security installation requirements.

**1.2 RELATED WORK**

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.
B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.
C. Section 08 71 00 - DOOR HARDWARE. Requirements for door installation.
D. Section 10 14 00 - SIGNAGE. Requirements for labeling and signs.
E. Section 26 05 11 - REQUIREMENTS FOR ELECTRICAL INSTALLATIONS. Requirements for connection of high voltage.
F. Section 26 05 21 - LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Requirements for power cables.
G. Section 26 05 33 – RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS. Requirements for infrastructure.
H. Section 26 05 41 - UNDERGROUND ELECTRICAL CONSTRUCTION. Requirements for underground installation of wiring.
I. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.
J. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.
K. Section 28 13 00 - PHYSICAL ACCESS CONTROL SYSTEMS (PACS). For physical access control integration.
L. Section 28 23 00 - VIDEO SURVEILLANCE. Requirements for security camera systems.

**1.3 DEFINITIONS**

A. AGC: Automatic Gain Control.
B. Basket Cable Tray: A fabricated structure consisting of wire mesh bottom and side rails.
C. BICSI: Building Industry Consulting Service International.

D. CCD: Charge-coupled device.
E. Central Station: A PC with software designated as the main controlling PC of the security access system. Where this term is presented with initial capital letters, this definition applies.
F. Channel Cable Tray: A fabricated structure consisting of a one-piece, ventilated-bottom or solid-bottom channel section.
G. Controller: An intelligent peripheral control unit that uses a computer for controlling its operation. Where this term is presented with an initial capital letter, this definition applies.
H. CPU: Central processing unit.
I. Credential: Data assigned to an entity and used to identify that entity.
J. DGP: Data Gathering Panel - component of the Physical Access Control System capable to communicate, store and process information received from readers, reader modules, input modules, output modules, and Security Management System.
K. DTS: Digital Termination Service: A microwave-based, line-of-sight communications provided directly to the end user.
L. EMI: Electromagnetic interference.
M. EMT: Electric Metallic Tubing.
N. ESS: Electronic Security System.
O. File Server: A PC in a network that stores the programs and data files shared by users.
P. GFI: Ground fault interrupter.
Q. IDC: Insulation displacement connector.
R. Identifier: A credential card, keypad personal identification number or code, biometric characteristic, or other unique identification entered as data into the entry-control database for the purpose of identifying an individual. Where this term is presented with an initial capital letter, this definition applies.
S. I/O: Input/Output.
T. Intrusion Zone: A space or area for which an intrusion must be detected and uniquely identified, the sensor or group of sensors assigned to perform the detection, and any interface equipment between sensors and communication link to central-station control unit.
U. Ladder Cable Tray: A fabricated structure consisting of two longitudinal side rails connected by individual transverse members (rungs).
V. LAN: Local area network.

W. LCD: Liquid-crystal display.

X. LED: Light-emitting diode.

Y. Location: A Location on the network having a PC-to-Controller communications link, with additional Controllers at the Location connected to the PC-to-Controller link with RS-485 communications loop. Where this term is presented with an initial capital letter, this definition applies.

Z. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 V or for remote-control and signaling power-limited circuits.

AA. M-JPEG: Motion – Joint Photographic Experts Group.

BB. MPEG: Moving picture experts group.

CC. NEC: National Electric Code

DD. NEMA: National Electrical Manufacturers Association

EE. NFPA: National Fire Protection Association

FF. NTSC: National Television System Committee.

GG. NRTL: Nationally Recognized Testing Laboratory.

HH. Open Cabling: Passing telecommunications cabling through open space (e.g., between the studs of a wall cavity).

II. PACS: Physical Access Control System; A system comprised of cards, readers, door controllers, servers and software to control the physical ingress and egress of people within a given space

JJ. PC: Personal computer. This acronym applies to the Central Station, workstations, and file servers.

KK. PCI Bus: Peripheral component interconnect; a peripheral bus providing a high-speed data path between the CPU and peripheral devices (such as monitor, disk drive, or network).

LL. PDF: (Portable Document Format.) The file format used by the Acrobat document exchange system software from Adobe.

MM. RCDD: Registered Communications Distribution Designer.

NN. RFI: Radio-frequency interference.

OO. RIGID: Rigid conduit is galvanized steel tubing, with a tubing wall that is thick enough to allow it to be threaded.

PP. RS-232: An TIA/EIA standard for asynchronous serial data communications between terminal devices. This standard defines a 25-pin connector and certain signal characteristics for interfacing computer equipment.

QQ. RS-485: An TIA/EIA standard for multipoint communications.

RR. Solid-Bottom or Non-ventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal side rails, and a bottom without ventilation openings.

SS. SMS: Security Management System – A SMS is software that incorporates multiple security subsystems (e.g., physical access control, intrusion detection, closed circuit television, intercom) into a single platform and graphical user interface.

TT. TCP/IP: Transport control protocol/Internet protocol incorporated into Microsoft Windows.

UU. Trough or Ventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal rails and a bottom having openings sufficient for the passage of air and using 75 percent or less of the plan area of the surface to support cables.

VV. UPS: Uninterruptible Power Supply

XX. UTP: Unshielded Twisted Pair

YY. Workstation: A PC with software that is configured for specific limited security system functions.

**1.4 QUALITY ASSURANCE**

A. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.

B. Product Qualification:

1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.

C. Contractor Qualification:

1. The Contractor or security sub-contractor shall be a licensed security Contractor with a minimum of five (5) years experience installing and servicing systems of similar scope and complexity. The Contractor shall be an authorized regional representative of the Security Management System’s (PACS) manufacturer. The Contractor shall provide four (4) current references from clients with systems of similar scope and complexity which became operational in the past three (3) years. At least three (3) of the references shall be

utilizing the same system components, in a similar configuration as the proposed system. The references must include a current point of contact, company or agency name, address, telephone number, complete system description, date of completion, and approximate cost of the project. The owner reserves the option to visit the reference sites, with the site owner's permission and representative, to verify the quality of installation and the references' level of satisfaction with the system. The Contractor shall provide copies of system manufacturer certification for all technicians. The Contractor shall only utilize factory-trained technicians to install, program, and service the PACS. The Contractor shall only utilize factory-trained technicians to install, terminate and service controller/field panels and reader modules. The technicians shall have a minimum of five (5) continuous years of technical experience in electronic security systems. The Contractor shall have a local service facility. The facility shall be located within 60 miles of the project site. The local facility shall include sufficient spare parts inventory to support the service requirements associated with this contract. The facility shall also include appropriate diagnostic equipment to perform diagnostic procedures. The Resident Engineer reserves the option of surveying the company's facility to verify the service inventory and presence of a local service organization.

2. The Contractor shall provide proof project superintendent with BICSI Certified Commercial Installer Level 1, Level 2, or Technician to provide oversight of the project.
3. Cable installer must have on staff a Registered Communication Distribution Designer (RCDD) certified by Building Industry Consulting Service International. The staff member shall provide consistent oversight of the project cabling throughout design, layout, installation, termination and testing.

D. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

**1.5 GENERAL ARANGEMENT OF CONTRACT DOCUMENTS**

A. The Contract Documents supplement to this specification indicates approximate locations of equipment. The installation and/or locations

of the equipment and devices shall be governed by the intent of the design; specification and Contract Documents, with due regard to actual site conditions, recommendations, ambient factors affecting the equipment and operations in the vicinity. The Contract Documents are diagrammatic and do not reveal all offsets, bends, elbows, components, materials, and other specific elements that may be required for proper installation. If any departure from the contract documents is deemed necessary, or in the event of conflicts, the Contractor shall submit details of such departures or conflicts in writing to the owner or owner’s representative for his or her comment and/or approval before initiating work.

B. Anything called for by one of the Contract Documents and not called for by the others shall be of like effect as if required or called by all, except if a provision clearly designed to negate or alter a provision contained in one or more of the other Contract Documents shall have the intended effect. In the event of conflicts among the Contract Documents, the Contract Documents shall take precedence in the following order: the Form of Agreement; the Supplemental General Conditions; the Special Conditions; the Specifications with attachments; and the drawings.

**1.6 SUBMITTALS**

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. The Government's approval shall be obtained for all equipment and material before delivery to the job site. Delivery, storage or installation of equipment or material which has not had prior approval will not be permitted at the job site.

C. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.

1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
3. Submit each section separately.

D. The submittals shall include the following:

1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog

information, technical data sheets, shop drawings, pictures, nameplate data and test reports as required.

3. Parts list which shall include those replacement parts recommended by the equipment manufacturer, quantity of parts, current price and availability of each part.

E. Submittals shall be in full compliance of the Contract Documents. All submittals shall be provided in accordance with this section. Submittals lacking the breath or depth these requirements will be considered incomplete and rejected. Submissions are considered multidisciplinary and shall require coordination with applicable divisions to provide a complete and comprehensive submission package. All submittals shall include adequate descriptive literature, catalog cuts, shop drawings and other data necessary for the Government to ascertain that the proposed equipment and materials comply with specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify equipment being submitted. Additional general provisions are as follows:

1. The Contractor shall schedule submittals in order to maintain the project schedule. For coordination drawings refer to Specification Section 01 33 10 - Design Submittal Procedures, which outline basic submittal requirements and coordination. Section 01 33 10 shall be used in conjunction with this section.
2. The Contractor shall identify variations from requirements of Contract Documents and state product and system limitations, which may be detrimental to successful performance of the completed work or system.
3. Each package shall be submitted at one (1) time for each review and include components from applicable disciplines (e.g., electrical work, architectural finishes, door hardware, etc.) which are required to produce an accurate and detailed depiction of the project.
4. Manufacturer’s information used for submittal shall have pages with items for approval tagged, items on pages shall be identified, and capacities and performance parameters for review shall be clearly marked through use of an arrow or highlighting. Provide space for Resident Engineer and Contractor review stamps.
5. Technical Data Drawings shall be in the latest version of AutoCAD®, drawn accurately, and in accordance with VA CAD Standards CAD Standard Application Guide, and VA BIM Guide. FREEHAND SKETCHES OR COPIED VERSIONS OF THE CONSTRUCTION DOCUMENTS WILL NOT BE ACCEPTED.

The Contractor shall not reproduce Contract Documents or copy standard information as the basis of the Technical Data Drawings. If departures from the technical data drawings are subsequently deemed necessary by the Contractor, details of such departures and the reasons thereof shall be submitted in writing to the Resident Engineer for approval before the initiation of work.

6. Packaging: The Contractor shall organize the submissions according to the following packaging requirements.
   a. Binders: For each manual, provide heavy duty, commercial quality, durable three (3) ring vinyl covered loose leaf binders, sized to receive 8.5 x 11 in paper, and appropriate capacity to accommodate the contents. Provide a clear plastic sleeve on the spine to hold labels describing the contents. Provide pockets in the covers to receive folded sheets.
      1) Where two (2) or more binders are necessary to accommodate data; correlate data in each binder into related groupings according to the Project Manual table of contents. Cross-referencing other binders where necessary to provide essential information for communication of proper operation and/or maintenance of the component or system.
      2) Identify each binder on the front and spine with printed binder title, Project title or name, and subject matter covered. Indicate the volume number if applicable.
   b. Dividers: Provide heavy paper dividers with celluloid tabs for each Section. Mark each tab to indicate contents.
   c. Protective Plastic Jackets: Provide protective transparent plastic jackets designed to enclose diagnostic software for computerized electronic equipment.
   d. Text Material: Where written material is required as part of the manual use the manufacturer's standard printed material, or if not available, specially prepared data, neatly typewritten on 8.5 inches by 11 inches 20 pound white bond paper.
   e. Drawings: Where drawings and/or diagrams are required as part of the manual, provide reinforced punched binder tabs on the drawings and bind them with the text.
      1) Where oversized drawings are necessary, fold the drawings to the same size as the text pages and use as a foldout.
      2) If drawings are too large to be used practically as a foldout, place the drawing, neatly folded, in the front or rear pocket

of the binder. Insert a type written page indicating the drawing title, description of contents and drawing location at the appropriate location of the manual.

3) Drawings shall be sized to ensure details and text is of legible size. Text shall be no less than 1/16” tall.

f. Manual Content: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

1) Maintenance and Operation Manuals: Submit as required for systems and equipment specified in the technical sections. Furnish four copies, bound in hardback binders, (manufacturer's standard binders) or an approved equivalent. Furnish one complete manual as specified in the technical section but in no case later than prior to performance of systems or equipment test, and furnish the remaining manuals prior to contract completion.

2) Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, equipment, building, name of Contractor, and contract number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the system or equipment.

3) The manuals shall include:

a) Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.

b) A control sequence describing start-up, operation, and shutdown.

c) Description of the function of each principal item of equipment.

d) Installation and maintenance instructions.

e) Safety precautions.

f) Diagrams and illustrations.

g) Testing methods.

h) Performance data.

i) Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare parts, and name of servicing organization.

j) Appendix; list qualified permanent servicing organizations for support of the equipment, including addresses and certified qualifications.

g. Binder Organization: Organize each manual into separate sections for each piece of related equipment. At a minimum, each manual shall contain a title page, table of contents, copies of Product Data supplemented by drawings and written text, and copies of each warranty, bond, certifications, and service Contract issued. Refer to Group I through V Technical Data Package Submittal requirements for required section content.

h. Title Page: Provide a title page as the first sheet of each manual to include the following information; project name and address, subject matter covered by the manual, name and address of the Project, date of the submittal, name, address, and telephone number of the Contractor, and cross references to related systems in other operating and/or maintenance manuals.

i. Table of Contents: After the title page, include a type written table of contents for each volume, arranged systematically according to the Project Manual format. Provide a list of each product included, identified by product name or other appropriate identifying symbols and indexed to the content of the volume. Where more than one (1) volume is required to hold data for a particular system, provide a comprehensive table of contents for all volumes in each volume of the set.

j. General Information Section: Provide a general information section immediately following the table of contents, listing each product included in the manual, identified by product name. Under each product, list the name, address, and telephone number of the installer and maintenance Contractor. In addition, list a local source for replacement parts and equipment.

k. Drawings: Provide specially prepared drawings where necessary to supplement the manufacturers printed data to illustrate the relationship between components of equipment or systems, or provide control or flow diagrams. Coordinate these drawings with information contained in Project Record Drawings to assure correct illustration of the completed installation.

l. Manufacturer’s Data: Where manufacturer's standard printed data is included in the manuals, include only those sheets that are pertinent to the part or product installed. Mark each sheet to

identify each part or product included in the installation. Where more than one (1) item in tabular format is included, identify each item, using appropriate references from the Contract Documents. Identify data that is applicable to the installation and delete references to information which is not applicable.

m. Where manufacturer's standard printed data is not available and the information is necessary for proper operation and maintenance of equipment or systems, or it is necessary to provide additional information to supplement the data included in the manual, prepare written text to provide the necessary information. Organize the text in a consistent format under a separate heading for different procedures. Where necessary, provide a logical sequence of instruction for each operating or maintenance procedure. Where similar or more than one product is listed on the submittal the Contractor shall differentiate by highlighting the specific product to be utilized.

n. Calculations: Provide a section for circuit and panel calculations.

o. Loading Sheets: Provide a section for DGP Loading Sheets.

p. Certifications: Provide section for Contractor’s manufacturer certifications.

7. Contractor Review: Review submittals prior to transmittal. Determine and verify field measurements and field construction criteria. Verify manufacturer’s catalog numbers and conformance of submittal with requirements of contract documents. Return non-conforming or incomplete submittals with requirements of the work and contract documents. Apply Contractor’s stamp with signature certifying the review and verification of products occurred, and the field dimensions, adjacent construction, and coordination of information is in accordance with the requirements of the contract documents.

8. Resubmission: Revise and resubmit submittals as required within 15 calendar days of return of submittal. Make resubmissions under procedures specified for initial submittals. Identify all changes made since previous submittal.

9. Product Data: Within 15 calendar days after execution of the contract, the Contractor shall submit for approval a complete list of all of major products proposed for use. The data shall include name of manufacturer, trade name, model number, the associated contract

document section number, paragraph number, and the referenced standards for each listed product.

F. Group 1 Technical Data Package: Group I Technical Data Package shall be one submittal consisting of the following content and organization. Refer to VA Special Conditions Document for drawing format and content requirements. The data package shall include the following:

1. Section I - Drawings:
   a. General – Drawings shall conform to VA CAD Standards Guide. All text associated with security details shall be 1/8” tall and meet VA text standard for AutoCAD™ drawings.
   b. Cover Sheet – Cover sheet shall consist of Project Title and Address, Project Number, Area and Vicinity Maps.
   c. General Information Sheets – General Information Sheets shall consist of General Notes, Abbreviations, Symbols, Wire and Cable Schedule, Project Phasing, and Sheet Index.
   d. Floor Plans – Floor plans shall be produced from the Architectural backgrounds issued in the Construction Documents. The contractor shall receive floor plans from the prime A/E to develop these drawing sets. Security devices shall be placed on drawings in scale. All text associated with security details shall be 1/8” tall and meet VA text standard for AutoCAD™ drawings. Floor plans shall identify the following:
      1) Security devices by symbol,
      2) The associated device point number (derived from the loading sheets),
      3) Wire & cable types and counts
      4) Conduit sizing and routing
      5) Conduit riser systems
      6) Device and area detail call outs
   e. Architectural details – Architectural details shall be produced for each device mounting type (door details for EECS and IDS, Intrusion Detection system and Camera mounting).
   f. Riser Diagrams – Contractor shall provide a riser diagram indicating riser architecture and distribution of the SMS throughout the area in scope.
   g. Block Diagrams – Contractor shall provide a block diagram for the entire system architecture and interconnections with SMS subsystems. Block diagram shall identify SMS subsystem (e.g., electronic entry control, intrusion detection, closed circuit

television, intercom, and other associated subsystems) integration; and data transmission and media conversion methodologies.

h. Interconnection Diagrams – Contractor shall provide interconnection diagram for each sensor, and device component. Interconnection diagram shall identify termination locations, standard wire detail to include termination schedule. Diagram shall also identify interfaces to other systems such as elevator control, fire alarm systems, and security management systems.

i. Security Details:

1) Panel Assembly Detail – For each panel assembly, a panel assembly details shall be provided identifying individual panel component size and content.
2) Panel Details – Provide security panel details identify general arrangement of the security system components, backboard size, wire through size and location, and power circuit requirements.
3) Device Mounting Details – Provide mounting detailed drawing for each security device (physical access control system, intrusion detection, video surveillance and assessment, and intercom systems) for each type of wall and ceiling configuration in project. Device details shall include device, mounting detail, wiring and conduit routing.
4) Details of connections to power supplies and grounding
5) Details of surge protection device installation
6) Sensor detection patterns – Each system sensor shall have associated detection patterns.
7) Equipment Rack Detail – For each equipment rack, provide a scaled detail of the equipment rack location and rack space utilization. Use of BISCI wire management standards shall be employed to identify wire management methodology. Transitions between equipment racks shall be shown to include use vertical and horizontal latter rack system.
8) Security Control Room – The contractor shall provide a layout plan for the Security Control Room. The layout plan shall identify all equipment and details associated with the installation.
9) Operator Console – The contractor shall provide a layout plan for the Operator Console. The layout plan shall identify all equipment and details associated with the installation.

Equipment room - the contractor shall provide a layout plan for the equipment room. The layout plan shall identify all equipment and details associated with the installation.

10) Equipment Room – Equipment room details shall provide architectural, electrical, mechanical, plumbing, IT/Data and associated equipment and device placements both vertical and horizontally.

j. Electrical Panel Schedule – Electrical Panel Details shall be provided for all SMS systems electrical power circuits. Panel details shall be provided identifying panel type (Standard, Emergency Power, Emergency/Uninterrupted Power Source, and Uninterrupted Power Source Only), panel location, circuit number, and circuit amperage rating.

k. Door Schedule – A door schedule shall be developed for each door equipped with electronic security components. At a minimum, the door schedule shall be coordinated with Division 08 work and include the following information:

1) Item Number
2) Door Number (Derived from A/E Drawings)
3) Floor Plan Sheet Number
4) Standard Detail Number
5) Door Description (Derived from Loading Sheets)
6) Data Gathering Panel Input Number
7) Door Position or Monitoring Device Type & Model Number
8) Lock Type, Model Number & Power Input/Draw (standby/active)
9) Card Reader Type & Model Number
10) Shunting Device Type & Model Number
11) Sounder Type & Model Number
12) Manufacturer
13) Misc. devices as required
    a) Delayed Egress Type & Model Number
    b) Intercom
    c) Camera
    d) Electric Transfer Hinge
    e) Electric Pass-through device
14) Remarks column indicating special notes or door configurations

2. Camera Schedule - A camera schedule shall be developed for each camera. Contractors shall coordinate with the Resident Engineer to determine camera starting numbers and naming conventions. All

drawings shall identify wire and cable standardization methodology. Color coding of all wiring conductors and jackets is required and shall be communicated consistently throughout the drawings package submittal. At a minimum, the camera schedule shall include the following information:

a. Item Number
b. Camera Number
c. Naming Conventions
d. Description of Camera Coverage
e. Camera Location
f. Floor Plan Sheet Number
g. Camera Type
h. Mounting Type
i. Standard Detail Reference
j. Power Input & Draw
k. Power Panel Location
l. Remarks Column for Camera

3. Section II – Data Gathering Panel Documentation Package
   a. Contractor shall provide Data Gathering Panel (DGP) input and output documentation packages for review at the Shop Drawing submittal stage and also with the as-built documentation package. The documentation packages shall be provided in both printed and magnetic form at both review stages.
   b. The Contractor shall provide loading sheet documentation package for the associated DGP, including input and output boards for all field panels associated with the project. Documentation shall be provided in current version Microsoft Excel spreadsheets following the format currently utilized by VA. A separate spreadsheet file shall be generated for each DGP and associated field panels.
   c. The spreadsheet names shall follow a sequence that shall display the spreadsheets in numerical order according to the DGP system number. The spreadsheet shall include the prefix in the file name that uniquely identifies the project site. The spreadsheet shall detail all connected items such as card readers, alarm inputs, and relay output connections. The spreadsheet shall include an individual section (row) for each panel input, output and card reader. The spreadsheet shall automatically calculate the system numbers for card readers, inputs, and outputs based upon data entered in initialization fields.

d. All entries must be verified against the field devices. Copies of the floor plans shall be forwarded under separate cover.
e. The DGP spreadsheet shall include an entry section for the following information:
   1) DGP number
   2) First Reader Number
   3) First Monitor Point Number
   4) First Relay Number
   5) DGP, input or output Location
   6) DGP Chain Number
   7) DGP Cabinet Tamper Input Number
   8) DGP Power Fail Input Number
   9) Number of Monitor Points Reserved For Expansion Boards
   10) Number of Control Points (Relays) Reserved For Expansion Boards
f. The DGP, input module and output module spreadsheets shall automatically calculate the following information based upon the associated entries in the above fields:
   1) System Numbers for Card Readers
   2) System Numbers for Monitor Point Inputs
   3) System Numbers for Control Points (Relays)
   4) Next DGP or input module First Monitor Point Number
   5) Next DGP or output module First Control Point Number
g. The DGP spreadsheet shall provide the following information for each card reader:
   1) DGP Reader Number
   2) System Reader Number
   3) Cable ID Number
   4) Description Field (Room Number)
   5) Description Field (Device Type i.e.: In Reader, Out Reader, etc.)
   6) Description Field
   7) DGP Input Location
   8) Date Test
   9) Date Passed
   10) Cable Type
   11) Camera Numbers (of cameras viewing the reader location)
h. The DGP and input module spreadsheet shall provide the following information for each monitor point (alarm input).
   1) DGP Monitor Point Input Number

2) System Monitor Point Number
3) Cable ID Number
4) Description Field (Room Number)
5) Description Field (Device Type i.e.: Door Contact, Motion Detector, etc.)
7) DGP or input module Input Location
8) Date Test
9) Date Passed
10) Cable Type
11) Camera Numbers (of associated alarm event preset call-ups)

i. The DGP and output module spreadsheet shall provide the following information for each control point (output relay).
1) DGP Control Point (Relay) Number
2) System (Control Point) Number
3) Cable ID Number
4) Description Field (Room Number)
5) Description Field (Device: Lock Control, Local Sounder, etc.)
6) Description Field
7) DGP or OUTPUT MODULE Output Location
8) Date Test
9) Date Passed Cable Type
10) Camera Number (of associated alarm event preset call-ups)

j. The DGP, input module and output module spreadsheet shall include the following information or directions in the header and footer:
1) Header
a) DGP Input and Output Worksheet
b) Enter Beginning Reader, Input, and Output Starting Numbers and Sheet Will Automatically Calculate the Remaining System Numbers.
2) Footer
a) File Name
b) Date Printed
c) Page Number

5. Section IV - Manufacturers' Data: The data package shall include manufacturers' data for all materials and equipment, including sensors, local processors and console equipment provided under this specification.
6. Section V - System Description and Analysis: The data package shall include system descriptions, analysis, and calculations used in

sizing equipment required by these specifications. Descriptions and calculations shall show how the equipment will operate as a system to meet the performance requirements of this specification. The data package shall include the following:

a. Central processor memory size; communication speed and protocol description; rigid disk system size and configuration; flexible disk system size and configuration; back-up media size and configuration; alarm response time calculations; command response time calculations; start-up operations; expansion capability and method of implementation; sample copy of each report specified; and color photographs representative of typical graphics.

b. Software Data: The data package shall consist of descriptions of the operation and capability of the system, and application software as specified.

c. Overall System Reliability Calculations: The data package shall include all manufacturers' reliability data and calculations required to show compliance with the specified reliability.

7. Section VI – Certifications & References: All specified manufacturer's certifications shall be included with the data package. Contractor shall provide Project references as outlined in Paragraph 1.4 "Quality Assurance".

G. Group II Technical Data Package

1. The Contractor shall prepare a report of "Current Site Conditions" and submit a report to the Resident Engineer documenting changes to the site, particularly those conditions that affect performance of the system to be installed. The Contractor shall provide specification sheets, or written functional requirements to support the findings, and a cost estimate to correct those site changes or conditions which affect the installation of the system or its performance. The Contractor shall not correct any deficiency without written permission from the Resident Engineer.

2. System Configuration and Functionality: The contractor shall provide the results of the meeting with VA to develop system requirements and functionality including but not limited to:

a. Baseline configuration

b. Access levels

c. Schedules (intrusion detection, physical access control, holidays, etc.)

d. Badge database

e. System monitoring and reporting (unit level and central control)
f. Naming conventions and descriptors

H. Group III Technical Data Package
1. Development of Test Procedures: The Contractor will prepare performance test procedures for the system testing. The test procedures shall follow the format of the VA Testing procedures and be customized to the contract requirements. The Contractor will deliver the test procedures to the Resident Engineer for approval at least 60 calendar days prior to the requested test date.

I. Group IV Technical Data Package
1. Performance Verification Test
a. Based on the successful completion of the pre-delivery test, the Contractor shall finalize the test procedures and report forms for the performance verification test (PVT) and the endurance test. The PVT shall follow the format, layout and content of the pre-delivery test. The Contractor shall deliver the PVT and endurance test procedures to the Resident Engineer for approval. The Contractor may schedule the PVT after receiving written approval of the test procedures. The Contractor shall deliver the final PVT and endurance test reports within 14 calendar days from completion of the tests. Refer to Part 3 of this section for System Testing and Acceptance requirements.
2. Training Documentation
3. System Configuration and Data Entry:
a. The contractor is responsible for providing all system configuration and data entry for the SMS and subsystems (e.g., video matrix switch, intercom, digital video recorders, network video recorders). All data entry shall be performed per VA standards & guidelines. The Contractor is responsible for participating in all meetings with the client to compile the information needed for data entry. These meetings shall be established at the beginning of the project and incorporated in to the project schedule as a milestone task. The contractor shall be responsible for all data collection, data entry, and system configuration. The contractor shall collect, enter, & program and/or configure the following components:
1) Physical Access control system components,
2) Video surveillance, control and recording systems,
3) All other security subsystems shown in the contract documents.

b. The Contractor is responsible for compiling the card access database for the VA employees, including programming reader configurations, access shifts, schedules, exceptions, card classes and card enrollment databases.

c. Refer to Part 3 for system programming requirements and planning guidelines.

4. Graphics: Based on CAD as-built drawings developed for the construction project, create all map sets showing locations of all alarms and field devices. Graphical maps of all alarm points installed under this contract including perimeter and exterior alarm points shall be delivered with the system. The Contractor shall create and install all graphics needed to make the system operational. The Contractor shall utilize data from the contract documents, Contractor's field surveys, and all other pertinent information in the Contractor's possession to complete the graphics. The Contractor shall identify and request from the Resident Engineer, any additional data needed to provide a complete graphics package. Graphics shall have sufficient level of detail for the system operator to assess the alarm. The Contractor shall supply hard copy, color examples at least 203.2 x 254 mm (8 x 10 in) of each type of graphic to be used for the completed Security system. The graphics examples shall be delivered to the Resident Engineer for review and approval at least 90 calendar days prior to the scheduled date the Contractor requires them.

J. Group V Technical Data Package: Final copies of the manuals shall be delivered to the Resident Engineer as part of the acceptance test. The draft copy used during site testing shall be updated with any changes required prior to final delivery of the manuals. Each manual's contents shall be identified on the cover. The manual shall include names, addresses, and telephone numbers of each sub-contractor installing equipment or systems, as well as the nearest service representatives for each item of equipment for each system. The manuals shall include a table of contents and tab sheets. Tab sheets shall be placed at the beginning of each chapter or section and at the beginning of each appendix. The final copies delivered after completion of the endurance test shall include all modifications made during installation, checkout, and acceptance. Six (6) hard-copies and one (1) soft copy on CD of each item listed below shall be delivered as a part of final systems acceptance.

1. Functional Design Manual: The functional design manual shall identify the operational requirements for the entire system and explain the theory of operation, design philosophy, and specific functions. A description of hardware and software functions, interfaces, and requirements shall be included for all system operating modes. Manufacturer developed literature may be used; however, shall be produced to match the project requirements.
2. Equipment Manual: A manual describing all equipment furnished including:
   a. General description and specifications; installation and checkout procedures; equipment electrical schematics and layout drawings; system schematics and layout drawings; alignment and calibration procedures; manufacturer’s repair list indicating sources of supply; and interface definition.
3. Software Manual: The software manual shall describe the functions of all software and include all other information necessary to enable proper loading, testing, and operation. The manual shall include:
   a. Definition of terms and functions; use of system and applications software; procedures for system initialization, start-up, and shutdown; alarm reports; reports generation, database format and data entry requirements; directory of all disk files; and description of all communications protocols including data formats, command characters, and a sample of each type of data transfer.
4. Operator’s Manual: The operator’s manual shall fully explain all procedures and instructions for the operation of the system, including:
   a. Computers and peripherals; system start-up and shutdown procedures; use of system, command, and applications software; recovery and restart procedures; graphic alarm presentation; use of report generator and generation of reports; data entry; operator commands’ alarm messages, and printing formats; and system access requirements.
5. Maintenance Manual: The maintenance manual shall include descriptions of maintenance for all equipment including inspection, recommend schedules, periodic preventive maintenance, fault diagnosis, and repair or replacement of defective components.
6. Spare Parts & Components Data: At the conclusion of the Contractor's work, the Contractor shall submit to the Resident Engineer a complete

list of the manufacturer's recommended spare parts and components required to satisfactorily maintain and service the systems, as well as unit pricing for those parts and components.

7. Operation, Maintenance & Service Manuals: The Contractor shall provide two (2) complete sets of operating and maintenance manuals in the form of an instructional manual for use by the VA Security Guard Force personnel. The manuals shall be organized into suitable sets of manageable size. Where possible, assemble instructions for similar equipment into a single binder. If multiple volumes are required, each volume shall be fully indexed and coordinated.
8. Equipment and Systems Maintenance Manual: The Contractor shall provide the following descriptive information for each piece of equipment, operating system, and electronic system:
   a. Equipment and/or system function.
   b. Operating characteristics.
   c. Limiting conditions.
   d. Performance curves.
   e. Engineering data and test.
   f. Complete nomenclature and number of replacement parts.
   g. Provide operating and maintenance instructions including assembly drawings and diagrams required for maintenance and a list of items recommended to stock as spare parts.
   h. Provide information detailing essential maintenance procedures including the following: routine operations, trouble shooting guide, disassembly, repair and re-assembly, alignment, adjusting, and checking.
   i. Provide information on equipment and system operating procedures, including the following; start-up procedures, routine and normal operating instructions, regulation and control procedures, instructions on stopping, shut-down and emergency instructions, required sequences for electric and electronic systems, and special operating instructions.
   j. Manufacturer equipment and systems maintenance manuals are permissible.
9. Project Redlines: During construction, the Contractor shall maintain an up-to-date set of construction redlines detailing current location and configuration of the project components. The redline documents shall be marked with the words ‘Master Redlines’ on the cover sheet and be maintained by the Contractor in the project office. The

Contractor will provide access to redline documents anytime during the project for review and inspection by the Resident Engineer or authorized Office of Protection Services representative. Master redlines shall be neatly maintained throughout the project and secured under lock and key in the contractor's onsite project office. Any project component or assembly that is not installed in strict accordance with the drawings shall be so noted on the drawings. Prior to producing Record Construction Documents, the contractor will submit the Master Redline document to the Resident Engineer for review and approval of all changes or modifications to the documents. Each sheet shall have Resident Engineer initials indicating authorization to produce "As Built" documents. Field drawings shall be used for data gathering & field changes. These changes shall be made to the master redline documents daily. Field drawings shall not be considered "master redlines".

10. Record Specifications: The Contractor shall maintain one (1) copy of the Project Specifications, including addenda and modifications issued, for Project Record Documents. The Contractor shall mark the Specifications to indicate the actual installation where the installation varies substantially from that indicated in the Contract Specifications and modifications issued. (Note related Project Record Drawing information where applicable). The Contractor shall pay particular attention to substitutions, selection of product options, and information on concealed installations that would be difficult to identify or measure and record later. Upon completion of the mark ups, the Contractor shall submit record Specifications to the Resident Engineer. As with master relines, Contractor shall maintain record specifications for Resident Engineer review and inspection at anytime.
11. Record Product Data: The Contractor shall maintain one (1) copy of each Product Data submittal for Project Record Document purposes. The Data shall be marked to indicate the actual product installed where the installation varies substantially from that indicated in the Product Data submitted. Significant changes in the product delivered to the site and changes in manufacturer's instructions and recommendations for installation shall be included. Particular attention will be given to information on concealed products and installations that cannot be readily identified or recorded later. Note related Change Orders and mark up of Record Construction

Documents, where applicable. Upon completion of mark up, submit a complete set of Record Product Data to the Resident Engineer.

12. Miscellaneous Records: The Contractor shall maintain one (1) copy of miscellaneous records for Project Record Document purposes. Refer to other Specifications for miscellaneous record-keeping requirements and submittals concerning various construction activities. Before substantial completion, complete miscellaneous records and place in good order, properly identified and bound or filed, ready for use and reference. Categories of requirements resulting in miscellaneous records include a minimum of the following:
    a. Certificates received instead of labels on bulk products.
    b. Testing and qualification of tradesmen. ("Contractor's Qualifications")
    c. Documented qualification of installation firms.
    d. Load and performance testing.
    e. Inspections and certifications.
    f. Final inspection and correction procedures.
    g. Project schedule
13. Record Construction Documents (Record As-Built)
    a. Upon project completion, the contractor shall submit the project master redlines to the Resident Engineer prior to development of Record construction documents. The Resident Engineer shall be given a minimum of a thirty (30) day review period to determine the adequacy of the master redlines. If the master redlines are found suitable by the Resident Engineer, the Resident Engineer will initial and date each sheet and turn redlines over to the contractor for as built development.
    b. The Contractor shall provide the Resident Engineer a complete set of "as-built" drawings and original master redlined marked "as-built" blue-line in the latest version of AutoCAD drawings unlocked on CD or DVD. The as-built drawing shall include security device number, security closet connection location, data gathering panel number, and input or output number as applicable. All corrective notations made by the Contractor shall be legible when submitted to the Resident Engineer. If, in the opinion of the Resident Engineer, any redlined notation is not legible, it shall be returned to the Contractor for re-submission at no extra cost to the Owner. The Contractor shall organize the Record Drawing sheets into manageable sets bound with durable paper cover

sheets with suitable titles, dates, and other identifications printed on the cover. The submitted as built shall be in editable formats and the ownership of the drawings shall be fully relinquished to the owner.

c. Where feasible, the individual or entity that obtained record data, whether the individual or entity is the installer, sub-contractor, or similar entity, is required to prepare the mark up on Record Drawings. Accurately record the information in a comprehensive drawing technique. Record the data when possible after it has been obtained. For concealed installations, record and check the mark up before concealment. At the time of substantial completion, submit the Record Construction Documents to the Resident Engineer. The Contractor shall organize into bound and labeled sets for the Resident Engineer's continued usage. Provide device, conduit, and cable lengths on the conduit drawings. Exact in-field conduit placement/routings shall be shown. All conduits shall be illustrated in their entire length from termination in security closets; no arrowed conduit runs shall be shown. Pull box and junction box sizes are to be shown if larger than 100mm (4 inch).

K. FIPS 201 Compliance Certificates

1. Provide Certificates for all software components and device types utilizing credential verification. Provide certificates for:
   a. Card Readers

L. Approvals will be based on complete submission of manuals together with shop drawings.

M. After approval and prior to installation, furnish the Resident Engineer with one sample of each of the following:

1. A 300 mm (12 inch) length of each type and size of wire and cable along with the tag from the coils of reels from which the samples were taken.
2. Each type of conduit and pathway coupling, bushing and termination fitting.
3. Conduit hangers, clamps and supports.
4. Duct sealing compound.

**1.7 APPLICABLE PUBLICATIONS**

A. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute (ANSI)/ International Code Council (ICC):

A117.1.....Standard on Accessible and Usable Buildings and Facilities

C. American National Standards Institute (ANSI)/ Security Industry Association (SIA):

AC-03.....Access Control: Access Control Guideline Dye Sublimation Printing Practices for PVC Access Control Cards

CP-01-00.....Control Panel Standard-Features for False Alarm Reduction

PIR-01-00.....Passive Infrared Motion Detector Standard - Features for Enhancing False Alarm Immunity

TVAC-01.....CCTV to Access Control Standard - Message Set for System Integration

D. American National Standards Institute (ANSI)/Electronic Industries Alliance (EIA):

330-09.....Electrical Performance Standards for CCTV Cameras

375A-76.....Electrical Performance Standards for CCTV Monitors

E. American National Standards Institute (ANSI):

ANSI S3.2-99.....Method for measuring the Intelligibility of Speech over Communications Systems

F. American Society for Testing and Materials (ASTM)

B1-07.....Standard Specification for Hard-Drawn Copper Wire

B3-07.....Standard Specification for Soft or Annealed Copper Wire

B8-04.....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

C1238-97 (R03).....Standard Guide for Installation of Walk-Through Metal Detectors
D2301-04.....Standard Specification for Vinyl Chloride Plastic Pressure Sensitive Electrical Insulating Tape

G. Architectural Barriers Act (ABA), 1968

H. Department of Justice: American Disability Act (ADA)
28 CFR Part 36-2010 ADA Standards for Accessible Design

I. Department of Veterans Affairs:
VHA National CAD Standard Application Guide, 2006
VA BIM Guide, V1.0 10

J. Federal Communications Commission (FCC):
(47 CFR 15) Part 15 Limitations on the Use of Wireless Equipment/Systems

K. Federal Information Processing Standards (FIPS):
FIPS-201-1.....Personal Identity Verification (PIV) of Federal Employees and Contractors

L. Federal Specifications (Fed. Spec.):
A-A-59544-08.....Cable and Wire, Electrical (Power, Fixed Installation)

M. Government Accountability Office (GAO):
GAO-03-8-02.....Security Responsibilities for Federally Owned and Leased Facilities

N. Homeland Security Presidential Directive (HSPD):
HSPD-12.....Policy for a Common Identification Standard for Federal Employees and Contractors

O. Institute of Electrical and Electronics Engineers (IEEE):
81-1983.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System
802.3af-08.....Power over Ethernet Standard
802.3at-09 .....Power over Ethernet (PoE) Plus Standard
C2-07.....National Electrical Safety Code
C62.41-02.....IEEE Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits
C95.1-05.....Standards for Safety Levels with Respect to Human Exposure in Radio Frequency Electromagnetic Fields

P. International Organization for Standardization (ISO):

7810.....Identification cards – Physical characteristics
7811.....Physical Characteristics for Magnetic Stripe Cards
7816-1.....Identification cards - Integrated circuit(s) cards with contacts - Part 1: Physical characteristics
7816-2.....Identification cards - Integrated circuit cards - Part 2: Cards with contacts -Dimensions and location of the contacts
7816-3.....Identification cards - Integrated circuit cards - Part 3: Cards with contacts - Electrical interface and transmission protocols
7816-4.....Identification cards - Integrated circuit cards - Part 11: Personal verification through biometric methods
7816-10.....Identification cards - Integrated circuit cards - Part 4: Organization, security and commands for interchange
14443.....Identification cards - Contactless integrated circuit cards; Contactless Proximity Cards Operating at 13.56 MHz in up to 5 inches distance
15693.....Identification cards -- Contactless integrated circuit cards - Vicinity cards; Contactless Vicinity Cards Operating at 13.56 MHz in up to 50 inches distance
19794.....Information technology - Biometric data interchange formats

Q. National Electrical Contractors Association
303-2005.....Installing Closed Circuit Television (CCTV) Systems

R. National Electrical Manufactures Association (NEMA):
250-08.....Enclosures for Electrical Equipment (1000 Volts Maximum)
TC-3-04.....PVC Fittings for Use with Rigid PVC Conduit and Tubing
FB1-07.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

S. National Fire Protection Association (NFPA):
70-11..... National Electrical Code (NEC)
731-08.....Standards for the Installation of Electric Premises Security Systems
99-2005.....Health Care Facilities

T. National Institute of Justice (NIJ)
0601.02-03.....Standards for Walk-Through Metal Detectors for use in Weapons Detection
0602.02-03.....Hand-Held Metal Detectors for Use in Concealed Weapon and Contraband Detection

U. National Institute of Standards and Technology (NIST):
IR 6887 V2.1.....Government Smart Card Interoperability Specification (GSC-IS)
Special Pub 800-37.....Guide for Applying the Risk Management Framework to Federal Information Systems
Special Pub 800-63.....Electronic Authentication Guideline
Special Pub 800-73-3....Interfaces for Personal Identity Verification (4 Parts)
.....Pt. 1- End Point PIV Card Application Namespace, Data Model & Representation
.....Pt. 2- PIV Card Application Card Command Interface
.....Pt. 3- PIV Client Application Programming Interface
.....Pt. 4- The PIV Transitional Interfaces & Data Model Specification
Special Pub 800-76-1....Biometric Data Specification for Personal Identity Verification
Special Pub 800-78-2....Cryptographic Algorithms and Key Sizes for Personal Identity Verification
Special Pub 800-79-1....Guidelines for the Accreditation of Personal Identity Verification Card Issuers
Special Pub 800-85B-1...DRAFTPIV Data Model Test Guidelines
Special Pub 800-85A-2...PIV Card Application and Middleware Interface Test Guidelines (SP 800-73-3 compliance)
Special Pub 800-96.....PIV Card Reader Interoperability Guidelines
Special Pub 800-104A....Scheme for PIV Visual Card Topography

V. Occupational and Safety Health Administration (OSHA):
29 CFR 1910.97.....Nonionizing radiation

W. Section 508 of the Rehabilitation Act of 1973

X. Security Industry Association (SIA):

AG-01 .....Security CAD Symbols Standards

Y. Underwriters Laboratories, Inc. (UL):

1-05.....Flexible Metal Conduit

5-04.....Surface Metal Raceway and Fittings

6-07.....Rigid Metal Conduit

44-05.....Thermoset-Insulated Wires and Cables

50-07.....Enclosures for Electrical Equipment

83-08.....Thermoplastic-Insulated Wires and Cables

294-99.....The Standard of Safety for Access Control System Units

305-08.....Standard for Panic Hardware

444-08.....Safety Communications Cables

464-09.....Audible Signal Appliances

467-07.....Electrical Grounding and Bonding Equipment

486A-03.....Wire Connectors and Soldering Lugs for Use with Copper Conductors

486C-04.....Splicing Wire Connectors

486D-05.....Insulated Wire Connector Systems for Underground Use or in Damp or Wet Locations

486E-00.....Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors

493-07.....Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable

514A-04.....Metallic Outlet Boxes

514B-04.....Fittings for Cable and Conduit

51-05.....Schedule 40 and 80 Rigid PVC Conduit

609-96.....Local Burglar Alarm Units and Systems

634-07.....Standards for Connectors with Burglar-Alarm Systems

639-97.....Standard for Intrusion-Detection Units

651-05.....Schedule 40 and 80 Rigid PVC Conduit

651A-07.....Type EB and A Rigid PVC Conduit and HDPE Conduit

797-07.....Electrical Metallic Tubing

827-08.....Central Station Alarm Services

1635-10.....Digital Alarm Communicator System Units

1242-06.....Intermediate Metal Conduit

1479-03.....Fire Tests of Through-Penetration Fire Stops

2058-05.....High Security Electronic Locks
60950.....Safety of Information Technology Equipment
60950-1.....Information Technology Equipment - Safety - Part 1: General Requirements

Z. Uniform Federal Accessibility Standards (UFAS) 1984

AA. United States Department of Commerce:
Special Pub 500-101 ....Care and Handling of Computer Magnetic Storage Media

**1.8 COORDINATION**

A. Coordinate arrangement, mounting, and support of electronic safety and security equipment:
1. To allow maximum possible headroom unless specific mounting heights that reduce headroom are indicated.
2. To provide for ease of disconnecting the equipment with minimum interference to other installations.
3. To allow right of way for piping and conduit installed at required slope.
4. So connecting raceways, cables, wireways, cable trays, and busways will be clear of obstructions and of the working and access space of other equipment.

B. Coordinate installation of required supporting devices and set sleeves in cast-in-place concrete, masonry walls, and other structural components as they are constructed.

C. Coordinate location of access panels and doors for electronic safety and security items that are behind finished surfaces or otherwise concealed.

**1.9 MAINTENANCE & SERVICE**

A. General Requirements
1. The Contractor shall provide all services required and equipment necessary to maintain the entire integrated electronic security system in an operational state as specified for a period of one (1) year after formal written acceptance of the system. The Contractor shall provide all necessary material required for performing scheduled adjustments or other non-scheduled work. Impacts on facility operations shall be minimized when performing scheduled adjustments or other non-scheduled work. See also General Project Requirements.

B. Description of Work

1. The adjustment and repair of the security system includes all software updates, panel firmware, and the following new items computers equipment, communications transmission equipment and data transmission media (DTM), local processors, security system sensors, physical access control equipment, facility interface, signal transmission equipment, and video equipment.

C. Personnel

1. Service personnel shall be certified in the maintenance and repair of the selected type of equipment and qualified to accomplish all work promptly and satisfactorily. The Resident Engineer shall be advised in writing of the name of the designated service representative, and of any change in personnel. The Resident Engineer shall be provided copies of system manufacturer certification for the designated service representative.

D. Schedule of Work

1. The work shall be performed during regular working hours, Monday through Friday, excluding federal holidays.

E. System Inspections

1. These inspections shall include:
   a. The Contractor shall perform two (2) minor inspections at six (6) month intervals or more if required by the manufacturer, and two (2) major inspections offset equally between the minor inspections to effect quarterly inspection of alternating magnitude.
      1) Minor Inspections shall include visual checks and operational tests of all console equipment, peripheral equipment, local processors, sensors, electrical and mechanical controls, and adjustments on printers.
      2) Major Inspections shall include all work described for Minor Inspections and the following: clean all system equipment and local processors including interior and exterior surfaces; perform diagnostics on all equipment; operational tests of the CPU, switcher, peripheral equipment, recording devices, monitors, picture quality from each camera; check, walk test, and calibrate each sensor; run all system software diagnostics and correct all problems; and resolve any previous outstanding problems.

F. Emergency Service

1. The owner shall initiate service calls whenever the system is not functioning properly. The Contractor shall provide the Owner with an

emergency service center telephone number. The emergency service center shall be staffed 24 hours a day 365 days a year. The Owner shall have sole authority for determining catastrophic and non-catastrophic system failures within parameters stated in General Project Requirements.

a. For catastrophic system failures, the Contractor shall provide same day four (4) hour service response with a defect correction time not to exceed eight (8) hours from notification. Catastrophic system failures are defined as any system failure that the Owner determines will place the facility(s) at increased risk.

b. For non-catastrophic failures, the Contractor within eight (8) hours with a defect correction time not to exceed 24 hours from notification.

G. Operation

1. Performance of scheduled adjustments and repair shall verify operation of the system as demonstrated by the applicable portions of the performance verification test.

H. Records & Logs

1. The Contractor shall maintain records and logs of each task and organize cumulative records for each component and for the complete system chronologically. A continuous log shall be submitted for all devices. The log shall contain all initial settings, calibration, repair, and programming data. Complete logs shall be maintained and available for inspection on site, demonstrating planned and systematic adjustments and repairs have been accomplished for the system.

I. Work Request

1. The Contractor shall separately record each service call request, as received. The record shall include the serial number identifying the component involved, its location, date and time the call was received, specific nature of trouble, names of service personnel assigned to the task, instructions describing the action taken, the amount and nature of the materials used, and the date and time of commencement and completion. The Contractor shall deliver a record of the work performed within five (5) working days after the work was completed.

J. System Modifications

1. The Contractor shall make any recommendations for system modification in writing to the Resident Engineer. No system modifications, including operating parameters and control settings, shall be made without prior written approval from the Resident Engineer. Any modifications made to the system shall be incorporated into the operation and maintenance manuals and other documentation affected.

K. Software

1. The Contractor shall provide all software updates when approved by the Owner from the manufacturer during the installation and 12-month warranty period and verify operation of the system. These updates shall be accomplished in a timely manner, fully coordinated with the system operators, and incorporated into the operations and maintenance manuals and software documentation. There shall be at least one (1) scheduled update near the end of the first year's warranty period, at which time the Contractor shall install and validate the latest released version of the Manufacturer's software. All software changes shall be recorded in a log maintained in the unit control room. An electronic copy of the software update shall be maintained within the log. At a minimum, the contractor shall provide a description of the modification, when the modification occurred, and name and contact information of the individual performing the modification. The log shall be maintained in a white 3 ring binder and the cover marked "SOFTWARE CHANGE LOG".

**1.10 MINIMUM REQUIREMENTS**

A. References to industry and trade association standards and codes are minimum installation requirement standards.

B. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

**1.11 DELIVERY, STORAGE, & HANDLING**

A. Equipment and materials shall be protected during shipment and storage against physical damage, dirt, moisture, cold and rain:

1. During installation, enclosures, equipment, controls, controllers, circuit protective devices, and other like items, shall be protected against entry of foreign matter; and be vacuum cleaned both inside and outside before testing and operating and repainting if required.

2. Damaged equipment shall be, as determined by the Resident Engineer, placed in first class operating condition or be returned to the source of supply for repair or replacement.
3. Painted surfaces shall be protected with factory installed removable heavy craft paper, sheet vinyl or equal.
4. Damaged paint on equipment and materials shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

**1.12 PROJECT CONDITIONS**

A. Environmental Conditions: System shall be capable of withstanding the following environmental conditions without mechanical or electrical damage or degradation of operating capability:
1. Interior, Controlled Environment: System components, except central-station control unit, installed in temperature-controlled interior environments shall be rated for continuous operation in ambient conditions of 2 to 50 deg C (36 to 122 deg F) dry bulb and 20 to 90 percent relative humidity, non-condensing. NEMA 250, Type 1 enclosure.
2. Interior, Uncontrolled Environment: System components installed in non-temperature-controlled interior environments shall be rated for continuous operation in ambient conditions of -18 to 50 deg C (0 to 122 deg F) dry bulb and 20 to 90 percent relative humidity, non-condensing. NEMA 250, Type 4X enclosures.
3. Exterior Environment: System components installed in locations exposed to weather shall be rated for continuous operation in ambient conditions of -34 to 50 deg C (-30 to 122 deg F) dry bulb and 20 to 90 percent relative humidity, condensing. Rate for continuous operation where exposed to rain as specified in NEMA 250, winds up to 137 km/h (85 mph) and snow cover up to 610 mm (24 in) thick. NEMA 250, Type 4X enclosures.
4. Hazardous Environment: System components located in areas where fire or explosion hazards may exist because of flammable gases or vapors, flammable liquids, combustible dust, or ignitable fibers shall be rated, listed, and installed according to NFPA 70.
5. Corrosive Environment: For system components subjected to corrosive fumes, vapors, and wind-driven salt spray in coastal zones, provide NEMA 250, Type 4X enclosures.

B. Security Environment: Use vandal resistant enclosures in high-risk areas where equipment may be subject to damage.

**1.13 EQUIPMENT AND MATERIALS**

A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.

B. When more than one unit of the same class of equipment is required, such units shall be the product of a single manufacturer.

C. Equipment Assemblies and Components:

1. Components of an assembled unit need not be products of the same manufacturer.
2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
3. Components shall be compatible with each other and with the total assembly for the intended service.
4. Constituent parts which are similar shall be the product of a single manufacturer.

D. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.

**1.14 ELECTRICAL POWER**

A. Electrical power of 120 Volts Alternating Current (VAC) shall be indicated on the Division 26 drawings. Additional locations requiring primary power required by the security system shall be shown as part of these contract documents. Primary power for the security system shall be configured to switch to emergency backup sources automatically if interrupted without degradation of any critical system function. Alarms shall not be generated as a result of power switching, however, an indication of power switching on (on-line source) shall be provided to the alarm monitor. The Security Contractor shall provide an interface (dry contact closure) between the PACS and the Uninterruptible Power Supply (UPS) system so the UPS trouble signals and main power fail appear on the PACS operator terminal as alarms.

B. Failure of any on-line battery shall be detected and reported as a fault condition. Battery backed-up power supplies shall be provided sized for 8 hours of operation at actual connected load. Requirements for additional power or locations shall be included with the contract to

support equipment and systems offered. The following minimum requirements shall be provided for power sources and equipment.

1. Emergency Generator
   a. Lights: Unit Control Room, Equipment Rooms, & Security Offices
   b. Outlets: Security Outlets dedicated to security equipment racks or security enclosure assemblies.
   c. Security Device Power Supplies (DGP, VASS, Card Access, Lock Power, etc.) powered from the security closets or remotely: various locations
   d. VASS Camera Power Supplies: Security Closets
   e. VASS Pan/Tilt Units: Various Locations
   f. VASS Outdoor Housing Heaters and Blowers: Various Sites
   g. Fiber Optic Receivers/Transmitters
2. Uninterruptible Power Supply (UPS) on Emergency Power
   a. The following 120VAC circuits shall be provided by others. The Security Contractor shall coordinate exact locations with the Electrical Contractor:
      1) Communications equipment: Control Equipment Room and various sites.
      2) VASS: Control Equipment Room
      3) Digital Video Recorders, encoders & decoders
      4) All equipment Room racked equipment.
      5) Network switches

**1.15 TRANSIENT VOLTAGE SUPPRESSION, POWER SURGE SUPPLESION, & GROUNDING**

A. Transient Voltage Surge Suppression: All cables and conductors extending beyond building façade, except fiber optic cables, which serve as communication, control, or signal lines shall be protected against Transient Voltage surges and have Transient Voltage Surge Suppression (TVSS) protection. The TVSS device shall be UL listed in accordance with Standard TIA 497B installed at each end. Lighting and surge suppression shall be a multi-strike variety and include a fault indicator. Protection shall be furnished at the equipment and additional triple solid state surge protectors rated for the application on each wire line circuit shall be installed within 914.4 mm (3 ft) of the building cable entrance. Fuses shall not be used for surge protection. The inputs and outputs shall be tested in both normal mode and common mode to verify there is no interference.

1. A 10-microsecond rise time by 1000 microsecond pulse width waveform with a peak voltage of 1500 volts and a peak current of 60 amperes.
2. An 8-microsecond rise time by 20-microsecond pulse width waveform with a peak voltage of 1000 volts and a peak current of 500 amperes.
3. Maximum series current: 2 AMPS. Provide units manufactured by Advanced Protection Technologies, model # TE/FA 10B or TE/FA 20B.
4. Operating Temperature and Humidity: -40 to 85 deg C (-40 to 185 deg F), 0 to 95 percent relative humidity.

B. Grounding and Surge Suppression
1. The Security Contractor shall provide grounding and surge suppression to stabilize the voltage under normal operating conditions. To ensure the operation of over current devices, such as fuses, circuit breakers, and relays, under ground-fault conditions.
2. Security Contractor shall engineer and provide proper grounding and surge suppression as required by local jurisdiction and prevailing codes and standards referenced in this document.
3. Principal grounding components and features. Include main grounding buses and grounding and bonding connections to service equipment.
4. Details of interconnection with other grounding systems. The lightning protection system shall be provided by the Security Contractor.
5. Locations and sizes of grounding conductors and grounding buses in electrical, data, and communication equipment rooms and closets.
6. AC power receptacles are not to be used as a ground reference point.
7. Any cable that is shielded shall require a ground in accordance with the best practices of the trade and manufactures installation instructions.
8. Protection should be provided at both ends of cabling.

**1.16 COMPONENT ENCLOSURES**

A. Construction of Enclosures
1. Consoles, power supply enclosures, detector control and terminal cabinets, control units, wiring gutters, and other component housings, collectively referred to as enclosures, shall be so formed and assembled as to be sturdy and rigid.
2. Thickness of metal in-cast and sheet metal enclosures of all types shall not be less than those in Tables I and II, UL 611. Sheet steel used in fabrication of enclosures shall be not less than 14 gauge. Consoles shall be 16-gauge.

3. Doors and covers shall be flanged. Enclosures shall not have pre-punched knockouts. Where doors are mounted on hinges with exposed pins, the hinges shall be of the tight pin type or the ends of hinge pins shall be tack welded to prevent removal. Doors having a latch edge length of less than 609.6 mm (24 in) shall be provided with a single construction core. Where the latch edge of a hinged door is more than 609.6 mm (24 in) or more in length, the door shall be provided with a three-point latching device with construction core; or alternatively with two, one located near each end.
4. Any ventilator openings in enclosures and cabinets shall conform to the requirements of UL 611. Unless otherwise indicated, sheet metal enclosures shall be designed for wall mounting with tip holes slotted. Mounting holes shall be in positions that remain accessible when all major operating components are in place and the door is open, but shall be in accessible when the door is closed.
5. Covers of pull and junction boxes provided to facilitate initial installation of the system shall be held in place by tamper proof Torx Center post security screws. Stenciled or painted labels shall be affixed to such boxes indicating they contain no connections. These labels shall not indicate the box is part of the Electronic Security System (ESS).

B. Tamper Provisions and Tamper Switches:
1. Enclosures, cabinets, housings, boxes and fittings or every product description having hinged doors or removable covers and which contain circuits, or the integrated security system and its power supplies shall be provided with cover operated, corrosion-resistant tamper switches.
2. Tamper switches shall be arranged to initiate an alarm signal that will report to the monitoring station when the door or cover is moved. Tamper switches shall be mechanically mounted to maximize the defeat time when enclosure covers are opened or removed. It shall take longer than 1 second to depress or defeat the tamper switch after opening or removing the cover. The enclosure and tamper switch shall function together in such a manner as to prohibit direct line of sign to any internal component before the switch activates.
3. Tamper switches shall be inaccessible until the switch is activated. Have mounting hardware concealed so the location of the switch cannot be observed from the exterior of the enclosure. Be connected to circuits which are under electrical supervision at all times,

irrespective of the protection mode in which the circuit is operating. Be spring-loaded and held in the closed position by the door or cover and be wired so they break the circuit when the door cover is disturbed. Tamper circuits shall be adjustable type screw sets and shall be adjusted by the contractor to eliminate nuisance alarms associated with incorrectly mounted tamper device shall annunciate prior to the enclosure door opening (within 1/4 " tolerance. The tamper device or its components shall not be visible or accessing with common tools to bypass when the enclosure is in the secured mode.

4. The single gang junction boxes for the portrait alarming and pull boxes with less than 102 square mm will not require tamper switches.
5. All enclosures over 305 square mm shall be hinged with an enclosure lock.
6. Control Enclosures: Maintenance/Safety switches on control enclosures, which must be opened to make routing maintenance adjustments to the system and to service the power supplies, shall be push/pull-set automatic reset type.
7. Provide one (1) enclosure tamper switch for each 609 linear mm of enclosure lock side opening evenly spaced.
8. All security screws shall be Torx-Post Security Screws.
9. The contractor shall provide the owner with two (2) torx-post screwdrivers.

**1.17 ELECTRONIC COMPONENTS**

A. All electronic components of the system shall be of the solid-state type, mounted on printed circuit boards conforming to UL 796. Boards shall be plug-in, quick-disconnect type. Circuitry shall not be so densely placed as to impede maintenance. All power-dissipating components shall incorporate safety margins of not less than 25 percent with respect to dissipation ratings, maximum voltages, and current-carrying capacity.

**1.18 SUBSTITUTE MATERIALS & EQUIPMENT**

A. Where variations from the contract requirements are requested in accordance with the GENERAL CONDITIONS and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

B. In addition to this Section the Security Contractor shall also reference Section II, Products and associated divisions. The Resident Engineer shall have final authority on the authorization or refusal of substitutions. If there are no proposed substitutions, a statement in writing from the Contractor shall be submitted to the Resident Engineer stating same. In the preparation of a list of substitutions, the following information shall be included, as a minimum:
   1. Identity of the material or devices specified for which there is a proposed substitution.
   2. Description of the segment of the specification where the material or devices are referenced.
   3. Identity of the proposed substitute by manufacturer, brand name, catalog or model number and the manufacturer's product name.
   4. A technical statement of all operational characteristic expressing equivalence to items to be substituted and comparison, feature-by-feature, between specification requirements and the material or devices called for in the specification; and Price differential.

C. Materials Not Listed: Furnish all necessary hardware, software, programming materials, and supporting equipment required to place the specified major subsystems in full operation. Note that some supporting equipment, materials, and hardware may not be described herein. Depending on the manufacturers selected by the Resident Engineer, some equipment, materials and hardware may not be contained in either the Contract Documents or these written specifications, but are required by the manufacturer for complete operation according to the intent of the design and these specifications. In such cases, the Resident Engineer shall be given the opportunity to approve the additional equipment, hardware and materials that shall be fully identified in the bid and in the equipment list submittal. The Resident Engineer shall be consulted in the event there is any question about which supporting equipment, materials, or hardware is intended to be included.

D. Response to Specification: The Contractor shall submit a point-by-point statement of compliance with each paragraph of the security specification. The statement of compliance shall list each paragraph by number and indicate "COMPLY" opposite the number for each paragraph where the Contractor fully complies with the specification. Where the proposed system cannot meet the requirements of the paragraph, and does not offer an equivalent solution, the offers shall indicate "DOES NOT COMPLY" opposite the paragraph number. Where the proposed system does

not comply with the paragraph as written, but the bidder feels it will accomplish the intent of the paragraph in a manner different from that described, the offers shall indicate "COMPARABLE". The offers shall include a statement fully describing the "comparable" method of satisfying the requirement. Where a full and concise description is not provided, the offered system shall be considered as not complying with the specification. Any submission that does not include a point-by-point statement of compliance, as described above, shall be disqualified. Submittals for products shall be in precise order with the product section of the specification. Submittals not in proper sequence will be rejected.

**1.19 LIKE ITEMS**

A. Where two or more items of equipment performing the same function are required, they shall be exact duplicates produced by one manufacturer. All equipment provided shall be complete, new, and free of any defects.

**1.20 WARRANTY**

A. The Contractor shall, as a condition precedent to the final payment, execute a written guarantee (warranty) to the Resident Engineer certifying all contract requirements have been completed according to the final specifications. Contract drawings and the warranty of all materials and equipment furnished under this contract are to remain in satisfactory operating condition (ordinary wear and tear, abuse and causes beyond his control for this work accepted) for one (1) year from the date the Contactor received written notification of final acceptance from the Resident Engineer. Demonstration and training shall be performed prior to system acceptance. All defects or damages due to faulty materials or workmanship shall be repaired or replaced without delay, to the Resident Engineer's satisfaction, and at the Contractor's expense. The Contractor shall provide quarterly inspections during the warranty period. The contractor shall provide written documentation to the Resident Engineer on conditions and findings of the system and device(s). In addition, the contractor shall provide written documentation of test results and stating what was done to correct any deficiencies. The first inspection shall occur 90 calendar days after the acceptance date. The last inspection shall occur 30 calendar days prior to the end of the warranty. The warranty period shall be extended until the last inspection and associated corrective actions are complete. When equipment and labor covered by the Contractor's

warranty, or by a manufacturer's warranty, have been replaced or restored because of it’s failure during the warranty period, the warranty period for the replaced or repaired equipment or restored work shall be reinstated for a period equal to the original warranty period, and commencing with the date of completion of the replacement or restoration work. In the event any manufacturer customarily provides a warranty period greater than one (1) year, the Contractor's warranty shall be for the same duration for that component.

**1.22 SINGULAR NUMBER**

Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

**PART 2 – PRODUCTS**

**2.1 EQUIPMENT AND MATERIALS**

A. All equipment associated within the Security Equipment Room shall be UL 827, UL 1981, and UL 60950 compliant and rated for continuous operation. Environmental conditions (i.e. temperature, humidity, wind, and seismic activity) shall be taken under consideration at each facility and site location prior to installation of the equipment.

B. All equipment shall operate on a 120 or 240 volts alternating current (VAC); 50 Hz or 60 Hz AC power system unless documented otherwise in subsequent sections listed within this specification. All equipment shall have a back-up source of power that will provide a minimum of 8 hours of run time in the event of a loss of primary power to the facility.

C. The system shall be designed, installed, and programmed in a manner that will allow for ease of operation, programming, servicing, maintenance, testing, and upgrading of the system.

D. All equipment and materials for the system will be compatible to ensure correct operation.

**2.2 EQUIPMENT ITEMS**

**2.4 TRANSIENT VOLTAGE SURGE SUPPRESSION DEVICES (TVSS) AND SURGE SUPPRESION**

A. Transient Voltage Surge Suppression

1. All cables and conductors extending beyond building perimeter, except fiber optic cables, which serve as communication, control, or signal lines shall be protected against Transient Voltage surges and have

Transient Voltage surge suppression protection (TVSS) UL listed in accordance with Standard 497B installed at each end. Lighting and surge suppression shall be a multi-strike variety and include a fault indicator. Protection shall be furnished at the equipment and additional triple solid state surge protectors rated for the application on each wire line circuit shall be installed within 915 mm (36 in) of the building cable entrance. Fuses shall not be used for surge protection. The inputs and outputs shall be tested in both normal mode and common mode using the following waveforms:

a. A 10-microsecond rise time by 1000 microsecond pulse width waveform with a peak voltage of 1500 volts and a peak current of 60 amperes.
b. An 8-microsecond rise time by 20-microsecond pulse width waveform with a peak voltage of 1000 volts and a peak current of 500 amperes.
c. Maximum series current: 2 AMPS. Provide units manufactured by Advanced Protection Technologies, model # TE/FA 10B or TE/FA 20B or approved equivalent.
d. Operating Temperature and Humidity: -40 to + 85 deg C (-40 to 185 deg F), and 0 to 95 percent relative humidity, non-condensing.

B. Physical Access Control Systems

1. Suppressors shall be installed on AC power at the point of service and shall meet the following criteria:
   a. UL1449 2nd Edition, 2007, listed
   b. UL1449 S.V.R. of 400 Volts or lower
   c. Status Indicator Light(s)
   d. Minimum Surge Current Capacity: 40,000 Amps (8 x 20 µsec)
   e. Maximum Continuous Current: 15 Amps
   f. MCOV: 125 VAC
   g. Service Voltage: 110-120 VAC
2. Suppressors shall be installed on the Low Voltage circuit at both the point of entrance and exit of the building. Suppressors shall meet the following criteria:
   a. UL 497B
   b. Minimum Surge Current Capacity: 2,000 Amps per pair
   c. Maximum Continuous Current: 5 Amps
   d. MCOV: 33 Volts
   e. Service Voltage: 24Volts

3. Suppressors shall be installed on the communication circuit between the access controller and card reader at both the entrance and exit of the building. Suppressors shall meet the following criteria:
   a. Conforms with UL497B standards (where applicable)
   b. Clamp level for 12 and 24V power: 18VDC / 38VDC
   c. Clamp level for Data/LED: 6.8VDC
   d. Service Voltage for Power: 12VDC/24VDC
   e. Service Voltage for Data/LED: <5VDC
   f. Clamp level – PoE Access Power: 72V
   g. Clamp level – PoE Access Data: 7.9V
   h. Service Voltage – PoE Access: 48VAC – 54VAC
   i. Service Voltage – PoE Data: <5VDC
4. Suppressors shall be installed on incoming central office lines and shall meet the following criteria:
   a. UL 497A Listed
   b. Multi Stage protection design
   c. Auto-reset current protection not to exceed 2 Amps per pair
   d. Minimum Surge Current of 500 Amps per pair (8 x 20 µSec)
5. Suppressors shall be installed on all telephone/intercom circuits that enter or leave separate buildings and shall meet the following criteria:
   a. UL 497A Listed (where applicable)
   b. UL 497B Listed (horns, strobes, speakers or communication circuits over 300 feet)
   c. Multi Stage protection design
   d. Auto-reset over-current protection not to exceed 5 Amps per pair
   e. Minimum Surge Current of 1000 Amps per pair (8 x 20 µSec)

E. Video Surveillance System
1. Protectors shall be installed on cable systems on points of entry and exit from separate buildings. Suppressors shall be installed at each exterior camera location and include protection for 12 and/or 24 volt power, data signal and motor controls (for Pan, Tilt and Zoom systems). SPDs shall protect all modes herein mentioned and contain all modes in a single unit system. Protection for all systems mentioned above shall be incorporated at the head end equipment. Additionally a minimum 450VA battery backup shall be used to protect the DVR or VCR and monitor. Protectors shall meet the following criteria:
   a. Head-End Power

1) UL 1778, cUL (Battery Back Up)
2) Minimum Surge Current Capacity: 65,000 Amps (8x20µsec)
3) Minimum of two (2) NEMA 5-15R Receptacles (one (1) AC power only, one (1) with UPS)
4) All modes protected (L-N, L-G, N-G)
5) EMI/RFI Filtering
6) Maximum Continuous Current: 12 Amps

b. Camera Power
1) Minimum Surge Current Capacity: 1,000 Amps (8X20µsec); 240 Amps for IP Video/PoE cameras
2) Screw Terminal Connection
3) All protection modes L-G (all Lines)
4) MCOV <40VAC

c. Video And Data
1) Surge Current Capacity 1,000 Amps per conductor
3) Protection modes: L-G (Data)
4) Band Pass 0-2GHz
5) Insertion Loss <0.3dB

F. Grounding and Surge Suppression
1. The Security Contractor shall provide grounding and surge suppression to stabilize the voltage under normal operating conditions. This is to ensure the operation of over current devices, such as fuses, circuit breakers, and relays, underground-fault conditions.
2. The Contractor shall engineer, provide, ad install proper grounding and surge suppression as required by local jurisdiction and prevailing codes and standards, referenced in this document.
3. Principal grounding components and features shall include: main grounding buses, grounding, and bonding connections to service equipment.
4. The Contractor shall provide detail drawings of interconnection with other grounding systems including lightning protection systems.
5. The Contractor shall provide details of locations and sizes of grounding conductors and grounding buses in electrical, data, and communication equipment rooms and closets.
6. AC power receptacles are not to be used as a ground reference point.
7. Any cable that is shielded shall require a ground in accordance with applicable codes, the best practices of the trade, and all manufactures’ installation instructions.

G. 120 VAC Surge Suppression

1. Continuous Current: Unlimited (parallel connection)
2. Max Surge Current: 13,500 Amps
3. Protection Modes: L - N, L - G, N - G
4. Warranty: Ten Year Limited Warranty
5. Dimension: 73.7 x 41.1 x 52.1 mm (2.90 x 1.62 x 2.05 in)
6. Weight: 2.88 g (0.18 lbs)
7. Housing: ABS

**2.5 INSTALLATION KIT**

A. General:

1. The kit shall be provided that, at a minimum, includes all connectors and terminals, labeling systems, audio spade lugs, barrier strips, punch blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, conduit, cable duct, and/or cable tray, etc., required to accomplish a neat and secure installation. All wires shall terminate in a spade lug and barrier strip, wire wrap terminal or punch block. Unfinished or unlabeled wire connections shall not be allowed. All unused and partially opened installation kit boxes, coaxial, fiber-optic, and twisted pair cable reels, conduit, cable tray, and/or cable duct bundles, wire rolls, physical installation hardware shall be turned over to the Contracting Officer. The following sections outline the minimum required installation sub-kits to be used:
2. System Grounding:
   a. The grounding kit shall include all cable and installation hardware required. All head end equipment and power supplies shall be connected to earth ground via internal building wiring, according to the NEC.
   b. This includes, but is not limited to:
      1) Coaxial Cable Shields
      2) Control Cable Shields
      3) Data Cable Shields
      4) Equipment Racks
      5) Equipment Cabinets
      6) Conduits
      7) Cable Duct blocks
      8) Cable Trays
      9) Power Panels
      10) Grounding

11) Connector Panels

3. Wire and Cable: The wire and cable kit shall include all connectors and terminals, audio spade lugs, barrier straps, punch blocks, wire wrap strips, heat shrink tubing, tie wraps, solder, hangers, clamps, labels etc., required to accomplish a neat and orderly installation.
4. Conduit, Cable Duct, and Cable Tray: The kit shall include all conduit, duct, trays, junction boxes, back boxes, cover plates, feed through nipples, hangers, clamps, other hardware required to accomplish a neat and secure conduit, cable duct, and/or cable tray installation in accordance with the NEC and this document.
5. Equipment Interface: The equipment kit shall include any item or quantity of equipment, cable, mounting hardware and materials needed to interface the systems with the identified sub-system(s) according to the OEM requirements and this document.
6. Labels: The labeling kit shall include any item or quantity of labels, tools, stencils, and materials needed to label each subsystem according to the OEM requirements, as-installed drawings, and this document.
7. Documentation: The documentation kit shall include any item or quantity of items, computer discs, as installed drawings, equipment, maintenance, and operation manuals, and OEM materials needed to provide the system documentation as required by this document and explained herein.

## PART 3 – EXECUTION

### 3.1 COMMON REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATION

A. Comply with NECA 1.

B. Measure indicated mounting heights to bottom of unit for suspended items and to center of unit for wall-mounting items.

C. Headroom Maintenance: If mounting heights or other location criteria are not indicated, arrange and install components and equipment to provide maximum possible headroom consistent with these requirements.

D. Equipment: Install to facilitate service, maintenance, and repair or replacement of components of both electronic safety and security equipment and other nearby installations. Connect in such a way as to facilitate future disconnecting with minimum interference with other items in the vicinity.

E. Right of Way: Give to piping systems installed at a required slope.
F. Equipment location shall be as close as practical to locations shown on the drawings.
G. Inaccessible Equipment:
   1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
   2. "Conveniently accessible" is defined as being capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

**3.2 FIRESTOPPING**

A. Apply firestopping to penetrations of fire-rated floor and wall assemblies for electronic safety and security installations to restore original fire-resistance rating of assembly. Firestopping materials and installation requirements are specified in Division 07 Section 07 84 00 "Firestopping."

**3.3 COMMISIONING**

A. Provide commissioning documentation in accordance with the requirements of Section 28 08 00 - COMMISIONIN OF ELECTRONIC SAFETY AND SECURITY SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
B. Components provided under this section of the specification will be tested as part of a larger system. Refer to section 28 08 00 - COMMISIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS and related sections for contractor responsibilities for system commissioning.

**3.4 DEMONSTRATION AND TRAINING**

A. Training shall be provided in accordance with Article, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.
B. Training shall be provided for the particular equipment or system as required in each associated specification.
C. A training schedule shall be developed and submitted by the contractor and approved by the Resident Engineer at least 30 days prior to the planned training.
D. Provide services of manufacturer’s technical representative for 4 hours hours to instruct VA personnel in operation and maintenance of units.

E. Submit training plans and instructor qualifications in accordance with the requirements of Section 28 08 00 – COMMISIONING OF ELECTRONIC SAFETY AND SECURITY SYSTEMS.

**3.5 WORK PERFORMANCE**

A. Job site safety and worker safety is the responsibility of the contractor.

B. For work on existing stations, arrange, phase and perform work to assure electronic safety and security service for other buildings at all times. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.

C. New work shall be installed and connected to existing work neatly and carefully. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.

D. Coordinate location of equipment and conduit with other trades to minimize interferences. See the GENERAL CONDITIONS.

**3.6 SYSTEM PROGRAMMING**

A. General Programming Requirements

1. This following section shall be used by the contractor to identify the anticipated level of effort (LOE) required setup, program, and configure the Electronic Security System (ESS). The contractor shall be responsible for providing all setup, configuration, and programming to include data entry for the Security Management System (SMS) and subsystems (e.g., video matrix switch, digital video recorders, intrusion devices, including integration of subsystems to the SMS (e.g., camera call up, time synchronization). System programming for existing or new SMS servers shall not be conducted at the project site.

B. Level of Effort for Programming

1. The Contractor shall perform and complete system programming (including all data entry) at an offsite location using the Contractor’s own copy of the SMS software. The Contractor’s copy of the SMS software shall be of the Owners current version. Once system programming has been completed, the Contractor shall deliver the data to the Resident Engineer on data entry forms and an approved electronic medium, utilizing data from the contract documents. The completed forms shall be delivered to the Resident Engineer for review and approval at least 90 calendar days prior to the scheduled

date the Contractor requires it. The Contractor shall not upload system programming until the Resident Engineer has provided written approval. The Contractor is responsible for backing up the system prior to uploading new programming data. Additional programming requirements are provided as follows:

a. Programming for Existing SMS Servers: The contractor shall perform all related system programming except for personnel data as noted. The contractor will not be responsible for uploading personnel information (e.g., ID Cards backgrounds, names, access privileges, access schedules, personnel groupings). The contractor shall anticipate a weekly coordination meeting and working alongside of Resident Engineer to ensure data uploading is performed without incident of loss of function or data loss. System programming for SMS servers shall be performed by using the Contractor's own server and software. These servers shall not be connected to existing devices or systems at any time.

2. The Contractor shall identify and request from the Resident Engineer, any additional data needed to provide a complete and operational system as described in the contract documents.
3. Contractor and Resident Engineer coordination on programming requires a high level of coordination to ensure programming is performed in accordance with VA requirements and programming uploads do not disrupt existing systems functionality. The contractor shall anticipate a minimum a weekly coordination meeting. Contractor shall ensure data uploading is performed without incident of loss of function or data loss. The following Level of Effort Chart is provided to communicate the expected level of effort required by contractors on VA ESS projects. Calculations to determine actual levels of effort shall be confirmed by the contractor before project award.

| | Description of Tasks | | | | | | |
|---|---|---|---|---|---|---|---|
| Description of Systems | Develop System Loading Sheets | Coordination | Initial Set-up Configuration | Graphic Maps | System Programming | Final Checks | Level of Effort (Typical Tasks) |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| SMS Setup & Configuration | e.g., program monitoring stations, programming networks, interconnections between CCTV, intercoms, time synchronization | e.g., retrieve IP addresses, naming conventions, standard event descriptions, programming templates, coordinate special system needs | e.g., Load system Operating System and Application software, general system configurations | e.g., develop naming conventions, develop file folders, confirming accuracy of AutoCAD Floor Plans, convert file into jpeg file | e.g., program monitoring stations, programming networks, interconnections between CCTV, intercoms, time synchronization | e.g., check all system diagnostics (e.g., clients, panels) | Load and set-up 4-6 CDs and configure servers (to configure Loading and Configuring software<br>Administrative account, audit log,<br>Keystrokes, mouse clicks, multi-screen configuration |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Electronic Entry Control Systems | e.g., setup of device, door groups & schedules, REX, Locks, link graphics | e.g., confirming device configurations, naming conventions, event description and narratives | e.g., enter data from loading sheets; configure components, link events, cameras, and graphics | | e.g., setup of device, door groups & schedules, REX, Locks, link graphics | e.g., performing entry testing to confirm correct set-up and configuration | e.g., creating a door, door configuration, adding request to exit, door monitors and relays, door timers, door related events (e.g., access, access denied, forced open, held open), linkages, controlled areas, advanced door monitoring, time zones, sequence of operations |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Intrusion Detection Systems | e.g., enter door groups & schedules, link devices - REX, lock, & graphics | e.g., confirming device configurations, naming conventions, event description and narratives | e.g., enter data from loading sheets; configure components, link events, cameras, and graphics | | e.g., enter door groups & schedules, link devices - REX, lock, & graphics | e.g., walk test, device position, and masking | e.g., setting up monitoring and control points (e.g., motion sensors, glassbreaks, vibration sensor, strobes, sounders) creating intrusion zones, creating arm/disarm panel, timed sequences, time zones, icon placements on graphic maps, clearance levels, events (e.g., armed, disarmed, zone violation, device alarm activations), LCD reader messages, |

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| CCTV Systems | e.g., programming call-ups recording | e.g., confirming device configurations, naming conventions | e.g., enter data from loading sheets; camera naming convention, sequences, configure components) | | e.g., programming call-ups recording | e.g., confirm area of coverage, call-up per event generated and recording rates | e.g., setting up cameras points, recording ratios (e.g., normal, alarm event) timed recording, linkages, maps placements, call-ups |
| Intercoms Systems | e.g., programming events & call-ups | e.g., confirming device configurations, naming conventions, event description and narratives | e.g., enter data from loading sheets; configure components, link events, cameras, and graphics | | e.g., programming events & call-ups | e.g., confirm operation, SMS event generation and camera call-up | e.g., setup linkages, events for activations, device troubles, land devices on graphic maps |
| Console Monitoring Components | N/A | per monitor | per monitor | per graphic map | N/A | per monitor | N/A |
| Note: Programming tasks are supported through the contractor's development of the Technical Data Package Submittals. | | | | | | | |

**Table 1 Contractor Level of Effort**

**3.7 TESTING AND ACCEPTANCE**

A. Performance Requirements

1. General:

a. The Contractor shall perform contract field, performance verification, and endurance testing and make adjustments of the completed security system when permitted. The Contractor shall provide all personnel, equipment, instrumentation, and supplies necessary to perform all testing. Written notification of planned testing shall be given to the Resident Engineer at least 60 calendar days prior to the test and after the Contractor has received written approval of the specific test procedures.

b. The Resident Engineer shall witness all testing and system adjustments during testing. Written permission shall be obtained from the Resident Engineer before proceeding with the next phase of testing. Original copies of all data produced during performance verification and endurance testing shall be turned over to the Resident Engineer at the conclusion of each phase of testing and prior to Resident Engineer approval of the test.

2. Test Procedures and Reports: The test procedures, compliant w/ VA standard test procedures, shall explain in detail, step-by-step actions and expected results demonstrating compliance with the requirements of the specification. The test reports shall be used to document results of the tests. The reports shall be delivered to the Resident Engineer within seven (7) calendar days after completion of each test.

B. The inspection and test will be conducted by a factory-certified contractor representative and witnessed by a Government Representative. The results of the inspection will be officially recorded by a designated Government Representative and maintained on file by the Resident Engineer (RE), until completion of the entire project. The results will be compared to the Acceptance Test results.

C. Contractor’s Field Testing (CFT)

1. The Contractor shall calibrate and test all equipment, verify DTM operation, place the integrated system in service, and test the integrated system. Ground rods installed by this Contractor within the base of camera poles shall be tested as specified in IEEE STD 142. The Contractor shall test all security systems and equipment,

and provide written proof of a 100% operational system before a date is established for the system acceptance test. Documentation package for CFT shall include completed (fully annotated details of test details) for each device and system tested, and annotated loading sheets documenting complete testing to Resident Engineer approval. CFT test documentation package shall conform to submittal requirements outlined in this Section. The Contractor's field testing procedures shall be identical to the Resident Engineer's acceptance testing procedures. The Contractor shall provide the Resident Engineer with a written listing of all equipment and software indicating all equipment and components have been tested and passed. The Contractor shall deliver a written report to the Resident Engineer stating the installed complete system has been calibrated, tested, and is ready to begin performance verification testing; describing the results of the functional tests, diagnostics, and calibrations; and the report shall also include a copy of the approved acceptance test procedure. Performance verification testing shall not take place until written notice by contractor is received certifying that a contractors field test was successful.

D. Performance Verification Test (PVT)

1. Test team:

a. After the system has been pretested and the Contractor has submitted the pretest results and certification to the Resident Engineer, then the Contractor shall schedule an acceptance test to date and give the Resident Engineer written, notice as described herein, prior to the date the acceptance test is expected to begin. The system shall be tested in the presence of a Government Representative, an OEM certified representative, representative of the Contractor and other approved by the Resident Engineer. The system shall be tested utilizing the approved test equipment to certify proof of performance, FCC, UL and Emergency Service compliance. The test shall verify that the total system meets all the requirements of this specification. The notification of the acceptance test shall include the expected length (in time) of the test.

2. The Contractor shall demonstrate the completed Physical Access Control System PACS complies with the contract requirements. In addition, the Contractor shall provide written certification that the system is 100% operational prior to establishing a date for starting

PVT. Using approved test procedures, all physical and functional requirements of the project shall be demonstrated and shown. The PVT will be stopped and aborted as soon as 10 technical deficiencies are found requiring correction. The Contractor shall be responsible for all travel and lodging expenses incurred for out-of-town personnel required to be present for resumption of the PVT. If the acceptance test is aborted, the re-test will commence from the beginning with a retest of components previously tested and accepted.

3. The PVT, as specified, shall not begin until receipt of written certification that the Contractors Field Testing was successful. This shall include certification of successful completion of testing as specified in paragraph "Contractor's Field Testing", and upon successful completion of testing at any time when the system fails to perform as specified. Upon termination of testing by the Resident Engineer or Contractor, the Contractor shall commence an assessment period as described for Endurance Testing Phase II.
4. Upon successful completion of the acceptance test, the Contractor shall deliver test reports and other documentation, as specified, to the Resident Engineer prior to commencing the endurance test.
5. Additional Components of the PVT shall include:
   a. System Inventory
      1) All Device equipment
      2) All Software
      3) All Logon and Passwords
      4) All Cabling System Matrices
      5) All Cable Testing Documents
      6) All System and Cabinet Keys
   b. Inspection
      1) Contractor shall record an inspection punch list noting all system deficiencies. The contractor shall prepare an inspection punch list format for Resident Engineers approval.
      2) As a minimum the punch list shall include a listing of punch list items, punch list item location, description of item problem, date noted, date corrected, and details of how item was corrected.
6. Partial PVT - At the discretion of Resident engineer, the Performance Verification Test may be performed in part should a 100% compliant CFT be performed. In the event that a partial PVT will be performed instead of a complete PVT; the partial PVT shall be performed by

testing 10% of the system. The contractor shall perform a test of each procedure on select devices or equipment.

E. Endurance Test

1. The Contractor shall demonstrate the specified probability of detection and false alarm rate requirements of the completed system. The endurance test shall be conducted in phases as specified below. The endurance test shall not be started until the Resident Engineer notifies the Contractor, in writing, that the performance verification test is satisfactorily completed, training as specified has been completed, and correction of all outstanding deficiencies has been satisfactorily completed. VA shall operate the system 24 hours per day, including weekends and holidays, during Phase I and Phase III endurance testing. VA will maintain a log of all system deficiencies. The Resident Engineer may terminate testing at any time the system fails to perform as specified. Upon termination of testing, the Contractor shall commence an assessment period as described for Phase II. During the last day of the test, the Contractor shall verify the appropriate operation of the system. Upon successful completion of the endurance test, the Contractor shall deliver test reports and other documentation as specified to the Resident Engineer prior to acceptance of the system.
2. Phase I (Testing): The test shall be conducted 24 hours per day for 15 consecutive calendar days, including holidays, and the system shall operate as specified. The Contractor shall make no repairs during this phase of testing unless authorized in writing by the Resident Engineer. If the system experiences no failures, the Contractor may proceed directly to Phase III testing after receiving written permission from the Resident Engineer.
3. Phase II (Assessment):
   a. After the conclusion of Phase I, the Contractor shall identify all failures, determine causes of all failures, repair all failures, and deliver a written report to the Resident Engineer. The report shall explain in detail the nature of each failure, corrective action taken, results of tests performed, and recommend the point at which testing should be resumed.
   b. After delivering the written report, the Contractor shall convene a test review meeting at the job site to present the results and recommendations to the Resident Engineer. The meeting shall not be scheduled earlier than five (5) business days after the

Resident Engineer receives the report. As part of this test review meeting, the Contractor shall demonstrate all failures have been corrected by performing appropriate portions of the performance verification test. Based on the Contractor's report and the test review meeting, the Resident Engineer will provide a written determine of either the restart date or require Phase I be repeated.

4. Phase III (Testing): The test shall be conducted 24 hours per day for 15 consecutive calendar days, including holidays, and the system shall operate as specified. The Contractor shall make no repairs during this phase of testing unless authorized in writing by the Resident Engineer.
5. Phase IV (Assessment):
   1. After the conclusion of Phase III, the Contractor shall identify all failures, determine causes of all failures, repair all failures, and deliver a written report to the Resident Engineer. The report shall explain in detail the nature of each failure, corrective action taken, results of tests performed, and recommend the point at which testing should be resumed.
   2. After delivering the written report, the Contractor shall convene a test review meeting at the job site to present the results and recommendations to the Resident Engineer. The meeting shall not be scheduled earlier than five (5) business days after receipt of the report by the Resident Engineer. As a part of this test review meeting, the Contractor shall demonstrate that all failures have been corrected by repeating appropriate portions for the performance verification test. Based on the review meeting the test should not be scheduled earlier than five (5) business days after the Resident Engineer receives the report. As a part of this test review meeting, the Contractor shall demonstrate all failures have been corrected by repeating appropriate portions of the performance verification test. Based on the Contractor's report and the test review meeting, the Resident Engineer will provide a written determine of either the restart date or require Phase III be repeated. After the conclusion of any re-testing which the Resident Engineer may require, the Phase IV assessment shall be repeated as if Phase III had just been completed.

H. Exclusions

1. The Contractor will not be held responsible for failures in system performance resulting from the following:
   a. An outage of the main power in excess of the capability of any backup power source provided the automatic initiation of all backup sources was accomplished and that automatic shutdown and restart of the PACS performed as specified.
   b. Failure of an Owner furnished equipment or communications link, provided the failure was not due to Contractor furnished equipment, installation, or software.
   c. Failure of existing Owner owned equipment, provided the failure was not due to Contractor furnished equipment, installation, or software.

**- - - E N D - - -**

# SECTION 28 05 13
# CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This section specifies the finishing, installation, connection, testing and certification the conductors and cables required for a fully functional for electronic safety and security (ESS) system.

### 1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 07 84 00 - FIRESTOPPING. Requirements for firestopping application and use.

C. Section 28 05 00 – COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. Requirements for general requirements that are common to more than one section in Division 28.

D. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

E. Section 28 05 28.33 - CONDUITS AND BOXES FOR ELECTRONIC SECURITY AND SAFETY. Requirements for infrastructure.

G. Section 31 20 00 - EARTH MOVING. For excavation and backfill for cables that are installed in conduit.

### 1.3 DEFINITIONS

A. BICSI: Building Industry Consulting Service International.

B. EMI: Electromagnetic interference.

C. IDC: Insulation displacement connector.

D. Ladder Cable Tray: A fabricated structure consisting of two longitudinal side rails connected by individual transverse members (rungs).

E. Low Voltage: As defined in NFPA 70 for circuits and equipment operating at less than 50 V or for remote-control and signaling power-limited circuits.

F. Open Cabling: Passing telecommunications cabling through open space (e.g., between the studs of a wall cavity).

G. RCDD: Registered Communications Distribution Designer.

H. Solid-Bottom or Nonventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal side rails, and a bottom without ventilation openings.

I. Trough or Ventilated Cable Tray: A fabricated structure consisting of integral or separate longitudinal rails and a bottom having openings

sufficient for the passage of air and using 75 percent or less of the plan area of the surface to support cables.

J. UTP: Unshielded twisted pair.

**1.4 QUALITY ASSURANCE**

A. See section 28 05 00, Paragraph 1.4.

**1.5 SUBMITTALS**

A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

1. Manufacturer's Literature and Data: Showing each cable type and rating.
2. Certificates: Two weeks prior to final inspection, deliver to the Resident Engineer four copies of the certification that the material is in accordance with the drawings and specifications and diagrams for cable management system.
3. Shop Drawings: Cable tray layout, showing cable tray route to scale, with relationship between the tray and adjacent structural, electrical, and mechanical elements. Include the following:
   a. Vertical and horizontal offsets and transitions.
   b. Clearances for access above and to side of cable trays.
   c. Vertical elevation of cable trays above the floor or bottom of ceiling structure.
   d. Load calculations to show dead and live loads as not exceeding manufacturer's rating for tray and its support elements.
   e. System labeling schedules, including electronic copy of labeling schedules that are part of the cable and asset identification system of the software specified in Parts 2 and 3.
4. Wiring Diagrams. Show typical wiring schematics including the following:
   a. Workstation outlets, jacks, and jack assemblies.
   b. Patch cords.
   c. Patch panels.
5. Cable Administration Drawings: As specified in Part 3 "Identification" Article.
6. Project planning documents as specified in Part 3.
7. Maintenance Data: For wire and cable to include in maintenance manuals.

**1.6 APPLICABLE PUBLICATIONS**

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent

referenced. Publications are reference in the text by the basic designation only.

B. American Society of Testing Material (ASTM):

D2301-04.....Standard Specification for Vinyl Chloride Plastic Pressure Sensitive Electrical Insulating Tape

C. Federal Specifications (Fed. Spec.):

A-A-59544-08.....Cable and Wire, Electrical (Power, Fixed Installation)

D. National Fire Protection Association (NFPA):

70-11.....National Electrical Code (NEC)

E. Underwriters Laboratories, Inc. (UL):

44-05.....Thermoset-Insulated Wires and Cables

83-08.....Thermoplastic-Insulated Wires and Cables

467-07.....Electrical Grounding and Bonding Equipment

486A-03.....Wire Connectors and Soldering Lugs for Use with Copper Conductors

486C-04.....Splicing Wire Connectors

486D-05.....Insulated Wire Connector Systems for Underground Use or in Damp or Wet Locations

486E-00.....Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors

493-07.....Thermoplastic-Insulated Underground Feeder and Branch Circuit Cable

514B-04.....Fittings for Cable and Conduit

1479-03.....Fire Tests of Through-Penetration Fire Stops//

**1.7 DELIVERY, STORAGE, AND HANDLING**

A. Test cables upon receipt at Project site.

1. Test optical fiber cable to determine the continuity of the strand end to end. Use optical-fiber flashlight.
2. Test optical fiber cable on reels. Use an optical time domain reflectometer to verify the cable length and locate cable defects, splices, and connector; include the loss value of each. Retain test data and include the record in maintenance data.
3. Test each pair of UTP cable for open and short circuits.

**1.8 PROJECT CONDITIONS**

A. Environmental Limitations: Do not deliver or install UTP, optical fiber, and coaxial cables and connecting materials until wet work in spaces is complete and dry, and temporary HVAC system is operating and

maintaining ambient temperature and humidity conditions at occupancy levels during the remainder of the construction period.

**PART 2 - PRODUCTS**

**2.1 GENERAL**

A. General: All cabling locations shall be in conduit systems as outlined in Division 28 unless a waiver is granted in writing or an exception is noted on the construction drawings.

B. Conduit and Boxes: Comply with requirements in Division 28 Section "Conduits and Backboxes for Electrical Systems." Flexible metal conduit shall not be used.

1. Outlet boxes shall be no smaller than 2 inches (50 mm) wide, 3 inches (75 mm) high, and 2-1/2 inches (64 mm) deep.

**2.2 UTP CABLE**

A. Description: 100-ohm, 4-pair UTP, formed into 25-pair binder groups covered with a blue thermoplastic jacket.

1. Comply with ICEA S-90-661 for mechanical properties.
2. Comply with TIA/EIA-568-B.1 for performance specifications.
3. Comply with TIA/EIA-568-B.2, Category 5e.
4. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444 and NFPA 70 for the following types:
   a. Communications, General Purpose: Type CM or CMG.
   b. Communications, Plenum Rated: Type CMP complying with NFPA 262.
   c. Communications, Riser Rated: Type CMR, complying with UL 1666.
   d. Communications, Limited Purpose: Type CMX, CM, or CMG.
   e. Multipurpose: Type MP or MPG.
   f. Multipurpose, Plenum Rated: Type MPP, complying with NFPA 262.
   g. Multipurpose, Riser Rated: Type MPR or MPP, complying with UL 1666.

**2.3 UTP CABLE HARDWARE**

A. UTP Cable Connecting Hardware: IDC type, using modules designed for punch-down caps or tools. Cables shall be terminated with connecting hardware of the same category or higher.

B. Connecting Blocks: 110-style for Category 5e. Provide blocks for the number of cables terminated on the block, plus 25 <Insert percentage> percent spare. Integral with connector bodies, including plugs and jacks where indicated.

**2.4 OPTICAL FIBER CABLE**

A. Description: Multimode, 62.5/125-micrometer, 12-fiber, tight buffer, optical fiber cable.
   1. Comply with ICEA S-83-596 for mechanical properties.
   2. Comply with TIA/EIA-568-B.3 for performance specifications.
   3. Comply with TIA/EIA-492AAAA-A for detailed specifications.
   4. Listed and labeled by an NRTL acceptable to authorities having jurisdiction as complying with UL 444, UL 1651, and NFPA 70 for the following types:
      a. General Purpose, Nonconductive: Type OFN or OFNG.
      b. Plenum Rated, Nonconductive: Type OFNP, complying with NFPA 262.
      c. Riser Rated, Nonconductive: Type OFNR, complying with UL 1666.
      d. General Purpose, Conductive: Type OFC or OFCG.
      e. Plenum Rated, Conductive: Type OFCP, complying with NFPA 262.
      f. Riser Rated, Conductive: Type OFCR, complying with UL 1666.
   5. Maximum Attenuation: 3.50 dB/km at 850 nm; 1.5 dB/km at 1300 nm.
   7. Minimum Modal Bandwidth: 160 MHz-km at 850 nm; 500 MHz-km at 1300 nm.

B. Jacket:
   1. Jacket Color: Orange for 62.5/125-micrometer cable.
   2. Cable cordage jacket, fiber, unit, and group color shall be according to TIA/EIA-598-B.
   3. Imprinted with fiber count, fiber type, and aggregate length at regular intervals not to exceed 40 inches (1000 mm).

**2.6 OPTICAL FIBER CABLE HARDWARE**

A. Cable Connecting Hardware: Meet the Optical Fiber Connector Intermateability Standards (FOCIS) specifications of TIA/EIA-604-2, TIA/EIA-604-3-A, and TIA/EIA-604-12. Comply with TIA/EIA-568-B.3.
   1. Quick-connect, simplex and duplex, Type LC connectors. Insertion loss shall be not more than 0.75 dB.
   2. Type SFF connectors may be used in termination racks, panels, and equipment packages.

**2.7 RS-232 CABLE**

A. Standard Cable: NFPA 70, Type CM.
   1. Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors.
   2. Polypropylene insulation.
   3. Individual aluminum foil-polyester tape shielded pairs with 100 percent shield coverage.

4. PVC jacket.
5. Pairs are cabled on common axis with No. 24 AWG, stranded (7x32) tinned copper drain wire.
6. Flame Resistance: Comply with UL 1581.

B. Plenum-Rated Cable: NFPA 70, Type CMP.
1. Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors.
2. Plastic insulation.
3. Individual aluminum foil-polyester tape shielded pairs with 100 percent shield coverage.
4. Plastic jacket.
5. Pairs are cabled on common axis with No. 24 AWG, stranded (7x32) tinned copper drain wire.
6. Flame Resistance: Comply with NFPA 262.

**2.8 RS-485 CABLE**

A. Standard Cable: NFPA 70, Type CM or CMG.
1. Paired, 2 pairs, twisted, No. 22 AWG, stranded (7x30) tinned copper conductors.
2. PVC insulation.
3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with UL 1581.

B. Plenum-Rated Cable: NFPA 70, Type CMP.
1. Paired, 2 pairs, No. 22 AWG, stranded (7x30) tinned copper conductors.
2. Fluorinated ethylene propylene insulation.
3. Unshielded.
4. Fluorinated ethylene propylene jacket.
5. Flame Resistance: NFPA 262, Flame Test.

**2.9 LOW-VOLTAGE CONTROL CABLE**

A. Paired Lock Cable: NFPA 70, Type CMG.
1. 1 pair, twisted, No. 16 AWG, stranded (19x29) tinned copper conductors.
2. PVC insulation.
3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with UL 1581.

B. Plenum-Rated, Paired Lock Cable: NFPA 70, Type CMP.

1. 1 pair, twisted, No. 16 AWG, stranded (19x29) tinned copper conductors.
2. PVC insulation.
3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with NFPA 262.

C. Paired Lock Cable: NFPA 70, Type CMG.
1. 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors.
2. PVC insulation.
3. Unshielded.
4. PVC jacket.
5. Flame Resistance: Comply with UL 1581.

D. Plenum-Rated, Paired Lock Cable: NFPA 70, Type CMP.
1. 1 pair, twisted, No. 18 AWG, stranded (19x30) tinned copper conductors.
2. Fluorinated ethylene propylene insulation.
3. Unshielded.
4. Plastic jacket.
5. Flame Resistance: NFPA 262, Flame Test.

**2.10 FIRE ALARM WIRE AND CABLE**

A. General Wire and Cable Requirements: NRTL listed and labeled as complying with NFPA 70, Article 760.

B. Signaling Line Circuits: Twisted, shielded pair size as recommended by system manufacturer.
1. Circuit Integrity Cable: Twisted shielded pair, NFPA 70, Article 760, Classification CI, for power-limited fire alarm signal service Type FPL. NRTL listed and labeled as complying with UL 1424 and UL 2196 for a 2-hour rating.

C. Non-Power-Limited Circuits: Solid-copper conductors with 600-V rated, 75 deg C, color-coded insulation.
1. Low-Voltage Circuits: No. 16 AWG, minimum.
2. Line-Voltage Circuits: No. 12 AWG, minimum.
3. Multiconductor Armored Cable: NFPA 70, Type MC, copper conductors, Type TFN/THHN conductor insulation, copper drain wire, copper armor with outer jacket with red identifier stripe, NTRL listed for fire alarm and cable tray installation, plenum rated, and complying with requirements in UL 2196 for a 2-hour rating.

**2.11 IDENTIFICATION PRODUCTS**

A. Comply with UL 969 for a system of labeling materials, including label stocks, laminating adhesives, and inks used by label printers.

**2.12 SOURCE QUALITY CONTROL**

A. Testing Agency: Engage a qualified testing agency to evaluate cables.

B. Factory test UTP and optical fiber cables on reels according to TIA/EIA-568-B.1.

C. Factory test UTP cables according to TIA/EIA-568-B.2.

D. Factory test multimode optical fiber cables according to TIA/EIA-526-14-A and TIA/EIA-568-B.3.

E. Factory sweep test coaxial cables at frequencies from 5 MHz to 1 GHz. Sweep test shall test the frequency response, or attenuation over frequency, of a cable by generating a voltage whose frequency is varied through the specified frequency range and graphing the results.

F. Cable will be considered defective if it does not pass tests and inspections.

G. Prepare test and inspection reports.

**2.13 WIRE LUBRICATING COMPOUND**

A. Suitable for the wire insulation and conduit it is used with, and shall not harden or become adhesive.

B. Shall not be used on wire for isolated type electrical power systems.

**2.14 FIREPROOFING TAPE**

A. The tape shall consist of a flexible, conformable fabric of organic composition coated one side with flame-retardant elastomer.

B. The tape shall be self-extinguishing and shall not support combustion. It shall be arc-proof and fireproof.

C. The tape shall not deteriorate when subjected to water, gases, salt water, sewage, or fungus and be resistant to sunlight and ultraviolet light.

D. The finished application shall withstand a 200-ampere arc for not less than 30 seconds.

E. Securing tape: Glass cloth electrical tape not less than 0.18 mm (7 mils) thick, and 19 mm (3/4 inch) wide.

**PART 3 - EXECUTION**

**3.1 INSTALLATION OF CONDUCTORS AND CABLES**

A. Comply with NECA 1.

B. General Requirements for Cabling:

1. Comply with TIA/EIA-568-B.1.

2. Comply with BICSI ITSIM, Ch. 6, "Cable Termination Practices."
3. Install 110-style IDC termination hardware unless otherwise indicated.
4. Terminate all conductors; no cable shall contain un-terminated elements. Make terminations only at indicated outlets, terminals, and cross-connect and patch panels.
5. Cables may not be spliced. Secure and support cables at intervals not exceeding 30 inches (760 mm) and not more than 6 inches (150 mm) from cabinets, boxes, fittings, outlets, racks, frames, and terminals.
6. Bundle, lace, and train conductors to terminal points without exceeding manufacturer's limitations on bending radii, but not less than radii specified in BICSI ITSIM, "Cabling Termination Practices" Chapter. Install lacing bars and distribution spools.
7. Do not install bruised, kinked, scored, deformed, or abraded cable. Do not splice cable between termination, tap, or junction points. Remove and discard cable if damaged during installation and replace it with new cable.
8. Cold-Weather Installation: Bring cable to room temperature before dereeling. Heat lamps shall not be used for heating.
9. Pulling Cable:
   a. Comply with BICSI ITSIM, Ch. 4, "Pulling Cable." Monitor cable pull tensions.
   b. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling of cables.
   c. Use ropes made of nonmetallic material for pulling feeders.
   d. Attach pulling lines for feeders by means of either woven basket grips or pulling eyes attached directly to the conductors, as approved by the Resident Engineer.
   e. Pull in multiple cables together in a single conduit.

C. Splice cables and wires where necessary only in outlet boxes, junction boxes, or pull boxes.
   1. Splices and terminations shall be mechanically and electrically secure.
   2. Where the Government determines that unsatisfactory splices or terminations have been installed, remove the devices and install approved devices at no additional cost to the Government.

D. Seal cable and wire entering a building from underground, between the wire and conduit where the cable exits the conduit, with a non-hardening approved compound.
E. Unless otherwise specified in other sections install wiring and connect to equipment/devices to perform the required functions as shown and specified.
F. Except where otherwise required, install a separate power supply circuit for each system so that malfunctions in any system will not affect other systems.
G. Where separate power supply circuits are not shown, connect the systems to the nearest panel boards of suitable voltages, which are intended to supply such systems and have suitable spare circuit breakers or space for installation.
H. Install a red warning indicator on the handle of the branch circuit breaker for the power supply circuit for each system to prevent accidental de-energizing of the systems.
I. System voltages shall be 120 volts or lower where shown on the drawings or as required by the NEC.
J. UTP Cable Installation:
   1. Comply with TIA/EIA-568-B.2.
   2. Do not untwist UTP cables more than 1/2 inch (12 mm) from the point of termination to maintain cable geometry.
K. Optical Fiber Cable Installation:
   1. Comply with TIA/EIA-568-B.3.
   2. Cable shall be terminated on connecting hardware that is rack or cabinet mounted.
L. Open-Cable Installation:
   1. Install cabling with horizontal and vertical cable guides in telecommunications spaces with terminating hardware and interconnection equipment.
   2. Suspend copper cable not in a wireway or pathway a minimum of 8 inches (200 mm) above ceilings by cable supports not more than 60 inches (1525 mm) apart.
   3. Cable shall not be run through structural members or in contact with pipes, ducts, or other potentially damaging items.
M. Separation from EMI Sources:
   1. Comply with BICSI TDMM and TIA/EIA-569-A recommendations for separating unshielded copper voice and data communication cable from

potential EMI sources, including electrical power lines and equipment.

2. Separation between open communications cables or cables in nonmetallic raceways and unshielded power conductors and electrical equipment shall be as follows:
   a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 5 inches (127 mm).
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 12 inches (300 mm).
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 24 inches (600 mm).
3. Separation between communications cables in grounded metallic raceways and unshielded power lines or electrical equipment shall be as follows:
   a. Electrical Equipment Rating Less Than 2 kVA: A minimum of 2-1/2 inches (64 mm).
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 6 inches (150 mm).
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 12 inches (300 mm).
4. Separation between communications cables in grounded metallic raceways and power lines and electrical equipment located in grounded metallic conduits or enclosures shall be as follows:
   a. Electrical Equipment Rating Less Than 2 kVA: No requirement.
   b. Electrical Equipment Rating between 2 and 5 kVA: A minimum of 3 inches (75 mm).
   c. Electrical Equipment Rating More Than 5 kVA: A minimum of 6 inches (150 mm).
5. Separation between Cables and Electrical Motors and Transformers, 5 kVA or HP and Larger: A minimum of 48 inches (1200 mm).
6. Separation between Cables and Fluorescent Fixtures: A minimum of 5 inches (127 mm).

**3.2 FIRE ALARM WIRING INSTALLATION**

A. Comply with NECA 1 and NFPA 72.

B. Wiring Method: Install wiring in metal raceway according to Division 28 Section CONDUITS AND BACKBOXES FOR ELECTRICAL SYSTEMS."
   1. Install plenum cable in environmental air spaces, including plenum ceilings.

2. Fire alarm circuits and equipment control wiring associated with the fire alarm system shall be installed in a dedicated raceway system. This system shall not be used for any other wire or cable.

C. Wiring Method:

1. Cables and raceways used for fire alarm circuits, and equipment control wiring associated with the fire alarm system, may not contain any other wire or cable.
2. Fire-Rated Cables: Use of 2-hour, fire-rated fire alarm cables, NFPA 70, Types MI and CI, is not permitted.
3. Signaling Line Circuits: Power-limited fire alarm cables shall not be installed in the same cable or raceway as signaling line circuits.

D. Wiring within Enclosures: Separate power-limited and non-power-limited conductors as recommended by manufacturer. Install conductors parallel with or at right angles to sides and back of the enclosure. Bundle, lace, and train conductors to terminal points with no excess. Connect conductors that are terminated, spliced, or interrupted in any enclosure associated with the fire alarm system to terminal blocks. Mark each terminal according to the system's wiring diagrams. Make all connections with approved crimp-on terminal spade lugs, pressure-type terminal blocks, or plug connectors.

E. Cable Taps: Use numbered terminal strips in junction, pull, and outlet boxes, cabinets, or equipment enclosures where circuit connections are made.

F. Color-Coding: Color-code fire alarm conductors differently from the normal building power wiring. Use one color-code for alarm circuit wiring and another for supervisory circuits. Color-code audible alarm-indicating circuits differently from alarm-initiating circuits. Use different colors for visible alarm-indicating devices. Paint fire alarm system junction boxes and covers red.

G. Risers: Install at least two vertical cable risers to serve the fire alarm system. Separate risers in close proximity to each other with a minimum one-hour-rated wall, so the loss of one riser does not prevent the receipt or transmission of signals from other floors or zones.

H. Wiring to Remote Alarm Transmitting Device: 1-inch (25-mm) conduit between the fire alarm control panel and the transmitter. Install number of conductors and electrical supervision for connecting wiring as needed to suit monitoring function.

**3.3 CONTROL CIRCUIT CONDUCTORS**

A. Minimum Conductor Sizes:

1. Class 1 remote-control and signal circuits, No. 14 AWG.
2. Class 2 low-energy, remote-control and signal circuits, No. 16 AWG.
3. Class 3 low-energy, remote-control, alarm and signal circuits, No. 12 AWG.

**3.4 CONNECTIONS**

A. Comply with requirements in Division 28 Section, PHYSICAL ACCESS CONTROL for connecting, terminating, and identifying wires and cables.

B. Comply with requirements in Division 28 Section "VIDEO SURVEILLANCE" for connecting, terminating, and identifying wires and cables.

C. Comply with requirements in Division 28 Section "FIRE DETECTION AND ALARM" for connecting, terminating, and identifying wires and cables.

**3.5 FIRESTOPPING**

A. Comply with requirements in Division 07 Section "PENETRATION FIRESTOPPING."

B. Comply with TIA/EIA-569-A, "Firestopping" Annex A.

C. Comply with BICSI TDMM, "Firestopping Systems" Article.

**3.6 GROUNDING**

A. For communications wiring, comply with ANSI-J-STD-607-A and with BICSI TDMM, "Grounding, Bonding, and Electrical Protection" Chapter.

B. For low-voltage wiring and cabling, comply with requirements in Division 28 Section "GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY."

**3.7 IDENTIFICATION**

A. Identify system components, wiring, and cabling complying with TIA/EIA-606-A.

B. Install a permanent wire marker on each wire at each termination.

C. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.

D. Wire markers shall retain their markings after cleaning.

E. In each handhole, install embossed brass tags to identify the system served and function.

**3.8 FIELD QUALITY CONTROL**

A. Testing Agency: Engage a qualified testing agency to perform tests and inspections.

B. Perform tests and inspections.

C. Tests and Inspections:

1. Visually inspect UTP and optical fiber cable jacket materials for UL or third-party certification markings. Inspect cabling terminations to confirm color-coding for pin assignments, and inspect cabling connections to confirm compliance with TIA/EIA-568-B.1.

2. Visually inspect cable placement, cable termination, grounding and bonding, equipment and patch cords, and labeling of all components.
3. Test UTP cabling for DC loop resistance, shorts, opens, intermittent faults, and polarity between conductors. Test operation of shorting bars in connection blocks. Test cables after termination but not cross connection.
   a. Test instruments shall meet or exceed applicable requirements in TIA/EIA-568-B.2. Perform tests with a tester that complies with performance requirements in "Test Instruments (Normative)" Annex, complying with measurement accuracy specified in "Measurement Accuracy (Informative)" Annex. Use only test cords and adapters that are qualified by test equipment manufacturer for channel or link test configuration.
4. Optical Fiber Cable Tests:
   a. Test instruments shall meet or exceed applicable requirements in TIA/EIA-568-B.1. Use only test cords and adapters that are qualified by test equipment manufacturer for channel or link test configuration.
   b. Link End-to-End Attenuation Tests:
      1) Multimode Link Measurements: Test at 850 or 1300 nm in 1 direction according to TIA/EIA-526-14-A, Method B, One Reference Jumper.
      2) Attenuation test results for links shall be less than 2.0 dB. Attenuation test results shall be less than that calculated according to equation in TIA/EIA-568-B.1.

D. Document data for each measurement. Print data for submittals in a summary report that is formatted using Table 10.1 in BICSI TDMM as a guide, or transfer the data from the instrument to the computer, save as text files, print, and submit.

E. End-to-end cabling will be considered defective if it does not pass tests and inspections.

F. Prepare test and inspection reports.

**3.9 EXISITNG WIRING**

A. Unless specifically indicated on the plans, existing wiring shall not be reused for the new installation. Only wiring that conforms to the specifications and applicable codes may be reused. If existing wiring does not meet these requirements, existing wiring may not be reused and new wires shall be installed.

- - - E N D - - -

# SECTION 28 05 28.33
# CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This section specifies the finishing, installation, connection, testing certification of the conduit, fittings, and boxes to form a complete, coordinated, raceway system(s). Conduits and when approved separate UL Certified and Listed partitioned telecommunications raceways are required for a fully functional Electronic Safety and Security (ESS) system. Raceways are required for all electronic safety and security cabling unless shown or specified otherwise.

B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

### 1.2 RELATED WORK

A. Section 01 00 00 - GENERAL REQUIREMENTS. For General Requirements.

B. Section 06 10 00 - ROUGH CARPENTRY. Requirements for mounting board for communication closets.

C. Section 07 84 00 - FIRESTOPPING. Requirements for sealing around penetrations to maintain the integrity of fire rated construction.

D. Section 07 60 00 - FLASHING AND SHEET METAL. Requirements for fabrications for the deflection of water away from the building envelope at penetrations.

E. Section 07 92 00 - JOINT SEALANTS. Requirements for sealing around conduit penetrations through the building envelope to prevent moisture migration into the building.

F. Section 09 91 00 - PAINTING. Requirements for identification and painting of conduit and other devices.

G. Section 28 05 00 - COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. For general electrical requirements, general arrangement of the contract documents, coordination, quality assurance, project conditions, equipment and materials, and items that is common to more than one section of Division 28.

H. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

J. Section 31 20 00 - EARTH MOVING. For bedding of conduits.

**1.3 DEFINITIONS**

A. EMT: Electrical metallic tubing.

B. ENT: Electrical nonmetallic tubing.

C. EPDM: Ethylene-propylene-diene terpolymer rubber.

D. FMC: Flexible metal conduit.

E. IMC: Intermediate metal conduit.

F. NBR: Acrylonitrile-butadiene rubber.

G. RNC: Rigid nonmetallic conduit.

**1.4 QUALITY ASSURANCE**

A. Refer to Paragraph 1.4 Quality Assurance, in Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY.

**1.5 SUBMITTALS**

A. Submit in accordance with Section 28 05 00, COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Furnish the following:

B. Shop Drawings:

1. Size and location of main feeders;
2. Size and location of panels and pull boxes
3. Layout of required conduit penetrations through structural elements.
4. The specific item proposed and its area of application shall be identified on the catalog cuts.

C. Certification: Prior to final inspection, deliver to the Resident Engineer four copies of the certification that the material is in accordance with the drawings and specifications and has been properly installed.

D. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion.

E. Product Data: For surface raceways, wireways and fittings, floor boxes, hinged-cover enclosures, and cabinets.

F. Shop Drawings: For the following raceway components. Include plans, elevations, sections, details, and attachments to other work.

**1.6 APPLICABLE PUBLICATIONS**

A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent

referenced. Publications are referenced in the text by the basic designation only.

B. National Electrical Manufacturers Association (NEMA):

TC-3-04.....PVC Fittings for Use with Rigid PVC Conduit and Tubing

FB1-07.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

C. National Fire Protection Association (NFPA):

70-11.....National Electrical Code (NEC)

D. Underwriters Laboratories, Inc. (UL):

1-05.....Flexible Metal Conduit

5-04.....Surface Metal Raceway and Fittings

6-07.....Rigid Metal Conduit

50-07.....Enclosures for Electrical Equipment

360-09.....Liquid-Tight Flexible Steel Conduit

467-07.....Grounding and Bonding Equipment

514A-04.....Metallic Outlet Boxes

514B-04.....Fittings for Cable and Conduit

514C-02.....Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers

651-05.....Schedule 40 and 80 Rigid PVC Conduit

651A-07.....Type EB and A Rigid PVC Conduit and HDPE Conduit

797-07.....Electrical Metallic Tubing

1242-06.....Intermediate Metal Conduit

**PART 2 - PRODUCTS**

**2.1 GENERAL**

A. Conduit Size: In accordance with the NEC, but not less than 20 mm (3/4 inch) unless otherwise shown.

**2.2.CONDUIT**

A. Rigid galvanized steel: Shall Conform to UL 6, ANSI C80.1.

C. Rigid intermediate steel conduit (IMC): Shall Conform to UL 1242, ANSI C80.6.

D. Electrical metallic tubing (EMT): Shall Conform to UL 797, ANSI C80.3. Maximum size not to exceed 105 mm (4 inches) and shall be permitted only with cable rated 600 volts or less.

E. Flexible galvanized steel conduit: Shall Conform to UL 1.

F. Direct burial plastic conduit: Shall conform to UL 651 and UL 651A, heavy wall PVC or high density polyethylene (PE).

**2.3.CONDUIT FITTINGS**

A. Rigid steel and IMC conduit fittings:
   1. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
   2. Standard threaded couplings, locknuts, bushings, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
   3. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
   4. Bushings: Metallic insulating type, consisting of an insulating insert molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
   5. Erickson (union-type) and set screw type couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
   6. Sealing fittings: Threaded cast iron type. Use continuous drain type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.

C. Electrical metallic tubing fittings:
   1. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
   2. Only steel or malleable iron materials are acceptable.
   3. Couplings and connectors: Concrete tight and rain tight, with connectors having insulated throats. Use gland and ring compression type couplings and connectors for conduit sizes 50 mm (2 inches) and smaller. Use set screw type couplings with four set screws each for conduit sizes over 50 mm (2 inches). Use set screws of case-hardened steel with hex head and cup point to firmly seat in wall of conduit for positive grounding.
   4. Indent type connectors or couplings are prohibited.
   5. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.

D. Flexible steel conduit fittings:

1. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
2. Clamp type, with insulated throat.

E. Liquid-tight flexible metal conduit fittings:
1. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
2. Only steel or malleable iron materials are acceptable.
3. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.

F. Direct burial plastic conduit fittings:
1. Fittings shall meet the requirements of UL 514C and NEMA TC3.
2. As recommended by the conduit manufacturer.

G. Expansion and deflection couplings:
1. Conform to UL 467 and UL 514B.
2. Accommodate, 19 mm (0.75 inch) deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.
3. Include internal flexible metal braid sized to guarantee conduit ground continuity and fault currents in accordance with UL 467, and the NEC code tables for ground conductors.
4. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat resistant molded rubber material with stainless steel jacket clamps.

**2.5 CONDUIT SUPPORTS**

A. Parts and hardware: Zinc-coat or provide equivalent corrosion protection.

B. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.

C. Multiple conduit (trapeze) hangers: Not less than 38 mm by 38 mm (1-1/2 by 1-1/2 inch), 12 gage steel, cold formed, lipped channels; with not less than 9 mm (3/8 inch) diameter steel hanger rods.

D. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.

**2.6 OUTLET, JUNCTION, AND PULL BOXES**

A. UL-50 and UL-514A.

B. Cast metal where required by the NEC or shown, and equipped with rustproof boxes.

C. Nonmetallic Outlet and Device Boxes: NEMA OS 2.

D. Metal Floor Boxes: Cast or sheet metal, semi-adjustable, rectangular.

E. Sheet metal boxes: Galvanized steel, except where otherwise shown.
F. Flush mounted wall or ceiling boxes shall be installed with raised covers so that front face of raised cover is flush with the wall. Surface mounted wall or ceiling boxes shall be installed with surface style flat or raised covers.

**2.7 CABINETS**

A. NEMA 250, Type 1, galvanized-steel box with removable interior panel and removable front, finished inside and out with manufacturer's standard enamel.
B. Hinged door in front cover with flush latch and concealed hinge.
C. Key latch to match panelboards.
D. Metal barriers to separate wiring of different systems and voltage.
E. Accessory feet where required for freestanding equipment.

**2.8 WIREWAYS**

A. Equip with hinged covers, except where removable covers are shown.

**2.9 WARNING TAPE**

A. Standard, 4-Mil polyethylene 76 mm (3 inches) wide tape detectable type, red with black letters, and imprinted with “CAUTION BURIED ELECTRONIC SAFETY AND SECURITY CABLE BELOW”.

**2.11 SLEEVES FOR RACEWAYS**

A. Steel Pipe Sleeves: ASTM A 53/A 53M, Type E, Grade B, Schedule 40, galvanized steel, plain ends.
B. Cast-Iron Pipe Sleeves: Cast or fabricated "wall pipe," equivalent to ductile-iron pressure pipe, with plain ends and integral waterstop, unless otherwise indicated.
C. Sleeves for Rectangular Openings: Galvanized sheet steel with minimum 0.052- or 0.138-inch (1.3- or 3.5-mm) thickness as indicated and of length to suit application.
D. Coordinate sleeve selection and application with selection and application of firestopping specified in Division 07 84 00 "FIRESTOPPING."

**PART 3 - EXECUTION**

**3.1 PENETRATIONS**

A. Cutting or Holes:
   1. Locate holes in advance where they are proposed in the structural sections such as ribs or beams. Obtain the approval of the Resident Engineer/COTR prior to drilling through structural sections.

2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammer, impact electric, hand or manual hammer type drills are not allowed, except where permitted by the Resident Engineer as required by limited working space.

B. Fire Stop: Where conduits, wireways, and other electronic safety and security raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING, with rock wool fiber or silicone foam sealant only. Completely fill and seal clearances between raceways and openings with the fire stop material.

C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal clearances around the conduit and make watertight as specified in Section 07 92 00, "JOINT SEALANTS".

**3.2 INSTALLATION, GENERAL**

A. Install conduit as follows:

1. In complete runs before pulling in cables or wires.
2. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new undamaged material.
3. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
4. Cut square with a hacksaw, ream, remove burrs, and draw up tight.
5. Mechanically continuous.
6. Independently support conduit at 2.4 m (8 foot) on center. Do not use other supports i.e., (suspended ceilings, suspended ceiling supporting members, lighting fixtures, conduits, mechanical piping, or mechanical ducts).
7. Support within 300 mm (12 inches) of changes of direction, and within 300 mm (12 inches) of each enclosure to which connected.
8. Close ends of empty conduit with plugs or caps at the rough-in stage to prevent entry of debris, until wires are pulled in.
9. Conduit installations under fume and vent hoods are prohibited.
10. Secure conduits to cabinets, junction boxes, pull boxes and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.

11. Do not use aluminum conduits in wet locations.
12. Unless otherwise indicated on the drawings or specified herein, all conduits shall be installed concealed within finished walls, floors and ceilings.

B. Conduit Bends:
1. Make bends with standard conduit bending machines.
2. Conduit hickey may be used for slight offsets, and for straightening stubbed out conduits.
3. Bending of conduits with a pipe tee or vise is prohibited.

C. Layout and Homeruns:
1. Install conduit with wiring, including homeruns, as shown.
2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted approved by the Resident Engineer.

D. Fire Alarm:
1. Fire alarm conduit shall be painted red (a red "top-coated" conduit from the conduit manufacturer may be used in lieu of painted conduit) in accordance with the requirements of Section 28 31 00, "FIRE DETECTION AND ALARM".

**3.3 EXPOSED WORK INSTALLATION**

A. Unless otherwise indicated on the drawings, exposed conduit is only permitted in mechanical and electrical rooms.

B. Conduit for Conductors 600 volts and below:
1. Rigid steel, IMC, rigid aluminum, or EMT. Different type of conduits mixed indiscriminately in the system is prohibited.

C. Align and run conduit parallel or perpendicular to the building lines.

D. Install horizontal runs close to the ceiling or beams and secure with conduit straps.

E. Support horizontal or vertical runs at not over 2400 mm (eight foot) intervals.

F. Surface metal raceways: Use only where shown.

G. Painting:
1. Paint exposed conduit as specified in Section09 91 00, "PAINTING".
2. Paint all conduits containing cables rated over 600 volts safety orange. Refer to Section 09 91 00, "PAINTING" for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (two inch) high black numerals and letters, showing the cable voltage

rating. Provide legends where conduits pass through walls and floors and at maximum 6000 mm (20 foot) intervals in between.

**3.4 EXPANSION JOINTS**

A. Conduits 75 mm (3 inches) and larger, that are secured to the building structure on opposite sides of a building expansion joint, require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.

B. Provide conduits smaller than 75 mm (3 inches) with junction boxes on both sides of the expansion joint. Connect conduits to junction boxes with sufficient slack of flexible conduit to produce 125 mm (5 inch) vertical drop midway between the ends. Flexible conduit shall have a copper green ground bonding jumper installed. In lieu of this flexible conduit, expansion and deflection couplings as specified above for 375 mm (15 inches) and larger conduits are acceptable.

C. Install expansion and deflection couplings where shown.

**3.5 CONDUIT SUPPORTS, INSTALLATION**

A. Safe working load shall not exceed 1/4 of proof test load of fastening devices.

B. Use pipe straps or individual conduit hangers for supporting individual conduits. Maximum distance between supports is 2.5 m (8 foot) on center.

C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and 90 kg (200 pounds). Attach each conduit with U-bolts or other approved fasteners.

D. Support conduit independently of junction boxes, pull boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.

E. Fasteners and Supports in Solid Masonry and Concrete:

1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
2. Existing Construction:
   a. Steel expansion anchors not less than 6 mm (1/4 inch) bolt size and not less than 28 mm (1-1/8 inch) embedment.
   b. Power set fasteners not less than 6 mm (1/4 inch) diameter with depth of penetration not less than 75 mm (3 inches).
   c. Use vibration and shock resistant anchors and fasteners for attaching to concrete ceilings.

F. Hollow Masonry: Toggle bolts are permitted.

G. Bolts supported only by plaster or gypsum wallboard are not acceptable.

H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.
I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.
K. Spring steel type supports or fasteners are prohibited for all uses except: Horizontal and vertical supports/fasteners within walls.
L. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

**3.7 BOX INSTALLATION**

A. Boxes for Concealed Conduits:
   1. Flush mounted.
   2. Provide raised covers for boxes to suit the wall or ceiling, construction and finish.
B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling in operations.
C. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
D. Outlet boxes in the same wall mounted back-to-back are prohibited. A minimum 600 mm (24 inch), center-to-center lateral spacing shall be maintained between boxes).
E. Minimum size of outlet boxes for ground fault interrupter (GFI) receptacles is 100 mm (4 inches) square by 55 mm (2-1/8 inches) deep, with device covers for the wall material and thickness involved.
F. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example "SIG-FA JB No. 1".
G. On all Branch Circuit junction box covers, identify the circuits with black marker.

**3.8 ELECTRONIC SAFETY AND SECURITY CONDUIT**

A. Install the electronic safety and security raceway system as shown on drawings.
B. Minimum conduit size of 19 mm (3/4 inch), but not less than the size shown on the drawings.

C. All conduit ends shall be equipped with insulated bushings.
D. All 100 mm (four inch) conduits within buildings shall include pull boxes after every two 90 degree bends. Size boxes per the NEC.
E. Vertical conduits/sleeves through closets floors shall terminate not less than 75 mm (3 inches) below the floor and not less than 75 mm (3 inches) below the ceiling of the floor below.
F. Terminate conduit runs to/from a backboard in a closet or interstitial space at the top or bottom of the backboard. Conduits shall enter communication closets next to the wall and be flush with the backboard.
G. Where drilling is necessary for vertical conduits, locate holes so as not to affect structural sections such as ribs or beams.
H. All empty conduits located in communications closets or on backboards shall be sealed with a standard non-hardening duct seal compound to prevent the entrance of moisture and gases and to meet fire resistance requirements.
I. Conduit runs shall contain no more than four quarter turns (90 degree bends) between pull boxes/backboards. Minimum radius of communication conduit bends shall be as follows (special long radius):

| Sizes of Conduit Trade Size | Radius of Conduit Bends mm, Inches |
|---|---|
| ¾ | 150 (6) |
| 1 | 230 (9) |
| 1-1/4 | 350 (14) |
| 1-1/2 | 430 (17) |
| 2 | 525 (21) |
| 2-1/2 | 635 (25) |
| 3 | 775 (31) |
| 3-1/2 | 900 (36) |
| 4 | 1125 (45) |

J. Furnish and install 19 mm (3/4 inch) thick fire retardant plywood specified in  on the wall of communication closets where shown on drawings . Mount the plywood with the bottom edge 300 mm (one foot) above the finished floor.
K. Furnish and pull wire in all empty conduits. (Sleeves through floor are exceptions).

**3.9 COMMISSIONING**

A. Provide commissioning documentation for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system.

- - - E N D - - -

# SECTION 28 13 11
# PHYSICAL ACCESS CONTROL SYSTEM (PACS)

## PART 1 – GENERAL

### 1.1 DESCRIPTION

Provide and install a complete Physical Access Control System, hereinafter referred to as the PACS.

### 1.2 RELATED WORK

A. For firestopping application and use, Section 07 84 00, FIRESTOPPING.

B. For connection of high voltage, Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

C. For power cables, Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW).

D. For grounding of equipment, Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

E. For infrastructure, Section 27 05 33, RACEWAYS AND BOXES FOR SECURITY SYSTEMS.

F. For Warranty of Construction, see GENERAL CONDITIONS.

G. For General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

### 1.3 QUALITY ASSURANCE

A. The Contractor shall be responsible for providing, installing, and the operation of the PACS as shown. The Contractor shall also provide certification as required.

B. The security system will be installed and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the security system is stand-alone or a part of a complete Information Technology (IT) computer network.

C. The Contractor or security sub-contractor shall be a licensed security Contractor as required within the state or jurisdiction of where the installation work is being conducted.

D. Training, Operation and Maintenance Manuals, schematics, and maintenance schedules are required on all new equipment installed. Each new equipment item shall be labeled as to equipment identification number (as part of the overall existing system), installation date, area served, etc.

**1.4 SUBMITTALS**

A. Submit below items in conjunction with Master Specification Sections 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Provide certificates of compliance with Section 1.3, Quality Assurance.

C. Provide a complete and thorough pre-installation and as-built design package in both electronic format and on paper, minimum size 48 x 48 inches (1220 x 1220 millimeters); drawing submittals shall be per the established project schedule.

D. Pre-installation design and as-built packages shall include, but not be limited to:

1. Index Sheet that shall:
   a. Define each page of the design package to include facility name, building name, floor, and sheet number.
   b. Provide a complete list of all security abbreviations and symbols.
   c. Reference all general notes that are utilized within the design package.
   d. Specification and scope of work pages for all individual security systems that are applicable to the design package that will:
      1) Outline all general and job specific work required within the design package.
      2) Provide a detailed device identification table outlining device Identification (ID) and use for all security systems equipment utilized in the design package.
2. Drawing sheets that will be plotted on the individual floor plans or site plans shall:
   a. Include a title block as defined above.
   b. Clearly define the drawings scale in both standard and metric measurements.
   c. Provide device identification and location.
   d. Address all signal and power conduit runs and sizes that are associated with the design of the electronic security system and other security elements (e.g., barriers, etc.).
   e. Identify all pull box and conduit locations, sizes, and fill capacities.

f. Address all general and drawing specific notes for a particular drawing sheet.

3. A detailed schedule for all of the applicable security subsystems shall be included. All schedules shall provide the following information:
   a. Device ID.
   b. Device Location (e.g. site, building, floor, room number, location, and description).
   c. Mounting type (e.g. flush, wall, surface, etc.).
   d. Power supply or circuit breaker and power panel number.
   e. In addition, for the PACS, provide the door ID, door type (e.g. wood or metal), locking mechanism (e.g. strike or electromagnetic lock) and control device (e.g. card reader or biometrics).
4. Detail and elevation drawings for all devices that define how they were installed and mounted.

E. Pre-installation design packages shall go through a full review process conducted by the Contractor along with a VA representative to ensure all work has been clearly defined and completed. All reviews shall be conducted in accordance with the project schedule. There shall be four (4) stages to the review process:
   1. 35 percent
   2. 65 percent
   3. 90 percent
   4. 100 percent

F. Provide manufacturer security system product cut-sheets. Submit for approval at least 30 days prior to commencement of formal testing, a Security System Operational Test Plan. Include procedures for operational testing of each component and security subsystem, to include performance of an integrated system test.

G. Submit manufacture’s certification of Underwriters Laboratories, Inc. (UL) listing as specified. Provide all maintenance and operating manuals per Section 01 00 00, GENERAL REQUIREMENTS.

**1.5 APPLICABLE PUBLICATIONS**

A. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to

the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute (ANSI)/ Security Industry Association (SIA):

AC-01.....Access Control: Wiegand Card Reader Interface Standard

AC-03.....Access Control: Badging Techniques

C. American National Standards Institute (ANSI)/ International Code Council (ICC):

A117.1.....Standard on Accessible and Usable Buildings and Facilities

D. Department of Justice American Disability Act (ADA)

28 CFR Part 36-90.....ADA Standards for Accessible Design

E. Government Accountability Office (GAO):

GAO-03-8-02.....Security Responsibilities for Federally Owned and Leased Facilities

F. National Electrical Contractors Association

303-2005.....Installing Closed Circuit Television (CCTV) Systems

G. National Electrical Manufactures Association (NEMA):

250-03.....Enclosures for Electrical Equipment (1000 Volts Maximum)

H. National Fire Protection Association (NFPA):

70-05..... Article 780-National Electrical Code

I. Underwriters Laboratories, Inc. (UL):

294-99.....Standard for Access Control

305-97.....Standard for Panic Hardware

639-97.....Standard for Intrusion-Detection Units

752-05.....Standard for Bullet-Resisting Equipment

827-96.....Central Station Alarm Services

1076-95.....Standards for Proprietary Burglar Alarm Units and Systems

1981-03.....Central Station Automation System

2058-05.....High Security Electronic Locks

J. Homeland Security Presidential Directive (HSPD):

HSPD-12.....Policy for a Common Identification Standard for Federal Employees and Contractors

K. Federal Information Processing Standards (FIPS):

FIPS-201.....Personal Identity Verification (PIV) of Federal Employees and Contractors

L. National Institute of Standards and Technology (NIST):

IR 6887 V2.1.....Government Smart Card Interoperability Specification (GSC-IS)

Special Pub 800-96.....PIV Card Reader Interoperability Guidelines

M. Institute of Electrical and Electronics Engineers (IEEE):

C62.41.....IEEE Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits

N. International Organization for Standardization (ISO):

7810.....Physical Characteristics of Credit Card Size Document

7811.....Physical Characteristics for Magnetic Stripe Cards

7816-1.....Physical Characteristics of the Card

7816-2.....Dimensions and Contact Position of the card

7816-3.....Electrical Signals and Transmission Protocols

7816-4.....Inter-Industry Command for Interchange

14443.....RFID cards; Contactless Proximity Cards Operating at 13.56 MHz in up to 5 inches distance

15693.....RFID cards; Contactless Vicinity Cards Operating at 13.56 MHz in up to 50 inches distance

O. Uniform Federal Accessibility Standards (UFAS) 1984

P. ADA Standards for Accessible Design 1994

**1.6 WARRANTY OF CONSTRUCTION.**

Warrant PACS work subject to the Article “Warranty of Construction” of FAR clause 52.246-21.

**PART 2 PRODUCTS**

**2.1 MANUFACTURERS**

Access control card readers shall be as manufactured by a global company who is a recognized leader in the production of access control devices. Card readers manufactured for non-access control applications shall not be acceptable.

A. Substitutions: No substitutions allowed.

## 2.2 ACCESS CONTROL CARD READER

A. Read Only Contactless smart card reader
The contactless smart card reader(s) shall be designed to securely read, interpret, and authenticate access control data from 13.56 MHz contactless smart card credentials.

1. The contactless smart card reader shall be optimally designed for use in access control applications by providing:
    a. Customized security protection through support of the device-independent Secure Identity Object™ (SIO) portable credential methodology to provide enhanced security and performance features.
    b. Unique read selection that enables reading of the Secure Identity Object™ (SIO) and standard iCLASS technologies.
    c. Participates in an advanced, bounded and trust-based security system utilizing the Trusted Identity Platform™ (TIP) architecture.
    d. Guaranteed compatibility to read all HID data formats and ensuring card-to-reader interoperability in multi-location installations and multi-card and reader populations when used with Genuine HID products.
    e. Backwards compatibility with legacy 13.56 MHz contactless smart card access control formats (E.g. 26-bit, 32, 35-bit, 37-bit, 56-bit, and HID Corporate 1000 formats). Compatibility across the product line shall be assured without the need of special programming.
    f. Global, off-the-shelf availability.

2. The contactless smart card reader shall provide enhanced security technology and features.
    a. The contactless smart card reader shall be Secure Identity Object™ (SIO) enabled. The contactless smart card reader platform shall support the standards-based, device-independent Security Identity Object™ (SIO) portable credential methodology to ensure data authenticity and privacy. The SIO shall be able to reside on any number of identity devices, including iCLASS SE, MIFARE Classic SE, and MIFARE DESFire EV1 SE credentials
    b. The contactless smart card reader shall be a certified end-point (TIP Node) within a Trusted Identity Platform™ (TIP) infrastructure. TIP shall provide a scalable, on-demand, secure identity delivery system that validates, registers and provides lifecycle management support for certified trusted end-point contactless smart card readers.

    c. The contactless smart card reader shall increase security by narrowing the possibility of unwanted configuration changes and denials of service. The contactless smart card reader shall utilize TIP-enabled secure configuration of contactless smart card readers with counters and uniquely diversified configuration cards.
    d. The contactless smart card reader shall utilize Secure Element Technology™ to protect keys and cryptographic functions to the international standard Evaluation Assurance Level (EAL) 5+.
    e. The contactless smart card reader shall be configurable to utilize Velocity Checking to provide breach resistance against electronic attacks that invoke multiple improper authentication attempts.
    f. The contactless smart card reader shall be configurable to provide multiple hierarchical degrees of key compatibility for accessing the smart card access control data.

Compatibility shall be provided for the following key structure options:

1. Compatibility with the standard SIO and iCLASS access control application data model to ensure convenient off the shelf compatibility with iCLASS SE and iCLASS credentials.
2. Compatibility with higher security SE Elite credential programmer that uniquely assigns a reader and credential keyset that provides site-specific security.

3. The contactless smart card reader shall provide enhanced usability features.
    a. The contactless smart card reader shall simplify troubleshooting through Anti-passback Notification that the card has already been processed and it must be removed from reader field temporarily prior to processing again.
    b. The contactless smart card reader shall provide enhanced user feedback options through the use of clear and bright tri-colored LEDs configurable to support any three color combinations (RGB - Red, Green, and Blue).
    c. The contactless smart card reader shall enable ease of installation through identical wiring methods as legacy 13.56 and 125 kHz proximity readers.
    d. The contactless smart card reader shall enable backwards compatibility with legacy 13.56 MHz access control formats (E.g. 26-bit, 32, 35-bit, 37-bit, 56-bit, and HID Corporate 1000 formats).
    e. The contactless smart card reader manufacturer shall provide a full product line of compatible products including readers, readers with integral keypads and, credentials and cards without the need of special programming.
    f. The contactless smart card reader manufacturer shall provide global, off-the-shelf availability.

g. The contactless smart card reader shall provide universal compatibility with most access control systems by outputting card data in compliance with the SIA AC-01 Wiegand standard.
h. Contactless smart card reader shall be configurable to provide Clock-and-Data output.
i. Contactless smart card reader shall allow the reader firmware to be upgraded in the field without the need to remove the reader from the wall through the use of factory-provided Programming Cards.
j. Contactless smart card reader shall allow for secure installation practices through mounting methods utilizing tamper resistant screws.
k. Contactless smart card reader shall provide the ability to transmit an alarm signal via and integrated optical tamper switch if an attempt is made to remove the reader from the wall. The tamper switch shall be programmable to provide a selectable action to provide a selectable action compatible with various tamper communication schemes provided by access control panel manufacturers. The selectable action shall include one of the following:
    1. The reader open collector line changes from a high state (5V) to a low state (Ground).
    2. During a tamper state, the “I’m Alive” message is inverted.
l. The contactless smart card reader shall provide customizable reader behavior options either from the factory, or defined in the field through the use of pre-configured command cards. Reader behavior programming options shall include:
    1. Audio/Visual Templates for card reads, and attack detection.
    2. Velocity Check timing and thresholds
    3. Optical tamper actions
    4. RF scan delay

5. Hold Mode
6. Intelligent Power Management
7. Key diversifiers
8. Key rolling
9. CSN output configuration
10. Data Model prioritization
11. Default LED color
12. Hold mode

m. Contactless smart card reader shall provide the following programmable audio/visual indication:
   1. An audio beeper shall provide various tone sequences to signify: access granted, access denied, power up, and diagnostics.
   2. A high-intensity red/green/blue (RGB) light bar shall provide clear visual status. The light bar shall provide uniform distribution of light eliminating individual bright spots.

n. The contactless smart card reader shall provide the ability to upgrade its application code through the use of pre-configured firmware cards. This feature shall allow previously installed readers be reconfigured to modify their behavior and capabilities as the project environment evolves.

o. Contactless smart card reader shall provide the ability for mounting to standard electrical boxes through the use of universal international mounting holes.

4. Contactless smart card readers shall provide the following enhanced performance features

   a. The contactless smart card reader shall enable user prioritization of High-frequency/High-frequency credential reads. Technology prioritization shall synchronize a site’s credential technology read priority to the access panel configuration while reducing unintended credential reads.

   b. The contactless smart card reader shall have the ability to provide consistent optimal read range by implementing an

auto-tune function that adjusts for manufacturing tolerances to enhance consistency of performance from reader to reader.

c. The contactless smart card reader shall be field programmable to provide secure upgrades for migration and extended lifecycle.

d. The contactless smart card reader shall be designed as a system to provide optimal read range and read speed for increased access control throughput.

5. Contactless smart card reader shall provide enhanced environmental and sustainability features.

a. The contactless smart card reader shall reduce power consumption by as much as 75% through the use of Intelligent Power Management (IPM) technology.

b. The contactless smart card reader shall be manufactured with 10% recycled material to provide the potential of LEEDS building credits in new construction projects.

c. Contactless smart card reader shall be fully compliant with Restriction of Hazardous Substances directive (RoHS) restricting the use of specific hazardous materials found in electrical and electronic products. The substances banned under RoHS are lead (Pb), mercury (Hg), cadmium (Cd), hexavalent chromium (CrVI), polybrominated biphenyls (PBB) and polybrominated diphenyl ethers (PBDE).

d. Contactless smart card reader shall be manufacturers with 10.5% (Pigtail) and 11% (Terminal Strip).

6. Contactless smart card reader shall comply with the following 13.56MHz-related standards to ensure product compatibility and predictability of performance:

a. ISO 15693

b. ISO 14443A

c. ISO 14443B

7. Contactless smart card reader shall implement the following high security 13.56 MHz applications out-of-box.

a. Secure Identity Object on iCLASS SE

b. Secure Identity Object on MIFARE Classic SE
c. Secure Identity Object on MIFARE DESFire EV1 SE

8. Contactless smart card reader shall be provided with a full potted assembly.
9. Contactless smart card reader shall provide the following typical contactless read ranges:
   a. 3.5” (8.9 cm) reading SIO on iCLASS SE Card
   b. 1.8” (4.6 cm) reading SIO on MIFARE DESFire EV1 SE Card
   c. 2.8” (7.1 cm) reading SIO on MIFARE Classic SE Card
   d. 1.8” (4.6 cm) reading SIO on iCLASS SE Tag or Fob
   e. 1.4” (3.6 cm) reading SIO on MIFARE Classic SE Tag or Fob
10. Contactless smart card reader shall be designed for low current operation to enable contactless smart card migration from most legacy proximity applications without the need to replace existing access control panels and/or power supplies. Contactless smart card power requirements shall be:
    a. Operating voltage: 5 – 16 VDC, reverse voltage protected. Linear power supply recommended.
    b. Current requirements:
       1. 65 mA (Standard Power Mode)
       2. 25 mA (Intelligent Power Management Mode)
       3. 105 mA (Peak Current Draw)
       4. 1 W (Standard Power Mode @ 16VDC)
       5. 0.4 W (Intelligent Power Management Mode @ 16VDC)
11. Contactless smart card reader shall meet the following physical specifications:
    a. Dimensions: 3.3” x 4.8” x 1.0” (8.4cm x 12.2cm x 2.4cm)
    b. Weight: 7.7 (220g) Pigtail and 7.5oz (215g) Terminal Strip
    c. Material: UL94 Polycarbonate
    d. Plastics: Consist of two-piece design with mounting plate and either separate front bezel and reader body (totaling three-pieces) or combined front bezel/reader body (totaling two-pieces).

e. Color: Black or Charcoal Gray as approved by the project architect.

12. Contactless smart card reader shall meet the following environmental specifications:
    a. Operating temperature: -31 to 150 degrees F (-35 to 65 degrees C)
    b. Operating humidity: 5% to 95% relative humidity non-condensing.
    c. Storage Temperature: -67 to 185 degrees F (-55 to 85 degrees C)
    d. Weatherized design suitable to withstand harsh environments with a certified rating of IP55
13. Contactless smart card reader cabling requirements shall be:
    a. Cable distance: (Wiegand or Clock & Data): 500 feet (150m)
    b. Cable type: 5-conductor #22 AWG (Shielded cable not required)
    c. Standard reader termination: 18” (0.5m) cable pigtail
    d. Optional reader termination: terminal strip
14. The multi-technology smart card reader shall be provisioned through secure connections utilizing Trusted Identity Platform’s™ Secure Delivery Infrastructure (SDI) where all cryptographic keys governing system security are delivered with end-to-end privacy and integrity.
15. The contactless smart card reader shall provide a lifetime warranty against defects in materials and workmanship.
16. Contactless smart card reader shall be HID Global multiclass SE Model R40, P/N 920N5cm)

**2.3 ENTRY CONTROL DEVICES**

1. Shall be hardwired to the PACS main control panel and operated by a card reader via a relay on the main control panel.
2. Shall be fail-safe in the event of power failure to the PACS system.
3. Shall operate at 24 VCD and be powered by a separate power supply dedicated to the door control system. Each power supply shall be rated to operate a minimum of two doors simultaneously without

error to the system or overload the power supply unit.

4. Shall have a diode or metal-oxide veristor (MOV) to protect the controller and power supply from reverse current surges or back-check.

**2.4. ELECTROMAGNETIC LOCKS:**

1. These locks shall be without mechanical linkage utilizing no moving parts, and securing the door to its frame solely on electromagnetic force.
2. Shall be comprised of two pieces, the mag-lock and the door plate. The mag-lock shall be surface mounted to the door frame and the door plate shall be surface mounted to the door.
3. Ensure a diode or MOV is installed in line with the DC voltage supplying power to the unit in order to prevent back-check on the system when the mag-lock is powered.
4. Shall utilize a magnetic bonding sensor (MBS) to monitor the door status and report that status to the SMS.
5. Electromagnetic locks shall meet the following minimum technical characteristics:

| | | |
|---|---|---|
| Operating Voltage | | 24 VDC |
| Current Draw | | .5A |
| Holding Force | Swing Doors | 1500 lbs (675 Kg) |
| | Sliding Doors | 500 lbs (225 Kg) |

2.5 **POWER SUPPLIES:**

1. Shall be UL rated and able to adequately power two entry control devices on a continuous base without failure.
2. Shall meet the following minimum technical characteristics:

| | |
|---|---|
| INPUT POWER | 110 VAC 60 HZ 2 amp |
| OUTPUT VOLTAGE | 12 VDC Nominal (13.8 VDC)<br>24 VDC Nominal (27.6 VDC)<br>Filtered and Regulated |
| BATTERY | Dependant on Output Voltage shall provide up to 14 Ah |
| OUTPUT CURRENT | 10 amp max. @ 13.8 VDC<br>5 amp max. @ 27.6 VDC |

| | |
|---|---|
| PRIMARY FUSE SIZE | 6.3 amp (non-removable) |
| BATTERY FUSE SIZE | 12 amp, 3AG |
| CHARGING CIRCUIT | Built-in standard |

2.6 **WIRES AND CABLES**

1. Shall meet or exceed the manufactures recommendations for power and signal.
2. Shall be carried in an enclosed conduit system, utilizing electromagnetic tubing (EMT) to include the equivalent in flexible metal, rigid galvanized steel (RGS) to include the equivalent of liquid tight, polyvinylchloride (PVC) schedule 40 or 80.
3. All conduits will be sized and installed per the NEC. All security system signal and power cables that traverse or originate in a high security office space will contained in either EMT or RGS conduit.
4. All conduit, pull boxes, and junction boxes shall be clearly marked every with colored permanent tape or paint that will allow it to be distinguished from all other conduit and infrastructure.
5. Conduit fills shall not exceed 50 percent unless otherwise documented.
6. A pull rope shall be pulled along with signal and power cables to assist in future work.
7. At all locations where core drilling is conducted to allow for conduit to be installed, then fire stopping shall be applied to that area.
8. High power and signal cables shall not share the same conduit and shall be kept separate up to the point of connection. High power for the security system shall be defined as any cable or sets of cables carrying 30 VDC/VAC or higher.
9. Signal Cables:
   a. Shall meet or exceed all specifications and requirements called out by the manufactures.
   b. Shall be twisted pairs.
   c. All cables and conductors, except fiber optic cables, that act as a control, communication, or signal lines shall include surge protection. Surge protection shall be furnished at the equipment

end and additional triple electrode gas surge protectors rated for the application on each wire line circuit shall be installed within 3 feet, (1 meter) of the building cable entrance. The inputs and outputs shall be tested in both normal and common mode using the following wave forms:

1) A 10 microsecond rise time by 1000 microsecond pulse width waveform with a peak voltage of 1500 volts and peak current of 60 amperes.
2) An 8 microsecond rise time by 20 microsecond pulse width wave form with a peak voltage of 1000 volts and peak current of 500 amperes.

10. Power Cables:
    a. Shall be rated for either 110 or 220 VAC, 50 or 60 Hz, and shall comply with VA Master Spec 26 05 21 Low Voltage Electrical Power Conductors and Cables (600 Volts and Below).
    b. Shall be sized according and comply with the NEC. High voltage power cables will be a minimum of three conductors, 14 AWG, stranded, and coated with a non-conductive polyvinylchloride (PVC) jacket.
    c. Low Voltage Power Cables:
        1) All cables shall be a minimum of 18 AWG, Stranded and have a polyvinylchloride outer jacket.
        2) Specific cable size shall determined using a basic voltage over distance calculation and shall comply with the NEC’s requirements for low voltage cables.
    d. All equipment connected to AC power shall be protected from surges. Equipment protection shall withstand surge test waveforms described in IEEE C62.41. Fuses shall not be used as a means of surge protection.

**2.7 INSTALLATION KIT**

A. General: The kit shall be provided that at, a minimum includes all connectors and terminals, labeling systems, audio spade lugs, barrier strips, punch blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, conduit, cable duct, and/or cable tray, etc., required to accomplish a neat and secure installation. All wires shall terminate in a spade lug and barrier strip, wire wrap

terminal or punch block. Unfinished or unlabeled wire connections shall not be allowed. All unused and partially opened installation kit boxes, coaxial, fiber-optic, and twisted pair cable reels, conduit, cable tray, and/or cable duct bundles, wire rolls, physical installation hardware shall be turned over to the Contracting Officer. The following sections outlined are the minimum required installation sub-kits:

1. System Grounding:
   a. The grounding kit shall include all cable and installation hardware required. All head end equipment and power supplies shall be connected to earth ground via internal building wiring, according to the NEC.
   b. This includes, but is not limited to:
      1) Control Cable Shields
      2) Data Cable Shields
      3) Equipment Racks
      4) Equipment Cabinets
      5) Conduits
      6) Cable Trays
      7) Power Panels
      8) Grounding
      9) Connector Panels
2. Wire and Cable: The wire and cable kit shall include all connectors and terminals, audio spade lugs, barrier straps, punch blocks, wire wrap strips, heat shrink tubing, tie wraps, solder, hangers, clamps, labels etc., required to accomplish a neat and orderly installation.
3. Conduit, Cable Duct, and Cable Tray: The kit shall include all conduit, duct, trays, junction boxes, back boxes, cover plates, feed through nipples, hangers, clamps, other hardware required to accomplish a neat and secure conduit, cable duct, and/or cable tray installation in accordance with the NEC and this document.
4. Equipment Interface: The equipment kit shall include any item or quantity of equipment, cable, mounting hardware and materials needed to interface the systems with the identified sub-system(s) according to the OEM requirements and this document.

5. Labels: The labeling kit shall include any item or quantity of labels, tools, stencils, and materials needed to label each subsystem according to the OEM requirements, as-installed drawings, and this document.
6. Documentation: The documentation kit shall include any item or quantity of items, computer discs, as installed drawings, equipment, maintenance, and operation manuals, and OEM materials needed to provide the system documentation as required by this document and explained herein.

**PART 3**

**3.1 INSTALLATION**

A. System installation shall be in accordance with UL 294, manufacturer and related documents and references, for each type of security subsystem designed, engineered and installed.
B. Components shall be configured with appropriate “service points” to pinpoint system trouble in less than 30 minutes.
C. The Contractor shall install all system components including Government furnished equipment, and appurtenances in accordance with the manufacturer's instructions, documentation listed in Sections 1.4 and 1.5 of this document, and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a operable system.
D. The PACS will be designed, engineered, installed, and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the system is a stand alone or a network.
E. For programming purposes refer to the manufacturers requirements for correct system operations. Ensure computers being utilized for system integration meet or exceed the minimum system requirements outlined on the systems software packages.
F. The Contractor shall visit the site and verify that site conditions are in agreement/compliance with the design package. The Contractor shall report all changes to the site or conditions that will affect performance of the system to the Contracting Officer in the form of a report. The Contractor shall not take any corrective action without written permission received from the Contracting Officer.

G. Existing Equipment:
   1. The Contractor shall connect to and utilize existing door equipment, control signal transmission lines, and devices as outlined in the design package. Door equipment and signal lines that are usable in their original configuration without modification may be reused with Contracting Officer approval.
   2. The Contractor shall perform a field survey, including testing and inspection of all existing door equipment and signal lines intended to be incorporated into the PACS, and furnish a report to the Contracting Officer as part of the site survey report. For those items considered nonfunctioning, provide (with the report) specification sheets, or written functional requirements to support the findings and the estimated cost to correct the deficiency. As part of the report, the Contractor shall include a schedule for connection to all existing equipment.
   3. The Contractor shall make written requests and obtain approval prior to disconnecting any signal lines and equipment, and creating equipment downtime. Such work shall proceed only after receiving Contracting Officer approval of these requests. If any device fails after the Contractor has commenced work on that device, signal or control line, the Contractor shall diagnose the failure and perform any necessary corrections to the equipment.
   4. The Contractor shall be held responsible for repair costs due to Contractor negligence, abuse, or improper installation of equipment.
   5. The Contracting Officer shall be provided a full list of all equipment that is to be removed or replaced by the Contractor, to include description and serial/manufacturer numbers where possible. The Contractor shall dispose of all equipment that has been removed or replaced based upon approval of the Contracting Officer after reviewing the equipment removal list. In all areas where equipment is removed or replaced the Contractor shall repair those areas to match the current existing conditions.

H. Enclosure Penetrations: All enclosure penetrations shall be from the bottom of the enclosure unless the system design requires penetrations from other directions. Penetrations of interior enclosures involving transitions of conduit from interior to exterior, and all penetrations

on exterior enclosures shall be sealed with rubber silicone sealant to preclude the entry of water and will comply with VA Master Specification 07 84 00, Firestopping. The conduit riser shall terminate in a hot-dipped galvanized metal cable terminator. The terminator shall be filled with an approved sealant as recommended by the cable manufacturer and in such a manner that the cable is not damaged.

I. Cold Galvanizing: All field welds and brazing on factory galvanized boxes, enclosures, and conduits shall be coated with a cold galvanized paint containing at least 95 percent zinc by weight.

J. Control Panels:
   1. Connect power and signal lines to the controller.
   2. Program the panel as outlined by the design and per the manufacturer’s programming guidelines.

K. Card Readers:
   1. Connect all signal inputs and outputs as shown and specified.
   2. Terminate input signals as required.
   3. Program and address the reader as per the design package.
   4. Readers shall be surface or flushed mounted and all appropriate hardware shall be provided to ensure the unit is installed in an enclosed conduit system.

L. Entry Control Devices:
   1. Install all signal input and power cables.
   2. Electromagnetic locks shall be installed with the mag-lock mounted to the door frame and the metal plate mounted to the door.

M. System Start-Up:
   1. The Contractor shall not apply power to the PACS until the following items have been completed:
      a. PACS equipment items and have been set up in accordance with manufacturer's instructions.
      b. A visual inspection of the PACS has been conducted to ensure that defective equipment items have not been installed and that there are no loose connections.
      c. System wiring has been tested and verified as correctly connected as indicated.
      d. All system grounding and transient protection systems have been verified as installed and connected as indicated.

e. Power supplies to be connected to the PACS have been verified as the correct voltage, phasing, and frequency as indicated.

2. Satisfaction of the above requirements shall not relieve the Contractor of responsibility for incorrect installation, defective equipment items, or collateral damage as a result of Contractor work efforts.

N. Supplemental Contractor Quality Control:

1. The Contractor shall provide the services of technical representatives who are familiar with all components and installation procedures of the installed PACS; and are approved by the Contracting Officer.
2. The Contractor will be present on the job site during the preparatory and initial phases of quality control to provide technical assistance.
3. The Contractor shall also be available on an as needed basis to provide assistance with follow-up phases of quality control.
4. The Contractor shall participate in the testing and validation of the system and shall provide certification that the system installed is fully operational as all construction document requirements have been fulfilled.

**3.2 TESTING AND TRAINING**

All testing and training shall be compliant with the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

-----END----

# SECTION 28 23 00
# VIDEO SURVEILLANCE

## PART 1 – GENERAL

### 1.1 DESCRIPTION

Provide and install a complete Video Surveillance System, which is identified as the Closed Circuit Television System hereinafter referred to as the CCTV System as specified in this section.

The CCTV surveillance system shall be provided, installed and tested by Johnson Controls, Inc. Contact Scott Galaszewski at 414-405-5554 or Scott.R.Galaszewski@jci.com for additional information.

### 1.2 RELATED WORK

A. For fire stopping application and use, Section 07 84 00, FIRESTOPPING.

B. For labeling and signs, Section 10 14 00, SIGNAGE.

C. For connection of high voltage, Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

D. For power cables, Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW).

E. For grounding of equipment, Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.

F. For infrastructure, Section 27 05 33, RACEWAY AND BOXES FOR SECURITY SYSTEMS.

G. For access control, Section 28 13 11, PHYSICAL ACCESS CONTROL SYSTEMS (PACS).

H. For Warranty of Construction see GENERAL CONDITIONS.

I. For General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

### 1.3 QUALITY ASSURANCE

A. The Contractor shall be responsible for providing, installing, and the operation of the CCTV System as shown. The Contractor shall also provide certification as required.

B. The security system shall be installed and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the security system is stand-alone or a part of a complete Information Technology (IT) computer network.

C. The Contractor or security sub-contractor shall be a licensed security Contractor as required within the state or jurisdiction of where the installation work is being conducted.

**1.4 SUBMITTALS**

A. Submit below items in conjunction with Master Specification Sections 01 33 23, Shop Drawings, Product Data, and Samples, and Section 02 41 00, Demolition Drawings.

B. Provide certificates of compliance with Section 1.3, Quality Assurance.

C. Provide a pre-installation and as-built design package in both electronic format and on paper, minimum size 48 x 48 inches (1220 x 1220 millimeters); drawing submittals shall be per the established project schedule.

D. Pre-installation design and as-built packages shall include, but not be limited to:

1. Index Sheet that shall:
   a. Define each page of the design package to include facility name, building name, floor, and sheet number.
   b. Provide a list of all security abbreviations and symbols.
   c. Reference all general notes that are utilized within the design package.
   d. Specification and scope of work pages for all security systems that are applicable to the design package that will:
      1) Outline all general and job specific work required within the design package.
      2) Provide a device identification table outlining device Identification (ID) and use for all security systems equipment utilized in the design package.
2. Drawing sheets that will be plotted on the individual floor plans or site plans shall:
   a. Include a title block as defined above.
   b. Define the drawings scale in both standard and metric measurements.
   c. Provide device identification and location.
   d. Address all signal and power conduit runs and sizes that are associated with the design of the electronic security system and other security elements (e.g., barriers, etc.).

e. Identify all pull box and conduit locations, sizes, and fill capacities.
f. Address all general and drawing specific notes for a particular drawing sheet.

3. A riser drawing for each applicable security subsystem shall:
   a. Indicate the sequence of operation.
   b. Relationship of integrated components on one diagram.
   c. Include the number, size, identification, and maximum lengths of interconnecting wires.
   d. Wire/cable types shall be defined by a wire and cable schedule. The schedule shall utilize a lettering system that will correspond to the wire/cable it represents (example: A = 18 AWG/1 Pair Twisted, Unshielded). This schedule shall also provide the manufacturer’s name and part number for the wire/cable being installed.
4. A system drawing for each applicable security system shall:
   a. Identify how all equipment within the system, from main panel to device, shall be laid out and connected.
   b. Provide full detail of all system components wiring from point-to-point.
   c. Identify wire types utilized for connection, interconnection with associate security subsystems.
   d. Show device locations that correspond to the floor plans.
   e. All general and drawing specific notes shall be included with the system drawings.
5. A schedule for all of the applicable security subsystems shall be included. All schedules shall provide the following information:
   a. Device ID.
   b. Device Location (e.g. site, building, floor, room number, location, and description).
   c. Mounting type (e.g. flush, wall, surface, etc.).
   d. Power supply or circuit breaker and power panel number.
   e. In addition, for the CCTV Systems, provide the camera ID, camera type (e.g. fixed or pan/tilt/zoom (P/T/Z), lens type (e.g. for fixed cameras only) and housing model number.

6. Detail and elevation drawings for all devices that define how they were installed and mounted.

E. Pre-installation design packages shall be reviewed by the Contractor along with a VA representative to ensure all work has been clearly defined and completed. All reviews shall be conducted in accordance with the project schedule. There shall be four (4) stages to the review process:
   1. 35 percent
   2. 65 percent
   3. 90 percent
   4. 100 percent

F. Provide manufacturer security system product cut-sheets. Submit for approval at least 30 days prior to commencement of formal testing, a Security System Operational Test Plan. Include procedures for operational testing of each component and security subsystem, to include performance of an integrated system test.

G. Submit manufacture’s certification of Underwriters Laboratories, Inc. (UL) listing as specified. Provide all maintenance and operating manuals per the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

**1.5 APPLICABLE PUBLICATIONS**

A. The publications listed below (including amendments, addenda, revisions, supplement, and errata) form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

B. American National Standards Institute (ANSI)/Electronic Industries Alliance (EIA):

330.....Electrical Performance Standards for CCTV Cameras

375A.....Electrical Performance Standards for CCTV Monitors

C. Institute of Electrical and Electronics Engineers (IEEE):

C62.41.....IEEE Recommended Practice on Surge Voltages in Low-Voltage AC Power Circuits

802.3af.....Power over Ethernet Standard

D. National Electrical Contractors Association (NECA):

303-2005.....Installing Closed Circuit Television (CCTV) Systems

E. National Fire Protection Association (NFPA):
70-05.....Article 780-National Electrical Code

F. Federal Information Processing Standard (FIPS):
140-2.....Security Requirements for Cryptographic Modules

G. Underwriters Laboratories, Inc. (UL):
983-06.....Standard for Surveillance Camera Units
3044-01.....Standard for Surveillance Closed Circuit Television Equipment

**1.6 WARRANTY OF CONSTRUCTION.**

Warrant CCTV System work subject to the Article "Warranty of Construction" of FAR clause 52.246-21.

**PART 2 – PRODUCTS**

**2.1 EQUIPMENT AND MATERIALS**

A. All equipment associated within the CCTV System shall be UL 3004 compliant and rated for continuous operation. Environmental conditions (i.e. temperature, humidity, wind, and seismic activity) shall be taken under consideration at each facility and site location prior to installation of the equipment.

B. All equipment shall operate on a 120 or 240 volts alternating current (VAC); 50 Hz or 60 Hz AC power system unless documented otherwise in subsequent sections listed within this specification. All equipment shall have a back-up source of power that will provide a minimum of 96 hours of run time in the event of a loss of primary power to the facility.

C. The system shall be designed, installed, and programmed in a manner that will allow for ease of operation, programming, servicing, maintenance, testing, and upgrading of the system.

D. All equipment and materials for the system will be compatible to ensure correct operation.

**2.2 EQUIPMENT ITEMS**

A. CCTV system shall meet following requirements:

B. All Cameras will be EIA 330 and UL 983 compliant as well as:

1. Will be charge coupled device (CCD) cameras and shall conform to National Television System Committee (NTSC) formatting.

2. Fixed cameras shall be color and the primary choice for monitoring following the activities described below. Pan/Tilt/Zoom (P/T/Z) cameras shall be color and are to be utilized to compliment the fixed cameras.
3. Shall be powered by either 12 volts direct current (VDC) or 24 VAC. Power supplies shall be Class 2 and UL compliant and have a back-up power source to ensure cameras are still operational in the event of loss of primary power to the CCTV System.
4. Shall be rated for continuous operation under the following environmental conditions:
   a. Ambient temperatures of minus 10 degrees C (14 degrees F) to 55 degrees C (131 degrees F) utilizing equipment that will provide automatic heating and cooling.
   b. Humidity, wind gusts, ice loading, and seismic conditions specified or encountered for locations where CCTV cameras will be utilized.
5. Will be home run to a monitoring and recording device via a controlling device such as a matrix switcher or network server and monitored on a 24 hour basis at a designated Access Control System and Database Management location.
6. Each function and activity shall be addressed within the system by a unique twenty (20) character user defined name. The use of codes or mnemonics identifying the CCTV action shall not be accepted.
7. Shall come with built-in video motion detection that shall automatically monitor and process information from each camera. The camera motion detection shall detect motion within the camera's field of view and provide automatic visual, remote alarms, and motion-artifacts as a result of detected motion as follows:
   a. Motion-detection settings shall include adjustable object size and velocity, as well as a selectable detection area of 132 zones in a twelve (12) x eleven (11) grid.
   b. Sensors shall accept video signals from CCTV cameras and when synchronizing is required, it shall be in composite synchronization.
   c. Sensor processors shall detect motion by digitizing multiple pixels within each video scene and by comparing the gray scale of

the pixels to a previously stored reference. The number of pixels digitized depends on the application. The designer of the system shall consider cost effectiveness as a factor since digitizing a large number of pixels could increase cost dramatically with little additional actual detection capability for a specific application.

d. An alarm shall be initiated when the comparison varies by six (6) percent or more.

8. Appropriate signage shall be designed, provided, and posted that notifies people that an area is under camera surveillance.
9. Dummy or fake cameras will not be utilized at any time.
10. Shall be programmed to digitally flip from color to black and white at dusk and vice versa at dawn.
11. Will be fitted with auto-iris lenses to ensure the image is maintained in low light.
12. Lightning protection shall be IEEE C62.41 compliant and provided for all cameras. Either surge protectors or a lightning grid may be utilized. Ensure all lightning protection equipment is compliant with Article 780 of the National Electrical Code (NEC). The use of Fuses and Circuit Breakers as a means of lightning protection shall not be allowed.
13. P/T/Z cameras shall be utilized in a manner that they compliment fixed cameras and shall not be used as a primary means of monitoring activity.
14. Cameras shall be Axis P3343-VE and the P5512-E.

C. DIGITAL VIDEO RECORDER

1. The DVR shall digitize, compress and store up to 32 channels of video from network cameras (cameras encoded to IP using a video encoder or from another DVR), MPEG4 AXIS™ IP cameras (fixed or PTZ). Supported compression methods shall include, depending on the camera model, MPEG4, MPJEG, and H.264.
2. Resolution shall be capable of full D1 720x480/720x576 (NTSC/PAL) pixels, 2CIF 720x288/720x240 (NTSC/PAL) pixels, CIF 360x240/360x288 (NTSC/PAL) pixels or QCIF 180x120/180x144 (NTSC/PAL) pixels.

3. The DVMS shall be capable of simultaneously recording video and audio at a rate of 30/25 NTSC/PAL frames per camera at full D1 resolution.
4. The DVR shall provide Pentaplex® functionality, which includes real-time functions of recording, playing, viewing, archiving, and transmitting video, while continuously recording.
5. The DVR shall have a true client-server architecture with the capability to configure and perform software upgrades remotely, and with no functional difference between operating locally or remotely.
6. A built-in web server shall be included in the DVR to view live or recorded images, or control PTZ cameras over any TCP/IP connection within Internet Explorer, without requiring any additional software.

J. Camera Housings and Mounts:
1. This section pertains to all interior and exterior housings, domes, and applicable wall, ceiling, corner, pole, and rooftop mounts associated with the housing. Housings and mounts shall be specified in accordance to the type of cameras used.
2. All cameras and lenses shall be enclosed in a tamper resistant housing. Any additional mounting hardware required to install the camera housing at its specified location shall be provided along with the housing.
3. The camera and lens contained inside the housing shall be installed on a camera mount. All additional mounting hardware required to install the camera housing at its specified location shall be provided along with the housing.
4. Shall be manufactured in a manner that are capable of supporting a maximum of three (3) cameras with housings, and meet environmental requirements for the geographical area the camera support equipment is being installed on or within.
5. Environmentally Sealed
   a. Shall:
      1) Be designed in manner that it provides a condensation free environment for correct camera operation.
      2) Operate in a 100 percent condensing humidity atmosphere.
      3) Be constructed in a manner that:

a) Has a fill valve to allow for the introduction of nitrogen into the housing to eliminate existing atmospheric air and pressurize the housing to create moisture free conditions.
b) Has an overpressure valve to prevent damage to the housing in the event of over pressurization.
c) Is equipped with a humidity indicator that is visible to the eye to ensure correct atmospheric conditions at all times.
d) The leak rate of the housing is not to be greater than 13.8kPa or 2 pounds per square inch at sea level within a 90 day period.
e) It shall contain camera mounts or supports as needed to allow for correct positioning of the camera and lens.

b. All electrical and signal cables required for correct operations shall be supplied in a hardened carrier system from the controller to the camera.
c. The mounting bracket shall be adjustable to allow for the housing weight of the camera and the housing unit it is placed in.
d. Accessibility to the camera and mounts shall be taken into consideration for maintenance and service purposes.

6. Exterior Domes
   a. The exterior dome shall meet all requirements outlined in the interior dome paragraph above.
   b. The housing shall be constructed to be dust and water tight, and fully operational in 100 percent condensing humidity.
7. Exterior Wall Mounts
   a. Shall have an adjustable head for mounting the camera.
   b. Shall be constructed of aluminum, stainless steel, or steel with a corrosion-resistant finish.
   c. The head shall be adjustable for not less than plus and minus 90 degrees of pan, and not less than plus and minus 45 degrees of tilt. If the bracket is to be used in conjunction with a pan/tilt, the bracket shall be supplied without the adjustable mounting head, and shall have a bolt-hole pattern to match the pan/tilt base.
   d. Shall be installed at a height that allows for maximum coverage

L. Wires and Cables

1. Shall meet or exceed the manufactures recommendation for power and signal.
2. Will be carried in an enclosed conduit system, utilizing electromagnetic tubing (EMT) to include the equivalent in flexible metal, rigid galvanized steel (RGS) to include the equivalent of liquid tight, polyvinylchloride (PVC) schedule 40 or 80.
3. All conduits will be sized and installed per the NEC. All security system signal and power cables that traverse or originate in a high security office space will contained in either EMT or RGS conduit.
4. All conduit, pull boxes, and junction boxes shall be clearly marked with colored permanent tape or paint that will allow it to be distinguished from all other conduit and infrastructure.
5. Conduit fills shall not exceed 50 percent unless otherwise documented.
6. A pull string shall be pulled along and provided with signal and power cables to assist in future installations.
7. At all locations where there is a wall penetration or core drilling is conducted to allow for conduit to be installed, fire stopping materials shall be applied to that area.
8. High voltage and signal cables shall not share the same conduit and shall be kept separate up to the point of connection. High voltage for the security system shall be defined as any cable or sets of cables carrying 30 VDC/VAC or higher.
9. All cables and conductors, except fiber optic cables, that act as a control, communication, or signal lines shall include surge protection. Surge protection shall be furnished at the equipment end and additional triple electrode gas surge protectors rated for the application on each wire line circuit shall be installed within three (3) ft. (one (1) m.) of the building cable entrance. The inputs and outputs shall be tested in both normal and common mode using the following wave forms:
   a. A 10 microsecond rise time by 1000 microsecond pulse width waveform with a peak voltage of 1500 watts and peak current of 60 amperes.

b. An 8 microsecond rise time by 20 microsecond pulse width wave form with a peak voltage of 1000 volts and peak current of 500 amperes.

10. The surge suppression device shall not attenuate or reduce the video or sync signal under normal conditions. Fuses and relays shall not be used as a means of surge protection.

12. Signal Cables:
    a. use Shielded UTP category 5e (CAT-Ve) cable a with standard RJ-45 connector at each end. The cable with comply with the Power over Ethernet, IEEE802.3af, Standard.
    b. Provide a separate cable for power.
    c. CAT-5e Technical Characteristics:

| | |
|---|---|
| Number of Pairs | 4 |
| Total Number of Conductors | 8 |
| AWG | 24 |
| Stranding | Solid |
| Conductor Material | BC - Bare Copper |
| Insulation Material | PO – Polyolefin |
| Overall Nominal Diameter | .230 in. |
| IEC Specification | 11801 Category 5 |
| TIA/EIA Specification | 568-B.2 Category 5e |
| Max. Capacitance Unbalance | (pF/100 m) 150 pF/100 m |
| Nom. Velocity of Propagation | 70 % |
| Max. Delay | (ns/100 m) 538 @ 100MHz |
| Max. Delay Skew | (ns/100m) 45 ns/100 m |
| Max. Conductor DC Resistance | 9.38 Ohms/100 |
| Max. DCR Unbalance@ 20°C | 3 % |
| Max. Operating Voltage | UL 300 V RMS |

13. Power Cables
    a. Will be sized accordingly and shall comply with the NEC. High voltage power cables will be a minimum of three conductors, 14 AWG, stranded, and coated with a non-conductive polyvinylchloride (PVC) jacket. Low voltage cables will be a minimum of 18 AWG, stranded and non-conductive polyvinylchloride (PVC) jacket.
    b. Will be utilized for all components of the CCTV System that require either a 110 VAC 60 Hz or 220 VAC 50 Hz input. Each feed will be connected to a dedicated circuit breaker at a power panel that is primarily for the security system.
    c. All equipment connected to AC power shall be protected from surges. Equipment protection shall withstand surge test waveforms described in IEEE C62.41. Fuses shall not be used as a means of surge protection.
    d. Shall be rated for either 110 or 220 VAC, 50 or 60 Hz, and shall comply with VA Master Spec 26 05 21 Low Voltage Electrical Power Conductors and Cables (600 Volts and Below).
    e. Low Voltage Power Cables
        1) Shall be a minimum of 18 AWG, Stranded and have a polyvinylchloride outer jacket.
        2) Cable size shall determined using a basic voltage over distance calculation and shall comply with the NEC’s requirements for low voltage cables.

**2.3 INSTALLATION KIT**

A. General:
    1. The kit shall be provided that, at a minimum, includes all connectors and terminals, labeling systems, audio spade lugs, barrier strips, punch blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, conduit, cable duct, and/or cable tray, etc., required to accomplish a neat and secure installation. All wires shall terminate in a spade lug and barrier strip, wire wrap terminal or punch block. Unfinished or unlabeled wire connections shall not be allowed. All unused and partially opened installation kit boxes, coaxial, fiber-optic, and twisted pair cable reels, conduit, cable tray, and/or cable duct

bundles, wire rolls, physical installation hardware shall be turned over to the Contracting Officer. The following sections outline the minimum required installation sub-kits to be used:

2. System Grounding:
   a. The grounding kit shall include all cable and installation hardware required. All head end equipment and power supplies shall be connected to earth ground via internal building wiring, according to the NEC.
   b. This includes, but is not limited to:
      1) Control Cable Shields
      2) Data Cable Shields
      3) Equipment Racks
      4) Equipment Cabinets
      5) Conduits
      6) Cable Duct blocks
      7) Cable Trays
      8) Power Panels
      9) Grounding
      10) Connector Panels
4. Wire and Cable: The wire and cable kit shall include all connectors and terminals, audio spade lugs, barrier straps, punch blocks, wire wrap strips, heat shrink tubing, tie wraps, solder, hangers, clamps, labels etc., required to accomplish a neat and orderly installation.
5. Conduit, Cable Duct, and Cable Tray: The kit shall include all conduit, duct, trays, junction boxes, back boxes, cover plates, feed through nipples, hangers, clamps, other hardware required to accomplish a neat and secure conduit, cable duct, and/or cable tray installation in accordance with the NEC and this document.
6. Equipment Interface: The equipment kit shall include any item or quantity of equipment, cable, mounting hardware and materials needed to interface the systems with the identified sub-system(s) according to the OEM requirements and this document.
7. Labels: The labeling kit shall include any item or quantity of labels, tools, stencils, and materials needed to correctly label each subsystem according to the OEM requirements, as-installed drawings, and this document.

8. Documentation: The documentation kit shall include any item or quantity of items, computer discs, as installed drawings, equipment, maintenance, and operation manuals, and OEM materials needed to correctly provide the system documentation as required by this document and explained herein.

**PART 3**

**3.1 INSTALLATION**

A. System installation shall be in accordance with NECA 303, manufacturer and related documents and references, for each type of security subsystem designed, engineered and installed.

B. Components shall be configured with appropriate “service points” to pinpoint system trouble in less than 30 minutes.

C. The Contractor shall install all system components including Government furnished equipment, and appurtenances in accordance with the manufacturer's instructions, documentation listed in Sections 1.4 and 1.5 of this document, and shall furnish all necessary connectors, terminators, interconnections, services, and adjustments required for a complete and operable system.

D. The CCTV System will be designed, engineered, installed, and tested to ensure all components are fully compatible as a system and can be integrated with all associated security subsystems, whether the system is a stand alone or connected to an existing network.

E. For integration purposes, the CCTV System shall be integrated where appropriate with the following associated security subsystems:

F. A complete CCTV System shall be comprised of, but not limited to, the following components:

1. Cameras
2. Lenses
3. Video Display Equipment
4. Camera Housings and Mounts
5. Controlling Equipment
6. Recording Devices
7. Wiring and Cables

G. The Contractor shall visit the site and verify that site conditions are in agreement/compliance with the design package. The Contractor shall report all changes to the site or conditions that will affect

performance of the system to the Contracting Officer in the form of a report. The Contractor shall not take any corrective action without written permission received from the Contracting Officer.

H. Existing Equipment

1. The Contractor shall connect to and utilize existing video equipment, video and control signal transmission lines, and devices as outlined in the design package. Video equipment and signal lines that are usable in their original configuration without modification may be reused with Contracting Officer approval.
2. The Contractor shall perform a field survey, including testing and inspection of all existing video equipment and signal lines intended to be incorporated into the CCTV System, and furnish a report to the Contracting Officer as part of the site survey report. For those items considered nonfunctioning, provide (with the report) specification sheets, or written functional requirements to support the findings and the estimated cost to correct the deficiency. As part of the report, the Contractor shall include a schedule for connection to all existing equipment.
3. The Contractor shall make written requests and obtain approval prior to disconnecting any signal lines and equipment, and creating equipment downtime. Such work shall proceed only after receiving Contracting Officer approval of these requests. If any device fails after the Contractor has commenced work on that device, signal or control line, the Contractor shall diagnose the failure and perform any necessary corrections to the equipment.
4. The Contractor shall be held responsible for repair costs due to Contractor negligence, abuse, or incorrect installation of equipment.
5. The Contracting Officer shall be provided a full list of all equipment that is to be removed or replaced by the Contractor, to include description and serial/manufacturer numbers where possible. The Contractor shall dispose of all equipment that has been removed or replaced based upon approval of the Contracting Officer after reviewing the equipment removal list. In all areas where equipment is removed or replaced the Contractor shall repair those areas to match the current existing conditions.

I. Enclosure Penetrations: All enclosure penetrations shall be from the bottom of the enclosure unless the system design requires penetrations from other directions. Penetrations of interior enclosures involving transitions of conduit from interior to exterior, and all penetrations on exterior enclosures shall be sealed with rubber silicone sealant to preclude the entry of water and will comply with VA Master Specification 07 84 00, Fire stopping. The conduit riser shall terminate in a hot-dipped galvanized metal cable terminator. The terminator shall be filled with an approved sealant as recommended by the cable manufacturer and in such a manner that the cable is not damaged.

J. Cold Galvanizing: All field welds and brazing on factory galvanized boxes, enclosures, and conduits shall be coated with a cold galvanized paint containing at least 95 percent zinc by weight.

K. Interconnection of Console Video Equipment: The Contractor shall connect signal paths between video equipment as specified by the OEM. Cables shall be as short as practicable for each signal path without causing strain at the connectors. Rack mounted equipment on slide mounts shall have cables of sufficient length to allow full extension of the slide rails from the rack.

L. Cameras:

1. Install the cameras with the focal length lens as indicated for each zone.
2. Connect power and signal lines to the camera.
3. Set cameras with fixed iris lenses to the f-stop to give full video level.
4. Aim camera to give field of view as needed to cover the alarm zone.
5. Aim fixed mounted cameras installed outdoors facing the rising or setting sun sufficiently below the horizon to preclude the camera looking directly at the sun.
6. Focus the lens to give a sharp picture (to include checking for day and night focus and image quality) over the entire field of view; and synchronize all cameras so the picture does not roll on the monitor when cameras are selected. Dome cameras shall have all preset positions defined and installed.

M. Monitors:

1. Connect all signal inputs and outputs as shown and specified.
2. Terminate video input signals as required.
3. Connect the monitor to AC power.

N. Video Signal Equipment:
1. Install the video signal equipment as shown in the design and construction documents, and as specified by the OEM.
2. Connect video or signal inputs and outputs as shown and specified.
3. Terminate video inputs as required.
4. Connect alarm signal inputs and outputs as required.
5. Connect control signal inputs and outputs as required
6. Connect electrically powered equipment to AC power.

O. Camera Housings, Mounts, and Poles:
1. Install the camera housings and mounts as specified by the manufacturer and as shown, provide mounting hardware sized appropriately to secure each camera, housing and mount with maximum wind and ice loading encountered at the site.
2. Provide electrical and signal transmission cabling to the mount location via a hardened carrier system from the Access Control System and Database Management to the device.
3. Connect signal lines and AC power to the housing interfaces.
4. Connect pole wiring harness to camera.

P. System Start-Up
1. The Contractor shall not apply power to the CCTV System until the following items have been completed:
   a. CCTV System equipment items and have been set up in accordance with manufacturer's instructions.
   b. A visual inspection of the CCTV System has been conducted to ensure that defective equipment items have not been installed and that there are no loose connections.
   c. System wiring has been tested and verified as correctly connected as indicated.
   d. All system grounding and transient protection systems have been verified as installed and connected as indicated.
   e. Power supplies to be connected to the CCTV System have been verified as the correct voltage, phasing, and frequency as indicated.

2. Satisfaction of the above requirements shall not relieve the Contractor of responsibility for incorrect installation, defective equipment items, or collateral damage as a result of Contractor work efforts.

Q. Supplemental Contractor Quality Control

1. The Contractor shall provide the services of technical representatives who are familiar with all components and installation procedures of the installed CCTV System; and are approved by the Contracting Officer.
2. The Contractor will be present on the job site during the preparatory and initial phases of quality control to provide technical assistance.
3. The Contractor shall also be available on an as needed basis to provide assistance with follow-up phases of quality control.
4. The Contractor shall participate in the testing and validation of the system and shall provide certification that the system installed is fully operational as all construction document requirements have been fulfilled.

**3.2 TESTING AND TRAINING**

All testing and training shall be compliant with the VA General Requirements, Section 01 00 00, GENERAL REQUIREMENTS.

-----END----

# SECTION 23 81 43
# AIR-SOURCE UNITARY HEAT PUMPS

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This Section specifies electrically operated air-source unitary heat pumps.

B. Definitions:

1. Coefficient of Performance (COP) - Cooling: The ratio of the rate of heat removed to the rate of energy input in consistent units, for a complete refrigerating system or some specific portion of that system under designated operating conditions.
2. Coefficient of Performance (COP) - Heating: The ratio of the rate of heat delivered to the rate of energy input is consistent units for a complete heat pump system, including the compressor and, if applicable, auxiliary heat under designated operating conditions.
3. Energy Efficiency Ratio (EER): The ratio of net cooling capacity is Btu/h to total rate of electricity input in watts under designated operating conditions.
4. Heating Seasonal Performance Factor (HSPF) - Total heating output of heat pump during its normal annual usage period for heating in Btu/h divided by total electric energy input in watts during the same period.
5. Seasonal Energy Efficiency Ratio (SEER) - Total cooling output of an air conditioner during its normal annual usage period for cooling in Btu/h divided by total electric energy input in watts during the same period.
6. Air-Source Unitary Heat Pump: One or more factory made assemblies that normally include an indoor conditioning coil, compressor(s) and an outdoor refrigerant-to-air coil. These units provide both heating and cooling functions.

### 1.2 RELATED WORK

A. Section 01 00 00, GENERAL REQUIREMENTS: For pre-test requirements.

B. Section 23 05 11, COMMON WORK RESULTS FOR HVAC: General mechanical requirements and items, which are common to more than one section of Division 23.

C. Section 23 23 00, REFRIGERANT PIPING: Requirements for field refrigerant piping.

D. Section 23 31 00, HVAC DUCTS AND CASINGS: Requirements for sheet metal ductwork.

E. Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS: Requirements for commissioning, systems readiness checklists, and training.
F. Section 01 91 00 – GENERAL COMMISSIONING REQUIREMENTS
G. Section 26 05 21, Low-Voltage Electrical Power Conductors and Cables (600 Volts and Below).
H. Section 26 05 26, Grounding and Bonding for Electrical Systems.
I. Section 26 05 33, Raceway and Boxes for Electrical Systems.
J. Section 26 22 21, Specialty Transformers.
K. Section 26 27 26, Wiring Devices.

**1.3 QUALITY ASSURANCE:**

A. Refer to specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC
B. Comply with ASHRAE Standard 15, Safety Code for Mechanical Refrigeration.
C. Comply with ASHRAE Standard 90.1-2010, Energy Standard for Buildings except Low-Rise Residential Buildings for cooling and heating performance requirements when tested in accordance with AHRI 210/240 and UL 1995.
D. Heating Performance shall conform to ASHRAE requirements when tested in accordance with AHRI 210/240/ and UL 1995.

**1.4 SUBMITTALS**

A. Submit in accordance with specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
B. Manufacturer’s Literature and Data.
   1. Air-Source Unitary Heat pump:
      a. Split system
C. Certification: Submit, simultaneously with shop drawings, a proof of certification that this product has been certified by AHRI.
D. Performance Rating: Submit catalog selection data showing equipment ratings and compliance with required cooling and heating capacities EER and COP values as applicable.
E. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.

**1.5 APPLICABLE PUBLICATIONS:**

A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
B. Federal Specification (Fed. Spec.):

A-A-50502-90.....Air-conditioner (UNITARY HEAT PUMP), AIR TO AIR (3000 TO 300,000 BTUH)

C. Air-Conditioning Heating and Refrigeration Institute (AHRI) Standards:

AHRI-DCPP.....Directory of Certified Product Performance - Applied Directory of Certified Products

210/240-08.....Performance Rating of Unitary Air-Conditioning and Air-Source Heat Pump Equipment

270-08.....Sound Rating of Outdoor Unitary Equipment

310/380-04.....Standard for Packaged Terminal Air-Conditioners and Heat Pumps (CSA-C744-04)

340/360-07.....Commercial and Industrial Unitary Air-Conditioning and Heat Pump Equipment

D. Air Movement and Control Association (AMCA):

210-07.....Laboratory Methods of Testing Fans for Aerodynamic Performance Rating (ANSI)

410-96.....Recommended Safety Practices for Users and Installers of Industrial and Commercial Fans

E. American National Standards Institute (ANSI):

S12.51-02 (R2007).....Acoustics - Determination of Sound Power Levels of Noise Sources Using Sound Pressure - Precision Method for Reverberation Rooms (same as ISO 3741:1999)

F. American Society of Heating, Refrigerating and Air-Conditioning Engineers Inc (ASHRAE):

15-10.....Safety Standard for Refrigeration Systems (ANSI)

62.1-10.....Ventilation for Acceptable Indoor Air Quality (ANSI)

90.1-07.....Energy Standard for Buildings except Low-Rise Residential Buildings

2008 Handbook.....HVAC Systems and Equipment

G. American Society of Testing and Materials (ASTM):

B117-09.....Standard Practice for Operating Salt Spray (Fog) Apparatus

H. National Electrical Manufacturer’s Association (NEMA):

MG 1-09 (R2010).....Motors and Generators (ANSI)

ICS 1-00 (R2005).....Industrial Controls and Systems: General Requirements

I. National Fire Protection Association (NFPA):

90A-09.....Standard for the Installation of Air-Conditioning and Ventilating Systems

J. Underwriters Laboratory (UL):
1995-05.....Heating and Cooling Equipment

**PART II- PRODUCTS**

**2.1 UNITARY HEAT PUMPS, AIR TO AIR**

A. Units shall comply with Fed Spec A-A-50502 Type II, (Split System) having remote outdoor section separate from indoor Section, Class 1, "Department of Energy" (DOE) covered products (units with cooling capacity up to 65000 Btu/hr.
   1. Unitary heat pumps shall bear the United States Environmental Protection Agency, Energy Star label and shall have a minimum Heating Season Performance Factor (HSPF) of 10 (Type II – Split System), and a minimum Seasonal Energy Efficiency Ratio (SEER) of 17 (Type II – Split System)//.

B. Applicable AHRI Standards: Units shall be listed in the corresponding ARI Directory of Certified products shown in paragraph, APPLICABLE PUBLICATIONS:
   1. Air Source Unitary heat pumps with capacity less than 19 KW (65,000 Btu/hr), Comply with AHRI 210/240.

C. Casing: Unit shall be constructed of zinc coated, heavy-gage galvanized steel. Exterior surfaces shall be cleaned, phosphatized, and finished with a weather-resistant baked enamel finish. Unit surfaces shall be tested 500 hours in a salt spray test in compliance with ASTM B117. Cabinet panels shall have lifting handles and shall be water- and air-tight seal. All exposed vertical, top covers and base pan shall be insulated with matt-faced, fire-resistant, odorless, glass fiber material. Surfaces in contact with the airstream shall comply with requirements in ASHRAE 62.1-2010. The base of the unit shall have provisions for forklift and crane lifting.

D. Filters: One inch, MERV 7, throwaway filter shall be standard on all units below 19kW (6 Tons).

E. Compressors: Compressors shall be inverter-drive, hermetic rotary type. Motor shall be suction gas-cooled. Internal overloads and crankcase heaters shall be utilized with all compressors.

F. Refrigerant Circuit: Each refrigerant circuit shall have independent fixed orifice or thermostatic expansion devices, service pressure ports, and refrigerant line filter driers factory installed as standard. An area shall be provided for replacement suction line driers.

G. Evaporator and Condenser Coils: Internally finned, DN 10 (NPS 3/8) copper tubes mechanically bonded to a configured aluminum plate fin shall be standard. The evaporated coil and condenser coil shall be leak tested at the factory to 1378 kPa (200 psig) and pressure tested to 2756 kPa (400 psig). All dual compressor units shall have intermingled evaporator coils. Sloped condensate drain pans shall be provided.

H. Outdoor fans: Direct driven, statically and dynamically balanced, draw-through in the vertical discharge position. The fan motors shall be permanently lubricated and shall have built-in thermal overload protection.

I. Indoor Fan:

1. Fans shall be centrifugal direct-drive blower type with air intakes on the sides of the blower housings and discharge at the front of the blower housings Automatic, motor-driven vertical air sweep shall be provided.

J. Defrost Controls: A time initiated, temperature terminated defrost system shall ship with a setting of 70-minute cycle, with a choice of 50- or 90-minute cycle. Timed override limits defrost cycle to 10 minutes shall be available on units from 35- to 70-kW (10 to 20 tons). Adaptive demand defrost shall be provided on units below 35 kW (10 Tons).

K. Unit Electrical

1. Provide single point unit power connection.
2. Unit control box shall be located within the unit and shall contain controls for compressor, reversing valve and fan motor operation and shall have a 50 VA 24-volt control circuit transformer and a terminal block for low voltage field wiring connections.
3. Safety Controls - High pressure, low temperature, and low pressure safety switches shall be wired through a latching lockout circuit to hold the conditioner off until it is reset electrically be interrupting the power supply to the conditioner. All safety switches shall be normally closed, opening upon fault detection.

L. Operating Controls

2. Low voltage, adjustable programmable room thermostat to control heating and cooling in sequence with delay between stages, compressor and supply fan to maintain temperature setting.

**PART 3- EXECUTION**

**3.1 INSTALLATION**

A. Install heat pumps according to manufacturers printed instructions.

B. Install electrical and control devices furnished by the manufacturer but not specified to be factory mounted. All electrical work shall comply with Division 26 Sections.

C. Ductwork: Comply with requirements in Section 23 31 00, HVAC DUCTS AND CASINGS.

D. Piping: Comply with requirements in Section 23 23 00, REFRIGERANT PIPING.

E. Mount thermostat where indicated on drawing and in accordance with ADA guidelines. All cabling shall be tan and or gray in accordance with Zablocki VAMC wiring requirements. Wiring shall also meet all the requirements of the applicable sections of Division 26 within this specification.

**3.2 STARTUP AND TESTING:**

A. Perform startup checks according to manufacturer’s written instructions.

B. Test controls and demonstrate its compliance with project requirements. Replace damaged or malfunctioning controls and equipment and retest the equipment to the satisfaction of the Resident Engineer.

C. Furnish test reports to the Senior Resident Engineer in accordance with specification Section 01 00 00, GENERAL REQUIREMENTS.

**3.3 INSTRUCTIONS**

Provide services of manufacturer’s technical representative for four hours to instruct VA personnel in operation and maintenance of heat pumps.

**3.4 STARTUP AND TESTING**

A. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with the Resident Engineer and Commissioning Agent. Provide a minimum of 7 days prior notice.

**3.5 COMMISSIONING**

A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

**3.6 DEMONSTRATION AND TRAINING**

A. Provide services of manufacturer's technical representative for four hours to instruct VA personnel in operation and maintenance of units.

B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00 – COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

# SECTION 28 31 00
# FIRE DETECTION AND ALARM

## PART 1 - GENERAL

### 1.1 DESCRIPTION

A. This section of the specifications includes the furnishing, installation, and connection of the fire alarm equipment to the existing Building 112 fire alarm system to form a complete coordinated system ready for operation. It shall include, but not be limited to, alarm initiating devices, alarm notification appliances, control units, power supplies, and wiring as shown on the drawings and specified. The fire alarm system shall not be combined with other systems such as building automation, energy management, security, etc.

B. Fire alarm systems shall comply with requirements of the most recent VA FIRE PROTECTION DESIGN MANUAL and NFPA 72 unless variations to NFPA 72 are specifically identified within these contract documents by the following notation: "variation". The design, system layout, document submittal preparation, and supervision of installation and testing shall be provided by a technician that is certified NICET level III or a registered fire protection engineer. The NICET certified technician shall be on site for the supervision and testing of the system. Factory engineers from the equipment manufacturer, thoroughly familiar and knowledgeable with all equipment utilized, shall provide additional technical support at the site as required by the Resident Engineer. Installers shall have a minimum of 2 years experience installing fire alarm systems.

C. Alarm signals (by device), supervisory signals (by device) and system trouble signals (by device not reporting) shall be distinctly transmitted to the main fire alarm system control unit located in the Graphic Center.

D. The existing fire alarm system is currently maintained by Systec of Wisconsin Ltd. Located in Brookfield, WI. Contact Mike Pilliod at 262-790-1553 for further information.

**1.2 SCOPE**

A. This is an addition to an existing Pyrotronics fully addressable fire alarm system. Device location and wiring runs shown on the drawings are for reference only unless specifically dimensioned. Actual locations shall be in accordance with NFPA 72 and this specification.

B. Basic Performance:

1. Alarm and trouble signals from each building fire alarm control panel shall be digitally encoded by UL listed electronic devices onto a multiplexed communication system.
2. Response time between alarm initiation (contact closure) and recording at the main fire alarm control unit (appearance on alphanumeric read out) shall not exceed 5 seconds.
3. The signaling line circuits (SLC) between building fire alarm control units shall be wired Style 7 in accordance with NFPA 72. Isolation shall be provided so that no more than one building can be lost due to a short circuit fault.
4. Initiating device circuits (IDC) shall be wired Style C in accordance with NFPA 72.
5. Signaling line circuits (SLC) within buildings shall be wired Style 4 in accordance with NFPA 72. Individual signaling line circuits shall be limited to covering 22,500 square feet (2,090 square meters) of floor space or 3 floors whichever is less.
6. Notification appliance circuits (NAC) shall be wired Style Y in accordance with NFPA 72.

**1.3 RELATED WORK**

A. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Requirements for procedures for submittals.

B. Section 07 84 00 - FIRESTOPPING. Requirements for fire proofing wall penetrations.

C. Section 28 05 00 – COMMON WORK RESULTS FOR ELECTRONIC SAFETY AND SECURITY. Requirements for general requirements that are common to more than one section in Division 28.

D. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.

E. Section 28 05 26 - GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY. Requirements for grounding of equipment.

F. Section 28 05 28.33 - CONDUITS AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for infrastructure.

G. Section 28 05 13 - CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY. Requirements for conductors and cables.

H. Section 28 13 11, PHYSICAL ACCESS CONTROL SYSTEMS (PACS). Requirements for integration with physical access control system.

**1.4 SUBMITTALS**

A. General: Submit 5 copies in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, and Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

B. Drawings:

1. Prepare drawings using AutoCAD Release 14 software and include all contractors information. Layering shall be by VA criteria as provided by the Resident Engineer. Bid drawing files on AutoCAD will be provided to the Contractor at the pre-construction meeting. The contractor shall be responsible for verifying all critical dimensions shown on the drawings provided by VA.

2. Floor plans: Provide locations of all devices (with device number at each addressable device corresponding to control unit programming), appliances, panels, equipment, junction/terminal cabinets/boxes, risers, electrical power connections, individual circuits and raceway routing, system zoning; number, size, and type of raceways and conductors in each raceway; conduit fill calculations with cross section area percent fill for each type and size of conductor and raceway. Only those devices connected and incorporated into the final system shall be on these floor plans. Do not show any removed devices on the floor plans. Show all interfaces for all fire safety functions.

3. Riser diagrams: Provide, for the entire system, the number, size and type of riser raceways and conductors in each riser raceway and number of each type device per floor and zone. Show door holder interface, elevator control interface, HVAC shutdown interface, fire extinguishing system interface, and all other fire safety interfaces. Show wiring Styles on the riser diagram for all

circuits. Provide diagrams both on a per building and campus wide basis.

4. Detailed wiring diagrams: Provide for control panels, modules, power supplies, electrical power connections, auxiliary relays and annunciators showing termination identifications, size and type conductors, circuit boards, LED lamps, indicators, adjustable controls, switches, ribbon connectors, wiring harnesses, terminal strips and connectors, spare zones/circuits. Diagrams shall be drawn to a scale sufficient to show spatial relationships between components, enclosures and equipment configuration.
5. Two weeks prior to final inspection, the Contractor shall deliver to the Resident Engineer 3 sets of as-built drawings and one set of the as-built drawing computer files (using AutoCAD 2007 or later). As-built drawings (floor plans) shall show all new and/or existing conduit used for the fire alarm system.

C. Manuals:

1. Submit simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals including technical data sheets for all items used in the system, power requirements, device wiring diagrams, dimensions, and information for ordering replacement parts.
   a. Wiring diagrams shall have their terminals identified to facilitate installation, operation, expansion and maintenance.
   b. Wiring diagrams shall indicate internal wiring for each item of equipment and the interconnections between the items of equipment.
   c. Include complete listing of all software used and installation and operation instructions including the input/output matrix chart.
   d. Provide a clear and concise description of operation that gives, in detail, the information required to properly operate, inspect, test and maintain the equipment and system. Provide all manufacturer's installation limitations including but not limited to circuit length limitations.
   e. Complete listing of all digitized voice messages.

f. Provide standby battery calculations under normal operating and alarm modes. Battery calculations shall include the magnets for holding the doors open for one minute.
g. Include information indicating who will provide emergency service and perform post contract maintenance.
h. Provide a replacement parts list with current prices. Include a list of recommended spare parts, tools, and instruments for testing and maintenance purposes.
i. A computerized preventive maintenance schedule for all equipment. The schedule shall be provided on disk in a computer format acceptable to the VAMC and shall describe the protocol for preventive maintenance of all equipment. The schedule shall include the required times for systematic examination, adjustment and cleaning of all equipment. A print out of the schedule shall also be provided in the manual. Provide the disk in a pocket within the manual.
j. Furnish manuals in 3 ring loose-leaf binder or manufacturer's standard binder.
k. A print out for all devices proposed on each signaling line circuit with spare capacity indicated.

2. Two weeks prior to final inspection, deliver 4 copies of the final updated maintenance and operating manual to the Resident Engineer.
   a. The manual shall be updated to include any information necessitated by the maintenance and operating manual approval.
   b. Complete "As installed" wiring and schematic diagrams shall be included that shows all items of equipment and their interconnecting wiring. Show all final terminal identifications.
   c. Complete listing of all programming information, including all control events per device including an updated input/output matrix.
   d. Certificate of Installation as required by NFPA 72 for each building. The certificate shall identify any variations from the National Fire Alarm Code.
   e. Certificate from equipment manufacturer assuring compliance with all manufacturers installation requirements and satisfactory system operation.

D. Certifications:

1. Together with the shop drawing submittal, submit the technician's NICET level III fire alarm certification as well as certification from the control unit manufacturer that the proposed performer of contract maintenance is an authorized representative of the major equipment manufacturer. Include in the certification the names and addresses of the proposed supervisor of installation and the proposed performer of contract maintenance. Also include the name and title of the manufacturer’s representative who makes the certification.
2. Together with the shop drawing submittal, submit a certification from either the control unit manufacturer or the manufacturer of each component (e.g., smoke detector) that the components being furnished are compatible with the control unit.
3. Together with the shop drawing submittal, submit a certification from the major equipment manufacturer that the wiring and connection diagrams meet this specification, UL and NFPA 72 requirements.

**1.5 WARRANTY**

All work performed and all material and equipment furnished under this contract shall be free from defects and shall remain so for a period of one year from the date of acceptance of the entire installation by the Contracting Officer.

**1.6 GUARANTY PERIOD SERVICES**

A. Complete inspection, testing, maintenance and repair service for the fire alarm system shall be provided by a factory trained authorized representative of the manufacturer of the major equipment for a period of 5 years from the date of acceptance of the entire installation by the Contracting Officer.

B. Contractor shall provide all necessary test equipment, parts and labor to perform required inspection, testing, maintenance and repair.

C. All inspection, testing, maintenance and permanent records required by NFPA 72, and recommended by the equipment manufacturer shall be provided by the contractor. D. Maintenance and testing shall be performed in accordance with NFPA 72. A computerized preventive maintenance schedule shall be provided and shall describe the protocol

for preventive maintenance of equipment. The schedule shall include a systematic examination, adjustment and cleaning of all equipment.

E. Non-included Work: Repair service shall not include the performance of any work due to improper use, accidents, or negligence for which the contractor is not responsible.

F. Service and emergency personnel shall report to the Engineering Office or their authorized representative upon arrival at the hospital and again upon the completion of the required work. A copy of the work ticket containing a complete description of the work performed and parts replaced shall be provided to the VA Resident Engineer.G. Emergency Service:

1. Warranty Period Service: Service other than the preventative maintenance, inspection, and testing required by NFPA 72 shall be considered emergency call-back service and covered under the warranty of the installation during the first year of the warranty period, unless the required service is a result of abuse or misuse by the Government. Written notification shall not be required for emergency warranty period service and the contractor shall respond as outlined in the following sections on Normal and Overtime Emergency Call-Back Service. Warranty period service can be required during normal or overtime emergency call-back service time periods at the discretion of the Resident Engineer.
2. Normal and overtime emergency call-back service shall consist of an on-site response within 2 hours of notification of a system trouble.
3. Normal emergency call-back service times are between the hours of 7:30 a.m. and 4:00 p.m., Monday through Friday, exclusive of federal holidays. Service performed during all other times shall be considered to be overtime emergency call-back service. The cost of all normal emergency call-back service for years 2 through 5 shall be included in the cost of this contract.
4. Overtime emergency call-back service shall be provided for the system when requested by the Government. The cost of the first 40 man hours per year of overtime call-back service during years 2 through 5 of this contract shall be provided under this contract. Payment for overtime emergency call-back service in excess of the 40 man hours per year requirement will be handled through separate

purchase orders. The method of calculating overtime emergency call-back hours is based on actual time spent on site and does not include travel time.

H. The contractor shall maintain a log at each fire alarm control unit. The log shall list the date and time of all examinations and trouble calls, condition of the system, and name of the technician. Each trouble call shall be fully described, including the nature of the trouble, necessary correction performed, and parts replaced.

**1.7 APPLICABLE PUBLICATIONS**

A. The publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. The publications are referenced in text by the basic designation only and the latest editions of these publications shall be applicable.

B. National Fire Protection Association (NFPA):

NFPA 13 .....Standard for the Installation of Sprinkler Systems, 2010 edition

NFPA 14 .....Standard for the Installation of Standpipes and Hose Systems, 2010 edition

NFPA 20 .....Standard for the Installation of Stationary Pumps for Fire Protection, 2010 edition

NFPA 70.....National Electrical Code (NEC), 2010 edition

NFPA 72.....National Fire Alarm Code, 2010 edition

NFPA 90A.....Standard for the Installation of Air Conditioning and Ventilating Systems, 2009 edition

NFPA 101.....Life Safety Code, 2009 edition

C. Underwriters Laboratories, Inc. (UL): Fire Protection Equipment Directory

D. Factory Mutual Research Corp (FM): Approval Guide, 2007-2011

E. American National Standards Institute (ANSI):

S3.41.....Audible Emergency Evacuation Signal, 1990 edition, reaffirmed 2008

F. International Code Council, International Building Code (IBC), 2009 edition

**PART 2 - PRODUCTS**

**2.1 EQUIPMENT AND MATERIALS, GENERAL**

A. All equipment and components shall be new and the manufacturer's current model. All equipment shall be tested and listed by Underwriters Laboratories, Inc. or Factory Mutual Research Corporation for use as part of a fire alarm system. The authorized representative of the manufacturer of the major equipment shall certify that the installation complies with all manufacturers’ requirements and that satisfactory total system operation has been achieved.

**2.2 CONDUIT, BOXES, AND WIRE**

A. Conduit shall be in accordance with Section 28 05 28.33 CONDUIT AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY and as follows:
   1. All new conduits shall be installed in accordance with NFPA 70.
   2. Conduit fill shall not exceed 40 percent of interior cross sectional area.
   3. All new conduits shall be 3/4 inch (19 mm) minimum.

B. Wire:
   1. Wiring shall be in accordance with NEC article 760, Section 28 05 13, CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY, and as recommended by the manufacturer of the fire alarm system. All wires shall be color coded. Number and size of conductors shall be as recommended by the fire alarm system manufacturer, but not less than 18 AWG for initiating device circuits and 14 AWG for notification device circuits.
   2. Addressable circuits and wiring used for the multiplex communication loop shall be twisted and shielded unless specifically excepted by the fire alarm equipment manufacturer in writing.
   3. Any fire alarm system wiring that extends outside of a building shall have additional power surge protection to protect equipment from physical damage and false signals due to lightning, voltage and current induced transients. Protection devices shall be shown on the submittal drawings and shall be UL listed or in accordance with written manufacturer's requirements.
   4. All wire or cable used in underground conduits including those in concrete shall be listed for wet locations.

C. Terminal Boxes, Junction Boxes, and Cabinets:

1. Shall be galvanized steel in accordance with UL requirements.
2. All boxes shall be sized and installed in accordance with NFPA 70.
3. covers shall be repainted red in accordance with Section 09 91 00, PAINTING and shall be identified with white markings as "FA" for junction boxes and as "FIRE ALARM SYSTEM" for cabinets and terminal boxes. Lettering shall be a minimum of 3/4 inch (19 mm) high.
4. Terminal boxes and cabinets shall have a volume 50 percent greater than required by the NFPA 70. Minimum sized wire shall be considered as 14 AWG for calculation purposes.
5. Terminal boxes and cabinets shall have identified pressure type terminal strips and shall be located at the base of each riser. Terminal strips shall be labeled as specified or as approved by the Resident Engineer.

**2.3 ALARM NOTIFICATION APPLIANCES**

A. Bells:
1. Shall be electric, single-stroke or vibrating, heavy-duty, under-dome, solenoid type.
2. Unless otherwise shown on the drawings, shall be 6 inches (150 mm) diameter and have a minimum nominal rating of 80 dBA at 10 feet (3,000 mm).
3. Mount on removable adapter plates on outlet boxes.
4. Bells located outdoors shall be weatherproof type with metal housing and protective grille.
5. Each bell circuit shall have a minimum of 20 percent spare capacity.

B. Speakers:
1. Shall operate on either 25 VRMS or 70.7 VRMS with field selectable output taps from 0.5 to 2.0W and originally installed at the 1/2 watt tap. Speakers shall provide a minimum sound output of 80 dBA at 10 feet (3,000 mm) with the 1/2 watt tap.
2. Frequency response shall be a minimum of 400 HZ to 4,000 HZ.
3. Four inches (100 mm) or 8 inches (200 mm) cone type speakers ceiling mounted with white colored baffles in areas with suspended ceilings and wall mounted in areas without ceilings.

C. Strobes:
1. Xenon flash tube type minimum 15 candela in toilet rooms and 75 candela in all other areas with a flash rate of 1 HZ. Strobes shall

be synchronized where required by the National Fire Alarm Code (NFPA 72).

2. Backplate shall be red with 1/2 inch (13 mm) permanent red letters. Lettering to read "Fire", be oriented on the wall or ceiling properly, and be visible from all viewing directions.
3. Each strobe circuit shall have a minimum of 20 percent spare capacity.
4. Strobes may be combined with the audible notification appliances specified herein.

D. Fire Alarm Horns:

1. Shall be electric, utilizing solid state electronic technology operating on a nominal 24 VDC.
2. Shall be a minimum nominal rating of 80 dBA at 10 feet (3,000 mm).
3. Mount on removable adapter plates on conduit boxes.
4. Horns located outdoors shall be of weatherproof type with metal housing and protective grille.
5. Each horn circuit shall have a minimum of 20 percent spare capacity.

**2.4 ALARM INITIATING DEVICES**

A. Manual Fire Alarm Stations:

1. Shall be non-breakglass, address reporting type.
2. Station front shall be constructed of a durable material such as cast or extruded metal or high impact plastic. Stations shall be semi-flush type.
3. Stations shall be of single action pull down type with suitable operating instructions provided on front in raised or depressed letters, and clearly labeled "FIRE."
4. Operating handles shall be constructed of a durable material. On operation, the lever shall lock in alarm position and remain so until reset. A key shall be required to gain front access for resetting, or conducting tests and drills.
5. Unless otherwise specified, all exposed parts shall be red in color and have a smooth, hard, durable finish.

B. Smoke Detectors:

1. Smoke detectors shall be photoelectric type and UL listed for use with the fire alarm control unit being furnished.

2. Smoke detectors shall be addressable type complying with applicable UL Standards for system type detectors. Smoke detectors shall be installed in accordance with the manufacturer's recommendations and NFPA 72.
3. Detectors shall have an indication lamp to denote an alarm condition. Provide remote indicator lamps and identification plates where detectors are concealed from view. Locate the remote indicator lamps and identification plates flush mounted on walls so they can be observed from a normal standing position.
4. All spot type and duct type detectors installed shall be of the photoelectric type.
5. Photoelectric detectors shall be factory calibrated and readily field adjustable. The sensitivity of any photoelectric detector shall be factory set at 3.0 plus or minus 0.25 percent obscuration per foot.
6. Detectors shall provide a visual trouble indication if they drift out of sensitivity range or fail internal diagnostics. Detectors shall also provide visual indication of sensitivity level upon testing. Detectors, along with the fire alarm control units shall be UL listed for testing the sensitivity of the detectors.

C. Heat Detectors:
1. Heat detectors shall be of the addressable restorable rate compensated fixed-temperature spot type.
2. Detectors shall have a minimum smooth ceiling rating of 2,500 square feet (230 square meters).
3. Ordinary temperature (135 degrees F (57 degrees C)) heat detectors shall be utilized.

**2.5 SPARE AND REPLACEMENT PARTS**

A. Provide spare and replacement parts as follows:
3. Heat detectors - 1
4. Fire alarm strobes - 1
6. Fire alarm speakers - 1
7. Smoke detectors - 1

C. Spare and replacement parts shall be in original packaging and submitted to the Resident Engineer.

E. Provide to the VA, all hardware, software, programming tools, license and documentation necessary to permanently modify the fire alarm system on site. The minimum level of modification includes addition and deletion of devices, circuits, zones and changes to system description, system operation, and digitized evacuation and instructional messages.

**2.6 INSTRUCTION CHART:**

Provide typewritten instruction card mounted behind a Lexan plastic or glass cover in a stainless steel or aluminum frame with a backplate. Install the frame in a conspicuous location observable from each control unit where operations are performed. The card shall show those steps to be taken by an operator when a signal is received under all conditions, normal, alarm, supervisory, and trouble. Provide an additional copy with the binder for the input output matrix for the sequence of operation. The instructions shall be approved by the Resident Engineer before being posted.

**PART 3 - EXECUTION**

**3.1 INSTALLATION:**

A. Installation shall be in accordance with NFPA 70, 72, 90A, and 101 as shown on the drawings, and as recommended by the major equipment manufacturer. Fire alarm wiring shall be installed in conduit. All conduit and wire shall be installed in accordance with, Section 28 05 13 CONDUCTORS AND CABLES FOR ELECTRONIC SAFETY AND SECURITY, Section 28 05 26 GROUNDING AND BONDING FOR ELECTRONIC SAFETY AND SECURITY, Section 28 05 28.33 CONDUIT AND BACKBOXES FOR ELECTRONIC SAFETY AND SECURITY, and all penetrations of smoke and fire barriers shall be protected as required by Section 07 84 00, FIRESTOPPING.

B. All conduits, junction boxes, conduit supports and hangers shall be concealed in finished areas and may be exposed in unfinished areas.

C. All new and reused exposed conduits shall be painted in accordance with Section 09 91 00, PAINTING to match surrounding finished areas and red in unfinished areas.

G. Speakers shall be ceiling mounted and fully recessed in areas with suspended ceilings. Speakers shall be wall mounted and recessed in

finished areas without suspended ceilings. Speakers may be surface mounted in unfinished areas.

H. Strobes shall be flush wall mounted with the bottom of the unit located 80 inches (2,000 mm) above the floor or 6 inches (150 mm) below ceiling, whichever is lower. Locate and mount to maintain a minimum 36 inches (900 mm) clearance from side obstructions.

I. Manual pull stations shall be installed not less than 42 inches (1,050 mm) or more than 48 inches (1,200 mm) from finished floor to bottom of device and within 60 inches (1,500 mm) of a stairway or an exit door.

**3.2 TYPICAL OPERATION**

H. Alarm verification shall not be used for smoke detectors installed for the purpose of early warning.

**3.3 TESTS**

A. Provide the service of a NICET level III, competent, factory-trained engineer or technician authorized by the manufacturer of the fire alarm equipment to technically supervise and participate during all of the adjustments and tests for the system. Make all adjustments and tests in the presence of the Resident Engineer.

B. When the systems have been completed and prior to the scheduling of the final inspection, furnish testing equipment and perform the following tests in the presence of the Resident Engineer. When any defects are detected, make repairs or install replacement components, and repeat the tests until such time that the complete fire alarm systems meets all contract requirements. After the system has passed the initial test and been approved by the Resident Engineer, the contractor may request a final inspection.

1. Before energizing the cables and wires, check for correct connections and test for short circuits, ground faults, continuity, and insulation.
2. Test the insulation on all installed cable and wiring by standard methods as recommended by the equipment manufacturer.
3. Run water through all flow switches. Check time delay on water flow switches. Submit a report listing all water flow switch operations and their retard time in seconds.
4. Open each alarm initiating and notification circuit to see if trouble signal actuates.

5. Ground each alarm initiation and notification circuit and verify response of trouble signals.

**3.4 FINAL INSPECTION AND ACCEPTANCE**

A. Prior to final acceptance a minimum 30 day "burn-in" period shall be provided. The purpose shall be to allow equipment to stabilize and potential installation and software problems and equipment malfunctions to be identified and corrected. During this diagnostic period, all system operations and malfunctions shall be recorded. Final acceptance will be made upon successful completion of the "burn-in" period and where the last 14 days is without a system or equipment malfunction.

B. At the final inspection a factory trained representative of the manufacturer of the major equipment shall repeat the tests in Article 3.3 TESTS and those required by NFPA 72. In addition the representative shall demonstrate that the systems function properly in every respect. The demonstration shall be made in the presence of a VA representative.

**3.5 INSTRUCTION**

A. The manufacturer's authorized representative shall provide instruction and training to the VA as follows:

1. Six 1-hour sessions to engineering staff, security police and central attendant personnel for simple operation of the system. Two sessions at the start of installation, 2 sessions at the completion of installation and 2 sessions 3 months after the completion of installation.
2. Four 2-hour sessions to engineering staff for detailed operation of the system. Two sessions at the completion of installation and 2 sessions 3 months after the completion of installation.
3. Three 8-hour sessions to electrical technicians for maintaining, programming, modifying, and repairing the system at the completion of installation and one 8-hour refresher session 3 months after the completion of installation.

B. The Contractor and/or the Systems Manufacturer's representative shall provide a typewritten "Sequence of Operation" including a trouble shooting guide of the entire system for submittal to the VA. The sequence of operation will be shown for each input in the system in a matrix format and provided in a loose leaf binder. When reading the sequence of operation, the reader will be able to quickly and easily

determine what output will occur upon activation of any input in the system. The INPUT/OUTPUT matrix format shall be as shown in Appendix A to NFPA 72.

C. Furnish the services of a competent instructor for instructing personnel in the programming requirements necessary for system expansion. Such programming shall include addition or deletion of devices, zones, indicating circuits and printer/display text.

**- - END - -**