



CONSTRUCTION NOTES

- 1 MACHINE MILL ASPHALT 1/2" DEPTH. PLACE NEW 1/2" LEVELING COURSE & 1-1/2" ASPHALT WEARING COURSE MATERIAL. THIS ASPHALT APPLICATION SHALL BE PLACED IN (2) TWO 12' WIDE RUNS TO REDUCE JOINTS. SEPARATION OF RUNS SHALL BE THE CENTERLINE OF ROAD.
- 2 LAYOUT AND PAINT (2) 4" WIDE DOUBLE PAINTED LINES. IN AREAS TO RECEIVE NEW ASPHALT PAVEMENT.
- 3 RE-PAINT ALL EXISTING TRAFFIC LINES TO VA ROADWAYS. INCLUDES CENTERLINES (2) DOUBLE YELLOW LINES, EDGE SINGLE WHITE LINES EACH SIDE OF ROAD, EXISTING HOLD LINES AT INTERSECTIONS AND SPLITS, HATCHED TRAFFIC PATTERNS AND MISC. SEPARATION LINES.
- 4 RESHAPE & REMOVE ERODED ROAD SHOULDER MATERIALS AND PLACE CLASS D RIPRAP STONE (10'W x 1000'L x 12" THICK AT LOCATIONS NOTED).

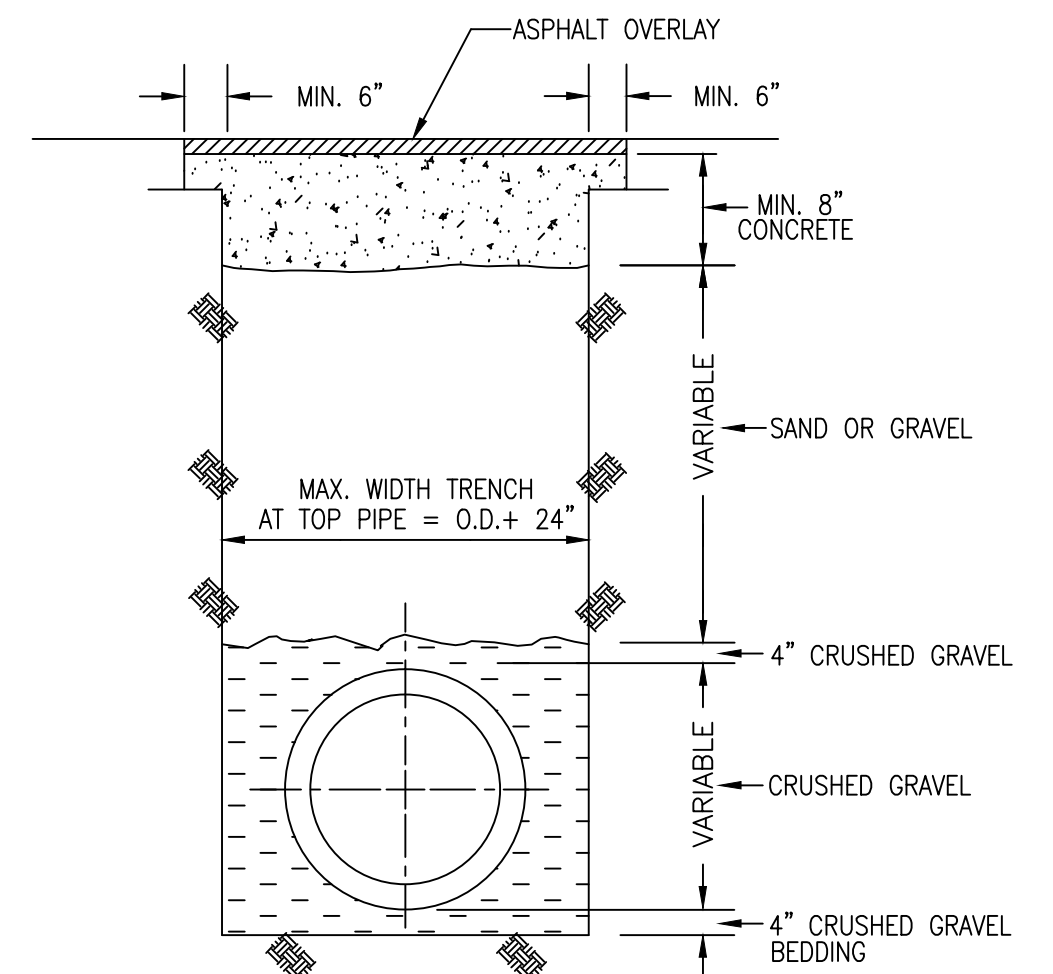

**WATERLINE
TRENCH DETAIL**

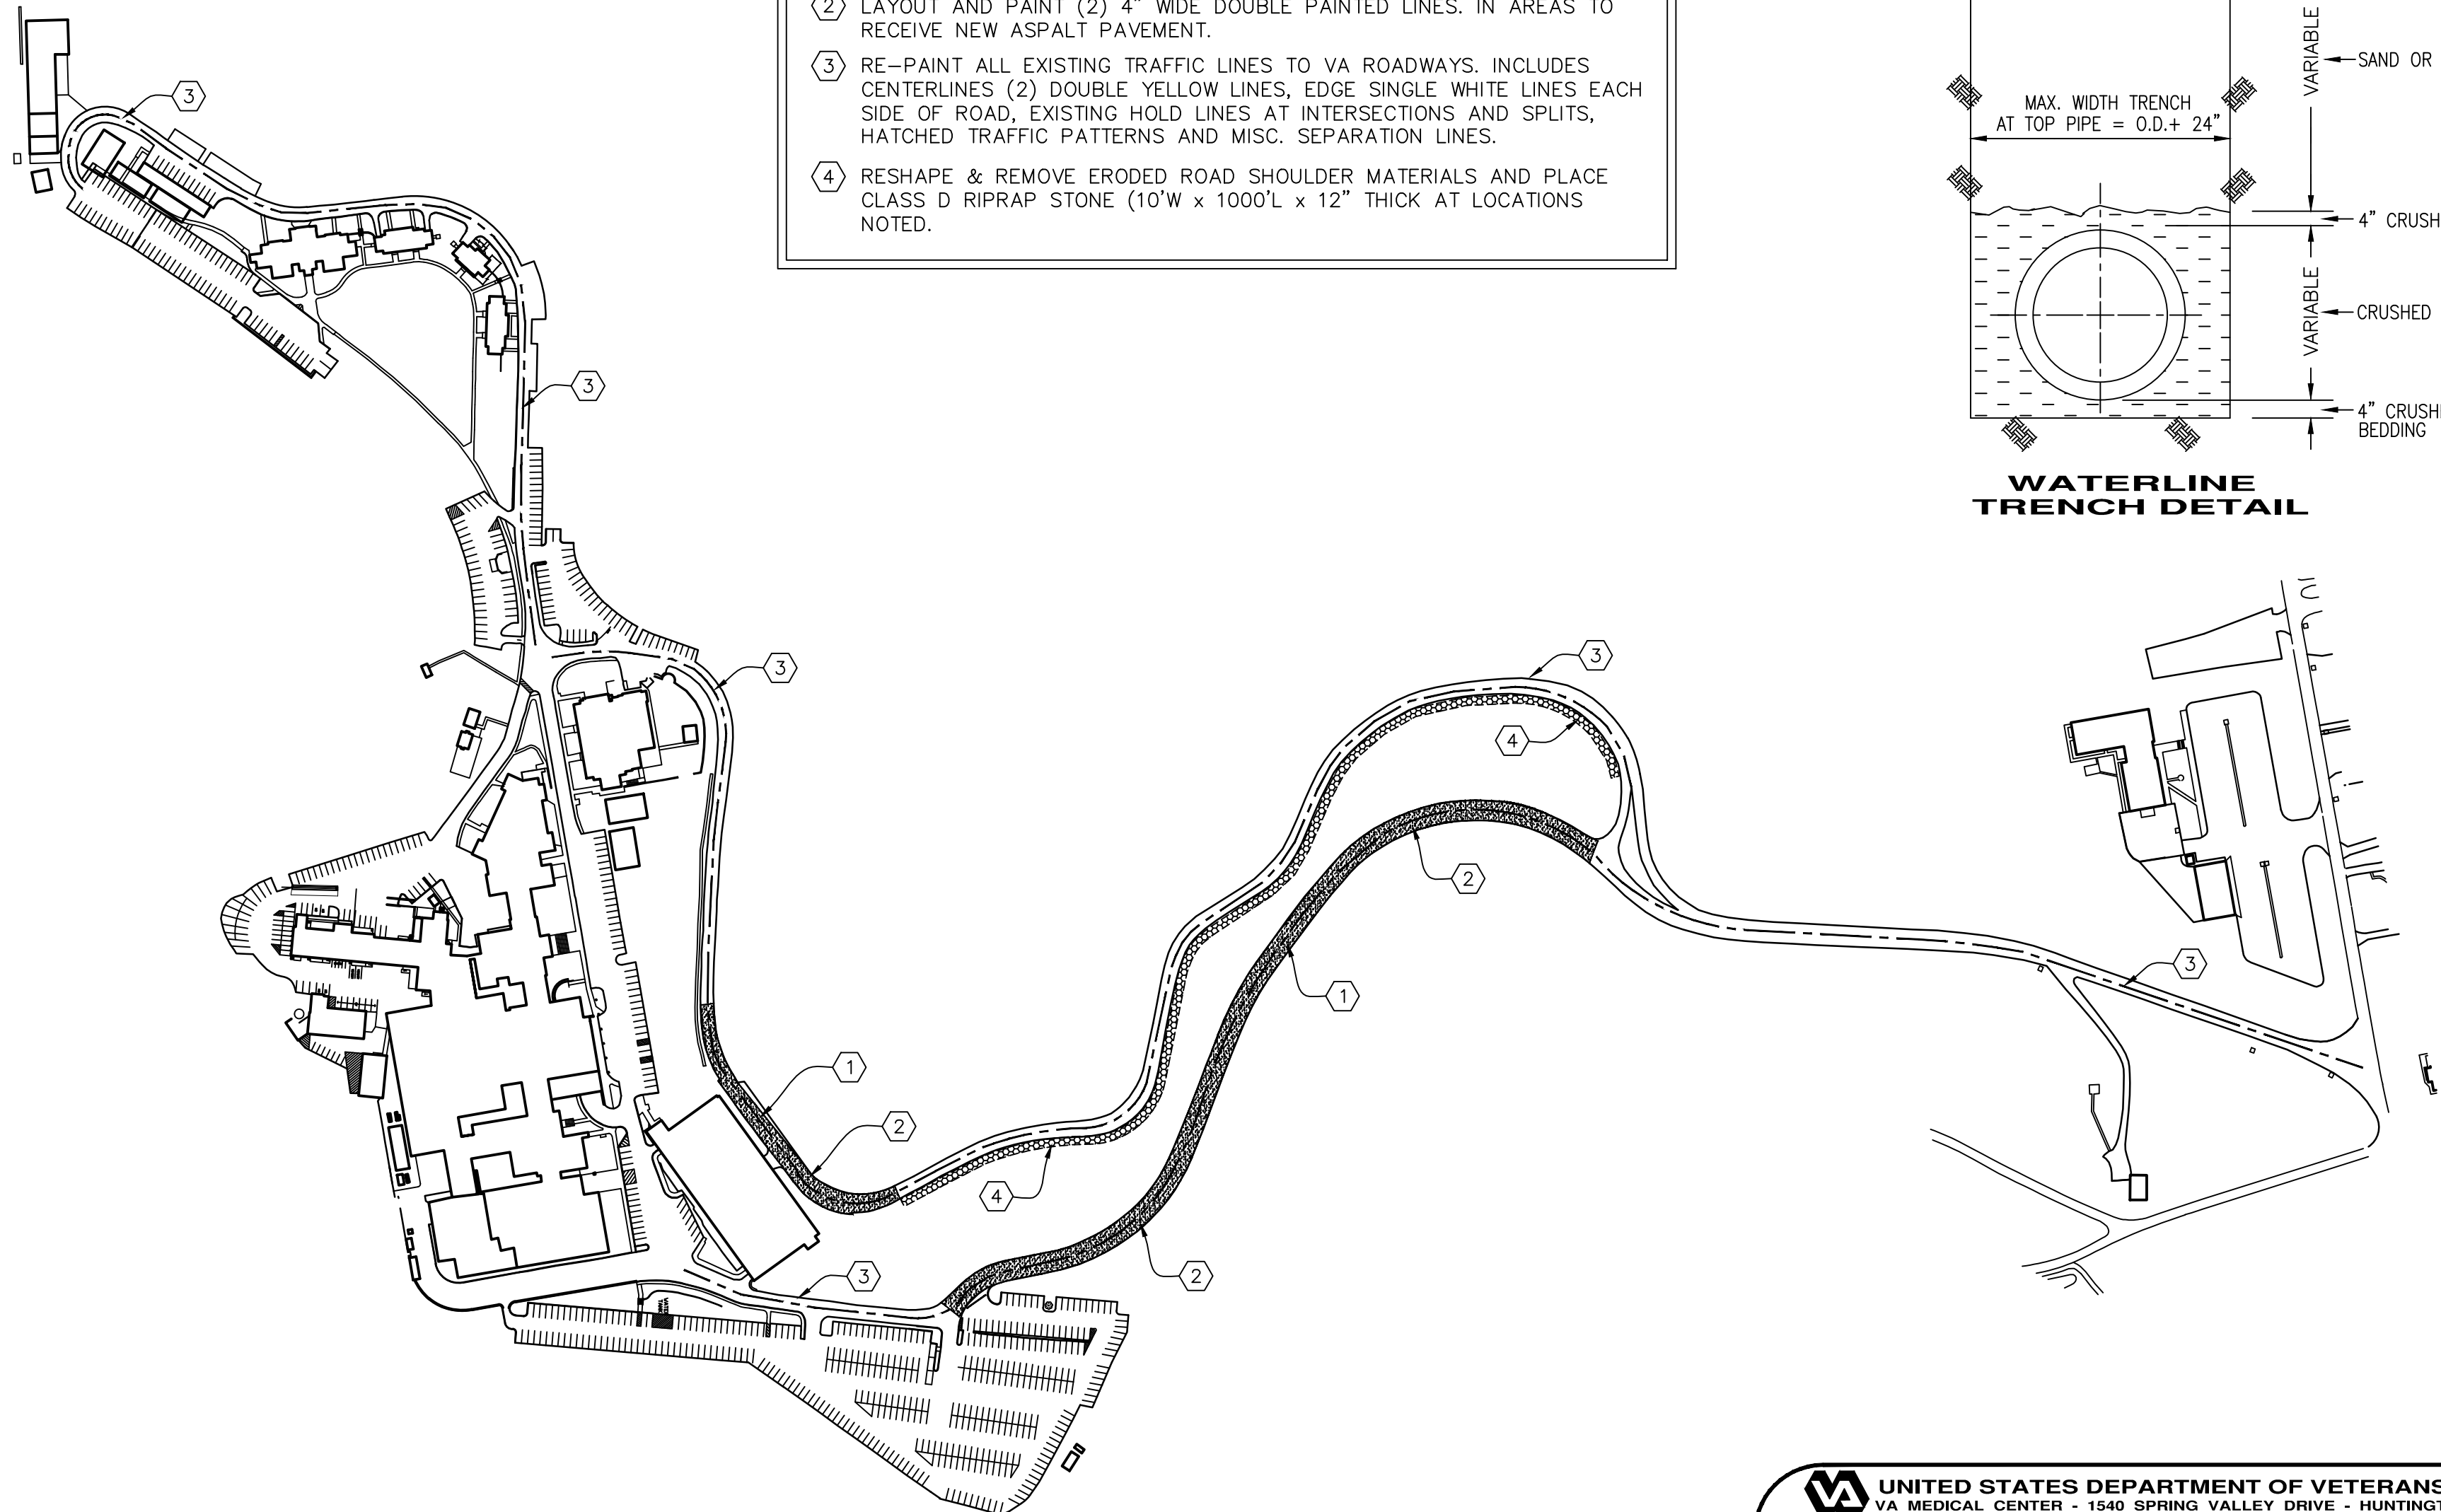

PAVEMENT RESURFACING & RIPRAP PLACEMENT

SCALE: 1" = 200'



UNITED STATES DEPARTMENT OF VETERANS AFFAIRS
VA MEDICAL CENTER - 1540 SPRING VALLEY DRIVE - HUNTINGTON WV 25704

DRAWING TITLE:		PROJECT TITLE:	
PAVEMENT RESURFACING RIPRAP STONE & PAINTING		RESURFACE ROADS & REPAIR WATER RUNOFF	
APPROVED:	BUILDING:	PROJECT NUMBER:	DRAWING NUMBER:
CHRIS ECKLES	-	12-106	C3
ASST. CHIEF, ENGINEERING			
APPROVED:	DRAWN:	DATE:	
JOHN KLIM	STEVE ELROD	APR '12	
CHIEF, ENGINEERING			