


**SITE 4
WASH BASIN / SEWER REPAIR
NEW CONCRETE PAD**

SCALE: 1" = 20'




CONSTRUCTION NOTES

- ① REMOVE EXIST. CONCRETE CURB, ASPHALT PVMT. & SOILS. PLACE NEW 40'L x 40'W x 6"D REINFORCED CONCRETE PAD AND CURB AS SHOWN. REINFORCE CONCRETE WITH 6x6x6 WWF. PLACE 1/2" EXPANSION MATERIAL WHERE ABUTS EXIST. CONCRETE. SEE CURB DETAIL THIS SHEET.
- ② SAWCUT & REMOVE CONCRETE WASH BASIN & EXIST. DRAIN CONNECTED TO EDGE OF LOADING DOCK. EXCAVATE DRAIN LINE & TRAP. (APPROX. 6 FEET BELOW GRADE) REPLACE DRAIN LINE WITH NEW 2" CAST IRON DRAIN AND TRAP & INSTALL NEW CLEAN-OUT. TIE BACK TO SANITARY SEWER. FORM DISTURBED CONCRETE AND INSTALL NEW WASH BASIN.
- ③ EXCAVATE & REPLACE APPROX. 85 L.F. EXIST. 6" P.E. WATERLINE TO FIRE HYDRANT. WORK INCLUDES REPLACING ONE EXISTING CONCRETE INCASED VALVE & BLOCK AND INSTALLING NEW VALVES AT THE NEW TIE-IN POINTS. SEE WATERLINE DETAIL SHEET C3 FOR TRENCH PREPARATION & INSTALLATION.
- ④ SAWCUT ASPHALT PAVEMENT AREAS (FIELD VERIFY) & REMOVE ALL DAMAGED (ALLIGATOR CRACKED & SCALED PAVEMENTS DAMAGED BY WATERLINE LEAK IN ADDITION TO REPLACING WATERLINE. REPLACE DAMAGED ASPHALT PER PAVEMENT DETAIL, SHEET C3.
- ⑤ MACHINE MILL AS NEEDED EXIST. ASPHALT 1/2" DEPTH. PLACE FLUSH AND SMOOTH WITH 1-1/2" ASPHALT WEARING COURSE MATERIAL.
- ⑥ LAYOUT & PAINT 2 NEW 4"W x 20'L PARKING STRIPES WITH 3' TALL LETTERING "POLICE ONLY" CENTERED IN THE SPACE. COR MUST APPROVE LAYOUT PRIOR TO APPLYING PAINT.
- ⑦ LAYOUT & PAINT NEW 4"W STRIPES WITH 3' TALL LETTERING "PICK UP & DROP OFF ONLY" CENTERED IN THE SPACE. COR MUST APPROVE LAYOUT PRIOR TO APPLYING PAINT.
- ⑧ RE-PAINT EXISTING 4"W STRIPES FOR PEDESTRIAN CROSS WALKS & PARKING SPACES. MATCH EXISTING COLORS.
- ⑨ LAYOUT & PAINT NEW 4"W TRAFFIC DIVIDE LINE. APPROX 800L.F. COR MUST APPROVE LAYOUT PRIOR TO APPLYING PAINT.

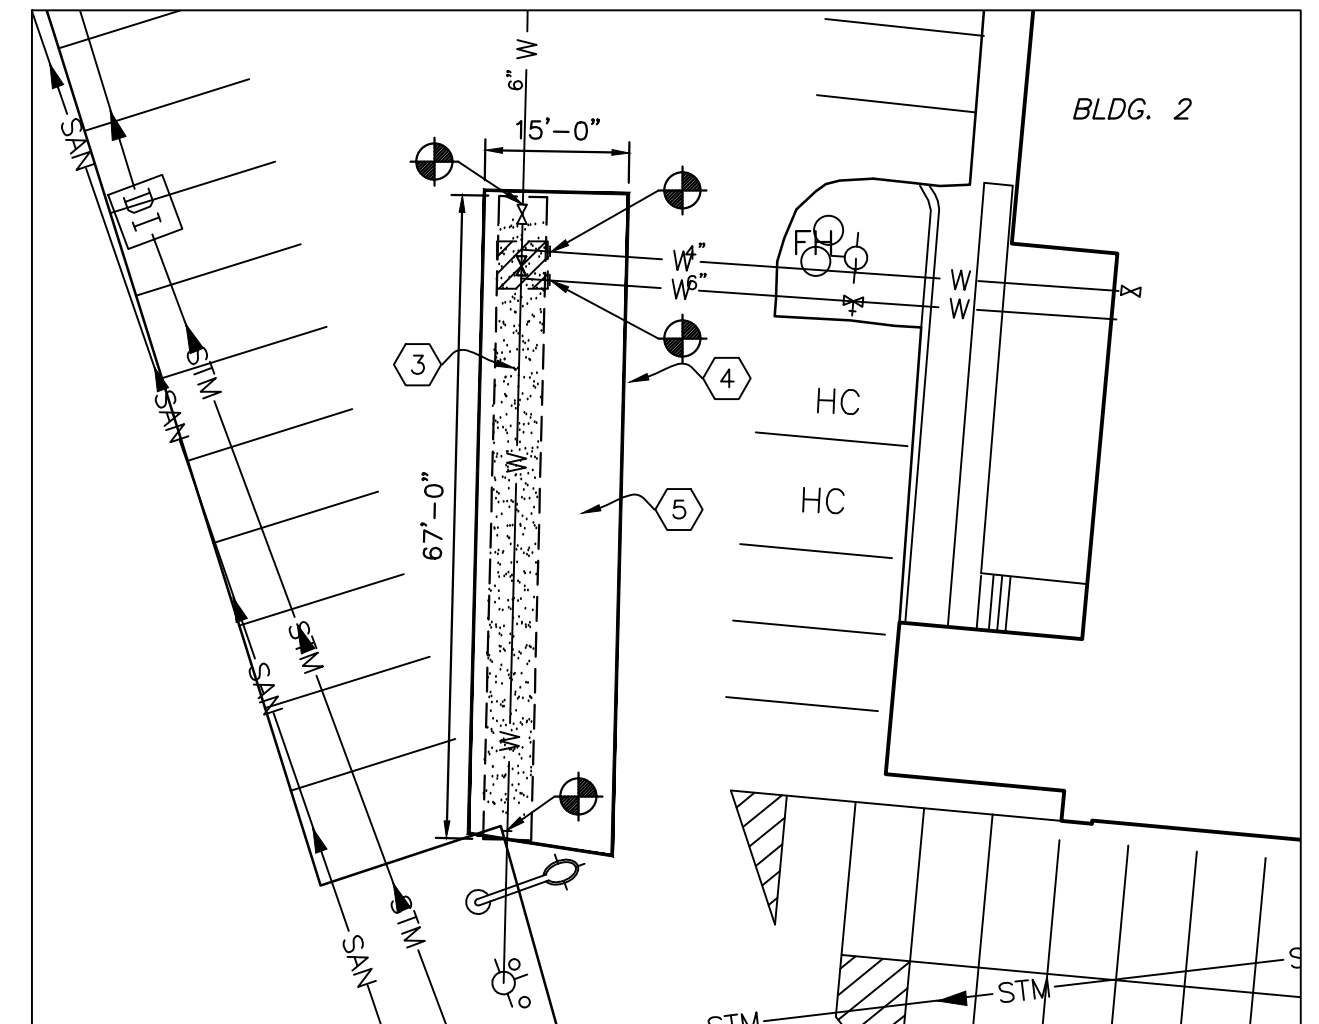


**SITE 5
REPLACE WATERLINE
IN FRONT OF BLDG. 2**

SCALE: 1" = 20'

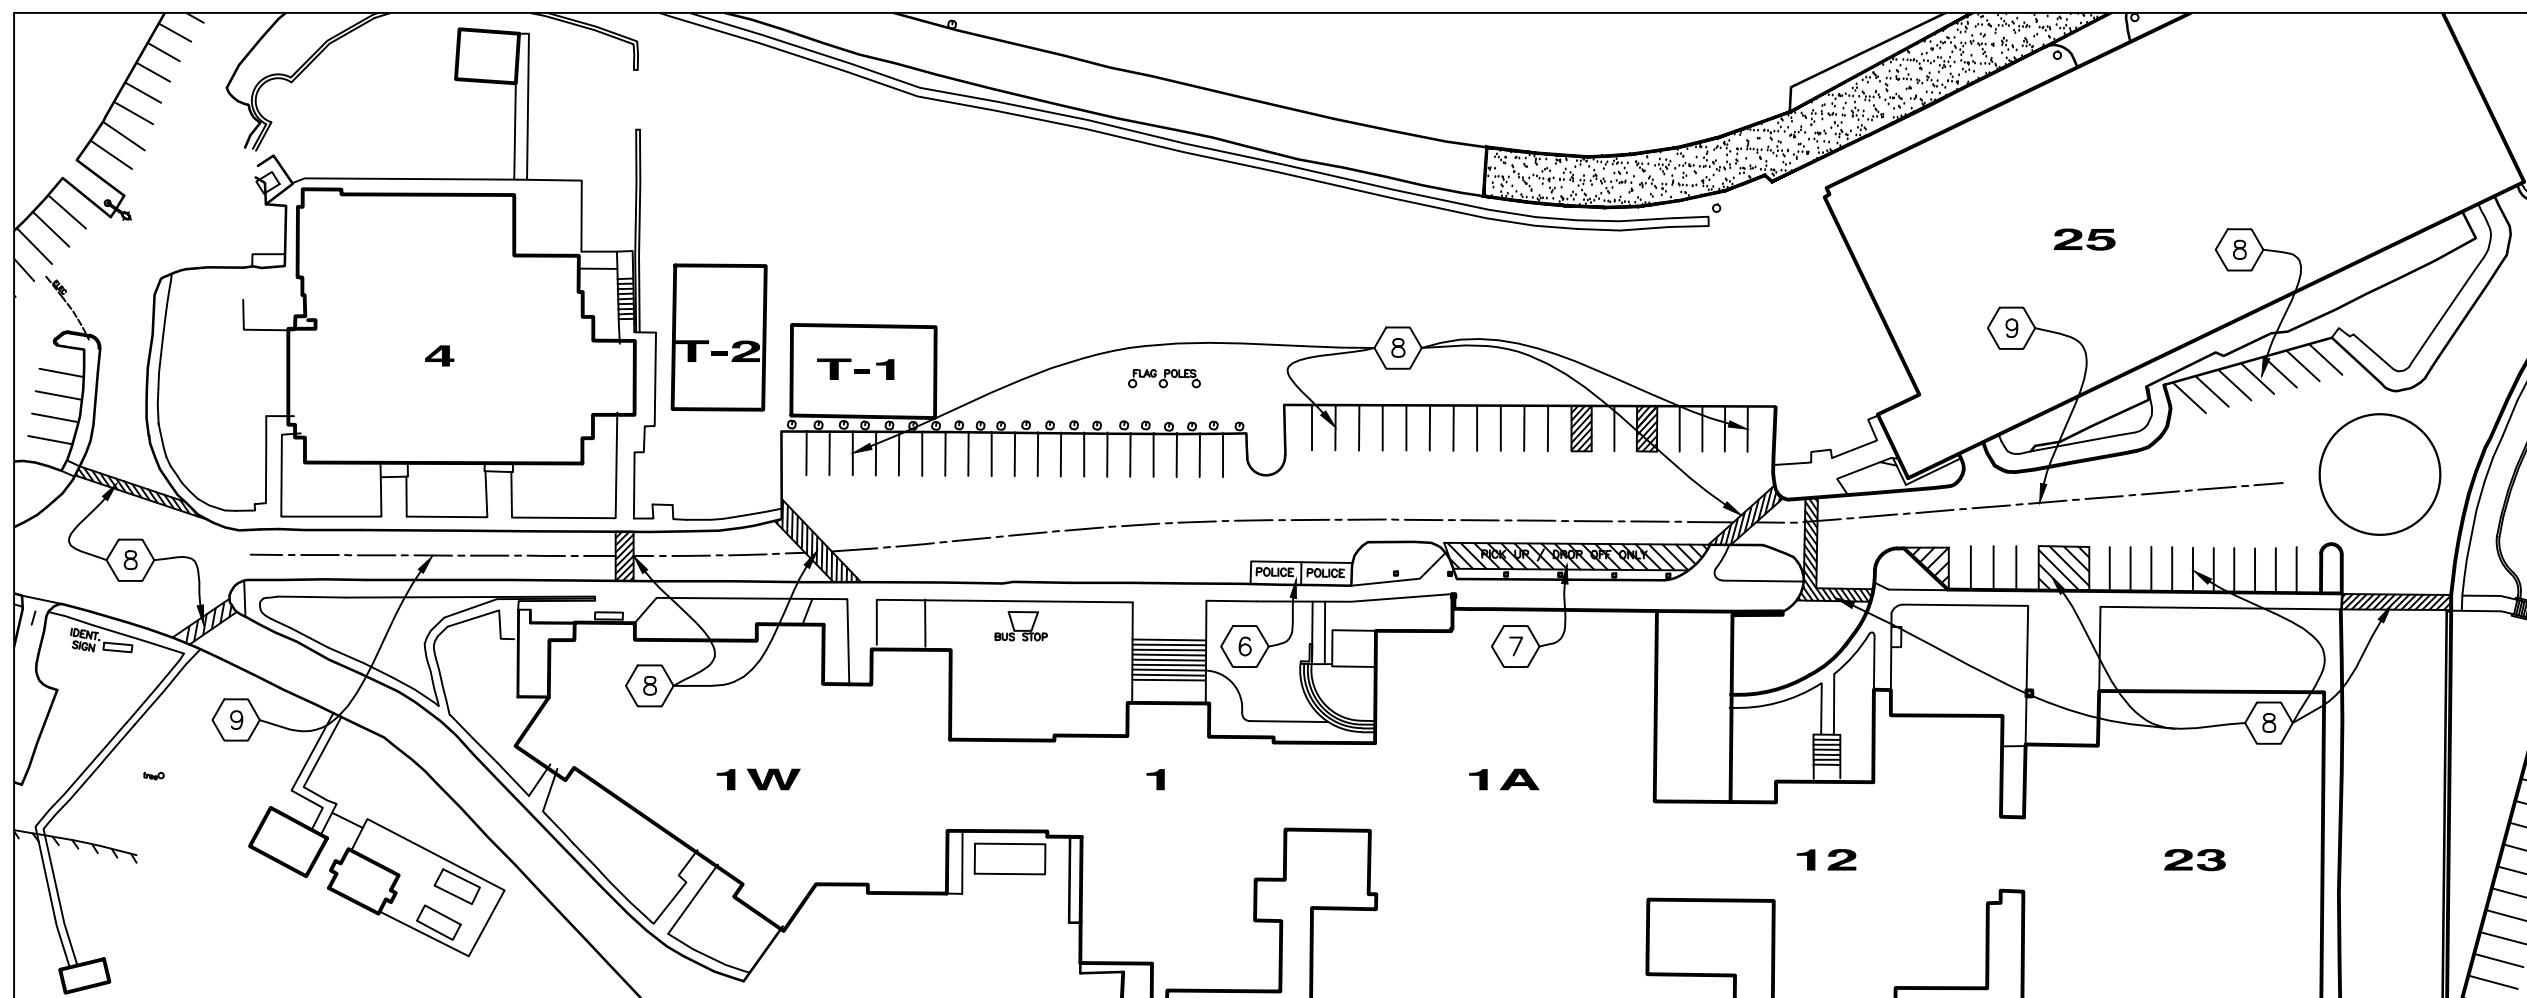

**SITE 6
PAINT TRAFFIC LINES
& CROSS WALKS**

SCALE: 1" = 50'

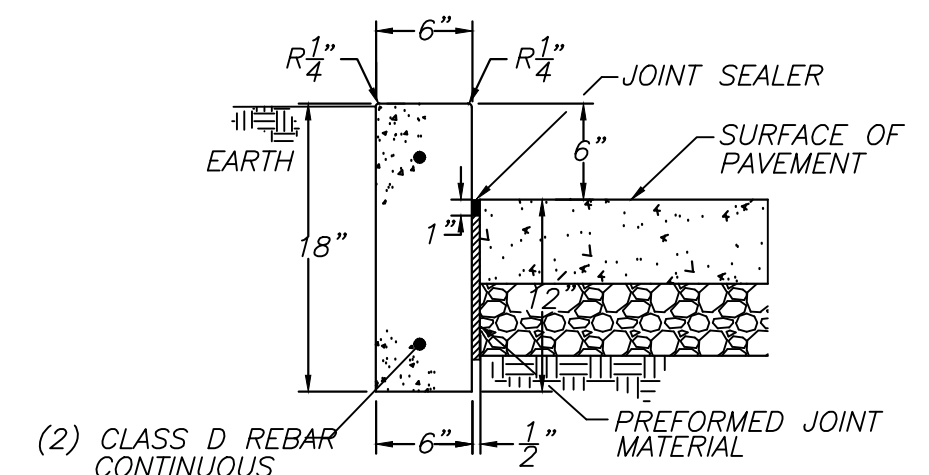

**CONCRETE
CURB DETAIL**

SCALE: 1" = 1'-0"



UNITED STATES DEPARTMENT OF VETERANS AFFAIRS
VA MEDICAL CENTER - 1540 SPRING VALLEY DRIVE - HUNTINGTON WV 25704

DRAWING TITLE:		PROJECT TITLE:	
WATER & SEWER REPAIRS TRAFFIC & CROSS WALKS		RESURFACE ROADS & REPAIR WATER RUNOFF	
APPROVED:		BUILDING:	PROJECT NUMBER:
CHRIS ECKLES		-	12-106
ASST. CHIEF, ENGINEERING			
APPROVED:		DRAWN:	DATE:
JOHN KLIM		STEVE ELROD	APR '12
CHIEF, ENGINEERING			

C2