




three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
one quarter inch = one foot
three eighths inch = one foot
one eighth inch = one foot

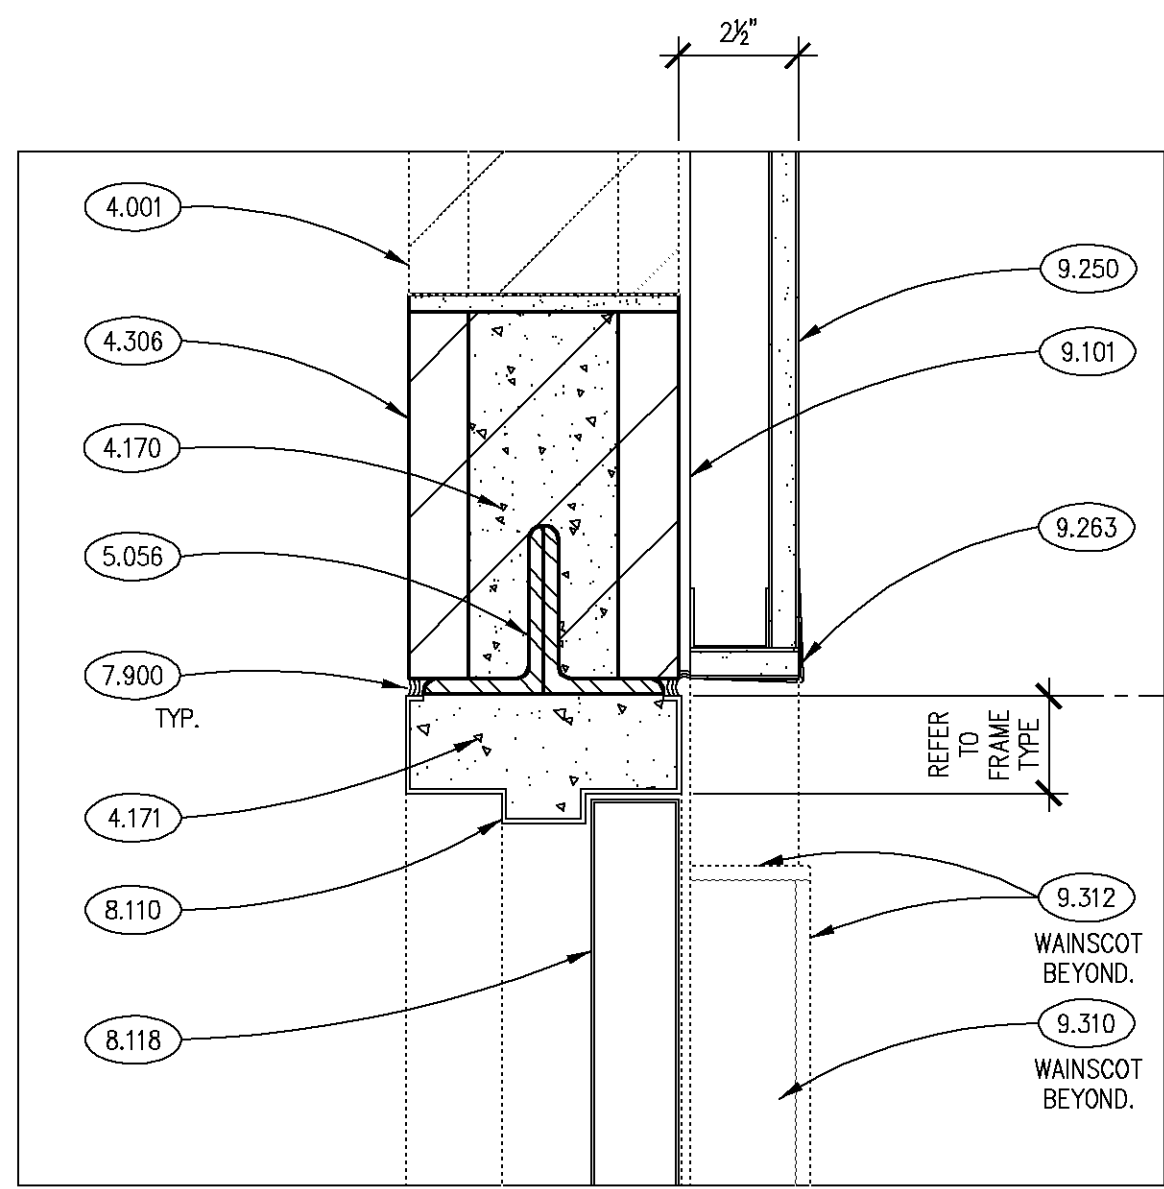


1 DETAIL
SCALE: 3" = 1'-0"

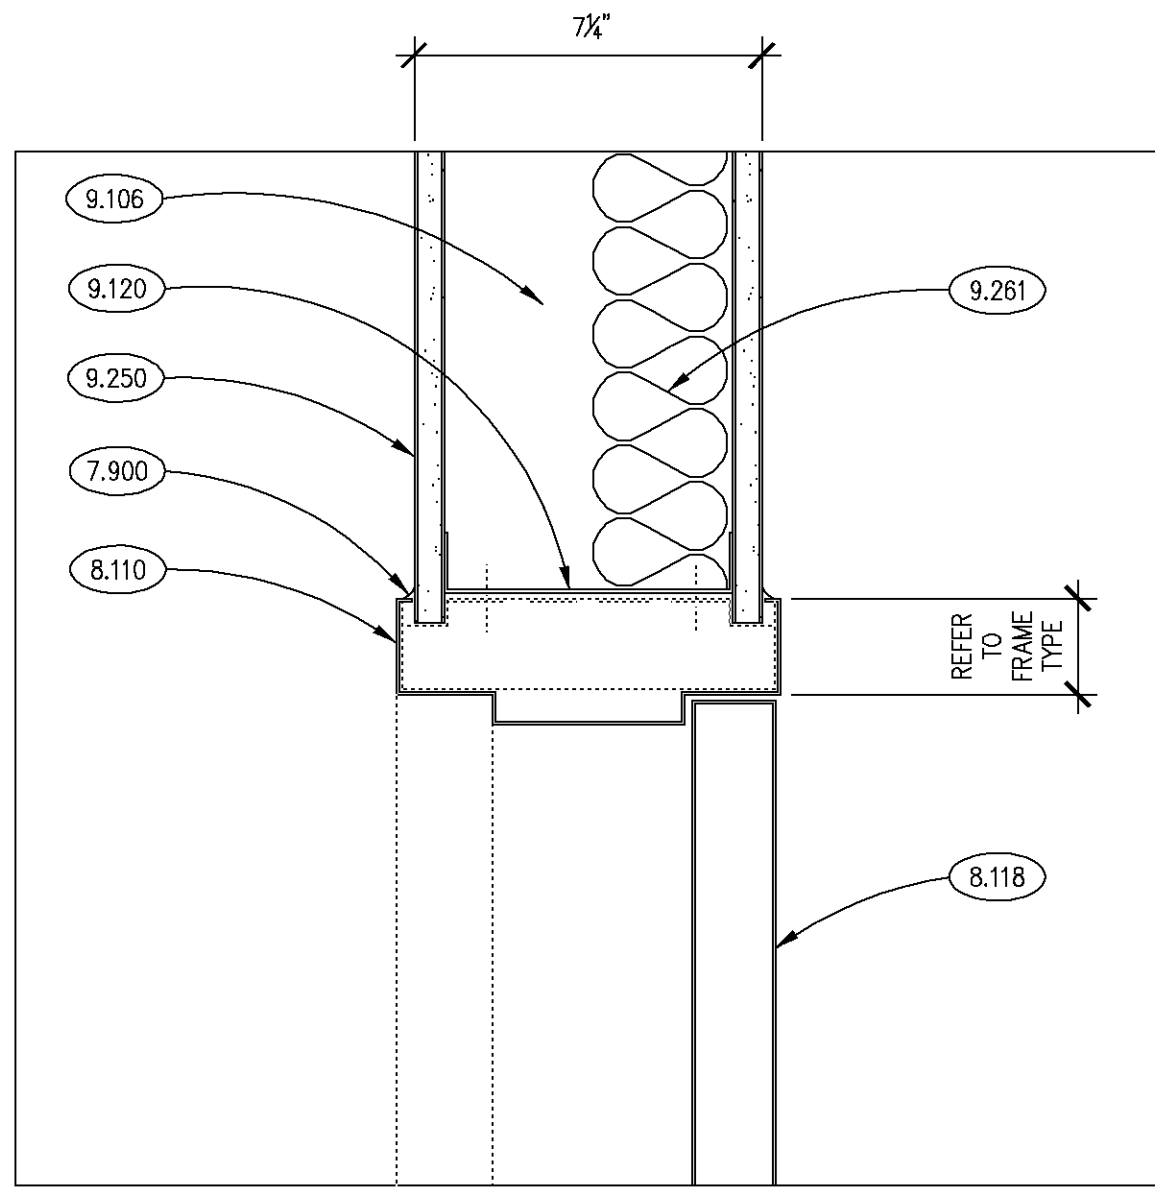


2 DETAIL
SCALE: 3" = 1'-0"

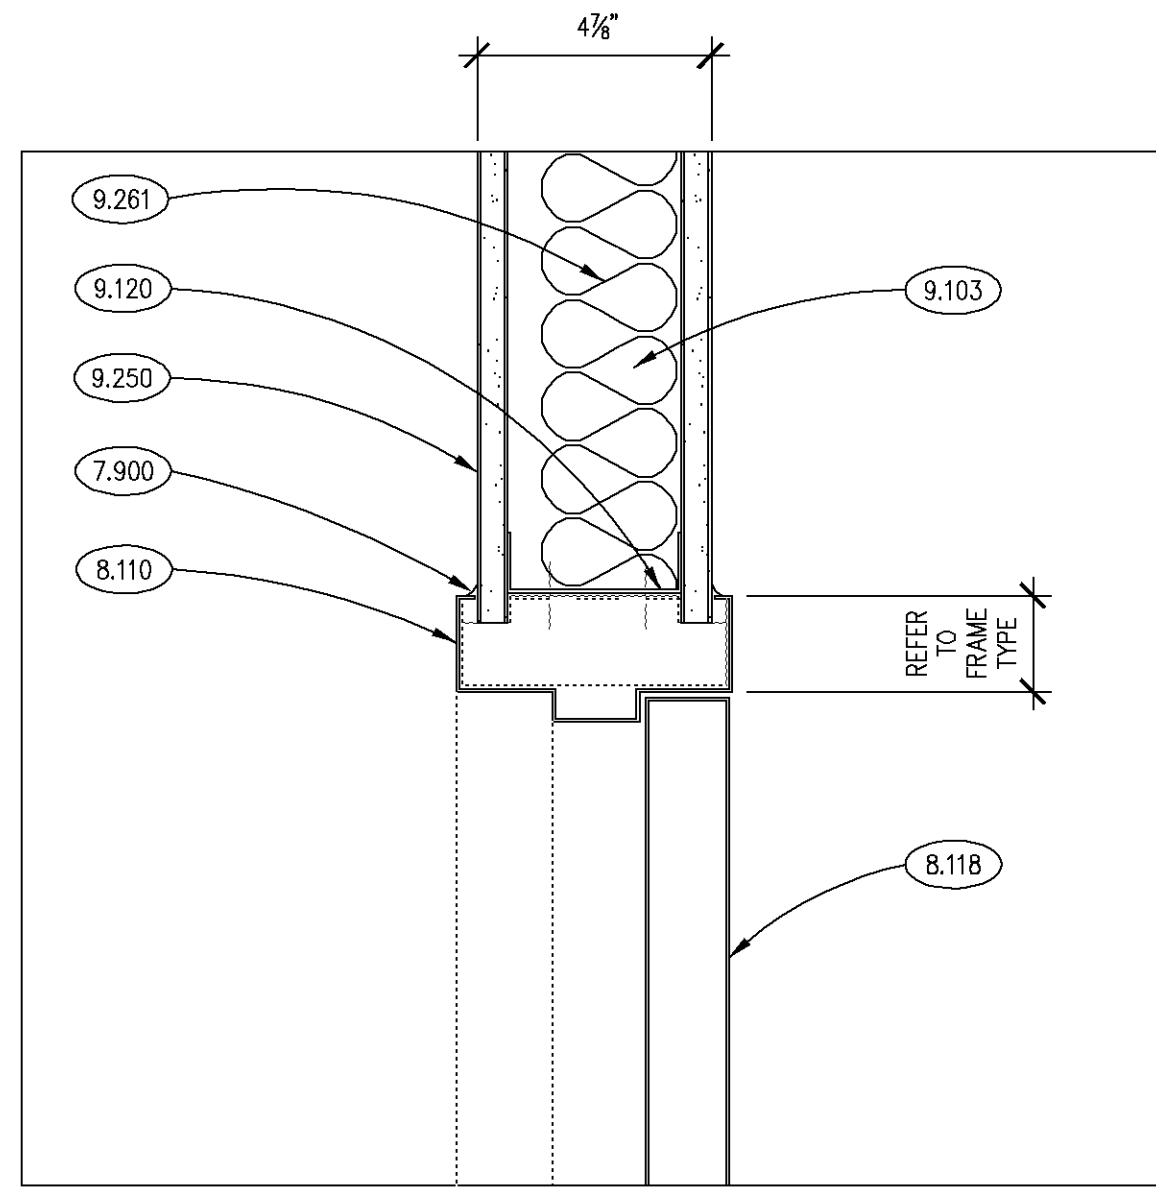


3 DETAIL
SCALE: 3" = 1'-0"

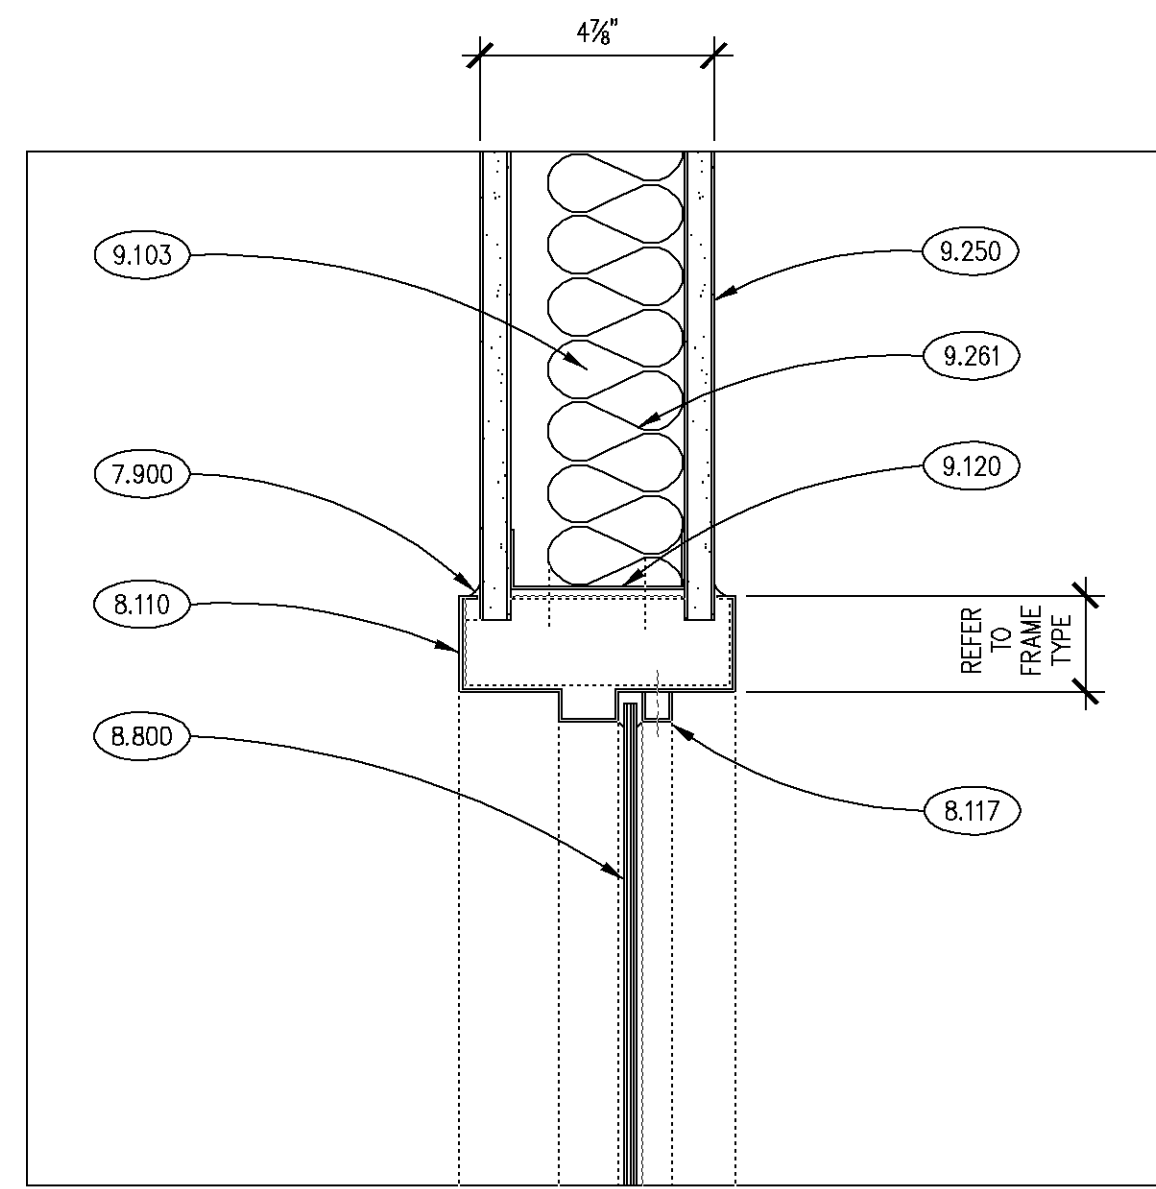


4 DETAIL
SCALE: 3" = 1'-0"

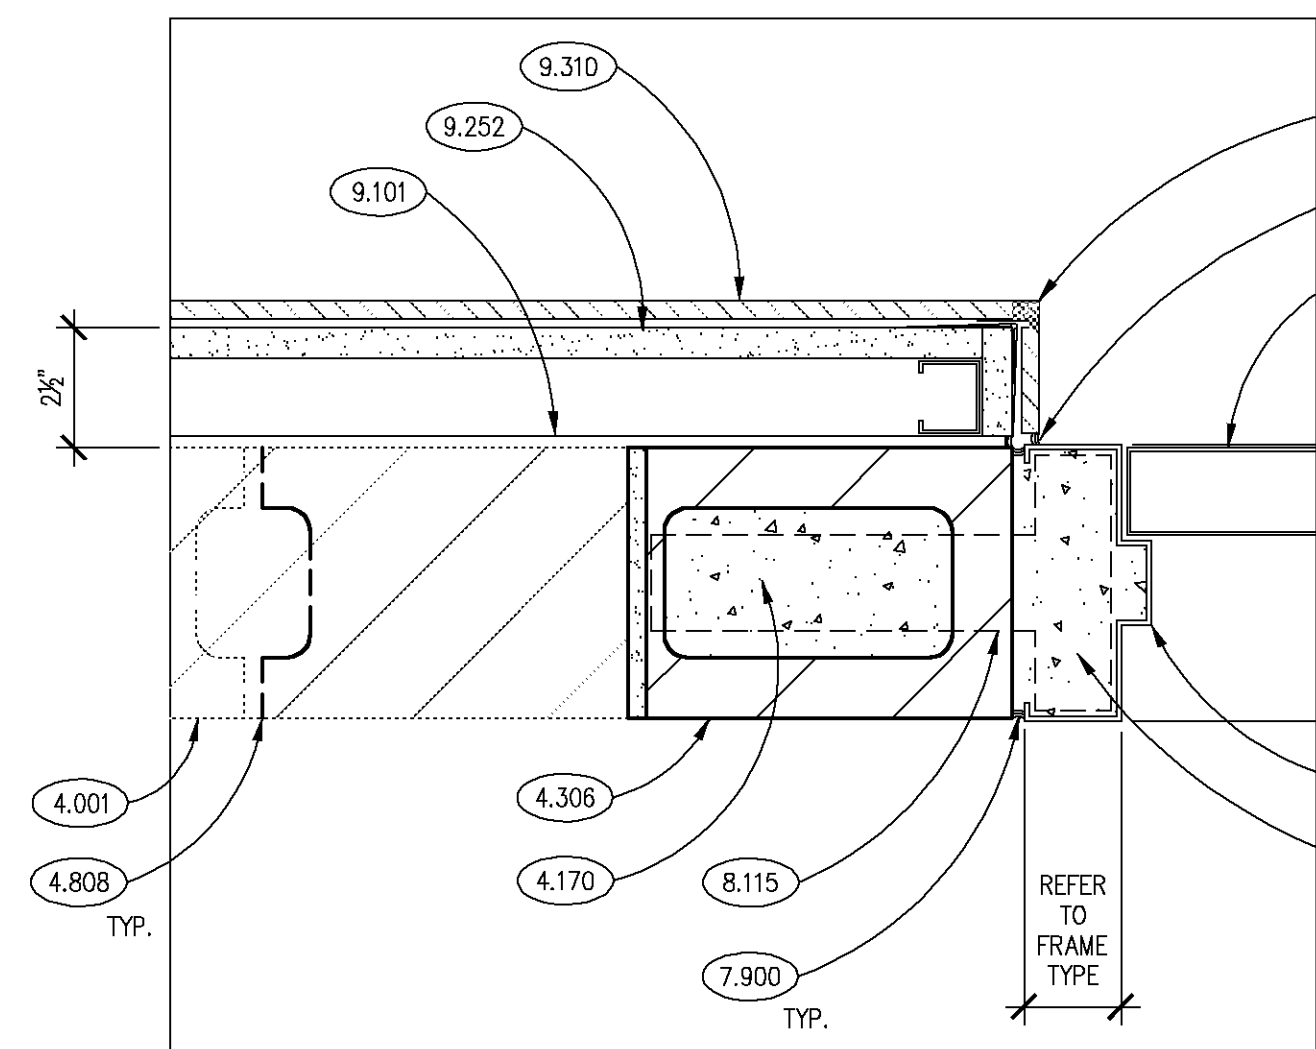


5 DETAIL
SCALE: 3" = 1'-0"

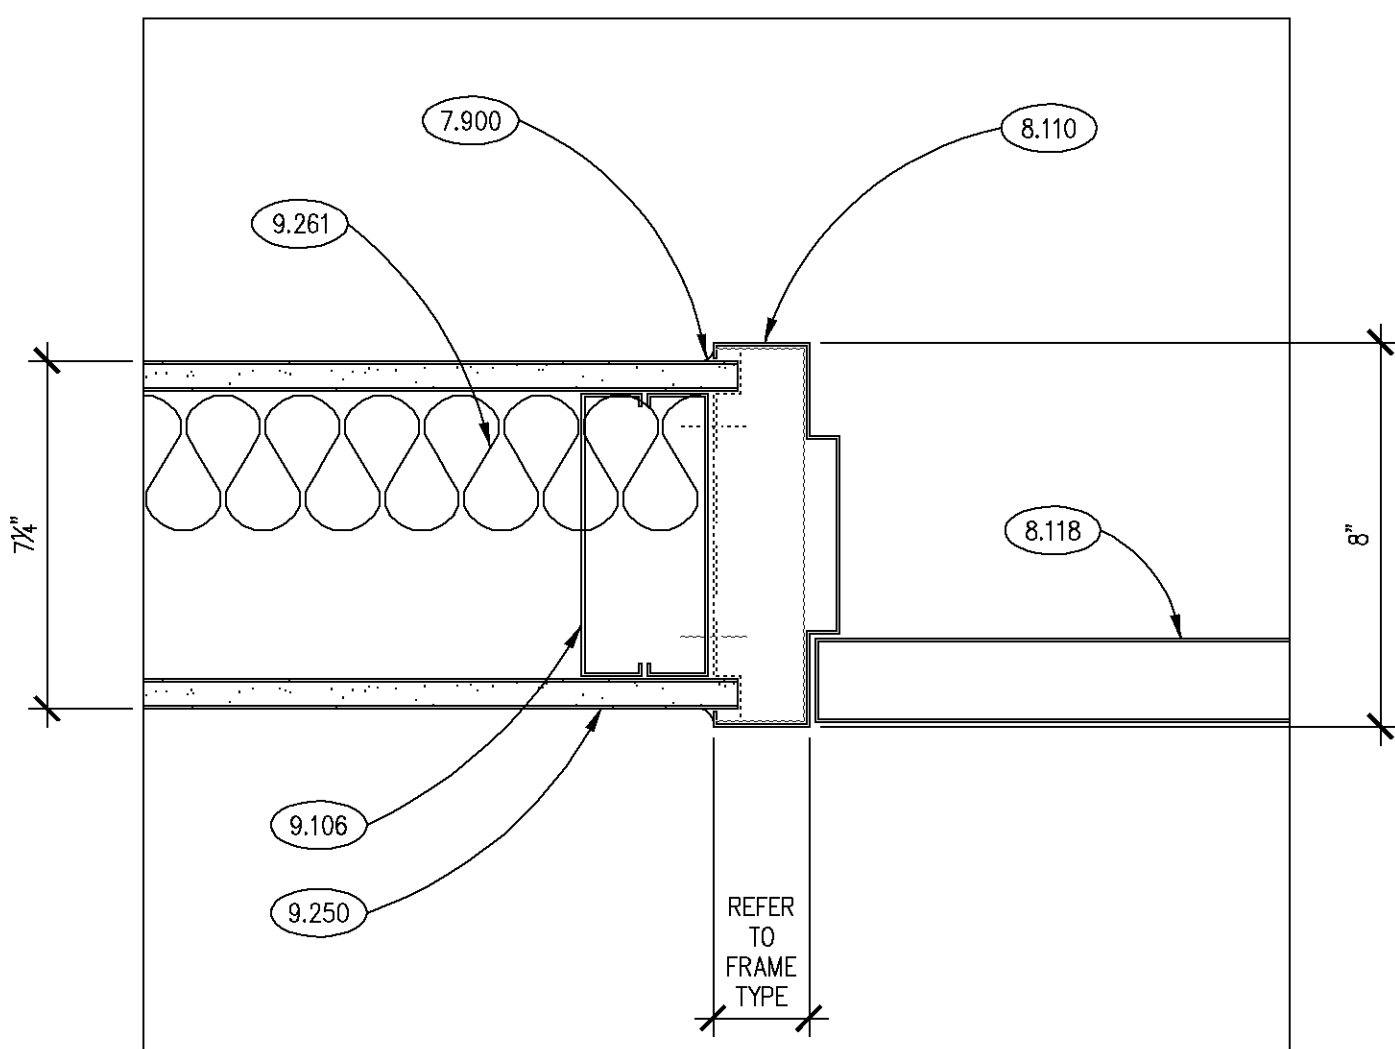


6 DETAIL
SCALE: 3" = 1'-0"

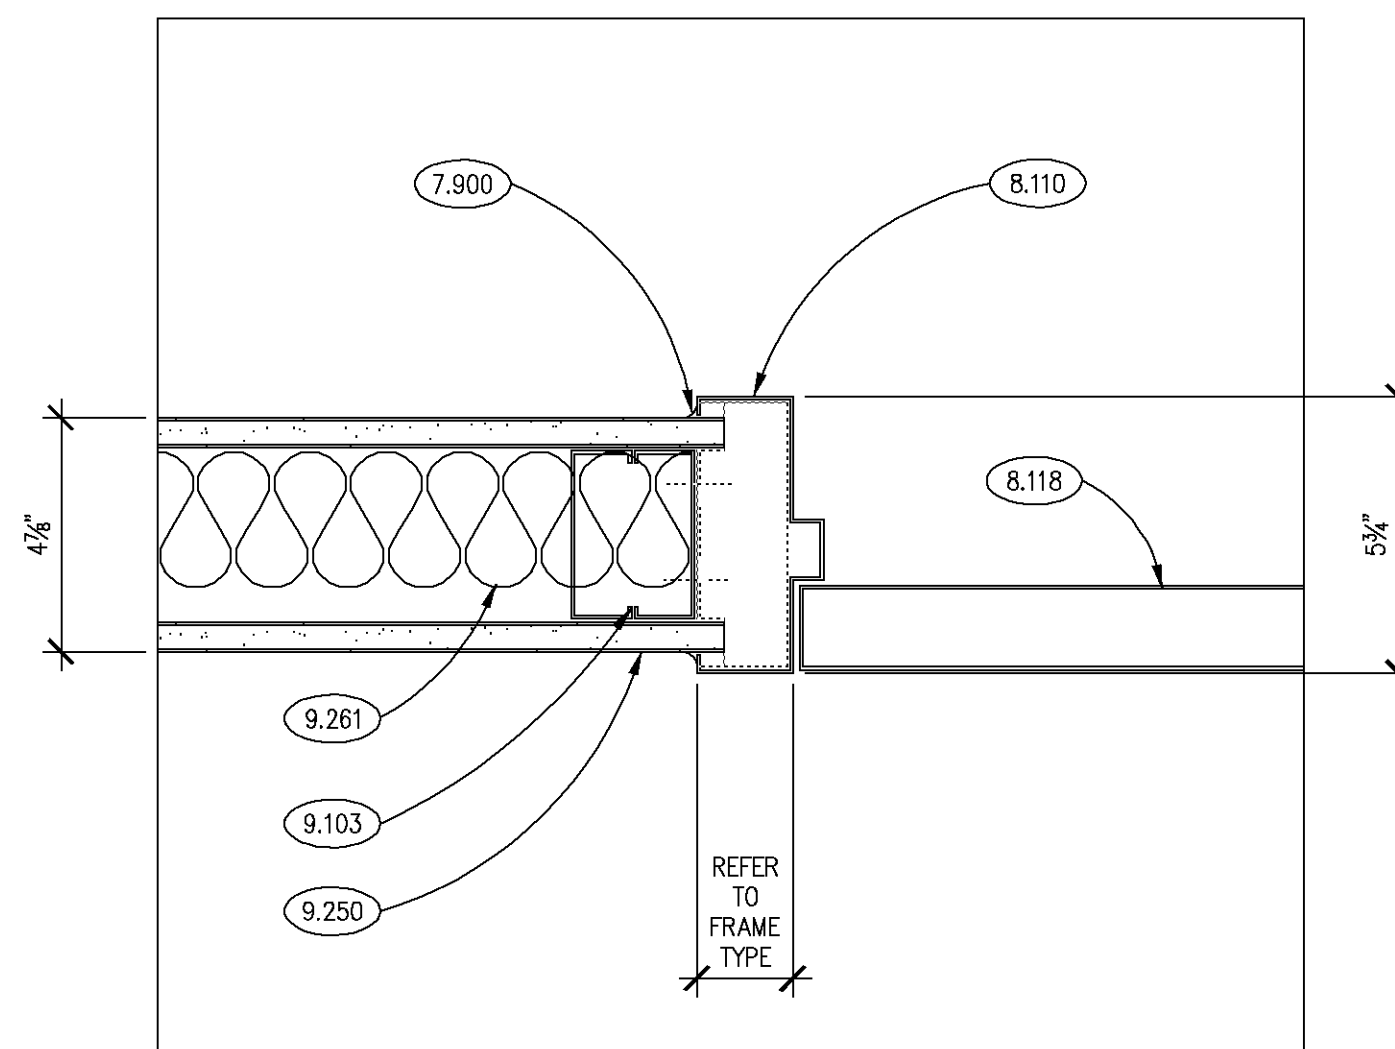


7 DETAIL
SCALE: 3" = 1'-0"

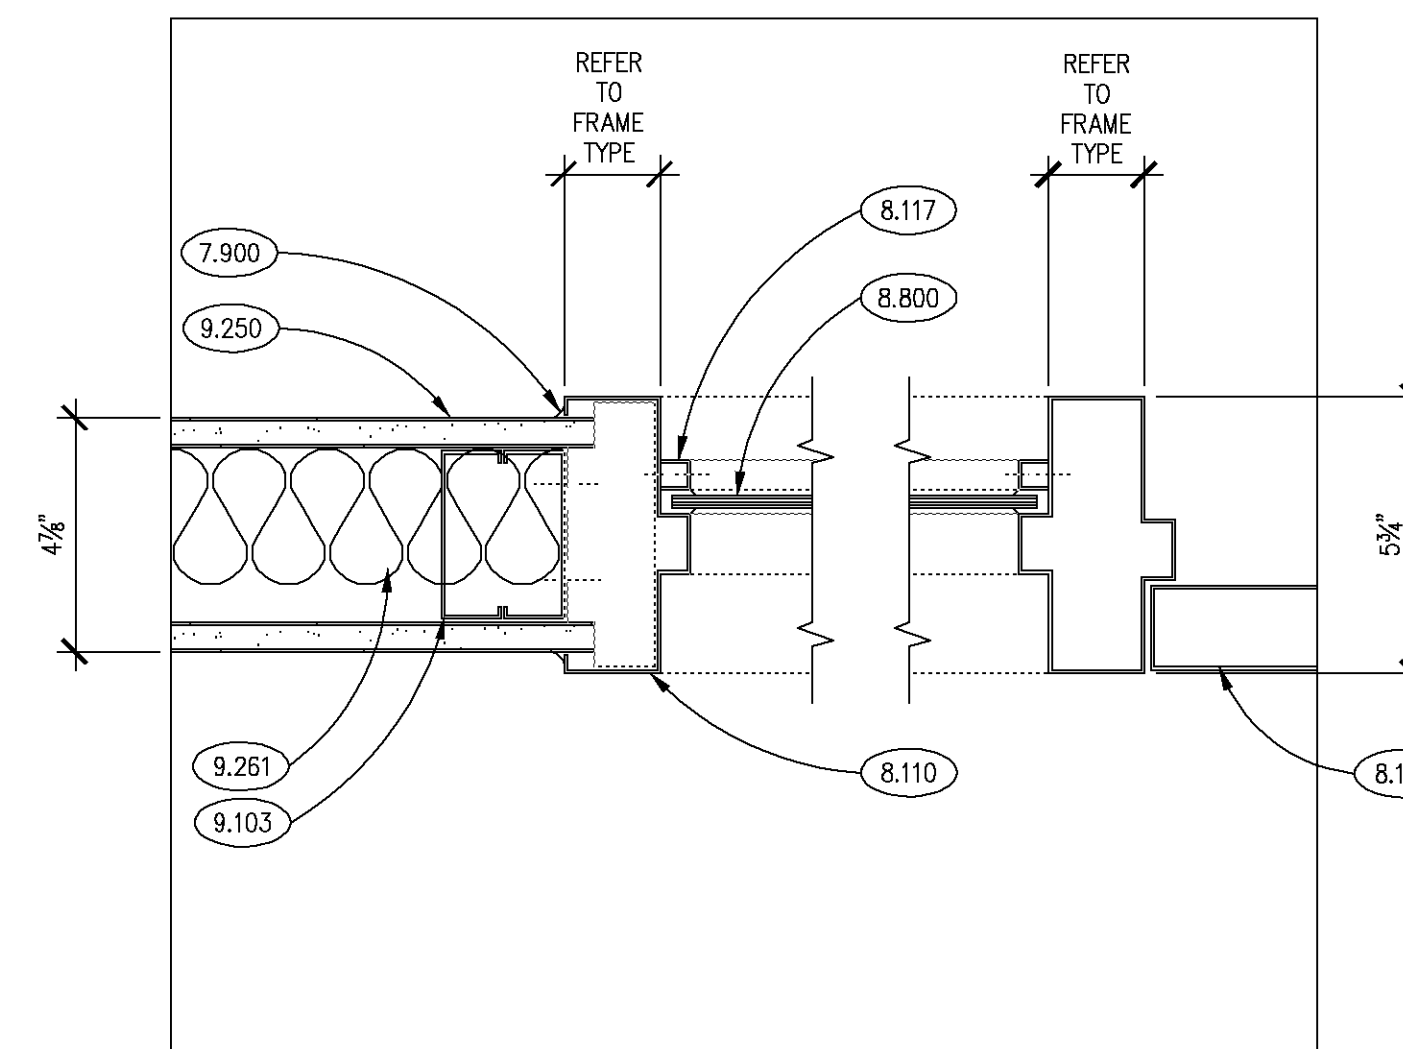


8 DETAIL
SCALE: 3" = 1'-0"

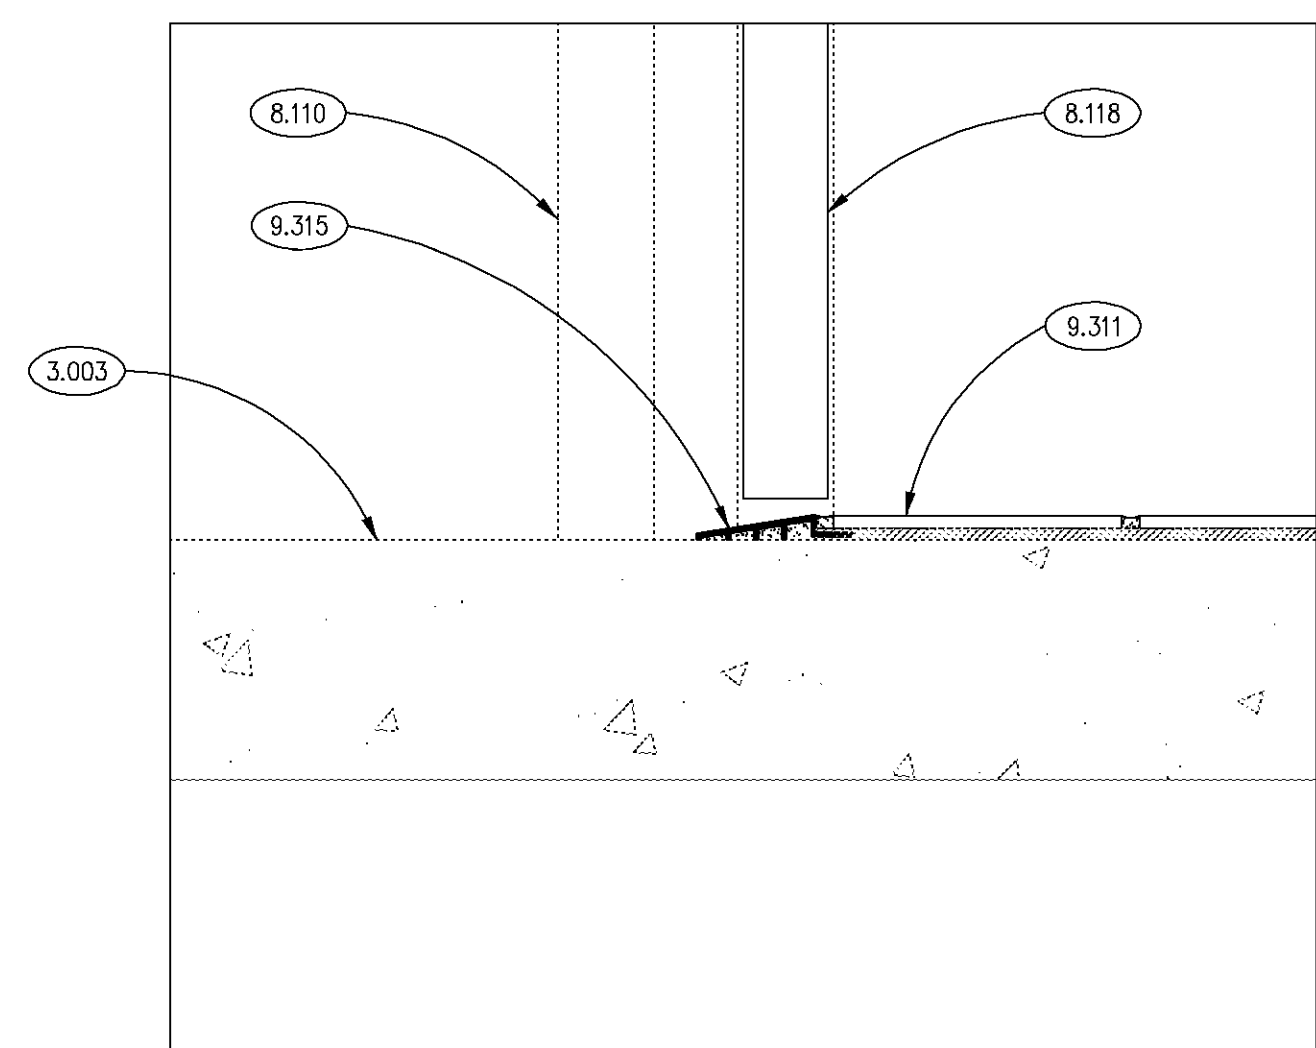

9 DETAIL
SCALE: 3" = 1'-0"

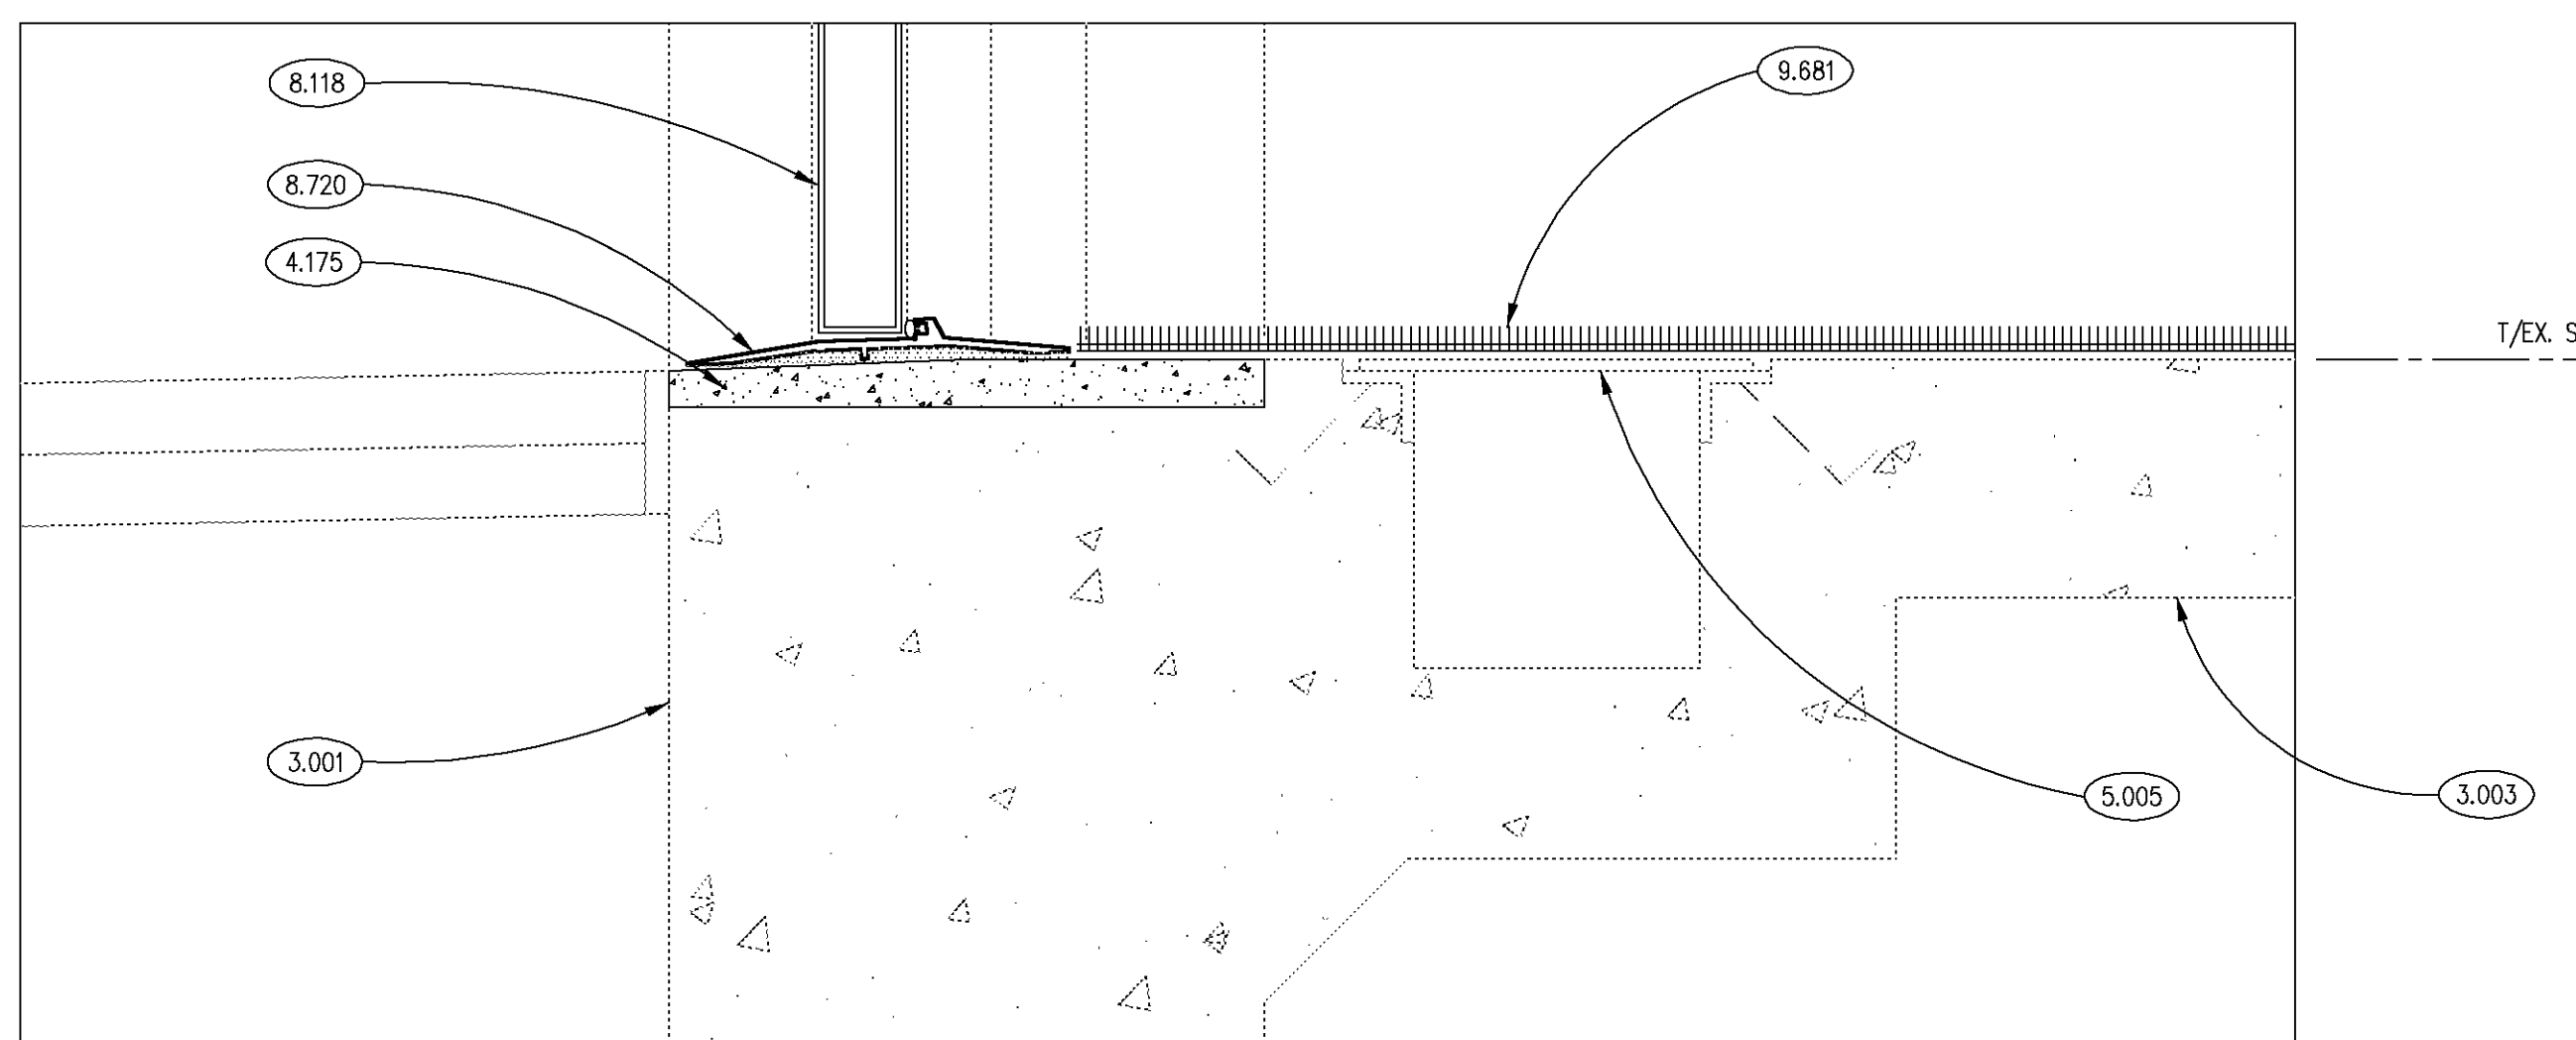

10 DETAIL
SCALE: 3" = 1'-0"

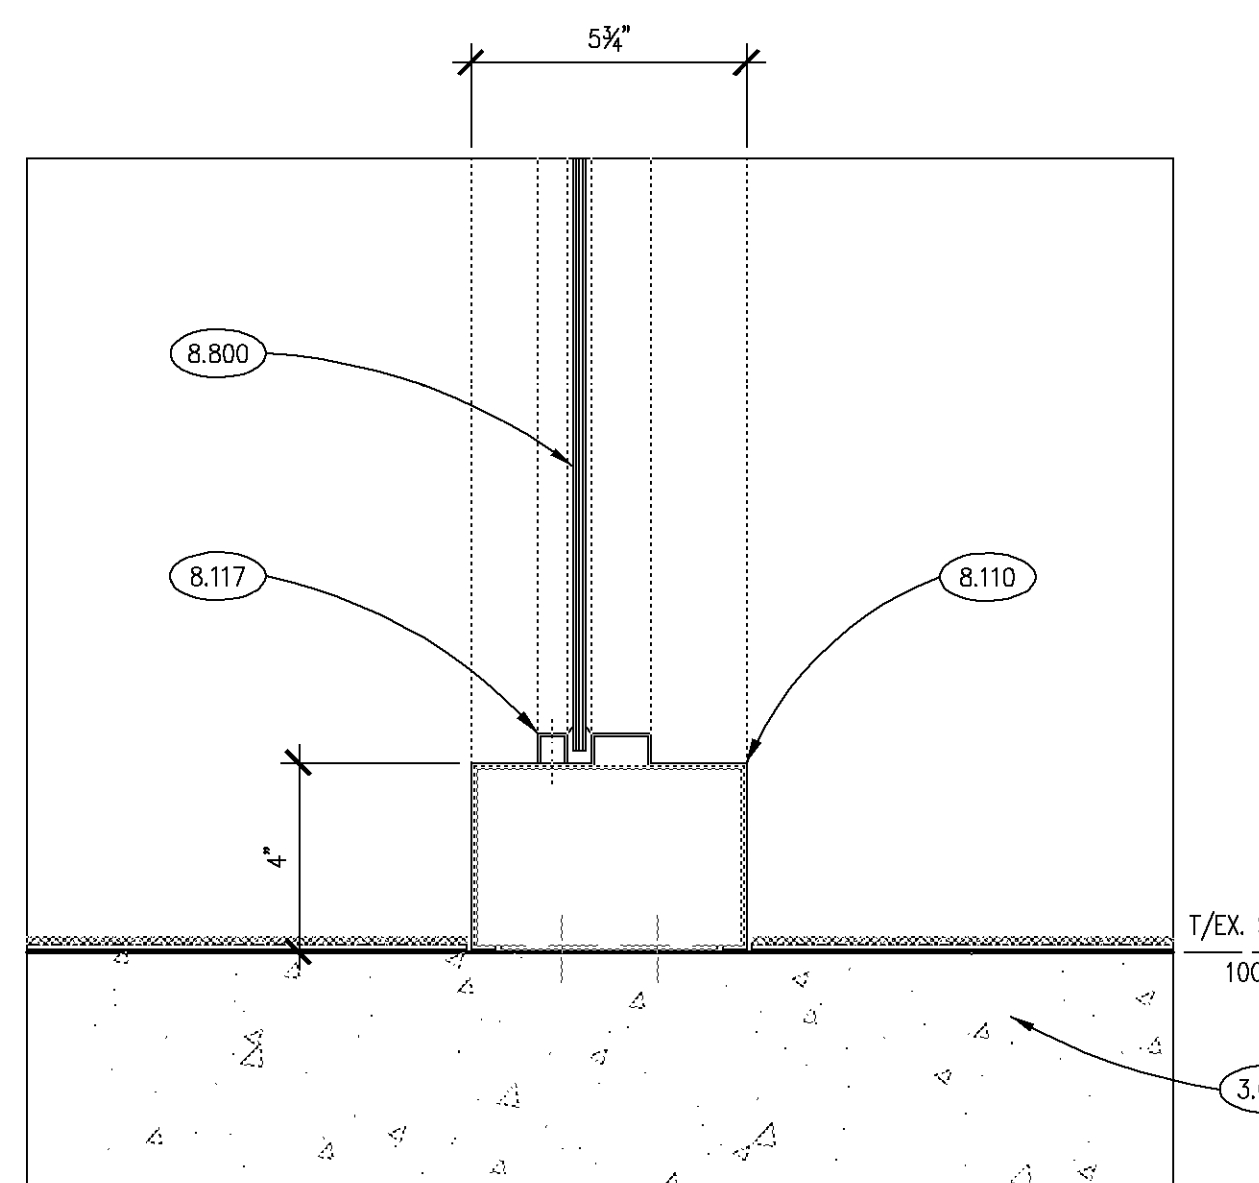

11 DETAIL
SCALE: 3" = 1'-0"

KEYNOTES

- EXISTING CONCRETE FOUNDATION WALL.
- EXISTING CONCRETE SLAB.
- EXISTING MASONRY WALL.
- MASONRY GROUT: CONTINUOUS GROUTED SOLID MASONRY COURSES. REFER TO SPECIFICATIONS.
- MASONRY GROUT: GROUT DOOR FRAME SOLID.
- MASONRY GROUT: FILL EXISTING RECESS IN CONCRETE SLAB TO BRING NEW DOOR THRESHOLD UP TO FLOOR LEVEL.
- CONCRETE UNIT MASONRY: 6" (NOM.) THK.; MATCH COURSING, BOND AND TYPE.
- MASONRY ASSEMBLY: TOOTH NEW MASONRY INTO EXISTING.
- EXISTING PIPE TRENCH COVER; STEEL PLATE.
- METAL FABRICATION: STEEL LINTEL; (2) - L3 1/2" x 2 1/2" x 7/16" (LLV) WITH 4" BEARING AT EA. END TYPICAL.
- JOINT SEALANT: REFER TO SCHEDULE; PROVIDE BACKER ROD OR BOND BREAKER.
- STEEL DOOR FRAME: REFER TO DOOR, FRAME AND BORROWED LIGHT SCHEDULE.
- STEEL FRAME ACCESSORY: DOOR FRAME ANCHORS (PROVIDE AT JAMBS ONLY).
- STEEL FRAME ACCESSORY: GLAZING STOP.
- DOOR: REFER TO DOOR AND FRAME SCHEDULE.
- DOOR THRESHOLD: ALUMINUM, REFER TO SPECIFICATIONS.
- GLAZING: REFER TO DOOR/FRAME/WINDOW SCHEDULES FOR TYPE.
- METAL STUD FRAMING: 1-5/8" STUD; 16" O.C. SPACING; 20 GAUGE UNLESS NOTED OTHERWISE; ANCHORAGE TO SUIT APPLICATION.
- METAL STUD FRAMING: 3-5/8" STUD; 16" O.C. SPACING; 20 GAUGE UNLESS NOTED OTHERWISE; ANCHORAGE TO SUIT APPLICATION.
- METAL STUD FRAMING: 6" STUD; 16" O.C. SPACING; 20 GAUGE UNLESS NOTED OTHERWISE; ANCHORAGE TO SUIT APPLICATION.
- METAL STUD FRAMING: STUD RUNNER; SIZE TO MATCH METAL STUDS.
- GYPSUM BOARD: 5/8" THICK; TYPE "X".
- CEMENT BOARD: 5/8" THICK.
- GYPSUM BOARD ACCESSORY: ACOUSTICAL INSULATION: SOUND ATTENUATION BATTS; THICKNESS AS SPECIFIED.
- GYPSUM BOARD ACCESSORY: CORNER BEAD.
- CERAMIC WALL TILE.
- CERAMIC FLOOR TILE.
- STAINLESS STEEL EDGE PROTECTION TRIM.
- STAINLESS STEEL FLOOR TRANSITION TRIM.
- WALK-OFF CARPET TILE: REFER TO FINISH SCHEDULE.

GENERAL NOTES

- REFER TO DRAWING G001 FOR PROJECT GENERAL NOTES.
- REFER TO DRAWING G003 FOR KEYNOTE DESCRIPTIONS NOT APPEARING ON THIS DRAWING.
- COORDINATE FIRE RATED ASSEMBLIES INFORMATION CONTAINED ON DRAWING A301 WITH THE WORK OF ALL CONTRACTS.
- KEYNOTES TYPICALLY ARE NOT DUPLICATED WITHIN A GIVEN DETAIL. AN UN-KEYED ITEM IS THE SAME AS THE KEYNOTED ITEM WITHIN THE DETAIL.
- IN METAL STUD/GYPSUM BOARD PARTITIONS AND WALLS, PROVIDE 2X FIRE RETARDANT TREATED WOOD BLOCKING FOR WALL-MOUNTED ITEMS REQUIRING MECHANICAL ANCHORAGE.
- PROVIDE CEMENT BOARD AT WALL LOCATIONS SCHEDULED TO RECEIVE PORCELAIN/CERAMIC TILE.

NO. CONSTRUCTION DOCUMENTS FOR BID	04-12-13
NO. CONSTRUCTION DOCUMENTS SUBMITTAL	02-09-13
NO. CONSTRUCTION DOCUMENTS SUBMITTAL	02-09-13
Revisions	Date

CONSULTANTS:

ARCHITECT/ENGINEERS:

Kluber, Inc.
10 South Shumway
Bataavia, Illinois 60510
tel. 630.406.1213
fax 630.406.9472
www.kluberinc.com

Kluber
Architects - Engineers

Drawing Title

DOOR DETAILS

Approved: Project Director

Project Title
HINES BUILDING 37
O.I. AND T. FIELD OFFICES - PHASE 3
OFFICE AND RESTROOM RENOVATIONS

Location
VA OFFICE OF ACQUISITION AND LOGISTICS
HINES, ILLINOIS

Date
04-12-13

Checked
CJH

Drawn
CJH

Project Number
796-13-004

Building Number
37

Drawing Number

37 - A802
Dwg. 9 of 32

Office of
Construction
and Facilities
Management

Department of
Veterans Affairs