

12630 - Tables

Summary of Tables (T)

Spec Item No.	Furniture Selection	Manufacturer	Quantity
	KI Pirouette Tables Performance Requirements		
T-01	Mobile Nesting Conference Table - Collaborative	KI	53
T-02	Fixed Conference Table	KI	2
T-03	Fixed Conference Table	KI	3
T-04	Table, Bedside	Krug	7
T-05	Mobile Conference Table	KI	1
T-06	Fixed Conference Table	KI	4
T-07	Work Table	KI	1
T-08	Square Dining Table (36" x 36")	First Office	16
T-09	End Table	Arcadia	31
T-10	Coffee Table	Arcadia	5
T-11	Work Table	KI	5
T-12	Mobile Nesting Conference Table	KI	10
T-13	Round Outdoor Patio Table (30"dia.)	West Coast Industries	19
T-14	Round Mobile Conference Table	Teknion	29
T-15	Round Mobile Conference Table	Teknion	147
T-16	Mobile Nesting Conference Table - Training	KI	20
T-17	Round End Table	Arcadia	18
T-18	Round Café Height Table (24"dia.)	First Office	35
T-19	Round Mobile Conference Table (30"dia.)	Teknion	9
T-20	Mobile Office Work Table	Teknion	7
T-21	Interview Table	KI	3
T-22	Lab Table with Phenolic Resin Top	Lista International Corporation	9
T-23	Mobile Nesting Conference Table	KI	9
T-24	Table with Power Strips (60" x 24")	KI	2
T-25	Fixed Conference Table	KI	1
T-26	Flip Top Table	Teknion	8
T-27	Mobile Nesting Training Table	KI	14
T-28	Conference Table, Fixed	KI	1

12630 - Tables

Summary of Tables (T)

Spec Item No.	Furniture Selection	Manufacturer	Quantity
T-29	Mobile Square Conference Table	KI	1
T-30	Round Coffee Table	Carolina Business Furniture	2
T-31	Round Coffee Table	Carolina Business Furniture	2

12630 - Tables

Spec

Item Furniture

No. Selection Qty Description

	KI Pirouette Tables	n/a	KI Pirouette Tables Performance Requirements
--	------------------------	-----	--

Tables

Worksurfaces:

- Standard worksurface tops are nominal 1-1/4" overall thickness with .030" thick high-pressure laminate top surface and .028" phenolic backer (bottom surface).
- Rigid laminate PVC edge shall occur on all tables, have square corner (74P), and be 1-1/4" thick.
- The density of the core in standard tops is 45 lb/cu ft. particleboard, M3 grade.
- Pirouette is available with 2mm (74P), Self Edge (64E) or Molded Urethane (ME2) edges.

Flipping/Nesting Table Frame:

- The framework for table support and flipping/nesting operation consists of 30mm x 50mm x 3mm thick wall, steel tubing w/ 4mm thick formed steel support hubs welded to tubes for mounting legs.
- A 3mm formed steel table support bracket is attached to the beam and hub structure using a 10mm diameter steel pivot pin. #12 x 13/4" Phillips wood screws attach the framework brackets to the worksurface.
- A 9.9mm steel hex rod connects the latch mechanism and is connected to a nylon release paddle on either end of the table base.
- The table latch release handle is actuated by squeezing the paddle on either end to the underside of the worksurface.
- Pulling upward raises the worksurface for nesting storage.
- To lower the table, grasp the top center of the worksurface edge and lower the surface to allow the latches to engage once the surface is down.
- All hinge pins for the flipping mechanism are zinc plated steel. Hinge pin spacers are molded nylon.
- The framework is shipped separately, ready to be assembled to the worksurface and legs.

Leg Assembly - Flipping/Nesting Table:

- The leg assembly consists of one right-hand leg and one left-hand leg.
- There are three leg widths. One width fits 18" wide tables; one fits 24" and 30" wide tables; the other fits 36" wide tables.
- Leg height is fixed to provide 29" high table-top height. An ADA table height of 32" is accomplished using 3" leg extensions threaded into the bottom of the leg. Cafe height of 36" and standing height of 42" are also available.
- Leg construction consists of 2.2" diameter, .10" thick wall steel tubing with a 4mm thick steel pivot plate welded to it.
- The feet consist of two 4mm thick blades welded to the leg tube.
- The blade covers are zinc die cast, attached with self-tapping metal screws.
- The leg assemblies are bolted to the table frame structure using two M12 x 25mm fat head bolts. Leg assemblies ship with blade covers installed but casters or glides need to be installed upon assembly. A hardware kit is shipped with the base that consists of a cover that must be installed after the leg assembly to prevent access to the pivot mechanism.

KI Pirouette Tables Performance Requirements (cont.)

12630 - Tables

Spec

Item Furniture

No. Selection Qty Description

KI Pirouette	n/a	KI Pirouette Tables Performance Requirements
	Tables	

KI Pirouette Tables Performance Requirements (cont.)

Leg Assembly - Fixed Table:

- There are three leg widths. One width fits 18" wide tables; one fits 24" and 30" wide tables; the other fits 36" wide tables.
- Leg height is fixed to provide 29" high table-top height. An ADA table height of 32" is accomplished using 3" leg extensions threaded into the bottom of the leg. Cafe height of 36" and standing height of 42" are also available.
- Leg construction consists of 2.2" diameter, .10" thick wall steel tubing with a 5mm thick steel plate welded to it.
- The feet consist of two 4mm thick blades welded to the leg tube.
- The blade covers are zinc die cast, attached with self-tapping metal screws.
- The leg assemblies are attached to the worksurface using #12 X 1" screws. Leg assemblies ship with blade covers installed but casters or glides need to be installed upon assembly.

Leg Assembly Fixed Double T Leg:

- Some larger fixed leg tables use a Double T or TT style leg. Available standard in one width of 38" to fit 42" and 48" wide tables. Leg height is fixed to provide only 29" high table-top height. ADA table height of 32" is accomplished using 3" leg extensions threaded into the bottom of the leg.
- Leg construction consists of 2.2" diameter, .10" thick wall steel tubing with a 5mm thick steel plate welded to it. The feet consist of two 4mm thick blades welded to two leg tubes separated by a 1" x 2" welded steel cross tube, and the blade covers are zinc die cast attached with self-tapping metal screws. The Leg assemblies are attached to the worksurface using #12 x 1" screws. Leg assemblies ship with blade covers installed but casters or Glides need to be installed upon assembly.

Leg Assembly Fixed C-Leg:

- Some shaped tables use three or four C-Leg style legs. Available standard in one length of 14".
- Leg height is fixed to provide only 29" high table-top height. ADA table height of 32" is accomplished using 3" leg extensions threaded into the bottom of the leg. Leg construction consists of 2.2" diameter, .10" thick wall steel tubing with a 5mm thick steel plate welded to it.
- The foot consist of one 4mm thick blade welded to the leg tube, and the blade covers are zinc die cast attached with self-tapping metal screws. The Leg assemblies are attached to the worksurface using #12 x 1" screws.
- Leg assemblies ship with blade covers installed but casters or glides need to be installed upon assembly.

KI Pirouette Tables Performance Requirements (cont.)

12630 - Tables

Spec

Item Furniture

No. Selection Qty Description

KI Pirouette n/a KI Pirouette Tables Performance Requirements
Tables

KI Pirouette Tables Performance Requirements (cont.)

Leg Assembly Fixed X-Base:

- Some Round and Square Shaped tables use X-Base style legs. Available in a standard 28" x 28" style foot configuration. 29", 36" and 42" table top height configurations are available on various sizes.
- Leg construction consists of 3" diameter, .10" thick wall steel tubing with a 5mm thick steel plate welded to it.
- The foot consist of one 4mm thick blade welded to the leg tube, and the blade covers are zinc die cast attached with self-tapping metal screws.
- The Leg assemblies are attached to the worksurface using #12 x 1" screws. Leg assembly's ship with blade covers installed but casters or glides need to be installed upon assembly.

Casters and Glides:

- Each table includes either glides or casters. Each table with casters will include two wheel locking casters. Glides and casters are made of molded nylon and come in two colors. Glides and casters are interchangeable without changing table height.
- Caster wheels are a minimum of 2.44" (62mm) diameter. Caster wheel treads are medium hard (75 max Shore A) for easy mobility on carpet or hard floors.
- Glides have a smooth convex bottom surface for mobility. 23/4" diameter black nylon glides are optional. Glides have 1" of telescoping height adjustment that adjusts table height from 281/2" to 291/2".
- Steel 1/2" threaded stems attach the glides to legs. Casters and glides ship unassembled.

Ganging Mechanism:

- Molded of black, high-strength nylon, the hook and peg combination draws tables together back-to-back or side-by-side. No tools are required when joining tables. Gangers are self-storing under the table when not in use.
- Tops are pre-drilled for placement of ganging pegs. Two gangers, four pegs and all mounting screws are included in the kit. One kit per table joint is required. Field installed.

Vertical Leg Wire Management:

- A color matched extrusion made of aluminum "snaps" to the Pirouette leg, managing cables and wires exiting PowerUp or standard grommets installed on the worksurface top. The extrusion is 12" long.

KI Pirouette Tables Performance Requirements (cont.)

12630 - Tables

Spec

Item Furniture

No. Selection Qty Description

KI Pirouette	n/a	KI Pirouette Tables Performance Requirements
Tables		

KI Pirouette Tables Performance Requirements (cont.)

Under Table Wire Management:

- The under table wire manager is constructed of 2" x 41/2" Velcro hook and loop material with nylon pull tabs.
- The wire manager is provided with adhesive backing and screws for attachment to the underside of the top. Tops are pre-drilled for locating wire manager, but the manager may be applied in any convenient
- Two or four wire managers are included when power options are ordered. Field installed.

PowerUp Power/Data Module:

- Tables are available with one or two PowerUp power/data modules per table. On tables with one module it is located centered within the top length. Modules are spaced 3" from the front edge on 18" and 24" wide tops, 4" on 30" wide tops, and centered (front to back) on 36" wide tops. Some larger Conference style tables are available with two modules. They are located along the centerline of the top (front to back) and approximately 23" to 35" from the edge of the top depending on the top width.
- The PowerUp is a UL listed Relocatable Power Tap which mounts flush into the table top. The PowerUp is 31/4" wide by 7" long and 21/4" tall when opened. It is provided with either a 9 ft. or 15 ft., 3 conductor cord, rated 120VAC, 15A. When open, one duplex power receptacle and two RJ45 data connectors are exposed. The module can be modified to fit various brand jacks.

Villa Module:

- Tables are available with one or two Villa modules per table. On tables with one module it is located centered within the top length. Modules are spaced 3" from the front edge on 18" and 24" wide tops, 4" on 30" wide tops, and centered (front to back) on 36" wide tops. Some larger Conference style tables are available with two modules. They are located along the centerline of the top (front to back) and approximately 23" to 35" from the edge of the top depending on the top width.
- The Villa is a UL listed Relocatable Power Tap which mounts flush into the table top. The Villa is 31/2" wide by 63/4" long and 2" tall when opened. It is provided with either a 9 ft or 15 ft, 3 conductor cord, rated 120VAC, 15A. When open, one duplex power receptacle and two RJ45 data connectors are exposed. The module can be modified to fit various brand jacks.

Worksurface Grommet

- The Pirouette grommet is constructed of ABS plastic which mounts flush into the top of the worksurface. Two grommets ship per table. Grommets are located in the left- and right-hand corners of the tops. They are available in four standard KI colors: Warm Grey, Sand, Black, and Blue Grey. Grommets have a flip-up receding door and are identical in size to the PowerUp module to allow for retrofitting of PowerUp at a later date. When the flip-up door is closed, the available opening for power or data cords is 1/2" wide by 53/4" long. Open door available space is 21/4" x 53/4". Field

Refer to the following web page for product download detailing additional performance specifications about dimensions, etc. for the Pirouette tables: <http://www.ki.com/products/name/pirouette-table/#>.

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-01	Mobile Nesting Conference Table - Collaborative	53	As manufactured by KI #PINR3072C-74P-NNN-NMP-ERY-LRY-CM-4EC Pirouette, Mobile, Nesting, Conference Table with Collaborative Leg Placement and (4) Casters (2 Locking/2 Non-locking), 74P Edge, No Grommets, No PowerUp or Wire Management/No Cutouts, No Modesty Panel

Size: 72"w. X 30"d. x 29"h.

Finish: Laminate Top - KI #LRY River Cherry;
 Legs - KI # CM Champagne Metallic;
 Rigid PVC Edge - #ERY River Cherry
 Casters - Black Wheel, Silver Hub

Performance Spec: See Pirouette Table Performance Specifications.
 Collaborative tables are designed to provide leg spacing for all sides of the table.



Locations:

1E20	3	2W17	2
1W10	3	2W19	2
1W20	3	2W21	2
1W89	3	2W25	2
2E30	2	3W03	4
2E86	2	3W05	4
2E90	2	3W70	2
2W10	2	3W72	2
2W15	2	4E90	8
		4W20	3

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-02	Fixed Conference Table	2	<p>As manufactured by KI #PIFR4272-74P-1PG-NMP-ERY-LRY-CM-GBL-4GB Pirouette, Fixed Rectangular Conference Table with TT Base, 74P Edge, (1) Plastic Grommet with Wire Management, Collaborative Leg Placement, and (4) Glides, No Modesty Panel</p> <p>Size: 72"w. x 42"d. x 29"h.</p> <p>Finish: Laminate Top - KI #LRY River Cherry; Legs - KI # CM Champagne Metallic; Rigid PVC Edge - #ERY River Cherry Grommet/Module - Black Glides - Black</p> <p>Performance Spec: See Pirouette Table Performance Specifications. Collaborative tables are designed to provide leg spacing for all sides of the table. Grommet to be centered between the legs / top.</p>



Locations:

1E04 2

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-03	Fixed Conference Table	3	<p>As manufactured by KI #PIFR42120-74P-2PG-NMP-ERY-LRY-CM-GBL-4GB Pirouette, Fixed Rectangular Conference Table with (3) Bases (Outer are TT, Center Leg is a Single T-Base to Improve Leg Clearance), 74P Edge, (2) Plastic Grommets with Wire Management, Collaborative Leg Placement, and (4) Glides, No Modesty Panel</p> <p>Size: 120"w. x 42"d. x 29"h.</p> <p>Finish: Laminate Top - KI #LRY River Cherry; Legs - KI # CM Champagne Metallic; Rigid PVC Edge - #ERY River Cherry Grommet/Module - Black Glides - Black</p> <p>Performance Spec: See Pirouette Table Performance Specifications. Collaborative tables are designed to provide leg spacing for all sides of the table. Grommets to be centered between the legs / top.</p>



Locations:

1E30A	1
4W10	1
5W15	1

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-04	Table, Bedside	7	<p>As manufactured by Krug #TB1203R-LK Juno Bedside Table with (1) Drawer, (1) Door, with (L) Lia Front, Sides to the Floor, High Pressure Laminate Top with Polymer Edge Profile (A), Standard Overhang 1/4" on (4) Sides with Indus (I) Pull, Hinged Right with Lock, and Laminate Drawer Insert</p> <p>Size: 19-3/4"w. x 19-3/4"d. x 30"h.</p> <p>Finish: Cabinet - #C Candlelight; Indus Pull - Silver Metallic</p> <p>Performance Specification: Locking Top Drawer or Door: Juno cabinets have the option to lock. They can be randomly keyed for security. The lock option is factory installed and must be specified on the order. An optional white laminate drawer with a single-action 3/4-extension slide is available. All edges are banded. The Indus pull eliminates a protrusion that could bruise a patient or caregiver. Cabinet has sides to the floor with a base-plate Style 1.</p>



Indus Pull



Shown with standard leg.

Locations:

5E30	2	5E43	2
5E34	1	5W62	1
5E41	1		

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-05	Mobile Conference Table	1	<p>As manufactured by KI #PIFR3648T-74P-NNN-NMP-ERY-LRY-CM-4EC Pirouette Fixed Rectangular Training Table with Training Leg Placement, (4) Casters (2 Locking/2 Non-locking), 74P Edge, No Grommets, No PowerUp or Wire Management/No Cutouts, No Modesty Panel</p> <p>Size: 48"w. x 36"d. x 29"h.</p> <p>Finish: Laminate Top - KI #LRY River Cherry; Legs - KI # CM Champagne Metallic; Rigid PVC Edge - #ERY River Cherry Casters - Black Wheel, Silver Hub</p> <p>Performance Spec: See Pirouette Table Performance Specifications. Training tables are designed for maximum leg spacing for the length of the table.</p>



Locations:

2E71A	1
-------	---

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-06	Fixed Conference Table	4	As manufactured by KI #PIFR3072C-74P-NNN-NMP-ERY-LRY-CM-4GB Pirouette, Fixed Rectangular Conference Table with (2) Single T Bases, Collaborative Leg Placement, 74P Edge, and (4) Glides, No Modesty Panel, No Grommets

Size: 72"w. X 30"d. x 29"h.

Finish: Laminate Top - KI #LRY River Cherry;
 Legs - KI # CM Champagne Metallic;
 Rigid PVC Edge - #ERY River Cherry
 Glides - Black

Performance Spec: See Pirouette Table Performance Specifications.
 Collaborative tables are designed to provide leg spacing for all sides of the table.



Locations:

2W91	1
4W43	1
GW89	2

12630 - Tables


Spec Item No.	Furniture Selection	Qty	Description
T-07	Work Table	1	<p>As manufactured by KI #PIFR2436T-74P-NNN-NMP-ERY-LRY-CM-4EC Pirouette Fixed Training Table with Training Leg Placement, Mobile, with (4) Casters (2 Locking/2 Non-locking), 74P Edge, No Grommets, No PowerUp or Wire Management/No Cutouts, No Modesty Panel</p> <p>Size: 36"w. x 24"d. x 29"h.</p> <p>Finish: Laminate Top - KI #LRY River Cherry; Legs - KI # CM Champagne Metallic; Rigid PVC Edge - #ERY River Cherry Casters - Black Wheel, Silver Hub</p> <p>Performance Spec: See Pirouette Table Performance Specifications. Training tables are designed for maximum leg spacing for the length of the table.</p>



Locations:		
	2W29	1

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-08	Square Dining Table (36" x 36")	16	As manufactured by First Office #A3655-HPL-TFL-EY-H5H-ASX32-A4F-H1P-H1P Applause Soft Square Dining Table with Plastic Laminate (HPL) Top with Matching 3MM PVC Edge, Static Deuce "X" Base and Standard Glide Size: 36"w. x 36"d. x 28.875"h. Finish: Top - Wilsonart Laminate #4860-07 Silver Alchemy Deuce X Base - #HIP Oiled Bronze Performance Specification: 2.36" diameter tubular steel column.



Locations:

1E37	2	4W32A	2
1W69	1	4W70	4
2W70	5	5W72	2

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-09	End Table	31	<p>As manufactured by Arcadia #537-222220-CO-NS02B Ovate 22" Square End Table with Corian Top, in Beech Wood, with Non-Skid Glides</p> <p>Size: 22"w. x 22"d. x 20-1/2"h.</p> <p>Finish: Wood Table - #22 Caramel Beech; Wood Platform Base - #38 Bourbon Beech; Corian - Designer White</p> <p>Performance Specification: Table features wood platform base with 7" height clearance. Corian top is affixed to table surface increasing overall table height by 1/2". A 1/8" reveal will be present. Two-tone finish for table and platform base.</p>



Locations:

1E37	1	2W24	4
1W11	2	2W50	1
1W24	4	2W70	1
1W69	1	2W91	2
2E10	1	3E10	2
2E24	1	4H10	2
2E30	2	GW47	1
2E90	2	GW51	1
		GW90A	2
		GW24	1

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
---------------	---------------------	-----	-------------

T-10	Coffee Table	5	As manufactured by Arcadia #536-442216-CO-NS02B Ovate Oval Shaped Coffee Table with Corian Top, in Beech Wood, with Non-Skid Glides
------	--------------	---	---

Size: 44"w. x 22"d. x 16-1/2"h.

Finish: Wood Table - #22 Caramel Beech; Wood Platform Base - #38 Bourbon Beech; Corian - Designer White

Performance Specification: Table features wood platform base with 7" height clearance. Corian top is affixed to table surface increasing overall table height by 1/2". A 1/8" reveal will be present. Two-tone finish for table and platform base.




Shows Corian Top

Locations:

1W24	2
2W24	2
5W05	1

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-11	Work Table	5	<p>As manufactured by KI #PIFR2460T-74P-NNN-NMP-ERY-LRY-CM-4EC Pirouette Fixed Training Table with Training Leg Placement, Mobile, with (4) Casters (2 Locking/2 Non-locking), 74P Edge, No Grommets, No PowerUp or Wire Management/No Cutouts, No Modesty Panel</p> <p>Size: 60"w. x 24"d. x 29"h.</p> <p>Finish: Laminate Top - KI #LRY River Cherry; Legs - KI # CM Champagne Metallic; Rigid PVC Edge - #ERY River Cherry Casters - Black Wheel, Silver Hub</p> <p>Performance Spec: See Pirouette Table Performance Specifications. Training tables are designed for maximum leg spacing for the length of the table.</p>



Locations:

1E30	1
2W07A	1
3W10	1
4W42	1
5W80	1

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-12	Mobile Nesting Conference Table	10	As manufactured by KI #PINR2460C-74P-NNN-NMP-ERY-LRY-CM-4EC Pirouette, Mobile, Nesting, Conference Table with Collaborative Leg Placement and (4) Casters (2 Locking/2 Non-locking), 74P Edge, No Grommets, No PowerUp or Wire Management/No Cutouts, No Modesty Panel

Size: 60"w. x 24"d. x 29"h.

Finish: Laminate Top - KI #LRY River Cherry;
 Legs - KI # CM Champagne Metallic;
 Rigid PVC Edge - #ERY River Cherry
 Casters - Black Wheel, Silver Hub

Performance Spec: See Pirouette Table Performance Specifications.
 Collaborative tables are designed to provide leg spacing for all sides of the table.



Locations:

2W85	6
2W87	2
2W89	2

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-13	Round Outdoor Patio Table (30"dia.)	19	<p>As manufactured by West Coast Industries #MAX-30-RD-OD-MES-MSL-MSL Mark IV Outdoor Table</p> <p>Size: 30"dia. x 29"h.</p> <p>Finish: Top & Base Powder Coat - Metallics # MSL Silver</p> <p>Performance Specification: All outdoor products manufactured by WCI are warranted to the original purchaser covering normal usage for a period of one year from the date of the original invoice. WCI will replace or repair (at their discretion) without cost to customer any item found to be defective as a result of defective material or workmanship. They will not repair any item which has been abused or subjected to any use other than that which was originally intended for product. Any repairs by the customer must receive specific written authorization from WCI before being executed on location to receive proper reimbursement for associated costs. In no event shall liability under this warranty exceed the original purchase price.</p>



Locations:

2W71	2	5W71	2
3W71	2	GW24A	4
4W15	3	GW25A	4
4W71	2		

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-14	Round Mobile Conference Table	29	As manufactured by Teknion #ATMCS42-AZA64ACCNN Audience Circular Meeting Table with Foundation Laminate, Stretch Legs on Casters, Straight Trim, No Wire Management, No Grommet Size: 42"dia. x 29"h. Finish: Laminate & Edge - #2A Mercurial Walnut; Legs - Crisp Grey Matte Performance Specification: Stretch leg leveling range is 3/4". Casters (75 mm) include (2) locking and (2) swivel. Meeting Table worksurfaces are 1" thick.



Locations:

1E41	1	3E61	1
1E61	1	3E63	1
1W43	1	3W69	1
1W45	1	4E37	1
1W65	1	4E61	1
2E37	1	4E63	1
2E61	1	4W25	2
2E63	1	4W50	1
2E76	1	4W69	1
2W43	1	5W43	1
2W45	1	5W45	1
2W69	1	GW24	1
3E12	1	GW43	1
3E37	1	GW45	1

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-15	Round Mobile Conference Table	147	As manufactured by Teknion #ATMCS36-AZA64A6CNN Audience Circular Meeting Table with Foundation Laminate, Stretch Legs on Casters, Straight Trim, No Wire Management, No Grommet Size: 36"dia. x 29"h. Finish: Laminate & Edge - Mercurial Walnut; Legs - Crisp Grey Matte Performance Specification: Stretch leg leveling range is 3/4". Casters (75 mm) include (2) locking and (2) swivel. Meeting Table worksurfaces are 1" thick.



Locations:

1E29	1	2W37	1
1E31	1	2W38	1
1E43	1	2W39	1
1E45	1	2W40	1
1E47	1	2W41	1
1E48	1	2W42	1
1E49	1	2W44	1
1E50	1	2W47	1
1E51	1	2W49	1
1E53	1	2W51	1
1E55	1	2W53	1

T-15 Round Mobile Conference Table (cont.)

12630 - Tables

T-15 Round Mobile Conference Table (cont.)

Locations (cont.):

1E56	1	2W55	1
1E57	1	2W57	1
1E58	1	2W59	1
1E59	1	2W61	1
1E62	1	2W63	1
1E63	1	2W65	1
1E64	1	2W67	1
1E65	1	2W82	1
1E67	1	2W84	1
1E69	1	2W86	1
1W35	1	2W90	1
1W36	1	2W92	1
1W37	1	4E39	1
1W38	1	4E41	1
1W39	1	4E43	1
1W40	1	4E45	1
1W41	1	4E47	1
1W42	1	4E48	1
1W47	1	4E49	1
1W49	1	4E50	1
1W50	1	4E51	1
1W51	1	4E53	1
1W53	1	4E54	1
1W54	1	4E55	1
1W55	1	4E56	1
1W56	1	4E57	1
1W57	1	4E58	1
1W58	1	4E59	1
1W59	1	4E64	1
1W61	1	4E65	1
1W63	1	4E66	1
2E19	1	4E67	1
2E23	1	4E69	1
2E25	1	4E71	1
2E27	1	4E73	1
2E29	1	4W49	1
2E39	1	4W51	1
2E41	1	4W52	1
2E43	1	4W53	1

T-15 Round Mobile Conference Table (cont.)

12630 - Tables

T-15 Round Mobile Conference Table (cont.)

Locations (cont.):

2E45	1	4W54	1
2E47	1	4W55	1
2E49	1	4W56	1
2E51	1	4W57	1
2E52	1	4W58	1
2E53	1	4W59	1
2E54	1	4W61	1
2E55	1	4W63	1
2E56	1	4W65	1
2E57	1	4W67	1
2E58	1	5W13	1
2E59	1	5W29	1
2E64	1	5W31	1
2E65	1	5W33	1
2E66	1	5W35	1
2E67	1	5W37	1
2E68	1	5W39	1
2E69	1	5W41	1
2E70	1	5W47	1
2W30	1	GW52	1
2W31	1	GW59	1
2W32	1	GW61	1
2W33	1	GW63	1
2W35	1		

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-16	Mobile Nesting Conference Table - Training	20	As manufactured by KI #PINR3072T-74P-NNN-NMP-ERY-LRY-CM-4EC Pirouette, Mobile, Nesting, Conference Table with Training Leg Placement and (4) Casters (2 Locking/2 Non-locking), 74P Edge, No Grommets, No PowerUp or Wire Management/No Cutouts, No Modesty Panel

Size: 72"w. X 30"d. x 29"h.

Finish: Laminate Top - KI #LRY River Cherry;
 Legs - KI # CM Champagne Metallic;
 Rigid PVC Edge - #ERY River Cherry
 Casters - Black Wheel, Silver Hub

Performance Spec: See Pirouette Table Performance Specifications.
 Training tables are designed for maximum leg spacing for the length of the table.



Locations:

1E80	8	5W65	1
1E90	8	5W67	1
2W10	2		

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-17	Round End Table	18	As manufactured by Arcadia #536-2220-CO-NS02B Ovate 22" Round End Table with Corian Top, in Beech Wood, with Non-Skid Glides

Size: 22"dia. x 20-1/2"h.

Finish: Wood Table - #22 Caramel Beech; Wood Platform Base - #38 Bourbon Beech; Corian - Designer White

Performance Specification: Table features wood platform base with 7" height clearance. Corian top is affixed to table surface increasing overall table height by 1/2". A 1/8" reveal will be present. Two-tone finish for table and platform base.




Shows Corian Top

Locations:

2E28	1	4W47	2
2E80A	1	5W05	3
3E17	1	GW39	1
3E19	1	GW55	1
3E21	1	GW57	1
3W24	5		

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-18	Round Café Height Table (24"dia.)	35	<p>As manufactured by First Office #A24R-HPL-TFL-EY-H5H-ASX20B-A4F-H1P-H1P Applause Round Café Table with Plastic Laminate (HPL) Top with Matching 3MM PVC Edge, Static Deuce "X" Base and Standard Glide</p> <p>Size: 24"dia. x 42.38"h.</p> <p>Finish: Top - Wilsonart Laminate #4860-07 Silver Alchemy Deuce X Base - #HIP Oiled Bronze</p> <p>Performance Specification: 2.36" diameter tubular steel column.</p>



Locations:

1E25	1	4W01	4
2H31	3	4W70	3
3E62	1	5W01	4
3E80	1	5W71	3
3E90	1	5W72	2
3W24	2	GW24	2
3W71A	3	GW90A	2
4H10	3		

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-19	Round Mobile Conference Table (30" dia.)	9	As manufactured by Teknion #ATWC30 Circular Work Table with Star-Base and Casters, Non-Swivel Base ~A Surface Finishes Foundation Laminate 2A Foundation Laminate Mercurial Walnut 6 Edge Trim Style Straight Trim 4A Edge Trim Colors Mercurial Walnut ~Found Base Finish Foundation Colors 6 Foundation Colors Crisp Grey (Matte) 1Base Type Non Swivel Size: 30"dia. x 29"h. Finish: Laminate & Edge - #2A Mercurial Walnut; Legs - Crisp Grey Matte Performance Specification: 5 Point star base with casters.




Locations:

1W52	1	5W36	1
2E71	1	5W40	1
2E75	1	5W42	1
5W30	1	5W44	1
5W34	1		

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-20	Mobile Office Work Table	7	As manufactured by Teknion Each to Consist of: (1) #BMRWL2436N-WWAZA64A Expansion Rectangular Work Surface, Straight Trim, No Wire Management, No Grommets (4) #CTPLB2 Expansion Post Leg, Fixed Height on Casters Size: Overall - 36"w. x 24"d. x 29"h. Finish: Top Laminate & Edge - Mercurial Walnut; Legs - Crisp Grey Matte Performance Specification: Casters (75 mm) include (2) locking and (2) swivel.

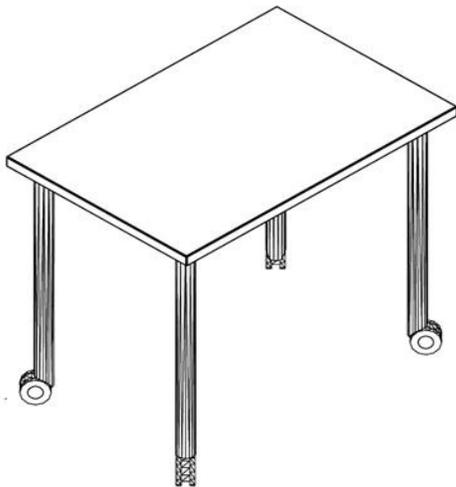

Locations:

3E24	1	GW39	1
3E30	1	GW55	1
5E24	1	GW57	1
GW33	1		

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-21	Interview Table	3	<p>As manufactured by KI #PIFR3036T-74P-NNN-NMP-ERY-LRY-CM-4GB Pirouette Fixed Rectangular Training Table with Training Leg Placement, (4) Glides, 74P Edge, No Grommets, No PowerUp or Wire Management/No Cutouts, No Modesty Panel</p> <p>Size: 36"w. x 30"d. x 29"h.</p> <p>Finish: Laminate Top - KI #LRY River Cherry; Legs - KI # CM Champagne Metallic; Rigid PVC Edge - #ERY River Cherry Glides - Black</p> <p>Performance Spec: See Pirouette Table Performance Specifications. Training tables are designed for maximum leg spacing for the length of the table.</p>



Locations:

3E17	1
3E19	1
3E21	1

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-22	Lab Table with Phenolic Resin Top	9	As manufactured by Lista International Corporation #603036RT Workbench with Trespa Top, (4) Legs, Fixed Height Size: 60"w. x 30"d. x 36"h. Finish: Phenolic Resin Top - Standard Black; Metal Legs - #LG Light Grey Performance Specification: See Lista Performance Spec details in Section 12640 - Desks.



Locations:

GW03B	7
GW11	2

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-23	Mobile Nesting Conference Table	9	As manufactured by KI #PINR3066C-74P-NNN-NMP-ERY-LRY-CM-4EC Pirouette, Mobile, Nesting, Conference Table with Collaborative Leg Placement and (4) Casters (2 Locking/2 Non-locking), 74P Edge, No Grommets, No PowerUp or Wire Management/No Cutouts, No Modesty Panel

Size: 66"w. x 30"d. x 29"h.

Finish: Laminate Top - KI #LRY River Cherry;
 Legs - KI # CM Champagne Metallic;
 Rigid PVC Edge - #ERY River Cherry
 Casters - Black Wheel, Silver Hub

Performance Spec: See Pirouette Table Performance Specifications. Collaborative tables are designed to provide leg spacing for all sides of the table.



Locations:

GW24	1
GW25	8

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-24	Table with Power Strips (60" x 24")	2	<p>As manufactured by KI</p> <p>Each to Consist of:</p> <hr/> <p>(1) #PIFR2460T-74P-1PG-FMP-ERY-LRY-CM-4GB Pirouette, Fixed Rectangular Training Table with (2) Single T Bases, Fabric Modesty Panel, (1) Plastic Grommet with Wire Management, Training Leg Placement, and (4) Glides</p> <p>(2) #SECL-60-SP Electrical Cable Assemblies (EAC) Seclusion Corded Power and Data Units Power Strip, Mounted Under Table, (6) Power Outlets,</p> <p>Size: Overall - 60"w. x 24"d. x 29"h.</p> <p>Finish: Laminate Top - KI #LRY River Cherry; Modesty Panel Fabric - Black Legs - KI # CM Champagne Metallic; Rigid PVC Edge - #ERY River Cherry Grommet/Module - Black Glides - Black Power Strip - Silver</p> <p>Performance Spec: See Pirouette Table Performance Specifications. Training tables are designed for maximum leg spacing for the length of the table. The modesty panel is constructed of a heat-set, non-woven PET material, pressed into a flexible, durable and dent resistant panel. The panel is fabric wrapped, black only. The panel is hung by 16-gauge steel, powder coated brackets and steel powdercoated hooks that mount to the underside of the worksurface using wood screws.</p> <p>Note: Vendor to mount with power strips.</p>




Shown with casters;
 item specified has glides.

Locations:	
GW15	2

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-25	Fixed Conference Table	1	<p>As manufactured by KI #PIFR3696T-74P-2PG-NMP-ERY-LRY-CM-GBL-4GB Pirouette, Fixed Rectangular Conference Table with (3) Single T-Bases, 74P Edge, (2) Plastic Grommets with Wire Management, Collaborative Leg Placement, and (4) Glides, No Modesty Panel</p> <p>Size: 96"w. x 36"d. x 29"h.</p> <p>Finish: Laminate Top - KI #LRY River Cherry; Legs - KI # CM Champagne Metallic; Rigid PVC Edge - #ERY River Cherry Grommet/Module - Black Glides - Black</p> <p>Performance Spec: See Pirouette Table Performance Specifications. Collaborative tables are designed to provide leg spacing for all sides of the table. The table legs on the end should be inset 12" to accommodate users sitting on the ends. Grommets to be centered between the legs / top.</p>

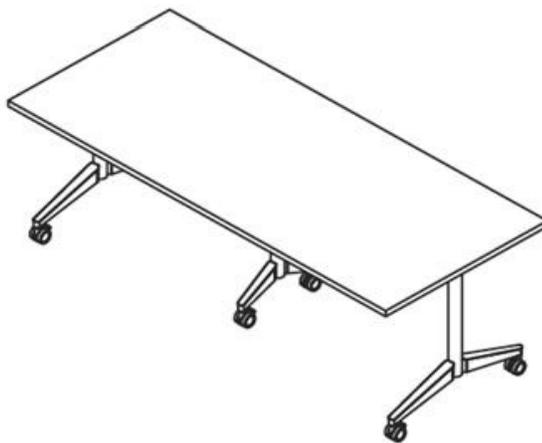

Shown with casters; actual item has glides.

Locations:

5W70	1
------	---

12630 - Tables

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-26	Flip Top Table	8	As manufactured by Teknion #CTFTTD3048-AAZA6S4A6 Expansion Flip-Top Table on T-Leg with Casters, No Grommets, No Power Module Size: Overall - 36"w. x 24"d. x 29"h. Finish: Laminate & Edge - Mercurial Walnut; Legs - Crisp Grey Matte Performance Specification: Casters (75 mm) include (2) locking and (2) swivel.



Locations:

5W29	1	5W37	1
5W31	1	5W39	1
5W33	1	5W41	1
5W35	1	5W47	1

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-27	Mobile Nesting Training Table	14	As manufactured by KI #PINR3060C-74P-NNN-NMP-ERY-LRY-CM-4EC Pirouette, Mobile, Nesting, Conference Table with Collaborative Leg Placement and (4) Casters (2 Locking/2 Non-locking), 74P Edge, No Grommets, No PowerUp or Wire Management/No Cutouts, No Modesty Panel

Size: 60"w. x 30"d. x 29"h.

Finish: Laminate Top - KI #LRY River Cherry;
 Legs - KI # CM Champagne Metallic;
 Rigid PVC Edge - #ERY River Cherry
 Casters - Black Wheel, Silver Hub

Performance Spec: See Pirouette Table Performance Specifications.
 Collaborative tables are designed to provide leg spacing for all sides of the table.




Locations:

1W80	2	2E10	2
1W84	2	2W09	2
1W88	2	GW30	4

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-28	Conference Table, Fixed	1	<p>As manufactured by KI #PIFR3684T-74P-2PG-NMP-ERY-LRY-CM-GBL-4GB Pirouette, Fixed Rectangular Conference Table with (3) Single T-Bases, 74P Edge, (2) Plastic Grommets with Wire Management, Collaborative Leg Placement, and (4) Glides, No Modesty Panel</p> <p>Size: 84"w. x 36"d. x 29"h.</p> <p>Finish: Laminate Top - KI #LRY River Cherry; Legs - KI # CM Champagne Metallic; Rigid PVC Edge - #ERY River Cherry Grommet/Module - Black Glides - Black</p> <p>Performance Spec: See Pirouette Table Performance Specifications. Collaborative tables are designed to provide leg spacing for all sides of the table. Grommets to be centered between the legs / top.</p>

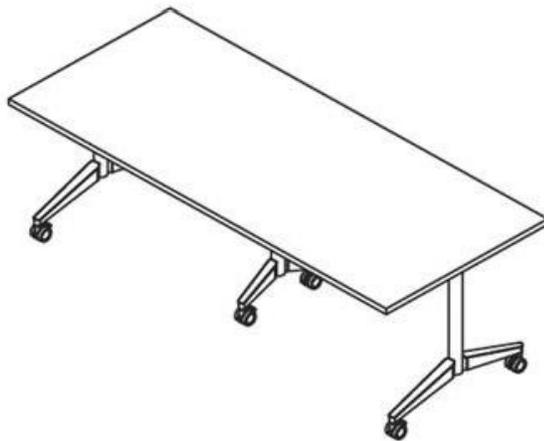

Shown with casters; actual item has glides.

Locations:

4W34	1
------	---

12630 - Tables

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-29	Mobile Square Conference Table	1	<p>As manufactured by KI #PIFCSQ42-74P-1PG-NNN-NMP-ERY-LRY-CM-4EC Pirouette, Fixed, Mobile Square Table with C Base, 74P Edge, and (4) Glides, No Modesty Panel, No Grommets</p> <p>Size: 42"w. x 42"d. x 29"h.</p> <p>Finish: Laminate Top - KI #LRY River Cherry; Legs - KI # CM Champagne Metallic; Rigid PVC Edge - #ERY River Cherry Glides - Black</p> <p>Performance Spec: See Pirouette Table Performance Specifications.</p>



Locations:		
	5E16	1

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-30	Round Coffee Table	2	<p>As manufactured by Carolina Business Furniture #810-20RD-20-HPL-J5-MWS-NHP "O" 20" Round Cylinder Coffee Table on 3" Plinth Base, with Corian Top and High Pressure Laminate Sides</p> <p>Size: 20"d. x 23"h. (Finished Height)</p> <p>Finish: Corian Top - #MWS Modern White; High Pressure Laminate (HPL) - #NPH Natural Steam Wash Plinth Laminate - Black</p> <p>Performance Specification: Euroluxe with SilverBan on all exposed wood surfaces. Tack-In non-marring glides. Plinth increases overall table height by three inches.</p>



Locations:	
1W01	2

12630 - Tables

Spec Item No.	Furniture Selection	Qty	Description
T-31	Round Coffee Table	2	As manufactured by Carolina Business Furniture #810-36RD-20-HPL-J5-MWS-NHP "O" 36" Round Cylinder Coffee Table on 3" Plinth Base, with Corian Top and High Pressure Laminate Sides

Size: 36"d. x 23"h. (Finished Height)

Finish: Corian Top - #MWS Modern White;
 High Pressure Laminate (HPL) - #NPH Natural Steam Wash
 Plinth Laminate - Black

Performance Specification: Euroluxe with SilverBan on all exposed wood surfaces. Tack-In non-marring glides. Plinth increases overall table height by three inches.



Locations:

1W01 2