

A

B

C

D


E

F

GENERAL SHEET NOTES

1. ALL WORK SHALL BE IN CONFORMANCE WITH THE VA SIGNAGE DESIGN PROGRAM GUIDE FOR SIZE, COLORS, FONT SIZE, SPACING AND STYLE.
2. CONTRACTOR SHALL IDENTIFY EACH FIRE/SMOKE RATED WALL AND EACH FIRESTOPPING SYSTEM ON FIRE RATED PENETRATIONS WITH LABELS.
3. CONTRACTOR SHALL PREPARE A SIGN LOCATION PLAN AND SIGN TEXT SCHEDULES BASED ON THE SIGN SCHEDULE AND TEXT INFORMATION FROM THE VA.
4. COORDINATE ALL WAYFINDING, ROOM NAMES AND NUMBERS WITH VA INTERIOR DESIGNER.

SIGNAGE SCHEDULE	
SIGN TYPE	LOCATION
IN-01.01.03	AT ALL EXITS INCLUDING ALL NEW AND EXISTING RESIDENT ROOMS.
IN-01.03	ADJACENT TO IN-01.01.03.
IN-01.05	FIRE DOORS.
IN-01.31	ABOVE FIRE EXTINGUISHER CABINETS.
IN-03.01	ROOMS WHERE ONLY NUMBER REQUIRED.
IN-04.04	ROOMS THAT IDENTIFY OCCUPANT OR ACTIVITY.
IN-05.06	ALL RESIDENT ROOMS.
IN-09.08	CRASH CART LOCATIONS.
IN-14.10	CORRIDORS.
IN-01.04	ELEVATOR LANDINGS
IN-01.13	EXISTING STAIRWELL DOORS
IN-01.08	EXISTING CROSS CORRIDOR DOORS
IN-01.30	EXISTING STAIRWELL DOORS
IN-01.11	EXISTING STAIRWELL LANDINGS
IN-01.06	EXISTING STAIRWELL LANDINGS
IN-13.01	EXISTING PUBLIC RESTROOM

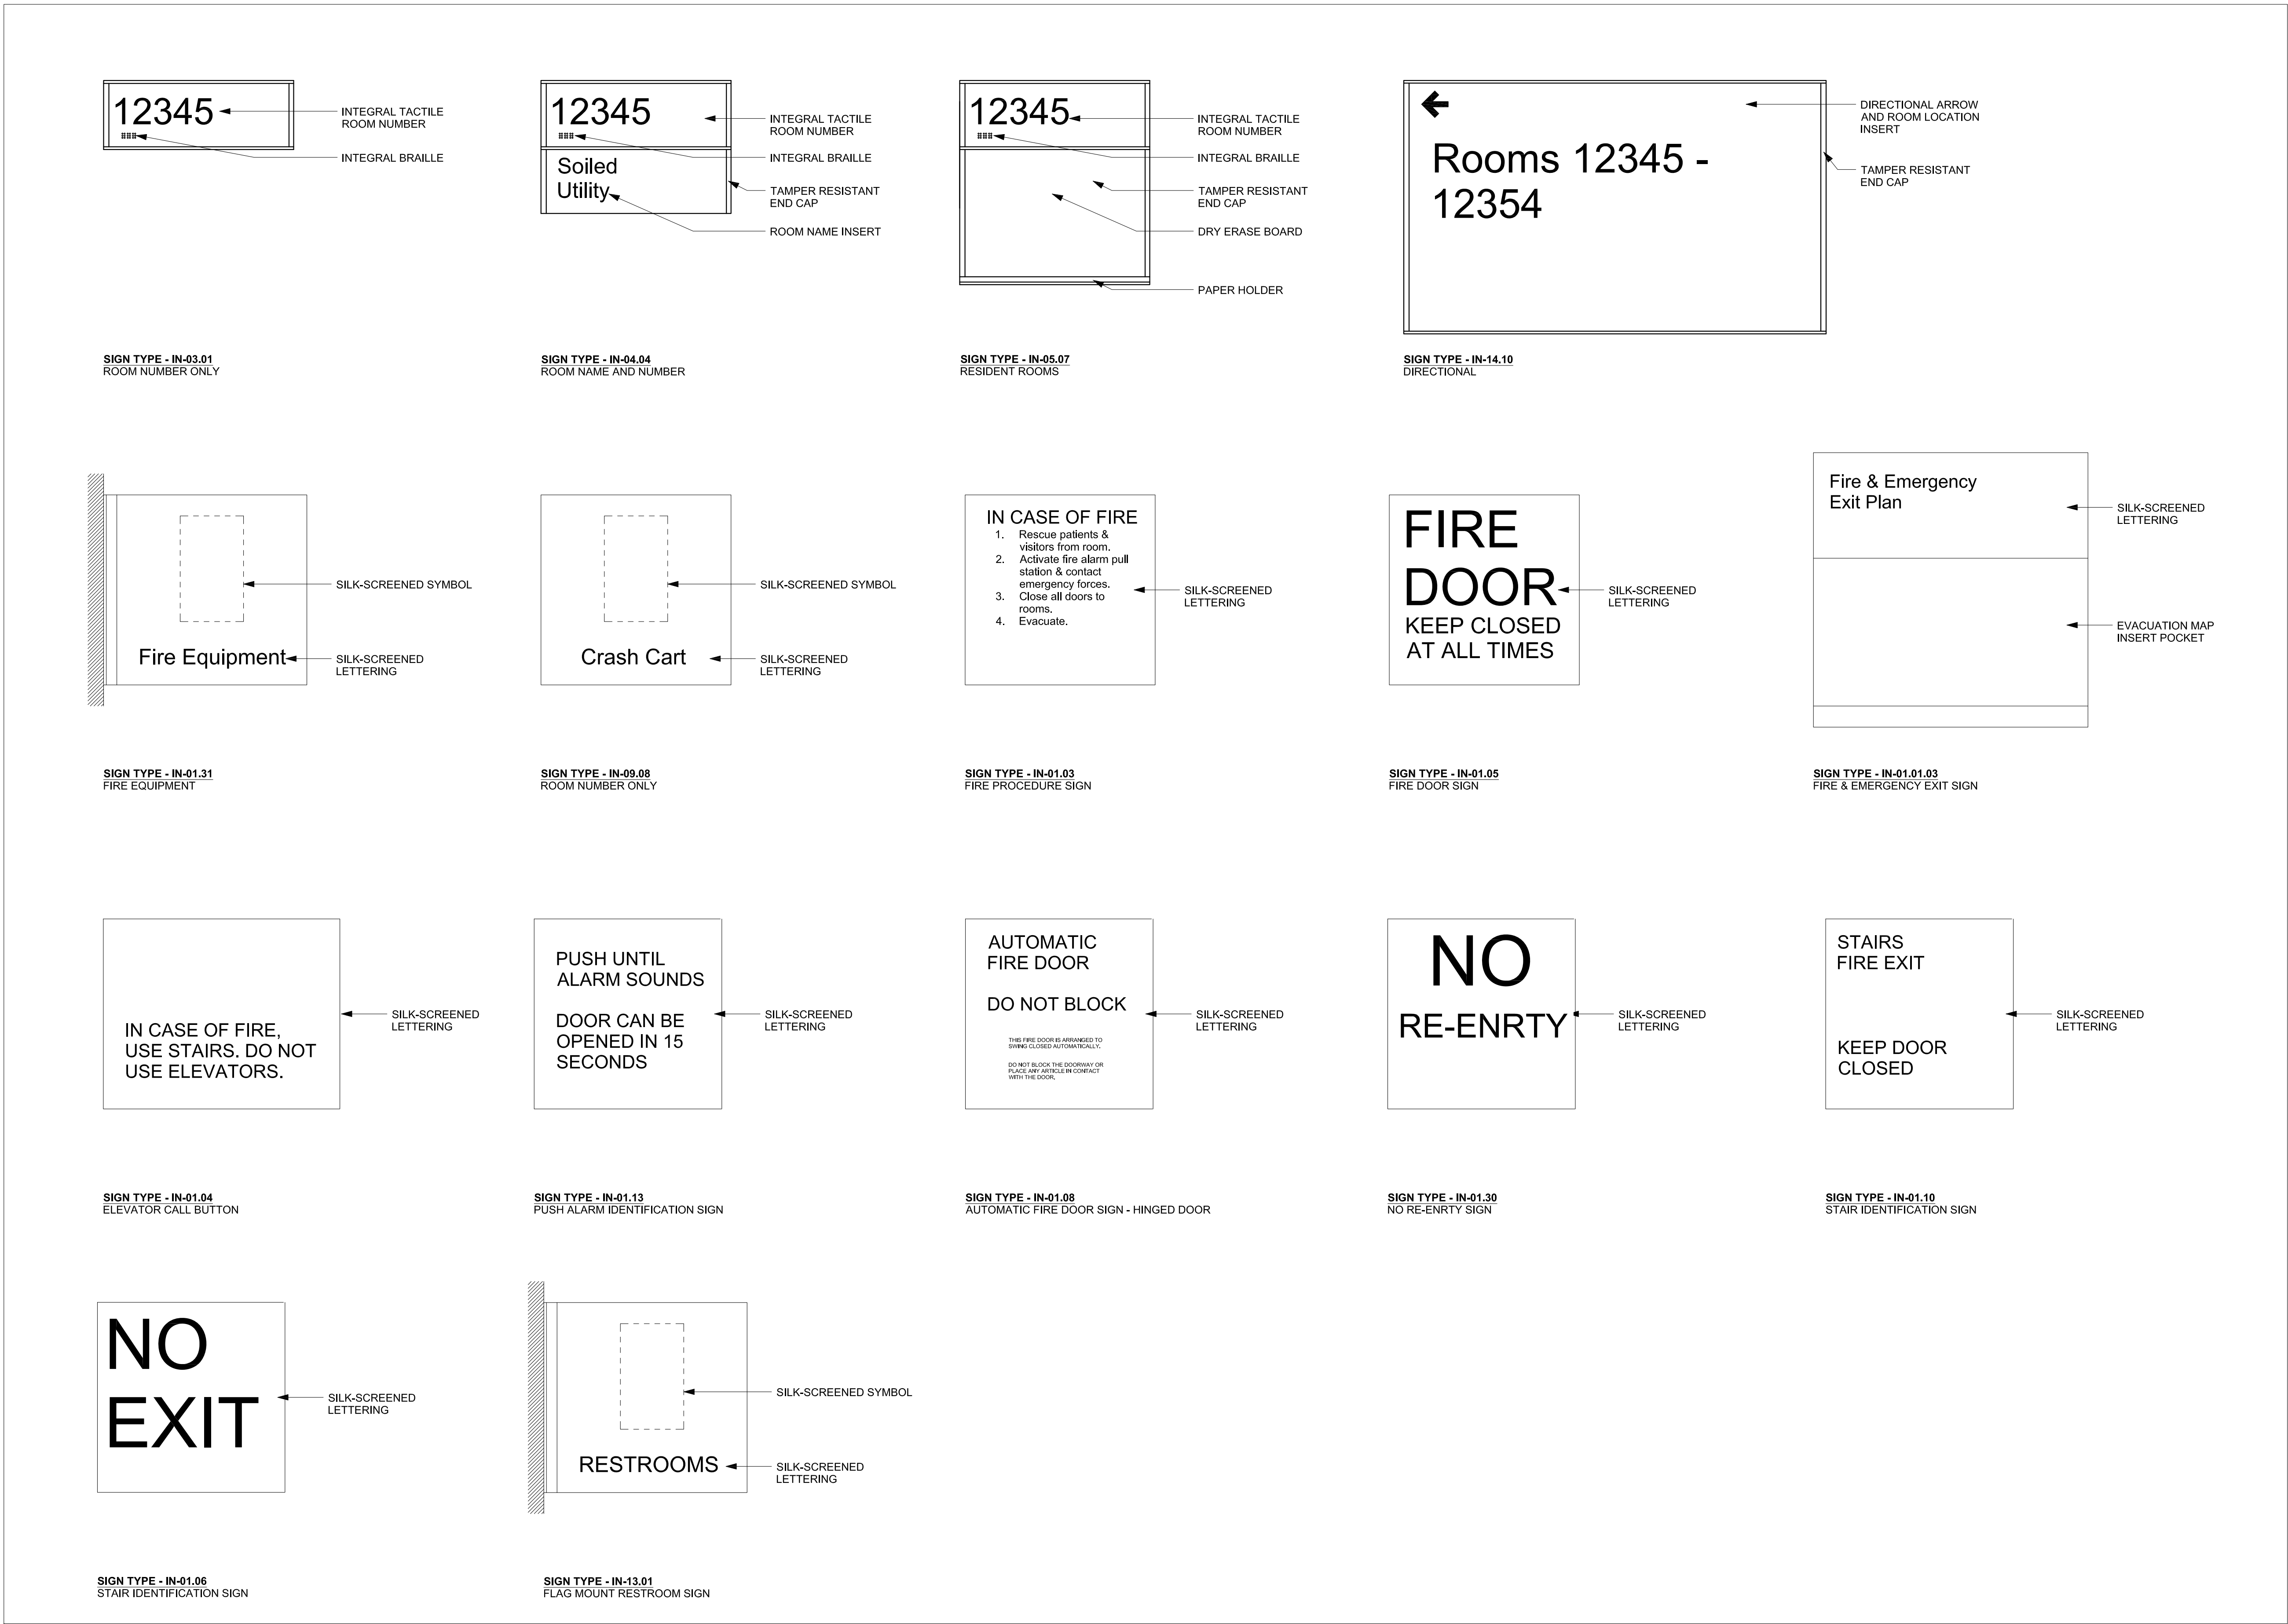

1 TYPICAL SIGNAGE TYPES
SCALE: NTS

			CONSULTANTS:						ARCHITECT/ENGINEERS:		Drawing Title		Project Title		Project Number		Office of Construction and Facilities Management			
											SIGNAGE SCHEDULE AND DETAILS		COMPLETE CONSTRUCTION 1ST & 2ND FLOOR B405		Building Number 405				676-18-107	
																			Drawing Number	
																			AS801	
											Approved: Project Director		Location VA MEDICAL CENTER TOMAH, WI		Dwg. 19.1 of 92					
													Date 07/25/2017		Checked VAS		Drawn JE/BH		Department of Veterans Affairs	
No.	Revisions	Date																		