

12650 - Workstations

Summary of Workstations (WK-)

Spec Item No.	Furniture Selection	Manufacturer	Quantity
	SwiftSpace Solo Combined Fixed and Adjustable Height Workstation		
WK-01	Left Handed Workstation Configuration (6' x 6')	Swiftspace	70
WK-02	Right Handed Workstation Configuration (6' x 6')	Swiftspace	77
WK-03	Left Handed Workstation Configuration (6' x 6') with Lower Front Panels	Swiftspace	12
WK-04	Right Handed Workstation Configuration (6' x 6') with Lower Front Panels	Swiftspace	12
WK-05	Special Workstation for Lab	Lista International Corporation	1

12650 - Workstations

Spec

Item Furniture

No.	Selection	Qty	Description
	Workstation	n/a	SwiftSpace Solo Combined Fixed and Adjustable Height Workstation

**General Workstation Characteristics:**

- \* The workstation requires no assembly and will arrive from the Manufacture in three pieces: 66" high walls with integrated upper privacy panels with a fixed worksurface attached, a pneumatic height adjustable worksurface, and a bookcase/box/box/file mobile tower.
- \* The workstation shall be engineered so that it can be setup and then folded down hundreds of times by anyone without the use of any tools with no loss of functionality.
- \* The SwiftSpace "ADJUST" is a pneumatic height adjustable workstation that can be used as a standalone workstation or incorporated into the walled system with the fixed height surface. It features a height adjustable dual arm mechanism that raises the worksurface from 29" to 48" with no electrical required. The lifting mechanism has been designed to allow for field adjustment from 30-100 lbs. of weight , allowing 20-30 lbs. for the worksurface, with very little effort on the part of the user.
- \* All workstations are on casters and completely mobile. Once the units are in place the casters can be hidden with slide-in caster covers.
- \* The integrated bottom rail of the station contains a concealed channel for running power and data. Each station contains a quick-connect/disconnect jumper cable , a receptacle box, and a duplex receptacle. The length of the jumper depends on the station wall length. The powerbar is mounted on the inside of the ADJUST station and then plugs into the receptacle on the bottom rail. The CPU and Monitor can be plugged into the powerbar. The excess cord required to allow the Monitor to move up and down with the worksurface is hidden between the station wall and back of the ADJUST.
- \* The unit shall be able to installed or serviced directly by the user or any common furniture installer or laborer and not violate or void any product warranty. Installation will not require any tools or professional training and will take less than one minute.
- \* The workstation is MAS Green certified for low VOC emissions.

**Workstation Dimensions**

- \* Overall dimensions when set-up 72"x72".
- \* Overall height 66" both left and right wall ( if required any or both walls can be specified with
- \* Height of fixed worksurface is 29". Height of adjustable worksurface is 29" to 49".
- \* Dimensions of fixed height worksurface 24"x 50". Dimensions of variable height worksurface 24"x 48".

SwiftSpace Performance Spec Continued

12650 - Workstations

Spec

Item Furniture

No.	Selection	Qty	Description
	Workstation	n/a	SwiftSpace Solo Combined Fixed and Adjustable Height Workstation

SwiftSpace Performance Spec Continued

**Construction**

- \* Frame is constructed of 40mm lightweight grey recycled content aluminum.
- \* Lower panels are made from 4mm melamine panels.
- \* Tops are 25mm thick high pressure laminate with a 45lb density particle board core, 2mm edging.
- \* Casters are 63.5mm in diameter with grey non-marking rubber wheels that swivel and lock.
- \* All connections are a done using a cam lock dry fit system.
- \* All lower and upper panel inserts are integrated into the system by sliding them inside 20mm slots

**Warranty**

- \* There is a Limited Lifetime Warranty on all aluminum parts, hardware parts like posts, connectors and metal cantilevers. Laminate panels, casters, hinges, and the pneumatic lifting mechanism shall be free of defects in materials and workmanship for a period of 5 years.

**Panel Acoustic Material - ezoBord**

- \* Sound Absorption rating of ezoBord: It has an average NRC of 0.75 for mid to high frequencies. This means that on average it absorbs 75% of the sound that hits it.
- \* **ezoBord Composition:**
- \* 100% Polyester (min 40% recycled PET)
- \* **ezoBord Thickness:**
- \* 3/8" (9mm) - other thicknesses available
- \* **ezoBord Weight:**
- \* 8.5lbs (+/-5%)
- \* **ezoBord Dimensions:**
- \* 48"(1219mm) x 95 5/8"(2420mm) (+/-1mm)
- \* **ezoBord Fire Testing:**
- \* ASTM E-84 Class A / CAN ULC S102
- \* **ezoBord Environment:**
- \* Min 40% recycled PET, 100% recyclable, no bonding agents or adhesives, formaldehyde free.
- \* **ezoBord Acoustics:**
- \* NRC 0.75 (subject to mounting conditions). Refer to ASTM C423 test chart for specific absorption
- \* **ezoBord Applications:**
- \* Wall and ceiling panels, tackboards, visual and acoustical privacy barriers, acoustic canopies.
- \* **ezoBord General:**
- \* Tackable, impact resistant, bacteria resistant, moisture resistant, installation friendly.

12650 - Workstations

Spec Item No.	Furniture Selection	Qty	Description
WK-01	Left Handed Workstation Configuration (6' x 6')	70	As manufactured by Swiftspace
		(1)	<p>Solo Combined Fixed and Adjustable Height Workstation Each to Consist of:</p> <p>SS90D6666L6666R Summit 6x6 (modified worksurface on fixed side only)</p> <p>Overall Height: 66"L 66"R                      Finish: standard Swiftspace laminate                      Fixed Side- Outside ezo/Lam Inside Whiteboard/Lam                      Adjustable Side- Outside Plexi/Whiteboard/Lam Inside Plexi/ezo/Lam</p>
		(2)	SS+EZO5x5 Solo+ EZO Upper Panel 5ft
		(2)	SS+WWBM Solo+ 5x5 Whiteboard/Laminate Inside laminate Outside
		(1)	SSWWBMT Solo 5x5 Whiteboard/Laminate Inside laminate Outside-Summit TOP
		(1)	SSEZOT Solo 5x5 Solo EZO Upper Panel 5ft- Summit TOP-Summit TOP
		(1)	SSPB Power Bar
		(1)	ADJUST - SSAMW2448 Adjustable Height Mobile Station (24x48) Worksurface size: 24"D x 48"W Work Surface Height: 29" Worksurface Height Range: 27"-48" Mechanism Pneumatic lift of 30-100Lbs *allow 20-30lbs for surface weight Finish: standard Swiftspace laminate
		(1)	SSHWDADDON Hardwired Add-on
		(2)	SSSCP66 Solo Cover Plate - 6x6 note- power bar would be mounted on inside end of ADJUST. The CPU could be placed in the corner on the top of the fixed side worksurface. The CPU and Monitor can be plugged into powerbar and the cords would run between the station wall and back of the ADJUST so they would not be visible.
			Finish: Ezo Panel - #DC02 - Beige; Plastic Laminate - CC02-Maple; 2mm Flex Edge PVC - #FM Fusion Maple
			Notes: See Performance Spec for all SwiftSpace items. See plans and reference this specification for installation configuration.

WK-01 Left Handed Workstation Configuration (6' x 6') (cont.)

12650 - Workstations

Spec Item No.	Furniture Selection	Qty	Description
---------------------	------------------------	-----	-------------

WK-01 Left Handed Workstation Configuration (6' x 6') (cont.)



Note: Mobile Bookcase Tower at left by others. Monitor arm by others.

Locations:

1W07	2	4W85	14
3E56	1	5W10	7
3E64	2	5W25	5
3E80	2	5W84	1
3E90	2	5W85	5
3W60	3	5W87	4
4E20	8	GW10	2
4E80	12		

12650 - Workstations


Spec Item No.	Furniture Selection	Qty	Description
WK-02	Right Handed Workstation Configuration (6' x 6')	77	As manufactured by Swiftspace
			Solo Combined Fixed and Adjustable Height Workstation Each to Consist of:
		(1)	SS90D6666L6666R Summit 6x6 (modified worksurface on fixed side only)
			Overall Height: 66"L 66"R Length per Side: 66" L, 66" R Work Surface Height: 29" Footprint when open: 72"L x 72"R
			Finish: standard Swiftspace laminate Fixed Side- Outside ezo/Lam Inside Whiteboard/Lam Adjustable Side- Outside Plexi/Whiteboard/Lam Inside Plexi/ezo/Lam
		(2)	SS+EZO5x5 Solo+ EZO Upper Panel 5ft
		(2)	SS+WWBM Solo+ 5x5 Whiteboard/Laminate Inside laminate Outside
		(1)	SSWWBMT Solo 5x5 Whiteboard/Laminate Inside laminate Outside-Summit TOP
		(1)	SSEZOT Solo 5x5 Solo EZO Upper Panel 5ft- Summit TOP-Summit TOP
		(1)	SSPB Power Bar
		(1)	ADJUST - SSAMW2448 Adjustable Height Mobile Station (24x48) Worksurface size: 24"D x 48"W Work Surface Height: 29" Worksurface Height Range: 27"-48" Mechanism Pneumatic lift of 30-100Lbs *allow 20-30lbs for surface weight Finish: standard Swiftspace laminate
		(1)	SSHWDADDON Hardwired Add-on
		(2)	SSSCP66 Solo Cover Plate - 6x6 note- power bar would be mounted on inside end of ADJUST. The CPU could be placed in the corner on the top of the fixed side worksurface. The CPU and Monitor can be plugged into powerbar and the cords would run between the station wall and back of the ADJUST so they would not be visible.
			Finish: Ezo Panel - #DC02 - Beige; Plastic Laminate - CC02-Maple; 2mm Flex Edge PVC - #FM Fusion Maple
			Notes: See Performance Spec for all SwiftSpace items. See plans and reference this specification for installation configuration.

WK-02 Right Handed Workstation Configuration (6' x 6') (cont.)

12650 - Workstations

Spec Item No.	Furniture Selection	Qty	Description
---------------	---------------------	-----	-------------

WK-02 Right Handed Workstation Configuration (6' x 6') (cont.)

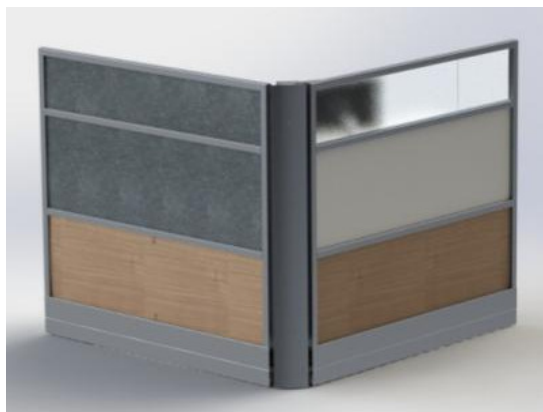

Note: Mobile Bookcase Tower at right by others.  
 Monitor arm by others.

Locations:

1W07	2	4W85	15
3E56	2	5W10	9
3E64	1	5W25	3
3E80	2	5W84	2
3E90	2	5W85	5
4E20	13	5W87	5
4E68	1	GW10	3
4E80	12		

12650 - Workstations

Spec Item No.	Furniture Selection	Qty	Description
WK-03	Left Handed Workstation Configuration (6' x 6') with Lower Front Panels	12	As manufactured by Swiftspace Solo Combined Fixed and Adjustable Height Workstation Each to Consist of:
		(1)	SS90D6666L4166R Summit/Solo 6x6 (modified worksurface on fixed side only) Overall Height: 41"L 66"R Length per Side: 66" L, 66" R Work Surface Height: 29" Footprint when open: 72"L x 72"R Finish: standard Swiftspace laminate Fixed Side- Outside ezo/Lam Inside Whiteboard/Lam Adjustable Side- Outside Plexi/Whiteboard/Lam Inside Plexi/ezo/Lam
		(1)	SS+EZO5x5 Solo+ EZO Upper Panel 5ft
		(1)	SS+WIBM Solo+ 5x5 Whiteboard/Laminate Inside laminate Outside
		(1)	SSWIBM Solo 5x5 Whiteboard/Laminate Inside laminate Outside-Summit TOP
		(1)	SSEZOT Solo 5x5 Solo EZO Upper Panel 5ft- Summit TOP-Summit TOP
		(1)	SSPB Power Bar
		(1)	ADJUST - SSAMW2448 Adjustable Height Mobile Station (24x48) Worksurface size: 24"D x 48"W Work Surface Height: 29" Worksurface Height Range: 27"-48" Mechanism Pneumatic lift of 30-100Lbs *allow 20-30lbs for surface weight Finish: standard Swiftspace laminate
		(1)	SSHWDADDON Hardwired Add-on
		(2)	SSSCP66 Solo Cover Plate - 6x6 note- power bar would be mounted on inside end of ADJUST. The CPU could be placed in the corner on the top of the fixed side worksurface. The CPU and Monitor can be plugged into powerbar and the cords would run between the station wall and back of the ADJUST so they would not be visible.
			Finish: Ezo Panel - #DC02 - Beige; Plastic Laminate - CC02-Maple; 2mm Flex Edge PVC - #FM Fusion Maple

Notes: See Performance Spec for all SwiftSpace items. See plans and reference this specification for installation configuration.

WK-03 Left Handed Workstation Configuration (6' x 6') with Lower Front Panels (cont.)



12650 - Workstations

Spec Item No.	Furniture Selection	Qty	Description
---------------	---------------------	-----	-------------

WK-03 Left Handed Workstation Configuration (6' x 6') with Lower Front Panels (cont.)



Note: Mobile Bookcase Tower at left by others. Monitor arm by others.

Locations:

3E56	1	4E20	7
3E64	1	GW10	3

12650 - Workstations

Spec Item No.	Furniture Selection	Qty	Description
WK-04	Right Handed Workstation Configuration (6' x 6') with Lower Front Panels	12	As manufactured by Swiftspace Solo Combined Fixed and Adjustable Height Workstation Each to Consist of:
		(1)	SS90D4166L6666R Solo/Summit 6x6 (modified worksurface on fixed side only) Overall Height: 41"L 66"R Length per Side: 66" L, 66" R Work Surface Height: 29" Footprint when open: 72"L x 72"R  Finish: standard Swiftspace laminate Fixed Side- Outside ezo/Lam Inside Whiteboard/Lam Adjustable Side- Outside Plexi/Whiteboard/Lam Inside Plexi/ezo/Lam
		(1)	SS+EZO5x5 Solo+ EZO Upper Panel 5ft
		(1)	SS+WWBM Solo+ 5x5 Whiteboard/Laminate Inside laminate Outside
		(1)	SSWWBMT Solo 5x5 Whiteboard/Laminate Inside laminate Outside-Summit TOP
		(1)	SSEZOT Solo 5x5 Solo EZO Upper Panel 5ft- Summit TOP-Summit TOP
		(1)	SSPB Power Bar
		(1)	ADJUST - SSAMW2448 Adjustable Height Mobile Station (24x48) Worksurface size: 24"D x 48"W Work Surface Height: 29" Worksurface Height Range: 27"-48" Mechanism Pneumatic lift of 30-100Lbs *allow 20-30lbs for surface weight Finish: standard Swiftspace laminate
		(1)	SSHWDADDON Hardwired Add-on
		(2)	SSSCP66 Solo Cover Plate - 6x6 note- power bar would be mounted on inside end of ADJUST. The CPU could be placed in the corner on the top of the fixed side worksurface. The CPU and Monitor can be plugged into powerbar and the cords would run between the station wall and back of the ADJUST so they would not be visible.
			Finish: Ezo Panel - #DC02 - Beige; Plastic Laminate - CC02-Maple; 2mm Flex Edge PVC - #FM Fusion Maple
			Notes: See Performance Spec for all SwiftSpace items. See plans and reference this specification for installation configuration.

WK-04 Right Handed Workstation Configuration (6' x 6') with Lower Front Panels (cont.)

12650 - Workstations

Spec Item No.	Furniture Selection	Qty	Description
---------------	---------------------	-----	-------------

WK-04 Right Handed Workstation Configuration (6' x 6') with Lower Front Panels (cont.)



Note: Mobile Bookcase Tower at right by others.  
 Monitor arm by others.

Locations:

1W07	7
3E56	1
3E64	2
GW10	2

12650 - Workstations

Spec Item No.	Furniture Selection	Qty	Description
WK-05	Special Workstation for Lab	1	As manufactured by Lista International Corporation
			Each to Consist of:
		(1)	HWHD1350 HW Hinged Door Shelf Cabinet
		(1)	HW-FTB HW Fork Truck Base
		(1)	STKG-KIT Stacking Kit (w/ inserts)
		(1)	HWHD600 HW Hinged Door Shelf Cabinet
		(1)	SDTOP-72BN Dissipative Top Radius Edge 72x30, Dove Gray
		(1)	SC0750-0703FA SC Cabinet w/ Drawer Layouts
		(1)	WBLL33.5X28.5 Lista Leg, w/Glides 33.5h x 28.5d
		(1)	SP12730-34 Undershelf LED Light Fixture 34"
		(1)	EOP-48 Electrical Outlet 15 AMP
		(2)	OHC3629-HD Overhead Cabinet - Hinged Door, 36" Wide
		(3)	VSF2200 Vertical Frame
		(6)	UP/5436U Universal Panel
		(2)	EP2200 End Panel
		(2)	RP2200/54U Rear Panel
		(8)	AS-P/5436U Adjustable Shelf
		(6)	X700 Intermed. Fill-In Strip


Size: Overall - 196-7/16"w. x 30"d. x 86-5/8"h.

Finishes: Dissipative Top - Dove Gray;  
 Frame, Panels, Shelves, Doors, Legs - #LG Light Grey

Performance Specification: See Performance Specification requirements for this item within the 12640 Desk specification section.

Note: Selected offeror will be responsible for assembly of this unit. For assembly instructions go to: <http://lista-automotive.com/contact/assembly-instructions.aspx>.

See Page 2 for imagery and additional spec details.

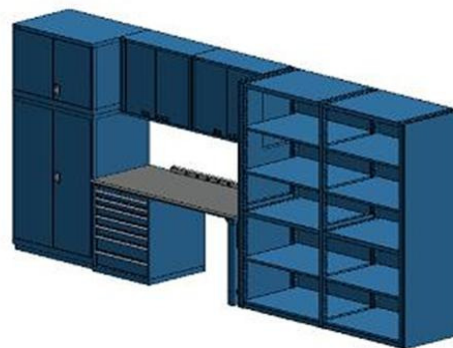

Locations:  
 GWB15B 1

12650 - Workstations

Spec

Item Furniture

No. Selection Qty Description

WK-05 Special Workstation Lab (24" x 15'-0" ) (cont.)

