

Mixing Valve/Room Schedule		
Room No.	Sinks	Steps
4A-101A	1	2
4A-102	1	2
4A-133A	1	2
4AB-107	1	2
4AB-108	1	2
4AB-108B	1	2

* - See Drawing PL-108 for Installation Diagram.

General Notes :

- All water outages must be schedules in advance with COR.
- It is the contractors responsibility to repair or replace any property damaged by the contractor during construction.
- Contractor shall supply VA with a schedule.
- It is the Contractors responsibility to verify all Faucet types to determined which type of mixing valve is required.
- Contractor is to verify and supply under this contract type of adapter needed to connect stop to existing supply pipe.
- A two week notice is required for any water shut down.
- All plumbing installation is to be done by licensed certified plumbers.
- If any Asbestos is found, the contractor is to stop work and notify the COR immediately.

Demolition Notes :


- Any piping, valves, etc. removed shall be recycled in a VA provided container. See COR for location of recycling container.

New Work Notes :

- Contractor to repair any damage to finishes after valves have been installed. Finishes to match existing.
- Contractor to clean room and advise COR before proceeding to next Room.
- Contractor to install 1 mixing valve and 2 stops to all sinks indicated in mixing valve/room schedule on this sheet.

Legend:

- Sink with new mixing valve and 2 - stops.

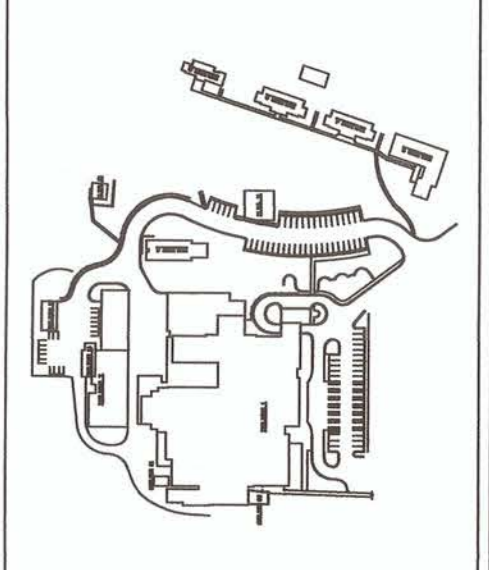

PATTING
PATTERNS
FIRST

**Medical Center Av
200 Veterans Av
Beckley, WV. 25801**

NOT TO SCALE

APPROVED:	APPROVED: SAFETY MANAGER JUSTIN GREENE APPROVED: INFECTION CONTROL	APPROVED: CHIEF, FACILITIES MANAGEMENT SERVICE LINE JOHN MONTGOMERY APPROVED: ASSOCIATE DIRECTOR for PATIENT CARE SERVICES/EXECUTIVE NURSE DEBRA LEGG, RN, MSN APPROVED: SERVICE LINE CHIEF	APPROVED: MEDICAL CENTER DIRECTOR STACY J. VASQUEZ APPROVED: ASSOCIATE DIRECTOR JOHN D. STOUT APPROVED: CHIEF OF STAFF	DRAWING No. PL-105
APPROVED:				PROJECT No. 517-17-101
APPROVED:				DRAWN BY: JPP
				CHECKED BY: KB, JH
				DATE 8/16/2017
				REV. NTS
				SCALE
				PROJECT TITLE: Fourth Floor - Mixing Valve Installation Locations
				PROJECT TITLE: Correct Water System for Legionella Phase 2