



261 SYSTEM Slimline Sliding Window

Overview

The Lidco plant-on Slimline Sliding Window allows for easy installation of retro-fitted secondary glazing next to existing windows. It is an economical solution that provides improved acoustic and thermal performance due to improved sealing. Large panel sizes, with sash weights up to 30kg are possible with this system.

The Slimline Sliding Window can be fitted in the reveal of an existing window to create an air space between new and existing panels. The improved sealing characteristics of this system, combined with a range of glass thicknesses up to 6.38mm single glazed and 14mm double glazed, provide excellent acoustic and thermal performance when used as secondary glazing. The woolpiles used ensure high sealing efficiency.

Where double glazing is used in the Slimline Sliding Window the performance of the combined new and existing window is comparable to that of a triple glazed system.

Each window sash slides on two stainless steel or nylon rollers. Additional rollers can be fitted to accommodate larger panel sizes. A range of mullion options are also available.


The stiles and interlocks are slim, narrow and unobtrusive with minimal impact on existing curtains or blinds. The sashes do not interlock, allowing easy access to either side of the existing window. The Slimline Sliding Window sashes are removable for cleaning and maintenance.

Fixings are concealed within the frame – trims not required.

The self-latching handle is mounted on the integral full height finger grip. Keyed locking is also available.

The Lidco Slimline Sliding Window is available in various powder-coat and anodised finishes.

Benefits of Secondary Glazing

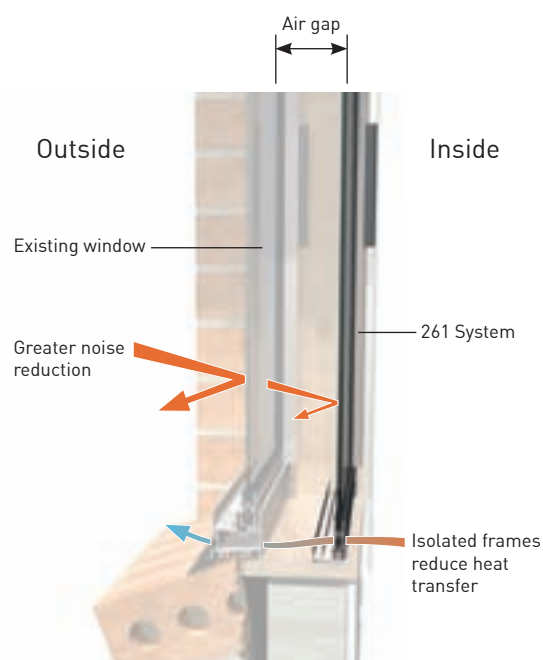



Your nearest supplier:



With over 65 years experience in the architectural building industry, Lidco is one of Australia's market leaders in the development, commercialisation and distribution of architectural framing systems.

HEAD OFFICE
LIDCO • 171 William Street, Darlinghurst NSW 2010 Australia
T 1300 663 848 www.lidco.com.au

