


three inches = one foot  
one and one-half inch = one foot  
one inch = one foot  
three-quarters inch = one foot  
one-half inch = one foot  
three-eighths inch = one foot  
one-quarter inch = one foot  
one-eighth inch = one foot

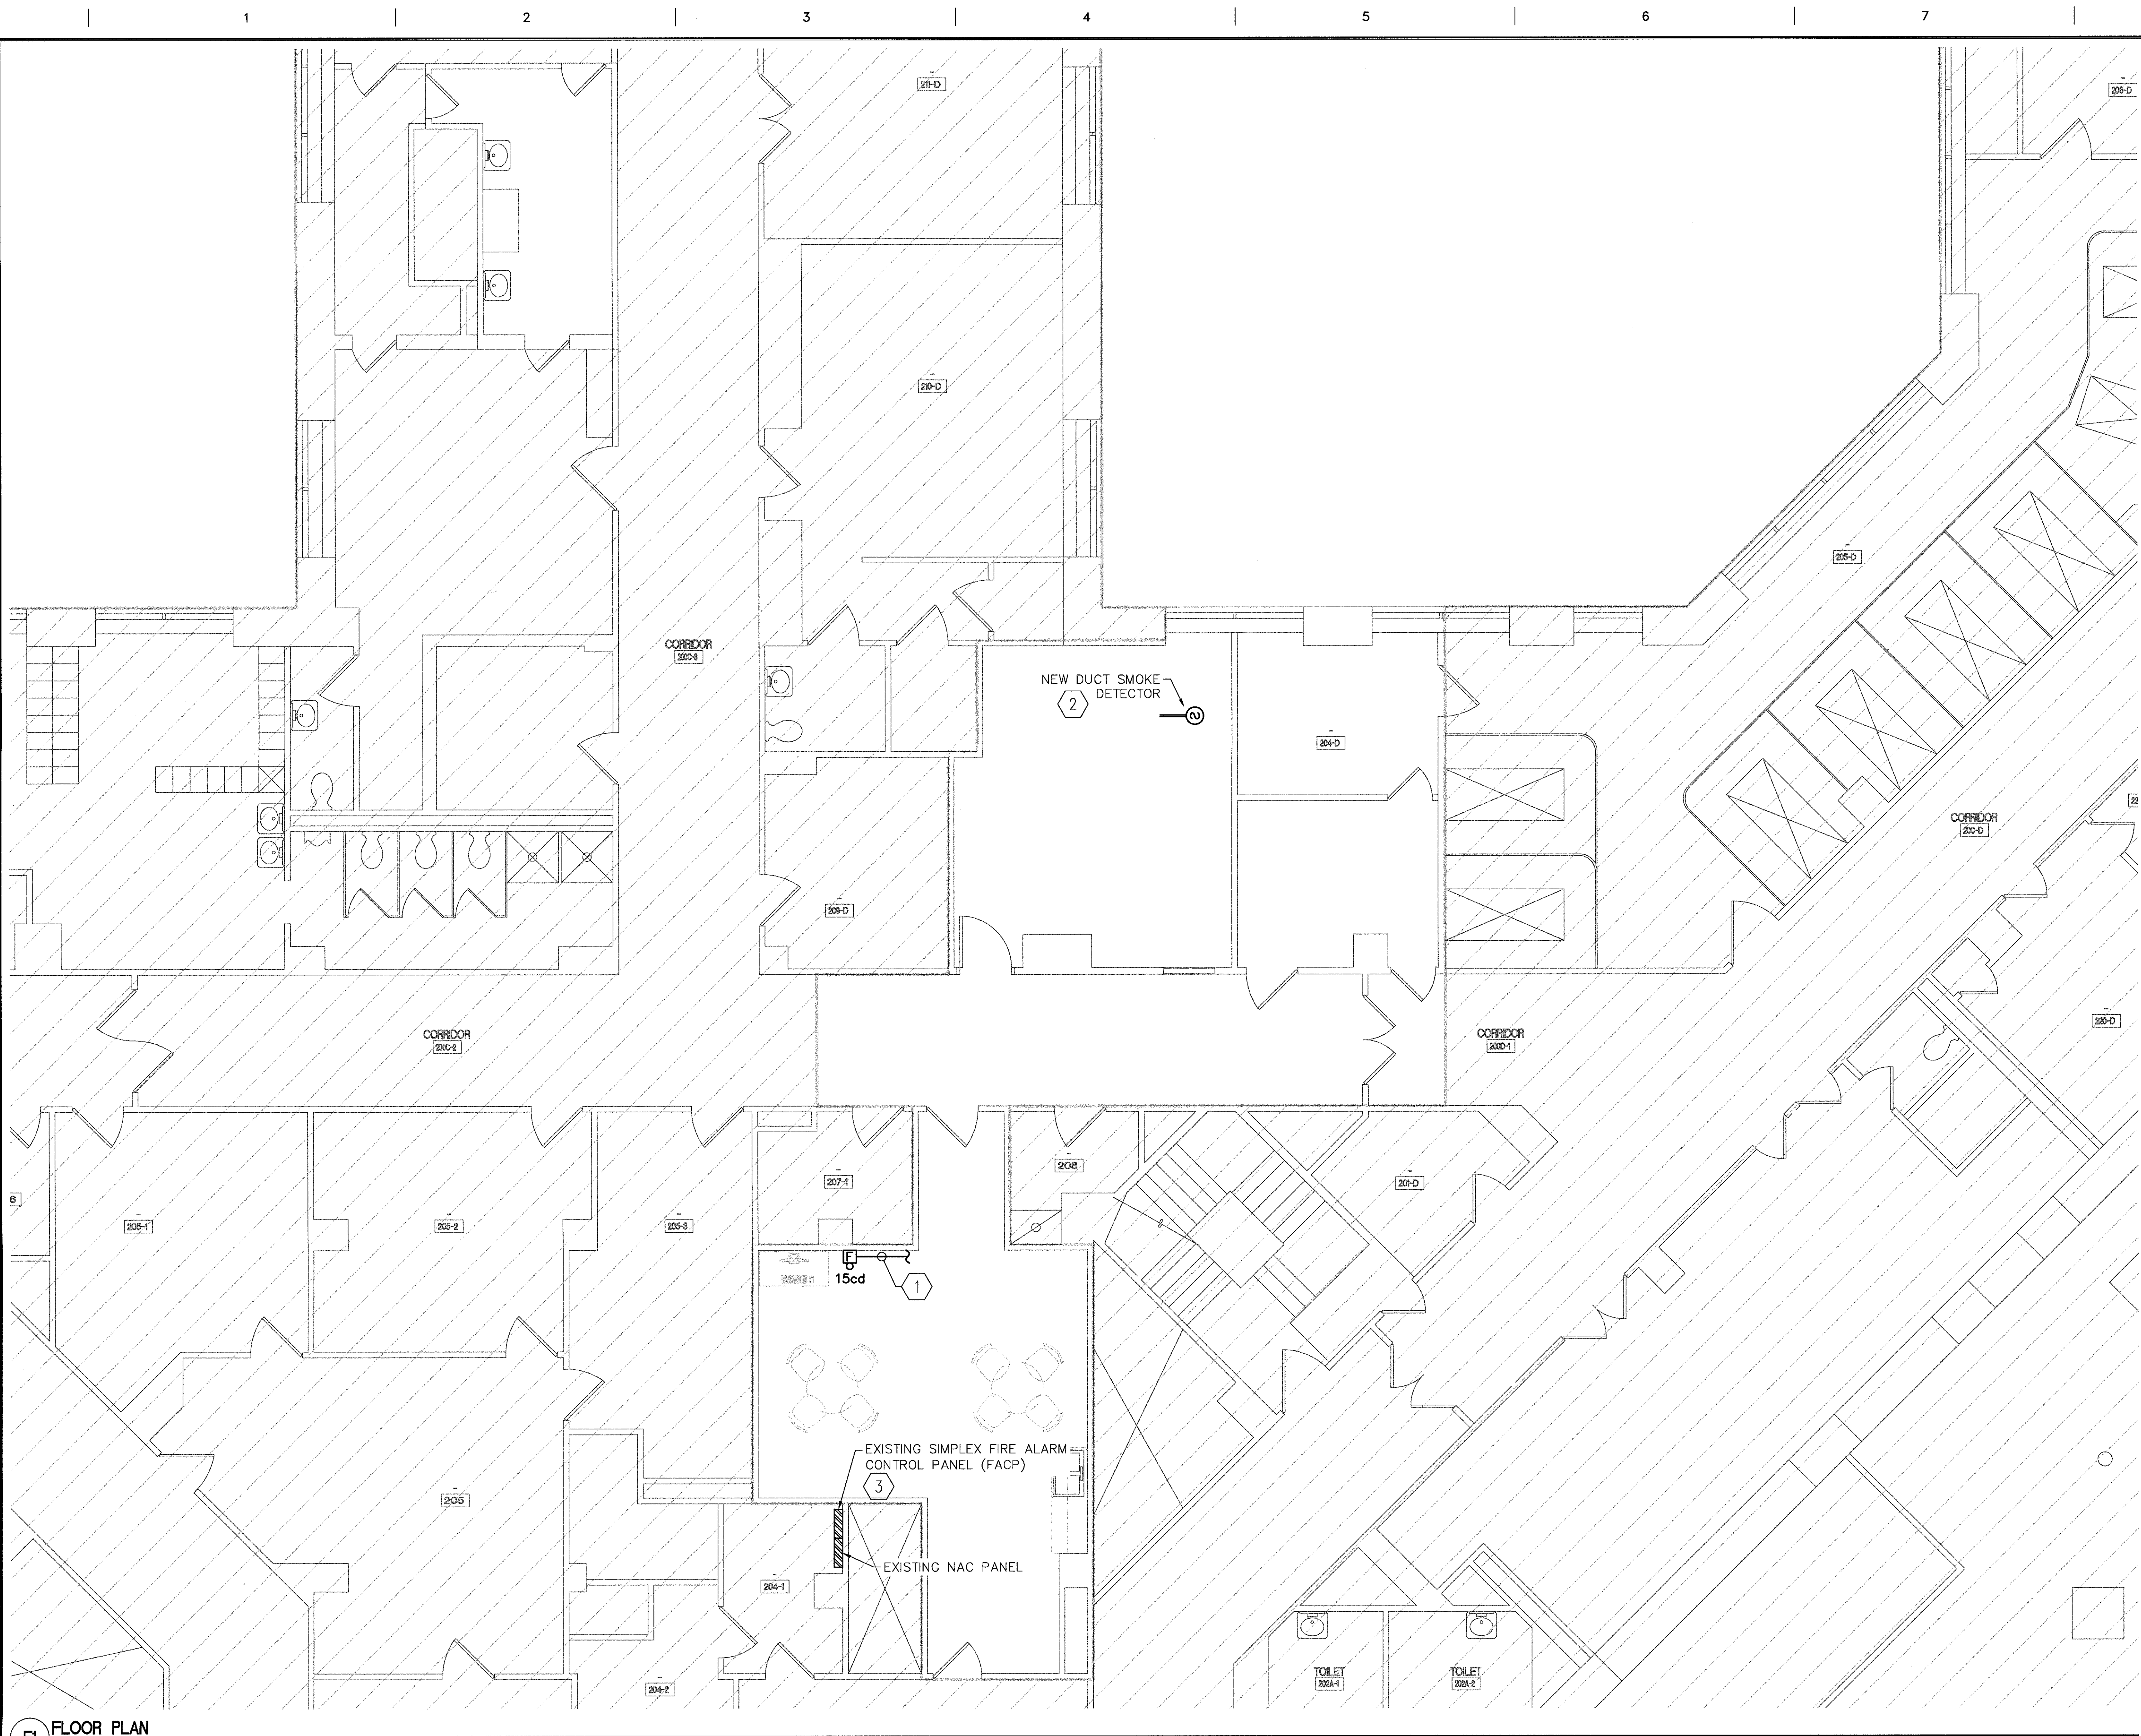


**F1 FLOOR PLAN**  
SCALE 1/4" = 1'-0"

**NOTES**

- A. REFER TO SHEET FA001 FOR LEGEND, ABBREVIATIONS, SCHEDULES AND GENERAL NOTES.
- B. THE ELECTRICAL CONTRACTOR SHALL PROVIDE JUNCTION BOX WITH 3/4 INCH EMPTY CONDUIT ROUTED UP INTO THE ACCESSIBLE CEILING SPACE AND OVER TO THE FIRE ALARM CONTROL PANEL. PROVIDE PULL STRINGS WITHIN THE EMPTY CONDUIT SYSTEM. THE FIRE ALARM CONTRACTOR SHALL PULL FIRE ALARM CABLE FROM JUNCTION BOX (FIRE ALARM DEVICE) TO FACP AND NAC PANEL.
- C. THE FIRE ALARM CONTRACTOR SHALL PROVIDE FINISH COVER PLATE AT EACH FIRE ALARM DEVICE.
- D. THE FIRE ALARM CONTRACTOR SHALL PROVIDE FULLY ENGINEERED SHOP DRAWING SUBMITTALS OF THE PROPOSED WORK PRIOR TO BEGINNING CONSTRUCTION. THE SHOP DRAWINGS SUBMITTALS SHALL INCLUDE BUT NOT LIMITED TO: VOLTAGE DROP CALCULATIONS, BATTERY CALCULATIONS, INSULATION VALUE, LENGTH OF FIRE ALARM WIRE, SLC WIRING, NAC WIRING ETC.
- E. ALL CONDUIT SHALL BE ROUTED IN 3/4 INCH CONDUIT.
- F. FIRE ALARM CONDUIT SHALL BE PAINTED RED IN COLOR.

**KEY NOTES**

- 1. CONNECT TO EXISTING FIRE ALARM NAC CIRCUIT.
- 2. NEW DUCT SMOKE DETECTOR. CONNECT TO EXISTING FIRE ALARM CONTROL PANEL. COORDINATE EXACT LOCATION WITH MECHANICAL CONTRACTOR PRIOR TO INSTALLATION. REFER TO DETAIL F5/FA001
- 3. THE FIRE ALARM CONTRACTOR SHALL PROGRAM THE EXISTING FACP (FIRE ALARM CONTROL PANEL) TO ACCOMMODATE THE NEW DUCT SMOKE DETECTOR.

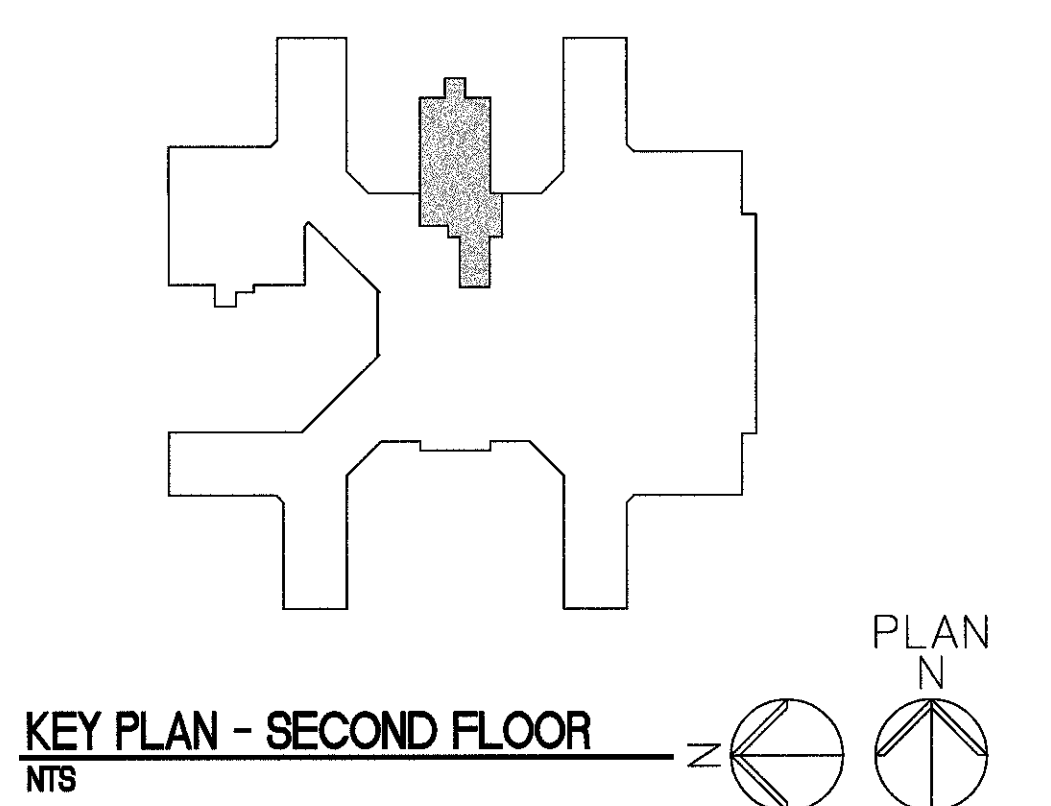

**KEY PLAN - SECOND FLOOR**  
NTS

FULLY SPRINKLERED  
BID DOCUMENTS  
FOR CONSTRUCTION

<b>ISSUED FOR BID</b> Revisions		9-7-2017 Date		VA WESTERN NEW YORK HEALTHCARE SYSTEM 3495 BAILEY AVENUE BUFFALO, NEW YORK 14215		<b>paradigm</b> Architecture   Engineering   Design-Build 200 Envoy Circle, Suite 201 Louisville, KY 40299 www.paradigmusa.com		7 Feb 2018 BLAINE CAMBL VAN GANSEBE 24.789 ARCHITECTURAL PROFESSIONAL stamp		MANAGER DATE ENGINEERING MANAGER DATE INFECTION CONTROL DATE MANAGER DATE SAFETY OFFICER DATE CHIEF OF STAFF DATE		Drawing Title FIRE ALARM PLAN NEW WORK SECOND FLOOR Project Title BUFFALO GU AHU Building Number 1 Checked WLM Drawn MMF Location V.A.M.C. BUFFALO, NEW YORK		Date 09-07-2017 Station No. 528 <b>17-s06-FA102</b>		<b>Office of Facilities</b> Department of Veterans Affairs	
------------------------------------	--	------------------	--	--	--	---	--	--	--	--	--	---	--	---	--	---	--