

VA STANDARD FINISHES AND MATERIALS

GOOE BASE:
ROFFE 1/8" VINYL, P178 PEWTER
VCT:
ARMSTRONG IMPERIAL TEXTURE STANDARD EXCELON
#51889 COOL WHITE, 12"x12"x1/8"
CARPET: **VA WILL PROVIDE**
INSTALL VA SUPPLIED CARPET TILES PER MANUFACTURERS SPECIFICATIONS. VA WILL ONLY SUPPLY CARPET TILES.
CONTRACTOR IS RESPONSIBLE FOR ADHESIVE AND TRANSITION STRIPS.

METAL STUDS:
4" METAL STUDS @ 16" O.C., 20 GA. TO METAL DECK ABOVE.
GYP. BD.
5/8" TYPE "X" GYP BD.
FIRESTOPPING:
HILLI PRODUCTS, PROVIDE SUBMITTALS
CEILING GRID:
CHICKO METALIC 1200 (15/16"), WHITE.
CEILING TILES:
CELUTEX SOFTONE CASHMERE
24"x24"x3/4", CM-467, WHITE SQUARE FACTORY SPECIAL.
COLORS:
STANDARD WALL: PITTSBURGH PAINTS WHITE, SF02-905, EGGSHELL
RED DOOR FRAMES: PITTSBURGH PAINTS, 07-335, SEMI-GLOSS.

CONTACT:
SCOTT COOPER
PPG ARCHITECTURAL FINISHES, INC.
10944 E. JEFFERSON AVE.
DETROIT, MI 48214
WALQUARDS (IF NEEDED)
FEBELITE FINISH
ONSTER GRAY MOUNTING BRACKETS AND TRIM PIECES AS REQUIRED.

REFLECTED CEILING NOTES:

INSTALL NEW CEILING AT EXISTING HEIGHT (9'-0").
CLEAN AND REINSTALL CEILING MOUNTED ACCESSORIES.

LIGHTING NOTES:

CONTRACTOR TO INSTALL NEW FLUORESCENT FIXTURES AS SPECIFIED BY VA.
REWORK SWITCHING TO DUAL LEVEL LIGHTING.

DOORS & FRAME:
DOORS: 3'-0"x7'-0"x1-3/4" SOLID WOOD DOOR, PAINT SIGNED RED OAK VENEER, 1 COAT SEALER, 2 COATS STAINLESS STEEL FINISH PAINTS, 5/8" MAX UNDERCUT PROVIDE PLASTIC BUSHING TO KICKERATE ON ALL DOORS (EXTERIOR SIDE), PROVIDE FLOOR STOPS ON ALL DOORS.

FRAME:
AWMED PREPARED, HM OR KO
DOOR HARDWARE:
VAL 8807 FL W/MICRO SHIELD
DOOR LOCKER
DOOR LUNGE
7 PIN REMOVABLE CORE
GC - KEYWAY BLANK, 0 BIT, 2 KEYS
MCKINNEY HINGES
PROVIDE FLOOR STOPS
PROVIDE SUBMITTALS FOR APPROVAL

ARCHITECTURAL NOTES:

1. PROVIDE MATERIALS AND CONSTRUCT NEW WALLS AS SHOWN ON DRAWINGS. PROVIDE AND BATS FOR NEW WALLS. PROVIDE SUBMITTALS FOR APPROVAL. NEW WALLS TO DECK ABOVE.
2. PROVIDE MATERIALS AND REPAIR EXISTING WALLS AFFECTED BY THE RENOVATION.
3. PROVIDE AND INSTALL NEW COVE BASE IN NEW ROOMS AND ON CORRIDOR SIDE.
4. REMOVE AND RENOV/INSTALL NEW WALLCLOARS IN ALL ROOMS. PROVIDE SUBMITTALS FOR APPROVAL.
5. PATCH AND PAINT ALL INTERIOR WALLS. PATCH ALL EXISTING WALLS. PROVIDE 200A METAL BACKING IN RENOVATION. PAINT TO BREAK OR LOCAL STOPPING POINT.
6. CONTRACTOR TO REMOVE AND REMOVE AS SPECIFIED ON DRAWINGS.
7. INSTALL VA PROVIDED CARPET TILES. CONTRACTOR TO SUPPLY ADHESIVE, TRANSITION STRIPS AND TOOLS. PREP FLOOR AS REQUIRED BY MANUFACTURER.
8. PROVIDE MATERIALS TO REPAIR WALLS WITH 1/2" GYP BD. REPAIR ALL WALLS AFFECTED BY RENOVATION AND USE HILLI AFFRISO PRODUCTS.
9. PROVIDE AND INSTALL CEILING SYSTEM AS SPECIFIED.
10. PROVIDE MATERIALS AND RENOV ELECTRICAL AS SHOWN ON DRAWINGS. MATCH EXISTING HOSPITAL PRONG DEVICES. SUB CONTRACTOR ABOVE CEILING FOR RENOVATION. PROVIDE 200A METAL BACKING IN RENOVATION. PAINT TO BREAK OR LOCAL STOPPING POINT.
11. PROVIDE MATERIALS TO RENOV EXISTING MECHANICAL SYSTEM AS SHOWN. INSTALL PER APPLICABLE CODES AND STANDARDS.

SYMBOLS

- EXISTING DOOR AND FRAME TO BE REMOVED
- EXISTING WALL TO BE REMOVED
- EXISTING WALL
- NEW WALL
- EXISTING TO BE REMOVED

DEMOLITION NOTES:


- REMOVE EXISTING FLOORING.
- REMOVE EXISTING COVE BASE.
- REMOVE EXISTING WALL MOUNTED ACCESSORIES AND RETURN TO VA.
- REMOVE LOCKERS AND RETURN TO VA.
- REMOVE SHEET WALL PROTECTION.
- REMOVE EXISTING CEILING SYSTEM INCLUDING LIGHTS, GRILLES, SPEAKERS, ETC. VA WILL RENOV SPRINKLERS IF REQUIRED.
- REMOVE DOORS AND FRAMES SHOWN ON DRAWINGS.
- REMOVE WALLCLOARS AS REQUIRED FOR NEW DOOR OPENINGS. PROVIDE NEW WALLCLOARD AND RENOV AS REQUIRED.

REMOVE ELECTRICAL DEVICES AS SHOWN ON DRAWINGS.
REMOVE PLUMBING FIXTURES SHOWN ON DRAWINGS.
REMOVE EXISTING CEILING SYSTEM INCLUDING LIGHTS, GRILLES, SPEAKERS, ETC. VA WILL RENOV SPRINKLERS IF REQUIRED.
REMOVE DOORS AND FRAMES SHOWN ON DRAWINGS.
REMOVE WALLCLOARS AS REQUIRED FOR NEW DOOR OPENINGS. PROVIDE NEW WALLCLOARD AND RENOV AS REQUIRED.

REMOVE TEMPERARY GYP BD. PARTITION AS SHOWN ON DRAWINGS.
INCLUDE LOCKABLE DOOR.
FRAME DOOR OPENING WITH METAL STUD AND GYP BD. PANEL. INCLUDE INSULATION SECURE TO EXISTING OPENING. CHALKY SEAL.

PROPOSED PLAN

SCALE: 1/8"=1'-0"

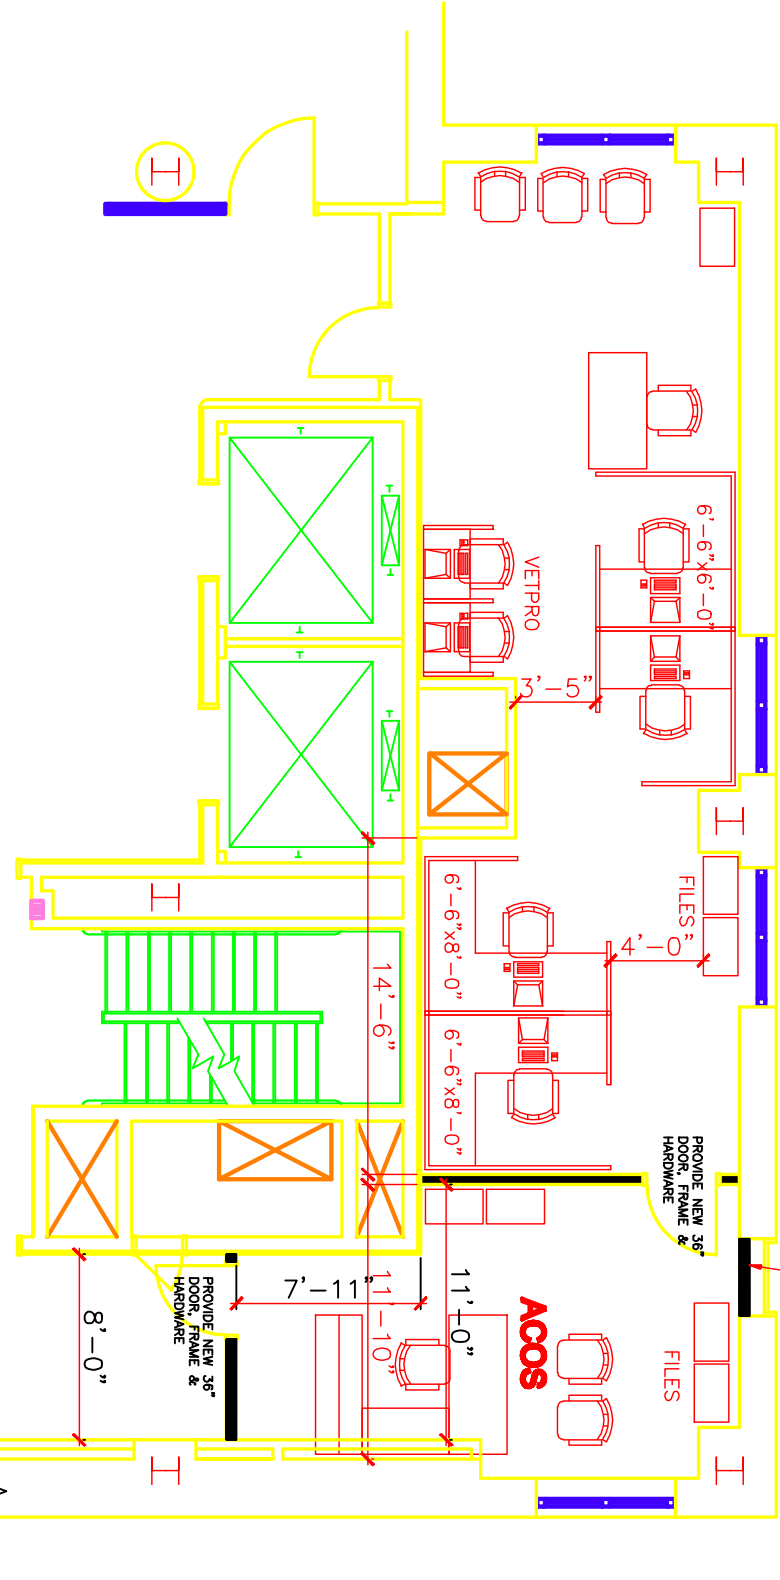

LIGHTING NOTES:


NEW FLUORESCENT FIXTURES TO BE 2'x4' ROOFER, 4' DEEP, 18 CELL. LUMENS ARE 1235. PRE-COLORED FINISH 18. ELECTRONIC BALLASTS FOR SUBMITTALS FOR APPROVAL.

REFLECTED CEILING NOTES:

- PROVIDE AND INSTALL NEW FLUORESCENT FIXTURES AS SPECIFIED.
- PROVIDE AND INSTALL CEILING TILES AND GRID AS SPECIFIED.
- CLEAN AND REINSTALL CEILING MOUNTED ITEMS.
- EXISTING SPRINKLER HEAD
- RELOCATED SPRINKLER HEAD
- NEW SPRINKLER HEAD
- VA WILL RENOV SPRINKLERS


DEMOLITION PLAN

SCALE: 1/8"=1'-0"

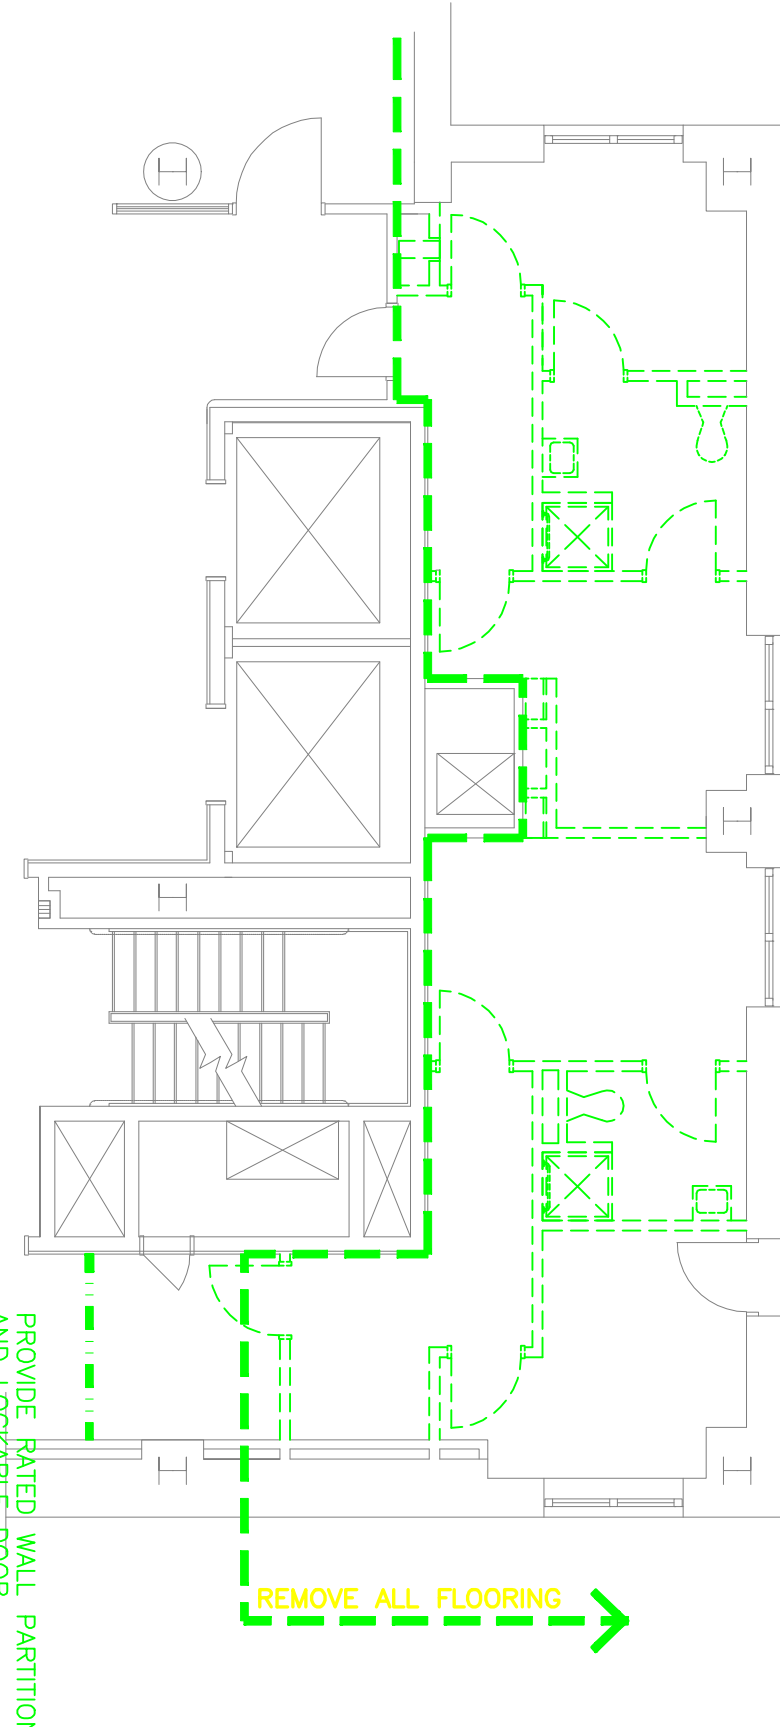


PROPOSED REFLECTED CEILING PLAN

SCALE: 1/8"=1'-0"

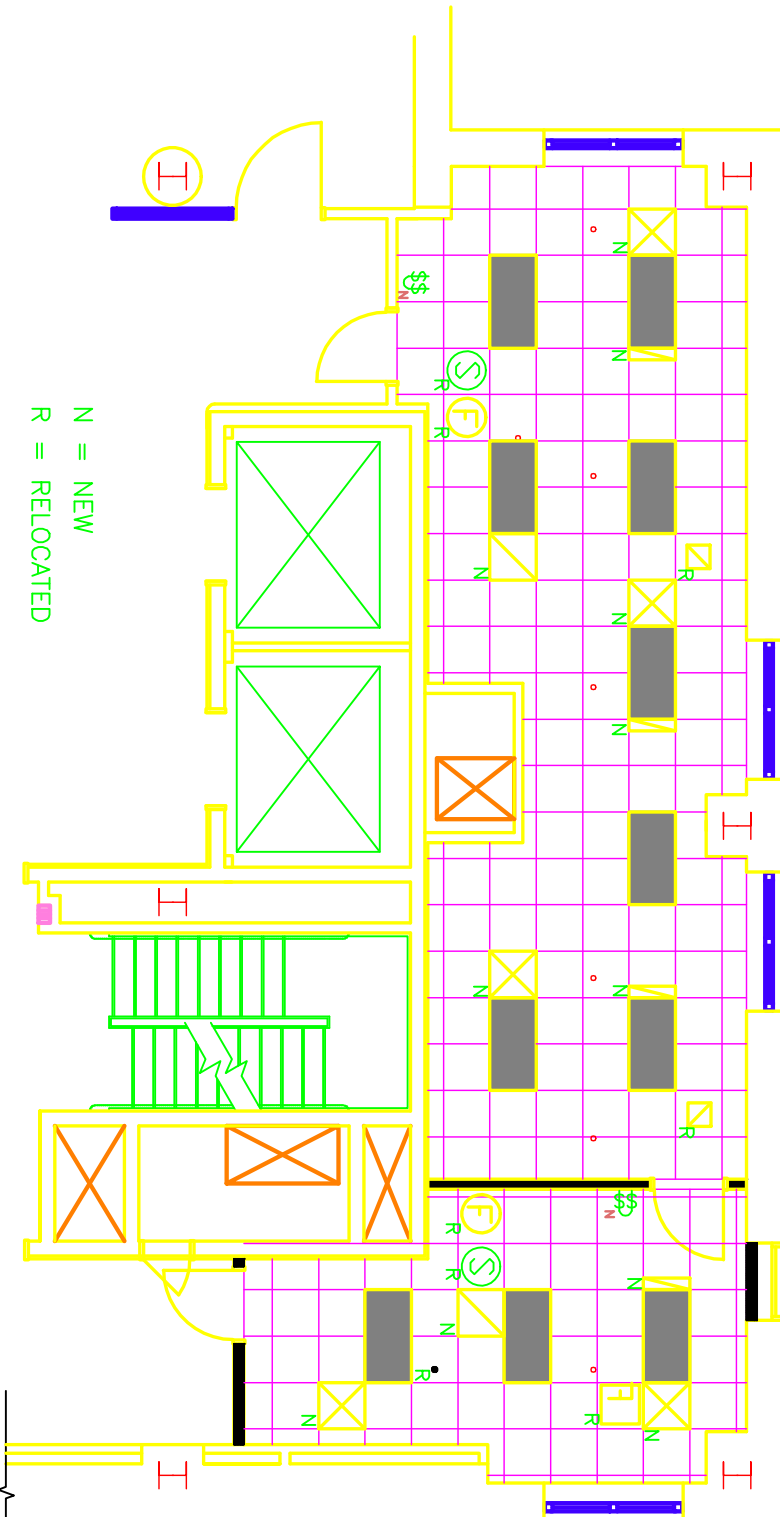

EXISTING REFLECTED CEILING PLAN

SCALE: 1/8"=1'-0"

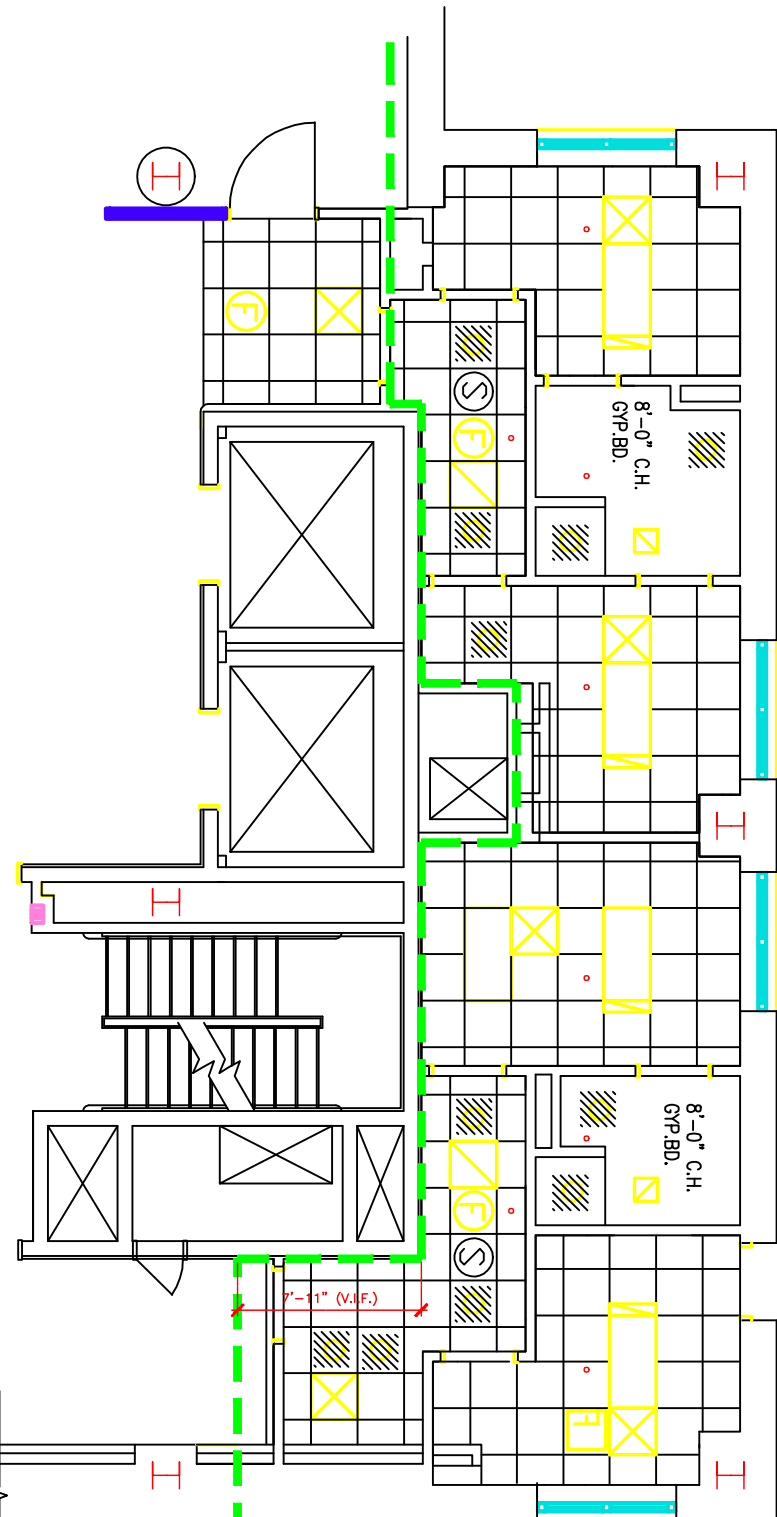

NOTE:
FURNITURE SHOWN FOR REFERENCE

NOTE:
APPROXIMATE SPRINKLER LOCATIONS ARE SHOWN ON PLAN. VA WILL RELOCATE IF REQUIRED.

EXISTING PLAN

SCALE: 1/8"=1'-0"

