


three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one quarter inch = one foot
one eighth inch = one foot
one sixteenth inch = one foot

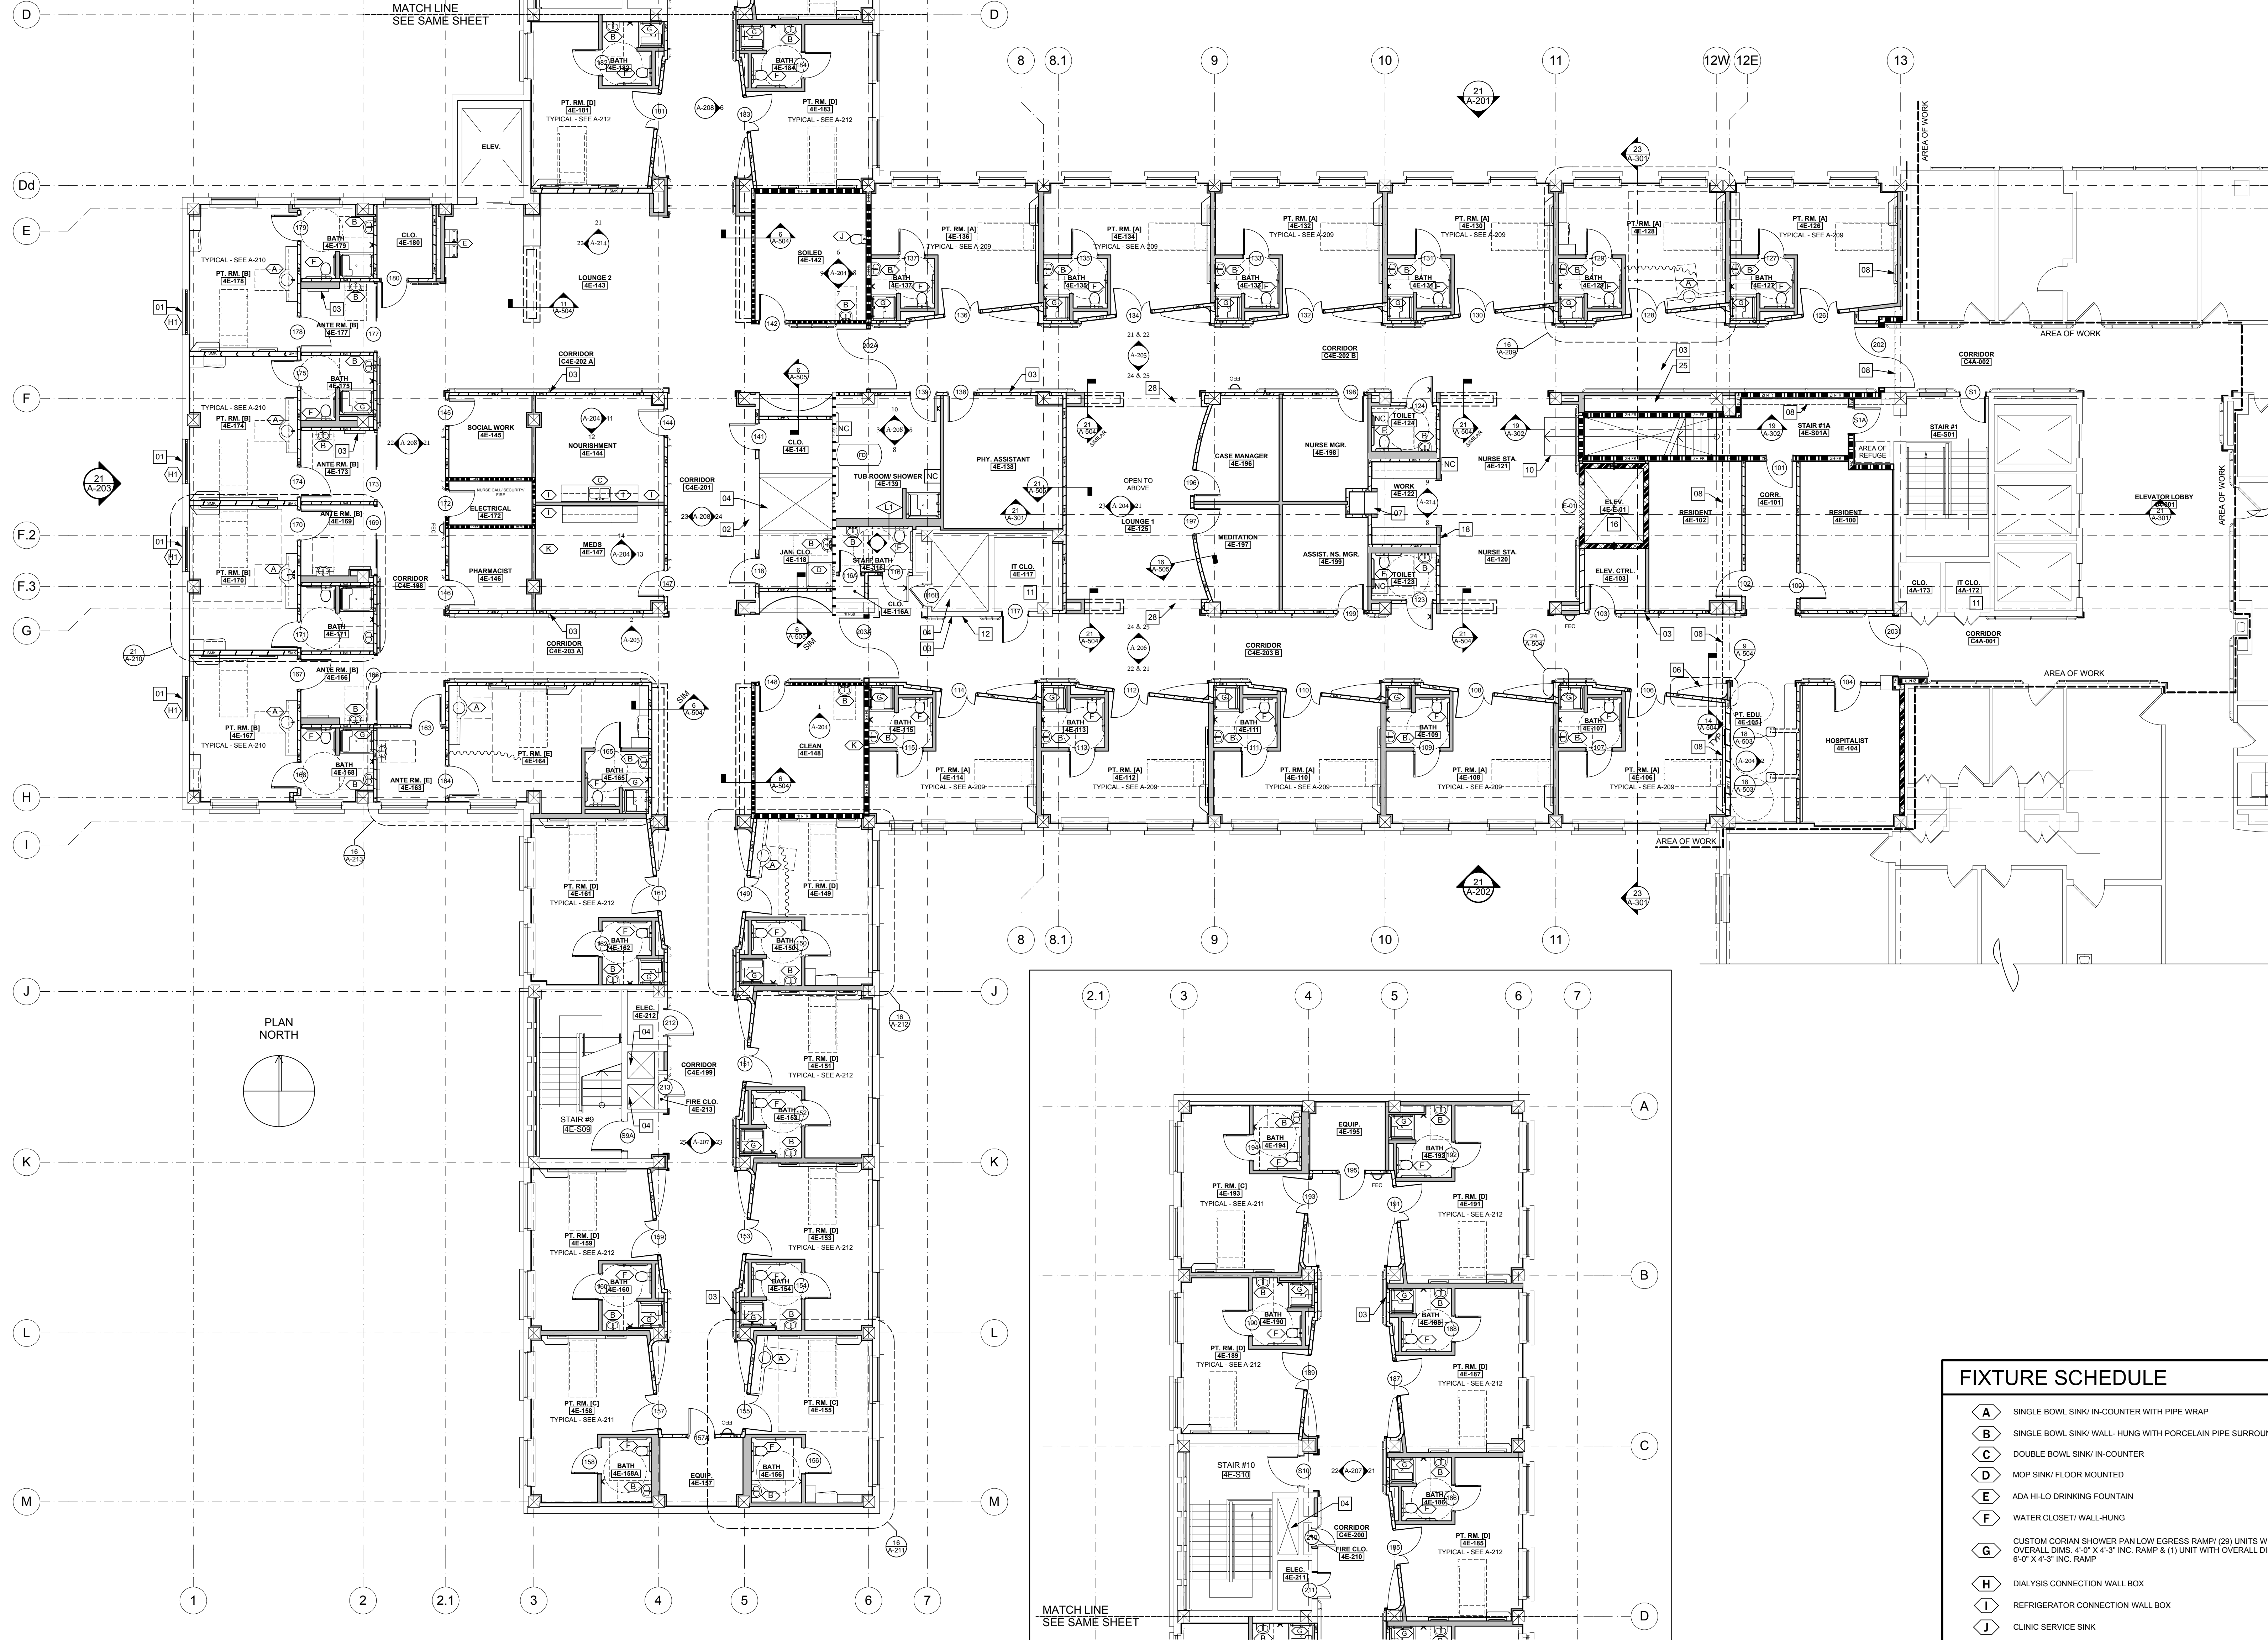

21
A-109
4E FLOOR PLAN
SCALE: 1/8" = 1'-0"

PLAN GENERAL NOTES

1. ALL PARTITIONS THAT MEET EXTERIOR WALLS @ WINDOWS ARE TO BE CENTERED ON WINDOW MULLIONS UNO.
2. NOT USED.
3. FURNITURE AND EQUIPMENT MAY BE SHOWN FOR COORDINATION PURPOSES ONLY AND IS LABELED N/C. SEE EQUIPMENT/FURNITURE PLAN.
4. ALL BATHROOM FIXTURES ARE TO BE INSTALLED TO MEET OR EXCEED MINIMUM STANDARDS, AND TO BE PROVIDED WITH COMPLIANT ACCESSORIES AT APPROPRIATE MOUNTING HEIGHTS PER CODES CITED ON COVER SHEET.
5. PROVIDE ALL BLOCKING FOR UPPER AND LOWER CABINETS, ACCESSORIES, WHICH INCLUDE BUT ARE NOT LIMITED TO: HAND GUARD RAIL, CRASH RAIL, GRAB BARS, AND TELEVISIONS.
6. MINIMUM SPACE REQUIREMENTS PROVIDED FOR ENCLOSED PLUMBING FIXTURE SUPPORTS. SEE DIMENSION PLAN.
7. DEMOLISH EXISTING LAYER & RELAMINATE INTERIOR OF EXTERIOR WALLS WITH NEW 5/8" GWB.
8. SEE ROOM FINISH SCHEDULE FOR ALL ROOM ACCESSORIES.
9. ALL EXISTING EXPOSED STEEL COLUMNS TO HAVE SPRAY APPLIED FIREPROOFING TO ACHIEVE 2-HR FIRE RATED. ALL EXISTING EXTERIOR WALL AND NEW TUBE ST. COLUMNS TO BE ENCLOSED WITH GWB TO ACHIEVE 2-HR FIRE RATING OR RECEIVE SPRAY-ON FIREPROOFING. SEE DETAILS.
10. ALL NON-ISOLATED WORK ON FLOORS OTHER THAN FOURTH FLOOR TO BE COMPLETED AFTER BUSINESS HOURS AND/OR ESTABLISHED BY VACOTR.
11. ALL SLAB PENETRATIONS MUST BE X-RAYED FOR EXISTING REINFORCEMENT IDENTIFICATION PRIOR TO CORE DRILL AND REVIEWED BY STRUCTURAL ENGINEER.
12. ALL SECTION/PLAN DETAILS MARKED AND LOCATED IN TYPICAL PATIENT ROOMS - TYPES "A", "B", "C", "D", "E", "F", "G", "H", "I", "J", "K", "L", "M", "N", "O", "P", "Q", "R", "S", "T", "U", "V", "W", "X", "Y", "Z" ARE STANDARD FOR ALL PATIENT ROOM TYPES.
13. ROOM SIGNAGE IS REQUIRED AT EACH ROOM PER SPECIFICATIONS. INCLUDE GINKGO LEAF DESIGN SHOWN IN DETAIL XX SHEET A-XXX. PROVIDE SUBMITTAL FOR REVIEW.

PLAN SYMBOL LEGEND

- COAT HOOK - SEE FINISH LEGEND
- FLOOR DRAIN - CENTER IN ROOM U.N.O. / SEE PLUMBING
- CORNER GUARD - WP3 IN 4E WING, WP6 IN ELEVATOR 4A-001, C4A-001 AND C4A-002
- CORNER GUARD - WP7 IN 4E WING.
- HAND/ CRASH RAIL, CONTINUOUS, AS SHOWN IN PLAN & ELEV. / FINISH LEGEND, WP12 IN 4E WING, WP34 IN ELEVATOR 4A-001, C4A-001 AND C4A-002
- FIRE EXTINGUISHER CABINET - FULLY RECESSED
- WALL TYPE
- DOOR TAG - SEE DOOR SCHEDULE
- WINDOW TAG
- CEILING MOUNTED PRIVACY CURTAIN PER FINISH SPECIFICATIONS
- NURSE CALL - PULL STATIONS IN TOILET AND WASH ROOMS, CALL BOXES AT PATIENT HEADWALLS, INDICATOR LIGHTS ABOVE DOORS, AND CONTROL STATIONS AT NURSES STATIONS. PROVIDE RAULAND RESPONDER 5 SYSTEM. HOSPITAL STANDARDS - SEE SPECIFICATION.

PLAN KEY NOTES

1. NEW EXT. WALL OPENING AND WINDOW: SEE STRUCTURAL AND INTERIOR DETAILS
2. LOCATION FOR OWNER PROVIDED MEDICAL CART(S)
3. PERSONAL PROTECTION DISPENSING UNIT BY SAGE PRODUCTS INC. (SAGEPRODUCTS.COM) WALL MOUNTED ITEM #565
4. EXISTING SHAFT
5. MODULAR GREEN ROOF TRAY SYSTEM - SEE STRUCTURAL DWGS FOR SUPPORT STRUCTURE. BASIS OF DESIGN: GREENGRID G3 EXTENSIVE MODULES
6. BENCH - TYPICAL. SEE DETAILS ON SHEET A-504.
7. PNEUMATIC TUBE STATION. PROVIDE & INSTALL EXTENSION FROM EXISTING HOSPITAL SYSTEM TO STATIONS SHOWN/ INCLUDE TUBING & TRANSFER UNITS. SEE SPECIFICATIONS.
8. C/S GROUP 2' CONT. EXTRUDED ALUMINUM EXPANSION JOINT FRAME & GASKET IN COLOR 136 GRAY. GFT-100-27' PROVIDE AND INSTALL ON WALL AND FLOOR. USE UL ASSEMBLY FF-D-0045 AT FLOOR AND WW-D-0048 AT WALLS WHERE REQD.
9. MULTIMEDIA INPUT PANEL ABOVE CEILING AT PROJECTOR LOCATION (SEE RCP). SEE TELECOM DWGS.
10. AREA OF 2-HR SHAFTHALL CEILING CONSTRUCTION BELOW NEW STAIRCASE. SEE STAIR SECTION 19 ON SHEET A-302.
11. COORDINATE ALL WORK IN EXISTING AND NEW IT ROOMS WITH VACOTR PRIOR TO DEMOLITION OF EXISTING. PROVIDE AND INSTALL WALL MOUNTED 18" RACK FOR 96-POSITION DATA JACK FIELD (UL FOR OPTICAL, FIBER PATCH ETHERNET SWITCH (1) 110 PUNCHDOWN BLOCK FOR VOICE AND COPPER RISERS IN EACH ROOMS.
12. WALK PADS (TYP.) - SEE DETAIL NEXT SHEET
13. NOT USED
14. NOT USED
15. NOT USED
16. 2,000 LB FRONT OPENING MACHINE-ROOMLESS ELEVATOR WITH EMERGENCY BATTERY BACKUP/ BASIS OF DESIGN: FLUTEC T-ALON
17. NOT USED
18. SOUND SYSTEM- AMPLIFIER BY TDA- MODEL BG-1120/ SEE RCP FOR SPKR. LOCATIONS AND SEE ELECTRICAL FOR SPKR. CONTROLS/ DAISY CHAIN WESTIN WIRE #22x18 GAGE TWISTED-PAIR, JACKETED/ FROM DEVICE TO SPEAKERS AND CONTROLS
19. RECONSTRUCTION WALL TO BE 2 HOUR RATED - MEET PARTITION TYPE "H" CONSTRUCTION
20. NOT USED
21. NOT USED
22. ROOF LADDER (BASIS OF DESIGN - ALACO MODEL 561)
23. NOT USED
24. FIRE PROTECTION VALVE CABINET
25. FIRE PROTECTION PIPE CHASE
26. NOT USED
27. STEEL PAN STAIR AND ELEVATED SLAB AT PENTHOUSE EXIT
28. DRAFT CURTAIN ABOVE - SEE RCP
29. PROVIDE CONT. S.S. GUARDRAIL AT SECONDARY EGRESS PATH ACROSS ROOF ON ROOF EDGE SIDE
30. LOCATION OF NEW SKYLIGHT POPUP IN EXISTING ROOF. SEE RCP & PRODUCT LITERATURE FOR ACCEPTABLE LOCATION. COORD. W/ EXISTING ROOF EQUIP.
31. ANTENNA GUY-WIRE MOUNT LOCATION TO BE RELOCATED BY VAMC. COORDINATE WITH VACOTR
32. PROVIDE WINDOW COVERINGS ON ALL EXTERIOR WINDOWS (WC2) PER FINISH LEGEND.
33. PROVIDE BLACKOUT WINDOW COVERINGS ON ALL EXTERIOR WINDOWS (WC1) PER FINISH LEGEND.

FIXTURE SCHEDULE


A	SINGLE BOWL SINK/ IN-COUNTER WITH PIPE WRAP
B	SINGLE BOWL SINK/ WALL- HUNG WITH PORCELAIN PIPE SURROUND
C	DOUBLE BOWL SINK/ IN-COUNTER
D	MOP SINK/ FLOOR MOUNTED
E	ADA HI-LO DRINKING FOUNTAIN
F	WATER CLOSET/ WALL-HUNG
G	CUSTOM CORIAN SHOWER PAN LOW EGRESS RAMP/ (20) UNITS WITH OVERALL DIMS. 4'-0" X 4'-3" INC. RAMP & (1) UNIT WITH OVERALL DIMS. 6'-0" X 4'-3" INC. RAMP
H	DIALYSIS CONNECTION WALL BOX
I	REFRIGERATOR CONNECTION WALL BOX
J	CLINIC SERVICE SINK
K	UTILITY CONNECTION BOX

WALL SCHEDULE

EXISTING	SMOKE BARRIER (1-HR)- TYPE 'E' UNO
NEW- TYPE 'C1' UNO	FIRE RATED (1-HR)- TYPE 'G1' UNO
NEW PARTIAL HEIGHT- TYPE 'C1' UNO/ SEE ELEVATIONS FOR HEIGHT	FIRE RATED (2-HR)- TYPE 'H1' UNO
SMOKE PARTITION- TYPE 'D1' UNO	SHAFTWALL (2-HR)- TYPE 'J' UNO

CONSTRUCTION DOCUMENTS 100% SUBMITTAL- FOR BID	06/13/2012
CONSTRUCTION DOCUMENTS 100% SUBMITTAL	06/22/2011
CONSTRUCTION DOCUMENTS 95% SUBMITTAL	02/01/2011
DESIGN DEVELOPMENT 50% SUBMITTAL	06/21/2010
SCHEMATIC DESIGN 15% SUBMITTAL	05/03/2010
Revisions:	Date

CONSULTANTS:	
MEP DAVID WRIGHT CCRD PARTNERS 3311 W. BROAD ST. RICHMOND, VA 23230 (804) 355-2067	STRUCTURAL JOHN HANCOCK STROUD-PENCE & ASSOC. 4198 COX RD., SUITE #110 GLEN ALLEN, VA 23060 (804) 346-3935
LIFE SAFETY FERNANDO ESCALANTE RHINO FIRE PROT. ENG. PLC 12359 SUNRISE VALLEY DR. SUITE #350 RESTON, VA 20191 (703) 476-5034	

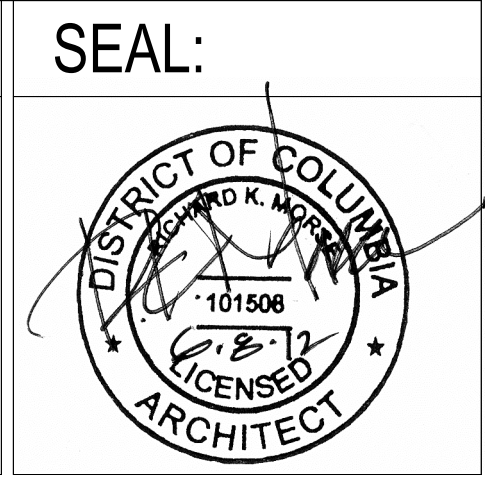

ARCHITECT/ENGINEERS:
CORNER
23 West Broad St., Suite 200
Richmond, Virginia 23220
Telephone: 804.353.3051
Facsimile: 804.355.1442
Webpage: www.csarch.com

CA PROJECT 00938.02

Drawing Title	4E FLOOR PLAN
Approved: Project Director	

Project Title	VA MEDICAL CENTER 4E PATIENT WARD EXPANSION
Location	WASHINGTON DC
Date	04/20/2010
Checked	RKM
Drawn	CMH/LRC/ ANP/ERO/EAR
Project Number	688-336
Building Number	E
Drawing Number	A-109

FULLY SPRINKLERED

Office of
Facilities
Management

Department of
Veterans Affairs