


NOTES:

1. PROVIDE 1/2" EXPANSION MATERIAL AT EXISTING CONCRETE JOINTS, BUILDINGS & ADJACENT TO C & G.
2. PROVIDE FULL DEPTH EXPANSION JOINT WITH 1/2" EXPANSION MATERIAL AT 60' INTERVALS.
3. SCORE 1" DEEP AT AN INTERVAL TO APPROXIMATE SQUARE DESIGN.
4. PROVIDE #4 DOWELS 12" O.C. AT CONSTRUCTION JOINTS.
5. EXPANSION JOINTS SHALL BE LOCATED AT ALL CONCRETE WALK INTERSECTIONS, DOOR OPENINGS AND BUILDING WALLS.
6. CROSS SLOPE 1% FROM BUILDINGS, LONGITUDINAL SLOPE 5% MAX.
7. DIRT GRADE FROM TOP OF WALK TO BE 8:1 TO MATCH EXISTING GRADE.
7. CENTER OF SIDEWALK SHOULD CROWN TO ALLOW WATER RUNOFF.

SIDEWALK DETAIL

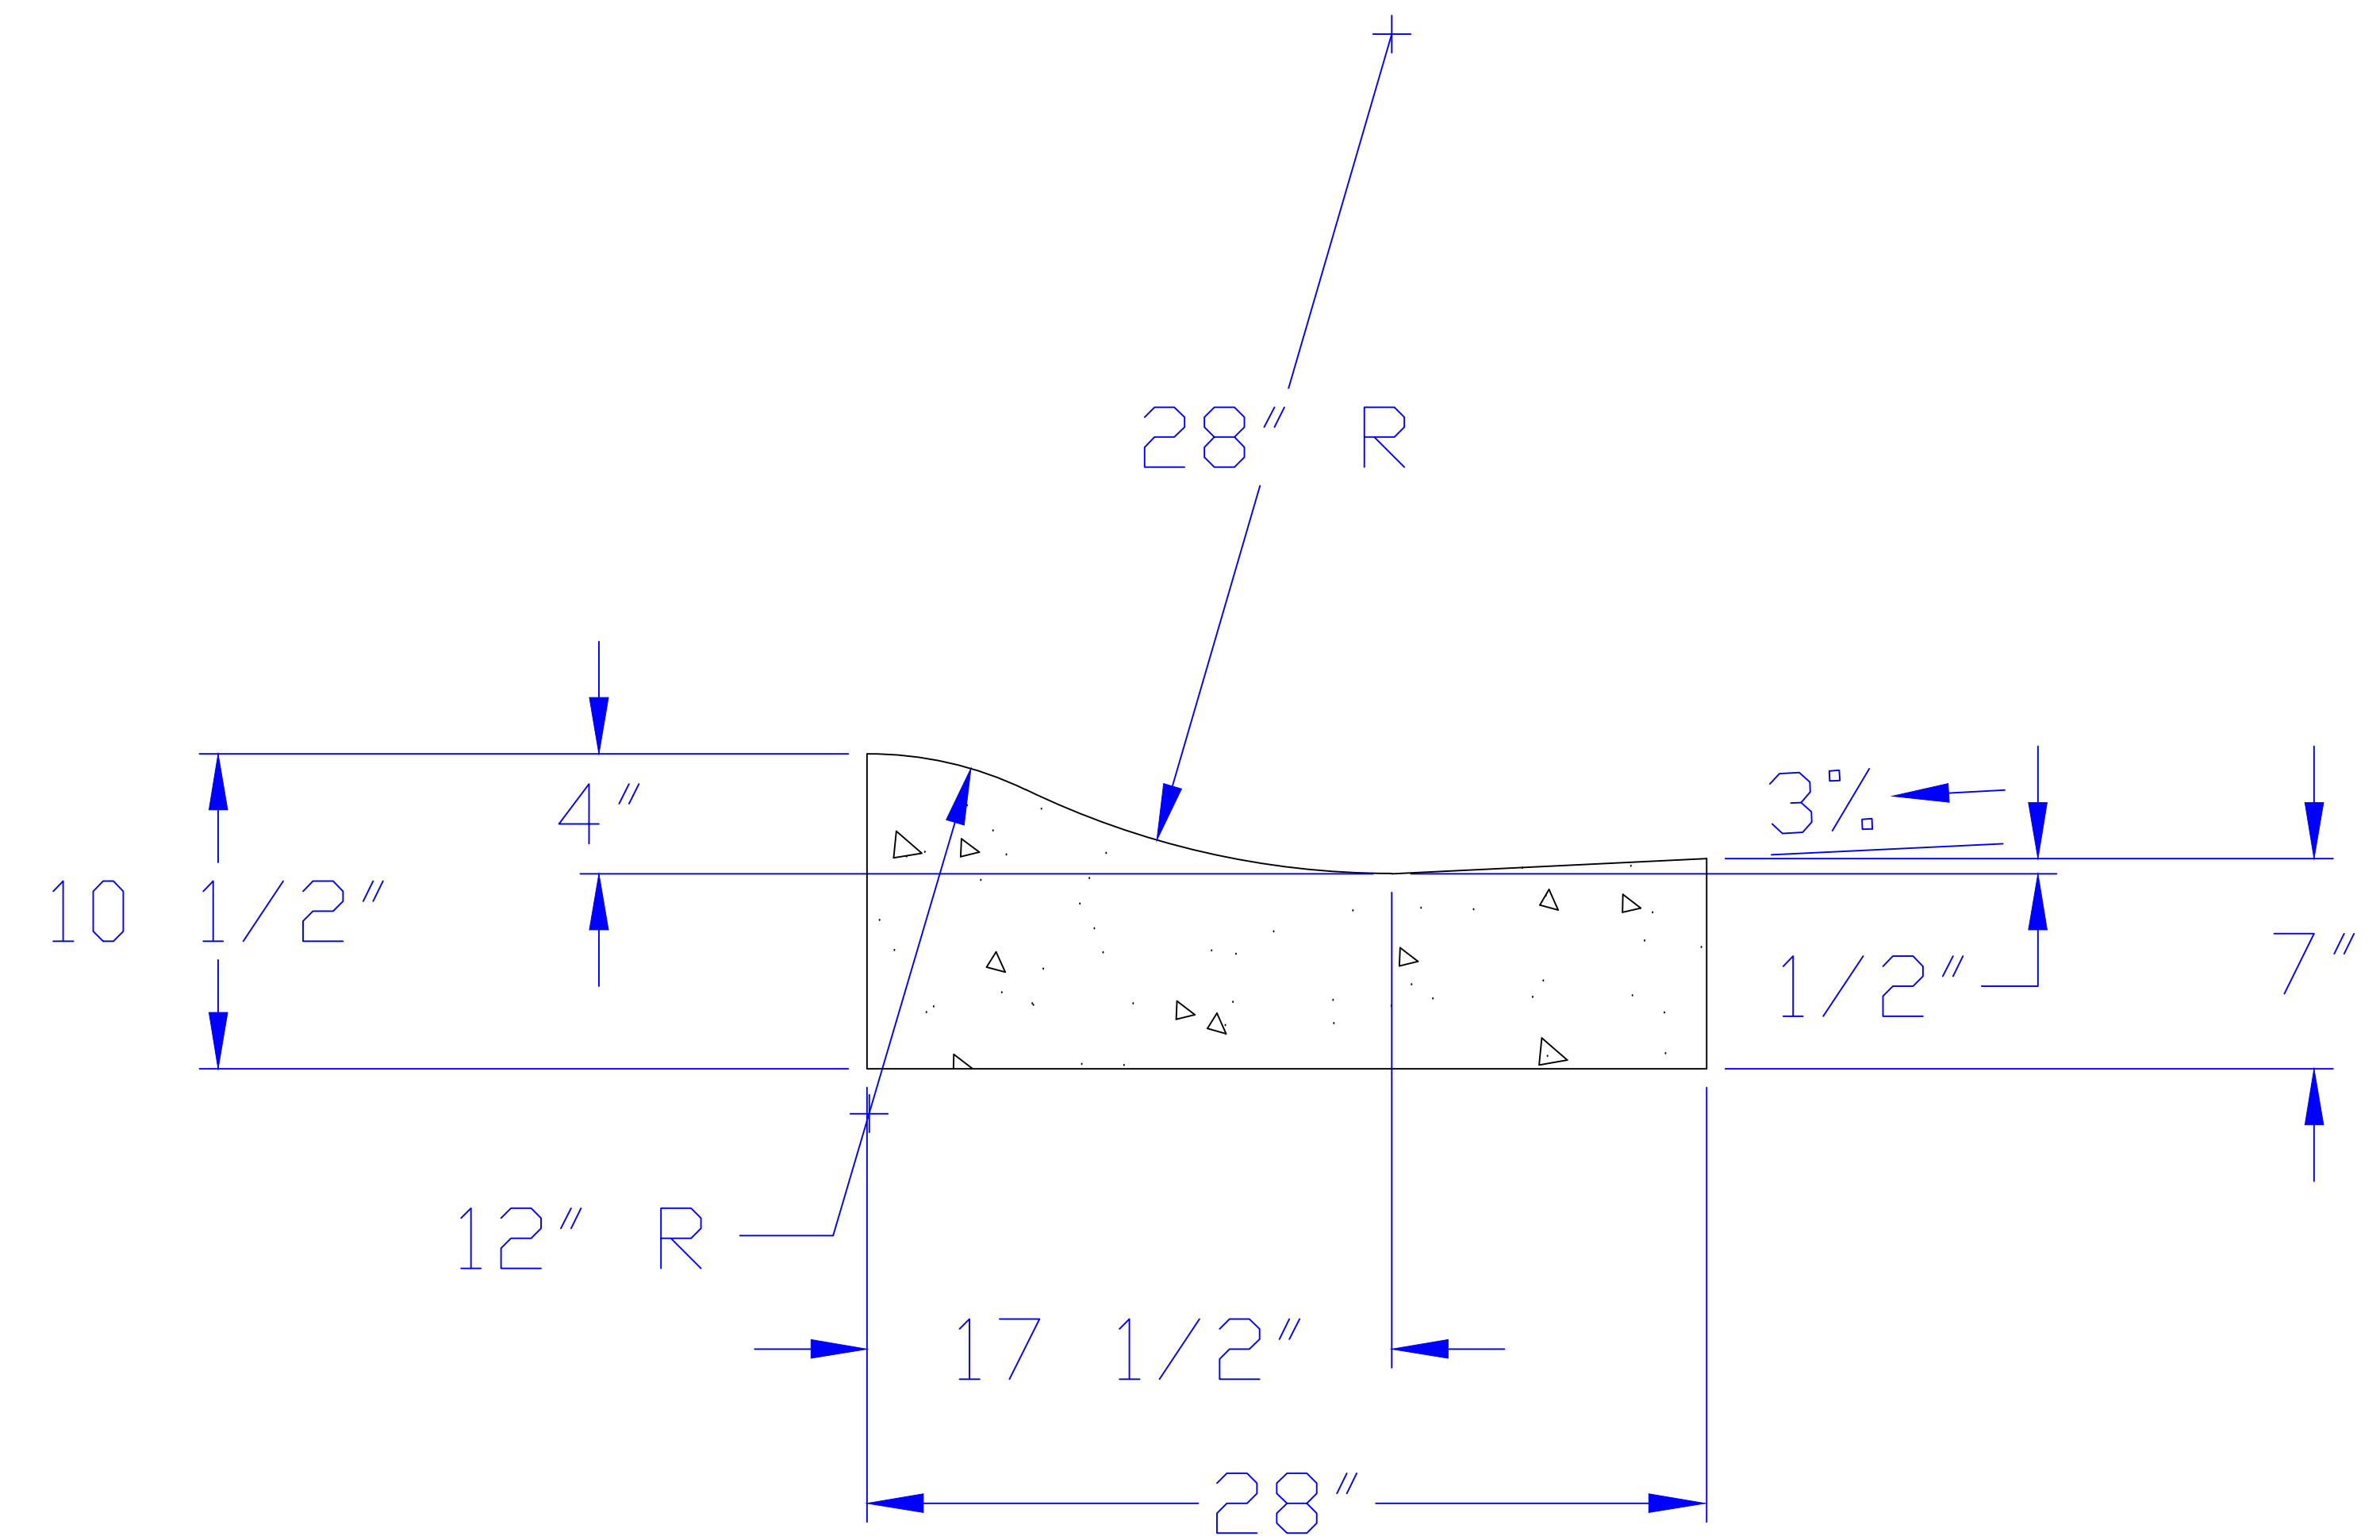

CURB DETAIL

No	REVISION	DATE

APPROVED SERVICE LINE DIRECTOR	DATE:	APPROVED INFECTION CONTROL NURSE	DATE:	DRAWING TITLE Sidewalk / Curb Details	PROJECT TITLE REPLACE DETERIORATED SIDEWALKS VA CAMPUS	DATE 5/7/12 PLOT SCALE NOT SCALED PROJECT NO. 656-12-224SCIP
APPROVED DEMS COORDINATOR	DATE:	APPROVED PATIENT SAFETY	DATE:			
APPROVED PROJECTS SECTION MANAGER	DATE:	APPROVED CHIEF OF POLICE	DATE:			
APPROVED DIRECTOR FHS	DATE:	APPROVED SAFETY MANAGER	DATE:			
APPROVED CHIEF OF STAFF	DATE:	BUILDING NO.	SITE	CHECKED BY	DRAWN	CAD FILE
APPROVED MEDICAL CENTER DIRECTOR	DATE:	LOCATION	V.A. MEDICAL CENTER ST.CLOUD, MN 56303	RLC	1039	1039 DWG 14 of 15

