

APPROVED BY:

DIRECTOR
DATE

CHIEF OF FACILITIES
DATE

CHIEF OF ENGINEERING
DATE


SAFETY MANAGER
DATE

DEMOLITION NOTES:

- REMOVE EXISTING FLOORING.
REMOVE EXISTING COVE BASE.
REMOVE EXISTING WALL MOUNTED ACCESSORIES AND RETURN TO VA.
REMOVE LOCKERS AND RETURN TO VA.
REMOVE SHEET WALL PROTECTION.
REMOVE EXISTING CEILING SYSTEM, INCLUDING SPRINKLERS, IF REQUIRED.
REMOVE DOORS AND FRAMES SHOWN ON DRAWINGS.
REMOVE WALLGUARDS AS REQUIRED FOR NEW DOOR OPENINGS.
REMOVE PROVIDE NEW WALLGUARD AND REMORK AS REQUIRED.
- REMOVE ELECTRICAL DEVICES AS SHOWN ON DRAWINGS.
REMOVE PLUMBING FIXTURES SHOWN ON DRAWINGS. REMOVE PIPING FROM WALL CAP PIPING IN INTERSTITIAL.

NOTE:
PROVIDE TEMPORARY GYP-BD. PARTITION AS SHOWN ON DRAWINGS.
INCLUDE LOCKABLE DOOR.

FRAME DOOR OPENING WITH METAL STUD AND GYP-BD. PANEL. INCLUDE INSULATION AND REMORK EXISTING OPENING. CALL. SEM.

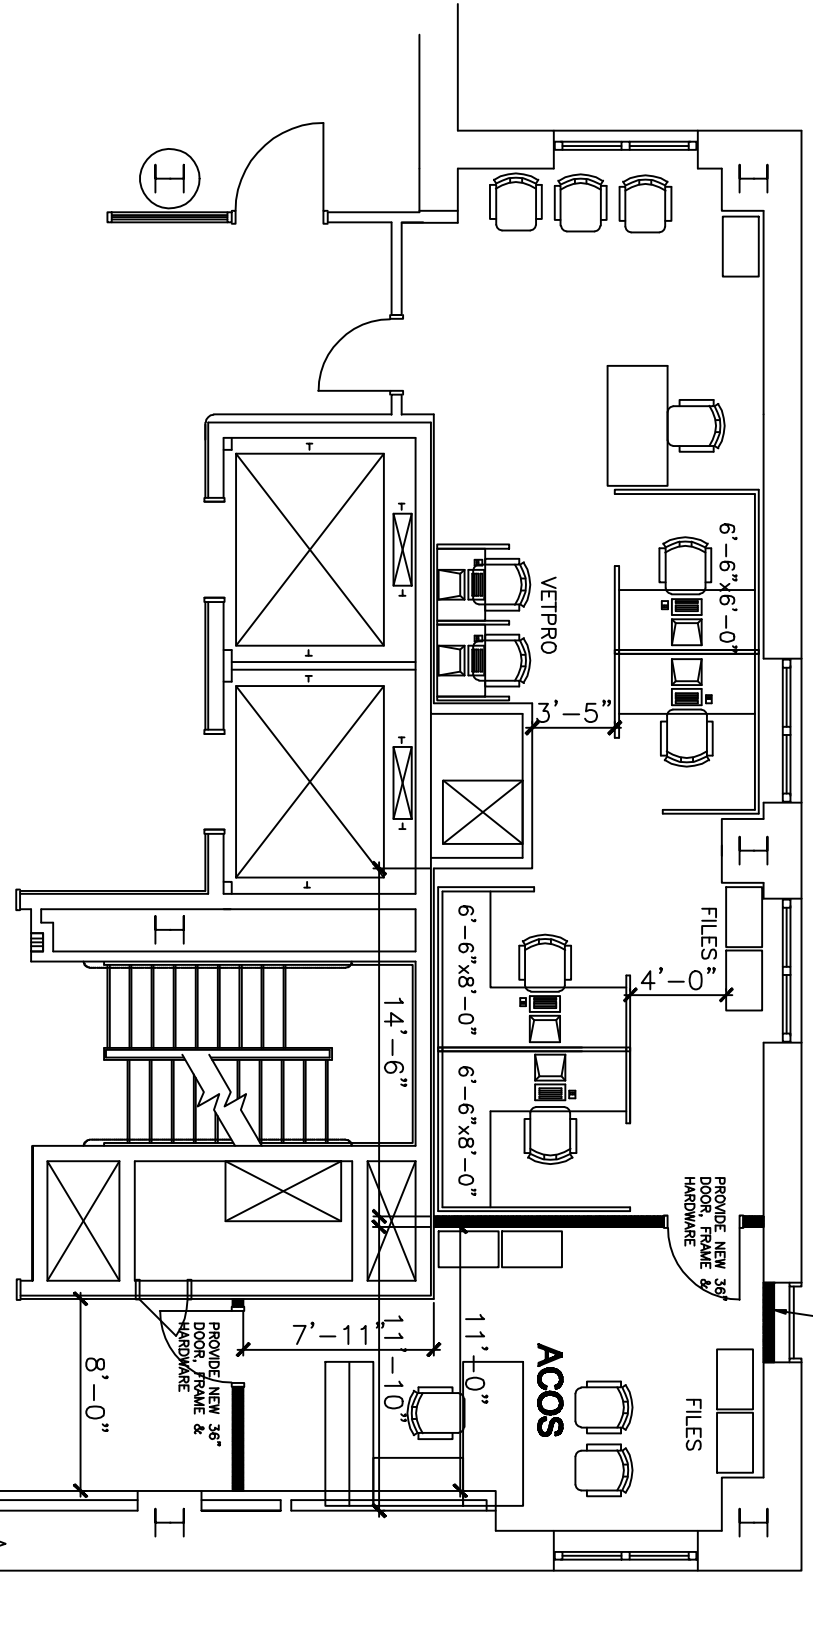

PROPOSED PLAN

SCALE: 1/8"=1'-0"

LIGHTING NOTES:

NEW FLUORESCENT FIXTURES TO BE 2'x4' TROFFER, 4 TUBE, 18 CELL, ALUMINUM WITH SEM-SPECULAR SILVER FINISH, 18" ELECTRONIC BALLASTS FOR 4'x8' GYP-BD. PROVIDE SUBMITTALS FOR APPROVAL.

REFLECTED CEILING NOTES:


PROVIDE AND INSTALL GRILLES AND LIGHT FIXTURES AS SPECIFIED.
PROVIDE AND INSTALL CEILING TILES AND GRID AS SPECIFIED.
CLEAN AND REINSTALL CEILING MOUNTED ITEMS.

- EXISTING SPRINKLER HEAD
- RELOCATED SPRINKLER HEAD
- NEW SPRINKLER HEAD

VA WILL REMORK SPRINKLERS

DEMOLITION PLAN

SCALE: 1/8"=1'-0"

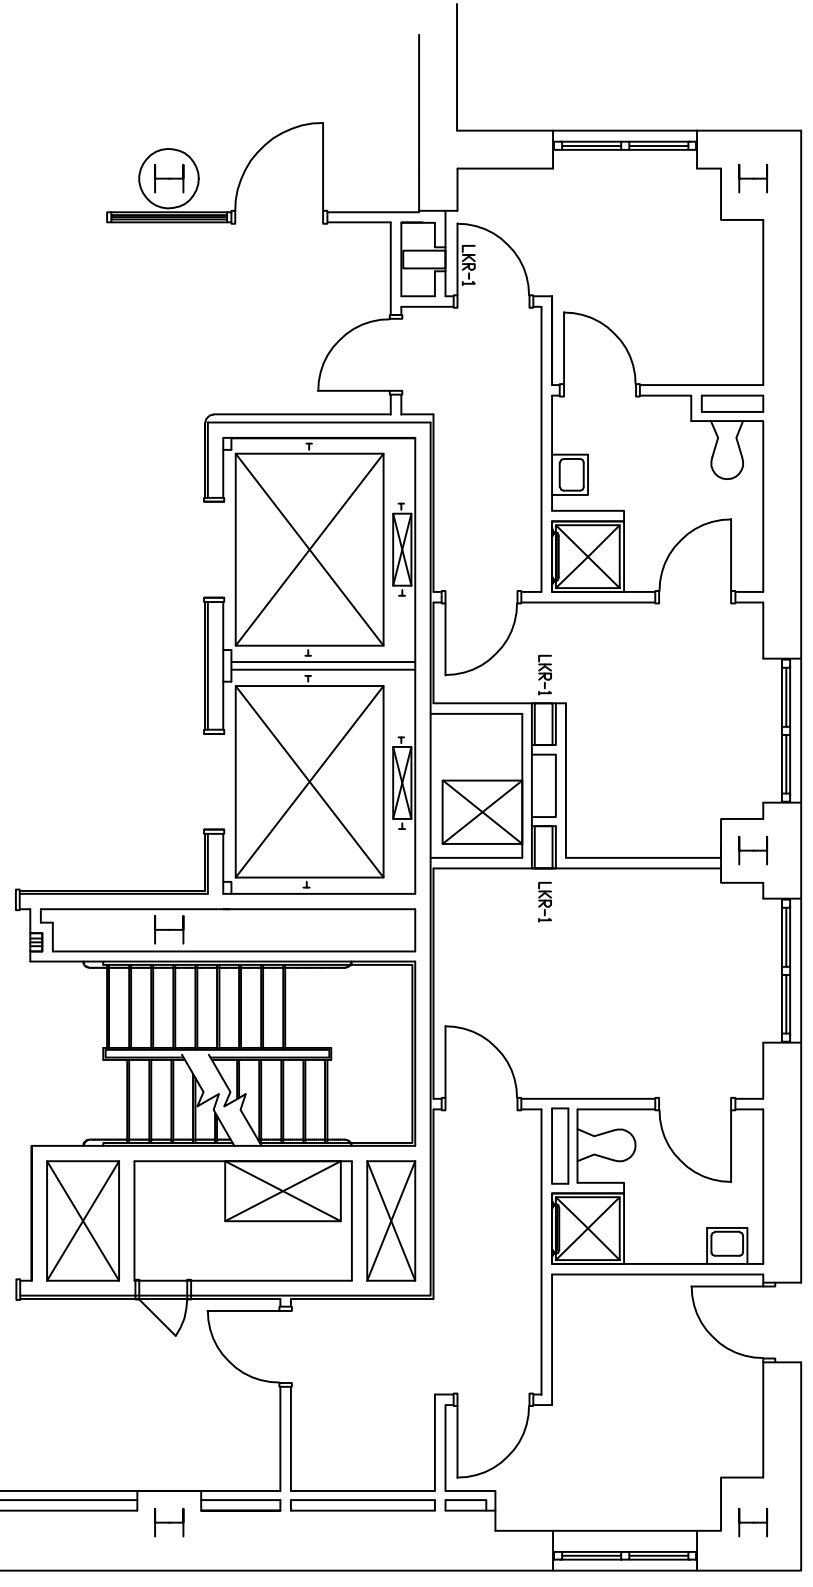

EXISTING PLAN

SCALE: 1/8"=1'-0"

SYMBOLS

- EXISTING DOOR AND FRAME TO BE REMOVED
- EXISTING WALL TO BE REMOVED
- EXISTING WALL
- NEW WALL
- EXISTING TO BE REMOVED

ARCHITECTURAL NOTES:

1. PROVIDE MATERIALS AND CONSTRUCT NEW WALLS AS SHOWN ON DRAWINGS AND BATTIS FOR NEW WALLS. PROVIDE SUBMITTALS FOR APPROVAL. NEW WALLS TO BECK ABOVE.
2. PROVIDE MATERIALS AND REMARK EXISTING WALLS AFFECTED BY THE RENOVATION.
3. PROVIDE AND INSTALL NEW COVE BASE IN NEW ROOMS AND ON CORRIDOR SIDE.
4. PROVIDE AND REMORK/INSTALL NEW WALLGUARDS AS REQUIRED. CONSTRUCTION TO REMOVE EXISTING WALL.
5. PATCH AND PAINT ALL INTERIOR WALLS. PATCH AND PAINT CORRIDOR WALLS AFFECTED BY RENOVATION. PROVIDE COCK. METAL BROWING IN POINT.
6. CONTRACTOR TO PROVIDE AND INSTALL NEW DOORS, FRAMES AND HARDWARE AS SPECIFIED ON DRAWINGS.
7. INSTALL VA PROVIDED CARPET TILES. CONTRACTOR PREP FLOOR AS REQUIRED BY MANUFACTURER. TOOLS.
8. PROVIDE MATERIALS TO REPAIR WALLS WITH 4" TYPICAL DEPTH. PROVIDE SUBMITTALS FOR APPROVAL. RENOVATION. ONLY USE HILTI APPROVED PRODUCTS.
9. PROVIDE AND INSTALL CEILING SYSTEM AS SPECIFIED.
10. PROVIDE MATERIALS AND REMORK ELECTRICAL AS SHOWN ON DRAWINGS. MATCH EXISTING HOSPITAL OR PHONE/DATA. VA WILL PULL PHONE/DATA WIRES. INSTALL PER NEC AND VA REQUIREMENTS.
11. PROVIDE MATERIALS TO REMORK EXISTING MECHANICAL SYSTEM AS SHOWN. INSTALL PER APPLICABLE CODES AND STANDARDS.

VA STANDARD FINISHES AND MATERIALS


- COVE BASE:
ROPPE 1/8" VINYL, P178 PEWTER
- NCT:
ARMSTRONG IMPERIAL TEXTURE STANDARD EXCELON #51899 COOL WHITE, 12'x12'x1/8"
- CARPET: VA WILL PROVIDE CARPET TILES PER MANUFACTURERS SPECIFICATIONS. VA WILL ONLY SUPPLY CARPET TILES. CONTRACTOR IS RESPONSIBLE FOR ADHESIVE AND TRANSITION STRIPS.
- METAL STUDS:
4" METAL STUDS @ 16" O.C., 20 GA. 10 METAL DECK ABOVE.
- GYP-BD:
5/8" TYPE "X" GYP-BD.
- FIRESTOPPING:
HILTI PRODUCTS, PROVIDE SUBMITTALS
- CEILING GRID:
GRIDGRO METALIC 1200 (15/16"), WHITE.
- CEILING TILES:
CELOTEX SOFTONE CASHMERE 24'x24'x3/4", CM-457, WHITE SQUARE FACTORY SPECIAL. COLORS:
STANDARD WALL: PITTSBURGH PAINTS WHITE, SF02-905, EGGSHELL
- RED DOOR FRAMES: PITTSBURGH PAINTS, 07-335, SEMI-GLOSS.
- CONTACT:
SCOTT DOOR
3500 WOODBURN AVE.
10944 E. JEFFERSON AVE.
DETROIT, MI 48214
- WALLGUARDS (IF NEEDED)
ACROVYN
REBELITE FINISH
CONTRACTOR TO PROVIDE ALL MOUNTING BRACKETS AND TRIM PIECES AS REQUIRED.

REFLECTED CEILING NOTES:

- INSTALL NEW CEILING AT EXISTING HEIGHT (9'-0").
CLEAN AND REINSTALL CEILING MOUNTED ACCESSORIES.


LIGHTING NOTES:

CONTRACTOR TO INSTALL NEW FLUORESCENT FIXTURES AS SPECIFIED BY VA.
REMARK SWITCHING TO DUAL LEVEL LIGHTING.

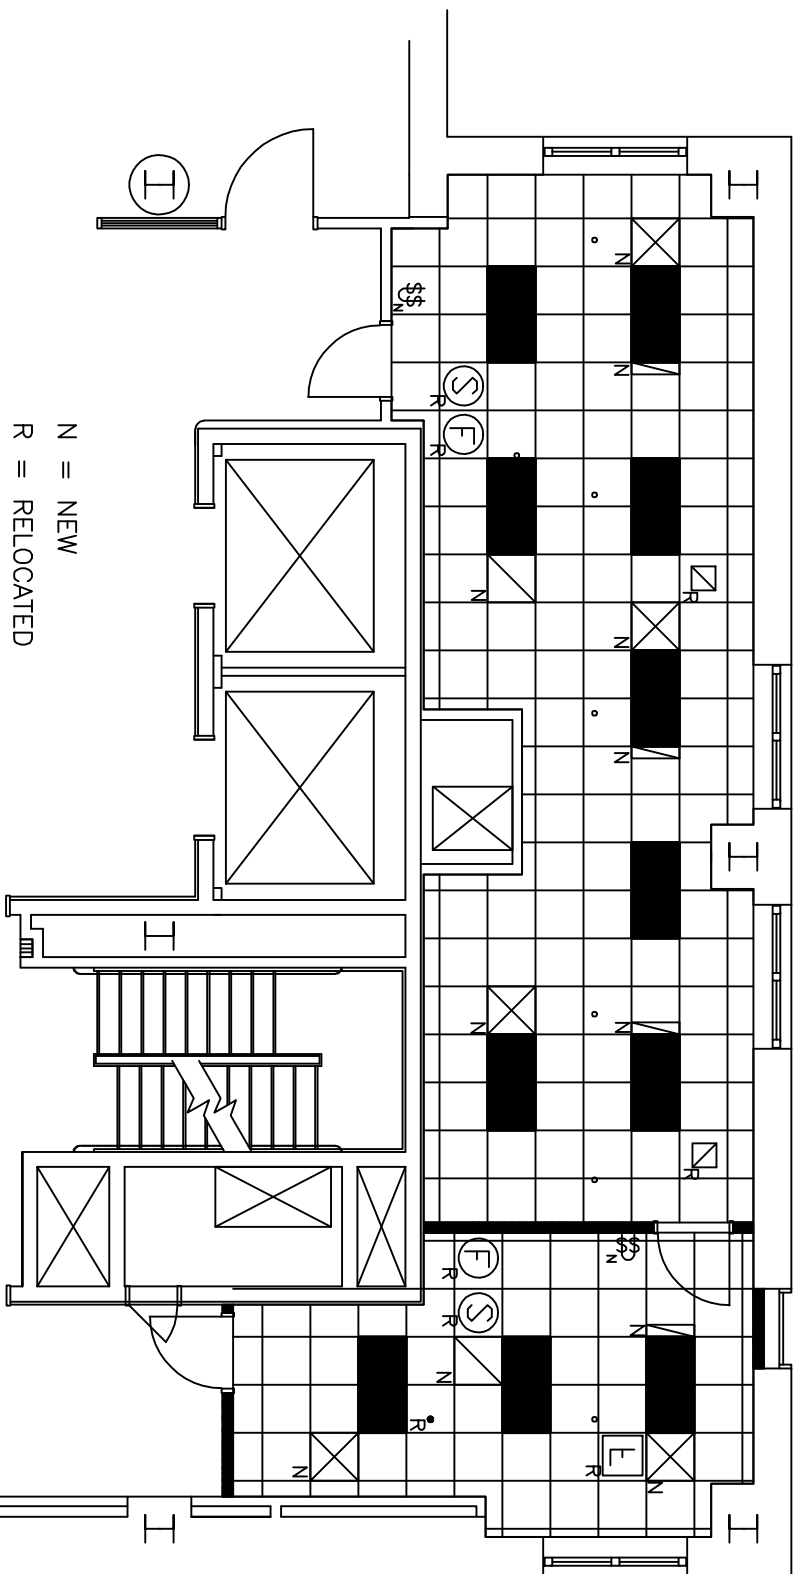

PROPOSED REFLECTED CEILING PLAN

SCALE: 1/8"=1'-0"

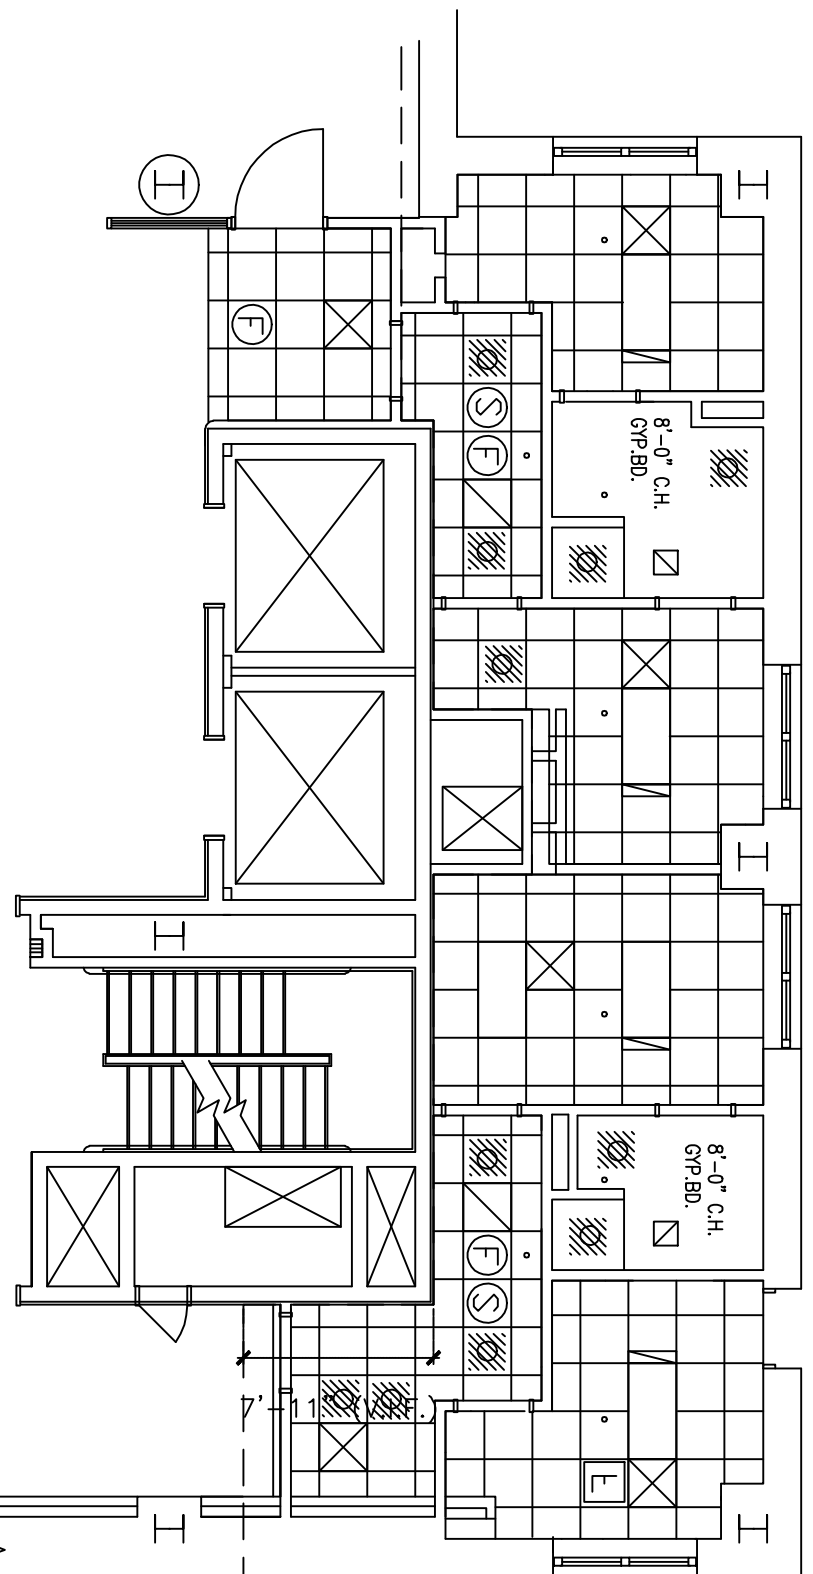

EXISTING REFLECTED CEILING PLAN


SCALE: 1/8"=1'-0"

- NOTE:
CEILING HEIGHTS (C.H.) ARE 9'-0" U.O.A.
VA WILL REMORK SPRINKLERS AS REQUIRED
- REMOVE AND RETURN TO VA
CLEAN AND REINSTALL ALL OTHER ITEMS IN NEW CEILING.



NOTE:
FURNITURE SHOWN FOR REFERENCE

APPROXIMATE SPRINKLER LOCATIONS ARE SHOWN ON PLAN. VA WILL RELOCATE IF REQUIRED.

Revisions:

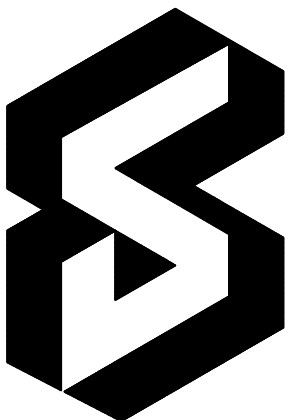

Department of
Veterans Affairs

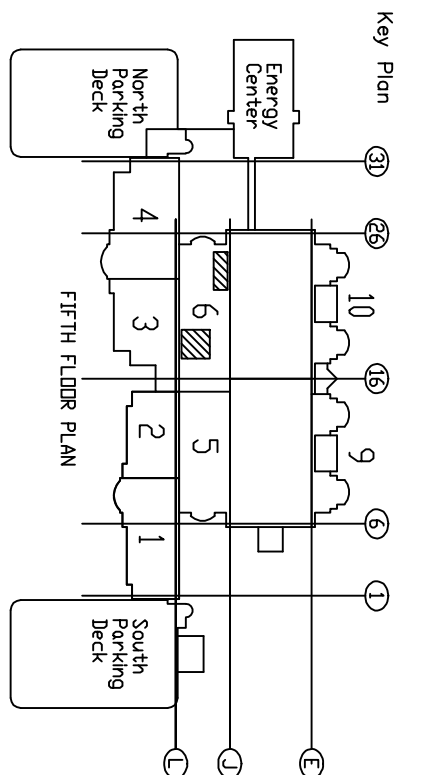

Drawing Title
ARCHITECTURAL DEMOLITION PLAN
PROPOSED CEILING DEMOLITION PLAN
REFLECTED CEILING PROPOSED PLAN
Scale 1/8"=1'-0"

Approved: Chief Engineer

Project Title
CRENENTIALING

Building Number
100

Checked
DO

Drawn
DO

DRAWING NO.
1

Date
12/12/2008

Project No.
553-09-122

Location
Detroit, Michigan

Dwg. 1 of 5

Department of
Veterans Affairs