
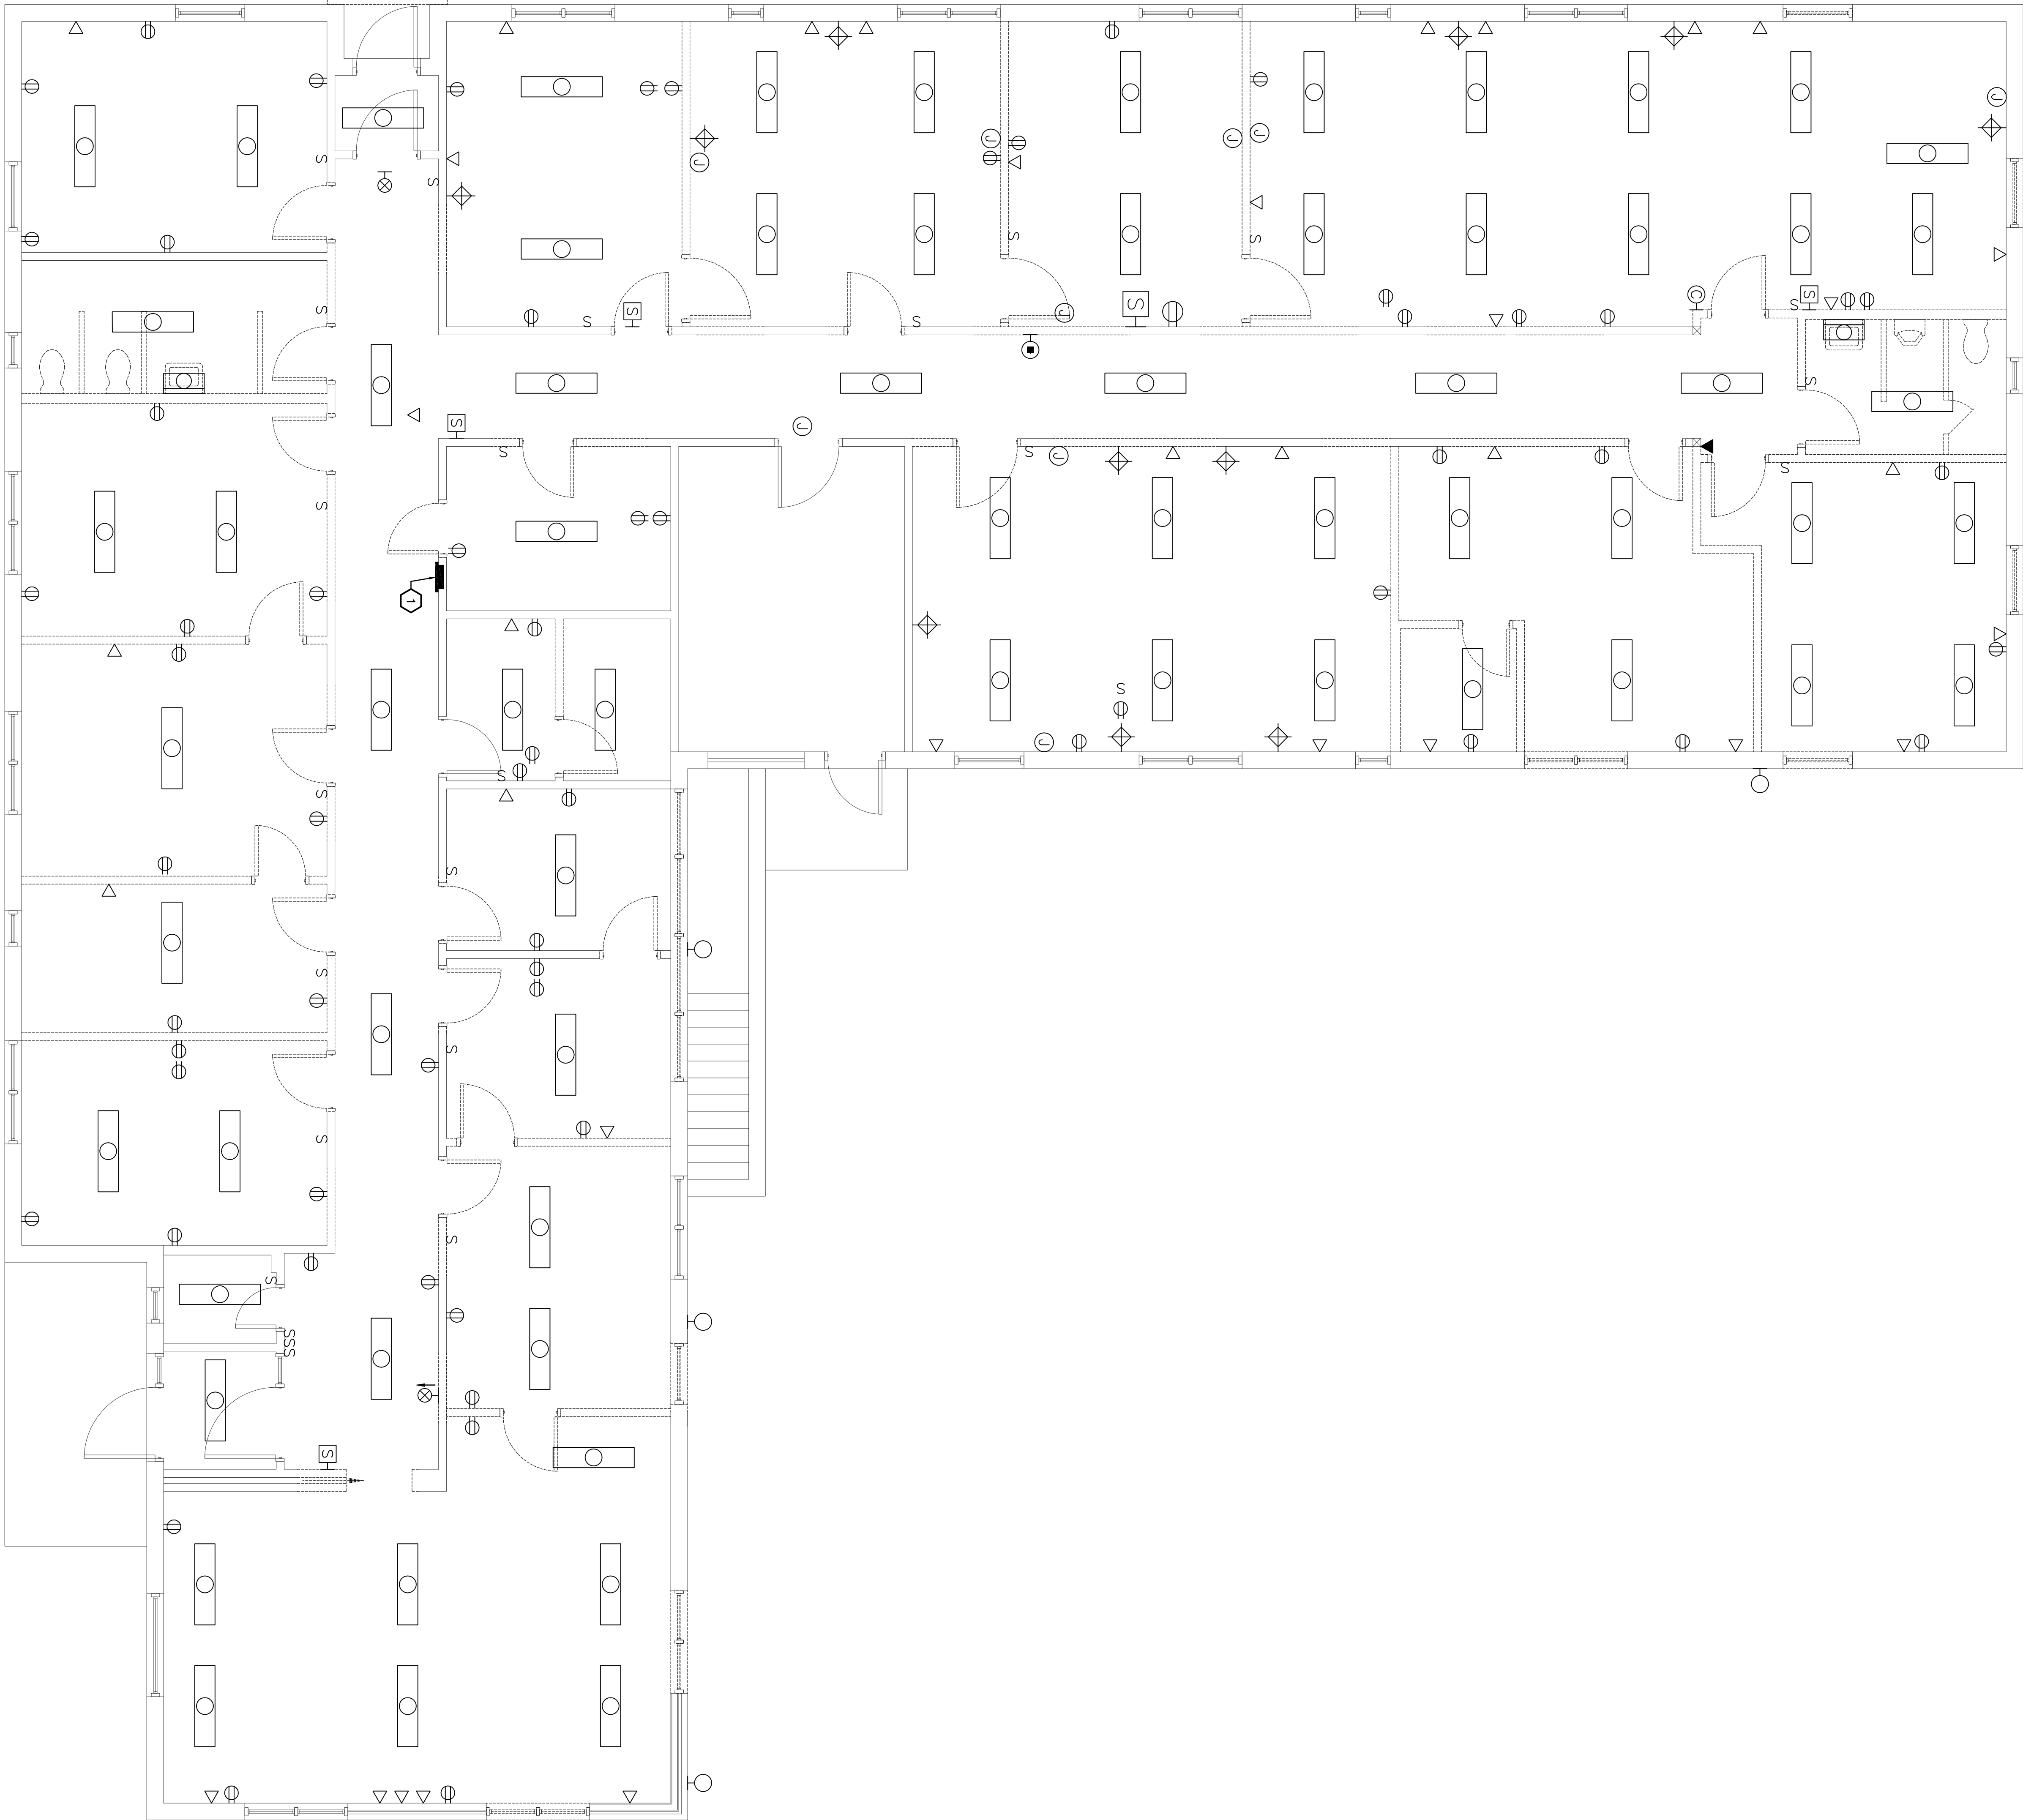


ELECTRICAL KEYNOTES (○)

EXISTING PANEL TO BE REMOVED. ALL EXISTING CIRCUITS THAT REMAIN AFTER DEMOLITION SHALL BE EXTENDED TO NEW PANEL AND PROVIDE CONDUIT, WIRING, AND ACCESSORIES AS REQUIRED TO EXTEND CIRCUITS AND/OR MAINTAIN EQUIPMENT. EXISTING PANELS TO BE REMOVED SHALL BE DISCONNECTED TO NEW DISTRIBUTION PANEL, "WDP", PROVIDE CONDUIT, WIRING, AND ACCESSORIES AS REQUIRED TO EXTEND CIRCUIT AND/OR MAINTAIN CONTINUITY OF CIRCUIT INTERRUPTED BY DEMOLITION WORK.


GENERAL ELECTRICAL DEMOLITION NOTES

- A. THE CONTRACTOR SHALL COMPLETELY REMOVE ALL ELECTRICAL WIRING, CONDUIT, SWITCHES, DISCONNECTS, LIGHTING FIXTURES AND OTHER ASSOCIATED ITEMS AS NOTED ON THIS DRAWING. ALL REMOVAL SHALL BE IN ACCORDANCE WITH THE FOLLOWING ARE ONLY TO INDICATE IN GENERAL TO THE CONTRACTOR THE AMOUNT OF DEMOLITION WORK INVOLVED. A SITE INVESTIGATION BY THE CONTRACTOR OR CONSULTANT SHALL BE REQUIRED TO DETERMINE THE COMPLETE EXTENT OF WORK INVOLVED.
- B. THE CONTRACTOR SHALL COORDINATE AND SCHEDULE ALL NECESSARY POWER AND WATER SHUTDOWNS WITH THE OWNER AND NOT SHOWN TO BE DIRECTED BY OWNER. LAMPS AND BALLASTS THAT ARE CONSIDERED AS HAZARDOUS WASTE SHALL BE DISPOSED OF PROPERLY.
- C. ALL EXISTING SURFACE MOUNTED BACKBOXES, CONDUIT, WIREWAY, JUNCTION BOXES, ETC., SHOWN REMOVED SHALL BE REMOVED IN THEIR ENTIRETY. ALL REMOVED EQUIPMENT SHALL BE DISPOSED OF PROPERLY. ALL REMOVED EQUIPMENT SHALL BE ABANDONED IN PLACE AND COVERED WITH STAINLESS STEEL COVER PLATES. ALL RECESSED CONDUIT SHALL BE ABANDONED IN PLACE AND CAPPED OFF IN A SUITABLE MANNER PER LOCAL INSPECTION REQUIREMENTS.
- D. THE CONTRACTOR SHALL BE RESPONSIBLE FOR PATCHING, PAINTING, REPAIRING AND FINISHING ALL WORK AREAS TO MATCH EXISTING CONDITIONS. ALL FINISHES SHALL BE MATCHED TO EXISTING CONDITIONS. ALL FINISHES SHALL BE MATCHED TO EXISTING CONDITIONS. ALL FINISHES SHALL BE MATCHED TO EXISTING CONDITIONS.
- E. REMOVE ELECTRICAL CONNECTIONS TO ALL MECHANICAL EQUIPMENT BEING DEMOLISHED. COORDINATE WITH MECHANICAL DRAWINGS.
- F. COORDINATE EXISTING BOXES AND CONDUIT WHICH ARE TO BE REUSED WITH NEW WORK AS INDICATED ON LIGHTING AND POWER DRAWINGS.

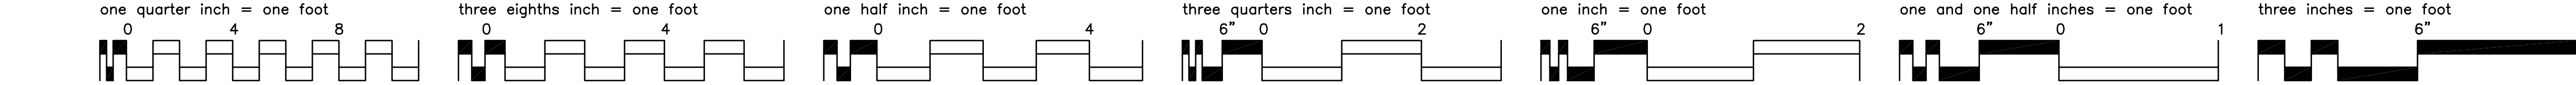

FIRST LEVEL ELECTRICAL DEMOLITION FLOOR PLAN

BASMENT ELECTRICAL DEMOLITION FLOOR PLAN

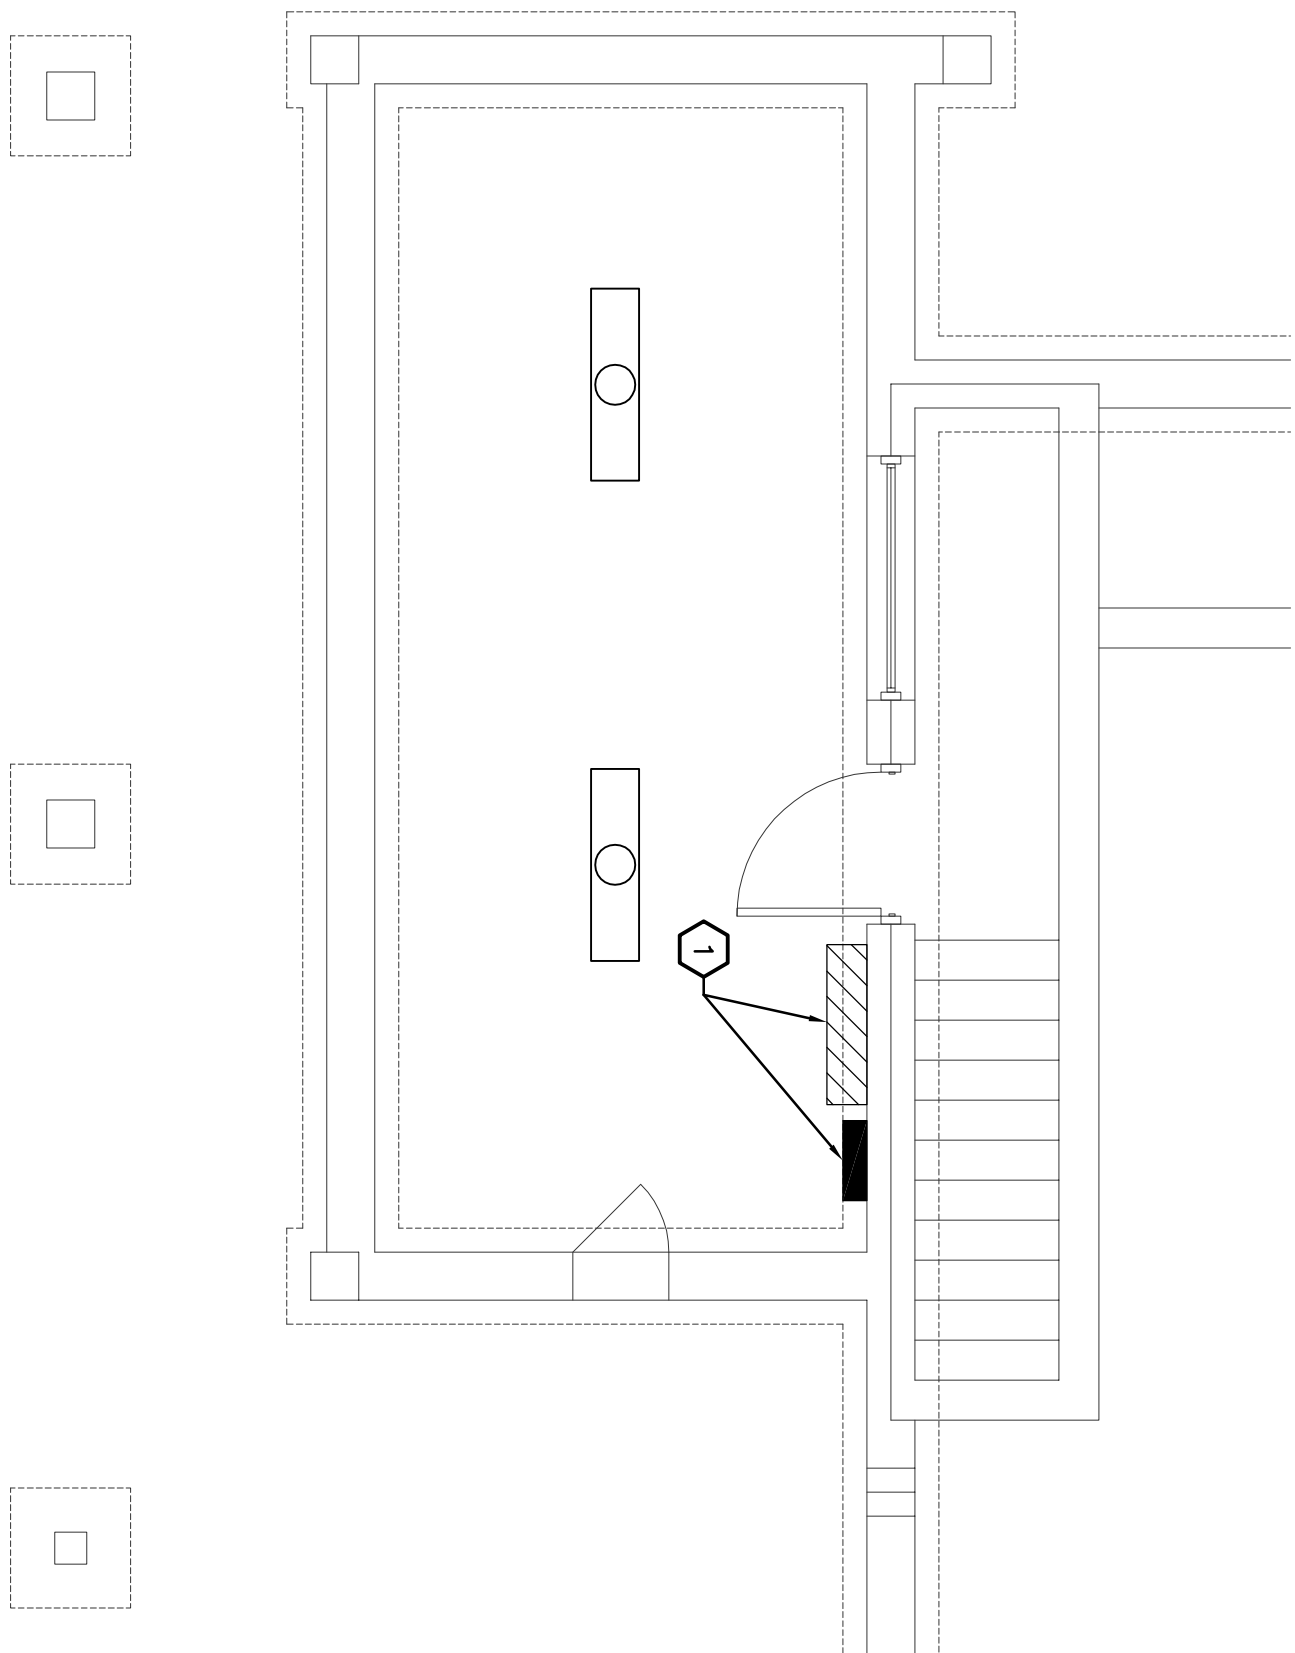

one eighth inch = one foot
0 4 8 16
one quarter inch = one foot
0 4 8
three eighths inch = one foot
0 4
one half inch = one foot
0 4
three quarters inch = one foot
0 2
one inch = one foot
0 2
one and one half inches = one foot
0 1
three inches = one foot
0 6

PARSONS ENGINEERING CONSULTING SERVICES CORPORATION LINCOLN, NE 68503
1225 SOUTH 17TH AVE. SUITE 100 LINCOLN, NE 68502
TEL: (402) 426-8888 FAX: (402) 426-8889
WWW.PARSONS.COM
THIS DOCUMENT IS THE PROPERTY OF PARSONS ENGINEERING CONSULTING SERVICES CORPORATION. IT IS TO BE USED ONLY FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREON. IT IS NOT TO BE REPRODUCED, COPIED, OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF PARSONS ENGINEERING CONSULTING SERVICES CORPORATION. THIS DOCUMENT IS PROVIDED BY THE COPYRIGHT LAW.

IMPORTANT CONTRACTOR'S NOTE

1. ALL CONTRACTORS ARE RESPONSIBLE FOR REVIEWING ENTIRE SET OF DRAWINGS AND SPECIFICATIONS PRIOR TO BEGINNING WORK. CONTRACTORS SHALL NOT BE ALLOWED EXTRA COSTS DUE TO FAILURE TO REVIEW ENTIRE SET OF DOCUMENTS.

2. ANY USE OF THESE ELECTRICAL DRAWINGS OR SCALING OF RISK.



Calvin L. Hinz Architects, P.C. CEA 8007-37
2705 North 30th Street, Suite 102
Lincoln, NE 68502
Phone: (402) 291-0941 Fax: (402) 291-9193

11500 Ralston Circle
Suite 100
Overland Park, KS 66209
United Engineering
20007 Midway Circle, Suite 108
Overland Park, KS 66209
Phone: (913) 475-4755 Fax: (913) 475-4757

BASEMENT AND FIRST LEVEL
ELECTRICAL DEMOLITION FLOOR PLANS

Construction Documents (100%) Submitted
Approved: _____ Date: _____
Approved: _____ Date: _____

BUILDING SIX
RENOVATION/ ADDITION

VAMC Omaha, NE
Checked by: KMA
Drawn by: KMA
Date: FEBRUARY 20, 2009

Project Number: 11500 Ralston Circle
Drawing Number: SIX
ED10
Date: FEBRUARY 20, 2009

Office of Construction and Facilities Management
Department of Veterans Affairs