



three inches = one foot  
one and one half inches = one foot  
one inch = one foot  
one quarter inch = one foot  
three eighths inch = one foot  
one half inch = one foot  
one eighth inch = one foot  
one quarter inch = one foot  
three eighths inch = one foot  
one half inch = one foot  
one eighth inch = one foot


REFERENCE SYMBOLS

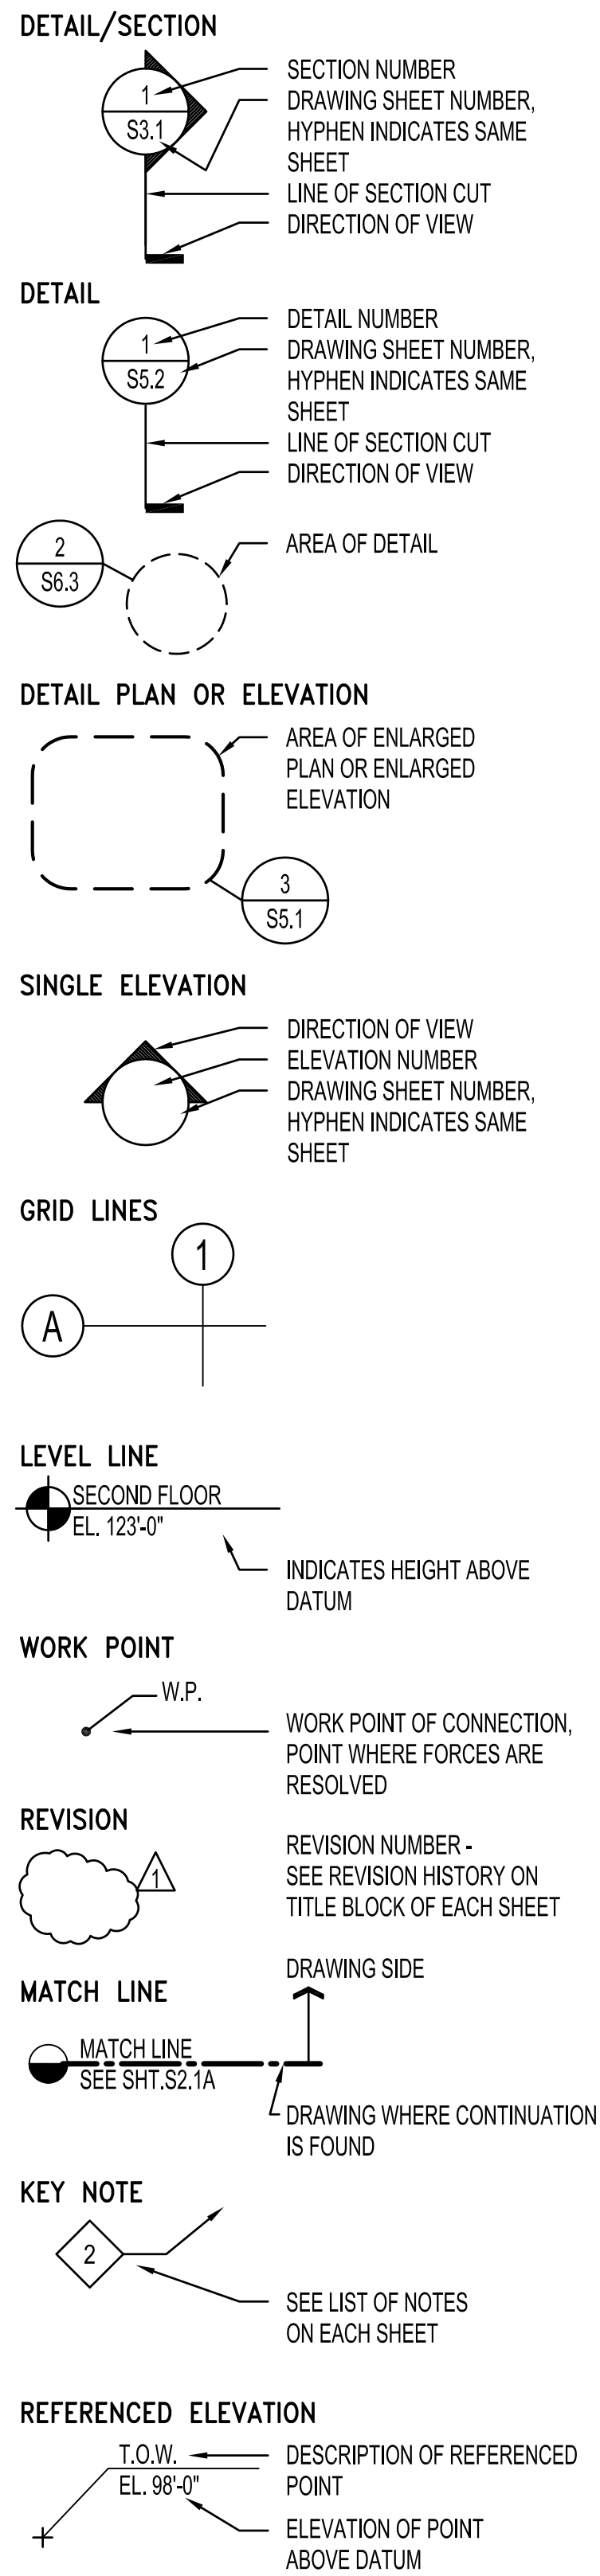

PLAN SYMBOLS, CONT'D

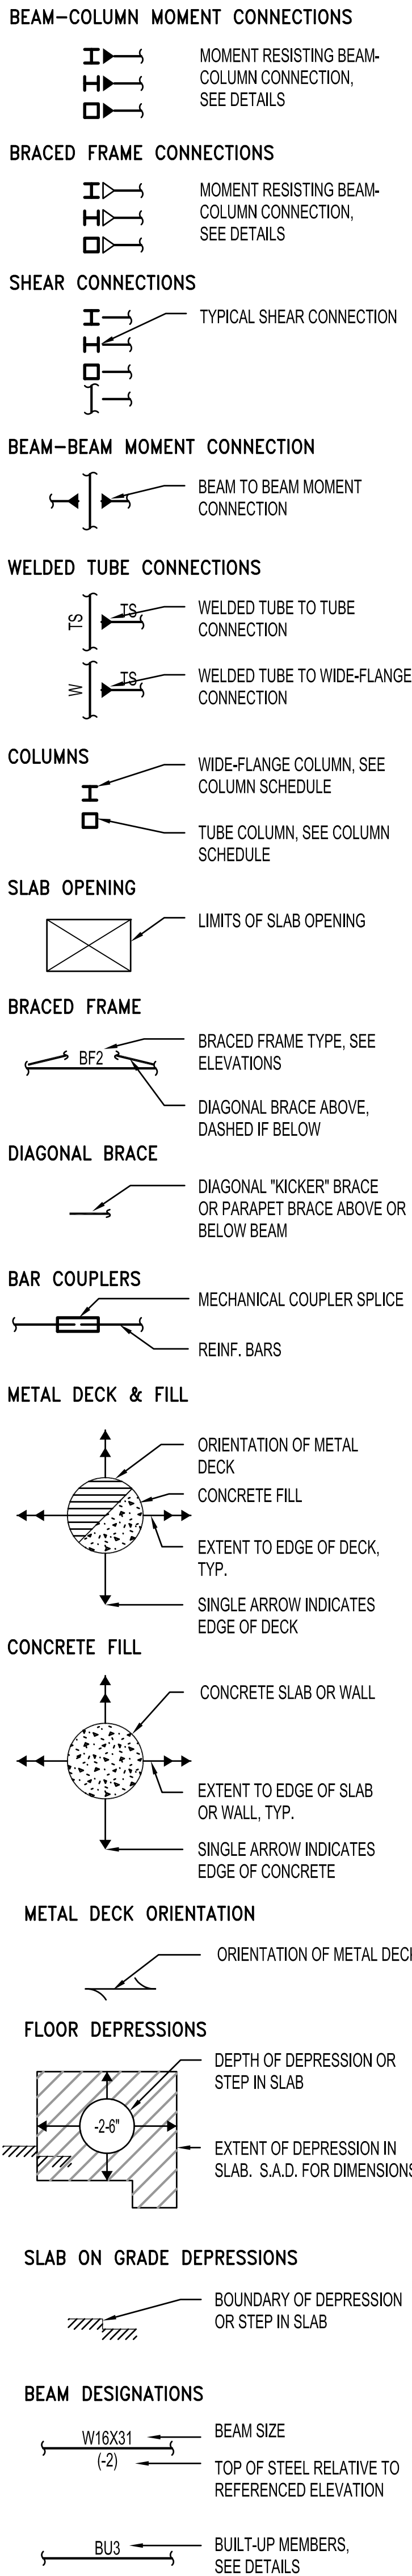

MATERIAL SYMBOLS

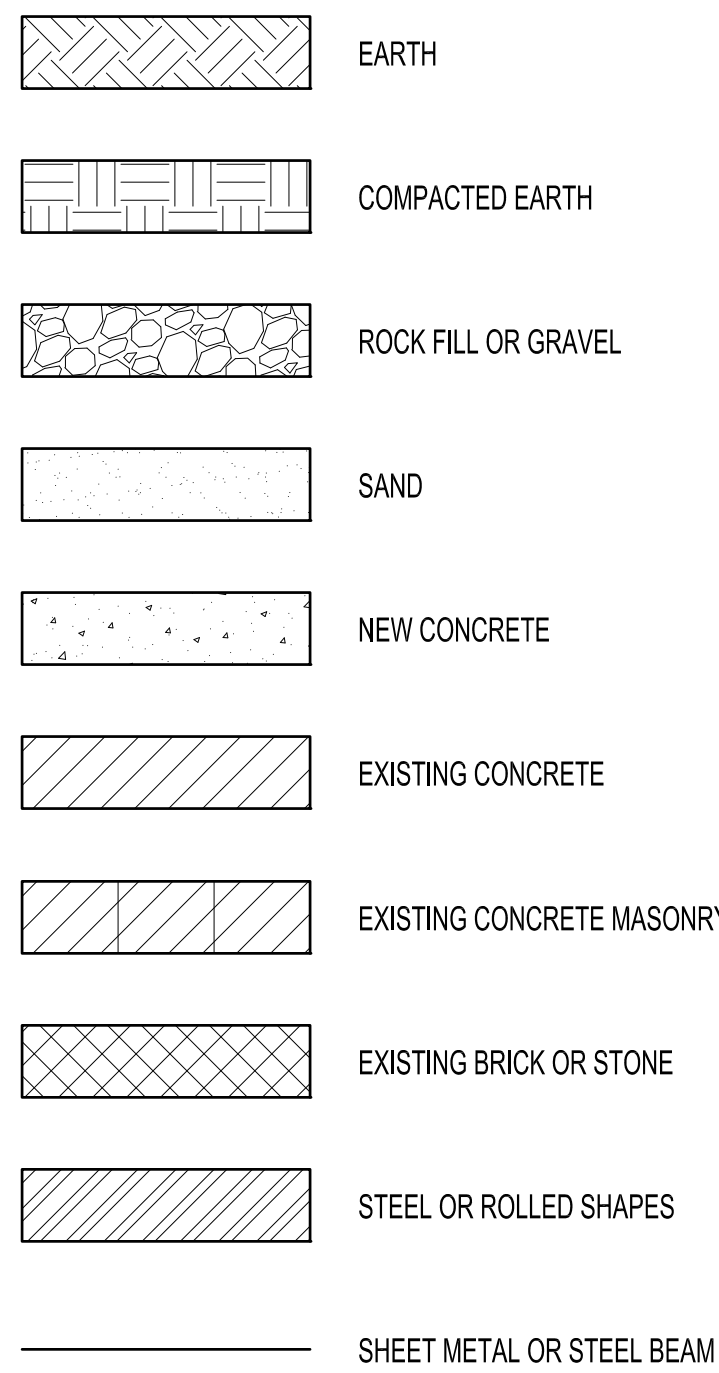

ABBREVIATIONS

(E)	EXISTING	JT	JOINT
(N)	NEW	K.O.	KNOCK-OUT
&	AND	L	ANGLE
@	AT	d1	DEVELOPMENT LENGTH
A.A.	ADHESIVE ANCHOR	db	HOOK DEVELOPMENT LENGTH
A.B.	ANCHOR BOLT	LEV.	LEVEL
ABV	ABOVE	LLBB	LONG LEG BACK TO BACK
ADDL	ADDITIONAL	LLH	LONG LEG HORIZONTAL
ADJ.	ADJACENT	LLV	LONG LEG VERTICAL
AGGR.	AGGREGATE	LOC.	LOCATION
AL.	ALUMINUM	LONGIT.	LONGITUDINAL
ALT.	ALTERNATE	L.P.	LOW POINT
ANSI	AMERICAN NATIONAL STANDARDS INSTITUTE	s1	LAP SPLICE LENGTH
APPROX.	APPROXIMATE	LT	LIGHT
ARCH.	ARCHITECTURAL	LWC	LIGHTWEIGHT CONCRETE
ASTM	AMERICAN SOCIETY for TESTING and MATERIALS	MAX.	MAXIMUM
A.C.	ASPHALT CONCRETE	M.B.	MACHINE BOLT
AWG	AMERICAN WIRE GAUGE	MEZZ.	MEZZANINE
BET.	BETWEEN	MECH.	MECHANICAL
B.LDG	BUILDING	M.E.P.	MECHANICAL, ELECTRICAL, PLUMBING DOCUMENTS
BLKG	BLOCKING	MTL	METAL
BM, BMS	BEAM, BEAMS	MFR	MANUFACTURER
B.N.	BOUNDARY NAILING	MIN.	MINIMUM
B.O.F.	BOTTOM OF FOOTING	MISC.	MISCELLANEOUS
BOT.	BOTTOM	MTD.	MOUNTED
BRG	BEARING	N	NORTH
BSMT	BASEMENT	N.F.	NEAR FACE
B.S.	BOTH SIDES	N.I.C.	NOT IN CONTRACT
C	CHANNEL	N.S.	NEAR SIDE
CL	CENTERLINE	N.T.S.	NOT TO SCALE
C.I.P.	CAST IN PLACE	NO. or #	NUMBER
C.J.	CONTROL JOINT	NOM.	NOMINAL (DIAMETER)
CLG	CEILING	NWC	NORMAL WEIGHT CONCRETE
CLR	CLEAR	O.C.	ON CENTER
CMU	CONCRETE MASONRY UNIT	O.D.	OUTSIDE DIAMETER (DIM)
COL.	COLUMN	O.H.	OPPOSITE HAND
CONC.	CONCRETE	OPNG	OPENING
CONN.	CONNECTION	OPP.	OPPOSITE
CONSTR.	CONSTRUCTION	PL	PLATE
CONT.	CONTINUOUS	PC, PCS.	PIECE, PIECES
CSK	COUNTERSINK	PERP.	PERPENDICULAR
CP	COMPLETE PENETRATION	PLYWD	PLYWOOD
CTR	CENTER	PP	PARTIAL PENETRATION
d	PENNY (NAIL SIZE)	PR	PAIR
DBL	DOUBLE	PT	POINT
DK, DKG	DECK or DECKING	PTN	PARTITION
DEMO.	DEMOLITION	R.O.	ROUGH OPENING
DET., DETS	DETAIL, DETAILS	R or RAD.	RADIUS
DIAG.	DIAGONAL	REBAR	REINFORCING BAR
DIA. or Ø	DIAMETER	REF.	REFERENCE
DIM., DIMS	DIMENSION, DIMENSIONS	REINF.	REINFORCED or REINFORCING
DIST.	DISTANCE	REQD	REQUIRED
DN	DOWN	REV.	REVISE or REVISION
DO	DITTO	RFG	ROOFING
DWL, DWLS	DOWEL, DOWELS	RSJ	ROLLED STEEL JOIST
DWG, DWGS	DRAWING, DRAWINGS	S.A.D.	SEE ARCH. DOCUMENTS
EA.	EACH	SCHED.	SCHEDULE
E.A.	EXPANSION ANCHOR	SECT.	SECTION
E.F.	EACH FACE	SHT	SHEET
E.S.	EACH SIDE	SHTG	SHEATHING
E.W.	EACH WAY	SIM.	SIMILAR
ELEC.	ELECTRICAL	SL	SLOPE
EL.	ELEVATION	SMS	SHEET METAL SCREW
ELEV.	ELEVATOR	S.O.G.	SLAB ON GRADE
EMBED.	EMBEDMENT	SPEC.	SPECIFICATION
E.N.	EDGE NAILING	SPEC. SPECS	SPECIFICATIONS
E.O.S.	EDGE OF SLAB	SQ.	SQUARE
EQ.	EQUAL	SS	STAINLESS STEEL
EQUIP.	EQUIPMENT	STAGG.	STAGGER or STAGGERED
E.J.	EXPANSION JOINT	STD	STANDARD
EV.	EVERY	STIFF.	STIFFENER
EXCAV.	EXCAVATION	STIR.	STIRRUP or STIRRUPS
EXP.	EXPANSION	STL	STEEL
EXT.	EXTENSION	STRUC.	STRUCTURAL
F.F.	FAR FACE	SUBST.	SUBSTITUTE
FDN.	FOUNDATION	SUSP.	SUSPENDED
FIN.	FINISH	SYM.	SYMMETRICAL
FLR, FLRS	FLOOR, FLOORS	T&B	TOP AND BOTTOM
F.N.	FIELD NAILING	T&G	TONGUE AND GROOVE
F.O.	FACE OF	THK	THICK
F.O.C.	FACE OF CONCRETE	THRD	THREADED
F.O.S.	FACE OF STUDS	THRU	THROUGH
FP.	FIREPROOFING	T.O.	TOP OF
F.S.	FAR SIDE	T.O.C.	TOP OF CONCRETE
FT	FOOT or FEET	T.O.STL	TOP OF STEEL
FTG, FTGS	FOOTING, FOOTINGS	T.O.SLAB	TOP OF STRUCTURAL SLAB
GA.	GAUGE	TR.	TREAD
GALV.	GALVANIZED	TS	TUBE STEEL
GL.	GLASS or GLAZING	TYP.	TYPICAL
GLB	GLU-LAM BEAM	U.O.N.	UNLESS OTHERWISE NOTED
GRND	GROUND	URM	UNREINFORCED MASONRY
GR.	GRADE	VERT., (V)	VERTICAL
GYP. BD.	GYPSUM BOARD	V.I.F.	VERIFY IN FIELD
H.D.G.	HOT DIPPED GALVANIZED	W or WF	WIDE FLANGE
HDR	HEADER	W	WITH
H.P.	HIGH POINT	W/O	WITHOUT
HSB	HIGH STRENGTH BOLTS	WD	WOOD
HT	HEIGHT	W.P.	WORK POINT
H.D.	HOLD-DOWN	WT	WEIGHT
HSS	HOLLOW STRUCTURAL STEEL	WWM	WELDED WIRE MESH
HK, HKS	HOOK, HOOKS	X HVY.	EXTRA HEAVY
HORIZ., (H)	HORIZONTAL	XX HVY.	DOUBLE EXTRA HVY.
I.D.	INSIDE DIAMETER	X STR.	EXTRA STRONG
INFO.	INFORMATION	XX STR.	DOUBLE EXTRA STRONG
JST, JSTS	JOIST, JOISTS		

CONSULTANTS:



7/25/19  
7/22/19  
Date

ARCHITECT/ENGINEERS:

**HMC Architects**

1827 E. Fir Avenue, Studio 103 / Fresno, CA 93720  
T 559 232 2444 / www.hmcarchitects.com

Drawing Title

**GENERAL NOTES, ABBREVIATIONS, AND SYMBOLS**

Approved Project Director

Project Title

**BUILDING 24  
SEISMIC CORRECTION  
AND ADDITION**

Location

**VAMC FRESNO, CA**

Date

March 12, 2019

Checked

WG

Drawn

MAM/KM

Project Number  
**570-215**

Building Number  
**24**

Drawing Number

**SS002**  
Dwg. 5 of 176

Office of  
Construction and Facilities  
Management

