


NOTES:

1. ALL POSTS SHALL HAVE 2 COATS OF PRIMER AND 2 COATS OF RED TOP COAT.
2. THE PRIMER COAT SHALL MEET THE REQUIREMENTS OF FDOT 971-5.
3. PLACE BOLLARD AT SAME TIME AS APPROACH PADS ARE CONSTRUCTED.
4. SAW CUT AROUND BOLLARD FOOTING.

- ① 6"Ø STEEL PIPE 1/8" MIN. WALL THICKNESS
- ② FILL PIPE WITH 4000 PSI CONCRETE
- ③ 4000 PSI CONCRETE

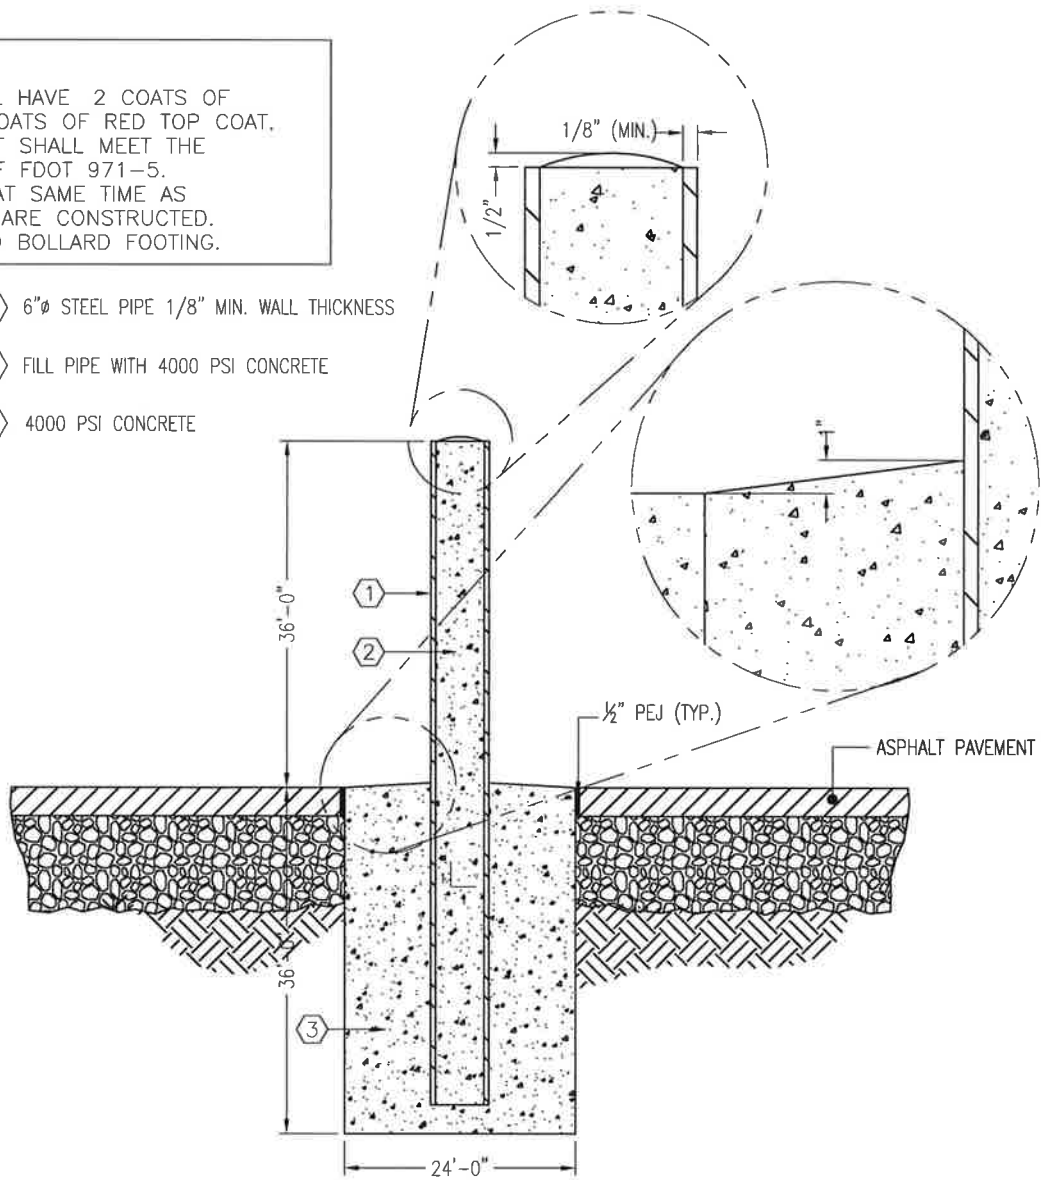

TYPICAL BOLLARD DETAIL

SCALE: N.T.S.

C1