

P:\248663\DRAWINGS\248663 PRIOR SUBMISSIONS\2010-03-23 (FINAL)\248663-E2-E3.DWG

4/19/2010 2:29 PM

HO, JENNY H


Revisions	Date

STAUNTON CHOW

A DIVISION OF

HATCH MOTT MACDONALD

545 Washington Blvd., Jersey City, NJ 07310

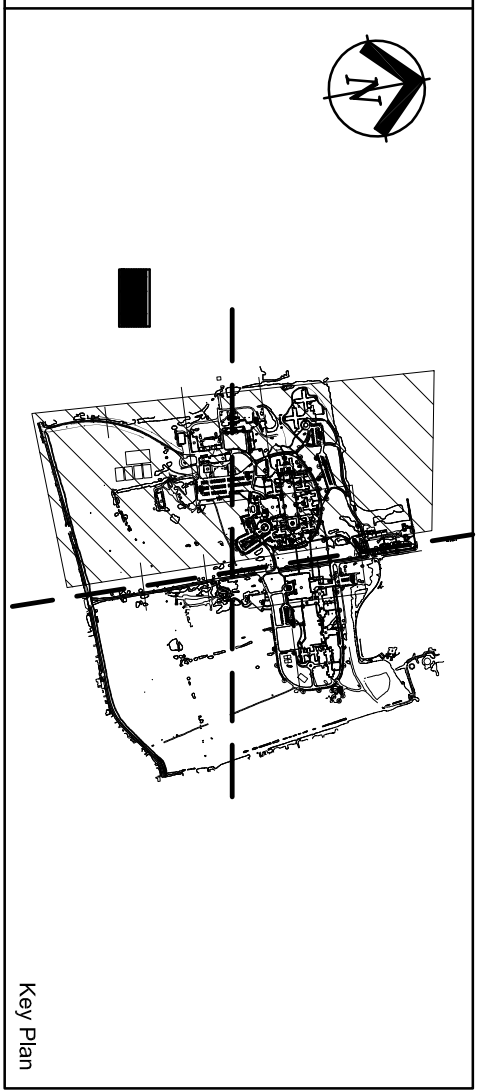

Drawing Title	Project Title
ELECTRICAL	REPLACE SITE LIGHTING
DEMOLITION PLAN - WEST	AT VA LYONS CAMPUS
Approved: Division Chief	Building Number
Approved: Service Director	Checked
	FJF
	Drawn
	ODC
	Location
	VA Lyons Campus, NJHCS, Lyons, NJ

Date	23 MARCH, 2010
Project No.	66144-08-103
Sheet No.	E2
Of	29



- NOTES:**
- REFER TO DRAWING C1 FOR DEFINITION OF BID ITEMS AND ALTERNATE BID ITEMS.
  - REFER TO DRAWING E1 FOR NOTES, SYMBOLS AND ABBREVIATIONS.
  - REFER TO SITE DEMOLITION DRAWINGS, SHEETS C-2 THROUGH C-10.
  - FOR ALL FIXTURES TO BE REMOVED, REMOVE WIRING FROM UNDERGROUND RACEWAY SYSTEM BACK TO SOURCE, AND MARK SOURCE CONTACTOR / BREAKER "SPARE". UOM WHERE CONDUCTORS CAN NOT BE REMOVED, CUT CONDUCTORS AND CONDUIT BELOW SURFACE AT EITHER END AND ABANDON IN PLACE.
  - REMOVE POLE BRASS ASSOCIATED WITH FIXTURES TO BE REMOVED AND FILL HOLE.
  - RESTORING AREA TO MATCH SURROUNDING AREA.
  - AS MUCH AS PRACTICABLE, INSTALL NEW EXISTING FIXTURES PRIOR TO REMOVAL OF EXISTING FIXTURES TO MAINTAIN LIGHTING LEVEL DURING INSTALLATION.
  - REFER TO REMOVAL AND DISCONNECTION SCHEDULE ON THIS DRAWING FOR EXISTING CIRCUITS TO BE DEENERGIZED PRIOR TO REMOVAL OF EXISTING LIGHTING.

- KEY NOTES:**
- PRESERVE EXISTING CIRCUIT IN A GROUND MOUNTED JUNCTION BOX AT THIS LOCATION FOR CONNECTION TO NEW FIXTURE AT SAME LOCATION.
  - REMOVE THREE PLAS LIGHTING FIXTURES AT THIS LOCATION. PRESERVE CIRCUIT FOR NEW FIXTURE TO BE INSTALLED AT SAME LOCATION.

BLDG. No.	PANEL DESIGNATION	LOCATION OF PANEL	CIRCUIT No.
33	ELP38A	BASEMENT EAST-ROOM 08	2, 3, 4
143	LP-E1-H2-SE	2ND FLOOR SOUTH EAST EL CLOSET	7
4	4M-CA	BASEMENT SOUTH EAST-ROOM 66	4, 5, 6
-	NO DESIGNATION	STONE WALL NEAR GUARD SHACK	NOT IDENTIFIED
-	NO DESIGNATION	APARTMENTER-STAGE EAST SIDE	39, 41
18	NO DESIGNATION	BASEMENT	NOT IDENTIFIED
3	OLP1	1ST FLOOR -ROOM 105	1, 3, 9, 10, 11, 12
10	NO DESIGNATION	BASEMENT	12
11	NO DESIGNATION	BASEMENT	9, 11
16	NO DESIGNATION	BASEMENT ELEVATOR MACHINE ROOM	3, 5, 9, 11

**SCHEDULE NOTES:**

- BREAKERS, CIRCUITS, AND CONTROLS SHALL REMAIN FOR AREAS IN WHICH EXISTING LIGHTING IS INDICATED TO BE REPLACED UTILIZING EXISTING CIRCUITS.
- CIRCUITS INDICATED MAY FEED LIGHTING IN PARKING AREAS, ROWWAYS AND WALKWAYS IN VICINITY OF BUILDING. CIRCUIT SHALL REMAIN CONNECTED UNTIL REPLACEMENT LIGHTING IS OPERATIONAL.
- FOR CIRCUITS TO BE REMOVED, REMOVE CONDUCTORS AND CONDUIT WHERE ACCESSIBLE. REMOVE ASSOCIATED TIME CLOCKS AND CONTACTORS, AND MARK BREAKER "SPARE."

**DEMOLITION PLAN 2**

SCALE: 1" = 100'-0"

**REMOVAL AND DISCONNECTION SCHEDULE**

BLDG. No.	PANEL DESIGNATION	LOCATION OF PANEL	CIRCUIT No.
33	ELP38A	BASEMENT EAST-ROOM 08	2, 3, 4
143	LP-E1-H2-SE	2ND FLOOR SOUTH EAST EL CLOSET	7
4	4M-CA	BASEMENT SOUTH EAST-ROOM 66	4, 5, 6
-	NO DESIGNATION	STONE WALL NEAR GUARD SHACK	NOT IDENTIFIED
-	NO DESIGNATION	APARTMENTER-STAGE EAST SIDE	39, 41
18	NO DESIGNATION	BASEMENT	NOT IDENTIFIED
3	OLP1	1ST FLOOR -ROOM 105	1, 3, 9, 10, 11, 12
10	NO DESIGNATION	BASEMENT	12
11	NO DESIGNATION	BASEMENT	9, 11
16	NO DESIGNATION	BASEMENT ELEVATOR MACHINE ROOM	3, 5, 9, 11