



## **ATTACHMENT 02**

---

### **SPECIFICATIONS**

**(KAL Architects)**

**605-14-662**

**245 pages**

**3 Aug 2015**

**Loma Linda, California VA Health Care System (605)**

**Stairwell Renovation**

**CONSTRUCTION**

**VA Loma Linda Healthcare System  
Network 22  
Jerry L. Pettis Memorial VA Medical Center  
11201 Benton Street  
Loma Linda CA 92357**

---

**Final Submittal  
Specifications**

Contract VA 262-P-1115

**Project 605-14-662  
A/E Services “Design Renovation of Three Stairwells”  
at the VA Loma Linda Healthcare System  
Loma Linda, California**

---

KAL Architects  
12-J Mauchly  
Irvine, California 92618

August 3, 2015

**DEPARTMENT OF VETERANS AFFAIRS**

**TABLE OF CONTENTS  
SECTION 00 01 10**

	<b>DIVISION 00 - SPECIAL SECTIONS</b>
00 01 10	Table of Contents
00 01 15	List of Drawing Sheets
	<b>DIVISION 01 - GENERAL REQUIREMENTS</b>
01 00 00	General Requirements
01 33 23	Shop Drawings, Product Data, and Samples
01 42 19	Reference Standards
01 57 19	Temporary Environmental Controls
01 74 19	Construction Waste Management
01 81 11	Sustainable Design Requirements
	<b>DIVISION 02 – EXISTING CONDITIONS</b>
02 41 00	Demolition
02 82 11	Traditional Asbestos Abatement
02 83 33.13	Lead-Based Paint Removal and Disposal
	<b>DIVISION 03 – CONCRETE (Not Used)</b>
	<b>DIVISION 04 – MASONRY (Not Used)</b>
	<b>DIVISION 05 – METALS</b>
05 50 00	Metal Fabrications
05 51 00	Metal Stairs
	<b>DIVISION 06 – WOOD, PLASTICS, AND COMPOSITES (Not Used)</b>
	<b>DIVISION 07 - THERMAL AND MOISTURE PROTECTION</b>
07 84 00	Firestopping
07 92 00	Joint Sealants
	<b>DIVISION 08 – OPENINGS (Not Used)</b>
	<b>DIVISION 09 – FINISHES</b>
09 06 00	Schedule for Finishes
09 29 00	Gypsum Board
09 65 13	Resilient Base and Accessories and Rubber Stair Treads
09 65 19	Resilient Tile Flooring
09 72 16	Vinyl-Coated Fabric Wall Covering

09 91 00	Painting
	<b>DIVISION 10 – SPECIALTIES</b>
10 14 00	Signage
10 26 00	Wall and Door Protection
	<b>DIVISION 11 – EQUIPMENT (Not Used)</b>
	<b>DIVISION 12 – FURNISHINGS (Not Used)</b>
	<b>DIVISION 13 - SPECIAL CONSTRUCTION</b>
13 05 41	Seismic Restraint Requirements for Non-Structural Components
	<b>DIVISION 14 – CONVEYING EQUIPEMENT (Not Used)</b>
	<b>DIVISION 21- FIRE SUPPRESSION (Not Used)</b>
	<b>DIVISION 22 – PLUMBING (Not Used)</b>
	<b>DIVISION 23 – HEATING, VENTILATING, AND AIR CONDITIONING (HVAC) (Not Used)</b>
	<b>DIVISION 26 – ELECTRICAL</b>
26 05 11	Requirements for Electrical Installations
26 05 19	Low-Voltage Electrical Power Conductors and Cables (600 Volts and Below)
26 05 33	Raceways and Boxes for Electrical Systems
26 09 23	Lighting Controls
26 27 26	Wiring Devices
26 51 00	Interior Lighting
	<b>DIVISION 27 – COMMUNICATIONS (Not Used)</b>
	<b>DIVISION 28 – ELECTRONIC SAFETY AND SECURITY (Not Used)</b>
	<b>DIVISION 31 – EARTHWORK (Not Used)</b>
	<b>DIVISION 32 – EXTERIOR IMPROVEMENTS (Not Used)</b>
	<b>DIVISION 33 – UTILITIES (Not Used)</b>
--- E N D ---	

**SECTION 00 01 15**  
**LIST OF DRAWINGS**

The drawings listed below accompanying this specification form a part of the contract.

Drawing No.

Title

**GENERAL**

GI000

TITLE SHEET

**ARCHITECTURAL**

AD101

DEMO STAIR PLAN (STAIR NO. 1)

AD102

DEMO STAIR PLAN (STAIR NO. 2)

AD103

DEMO STAIR PLAN (STAIR NO. 7)

AD401

STAIR SECTIONS (DEMO) & PHOTOGRAPHS

AE101

STAIR PLANS (STAIR NO. 1)

AE102

STAIR PLANS (STAIR NO. 2)

AE103

STAIR PLAN (STAIR NO. 7)

AF101

STAIR FINISH PLANS (STAIR NO. 1)

AF102

STAIR FINISH PLANS (STAIR NO. 2)

AF103

STAIR PLAN (STAIR NO. 7)

AE401

STAIR SECTIONS (STAIR NO. 1)

AE402

STAIR SECTIONS (STAIR NO. 2)

AE403

STAIR SECTIONS (STAIR NO. 7)

AE501

DETAILS

AF601

FINISH SCHEDULE

**ELECTRICAL**

E001

GENERAL NOTES DEMO NOTES AND SHEET INDEX

E002

SYMBOL LIST, ABBREVIATION, SEISMIC NOTES AND  
LIGHTING FIXTURE SCHEDULE

ED101

DEMO FLOOR PLANS (STAIR NO. 1)

ED102

DEMO FLOOR PLANS (STAIR NO. 2)

ED103

DEMO FLOOR PLANS (STAIR NO. 7)

E101

REMODEL FLOOR PLANS (STAIR NO. 1)

E102

REMODEL FLOOR PLANS (STAIR NO. 2)

E103

REMODEL FLOOR PLANS (STAIR NO. 7)

E104

OVERALL FLOOR PLAN – FOR REFERENCE ONLY

--- E N D ---

**SECTION 01 00 00  
GENERAL REQUIREMENTS**

**TABLE OF CONTENTS**

1.1 GENERAL INTENTION .....	1
1.2 STATEMENT OF BID ITEM(S).....	1
1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR .....	2
1.4 CONSTRUCTION SECURITY REQUIREMENTS.....	2
1.5 FIRE SAFETY .....	3
1.6 OPERATIONS AND STORAGE AREAS .....	6
1.7 ALTERATIONS .....	9
1.8 INFECTION PREVENTION MEASURES .....	10
1.9 DISPOSAL AND RETENTION.....	13
1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS .....	14
1.11 RESTORATION .....	15
1.12 AS-BUILT DRAWINGS .....	15
1.13 USE OF ROADWAYS.....	16
1.14 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT .....	16
1.15 TEMPORARY USE OF EXISTING ELEVATORS .....	17
1.16 TEMPORARY TOILETS .....	17
1.17 AVAILABILITY AND USE OF UTILITY SERVICES.....	18
1.18 TESTS.....	18
1.19 INSTRUCTIONS .....	19
1.20 RELOCATED EQUIPMENT ITEMS.....	20
1.21 STORAGE SPACE FOR DEPARTMENT OF VETERANS AFFAIRS EQUIPMENT .....	21
1.22 PHOTOGRAPHIC DOCUMENTATION.....	22

**SECTION 01 00 00  
GENERAL REQUIREMENTS**

**1.1 GENERAL INTENTION**

- A. Contractor shall completely prepare site for building operations, including demolition and removal of existing structures, and furnish labor and materials and perform work for **Renovation of Three Stairwells, Veterans Administration Healthcare Center, Loma Linda, California** as required by drawings and specifications.
- B. Visits to the site by Bidders may be made only by appointment with the Medical Center Engineering Officer.
- C. Offices of **KAL Architects, Inc.**, as Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the Government without affirmations by Contracting Officer or his duly authorized representative.
- D. All employees of general contractor and subcontractors shall comply with VA security management program and obtain permission of the VA police, be identified by project and employer, and restricted from unauthorized access.
- E. Prior to commencing work, general contractor shall provide proof that a OSHA designated "competent person" (CP) (29 CFR 1926.20(b)(2)) will maintain a presence at the work site whenever the general or subcontractors are present.
- F. Training:
  - 1. All employees of general contractor or subcontractors shall have the 10-hour OSHA certified Construction Safety course for on-site staff and 30 additional hours for project superintendent (competent person) and /or other relevant competency training, as determined by VA COTR with input from the ICRA team.
  - 2. Submit training records of all such employees for approval before the start of work.
- G. VHA Directive 2011-36, Safety and Health during Construction, dated 9/22/2011 in its entirety is made a part of this section

**1.2 STATEMENT OF BID ITEM(S)**

- A. ITEM I, MAIN BASE BID: Work includes general construction, alterations, electrical work, utility systems, necessary removal of existing construction and certain other items. Include Stair No. 1, Stair No. 2 and Stair No. 7.
  - 1. Contract completion time shall be 180 calendar days.

Amount: \_\_\_\_\_ \$ \_\_\_\_\_  
(Words) (Figures)

- B. DEDUCTIVE BID ITEM1: **Same as Main Bid, except remove Stair No. 7**

1. Contract completion time shall be 120 calendar days.

Amount: \_\_\_\_\_ \$ \_\_\_\_\_  
(Words) (Figures)

### **1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR**

- A. AFTER AWARD OF CONTRACT, one CD-ROM of specifications and drawings will be furnished if not obtained from the IFB.
- B. Additional sets of drawings may be made by the Contractor, at Contractor's expense, from the CD-ROM issued in the IFB.

### **1.4 CONSTRUCTION SECURITY REQUIREMENTS**

- A. Security Plan:
  1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
  2. The General Contractor is responsible for assuring that all sub-contractors working on the project and their employees also comply with these regulations.
- B. Security Procedures:
  1. General Contractor's employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.
  2. For working outside the "regular hours" as defined in the contract, The General Contractor shall give 3 days notice to the Contracting Officer so that security arrangements can be provided for the employees. This notice is separate from any notices required for utility shutdown described later in this section.
  3. No photography of VA premises is allowed without written permission of the Contracting Officer.
  4. VA reserves the right to close down or shut down the project site and order General Contractor's employees off the premises in the event of a national emergency. The General Contractor may return to the site only with the written approval of the Contracting Officer.
- C. Key Control:
  1. The General Contractor shall provide duplicate keys and lock combinations to the Project Engineer for the purpose of security inspections of every area of project including tool boxes and parked machines and take any emergency action.
- E. Document Control:
  1. Before starting any work, the General Contractor/Sub Contractors shall submit an electronic security memorandum describing the approach to following goals and maintaining confidentiality of "sensitive information".



2. The General Contractor is responsible for safekeeping of all drawings, project manual and other project information. This information shall be shared only with those with a specific need to accomplish the project.
  4. Certain documents, sketches, videos or photographs and drawings may be marked "Law Enforcement Sensitive" or "Sensitive Unclassified". Secure such information in separate containers and limit the access to only those who will need it for the project. Return the information to the Contracting Officer upon request.
  5. These security documents shall not be removed or transmitted from the project site without the written approval of Contracting Officer.
  6. All paper waste or electronic media such as CD's and diskettes shall be shredded and destroyed in a manner acceptable to the VA.
  7. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of "sensitive information".
  8. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).
    - a. Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
    - b. "Sensitive information" including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.
- F. Motor Vehicle Restrictions
1. Vehicle authorization request shall be required for any vehicle entering the site and such request shall be submitted 24 hours before the date and time of access. Access shall be restricted to picking up and dropping off materials and supplies.
  2. Separate permits shall be issued for General Contractor and its employees for parking in designated areas only.

## 1.5 FIRE SAFETY

- A. Applicable Publications: Publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.
1. American Society for Testing and Materials (ASTM):  
E84-2009 ..... Surface Burning Characteristics of Building Materials
  2. National Fire Protection Association (NFPA):  
10-2010..... Standard for Portable Fire Extinguishers  
30-2008..... Flammable and Combustible Liquids Code  
51B-2009 ..... Standard for Fire Prevention During Welding, Cutting and Other  
Hot Work  
70-2011..... National Electrical Code

241-2009 .....Standard for Safeguarding Construction, Alteration, and  
Demolition Operations

3. Occupational Safety and Health Administration (OSHA):

29 CFR 1926 .....Safety and Health Regulations for Construction

- B. Fire Safety Plan: Establish and maintain a fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to Project Engineer and Facility Safety Manager for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES Prior to any worker for the contractor or subcontractors beginning work, they shall undergo a safety briefing provided by the general contractor's competent person per OSHA requirements. This briefing shall include information on the construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, etc. Documentation shall be provided to the Project Engineer that individuals have undergone contractor's safety briefing.
- C. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.
- D. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).
- E. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.
- F. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with Project Engineer and Facility Safety Manager.
- G. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to Project Engineer and Facility Safety Manager.
- H. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.
- I. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.
- J. Sprinklers: Install, test and activate new automatic sprinklers prior to removing existing sprinklers.
- K. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with Project Engineer and Facility Safety Manager. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with

the medical center. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the Project Engineer.

- L. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with Project Engineer and Facility Safety Manager.
- M. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with Project Engineer. Obtain permits from facility Safety Manager at least 72 hours in advance. Designate contractor's responsible project-site fire prevention program manager to permit hot work.
- N. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to Project Engineer and Facility Safety Manager.
- c. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. In separate and detached buildings under construction, smoking is prohibited except in designated smoking rest areas.
- P. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.
- Q. Perform other construction, alteration and demolition operations in accordance with 29 CFR 1926.
- R. If required, submit documentation to the Project Engineer that personnel have been trained in the fire safety aspects of working in areas with impaired structural or compartmentalization features.
- S. Fines for violations of Fire Safety Requirements.
  - 1. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. In separate and detached buildings under construction, smoking is prohibited except in designated smoking rest areas.
  - 2. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.
  - 3. Tripping, setting off, of fire alarms and /or flow switches, without proper notification is a violation fineable at the minimum of \$2,500 per offense plus expenses.
  - 4. Smoke detectors that were bagged, covered, or any way rendered inoperable during work shift must be made operable at the end of said work shift. This offense is fineable at the minimum of \$2,500 per offense plus expenses.
  - 5. Any false alarms that causes a visit by the fire department is fineable at the minimum of \$2,500 per offense plus expenses.
  - 6. Hot Work: The following offenses are a violation fineable at a minimum of \$2,500 per offense plus expenses: a) Failure to obtain a hot work permit prior to work, b) Failure to maintain Fire Watch, as required during Hot Work, and c) Failure to remove smoke detector cover after said Hot Work is completed at the end of the work shift for the day, whichever is sooner.
  - 7. Fines for Open Fire Doors: Fire doors at all times shall be kept closed, where required. These doors shall not be left open in any manner; they shall not be propped or tied open.

Violations are fineable at no less than \$2,500 per violation plus expenses. These fines will be imposed due to contractor's fault, negligence or failure to comply with NFPA codes and VA Policies.

8. Interstitial work shall have safety measures and personnel in place both above and below the ceiling to ensure no injury or death occurs to individuals below the work zone from falling items through the ceiling. Failure to do so is a Fine of \$5,000 per offense.

## **1.6 OPERATIONS AND STORAGE AREAS**

- A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance.
- B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.
- C. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.
- D. Working space and space available for storing materials shall be as determined by the Project Engineer.
- E. Workmen are subject to rules of Medical Center applicable to their conduct.
- F. Execute work so as to interfere as little as possible with normal functioning of Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment, and with work being done by others. Use of equipment and tools that transmit vibrations and noises through the building structure, are not permitted in buildings that are occupied, during construction, jointly by patients or medical personnel, and Contractor's personnel, except as permitted by Project Engineer where required by limited working space.
  1. Do not store materials and equipment in other than assigned areas.
  2. Schedule delivery of materials and equipment to immediate construction working areas within buildings in use by Department of Veterans Affairs in quantities sufficient for not more than two work days.

3. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of Contractor's materials and equipment will be permitted subject to fire and safety requirements.
- G. Phasing: To insure such executions, Contractor shall furnish the Project Engineer with a schedule of approximate dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, Contractor shall notify the Project Engineer two weeks in advance of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such dates to insure accomplishment of this work in successive phases mutually agreeable to Medical Center Director, Project Engineer and Contractor, as follows:
  1. The contractor may submit an alternate phasing plan for the Contracting Officer's Approval
    - a. Each phase is to be accepted by the contracting officer prior to executing the next phase of work.
    - b. Temporary signage to other stairs should be provided for each phase.
    - c. Maximum of one stairwell should be worked on at one time. As a guide the following stairwells may have been identified for each phase:
      - i. Phase I: Stair No. 1.
      - ii. Phase II: Stair No. 2.
      - iii. Phase III: Stair No. 7.For Deductive Bid No. 1: Remove Stair No. 7 (annotated as Phase III).
    - d. Work outside the Stairwell, will be coordinated with the VA Project Engineer, and if needed it should be conducted during evenings or weekends.
- H. Building No. 1 (main Hospital) will be occupied during performance of work; coordinate with VAMC to arrange work schedules for minimal disruption.
  1. Contractor shall take all measures and provide all material necessary for protecting existing equipment and property in affected areas of construction against dust and debris, so that equipment and affected areas to be used in the Medical Centers operations will not be hindered. Contractor shall permit access to Department of Veterans Affairs personnel and patients through other construction areas which serve as routes of access to such affected areas and equipment. Coordinate alteration work in areas occupied by Department of Veterans Affairs so that Medical Center operations will continue during the construction period.
- I. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems

(including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by Project Engineer.

1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of Project Engineer. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without the Medical Center Director's prior knowledge and written approval. Refer to specification Sections 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS for additional requirements.

- a. Interruption of Utilities: A monetary fine, at a minimum of \$2,500 plus expenses, will be levied, if any utility service is interrupted in any area of the facility without proper notification and authorization, i.e., "Utility Shutdown Notice"

2. Contractor shall submit a request to interrupt any such services to Project Engineer, in writing, 48 hours in advance of proposed interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.
3. Major interruptions of any system must be requested, in writing, at least 15 calendar days prior to the desired time and shall be performed as directed by the Project Engineer.
4. In case of a contract construction emergency, service will be interrupted on approval of Project Engineer. Such approval will be confirmed in writing as soon as practical.
5. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.

J Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, which are to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged. The lines shall not be capped in finished areas, but shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas, or within walls or partitions; so that they are completely behind the finished surfaces.

K. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:

1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles.
2. Method and scheduling of required cutting, altering and removal of existing roads, walks and entrances must be approved by the Project Engineer.

L. Coordinate the work for this contract with other construction operations as directed by Project Engineer. This includes the scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS.

## 1.7 ALTERATIONS

- A. Survey: Before any work is started, the Contractor shall make a thorough survey with the Project Engineer and a representative of VA Supply Service, of areas of buildings in which alterations occur and areas which are anticipated routes of access, and furnish a report, signed by all three, to the Contracting Officer. This report shall list by rooms and spaces:
  - 1. Existing condition and types of resilient flooring, doors, windows, walls and other surfaces not required to be altered throughout affected areas of building.
  - 2. Existence and conditions of items such as plumbing fixtures and accessories, electrical fixtures, equipment, venetian blinds, shades, etc., required by drawings to be either reused or relocated, or both.
  - 3. Shall note any discrepancies between drawings and existing conditions at site.
  - 4. Shall designate areas for working space, materials storage and routes of access to areas within buildings where alterations occur and which have been agreed upon by Contractor and Project Engineer.
- B. Any items required by drawings to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of Project Engineer, to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by Contractor with new items in accordance with specifications which will be furnished by Government. Provided the contract work is changed by reason of this subparagraph B, the contract will be modified accordingly, under provisions of clause entitled "DIFFERING SITE CONDITIONS" (FAR 52.236-2) and "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).
- C. Re-Survey: Thirty days before expected partial or final inspection date, the Contractor and Project Engineer together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors, windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:
  - 1. Re-survey report shall also list any damage caused by Contractor to such flooring and other surfaces, despite protection measures; and, will form basis for determining extent of repair work required of Contractor to restore damage caused by Contractor's workmen in executing work of this contract.
- D. Protection: Provide the following protective measures:
  - 1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.
  - 2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.
  - 3. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be



adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

## **1.8 INFECTION PREVENTION MEASURES**

- A. Implement the requirements of VAMC's Infection Control Risk Assessment (ICRA) team. ICRA Group may monitor dust in the vicinity of the construction work and require the Contractor to take corrective action immediately if the safe levels are exceeded.
- B. Establish and maintain a dust control program as part of the contractor's infection preventive measures in accordance with the guidelines provided by ICRA Group and as specified here. Prior to start of work, prepare a plan detailing project-specific dust protection measures, including periodic status reports, and submit to Project Engineer and Facility ICRA team for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
  - 1. All personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the medical center.
- C. Medical center Infection Control personnel shall monitor for airborne disease (e.g. aspergillosis) as appropriate during construction. A baseline of conditions may be established by the medical center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality. In addition:
  - 1. The Project Engineer and VAMC Infection Control personnel shall review pressure differential monitoring documentation to verify that pressure differentials in the construction zone and in the patient-care rooms are appropriate for their settings. The requirement for negative air pressure in the construction zone shall depend on the location and type of activity. Upon notification, the contractor shall implement corrective measures to restore proper pressure differentials as needed.
  - 2. In case of any problem, the medical center, along with assistance from the contractor, shall conduct an environmental assessment to find and eliminate the source.
- D. In general, following preventive measures shall be adopted during construction to keep down dust and prevent mold.
  - 1. Dampen debris to keep down dust and provide temporary construction partitions in existing structures where directed by Project Engineer. Blank off ducts and diffusers to prevent circulation of dust into occupied areas during construction.
  - 2. Do not perform dust producing tasks within occupied areas without the approval of the Project Engineer. For construction in any areas that will remain jointly occupied by the medical Center and Contractor's workers, the Contractor shall:
    - a. Provide dust proof two-hour fire-rated temporary drywall construction barriers to completely separate construction from the operational areas of the hospital in order to contain dirt debris and dust. Barriers shall be sealed and made presentable on hospital



occupied side. Install a self-closing rated door in a metal frame, commensurate with the partition, to allow worker access. Maintain negative air at all times. A fire retardant polystyrene, 6-mil thick or greater plastic barrier meeting local fire codes may be used where dust control is the only hazard, and an agreement is reached with the Project Engineer and Medical Center.

- b. HEPA filtration is required where the exhaust dust may reenter the breathing zone. Contractor shall verify that construction exhaust to exterior is not reintroduced to the medical center through intake vents, or building openings. Install HEPA (High Efficiency Particulate Accumulator) filter vacuum system rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. Insure continuous negative air pressures occurring within the work area. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Exhaust hoses shall be heavy duty, flexible steel reinforced and exhausted so that dust is not reintroduced to the medical center.
- c. Adhesive Walk-off/Carpet Walk-off Mats, minimum 600mm x 900mm (24" x 36"), shall be used at all interior transitions from the construction area to occupied medical center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.
- d. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as they are created. Transport these outside the construction area in containers with tightly fitting lids.
- e. The contractor shall not haul debris through patient-care areas without prior approval of the Project Engineer and the Medical Center. When, approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.
- f. Using a HEPA vacuum, clean inside the barrier and vacuum ceiling tile prior to replacement. Any ceiling access panels opened for investigation beyond sealed areas shall be sealed immediately when unattended.
- g. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.

- h. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.
- E. Final Cleanup:
  - 1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
  - 2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
  - 3. All new air ducts shall be cleaned prior to final inspection.
- F. Prevention of Legionella Disease:

Prior to construction, the contractor shall request that the VA test for Legionella in the construction zone. The contractor shall prepare a plan detailing project-specific protection measures as recommend by the VA and the VA Safety Office, including periodic status reports, and submit to the Project Engineer/Architect for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. At a minimum:

  - 1. The Contractor shall document all water distribution systems to be affected by the project, to include all valves, outlets, piping, lateral lines and fixtures. The Construction Drawings may be used as the documentation.
  - 2. The Contractor shall provide infection control measures necessary and as related to the water distribution system to prevent Legionella. At a minimum, the contractor should flush the water system weekly, within the construction zone, and each instance the system is altered. The Safety Office may periodically test at unannounced times inside the construction zone.
  - 3. Before working on the system, the Contractor shall request the VA test for Legionella. While working on the system, the Contractor shall isolate the system within the area and drain it to perform the necessary repairs or replacement. If the system is dormant and remains energized for a period of more than five (5) days, the contractor shall flush the system weekly. Before placing the system back in service, the Contractor shall test the system for leaks and request the VA perform a test for Legionella.
  - 4. The Contractor shall remove all "dead legs" and faulty mixing valves from the system, as well as other faulty parts related to the system.
  - 5. The Contractor shall provide documentation that all procedures were followed during construction. The contractor should request that the VA test the system. The results must come back as x3 negative for Legionella cultures before the system can be placed back in service.
  - a) Flushing of outlets as a pre-occupancy precaution may be sufficient if there is no history of the organism in the system's water or of prior cases; however, if a history of contamination exists, it may be more prudent to take more aggressive measures (such as hyper-chlorination

or thermal eradication) followed by culturing the water for the presence of Legionella to assure effectiveness of mitigation activity. Similar activities should be followed before inactive portions of the water distribution system (e.g. showers, sinks) are reused.

- b) If the test results are above the limit, then measures must be taken to disinfect the system as directed by the Safety Office.

## **1.9 DISPOSAL AND RETENTION**

- A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:
1. Reserved items which are to remain property of the Government are noted on drawings or in specifications as items to be stored. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by Project Engineer.
  2. Items not reserved shall become property of the Contractor and be removed by Contractor from Medical Center.
  3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractor's operation.
  4. PCB Transformers and Capacitors: The Contractor shall be responsible for disposal of the Polychlorinated Biphenyl (PCB) transformers and capacitors. The transformers and capacitors shall be taken out of service and handled in accordance with the procedures of the Environmental Protection Agency (EPA) and the Department of Transportation (DOT) as outlined in Code of Federal Regulation (CFR), Titled 40 and 49 respectively. The EPA's Toxic Substance Control Act (TSCA) Compliance Program Policy Nos. 6-PCB-6 and 6-PCB-7 also apply. Upon removal of PCB transformers and capacitors for disposal, the "originator" copy of the Uniform Hazardous Waste Manifest (EPA Form 8700-22), along with the Uniform Hazardous Waste Manifest Continuation Sheet (EPA Form 8700-22A) shall be returned to the Contracting Officer who will annotate the contract file and transmit the Manifest to the Medical Center's Chief.
    - a. Copies of the following listed CFR titles may be obtained from the Government Printing Office:
      - 40 CFR 261.....Identification and Listing of Hazardous Waste
      - 40 CFR 262.....Standards Applicable to Generators of Hazardous Waste
      - 40 CFR 263.....Standards Applicable to Transporters of Hazardous Waste

40 CFR 761 .....	PCB Manufacturing, Processing, Distribution in Commerce, and use Prohibitions
49 CFR 172 .....	Hazardous Material tables and Hazardous Material Communications Regulations
49 CFR 173 .....	Shippers - General Requirements for Shipments and Packaging
49 CFR 173 .....	Subpart A General
49 CFR 173 .....	Subpart B Preparation of Hazardous Material for Transportation
49 CFR 173 .....	Subpart J Other Regulated Material; Definitions and Preparation
TSCA .....	Compliance Program Policy Nos. 6-PCB-6 and 6-PCB-7

#### **1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS**

- A. The Contractor shall preserve and protect all structures, equipment, and vegetation (such as trees, shrubs, and grass) on or adjacent to the work site, which are not to be removed and which do not unreasonably interfere with the work required under this contract. The Contractor shall only remove trees when specifically authorized to do so, and shall avoid damaging vegetation that will remain in place. If any limbs or branches of trees are broken during contract performance, or by the careless operation of equipment, or by workmen, the Contractor shall trim those limbs or branches with a clean cut and paint the cut with a tree-pruning compound as directed by the Contracting Officer.
- B. The Contractor shall protect from damage all existing improvements and utilities at or near the work site and on adjacent property of a third party, the locations of which are made known to or should be known by the Contractor. The Contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor.

##### **(FAR 52.236-9)**

- C. Refer to Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, for additional requirements on protecting vegetation, soils and the environment. Refer to Articles, "Alterations", "Restoration", and "Operations and Storage Areas" for additional instructions concerning repair of damage to structures and site improvements.
- D. Refer to FAR clause 52.236-7, "Permits and Responsibilities," which is included in General Conditions. A National Pollutant Discharge Elimination System (NPDES) permit is required for this project. The Contractor is considered an "operator" under the permit and has extensive responsibility for compliance with permit requirements. VA will make the permit application available at the (appropriate medical center) office. The apparent low bidder, contractor and affected subcontractors shall furnish all information and certifications that are required to comply

with the permit process and permit requirements. Many of the permit requirements will be satisfied by completing construction as shown and specified. Some requirements involve the Contractor's method of operations and operations planning and the Contractor is responsible for employing best management practices. The affected activities often include, but are not limited to the following:

- Designating areas for equipment maintenance and repair;
- Providing waste receptacles at convenient locations and provide regular collection of wastes;
- Locating equipment wash down areas on site, and provide appropriate control of wash-waters;
- Providing protected storage areas for chemicals, paints, solvents, fertilizers, and other potentially toxic materials; and
- Providing adequately maintained sanitary facilities.

#### **1.11 RESTORATION**

- A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the Project Engineer. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the Project Engineer before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.
- B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.
- C. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workmen to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone) which are indicated on drawings and which are not scheduled for discontinuance or abandonment.
- D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2).

#### **1.12 AS-BUILT DRAWINGS**

- A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications.

- B. All variations shall be shown in the same general detail as used in the contract drawings. To insure compliance, as-built drawings shall be made available for the Project Engineer's review, as often as requested.
- C. Contractor shall deliver two approved completed sets of as-built drawings to the Project Engineer within 15 calendar days after each completed phase and after the acceptance of the project by the Project Engineer.
- D. Paragraphs A, B, & C shall also apply to all shop drawings.

#### **1.13 USE OF ROADWAYS**

- A. For hauling, use only established public roads and roads on Medical Center property and, when authorized by the Project Engineer, such temporary roads which are necessary in the performance of contract work. Temporary roads shall be constructed by the Contractor at Contractor's expense. When necessary to cross curbing, sidewalks, or similar construction, they must be protected by well-constructed bridges.
- B. When certain buildings (or parts of certain buildings) are required to be completed in advance of general date of completion, all roads leading thereto must be completed and available for use at time set for completion of such buildings or parts thereof.

#### **1.14 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT**

- A. Use of installed mechanical and electrical equipment to provide heat, ventilation, plumbing, light and power will be permitted subject to compliance with the following provisions:
  - 1. Permission to use each unit or system must be given by Project Engineer. If the equipment is not installed and maintained in accordance with the following provisions, the Project Engineer will withdraw permission for use of the equipment.
  - 2. Electrical installations used by the equipment shall be completed in accordance with the drawings and specifications to prevent damage to the equipment and the electrical systems, i.e. transformers, relays, circuit breakers, fuses, conductors, motor controllers and their overload elements shall be properly sized, coordinated and adjusted. Voltage supplied to each item of equipment shall be verified to be correct and it shall be determined that motors are not overloaded. The electrical equipment shall be thoroughly cleaned before using it and again immediately before final inspection including vacuum cleaning and wiping clean interior and exterior surfaces.
  - 3. Units shall be properly lubricated, balanced, and aligned. Vibrations must be eliminated.
  - 4. Automatic temperature control systems for preheat coils shall function properly and all safety controls shall function to prevent coil freeze-up damage.
  - 5. The air filtering system utilized shall be that which is designed for the system when complete, and all filter elements shall be replaced at completion of construction and prior to testing and balancing of system.

6. All components of heat production and distribution system, metering equipment, condensate returns, and other auxiliary facilities used in temporary service shall be cleaned prior to use; maintained to prevent corrosion internally and externally during use; and cleaned, maintained and inspected prior to acceptance by the Government.
- B. Prior to final inspection, the equipment or parts used which show wear and tear beyond normal, shall be replaced with identical replacements, at no additional cost to the Government.
- C. This paragraph shall not reduce the requirements of the electrical specifications sections.
- D. Any damage to the equipment or excessive wear due to prolonged use will be repaired replaced by the contractor at the contractor's expense.

#### **1.15 TEMPORARY USE OF EXISTING ELEVATORS**

- A. Use of existing elevators for handling building materials and Contractor's personnel will be permitted subject to following provisions:
  1. Contractor makes all arrangements with the Project Engineer for use of elevators. The Project Engineer will ascertain that elevators are in proper condition. Contractor may use elevators for daily use between the hours of 8:00 AM to 4:40 PM and for special nonrecurring time intervals when permission is granted. Personnel for operating elevators will not be provided by the Department of Veterans Affairs.
  2. Contractor covers and provides maximum protection of following elevator components:
    - a. Entrance jambs, heads soffits and threshold plates.
    - b. Entrance columns, canopy, return panels and inside surfaces of car enclosure walls.
    - c. Finish flooring.
  3. Government will accept hoisting ropes of elevator and rope of each speed governor if they are worn under normal operation. However, if these ropes are damaged by action of foreign matter such as sand, lime, grit, stones, etc., during temporary use, they shall be removed and replaced by new hoisting ropes.
  4. If brake lining of elevators are excessively worn or damaged during temporary use, they shall be removed and replaced by new brake lining.
  5. All parts of main controller, starter, relay panel, selector, etc., worn or damaged during temporary use shall be removed and replaced with new parts, if recommended by elevator inspector after elevator is released by Contractor.
  6. Place elevator in condition equal, less normal wear, to that existing at time it was placed in service of Contractor as approved by Contracting Officer.

#### **1.16 TEMPORARY TOILETS**

- A. Provide where directed, (for use of all Contractor's workmen) ample temporary sanitary toilet accommodations with suitable sewer and water connections; or, when approved by Project Engineer, provide suitable dry closets where directed. Keep such places clean and free from



flies, and all connections and appliances connected therewith are to be removed prior to completion of

#### **1.17 AVAILABILITY AND USE OF UTILITY SERVICES**

- A. The Government shall make all reasonably required amounts of utilities available to the Contractor from existing outlets and supplies, as specified in the contract. The amount to be paid by the Contractor for chargeable electrical services shall be the prevailing rates charged to the Government. The Contractor shall carefully conserve any utilities furnished without charge.
- B. The Contractor, at Contractor's expense and in a workmanlike manner satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines, and all meters required to measure the amount of electricity used for the purpose of determining charges. Before final acceptance of the work by the Government, the Contractor shall remove all the temporary connections, distribution lines, meters, and associated paraphernalia.
- C. Heat: Furnish temporary heat necessary to prevent injury to work and materials through dampness and cold. Use of open salamanders or any temporary heating devices which may be fire hazards or may smoke and damage finished work, will not be permitted. Maintain minimum temperatures as specified for various materials:
  - 1. Obtain heat by connecting to Medical Center heating distribution system.
    - a. Steam is available at no cost to Contractor.
- D. Electricity (for Construction and Testing): Furnish all temporary electric services.
  - 1. Obtain electricity by connecting to the Medical Center electrical distribution system. The Contractor shall meter and pay for electricity required for electric cranes and hoisting devices, electrical welding devices and any electrical heating devices providing temporary heat. Electricity for all other uses is available at no cost to the Contractor.
- E. Water (for Construction and Testing): Furnish temporary water service.
  - 1. Obtain water by connecting to the Medical Center water distribution system. Provide reduced pressure backflow preventer at each connection. Water is available at no cost to the Contractor.
  - 2. Maintain connections, pipe, fittings and fixtures and conserve water-use so none is wasted. Failure to stop leakage or other wastes will be cause for revocation (at Project Engineer's discretion) of use of water from Medical Center's system.

#### **1.18 TESTS**

- A. Pre-test electrical equipment and systems and make corrections required for proper operation of such systems before requesting final tests. Final test will not be conducted unless pre-tested.
- B. Conduct final tests required in various sections of specifications in presence of an authorized representative of the Contracting Officer. Contractor shall furnish all labor, materials, equipment, instruments, and forms, to conduct and record such tests.



- C. Mechanical and electrical systems shall be balanced, controlled and coordinated. A system is defined as the entire complex which must be coordinated to work together during normal operation to produce results for which the system is designed. For example, air conditioning supply air is only one part of entire system which provides comfort conditions for a building. Other related components are return air, exhaust air, steam, chilled water, refrigerant, hot water, controls and electricity, etc. Another example of a complex which involves several components of different disciplines is a boiler installation. Efficient and acceptable boiler operation depends upon the coordination and proper operation of fuel, combustion air, controls, steam, feedwater, condensate and other related components.
- D. All related components as defined above shall be functioning when any system component is tested. Tests shall be completed within a reasonably short period of time during which operating and environmental conditions remain reasonably constant.
- E. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components and of the entire system.

#### **1.19 INSTRUCTIONS**

- A. Contractor shall furnish Maintenance and Operating manuals and verbal instructions when required by the various sections of the specifications and as hereinafter specified.
- B. Manuals: Maintenance and operating manuals (four copies each) for each separate piece of equipment shall be delivered to the Project Engineer coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing equipment similar to but of a different model, style, and size than that furnished will not be accepted.
- C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed instructions to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a

system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the Project Engineer and shall be considered concluded only when the Project Engineer is satisfied in regard to complete and thorough coverage. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the Project Engineer, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

#### **1.20 GOVERNMENT-FURNISHED PROPERTY**

- A. The Government shall deliver to the Contractor, the Government-furnished property shown on the Schedule on the drawings.
- B. Equipment furnished by Government to be installed by Contractor will be furnished to Contractor at the Medical Center.
- C. Storage space for equipment will be provided by the Government and the Contractor shall be prepared to unload and store such equipment therein upon its receipt at the Medical Center.
- D. Notify Contracting Officer in writing, 60 days in advance, of date on which Contractor will be prepared to receive equipment furnished by Government. Arrangements will then be made by the Government for delivery of equipment.
  - 1. Immediately upon delivery of equipment, Contractor shall arrange for a joint inspection thereof with a representative of the Government. At such time the Contractor shall acknowledge receipt of equipment described, make notations, and immediately furnish the Government representative with a written statement as to its condition or shortages.
  - 2. Contractor thereafter is responsible for such equipment until such time as acceptance of contract work is made by the Government.
- E. Equipment furnished by the Government will be delivered in a partially assembled (knock down) condition in accordance with existing standard commercial practices, complete with all fittings, fastenings, and appliances necessary for connections to respective services installed under contract. All fittings and appliances (i.e., couplings, ells, tees, nipples, piping, conduits, cables, and the like) necessary to make the connection between the Government furnished equipment item and the utility stub-up shall be furnished and installed by the contractor at no additional cost to the Government.
- F. Completely assemble and install the Government furnished equipment in place ready for proper operation in accordance with specifications and drawings.
- G. Furnish supervision of installation of equipment at construction site by qualified factory trained technicians regularly employed by the equipment manufacturer.

### **1.21 RELOCATED EQUIPMENT ITEMS**

- A. Contractor shall disconnect, dismantle as necessary, remove and reinstall in new location, all existing equipment and items indicated by symbol "R" or otherwise shown to be relocated by the Contractor.
  - 1. Reinstall security equipment, e.g. cameras, etc. upon conclusion of work.
- B. Perform relocation of such equipment or items at such times and in such a manner as directed by the Project Engineer.
- C. Suitably cap existing service lines, such as steam, condensate return, water, drain, gas, air, vacuum and/or electrical, whenever such lines are disconnected from equipment to be relocated. Remove abandoned lines in finished areas and cap as specified herein before under paragraph "Abandoned Lines".
- D. Provide all mechanical and electrical service connections, fittings, fastenings and any other materials necessary for assembly and installation of relocated equipment; and leave such equipment in proper operating condition.
- E. All service lines such as noted above for relocated equipment shall be in place at point of relocation ready for use before any existing equipment is disconnected. Make relocated existing equipment ready for operation or use immediately after reinstallation.

### **1.22 STORAGE SPACE FOR DEPARTMENT OF VETERANS AFFAIRS EQUIPMENT**

- A. Contractor shall complete approximately 30 square meters 300 (square feet) of space in building accessible from ground level without use of elevators for storage of certain materials and equipment by Department of Veterans Affairs.
  - 1. Provide such space with adequate light, ventilation and heat in season and lock for adequate security. Contractor shall also install and connect portion of nearest specified fire protection system including all apparatus for instant use to provide water for adequate fire protection of storage space.
  - 2. Storage space shall be turned over to Contracting Officer ninety days prior to Completion Date of the buildings involved.
  - 3. Forward two sets of drawings to Contracting Officer through the Project Engineer 120 days prior to Completion Date of building; drawings shall indicate those areas which will be made available to Department of Veterans Affairs for temporary storage.
  - 4. All cost for utility services for such storage space shall be borne by Contractor until entire building is turned over for occupancy.
- B. "Completion Date" shall mean that date as established by Contracting Officer upon which Contractor will turn over entire project or portions thereof to the Government.

### 1.23 PHOTOGRAPHIC DOCUMENTATION

- A. During the construction period through completion, furnish Department of Veterans Affairs with **100 to 150** views of digital images, including one color print of each view and one Compact Disc (CD) per visit containing those views taken on that visit. Digital views shall be taken of exterior and/or interior as selected and directed by Project Engineer. Each view shall be taken with a professional grade camera with minimum size of 6 megapixels (MP) and the images will be a minimum of 2272 x 1704 pixels for the 200x250mm (8x 10 inch) prints and 2592 x 1944 pixels for the 400x500 mm (16 x 20 inch) prints, as per these specifications:
1. Normally such images will be taken at monthly intervals. However, the Project Engineer may also direct the taking of special digital images at any time prior to completion and acceptance of contract. If the number of trips to the site exceeds an average of one per month of the contract performance period then an adjustment in contract price will be made in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).
  2. In event a greater or lesser number of images than specified above are required by the Project Engineer, adjustment in contract price will be made in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).
- B. Images shall be taken by a commercial photographer and must show distinctly, at as large a scale as possible, all parts of work embraced in the picture.
- C. Prints shall be made on 200 x 250 mm (8 by 10 inch) regular-weight matte archival grade photographic paper and produced by a process with a minimum of 300 pixels per inch (PPI). Prints must be printed using the commercial RA4 process (inkjet prints will not be acceptable). Photographs shall have 200 x 200 mm (8 by 8 inch) full picture print with no margin on three sides and a 50 mm (2 inches) margin on the bottom for pre-typed self-adhesive identity label to be added by Project Engineer. It is required that the prints are professionally processed so the quality will meet or exceed that of the same size print made with a film camera. Prints must be shipped flat to the Project Engineer:
- E. Images on CD-ROM shall be recorded in JPEG format with a minimum of 24 bit color and no reduction in actual picture size. Compressed size of the file shall be no less than 80% or the original with no loss of information. File names shall contain the date the image was taken, the Project number and a unique sequential identifier. The CD-ROM shall also contain an index of all the images contained therein in either a TXT or Microsoft Word format.
- F. In case any set of prints are not submitted within five days of date established by Project Engineer for taking thereof, the Project Engineer may have such images/photographs taken and cost of same will be deducted from any money due to the Contractor.
- G. Interior Final Photos: After completion of all work in an area final interior photos will be taken. The camera must allow the colors to be as close as possible to the actual colors. Provide 4 views for each stairwell, as directed by VA Project Engineer for location of views. View shall be taken after

final completion of work. The images shall also be provided on a CD to the Project Engineer's Office.

--- E N D ---

**SECTION 01 33 23**  
**SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES**

- 1-1. Refer to Articles titled SPECIFICATIONS AND DRAWINGS FOR CONSTRUCTION (FAR 52.236-21) and, SPECIAL NOTES (VAAR 852.236-91), in GENERAL CONDITIONS.
- 1-2. For the purposes of this contract, samples (including laboratory samples to be tested), test reports, certificates, and manufacturers' literature and data shall also be subject to the previously referenced requirements. The following text refers to all items collectively as SUBMITTALS.
- 1-3. Submit for approval, all of the items specifically mentioned under the separate sections of the specification, with information sufficient to evidence full compliance with contract requirements. Materials, fabricated articles and the like to be installed in permanent work shall equal those of approved submittals. After an item has been approved, no change in brand or make will be permitted unless:
  - A. Satisfactory written evidence is presented to, and approved by Contracting Officer, that manufacturer cannot make scheduled delivery of approved item or;
  - B. Item delivered has been rejected and substitution of a suitable item is an urgent necessity or;
  - C. Other conditions become apparent which indicates approval of such substitute item to be in best interest of the Government.
- 1-4. Forward submittals in sufficient time to permit proper consideration and approval action by Government. Time submission to assure adequate lead time for procurement of contract - required items. Delays attributable to untimely and rejected submittals (including any laboratory samples to be tested) will not serve as a basis for extending contract time for completion.
- 1-5. Submittals will be reviewed for compliance with contract requirements by Architect-Engineer, and action thereon will be taken by Project Engineer on behalf of the Contracting Officer.
- 1-6. Upon receipt of submittals, Architect-Engineer will assign a file number thereto. Contractor, in any subsequent correspondence, shall refer to this file and identification number to expedite replies relative to previously approved or disapproved submittals.
- 1-7. The Government reserves the right to require additional submittals, whether or not particularly mentioned in this contract. If additional submittals beyond those required by the contract are furnished pursuant to request therefor by Contracting Officer, adjustment in contract price and time will be made in accordance with Articles titled CHANGES (FAR 52.243-4) and CHANGES - SUPPLEMENT (VAAR 852.236-88) of the GENERAL CONDITIONS.
- 1-8. Schedules called for in specifications and shown on shop drawings shall be submitted for use and information of Department of Veterans Affairs and Architect-Engineer. However, the Contractor shall assume responsibility for coordinating and verifying schedules. The Contracting

Officer and Architect-Engineer assumes no responsibility for checking schedules or layout drawings for exact sizes, exact numbers and detailed positioning of items.

- 1-9. Submittals must be submitted by Contractor only and shipped prepaid. Contracting Officer assumes no responsibility for checking quantities or exact numbers included in such submittals.
- A. Submit samples required by Section 09 06 00, SCHEDULE FOR FINISHES, in quadruplicate. Submit other samples in single units unless otherwise specified. Submit shop drawings, schedules, manufacturers' literature and data, and certificates in quadruplicate, except where a greater number is specified.
- B. Submittals will receive consideration only when covered by a transmittal letter signed by Contractor. Letter shall be sent via first class mail and shall contain the list of items, name of Medical Center, name of Contractor, contract number, applicable specification paragraph numbers, applicable drawing numbers (and other information required for exact identification of location for each item), manufacturer and brand, ASTM or Federal Specification Number (if any) and such additional information as may be required by specifications for particular item being furnished. In addition, catalogs shall be marked to indicate specific items submitted for approval.
1. A copy of letter must be enclosed with items, and any items received without identification letter will be considered "unclaimed goods" and held for a limited time only.
  2. Each sample, certificate, manufacturers' literature and data shall be labeled to indicate the name and location of the Medical Center, name of Contractor, manufacturer, brand, contract number and ASTM or Federal Specification Number as applicable and location(s) on project.
  3. Required certificates shall be signed by an authorized representative of manufacturer or supplier of material, and by Contractor.
- C. In addition to complying with the applicable requirements specified in preceding Article 1.9, samples which are required to have Laboratory Tests (those preceded by symbol "LT" under the separate sections of the specification shall be tested, at the expense of Contractor, in a commercial laboratory approved by Contracting Officer.
1. Laboratory shall furnish Contracting Officer with a certificate stating that it is fully equipped and qualified to perform intended work, is fully acquainted with specification requirements and intended use of materials and is an independent establishment in no way connected with organization of Contractor or with manufacturer or supplier of materials to be tested.
  2. Certificates shall also set forth a list of comparable projects upon which laboratory has performed similar functions during past five years.
  3. Samples and laboratory tests shall be sent directly to approved commercial testing laboratory.

4. Contractor shall send a copy of transmittal letter to both Project Engineer and to Architect-Engineer simultaneously with submission of material to a commercial testing laboratory.
  5. Laboratory test reports shall be sent directly to Project Engineer for appropriate action.
  6. Laboratory reports shall list contract specification test requirements and a comparative list of the laboratory test results. When tests show that the material meets specification requirements, the laboratory shall so certify on test report.
  7. Laboratory test reports shall also include a recommendation for approval or disapproval of tested item.
- D. If submittal samples have been disapproved, resubmit new samples as soon as possible after notification of disapproval. Such new samples shall be marked "Resubmitted Sample" in addition to containing other previously specified information required on label and in transmittal letter.
- E. Approved samples will be kept on file by the Project Engineer at the site until completion of contract, at which time such samples will be delivered to Contractor as Contractor's property. Where noted in technical sections of specifications, approved samples in good condition may be used in their proper locations in contract work. At completion of contract, samples that are not approved will be returned to Contractor only upon request and at Contractor's expense. Such request should be made prior to completion of the contract. Disapproved samples that are not requested for return by Contractor will be discarded after completion of contract.
- F. Submittal drawings (shop, erection or setting drawings) and schedules, required for work of various trades, shall be checked before submission by technically qualified employees of Contractor for accuracy, completeness and compliance with contract requirements. These drawings and schedules shall be stamped and signed by Contractor certifying to such check.
1. For each drawing required, submit one legible photographic paper or vellum reproducible.
  2. Reproducible shall be full size.
  3. Each drawing shall have marked thereon, proper descriptive title, including Medical Center location, project number, manufacturer's number, reference to contract drawing number, detail Section Number, and Specification Section Number.
  4. A space 120 mm by 125 mm (4-3/4 by 5 inches) shall be reserved on each drawing to accommodate approval or disapproval stamp.
  5. Submit drawings, ROLLED WITHIN A MAILING TUBE, fully protected for shipment.
  6. One reproducible print of approved or disapproved shop drawings will be forwarded to Contractor.



7. When work is directly related and involves more than one trade, shop drawings shall be submitted to Architect-Engineer under one cover.
- 1-10. Samples except laboratory samples), shop drawings, test reports, certificates and manufacturers' literature and data, shall be submitted for approval to
- \_\_\_\_\_
- (Architect-Engineer)
- \_\_\_\_\_
- (A/E P.O. Address)
- \_\_\_\_\_
- (City, State and Zip Code)
- 1-11. At the time of transmittal to the Architect-Engineer, the Contractor shall also send a copy of the complete submittal directly to the Project Engineer.

--- E N D ---

**SECTION 01 42 19  
REFERENCE STANDARDS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

**1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)**

- A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to – GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.
- B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

**1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)**

The specifications and standards cited in this solicitation can be examined at the following location:

DEPARTMENT OF VETERANS AFFAIRS  
Office of Construction & Facilities Management  
Facilities Quality Service (00CFM1A)  
425 Eye Street N.W, (sixth floor)  
Washington, DC 20001  
Telephone Numbers: (202) 632-5249 or (202) 632-5178  
Between 9:00 AM - 3:00 PM

**1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3) (JUN 1988)**

The specifications cited in this solicitation may be obtained from the associations or organizations listed below.

AA Aluminum Association Inc.

<http://www.aluminum.org>

AABC	Associated Air Balance Council <a href="http://www.aabchg.com">http://www.aabchg.com</a>
AAMA	American Architectural Manufacturer's Association <a href="http://www.aamanet.org">http://www.aamanet.org</a>
AAN	American Nursery and Landscape Association <a href="http://www.anla.org">http://www.anla.org</a>
AASHTO	American Association of State Highway and Transportation Officials <a href="http://www.aashto.org">http://www.aashto.org</a>
AATCC	American Association of Textile Chemists and Colorists <a href="http://www.aatcc.org">http://www.aatcc.org</a>
ACGIH	American Conference of Governmental Industrial Hygienists <a href="http://www.acgih.org">http://www.acgih.org</a>
ACI	American Concrete Institute <a href="http://www.aci-int.net">http://www.aci-int.net</a>
ACPA	American Concrete Pipe Association <a href="http://www.concrete-pipe.org">http://www.concrete-pipe.org</a>
ACPPA	American Concrete Pressure Pipe Association <a href="http://www.acppa.org">http://www.acppa.org</a>
ADC	Air Diffusion Council <a href="http://flexibleduct.org">http://flexibleduct.org</a>
AGA	American Gas Association <a href="http://www.aga.org">http://www.aga.org</a>
AGC	Associated General Contractors of America <a href="http://www.agc.org">http://www.agc.org</a>
AGMA	American Gear Manufacturers Association, Inc. <a href="http://www.agma.org">http://www.agma.org</a>
AHAM	Association of Home Appliance Manufacturers <a href="http://www.aham.org">http://www.aham.org</a>
AISC	American Institute of Steel Construction <a href="http://www.aisc.org">http://www.aisc.org</a>
AISI	American Iron and Steel Institute <a href="http://www.steel.org">http://www.steel.org</a>
AITC	American Institute of Timber Construction <a href="http://www.aitc-glulam.org">http://www.aitc-glulam.org</a>
AMCA	Air Movement and Control Association, Inc. <a href="http://www.amca.org">http://www.amca.org</a>

ANLA	American Nursery & Landscape Association <a href="http://www.anla.org">http://www.anla.org</a>
ANSI	American National Standards Institute, Inc. <a href="http://www.ansi.org">http://www.ansi.org</a>
APA	The Engineered Wood Association <a href="http://www.apawood.org">http://www.apawood.org</a>
ARI	Air-Conditioning and Refrigeration Institute <a href="http://www.ari.org">http://www.ari.org</a>
ASAE	American Society of Agricultural Engineers <a href="http://www.asae.org">http://www.asae.org</a>
ASCE	American Society of Civil Engineers <a href="http://www.asce.org">http://www.asce.org</a>
ASHRAE	American Society of Heating, Refrigerating, and Air-Conditioning Engineers <a href="http://www.ashrae.org">http://www.ashrae.org</a>
ASME	American Society of Mechanical Engineers <a href="http://www.asme.org">http://www.asme.org</a>
ASSE	American Society of Sanitary Engineering <a href="http://www.asse-plumbing.org">http://www.asse-plumbing.org</a>
ASTM	American Society for Testing and Materials <a href="http://www.astm.org">http://www.astm.org</a>
AWI	Architectural Woodwork Institute <a href="http://www.awinet.org">http://www.awinet.org</a>
AWS	American Welding Society <a href="http://www.aws.org">http://www.aws.org</a>
AWWA	American Water Works Association <a href="http://www.awwa.org">http://www.awwa.org</a>
BHMA	Builders Hardware Manufacturers Association <a href="http://www.buildershardware.com">http://www.buildershardware.com</a>
BIA	Brick Institute of America <a href="http://www.bia.org">http://www.bia.org</a>
CAGI	Compressed Air and Gas Institute <a href="http://www.cagi.org">http://www.cagi.org</a>
CGA	Compressed Gas Association, Inc. <a href="http://www.cganet.com">http://www.cganet.com</a>
CI	The Chlorine Institute, Inc. <a href="http://www.chlorineinstitute.org">http://www.chlorineinstitute.org</a>

CISCA	Ceilings and Interior Systems Construction Association <a href="http://www.cisca.org">http://www.cisca.org</a>
CISPI	Cast Iron Soil Pipe Institute <a href="http://www.cispi.org">http://www.cispi.org</a>
CLFMI	Chain Link Fence Manufacturers Institute <a href="http://www.chainlinkinfo.org">http://www.chainlinkinfo.org</a>
CPMB	Concrete Plant Manufacturers Bureau <a href="http://www.cpmc.org">http://www.cpmc.org</a>
CRA	California Redwood Association <a href="http://www.calredwood.org">http://www.calredwood.org</a>
CRSI	Concrete Reinforcing Steel Institute <a href="http://www.crsi.org">http://www.crsi.org</a>
CTI	Cooling Technology Institute <a href="http://www.cti.org">http://www.cti.org</a>
DHI	Door and Hardware Institute <a href="http://www.dhi.org">http://www.dhi.org</a>
EGSA	Electrical Generating Systems Association <a href="http://www.egsa.org">http://www.egsa.org</a>
EEI	Edison Electric Institute <a href="http://www.eei.org">http://www.eei.org</a>
EPA	Environmental Protection Agency <a href="http://www.epa.gov">http://www.epa.gov</a>
ETL	ETL Testing Laboratories, Inc. <a href="http://www.et1.com">http://www.et1.com</a>
FAA	Federal Aviation Administration <a href="http://www.faa.gov">http://www.faa.gov</a>
FCC	Federal Communications Commission <a href="http://www.fcc.gov">http://www.fcc.gov</a>
FPS	The Forest Products Society <a href="http://www.forestprod.org">http://www.forestprod.org</a>
GANA	Glass Association of North America <a href="http://www.cssinfo.com/info/gana.html/">http://www.cssinfo.com/info/gana.html/</a>
FM	Factory Mutual Insurance <a href="http://www.fmglobal.com">http://www.fmglobal.com</a>
GA	Gypsum Association <a href="http://www.gypsum.org">http://www.gypsum.org</a>

GSA	General Services Administration <a href="http://www.gsa.gov">http://www.gsa.gov</a>
HI	Hydraulic Institute <a href="http://www.pumps.org">http://www.pumps.org</a>
HPVA	Hardwood Plywood & Veneer Association <a href="http://www.hpva.org">http://www.hpva.org</a>
ICBO	International Conference of Building Officials <a href="http://www.icbo.org">http://www.icbo.org</a>
ICEA	Insulated Cable Engineers Association Inc. <a href="http://www.icea.net">http://www.icea.net</a>
ICAC	Institute of Clean Air Companies <a href="http://www.icac.com">http://www.icac.com</a>
IEEE	Institute of Electrical and Electronics Engineers <a href="http://www.ieee.org">http://www.ieee.org</a>
IMSA	International Municipal Signal Association <a href="http://www.imsasafety.org">http://www.imsasafety.org</a>
IPCEA	Insulated Power Cable Engineers Association
NBMA	Metal Buildings Manufacturers Association <a href="http://www.mbma.com">http://www.mbma.com</a>
MSS	Manufacturers Standardization Society of the Valve and Fittings Industry Inc. <a href="http://www.mss-hq.com">http://www.mss-hq.com</a>
NAAMM	National Association of Architectural Metal Manufacturers <a href="http://www.naamm.org">http://www.naamm.org</a>
NAPHCC	Plumbing-Heating-Cooling Contractors Association <a href="http://www.phccweb.org.org">http://www.phccweb.org.org</a>
NBS	National Bureau of Standards See - NIST
NBBPVI	National Board of Boiler and Pressure Vessel Inspectors <a href="http://www.nationboard.org">http://www.nationboard.org</a>
NEC	National Electric Code See - NFPA National Fire Protection Association
NEMA	National Electrical Manufacturers Association <a href="http://www.nema.org">http://www.nema.org</a>
NFPA	National Fire Protection Association <a href="http://www.nfpa.org">http://www.nfpa.org</a>
NHLA	National Hardwood Lumber Association <a href="http://www.natlhardwood.org">http://www.natlhardwood.org</a>

NIH	National Institute of Health <a href="http://www.nih.gov">http://www.nih.gov</a>
NIST	National Institute of Standards and Technology <a href="http://www.nist.gov">http://www.nist.gov</a>
NLMA	Northeastern Lumber Manufacturers Association, Inc. <a href="http://www.nelma.org">http://www.nelma.org</a>
NPA	National Particleboard Association 18928 Premiere Court Gaithersburg, MD 20879 (301) 670-0604
NSF	National Sanitation Foundation <a href="http://www.nsf.org">http://www.nsf.org</a>
NWWDA	Window and Door Manufacturers Association <a href="http://www.nwwda.org">http://www.nwwda.org</a>
OSHA	Occupational Safety and Health Administration Department of Labor <a href="http://www.osha.gov">http://www.osha.gov</a>
PCA	Portland Cement Association <a href="http://www.portcement.org">http://www.portcement.org</a>
PCI	Precast Prestressed Concrete Institute <a href="http://www.pci.org">http://www.pci.org</a>
PPI	The Plastic Pipe Institute <a href="http://www.plasticpipe.org">http://www.plasticpipe.org</a>
PEI	Porcelain Enamel Institute, Inc. <a href="http://www.porcelainenamel.com">http://www.porcelainenamel.com</a>
PTI	Post-Tensioning Institute <a href="http://www.post-tensioning.org">http://www.post-tensioning.org</a>
RFCI	The Resilient Floor Covering Institute <a href="http://www.rfci.com">http://www.rfci.com</a>
RIS	Redwood Inspection Service See - CRA
RMA	Rubber Manufacturers Association, Inc. <a href="http://www.rma.org">http://www.rma.org</a>
SCMA	Southern Cypress Manufacturers Association <a href="http://www.cypressinfo.org">http://www.cypressinfo.org</a>
SDI	Steel Door Institute <a href="http://www.steeldoor.org">http://www.steeldoor.org</a>

IGMA	Insulating Glass Manufacturers Alliance <a href="http://www.igmaonline.org">http://www.igmaonline.org</a>
SJI	Steel Joist Institute <a href="http://www.steeljoist.org">http://www.steeljoist.org</a>
SMACNA	Sheet Metal and Air-Conditioning Contractors National Association, Inc. <a href="http://www.smacna.org">http://www.smacna.org</a>
SSPC	The Society for Protective Coatings <a href="http://www.sspc.org">http://www.sspc.org</a>
STI	Steel Tank Institute <a href="http://www.steeltank.com">http://www.steeltank.com</a>
SWI	Steel Window Institute <a href="http://www.steelwindows.com">http://www.steelwindows.com</a>
TCNA	Tile Council of North America, Inc. <a href="http://www.tileusa.com">http://www.tileusa.com</a>
TEMA	Tubular Exchange Manufacturers Association <a href="http://www.tema.org">http://www.tema.org</a>
TPI	Truss Plate Institute, Inc 583 D'Onofrio Drive; Suite 200 Madison, WI 53719 (608) 833-5900
UBC	The Uniform Building Code See ICBO
UL	Underwriters' Laboratories Incorporated <a href="http://www.ul.com">http://www.ul.com</a>
ULC	Underwriters' Laboratories of Canada <a href="http://www.ulc.ca">http://www.ulc.ca</a>
WCLIB	West Coast Lumber Inspection Bureau 6980 SW Varns Road, P.O. Box 23145 Portland, OR 97223 (503) 639-0651
WRCLA	Western Red Cedar Lumber Association P.O. Box 120786 New Brighton, MN 55112 (612) 633-4334
WWPA	Western Wood Products Association <a href="http://www.wwpa.org">http://www.wwpa.org</a>



VA Loma Linda Healthcare Center  
Loma Linda, California

VA Project 605-14-662  
Design Renovation of Three Stairwells

--- E N D ---

### 1.3 REFERENCES

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.
- B. U.S. National Archives and Records Administration (NARA):  
33 CFR 328 ..... Definitions

### 1.4 SUBMITTALS

- A. In accordance with Section, 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:
  - 1. Environmental Protection Plan: After the contract is awarded and prior to the commencement of the work, the Contractor shall meet with the Project Engineer to discuss the proposed Environmental Protection Plan and to develop mutual understanding relative to details of environmental protection. Not more than 20 days after the meeting, the Contractor shall prepare and submit to the Project Engineer for approval, a written and/or graphic Environmental Protection Plan including, but not limited to, the following:
    - a. Name(s) of person(s) within the Contractor's organization who is (are) responsible for ensuring adherence to the Environmental Protection Plan.
    - b. Name(s) and qualifications of person(s) responsible for manifesting hazardous waste to be removed from the site.
    - c. Name(s) and qualifications of person(s) responsible for training the Contractor's environmental protection personnel.
    - d. Description of the Contractor's environmental protection personnel training program.
    - e. A list of Federal, State, and local laws, regulations, and permits concerning environmental protection, pollution control, noise control and abatement that are applicable to the Contractor's proposed operations and the requirements imposed by those laws, regulations, and permits.
    - f. Methods for protection of features to be preserved within authorized work areas including trees, shrubs, vines, grasses, ground cover, landscape features, air and water quality, fish and wildlife, soil, historical, and archeological and cultural resources.
    - g. Procedures to provide the environmental protection that comply with the applicable laws and regulations. Describe the procedures to correct pollution of the environment due to accident, natural causes, or failure to follow the procedures as described in the Environmental Protection Plan.
    - h. Permits, licenses, and the location of the solid waste disposal area.
    - i. Drawings showing locations of any proposed temporary excavations or embankments for haul roads, material storage areas, structures, sanitary facilities, and stockpiles of excess or spoil materials. Include as part of an Erosion Control Plan approved by the District Office of the U.S. Soil Conservation Service and the Department of Veterans Affairs.
    - j. Environmental Monitoring Plans for the job site including land, water, air, and noise.

- k. Work Area Plan showing the proposed activity in each portion of the area and identifying the areas of limited use or nonuse. Plan should include measures for marking the limits of use areas. This plan may be incorporated within the Erosion Control Plan.
- B. Approval of the Contractor's Environmental Protection Plan will not relieve the Contractor of responsibility for adequate and continued control of pollutants and other environmental protection measures.

## **1.5 PROTECTION OF ENVIRONMENTAL RESOURCES**

- A. Protect environmental resources within the project boundaries and those affected outside the limits of permanent work during the entire period of this contract. Confine activities to areas defined by the specifications and drawings.
- B. Protection of Land Resources: Prior to construction, identify all land resources to be preserved within the work area. Do not remove, cut, deface, injure, or destroy land resources including trees, shrubs, vines, grasses, top soil, and land forms without permission from the Project Engineer. Do not fasten or attach ropes, cables, or guys to trees for anchorage unless specifically authorized, or where special emergency use is permitted.
  - 1. Work Area Limits: Prior to any construction, mark the areas that require work to be performed under this contract. Mark or fence isolated areas within the general work area that are to be saved and protected. Protect monuments, works of art, and markers before construction operations begin. Convey to all personnel the purpose of marking and protecting all necessary objects.
  - 2. Protection of Landscape: Protect trees, shrubs, vines, grasses, land forms, and other landscape features shown on the drawings to be preserved by marking, fencing, or using any other approved techniques.
    - a. Box and protect from damage existing trees and shrubs to remain on the construction site.
    - b. Immediately repair all damage to existing trees and shrubs by trimming, cleaning, and painting with antiseptic tree paint.
    - c. Do not store building materials or perform construction activities closer to existing trees or shrubs than the farthest extension of their limbs.
- C. Protection of Water Resources: Keep construction activities under surveillance, management, and control to avoid pollution of surface and ground waters and sewer systems. Implement management techniques to control water pollution by the listed construction activities that are included in this contract.
  - 1. Washing and Curing Water: Do not allow wastewater directly derived from construction activities to enter water areas. Collect and place wastewater in retention ponds allowing the suspended material to settle, the pollutants to separate, or the water to evaporate.

2. Control movement of materials and equipment at stream crossings during construction to prevent violation of water pollution control standards of the Federal, State, or local government.
  3. Monitor water areas affected by construction.
- D. Protection of Fish and Wildlife Resources: Keep construction activities under surveillance, management, and control to minimize interference with, disturbance of, or damage to fish and wildlife. Prior to beginning construction operations, list species that require specific attention along with measures for their protection.
- E. Protection of Air Resources: Keep construction activities under surveillance, management, and control to minimize pollution of air resources. Burning is not permitted on the job site. Keep activities, equipment, processes, and work operated or performed, in strict accordance with the State of California, Air Resource Board Statute, Rule, or Regulation and Federal emission and performance laws and standards. Maintain ambient air quality standards set by the Environmental Protection Agency, for those construction operations and activities specified.
1. Particulates: Control dust particles, aerosols, and gaseous by-products from all construction activities, processing, and preparation of materials (such as from asphaltic batch plants) at all times, including weekends, holidays, and hours when work is not in progress.
  2. Particulates Control: Maintain all excavations, stockpiles, haul roads, permanent and temporary access roads, plant sites, spoil areas, borrow areas, and all other work areas within or outside the project boundaries free from particulates which would cause a hazard or a nuisance. Sprinklering, chemical treatment of an approved type, light bituminous treatment, baghouse, scrubbers, electrostatic precipitators, or other methods are permitted to control particulates in the work area.
  3. Hydrocarbons and Carbon Monoxide: Control monoxide emissions from equipment to Federal and State allowable limits.
  4. Odors: Control odors of construction activities and prevent obnoxious odors from occurring.
- F. Reduction of Noise: Minimize noise using every action possible. Perform noise-producing work in less sensitive hours of the day or week as directed by the Project Engineer. Maintain noise-produced work at or below the decibel levels and within the time periods specified.
1. Perform construction activities involving repetitive, high-level impact noise only between 8:00 a.m. and 6:00 p.m. unless otherwise permitted by local ordinance or the Project Engineer. Repetitive impact noise on the property shall not exceed the following dB limitations:

Time Duration of Impact Noise	Sound Level in dB
More than 12 minutes in any hour	70
Less than 30 seconds of any hour	85
Less than three minutes of any hour	80
Less than 12 minutes of any hour	75

2. Provide sound-deadening devices on equipment and take noise abatement measures that are necessary to comply with the requirements of this contract, consisting of, but not limited to, the following:

- a. Maintain maximum permissible construction equipment noise levels at 15 m (50 feet) (dBA):

EARTHMOVING		MATERIALS HANDLING	
FRONT LOADERS	75	CONCRETE MIXERS	75
BACKHOES	75	CONCRETE PUMPS	75
DOZERS	75	CRANES	75
TRACTORS	75	DERRICKS IMPACT	75
SCAPERS	80	PILE DRIVERS	95
GRADERS	75	JACK HAMMERS	75
TRUCKS	75	ROCK DRILLS	80
PAVERS, STATIONARY	80	PNEUMATIC TOOLS	80
GENERATORS	75	SAWS	75
COMPRESSORS	75	VIBRATORS	75

- b. Use shields or other physical barriers to restrict noise transmission.
- c. Provide soundproof housings or enclosures for noise-producing machinery.
- d. Use efficient silencers on equipment air intakes.
- e. Use efficient intake and exhaust mufflers on internal combustion engines that are maintained so equipment performs below noise levels specified.
- f. Line hoppers and storage bins with sound deadening material.
- g. Conduct truck loading, unloading, and hauling operations so that noise is kept to a minimum.
3. Measure sound level for noise exposure due to the construction at least once every five successive working days while work is being performed above 55 dB(A) noise level. Measure noise exposure at the property line or 15 m (50 feet) from the noise source, whichever is greater. Measure the sound levels on the A weighing network of a General Purpose sound level meter at slow response. To minimize the effect of reflective sound waves at buildings, take measurements at 900 to 1800 mm (three to six feet) in front of any building face. Submit the recorded information to the Project Engineer noting any problems and the alternatives for mitigating actions.
- G. Restoration of Damaged Property: If any direct or indirect damage is done to public or private property resulting from any act, omission, neglect, or misconduct, the Contractor shall restore the damaged property to a condition equal to that existing before the damage at no additional cost to

the Government. Repair, rebuild, or restore property as directed or make good such damage in an acceptable manner.

- H. Final Clean-up: On completion of project and after removal of all debris, rubbish, and temporary construction, Contractor shall leave the construction area in a clean condition satisfactory to the Project Engineer. Cleaning shall include off the station disposal of all items and materials not required to be salvaged, as well as all debris and rubbish resulting from demolition and new work operations.

--- E N D ---

**SECTION 01 74 19**  
**CONSTRUCTION WASTE MANAGEMENT**

**PART 1 – GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.
- B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.
- C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:
  - 1. Waste Management Plan development and implementation.
  - 2. Techniques to minimize waste generation.
  - 3. Sorting and separating of waste materials.
  - 4. Salvage of existing materials and items for reuse or resale.
  - 5. Recycling of materials that cannot be reused or sold.
- D. At a minimum the following waste categories shall be diverted from landfills:
  - 1. Soil
  - 2. Inerts (e.g., concrete, masonry, and asphalt)
  - 3. Clean dimensional wood and palette wood
  - 4. Green waste (biodegradable landscaping materials)
  - 5. Engineered wood products (plywood, particle board, and I-joists, etc.)
  - 6. Metal products (e.g., steel, wire, beverage containers, copper, etc.)
  - 7. Cardboard, paper and packaging
  - 8. Bitumen roofing materials
  - 9. Plastics (e.g., ABS, PVC)
  - 10. Carpet and/or pad
  - 11. Gypsum board
  - 12. Insulation
  - 13. Paint
  - 14. Fluorescent lamps

**1.2 RELATED WORK**

- A. Section 02 41 00, DEMOLITION
- B. Section 01 00 00, GENERAL REQUIREMENTS

### 1.3 QUALITY ASSURANCE

- A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction/Demolition waste includes products of the following:
1. Excess or unusable construction materials
  2. Packaging used for construction products
  3. Poor planning and/or layout
  4. Construction error
  5. Over ordering
  6. Weather damage
  7. Contamination
  8. Mishandling
  9. Breakage
- B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.
- C. Contractor shall develop and implement procedures to recycle construction and demolition waste to a minimum of 50 percent.
- D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.
- E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations. The Whole Building Design Guide website <http://www.cwm.wbdg.org> provides a Construction Waste Management Database that contains information on companies that haul, collect, and process recyclable debris from construction projects.
- F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.
- G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.
- H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

### 1.4 TERMINOLOGY

- A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.



- B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.
- C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.
- D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.
- E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).
- F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.
- G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.
- H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.
- I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.
- J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.
- K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.
- L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.
  - 1. On-site Recycling – Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
  - 2. Off-site Recycling – Materials hauled to a location and used in an altered form in the manufacture of new products.
- M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facilities permit or be regulated by the local enforcement agency.
- N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.
- O. Return: To give back reusable items or unused products to vendors for credit.
- P. Salvage: To remove waste materials from the site for resale or re-use by a third party.

- Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.
- R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.
- S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

### **1.5 SUBMITTALS**

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:
- B. Prepare and submit to the Project Engineer a written demolition debris management plan. The plan shall include, but not be limited to, the following information:
  - 1. Procedures to be used for debris management.
  - 2. Techniques to be used to minimize waste generation.
  - 3. Analysis of the estimated job site waste to be generated:
    - a. List of each material and quantity to be salvaged, reused, or recycled.
    - b. List of each material and quantity proposed to be taken to a landfill.
  - 4. Detailed description of the Means/Methods to be used for material handling.
    - a. On site: Material separation, storage, protection where applicable.
    - b. Off site: Transportation means and destination. Include list of materials.
      - 1) Description of materials to be site-separated and self-hauled to designated facilities.
      - 2) Description of mixed materials to be collected by designated waste haulers and removed from the site.
    - c. The names and locations of mixed debris reuse and recycling facilities or sites.
    - d. The names and locations of trash disposal landfill facilities or sites.
    - e. Documentation that the facilities or sites are approved to receive the materials.
- C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.
- D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.

### **1.6 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.
- B. U.S. Green Building Council (USGBC):  
LEED Green Building Rating System for New Construction

## **1.7 RECORDS**

Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration.

Records shall be kept in accordance with the LEED Reference Guide and LEED Template.

## **PART 2 - PRODUCTS**

### **2.1 MATERIALS**

- A. List of each material and quantity to be salvaged, recycled, or reused.
- B. List of each material and quantity proposed to be taken to a landfill.
- C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

## **PART 3 - EXECUTION**

### **3.1 COLLECTION**

- A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.
- B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.
- C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

### **3.2 DISPOSAL**

- A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.
- B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

### **3.3 REPORT**

- A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.
- B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.
- C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, and invoices. Include the net total costs for each disposal.

--- E N D ---

## **SECTION 01 81 11 SUSTAINABLE DESIGN REQUIREMENTS**

### **PART 1 - GENERAL**

#### **1.1 SUMMARY**

This Section describes general requirements and procedures to comply with the Guiding Principles for Leadership in High Performance and Sustainable Buildings Memorandum of Understanding incorporated in the Executive Orders 13423 and 13514; Energy Policy Act of 2005 (EPA 2005) and the Energy Independence and Security Act of 2007 (EISA 2007).

#### **1.2 OBJECTIVES**

- A. To maximize resource efficiency and reduce the environmental impacts of construction and operation, the Contractor during the construction phase of this project shall implement the following procedures:
  - 1. Select products that minimize consumption of energy, water and non-renewable resources, while minimizing the amounts of pollution resulting from the production and employment of building technologies. It is the intent of this project to conform with EPA's Five Guiding Principles on environmentally preferable purchasing. The five principles are:
    - a. Include environmental considerations as part of the normal purchasing process.
    - b. Emphasize pollution prevention early in the purchasing process.
    - c. Examine multiple environmental attributes throughout a product's or service's life cycle.
    - d. Compare relevant environmental impacts when selecting products and services.
    - e. Collect and base purchasing decisions on accurate and meaningful information about environmental performance.
  - 2. Control sources for potential Indoor Air Quality (IAQ) pollutants by controlled selection of materials and processes used in project construction in order to attain superior IAQ.
  - 3. Products and processes that achieve the above objectives to the extent currently possible and practical have been selected and included in these Construction Documents. The Contractor is responsible to maintain and support these objectives in developing means and methods for performing the work of this Contract and in proposing product substitutions and/or changes to specified processes.
  - 4. Use building practices that ensure construction debris and particulates do not contaminate or enter duct work prior to system startup and turn over.

#### **1.3 RELATED DOCUMENTS**

- A. Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT

#### **1.4 DEFINITIONS**

- A. Agrifiber Products: Composite panel products derived from agricultural fiber
- B. Biobased Product: As defined in the 2002 Farm Bill, a product determined by the Secretary to be a commercial or industrial product (other than food or feed) that is composed, in whole or in

significant part, of biological products or renewable domestic agricultural materials (including plant, animal, and marine materials) or forestry materials

- C. Biobased Content: The weight of the biobased material divided by the total weight of the product and expressed as a percentage by weight
- D. Certificates of Chain-of-Custody: Certificates signed by manufacturers certifying that wood used to make products has been tracked through its extraction and fabrication to ensure that it was obtained from forests certified by a specified certification program
- E. Construction and Demolition Waste: Includes solid wastes, such as building materials, packaging, rubbish, debris, and rubble resulting from construction, remodeling, repair and demolition operations. A construction waste management plan is to be provided by the Contractor as defined in Section 01 74 19.
- F. Third Party Certification: Certification of levels of environmental achievement by nationally recognized sustainability rating system.
- G. Recycled Content Materials: Products that contain pre-consumer or post-consumer materials as all or part of their feedstock
- H. Post-Consumer Recycled Content: The percentage by weight of constituent materials that have been recovered or otherwise diverted from the solid-waste stream after consumer use
- I. Pre-Consumer Recycled Content: Materials that have been recovered or otherwise diverted from the solid-waste stream during the manufacturing process. Pre-consumer content must be material that would not have otherwise entered the waste stream as per Section 5 of the FTC Act, Part 260 "Guidelines for the Use of Environmental Marketing Claims":  
[www.ftc.gov/bcp/gmrule/guides980427](http://www.ftc.gov/bcp/gmrule/guides980427)
- J. Regional Materials: Materials that are extracted, harvested, recovered, and manufactured within a radius of 250 miles (400 km) from the Project site
- K. Salvaged or Reused Materials: Materials extracted from existing buildings in order to be reused in other buildings without being manufactured
- L. Sealant: Any material that fills and seals gaps between other materials
- M. Type 1 Finishes: Materials and finishes which have a potential for short-term levels of off gassing from chemicals inherent in their manufacturing process, or which are applied in a form requiring vehicles or carriers for spreading which release a high level of particulate matter in the process of installation and/or curing.
- N. Type 2 Finishes: "Fuzzy" materials and finishes which are woven, fibrous, or porous in nature and tend to adsorb chemicals off-gas.
- O. Volatile Organic Compounds (VOCs): Any compound of carbon, excluding carbon monoxide, carbon dioxide, carbonic acid, metallic carbides or carbonates, and ammonium carbonate, which participates in atmospheric photochemical reactions. Compounds that have negligible

photochemical reactivity, listed in EPA 40 CFR 51.100(s), are also excluded from this regulatory definition.

## **1.5 SUBMITTALS**

### **A. Sustainable Design Submittals:**

1. **Alternative Transportation:** Provide manufacturer's cut sheets for all bike racks installed on site, including the total number of bicycle storage slots provided. Also, provide manufacturer's cut sheets for any alternative-fuel refueling stations installed on site, including fueling capacity information for an 8-hour period.
2. **Heat Island Effect:**
  - a. **Site Paving:** Provide manufacturer's cut sheets for all impervious paving materials, highlighting the Solar Reflectance Index (SRI) of the material. Also, provide cut sheets for all pervious paving materials.
  - b. **Roofing Materials:** Submittals for roofing materials must include manufacturer's cut sheets or product data highlighting the Solar Reflectance Index (SRI) of the material.
3. **Measurement and Verification Systems:** Provide cut sheets and manufacturer's product data for all controls systems, highlighting electrical metering and trending capability components.
4. **Salvaged or Reused Materials:** Provide documentation that lists each salvaged or reused material, the source or vendor of the material, the purchase price, and the replacement cost if greater than the purchase price.
5. **Recycled Content:** Submittals for all materials with recycled content (excluding MEP systems equipment and components) must include the following documentation: Manufacturer's product data, product literature, or a letter from the manufacturer verifying the percentage of post-consumer and pre-consumer recycled content (by weight) of each material or product
  - a. An electronic spreadsheet that tabulates the Project's total materials cost and combined recycled content value (defined as the sum of the post-consumer recycled content value plus one-half of the pre-consumer recycled content value) expressed as a percentage of total materials cost. This spreadsheet shall be submitted every third month with the Contractor's Certificate and Application for Payment. It should indicate, on an ongoing basis, line items for each material, including cost, pre-consumer recycled content, post-consumer recycled content, and combined recycled content value.
6. **Regional Materials:** Submittals for all products or materials expected to contribute to the regional calculation (excluding MEP systems equipment and components) must include the following documentation:
  - a. Cost of each material or product, excluding cost of labor and equipment for installation
  - b. Location of product manufacture and distance from point of manufacture to the Project Site

- c. Location of point of extraction, harvest, or recovery for each raw material in each product and distance from the point of extraction, harvest, or recovery to the Project Site
  - d. Manufacturer's product data, product literature, or a letter from the manufacturer verifying the location and distance from the Project Site to the point of manufacture for each regional material
  - e. Manufacturer's product data, product literature, or a letter from the manufacturer verifying the location and distance from the Project Site to the point of extraction, harvest, or recovery for each regional material or product, including, at a minimum, gravel and fill, planting materials, concrete, masonry, and GWB
  - f. An electronic spreadsheet that tabulates the Project's total materials cost and regional materials value, expressed as a percentage of total materials cost. This spreadsheet shall be submitted every third month with the Contractor's Certificate and Application for Payment. It should indicate on an ongoing basis, line items for each material, including cost, location of manufacture, distance from manufacturing plant to the Project Site, location of raw material extraction, and distance from extraction point to the Project Site.
- 7. Outdoor Air Delivery Monitoring: Provide manufacturer's cut sheets highlighting the installed carbon dioxide monitoring system components and sequence of controls shop drawing documentation, including CO2 differential set-points and alarm capabilities.
- 8. Interior Adhesives and Sealants: Submittals for all field-applied adhesives and sealants, which have a potential impact on indoor air, must include manufacturer's MSDSs or other Product Data highlighting VOC content.
  - a. Provide manufacturers' documentation verifying all adhesives used to apply laminates, whether shop-applied or field-applied, contain no urea-formaldehyde.
- 9. Interior Paints and Coatings: Submittals for all field-applied paints and coatings, which have a potential impact on indoor air, must include manufacturer's MSDSs or other Product Data highlighting VOC content
- 10. Air Filtration: Provide manufacturer's cut sheets and product data highlighting the following:
  - a. Minimum Efficiency Reporting Value (MERV) for filtration media in all air handling units (AHUs) per ASHRAE HVAC Design Manual for Hospitals and Clinics.
  - b. Minimum Efficiency Reporting Value (MERV) for filtration media installed at return air grilles during construction if permanently installed AHUs are used during construction. See above for requirements
- 11. Mercury in Lighting: Provide manufacturer's cut sheets or product data for all fluorescent or HID lamps highlighting mercury content.
- 12. Lighting Controls: Provide manufacturer's cut sheets and shop drawing documentation highlighting all lighting controls systems components.



13. Thermal Comfort Controls: Provide manufacturer's cut sheets and shop drawing documentation highlighting all thermal comfort-control systems components.
  14. Gypsum Wall Board: Provide manufacturer's cut sheets or product data verifying that all gypsum wallboard products are moisture and mold-resistant.
  15. Fiberglass Insulation: Provide manufacturer's cut sheets or product data verifying that fiberglass batt insulation contains no urea-formaldehyde.
  16. Duct Acoustical Insulation: Provide manufacturer's cut sheets or product data verifying that mechanical sound insulation materials in air distribution ducts consists of an impervious, non-porous coatings that prevent dust from accumulating in the insulating materials.
  17. Green Housekeeping: Provide documentation that all cleaning products and janitorial paper products meet the VOC limits and content requirements of this specification section.
- B. Project Materials Cost Data: Provide a spreadsheet in an electronic file indicating the total cost for the Project and the total cost of building materials used for the Project, as follows:
1. Not more than 60 days after the Preconstruction Meeting, the General Contractor shall provide to the Owner and Architect a preliminary schedule of materials costs for all materials used for the Project organized by specification section. Exclude labor costs and all mechanical, electrical, and plumbing (MEP) systems materials and labor costs. Include the following:
    - a. Identify each reused or salvaged material, its cost, and its replacement value.
    - b. Identify each recycled-content material, its post-consumer and pre-consumer recycled content as a percentage the product's weight, its cost, its combined recycled content value (defined as the sum of the post-consumer recycled content value plus one-half of the pre-consumer recycled content value), and the total combined recycled content value for all materials as a percentage of total materials costs.
    - c. Identify each regional material, its cost, its manufacturing location, the distance of this location from the Project site, the source location for each raw material component of the material, the distance of these extraction locations from the Project site, and the total value of regional materials as a percentage of total materials costs.
    - d. Identify each biobased material, its source, its cost, and the total value of biobased materials as a percentage of total materials costs. Also provide the total value of rapidly renewable materials (materials made from plants that are harvested in less than a 10-year cycle) as a percentage of total materials costs.
  2. Provide final versions of the above spreadsheets to the Owner and Architect not more than 14 days after Substantial Completion.
- C. Construction Waste Management: See Section 01 74 19 "Construction Waste Management" for submittal requirements.
- D. Construction Indoor Air Quality (IAQ) Management: Submittals must include the following:



1. Not more than 30 days after the Preconstruction Meeting, prepare and submit for the Project Engineer's and Owner's approval, an electronic copy of the draft Construction IAQ Management Plan in an electronic file including, but not limited to, descriptions of the following:
  2. Instruction procedures for meeting or exceeding the minimum requirements of the Sheet Metal and Air Conditioning National Contractors Association (SMACNA) IAQ Guidelines for Occupied Buildings Under Construction, 1995, Chapter 3, including procedures for HVAC Protection, Source Control, Pathway Interruption, Housekeeping, and Scheduling
    - a. Instruction procedures for protecting absorptive materials stored on-site or installed from moisture damage
    - b. Schedule of submission to Project Engineer of photographs of on-site construction IAQ management measures such as protection of ducts and on-site stored oil installed absorptive materials
    - c. Instruction procedures if air handlers must be used during construction, including a description of filtration media to be used at each return air grille
    - d. Instruction procedure for replacing all air-filtration media immediately prior to occupancy after completion of construction, including a description of filtration media to be used at each air handling or air supply unit
  3. Not more than 30 days following receipt of the approved draft CIAQMP, submit an electronic copy of the approved CIAQMP in an electronic file, along with the following:
    - a. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for all filtration media to be installed at return air grilles during construction if permanently installed AHUs are used during construction.
    - b. Manufacturer's cut sheets and product data highlighting the Minimum Efficiency Reporting Value (MERV) for filtration media in all air handling units (AHUs).
- E. Sustainable Design Progress Reports: Concurrent with each Application for Payment, submit reports for the following:
1. Construction Waste Management: Waste reduction progress reports and logs complying with the requirements of Section 01 74 19 "Construction Waste Management."
  2. Construction IAQ Management: See details below under Section 3.2 Construction Indoor Air Quality Management for Construction IAQ management progress report requirements.

## **1.6 QUALITY ASSURANCE**

- A. Preconstruction Meeting: After award of Contract and prior to the commencement of the Work, schedule and conduct meeting with Owner, Architect, and all Subcontractors to discuss the Construction Waste Management Plan, the required Construction Indoor Air Quality (IAQ) Management Plan, and all other Sustainable Design Requirements. The purpose of this meeting is to develop a mutual understanding of the Project's Sustainable Design Requirements and

coordination of the Contractor's management of these requirements with the Contracting Officer and the Construction Quality Manager.

- B. Construction Job Conferences: The status of compliance with the Sustainable Design Requirements of these specifications will be an agenda item at all regular job meetings conducted during the course of work at the site.

## **PART 2 - PRODUCTS**

### **2.1 PRODUCT ENVIRONMENTAL REQUIREMENTS**

- A. Do not burn rubbish, organic matter, etc. or any material on the site. Dispose of legally in accordance with Specifications Sections 01 74 19.
- B. Appliances and Equipment: All materials and equipment being installed that falls under the Energy Star or FEMP programs must be Energy Star or FEMP-rated. Eligible equipment includes refrigerators, motors, laundry equipment, office equipment and more. Refer to each program's website for a complete list.
- C. Measurement and Verification: Install controls and monitoring devices as required by MEP divisions order to comply with International Performance Measurement & Verification Protocol (IPMVP), Volume III: Concepts and Options for Determining Energy Savings in New Construction, April 2003, Option D.
  - 1. The IPMVP provides guidance on situation-appropriate application of measurement and verification strategies.
- D. Salvaged or Reused materials: There shall be no substitutions for specified salvaged and reused materials and products.
  - 1. Salvaged materials: Use of salvaged materials reduces impacts of disposal and manufacturing of replacements.
- E. Recycled Content of Materials:
  - 1. Provide building materials with recycled content such that post-consumer recycled content value plus half the pre-consumer recycled content value constitutes a minimum of 30% of the cost of materials used for the Project, exclusive of all MEP equipment, labor, and delivery costs. The Contractor shall make all attempts to maximize the procurement of materials with recycled content.
    - a. e post-consumer recycled content value of a material shall be determined by dividing the weight of post-consumer recycled content by the total weight of the material and multiplying by the cost of the material.
    - b. Do not include mechanical and electrical components in the calculations.
    - c. Do not include labor and delivery costs in the calculations.
    - d. Recycled content of materials shall be defined according to the Federal Trade Commission's "Guide for the Use of Environmental Marketing Claims," 16 CFR 260.7 (e).
- F. Biobased Content:

1. For products designated by the USDA's BioPreferred program, provide products that meet or exceed USDA recommendations for biobased content, so long as products meet all other performance requirements in VA master specifications. For more information regarding the product categories covered by the BioPreferred program, visit <http://www.biopREFERRED.gov>

**PART 3 – EXECUTION (NOT USED)**

--- E N D ---

**SECTION 02 41 00  
DEMOLITION**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. This section specifies demolition and removal of buildings, portions of buildings, utilities, other structures and debris from trash dumps shown.

**1.2 RELATED WORK:**

- A. Safety Requirements: GENERAL CONDITIONS Article, ACCIDENT PREVENTION
- B. Disconnecting utility services prior to demolition: Section 01 00 00, GENERAL REQUIREMENTS
- C. Reserved items that are to remain the property of the Government: Section 01 00 00, GENERAL REQUIREMENTS
- D. Asbestos Removal: Section 02 82 13.19, ASBESTOS FLOOR TILE AND MASTIC ABATEMENT
- E. Environmental Protection: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS
- F. Construction Waste Management: Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT
- G. Infectious Control: Section 01 00 00, GENERAL REQUIREMENTS, Article 1.7, INFECTION PREVENTION MEASURES

**1.3 PROTECTION:**

- A. Perform demolition in such manner as to eliminate hazards to persons and property; to minimize interference with use of adjacent areas, utilities and structures or interruption of use of such utilities; and to provide free passage to and from such adjacent areas of structures. Comply with requirements of GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
- B. Provide safeguards, including warning signs, barricades, temporary fences, warning lights, and other similar items that are required for protection of all personnel during demolition and removal operations. Comply with requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES AND IMPROVEMENTS.
- C. Maintain fences, barricades, lights, and other similar items around exposed excavations until such excavations have been completely filled.
- D. Provide enclosed dust chutes with control gates from each floor to carry debris to truck beds and govern flow of material into truck. Provide overhead bridges of tight board or prefabricated metal construction at dust chutes to protect persons and property from falling debris.
- E. Prevent spread of flying particles and dust. Sprinkle rubbish and debris with water to keep dust to a minimum. Do not use water if it results in hazardous or objectionable condition such as, but not limited to; ice, flooding, or pollution. Vacuum and dust the work area daily.

- F. In addition to previously listed fire and safety rules to be observed in performance of work, include following:
1. No wall or part of wall shall be permitted to fall outwardly from structures.
  2. Maintain at least one stairway in each structure in usable condition to highest remaining floor. Keep stairway free of obstructions and debris until that level of structure has been removed.
  3. Wherever a cutting torch or other equipment that might cause a fire is used, provide and maintain fire extinguishers nearby ready for immediate use. Instruct all possible users in use of fire extinguishers.
  4. Keep hydrants clear and accessible at all times. Prohibit debris from accumulating within a radius of 4500 mm (15 feet) of fire hydrants.
- G. Before beginning any demolition work, the Contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the Medical Center; any damaged items shall be repaired or replaced as approved by the Project Engineer. The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required. The Contractor shall ensure that structural elements are not overloaded and shall be responsible for increasing structural supports or adding new supports as may be required as a result of any cutting, removal, or demolition work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for existing construction weakened by demolition or removal works. Repairs, reinforcement, or structural replacement must have Project Engineer's approval.
- H. The work shall comply with the requirements of Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- I. The work shall comply with the requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article 1.7 INFECTION PREVENTION MEASURES.

## **PART 2 - PRODUCTS (NOT USED)**

## **PART 3 – EXECUTION**

### **3.1 DEMOLITION:**

- A. Debris, including brick, concrete, stone, metals and similar materials shall become property of Contractor and shall be disposed of by him daily, off the Medical Center to avoid accumulation at the demolition site. Materials that cannot be removed daily shall be stored in areas specified by the Project Engineer. Break up concrete slabs below grade that do not require removal from present location into pieces not exceeding 600 mm (24 inches) square to permit drainage. Contractor shall dispose debris in compliance with applicable federal, state or local permits, rules and/or regulations.

- B. Remove and legally dispose of all materials, other than earth to remain as part of project work, from any trash dumps shown. Materials removed shall become property of contractor and shall be disposed of in compliance with applicable federal, state or local permits, rules and/or regulations. All materials in the indicated trash dump areas, including above surrounding grade and extending to a depth of 1500 mm (5 feet) below surrounding grade, shall be included as part of the lump sum compensation for the work of this section. Materials that are located beneath the surface of the surrounding ground more than 1500 mm (5 feet), or materials that are discovered to be hazardous, shall be handled as unforeseen. The removal of hazardous material shall be referred to Hazardous Materials specifications.
- E. Remove existing utilities as indicated or uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the Project Engineer. When Utility lines are encountered that are not indicated on the drawings, the Project Engineer shall be notified prior to further work in that area.

### **3.2 CLEAN-UP:**

- A. On completion of work of this section and after removal of all debris, leave site in clean condition satisfactory to Project Engineer. Clean-up shall include off the Medical Center Property disposal of all items and materials not required to remain property of the Government as well as all debris and rubbish resulting from demolition operations.

--- E N D ---

**SECTION 02 82 11**  
**TRADITIONAL ASBESTOS ABATEMENT**

**TABLE OF CONTENTS**

1.1 SUMMARY OF THE WORK .....	1
1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS .....	1
1.1.2 EXTENT OF WORK.....	1
1.1.3 RELATED WORK .....	1
1.1.4 TASKS .....	1
1.1.5 CONTRACTOR'S USE OF PREMISES .....	2
1.2 VARIATIONS IN QUANTITY .....	2
1.3 STOP ASBESTOS REMOVAL .....	2
1.4 DEFINITIONS .....	3
1.4.1 GENERAL .....	3
1.4.2 GLOSSARY .....	3
1.4.3 REFERENCED STANDARDS ORGANIZATIONS .....	8
1.5 APPLICABLE CODES AND REGULATIONS.....	9
1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS.....	9
1.5.2 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITY .....	10
1.5.3 FEDERAL REQUIREMENTS .....	10
1.5.4 STATE AND LOCAL REQUIREMENTS .....	10
1.5.5 STANDARDS .....	11
1.5.6 EPA GUIDANCE DOCUMENTS.....	11
1.5.7 NOTICES .....	11
1.5.8 PERMITS/LICENSES .....	11
1.5.9 POSTING AND FILING OF REGULATIONS.....	11
1.5.10 VA RESPONSIBILITIES .....	11
1.5.11 EMERGENCY ACTION PLAN AND ARRANGEMENTS.....	12
1.5.12 PRE-CONSTRUCTION MEETING .....	12
1.6 PROJECT COORDINATION .....	13
1.6.1 PERSONNEL .....	13
1.7 RESPIRATORY PROTECTION.....	14
1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM .....	14
1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR.....	14
1.7.3 SELECTION AND USE OF RESPIRATORS.....	14

1.7.4 MINIMUM RESPIRATORY PROTECTION .....	15
1.7.5 MEDICAL WRITTEN OPINION .....	15
1.7.6 RESPIRATOR FIT TEST .....	15
1.7.7 RESPIRATOR FIT CHECK.....	15
1.7.8 MAINTENANCE AND CARE OF RESPIRATORS .....	15
1.7.9 SUPPLIED AIR SYSTEMS .....	15
1.8 WORKER PROTECTION .....	15
1.8.1 TRAINING OF ABATEMENT PERSONNEL.....	15
1.8.2 MEDICAL EXAMINATIONS.....	16
1.8.3 REGULATED AREA ENTRY PROCEDURE.....	16
1.8.4 DECONTAMINATION PROCEDURE.....	16
1.8.5 REGULATED AREA REQUIREMENTS .....	16
1.9 DECONTAMINATION FACILITIES.....	17
1.9.1 DESCRIPTION.....	17
1.9.2 GENERAL REQUIREMENTS.....	17
1.9.3 TEMPORARY FACILITIES TO THE PDF and W/EDF.....	17
1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF) .....	17
1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF) .....	19
1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES.....	19
PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT .....	20
2.1 MATERIALS AND EQUIPMENT.....	20
2.1.1 GENERAL REQUIREMENTS.....	20
2.2 MONITORING, INSPECTION, AND TESTING .....	21
2.2.1 GENERAL .....	21
2.2.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT.....	22
2.2.3 MONITORING, INSPECTION, AND TESTING BY CONTRACTOR CPIH/CIH .....	22
2.3 ASBESTOS HAZARD ABATEMENT PLAN .....	23
2.4 SUBMITTALS.....	23
2.4.1 PRE-START MEETING SUBMITTALS.....	23
2.4.2 SUBMITTALS DURING ABATEMENT .....	25
2.4.3 SUBMITTALS AT COMPLETION OF ABATEMENT.....	25
2.5 ENCAPSULANTS .....	25
2.5.1 TYPES OF ENCAPSULANTS .....	25
2.5.2 PERFORMANCE REQUIREMENTS .....	25
2.5.3 CERTIFICATES OF COMPLIANCE .....	26



PART 3 - EXECUTION .....	26
3.1 REGULATED AREA PREPARATIONS .....	26
3.1.1 SITE SECURITY .....	27
3.1.2 SIGNAGE AND POWER MANAGEMENT .....	28
3.1.3 NEGATIVE PRESSURE FILTRATION SYSTEM .....	27
3.1.4 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA .....	30
3.1.5 SANITARY FACILITIES .....	31
3.1.6 PERSONAL PROTECTIVE EQUIPMENT .....	31
3.1.7 PRE-CLEANING .....	31
3.1.8 PRE-ABATEMENT ACTIVITIES .....	32
3.2 REMOVAL OF ACM .....	33
3.2.1 WETTING ACM .....	33
3.2.2 SECONDARY BARRIER AND WALKWAYS .....	33
3.2.3 WET REMOVAL OF ACM .....	34
3.2.4 WET REMOVAL OF AMOSITE .....	35
3.2.5 REMOVAL OF ACM/DIRT FLOORS AND OTHER SPECIAL PROCEDURES .....	35
3.3 LOCKDOWN ENCAPSULATION .....	35
3.3.1 GENERAL .....	35
3.3.2 DELIVERY AND STORAGE .....	35
3.3.3 WORKER PROTECTION .....	35
3.3.4 ENCAPSULATION OF SCRATCH COAT PLASTER OR PIPING .....	36
3.3.5 SEALING EXPOSED EDGES .....	36
3.4 DISPOSAL OF ACM WASTE MATERIALS .....	36
3.4.1 GENERAL .....	36
3.4.2 PROCEDURES .....	36
3.5 PROJECT DECONTAMINATION .....	37
3.5.1 GENERAL .....	37
3.5.2 REGULATED AREA CLEARANCE .....	37
3.5.3 WORK DESCRIPTION .....	37
3.5.4 PRE-DECONTAMINATION CONDITIONS .....	37
3.5.5 FIRST CLEANING .....	37
3.5.6 PRE-CLEARANCE INSPECTION AND TESTING .....	37
3.5.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES .....	38
3.6 FINAL VISUAL INSPECTION AND AIR CLEARANCE TESTING .....	38
3.6.1 GENERAL .....	38

3.6.2 FINAL VISUAL INSPECTION .....	38
3.6.3 FINAL AIR CLEARANCE TESTING .....	38
3.6.4 FINAL AIR CLEARANCE PROCEDURES .....	38
3.6.5 CLEARANCE SAMPLING USING PCM – LESS THAN 260LF/160SF:.....	39
3.6.6 CLEARANCE SAMPLING USING TEM – EQUAL TO OR MORE THAN 260LF/160SF: TEM.....	41
3.6.7 LABORATORY TESTING OF PCM CLEARANCE SAMPLES.....	41
3.6.8 LABORATORY TESTING OF TEM SAMPLES .....	39
3.7 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE .....	40
3.7.1 COMPLETION OF ABATEMENT WORK .....	40
3.7.2 CERTIFICATE OF COMPLETION BY CONTRACTOR .....	40
3.7.3 WORK SHIFTS .....	40
3.7.4 RE-INSULATION .....	40
ATTACHMENT #1.....	41
ATTACHMENT #2.....	42
ATTACHMENT #3.....	46
ATTACHMENT #4.....	44

## **INSTRUCTIONS TO ARCHITECT/ENGINEER AND INDUSTRIAL HYGIENE CONSULTANT**

### **SECTION 02 82 11**

## **CLASS I NEGATIVE PRESSURE ENCLOSURE ASBESTOS ABATEMENT SPECIFICATIONS**

### **PART 1 – GENERAL**

#### **1.1 SUMMARY OF THE WORK**

##### **1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS**

- A. Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

##### **1.1.2 EXTENT OF WORK**

- A. Below is a brief description of the estimated quantities of asbestos containing materials to be abated. These quantities are for informational purposes only and are based on the best information available at the time of the specification preparation. The Contractor shall satisfy himself as the actual quantities to be abated. Nothing in this section may be interpreted as limiting the extent of work otherwise required by this contract and related documents.
- B. Removal, clean-up and disposal, the following is a list of ACM, trace asbestos, and assumed ACM as identified within the asbestos survey report dated 10/24/12 for the V.A. Loma Linda Healthcare System, 11201 Benton Street, Loma Linda, California as identified and completed by WEST.
- C. Asbestos Inspection Summary – Asbestos Positive Materials
  - 1. Floor tile (all areas considered asbestos positive)
  - 2. Floor tile mastic. (all areas considered asbestos positive)
  - 3. Stair treads mastic (all areas considered asbestos positive)

##### **1.1.3 RELATED WORK**

- A. Section 02 41 00, DEMOLITION
- B. Section 07 84 00, FIRESTOPPING
- C. Division 09, FINISHES

##### **1.1.4 TASKS**

The work tasks are summarized briefly as follows:

- A. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, regulated area preparations, emergency procedures arrangements, and standard operating procedures for asbestos abatement work.
- B. Abatement activities including removal, clean-up, and disposal of ACM waste, recordkeeping, security, monitoring, and inspections.

- C. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

#### 1.1.5 CONTRACTOR'S USE OF PREMISES

- A. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable federal, state and local regulations and requirements.
- B. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved VA Design and Construction Procedures. VA Design and Construction Procedures drawings of partially occupied buildings will show the limits of regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action. The following limitations of use shall apply to existing facilities shown on drawings:
  - 1. Building limitations as set forth by the general specification will apply.

#### 1.2 VARIATIONS IN QUANTITY

- A. The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimated which are limited by the physical constraints imposed by occupancy of the buildings and accessibility to ACM. Accordingly, minor variations (+/- 5%) in quantities of ACM within the regulated area are considered as having no impact on contract price and time requirements of this contract. Where additional work is required beyond the above variation, the Contractor shall provide unit prices for newly discovered ACM and those prices shall be used for additional work required under the Contractor.

#### 1.3 STOP ASBESTOS REMOVAL

- A. If the Contracting Officer; their field representative; (the facility Safety Officer/Manager or their designee, or the VA Professional Industrial Hygienist/Certified Industrial Hygienist (VPIH/CIH) presents a verbal **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered negative pressure air flow in the containment and adequately wet any exposed ACM. If a verbal Stop Asbestos Removal Order is issued, the VA shall follow-up with a written order to the Contractor as soon as it is practicable. The Contractor shall not resume any asbestos removal activity until authorized to do so in writing by the VA Contracting Officer. A stop asbestos removal order may be issued at any time the VA Contracting Officer determines abatement conditions/activities are not within VA specification, regulatory requirements or that an imminent hazard exists to human health or the environment. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the VPIH/CIH time. The occurrence of any of the following events shall be reported immediately by the Contractor's competent person to the VA Contracting Office or field representative using the most expeditious means (e.g., verbal or telephonic), followed up with written notification to the Contracting Officer as soon as practical. The Contractor shall immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities:
  - 1. Airborne PCM analysis results equal to or greater than 0.01 f/cc outside a regulated area or > 0.05 f/cc inside a regulated area;
  - 2. Breach or break in regulated area containment barrier(s);
  - 3. Less than - 0.5 millibar (- 0.02 inch) WCG pressure in the regulated area;
  - 4. Serious injury/death at the site;

5. Fire/safety emergency at the site;
6. Respiratory protection system failure;
7. Power failure or loss of wetting agent; or
8. Any visible emissions observed outside the regulated area.

## 1.4 DEFINITIONS

### 1.4.1 GENERAL

- A. Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

### 1.4.2 GLOSSARY

**Abatement** - Procedures to control fiber release from asbestos-containing materials. Includes removal, encapsulation, enclosure, demolition, and renovation activities related to asbestos containing materials (ACM).

**Aerosol** - Solid or liquid particulate suspended in air.

**Adequately wet** - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

**Aggressive method** - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

**Aggressive sampling** - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

**AHERA** - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

**Aircell** - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

**Air monitoring** - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air for personal samples and clearance air testing using Phase Contrast Microscopy (PCM) analysis. NIOSH Method 7402 can be used when it is necessary to confirm fibers counted by PCM as being asbestos. The AHERA TEM analysis may be used for background, area samples and clearance samples when required by this specification, or at the discretion of the VPIH/CIH as appropriate.

**Air sample filter** - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)

**Amended water** - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

**Asbestos** - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

**Asbestos Hazard Abatement Plan (AHAP)** - Asbestos work procedures required to be submitted by the Contractor before work begins.

**Asbestos-containing material (ACM)** - Any material containing more than one percent of asbestos.

**Asbestos contaminated elements (ACE)** - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

**Asbestos-containing waste (ACW) material** - Asbestos-containing material or asbestos contaminated objects requiring disposal.

**Asbestos Project Monitor** – Some states require that any person conducting asbestos abatement clearance inspections and clearance air sampling be licensed as an asbestos project monitor.

**Asbestos waste decontamination facility** - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

**Authorized person** - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

**Authorized visitor** - Any person approved by the VA; the Contractor; or any government agency representative having jurisdiction over the regulated area (e.g., OSHA, Federal and State EPA).

**Barrier** - Any surface that isolates the regulated area and inhibits fiber migration from the regulated area.

**Containment Barrier** - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

**Critical Barrier** - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting secured in place at openings such as doors, windows, or any other opening into the regulated area.

**Primary Barrier** – Plastic barriers placed over critical barriers and exposed directly to abatement work.

**Secondary Barrier** - Any additional plastic barriers used to isolate and provide protection from debris during abatement work.

**Breathing zone** - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

**Bridging encapsulant** - An encapsulant that forms a layer on the surface of the ACM.

**Building/facility owner** - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

**Bulk testing** - The collection and analysis of suspect asbestos containing materials.

**Certified Industrial Hygienist (CIH)** - A person certified in the comprehensive practice of industrial hygiene by the American Board of Industrial Hygiene.

**Class I asbestos work** - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

**Class II asbestos work** - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

**Clean room/Changing room** - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

**Clearance sample** - The final air sample taken after all asbestos work has been done and visually inspected; performed by the VA's professional industrial hygiene consultant/Certified Industrial Hygienist (VPIH/CIH).

**Closely resemble** - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

**Competent person** - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

**Contractor's Professional Industrial Hygienist (CPIH/CIH)** - The asbestos abatement Contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of a PIH and may be a certified industrial hygienist (CIH).

**Count** - Refers to the fiber count or the average number of fibers greater than five microns in length with a length-to-width (aspect) ratio of at least 3 to 1, per cubic centimeter of air.



**Crawlspace** – An area which can be found either in or adjacent to the work area. This area has limited access and egress and may contain asbestos materials.

**Decontamination area/unit** - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

**Demolition** - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

**VA Total** – means a building or substantial part of the building is completely removed, torn or knocked down, bulldozed, flattened, or razed, including removal of building debris.

**Disposal bag** - Typically 0.15 mm (6-mil) thick sift-proof, dustproof, leak-tight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

**Disturbance** - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag which shall not exceed 1524 mm (60 inches) in length or width.

**Drum** - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be sift-proof, dustproof, and leak-tight.

**Employee exposure** - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

**Encapsulant** - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

**Encapsulation** - Treating ACM with an encapsulant.

**Enclosure** - The construction of an airtight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

**Equipment room** - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

**Fiber** - A particulate form of asbestos, 5 microns or longer, with a length to width (aspect) ratio of at least 3 to 1.

**Fibers per cubic centimeter (f/cc)** - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

**Filter** - Media used in respirators, vacuums, or other machines to remove particulate from air.

**Firestopping** - Material used to close the open parts of a structure in order to prevent a fire from spreading.

**Friable asbestos containing material** - Any material containing more than one (1) percent or asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

**Glovebag** - Not more than a 1500 x 1500 mm (60 x 60-inch) impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

**High efficiency particulate air (HEPA) filter** – An ASHRAE MERV 17 filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 micrometers in diameter.

**HEPA vacuum** - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

**Homogeneous area** - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

**HVAC** - Heating, Ventilation and Air Conditioning

**Industrial hygienist (IH)** - A professional qualified by education, training, and experience to anticipate, recognize, evaluate, and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

**Industrial hygienist technician (IH Technician)** - A person working under the direction of an IH or CIH who has special training, experience, certifications, and licenses required for the industrial hygiene work assigned. Some states require that an industrial hygienist technician conducting asbestos abatement clearance inspection and clearance air sampling be licensed as an asbestos project monitor.

**Intact** - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

**Lockdown** - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

**National Emission Standards for Hazardous Air Pollutants (NESHAP)** - EPA's rule to control emissions of asbestos to the environment (40 CFR Part 61, Subpart M).

**Negative initial exposure assessment** - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL.

**Negative pressure** - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02" water column gauge inside the negative pressure enclosure.

**Negative pressure respirator** - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air pressure outside the respirator facepiece.

**Non-friable ACM** - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

**Organic vapor cartridge** - The type of cartridge used on air purifying respirators to remove organic vapor hazardous air contaminants.

**Outside air** - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

**Owner/operator** - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

**Penetrating encapsulant** - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

**Personal sampling/monitoring** - Representative air samples obtained in the breathing zone for one or workers within the regulated area using a filter cassette and a calibrated air sampling pump to determine asbestos exposure.

**Permissible exposure limit (PEL)** - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the eight (8) hour time weighted average PEL is 0.1 fibers per cubic centimeter (0.1 f/cc) of air and the 30-minute Excursion Limit is 1.0 fibers per cubic centimeter (1 f/cc).

**Personal protective equipment (PPE)** - equipment designed to protect user from injury and/or specific job hazard. Such equipment may include protective clothing, hard hats, safety glasses, and respirators.

**Pipe tunnel** - An area, typically located adjacent to mechanical spaces or boiler rooms in which the pipes servicing the heating system in the building are routed to allow the pipes to access heating elements. These areas may contain asbestos pipe insulation, asbestos fittings.

**Polarized light microscopy (PLM)** - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

**Polyethylene sheeting** - Strong plastic barrier material 4 to 0.15 mm (6-mil)s thick, semi-transparent, flame retardant per NFPA 241.

**Positive/negative fit check** - A method of verifying the seal of a facepiece respirator by temporarily occluding the filters and breathing in (inhaling) and then temporarily occluding the



exhalation valve and breathing out (exhaling) while checking for inward or outward leakage of the respirator respectively.

**Presumed ACM (PACM)** - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence, that other materials are ACM; they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (b).

**Professional IH** - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b), has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects, has formal training in respiratory protection and waste disposal, and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH. The PIH may be either the VA's PIH (VPIH) or Contractor's PIH (CPIH/CIH).

**Project designer** - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B)(5).

**Assigned protection factor** - A value assigned by OSHA/NIOSH to indicate the expected protection provided by each respirator class, when the respirator is properly selected and worn correctly. The number indicates the reduction of exposure level from outside to inside the respirator facepiece.

**Qualitative fit test (QLFT)** - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

**Quantitative fit test (QNFT)** - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

**Regulated area** - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

**Regulated ACM (RACM)** - Friable ACM; Category I non-friable ACM that has become friable; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II non-friable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

**Removal** - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

**Renovation** - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

**Repair** - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

**Shower room** - The portion of the PDF where personnel shower before leaving the regulated area.

**Supplied air respirator (SAR)** - A respiratory protection system that supplies minimum Grade D respirable air per ANSI/Compressed Gas Association Commodity Specification for Air, G-7.1-1989.

**Surfacing ACM** - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

**Surfactant** - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

**Thermal system ACM** - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

**Transmission electron microscopy (TEM)** - A microscopy method that can identify and count asbestos fibers.

**VA Professional Industrial Hygienist (VPIH/CIH)** – The Department of Veterans Affairs Professional Industrial Hygienist must meet the qualifications of a PIH, and may be a Certified Industrial Hygienist (CIH).

**VA Representative** - The VA official responsible for on-going project work.

**Visible emissions** - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM/ACS or ACM waste material.

**Waste/Equipment decontamination facility (W/EDF)** – The area in which equipment is decontaminated before removal from the regulated area.

**Waste generator** - Any owner or operator whose act or process produces asbestos-containing waste material.

**Waste shipment record** - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

**Wet cleaning** - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

### 1.4.3 REFERENCED STANDARDS ORGANIZATIONS

The following acronyms or abbreviations as referenced in contract/specification documents are defined to mean the associated names. Names and addresses may be subject to change.

- A. VA Department of Veterans Affairs  
810 Vermont Avenue, NW  
Washington, DC 20420
- B. AIHA American Industrial Hygiene Association  
2700 Prosperity Avenue, Suite 250  
Fairfax, VA 22031  
703-849-8888
- C. ANSI American National Standards Institute  
1430 Broadway  
New York, NY 10018  
212-354-3300
- D. ASTM American Society for Testing and Materials  
1916 Race St.  
Philadelphia, PA 19103  
215-299-5400
- E. CFR Code of Federal Regulations  
Government Printing Office  
Washington, DC 20420
- F. CGA Compressed Gas Association  
1235 Jefferson Davis Highway  
Arlington, VA 22202  
703-979-0900
- G. CS Commercial Standard of the National Institute of Standards and Technology (NIST)  
U. S. Department of Commerce  
Government Printing Office  
Washington, DC 20420

- H. EPA Environmental Protection Agency  
401 M St., SW  
Washington, DC 20460  
202-382-3949
- I. MIL-STD Military Standards/Standardization Division  
Office of the Assistant Secretary of Defense  
Washington, DC 20420
- J. NIST National Institute for Standards and Technology  
U. S. Department of Commerce  
Gaithersburg, MD 20234  
301-921-1000
- K. NEC National Electrical Code (by NFPA)
- L. NEMA National Electrical Manufacturer's Association  
2101 L Street, N.W.  
Washington, DC 20037
- M. NFPA National Fire Protection Association  
1 Batterymarch Park  
P.O. Box 9101  
Quincy, MA 02269-9101  
800-344-3555
- N. NIOSH National Institutes for Occupational Safety and Health  
4676 Columbia Parkway  
Cincinnati, OH 45226  
513-533-8236
- O. OSHA Occupational Safety and Health Administration  
U.S. Department of Labor  
Government Printing Office  
Washington, DC 20402
- P. UL Underwriters Laboratories  
333 Pfingsten Rd.  
Northbrook, IL 60062  
312-272-8800

## **1.5 APPLICABLE CODES AND REGULATIONS**

### **1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS**

- A. All work under this contract shall be done in strict accordance with all applicable federal, state, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.
- B. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specifications exists, the most stringent requirement(s) shall be utilized.

- C. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system.

### **1.5.2 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITY**

- A. The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable federal, state and local regulations related to any and all aspects of the asbestos abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment (PPE) including respiratory protection including respirator fit testing, as required by applicable federal, state and local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his Subcontractors. The Contractor will incur all costs of the CPIH/CIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements related to failure to comply with the regulations applicable to the work.

### **1.5.3 FEDERAL REQUIREMENTS**

Federal requirements which govern of asbestos abatement include, but are not limited to, the following regulations:

- A. Occupational Safety and Health Administration (**OSHA**):
  - 1. Title 29 CFR 1926.1101 - Construction Standard for Asbestos
  - 2. Title 29 CFR 1910 Subpart I - Personal Protective Equipment
  - 3. Title 29 CFR 1910.134 - Respiratory Protection
  - 4. Title 29 CFR 1926 - Construction Industry Standards
  - 5. Title 29 CFR 1910.1020 - Access to Employee Exposure and Medical Records
  - 6. Title 29 CFR 1910.1200 - Hazard Communication
  - 7. Title 29 CFR 1910 Subpart K - Medical and First Aid
- B. Environmental Protection Agency (**EPA**):
  - 1. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.
  - 2. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)
- C. Department of Transportation (**DOT**):
  - 1. Title 49 CFR 100 - 185 – Transportation

### **1.5.4 STATE AND LOCAL REQUIREMENTS**

- A. The Contractor shall comply with, but shall not be limited to, the following local and state rules and regulations as they relate to asbestos removal:
  - 1. State of California, Department of Occupational Safety and Health - Regulations for Construction and Handling Asbestos
  - 2. EPA Regional Office
  - 3. Local Air Pollution Agency (SCAQMD)
  - 4. CAL-OSHA
  - 5. City of Loma Linda
- B. If local requirements are more stringent than federal or state standards, the local standards are to be followed.

### **1.5.5 STANDARDS**

- A. Standards which govern asbestos abatement activities include, but are not limited to, the following:
  - 1. American National Standards Institute (ANSI) Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems and ANSI Z88.2 - Practices for Respiratory Protection.
  - 2. Underwriters Laboratories (UL) 586-90 - UL Standard for Safety of HEPA Filter Units, 7th Edition.
- B. Standards which govern encapsulation work include, but are not limited to the following:
  - 1. American Society for Testing and Materials (ASTM)
- C. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:
  - 1. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.
  - 2. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.
  - 3. NFPA 101 - Life Safety Code

### **1.5.6 EPA GUIDANCE DOCUMENTS**

EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.

- A. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
- B. Asbestos Waste Management Guidance EPA 530-SW-85-007
- C. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001
- D. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

### **1.5.7 NOTICES**

- A. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM.
- B. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification are given to EPA, state, and local authorities.

### **1.5.8 PERMITS/LICENSES**

- A. The Contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by federal, state, and local regulations.
- B. Permits and licenses to remove, transport, and dispose asbestos, including but not limited to:
  - 1. State of California
  - 2. EPA Regional Office
  - 3. Local Air Pollution Agency (SCAQMD)
  - 4. CAL-OSHA
  - 5. City of Loma Linda

### **1.5.9 POSTING AND FILING OF REGULATIONS**

- A. Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each in the clean room at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

### **1.5.10 VA RESPONSIBILITIES**

Prior to commencement of work:

- A. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipment, and personal possessions to avoid unauthorized access into the regulated area.  
**Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**
- B. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized, calibration data and method of analysis. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

#### 1.5.11 EMERGENCY ACTION PLAN AND ARRANGEMENTS

- A. An Emergency Action Plan shall be developed prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a);(b).
- B. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.
- C. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.
- D. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.
- E. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
  - 1. For non-life-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
  - 2. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, remove them from the regulated area, and secure proper medical treatment.
- F. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
- G. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Blood borne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.
- H. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the standard operating procedures during abatement. Such incidents include, but are not limited to, fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

#### 1.5.12 PRE-CONSTRUCTION MEETING

Prior to commencing the work, the Contractor shall meet with the VA Certified Industrial Hygienist (VPCIH) to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start



meeting is to discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

- A. Evidence that all federal, state, and local requirements have been met to conduct asbestos removal, including but not limited to the following agencies:
  - 1. State of California
  - 2. EPA Regional Office
  - 3. Local Air Pollution Agency (SCAQMD)
  - 4. CAL-OSHA
  - 5. City of Loma Linda
- B. Proof of Contractor licensing.
- C. Proof the Competent Person(s) is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person(s) shall also be presented.
- D. A list of all workers who will participate in the project, including experience and verification of training and accreditation.
- E. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.
- F. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).
- G. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.
- H. A copy of the Contractor's Asbestos Hazard Abatement Plan. In these procedures, the following information must be detailed, specific for this project.
  - 1. Regulated area preparation procedures;
  - 2. Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
  - 3. Decontamination area set-up/layout and decontamination procedures for employees;
  - 4. Abatement methods/procedures and equipment to be used;
  - 5. Personal protective equipment to be used;
- I. At this meeting the Contractor shall provide all submittals as required.
- J. Procedures for handling, packaging and disposal of asbestos waste.
- K. Emergency Action Plan and Contingency Plan Procedures.

## **1.6 PROJECT COORDINATION**

- A. The following are the minimum administrative and supervisory personnel necessary for coordination of the work:

### **1.6.1 PERSONNEL**

- A. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for compliance with these specifications and all other applicable requirements.
- B. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; social security number; qualifications; accreditation card with color picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.
- C. Minimum qualifications for Contractor and assigned personnel are:
  - 1. The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious

- violations of federal (and state as applicable) EPA and OSHA asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work as required by the state; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive standard operating procedures for asbestos work; has adequate materials, equipment and supplies to perform the work.
2. The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project within the past three (3) years; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
  3. The Contractor Professional Industrial Hygienist/CIH (CPIH/CIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete standard operating procedure for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course or equivalent, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.
  4. The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the standard operating procedures of the Contractor; has one year of asbestos abatement experience within the past three (3) years of similar size and complexity; has applicable medical and respiratory protection documentation; has certificate of training/current refresher and State accreditation/license.

All personnel should be in compliance with OSHA construction safety training as applicable and submit certification.

## **1.7 RESPIRATORY PROTECTION**

### **1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM**

- A. The Contractor shall develop and implement a written Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910.Subpart I;134. ANSI Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written RPP shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c)(1)(i - ix) - Respiratory Protection Program.

### **1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR**

- A. The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years' experience coordinating RPP of similar size and complexity. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

### **1.7.3 SELECTION AND USE OF RESPIRATORS**

- A. The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualifications. The procedure must be written clearly enough for workers to understand.
- B. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit for reference by employees or authorized visitors.



#### **1.7.4 MINIMUM RESPIRATORY PROTECTION**

- A. At start up, minimum respiratory protection shall be a full face powered air purifying respirator when fiber levels are maintained consistently at or below 0.5 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

#### **1.7.5 MEDICAL WRITTEN OPINION**

- A. No employee shall be allowed to wear a respirator unless a physician or other licensed health care professional has provided a written determination they are medically qualified to wear the class of respirator to be used on the project while wearing whole body impermeable garments and subjected to heat or cold stress.

#### **1.7.6 RESPIRATOR FIT TEST**

- A. All personnel wearing respirators shall have a current qualitative/quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Quantitative fit tests shall be done for PAPRs which have been put into a motor/blower failure mode.

#### **1.7.7 RESPIRATOR FIT CHECK**

- A. The Competent Person shall assure that the positive/negative pressure user seal check is done each time the respirator is donned by an employee. Head coverings must cover respirator head straps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a user seal check shall preclude that person from wearing a respirator inside the regulated area until resolution of the problem.

#### **1.7.8 MAINTENANCE AND CARE OF RESPIRATORS**

- A. The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) Maintenance and Care of Respirators.

#### **1.7.9 SUPPLIED AIR SYSTEMS**

- A. If a supplied air system is used, the system shall meet all requirements of 29 CFR 1910.134 and the ANSI/Compressed Gas Association (CGA) Commodity Specification for Air current requirements for Type 1 - Grade D breathing air. Low pressure systems are not allowed to be used on asbestos abatement projects. Supplied Air respirator use shall be in accordance with EPA/NIOSH publication EPA-560-OPTS-86-001 "A Guide to Respiratory Protection for the Asbestos Abatement Industry". The competent person on site will be responsible for the supplied air system to ensure the safety of the worker.

### **1.8 WORKER PROTECTION**

#### **1.8.1 TRAINING OF ABATEMENT PERSONNEL**

- A. Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

### 1.8.2 MEDICAL EXAMINATIONS

- A. Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the medical opinion the person has been evaluated for working in a heat and cold stress environment while wearing personal protective equipment (PPE) and is able to perform the work without risk of material health impairment.

### 1.8.3 REGULATED AREA ENTRY PROCEDURE

- A. The Competent Person shall ensure that each time workers enter the regulated area; they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

### 1.8.4 DECONTAMINATION PROCEDURE

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area:

- A. When exiting the regulated area, remove disposable coveralls, and ALL other clothes, disposable head coverings, and foot coverings or boots in the equipment room.
- B. Still wearing the respirator and completely naked, proceed to the shower. Showering is MANDATORY. Care must be taken to follow reasonable procedures in removing the respirator to avoid inhaling asbestos fibers while showering. The following procedure is required as a minimum:
  - 1. Thoroughly wet body including hair and face. If using a PAPR hold blower above head to keep filters dry.
  - 2. With respirator still in place, thoroughly decontaminate body, hair, respirator face piece, and all other parts of the respirator except the blower and battery pack on a PAPR. Pay particular attention to cleaning the seal between the face and respirator facepiece and under the respirator straps.
  - 3. Take a deep breath, hold it and/or exhale slowly, completely wetting hair, face, and respirator. While still holding breath, remove the respirator and hold it away from the face before starting to breathe.
- C. Carefully decontaminate the facepiece of the respirator inside and out. If using a PAPR, shut down using the following sequence: a) first cap inlets to filters; b) turn blower off to keep debris collected on the inlet side of the filter from dislodging and contaminating the outside of the unit; c) thoroughly decontaminate blower and hoses; d) carefully decontaminate battery pack with a wet rag being cautious of getting water in the battery pack thus preventing destruction. **(THIS PROCEDURE IS NOT A SUBSTITUTE FOR RESPIRATOR CLEANING!)**
- D. Shower and wash body completely with soap and water. Rinse thoroughly.
- E. Rinse shower room walls and floor to drain prior to exiting.
- F. Proceed from shower to clean room; dry off and change into street clothes or into new disposable work clothing.

### 1.8.5 REGULATED AREA REQUIREMENTS

- A. The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for regulated areas at 29 CFR 1926.1101 (e) are met. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum, apply cosmetics, or in any way interfere with the fit of their respirator.

## **1.9 DECONTAMINATION FACILITIES**

### **1.9.1 DESCRIPTION**

- A. Provide each regulated area with separate personnel decontamination facilities (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF are the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

### **1.9.2 GENERAL REQUIREMENTS**

- A. All personnel entering or exiting a regulated area must go through the PDF and shall follow the requirements at 29 CFR 1926.1101 (j)(1) and these specifications. All waste, equipment and contaminated materials must exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3 layers of 0.15 mm (6-mil) opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 0.15 mm (6-mil) poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weight inner doorway sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting and reduce potential for non-authorized personnel entering the regulated area.


### **1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF**

- A. The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141(d)(3). Provide adequate temporary overhead electric power with ground fault circuit interruption (GFCI) protection. Provide a sub-panel equipped with GFCI protection for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat, if needed, to maintain 70°F throughout the PDF and W/EDF.

### **1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)**


- A. The Competent Person shall provide a PDF consisting of shower room which is contiguous to a clean room and equipment room which is connected to the regulated area. The PDF must be sized to accommodate the number of personnel scheduled for the project. The shower room, located in the center of the PDF, shall be fitted with as many portable showers as necessary to insure all employees can complete the entire decontamination procedure within 15 minutes. The PDF shall be constructed of opaque poly for privacy. The PDF shall be constructed to eliminate any parallel routes of egress without showering.
  - 1. Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 3 layers of 0.15 mm (6-mil) opaque fire retardant poly to provide an airtight room. Provide a minimum of 2 - 900 mm (3 foot) wide 0.15 mm (6-mil) poly opaque fire retardant doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry condition. Shower overflow shall not be allowed into the clean room. Provide 1 storage locker per person. A portable fire extinguisher, minimum 10 pounds capacity, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the

- shower room completely naked and thoroughly washed. Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at both entry points to the PDF so no male can enter or exit the PDF during her stay in the PDF.
2. Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the equipment room to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using airtight walls made from at least 3 layers of 0.15 mm (6-mil) opaque fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100-micron sock in the shower drain; a 20 -micron filter; and a final 5-micron filter. Filters will be changed a minimum of daily or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.
  3. Equipment Room: The Competent Person shall provide an equipment room which shall be an airtight compartment for the storage of work equipment/tools, reusable personal protective equipment, except for a respirator and for use as a gross decontamination area for personnel exiting the regulated area. The equipment room shall be separated from the regulated area by a minimum 3-foot wide door made with 2 layers of 0.15 mm (6-mil) opaque fire retardant poly. The equipment room shall be separated from the regulated area, the shower room and the rest of the building by airtight walls and ceiling constructed of a minimum of 3 layers of 0.15 mm (6-mil) opaque fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 0.15 mm (6-mil) fire retardant poly per shift change and remove this layer after each shift. If needed, provide a temporary electrical sub-panel equipped with GFCI in the equipment room to accommodate any equipment required in the regulated area.
  4. The PDF shall be as follows: Clean room at the entrance followed by a shower room followed by an equipment room leading to the regulated area. Each doorway in the PDF shall be a minimum of 2 layers of 0.15 mm (6-mil) opaque fire retardant poly.

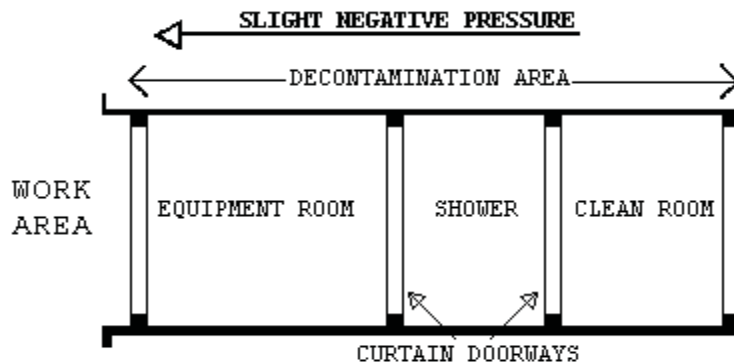

### 1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF)

- A. The Competent Person shall provide a W/EDF consisting of a wash room, holding room, and clean room for removal of waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:
1. Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment bag and container cleaning station.
  2. Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area. Construct the wash room using 50 x 100 mm (2 x 4-inch) wood framing and 3 layers of 0.15 mm (6-mil) fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2 layers of 0.15 mm (6-mil) fire retardant poly.
  3. Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2 x 4-inch) wood framing and 3 layers of 0.15 mm (6-mil) fire retardant poly. The holding room shall be located so that bagged material cannot be passed from the wash room to the clean room unless it goes through the holding room. Doorways in the holding room shall be constructed of 2 layers of 0.15 mm (6-mil) fire retardant poly.
  4. Clean Room: Provide a clean room to isolate the holding room from the exterior of the regulated area. Construct the clean room using 50 x 100 mm (2 x 4-inch) wood framing and 2 layers of 0.15 mm (6-mil) fire retardant poly. The clean room shall be located so as to provide access to the holding room from the building exterior. Doorways to the clean room shall be constructed of 2 layers of 6- mil fire retardant poly. When a negative pressure differential system is used, a rigid enclosure separation between the W/EDF clean room and the adjacent areas shall be provided.
  5. The W/EDF shall be as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

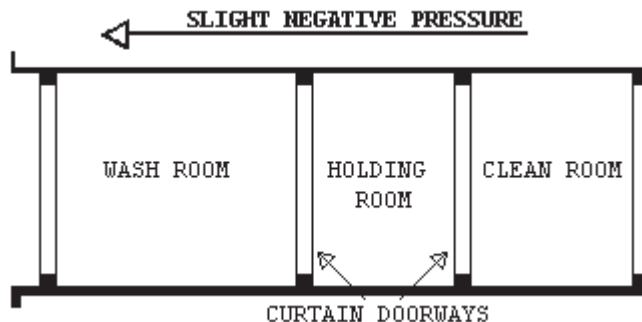

### 1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES

- A. At the washdown station in the regulated area, thoroughly wet clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and disposal. These personnel

will not be required to wear PPE. At no time shall personnel from the clean side be allowed to enter the Wash Room.

## **PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT**

### **2.1 MATERIALS AND EQUIPMENT**

#### **2.1.1 GENERAL REQUIREMENTS**

Prior to the start of work, the Contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH/CIH has submitted verification to the VA's representative:

- A. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
- B. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable and combustible materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.
- C. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized location.
- D. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
- E. Polyethylene sheeting for walls in the regulated area shall be a minimum of 0.1 mm (4-mil). For floors and all other uses, sheeting of at least 0.15 mm (6-mil) shall be used in widths selected to minimize the frequency of joints. Fire retardant poly shall be used throughout.
- F. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or other effective procedures capable of sealing polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.
- G. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 0.15 mm (6-mil) fire retardant poly.
- H. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
- I. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.
- J. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).
- K. Disposal bags – 2 layers of 0.15 mm (6-mil) poly for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
- L. The VA shall be provided an advance copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication in the pre-start meeting submittal. Chlorinated compounds shall not be used with any spray adhesive, mastic remover or other product. Appropriate encapsulant(s) shall be provided.



- M. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k)(7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.
- N. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a written hazard assessment conducted under 29 CFR 1910.132(d).

## **2.2 MONITORING, INSPECTION, AND TESTING**

### **2.2.1 GENERAL**

- A. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. OSHA requires that the employee exposure to asbestos must not exceed 0.1 fiber per cubic centimeter (f/cc) of air, averaged over an 8-hour work shift. The CPIH/CIH is responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH/CIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.
- B. Any on-site technician, industrial hygienist, certified industrial hygienist conducting any on-site monitoring, inspections, air sampling, and testing shall be certified through the State of California Division of Occupational Safety and Health (DOSH) as a Certified Asbestos Consultant (CAC) or a Site Surveillance Technician (SST) performing only approved activities under the direction of a CAC.
- C. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform the necessary monitoring, inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.
- D. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH with review and approval of the VPIH/CIH. An agreement between the CPIH/CIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

### **2.2.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT**

- A. The purpose of the work of the VPIH/CIH is to: assure quality; adherence to the specification; resolve problems; prevent the spread of contamination beyond the regulated area; and assure clearance at the end of the project. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM. The VPIH/CIH will perform the following tasks:
  - 1. Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
  - 2. Task 2: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
  - 3. Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
  - 4. Task 4: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of conflicts, interpret data, etc.
  - 5. Task 5: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area at the conclusion of the abatement to certify compliance with all regulations and VA requirements/specifications.
  - 6. Task 6: Issue certificate of decontamination for each regulated area and project report.
- B. All documentation, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
- C. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

### **2.2.3 MONITORING, INSPECTION, AND TESTING BY CONTRACTOR CPIH/CIH**

- A. The Contractor's CPIH/CIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH/CIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in sampling and analysis. The IH Technician shall have successfully completed a NIOSH 582 Course or equivalent and provide documentation. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA AHERA/State Contractor/Supervisor or Abatement Worker and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation on substantially similar projects in size and scope. The analytic laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT and approved by the VA prior to start of the project. A daily log shall be maintained by the CPIH/CIH or IH Technician, documenting all OSHA requirements for air personal monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH upon request. The log will contain, at a minimum, information on personnel or area samples, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and



fibers/cc. The CPIH/CIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 93 m<sup>2</sup> (1,000 ft<sup>2</sup>) of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In addition to the continuous monitoring required, the CPIH/CIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH/CIH responsibilities. Additionally, the CPIH/CIH will monitor and record pressure readings within the containment daily with a minimum of two readings at the beginning and at the end of a shift, and submit the data in the daily report.

## **2.3 ASBESTOS HAZARD ABATEMENT PLAN**

The Contractor shall have established an Asbestos Hazard Abatement Plan (AHAP) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the procedures to be followed during all phases of the work by the Contractor's personnel. The AHAP must be modified as needed to address specific requirements of this project and the specifications. The AHAP shall be submitted for review and approval to the VA prior to the start of any abatement work. The minimum topics and areas to be covered by the AHAPs are:

- A. Minimum Personnel Qualifications
- B. Emergency Action Plan/Contingency Plans and Arrangements
- C. Security and Safety Procedures
- D. Respiratory Protection/Personal Protective Equipment Program and Training
- E. Medical Surveillance Program and Recordkeeping
- F. Regulated Area Requirements - Containment Barriers/Isolation of Regulated Area
- G. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
- H. Negative Pressure Systems Requirements
- I. Monitoring, Inspections, and Testing
- J. Removal Procedures for ACM
- K. Encapsulation Procedures for ACM
- L. Disposal of ACM waste/equipment
- M. Regulated Area Decontamination/Clean-up
- N. Regulated Area Visual and Air Clearance
- O. Project Completion/Closeout

## **2.4 SUBMITTALS**

### **2.4.1 PRE-START MEETING SUBMITTALS**

Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:

- A. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
- B. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.
- C. Submit Asbestos Hazard Abatement Plan developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH/CIH.
- D. Submit the specifics of the materials and equipment to be used for this project with manufacturer names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:

1. Supplied air system, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.
2. Waste water filtration system, shower system, containment barriers.
3. Encapsulants, surfactants, hand held sprayers, airless sprayers, glovebags, and fire extinguishers.
4. Respirators, protective clothing, personal protective equipment.
5. Fire safety equipment to be used in the regulated area.
- E. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of Subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.
- F. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.
- G. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Personal air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A. Area or clearance air monitoring shall be conducted in accordance with EPA AHERA protocols.
- H. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
  1. Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; Completion Date
  2. List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; Resolution
  3. List asbestos regulatory citations (e.g., OSHA), notices of violations (e.g., Federal and state EPA), penalties, and legal actions taken against the company including and of the company's officers (including damages paid) in the last 3 years. Provide copies and all information needed for verification.
- I. Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPHI/CIH stating that all personnel submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and written respiratory protection program, and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.
  1. CPHI/CIH and IH Technician: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials; samples of AHAPs developed; medical opinion; and current respirator fit test.
  2. Competent Person(s)/Supervisor(s): Number; names; social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects in size/complexity as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
  3. Workers: Numbers; names; social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
- J. Submit copies of state license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain language the coverage provided and the fact

that asbestos abatement activities are covered by the policy; copy of AHAPs incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who performs and how is personal air monitoring of abatement workers conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and standard operating procedures; and copies of monitoring results of the five referenced projects listed and analytical method(s) used.

- K. Rented equipment must be decontaminated prior to returning to the rental agency.
- L. Submit, before the start of work, the manufacturer's technical data for all types of encapsulants, all MSDS and application instructions.

#### **2.4.2 SUBMITTALS DURING ABATEMENT**

- A. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breaching, equipment failures, emergencies, and any cause for stopping work; and representative air monitoring and results/TWA's/EL's. Submit this information daily to the VPIH/CIH.
- B. The CPIH/CIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.
  - 1. Removal of any poly barriers.
  - 2. Visual inspection/testing by the CPIH/CIH or IH Technician prior to application of lockdown encapsulant.
  - 3. Packaging and removal of ACM waste from regulated area.
  - 4. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

#### **2.4.3 SUBMITTALS AT COMPLETION OF ABATEMENT**

- A. The CPIH/CIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. It will also include information on the containment and transportation of waste from the containment with applicable Chain of Custody forms. The report shall include a certificate of completion, signed and dated by the CPIH/CIH, in accordance with Attachment #1. All clearance and perimeter area samples must be submitted. The VA Representative will retain the abatement report after completion of the project and provide copies of the abatement report to VAMC Office of Engineer and the Safety Office.

### **2.5 ENCAPSULANTS**

#### **2.5.1 TYPES OF ENCAPSULANTS**

- A. The following four types of encapsulants, if used, must comply with performance requirements as stated in paragraph 2.5.2:
  - 1. Removal encapsulant - used as a wetting agent to remove ACM.
  - 2. Bridging encapsulant - provides a tough, durable coating on ACM.
  - 3. Penetrating encapsulant - penetrates/encapsulates ACM at least 13 mm (1/2 inch).
  - 4. Lockdown encapsulant - seals microscopic fibers on surfaces after ACM removal.

#### **2.5.2 PERFORMANCE REQUIREMENTS**

Encapsulants shall meet the latest requirements of EPA; shall not contain toxic or hazardous substances; or solvents; and shall comply with the following performance requirements:

- A. General Requirements for all Encapsulants:

1. ASTM E84: Flame spread of 25; smoke emission of 50
2. University of Pittsburgh Protocol: Combustion Toxicity; zero mortality
3. ASTM C732: Accelerated Aging Test; Life Expectancy - 20 years
4. ASTM E96: Permeability - minimum of 0.4 perms
- B. Bridging/Penetrating Encapsulants:
  1. ASTM E736: Cohesion/Adhesion Test - 24 kPa (50 lbs/ft<sup>2</sup>)
  2. ASTM E119: Fire Resistance - 3 hours (Classified by UL for use on fibrous/cementitious fireproofing).
  3. ASTM D2794: Gardner Impact Test; Impact Resistance - minimum 11.5 kg-mm (43 in/lb)
  4. ASTM D522: Mandrel Bend Test; Flexibility - no rupture or cracking
- C. Lockdown Encapsulants:
  1. ASTM E119: Fire resistance - 3 hours (tested with fireproofing over encapsulant applied directly to steel member).
  2. ASTM E736: Bond Strength - 48 kPa (100 lbs/ft<sup>2</sup>) (test compatibility with cementitious and fibrous fireproofing).
  3. In certain situations, encapsulants may have to be applied to hot pipes/equipment. The encapsulant must be able to withstand high temperatures without cracking or off-gassing any noxious vapors during application.

### 2.5.3 CERTIFICATES OF COMPLIANCE

- A. The Contractor shall submit to the VA representative certification from the manufacturer indicating compliance with performance requirements for encapsulants when applied according to manufacturer recommendations.

## PART 3 - EXECUTION

### 3.1 REGULATED AREA PREPARATIONS

#### 3.1.1 SITE SECURITY

- A. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.
- B. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent Person shall immediately require any unauthorized person to leave the regulated area and then notify the VA Contracting Officer or VA Representative using the most expeditious means.
- C. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must record their name, affiliation, time in, and time out for each entry.
- D. Access to the regulated area shall be through a single decontamination unit. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. **Emergency exits shall not be locked from the inside;** however, they shall be sealed with poly sheeting and taped until needed. In any situation where exposure to high temperatures which may result in a flame hazard, fire retardant poly sheeting must be used.
- E. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.

- F. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.
- G. The regulated area shall be locked during non-working hours and secured by VA Representative or Competent Person. The VA Police should be informed of asbestos abatement regulated areas to provide security checks during facility rounds and emergency response.

### **3.1.2 SIGNAGE AND POWER MANAGEMENT**

- A. Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed the PEL. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.
- B. Shut down and lock out/tag out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.
- C. Shut down and lock out/tag out heating, cooling, and air conditioning system (HVAC) components that are in, supply or pass through the regulated area. Investigate the regulated area and agree on pre-abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 0.15 mm (6-mil) poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 0.15 mm (6-mil) polyethylene disposal bags for staging and eventual disposal as asbestos waste.

### **3.1.3 NEGATIVE PRESSURE FILTRATION SYSTEM**

- A. The Contractor shall provide enough HEPA negative air machines to effect  $> -0.5$  millibar ( $-0.02$  inch) WCG pressure. The Competent Person shall determine the number of units needed for the regulated area by dividing the cubic feet in the regulated area by 15 and then dividing that result by the cubic feet per minute (CFM) for each unit to determine the number of units needed to effect  $> -0.5$  mm ( $-0.02$  inch) WCG pressure. Provide a standby unit in the event of machine failure and/or emergency in an adjacent area.
- B. NIOSH has done extensive studies and has determined that negative air machines typically operate at ~50% efficiency. The Contractor shall consider this in their determination of number of units needed to provide  $> -0.5$  mm ( $-0.02$  inch) WCG pressure. The Contractor shall use double the number of machines, based on their calculations, or submit proof their machines operate at stated capacities, at a 50.8 mm (2-inch) pressure drop across the filters.
- C. Design and Layout:
  - 1. Before start of work submit the design and layout of the regulated area and the negative air machines. The submittal shall indicate the number of, location of and size of negative air machines. The point(s) of exhaust, air flow within the regulated area, anticipated negative pressure differential, and supporting calculations for sizing shall be provided. In addition, submit the following:
    - a) Method of supplying power to the units and designation/location of the panels.
    - b) Description of testing method(s) for correct air volume and pressure differential.
    - c) If auxiliary power supply is to be provided for the negative air machines, provide a schematic diagram of the power supply and manufacturer's data on the generator and switch.
- D. Negative Air Machines (HEPA Units):
  - 1. Negative Air Machine Cabinet: The cabinet shall be constructed of steel or other durable material capable of withstanding potential damage from rough handling and transportation.



- The width of the cabinet shall be less than 762 mm (30 inches) in order to fit in standard doorways. The cabinet must be factory sealed to prevent asbestos fibers from being released during use, transport, or maintenance. Any access to and replacement of filters shall be from the inlet end. The unit must be on casters or wheels.
2. Negative Air Machine Fan: The rating capacity of the fan must indicate the CFM under actual operating conditions. Manufacturer's typically use "free-air" (no resistance) conditions when rating fans. The fan must be a centrifugal type fan.
  3. Negative Air Machine Final Filter: The final filter shall be a HEPA filter. The filter media must be completely sealed on all edges within a structurally rigid frame. The filter shall align with a continuous flexible gasket material in the negative air machine housing to form an airtight seal. Each HEPA filter shall be certified by the manufacturer to have an efficiency of not less than 99.97%. Testing shall have been done in accordance with Military Standard MIL-STD-282 and Army Instruction Manual 136-300-175A. Each filter must bear a UL586 label to indicate ability to perform under specified conditions. Each filter shall be marked with the name of the manufacturer, serial number, air flow rating, efficiency and resistance, and the direction of test air flow.
  4. Negative Air Machine Pre-filters: The pre-filters, which protect the final HEPA filter by removing larger particles, are required to prolong the operating life of the HEPA filter. Two stages of pre-filtration are required. A first stage pre-filter shall be a low efficiency type for particles 10 µm or larger. A second stage pre-filter shall have a medium efficiency effective for particles down to 5 µm or larger. Pre-filters shall be installed either on or in the intake opening of the NAM and the second stage filter must be held in place with a special housing or clamps.
  5. Negative Air Machine Instrumentation: Each unit must be equipped with a gauge to measure the pressure drop across the filters and to indicate when filters have become loaded and need to be changed. A table indicating the cfm for various pressure readings on the gauge shall be affixed near the gauge for reference or the reading shall indicate at what point the filters shall be changed, noting cfm delivery. The unit must have an elapsed time meter to show total hours of operation.
  6. Negative Air Machine Safety and Warning Devices: An electrical/ mechanical lockout must be provided to prevent the fan from being operated without a HEPA filter. Units must be equipped with an automatic shutdown device to stop the fan in the event of a rupture in the HEPA filter or blockage in the discharge of the fan. Warning lights are required to indicate normal operation; too high a pressure drop across filters; or too low of a pressure drop across filters.
  7. Negative Air Machine Electrical: All electrical components shall be approved by the National Electrical Manufacturer's Association (NEMA) and Underwriters Laboratories (UL). Each unit must be provided with overload protection and the motor, fan, fan housing, and cabinet must be grounded.
  8. It is essential that replacement HEPA filters be tested using an "in-line" testing method, to ensure the seal around the periphery was not damaged during replacement. Damage to the outer HEPA filter seal could allow contaminated air to bypass the HEPA filter and be discharged to an inappropriate location. Contractor will provide written documentation of test results for negative air machine units with HEPA filters changed by the Contractor or documentation when changed and tested by the Contractor filters
- E. Pressure Differential:
1. The fully operational negative air system within the regulated area shall continuously maintain a pressure differential of - 0.5 mm (- 0.02 inch) water column gauge. Before any disturbance of any asbestos material, this shall be demonstrated to the VA by use of a pressure differential meter/manometer as required by OSHA 29 CFR 1926.1101(e)(5)(i). The Competent Person shall be responsible for providing, maintaining, and documenting the negative pressure and air changes as required by OSHA and this specification.

- F. Monitoring:
  - 1. The pressure differential shall be continuously monitored and recorded between the regulated area and the area outside the regulated area with a monitoring device that incorporates a strip chart recorder. The strip chart recorder shall become part of the project log and shall indicate at least -0.02" water column gauge for the duration of the project.
- G. Auxiliary Generator:
  - 1. If the building is occupied during abatement, provide an auxiliary gasoline/diesel generator located outside the building in an area protected from the weather. In the event of a power failure of the general power grid and the VAMC emergency power grid, the generator must automatically start and supply power to a minimum of 50% of the negative air machines in operation.
- H. Supplemental Make-Up Air Inlets:
  - 1. Provide, as needed for proper air flow in the regulated area, in a location approved by the VA, openings in the plastic sheeting to allow outside air to flow into the regulated area. Auxiliary makeup air inlets must be located as far from the negative air machines as possible, off the floor near the ceiling, and away from the barriers that separate the regulated area from the occupied clean areas. Cover the inlets with weighted flaps which will seal in the event of failure of the negative pressure system.
- I. Testing the System:
  - 1. The negative pressure system must be tested before any ACM is disturbed in any way. After the regulated area has been completely prepared, the decontamination units set up, and the negative air machines installed, start the units up one at a time. Demonstrate and document the operation and testing of the negative pressure system to the VA using smoke tubes and a negative pressure gauge. Verification and documentation of adequate negative pressure differential across each barrier must be done at the start of each work shift.
- J. Demonstration of the Negative Pressure Filtration System:

The demonstration of the operation of the negative pressure system to the VA shall include, but not be limited to, the following:

  - 1. Plastic barriers and sheeting move lightly in toward the regulated area.
  - 2. Curtains of the decontamination units move in toward regulated area.
  - 3. There is a noticeable movement of air through the decontamination units. Use the smoke tube to demonstrate air movement from the clean room to the shower room to the equipment room to the regulated area.
  - 4. Use smoke tubes to demonstrate air is moving across all areas in which work is to be done. Use a differential pressure gauge to indicate a negative pressure of at least -0.02" across every barrier separating the regulated area from the rest of the building. Modify the system as necessary to meet the above requirements.
- K. Use of the Negative Pressure Filtration System during Abatement Operations:
  - 1. Start units before beginning any disturbance of ACM occurs. After work begins, the units shall run continuously, maintaining 4 actual air changes per hour at a negative pressure differential of - 0.5 mm (- 0.02 inch) water column gauge, for the duration of the work until a final visual clearance and final air clearance has been successfully completed.
  - 2. No negative air units shall be shut down at any time unless authorized by the VA Contracting Officer, verbally and in writing.
  - 3. Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.
  - 4. Abatement work shall begin at a location farthest from the units and proceed towards them. If an electric failure occurs, the Competent Person shall stop all abatement work and immediately begin wetting all exposed asbestos materials for the duration of the power outage. Abatement work shall not resume until power is restored and all units are operating properly again.

5. The negative air machines shall continue to run after all work is completed and until a final visual clearance and a final air clearance has been successfully completed for that regulated area.
- L. Dismantling the System:
  1. After completion of the final visual and final air clearance has been obtained by the VPIH/CIH, the units may be shut down. The unit exterior surfaces shall have been completely decontaminated; pre-filters are not to be removed and the units' inlet/outlet sealed with 2 layers of 0.15 mm (6-mil) poly immediately after shut down. No filter removal shall occur at the VA site following successful completion of site clearance. OSHA/EPA/DOT asbestos shall be attached to the units.

### **3.1.4 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA**

- A. General:
  1. Seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All surfaces in the regulated area must be covered to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated as a result of the work, shall immediately stop work and clean up the contamination at no additional cost to the VA. Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Article 3.1.4, Paragraph H; FIRESTOPPING.
- B. Preparation Prior to Sealing the Regulated Area:
  1. Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. All uncontaminated removable furniture, equipment and/or supplies shall be removed by the VA from the regulated area before commencing work. Any objects remaining in the regulated area shall be completely covered with 2 layers of 0.15 mm (6-mil) fire retardant poly sheeting and secured with duct tape. Lock out and tag out any HVAC/electrical systems in the regulated area.
- C. Controlling Access to the Regulated Area:
  1. Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA DANGER demarcation signs posted as required by OSHA. If the regulated area is adjacent to, or within view of an occupied area, provide a visual barrier of 0.15 mm (6-mil) opaque fire retardant poly to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid and capable of withstanding the negative pressure.
- D. Critical Barriers:
  1. Completely separate any operations in the regulated area from adjacent areas using 2 layers of 0.15 mm (6-mil) fire retardant poly and duct tape. Individually seal with 2 layers of 0.15 mm (6-mil) poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects/openings in the regulated area. Heat must be shut off any objects covered with poly.
- E. Primary Barriers:
  1. Cover the regulated area with two layers of 0.15 mm (6-mil) fire retardant poly on non-affected floors and two layers of 0.10 mm (4-mil), fire retardant poly on the walls, unless otherwise directed in writing by the VA representative. Floor layers must form a right angle with the wall and turn up the wall at least 300 mm (12 inches). Seams must overlap at least 1800 mm (6 feet) and must be spray glued and taped. Install sheeting so that layers can be removed independently from each other. Carpeting shall be covered with three layers of 0.15 mm (6-mil) poly. Corrugated cardboard sheets must be placed between the bottom and middle layers of poly. Mechanically support and seal with duct tape and glue all wall layers.
  2. The following is a list of ACM, trace asbestos, and assumed ACM as identified within the asbestos survey report dated 10/24/12 for the stairwell project located at the VA Loma Linda Healthcare System, 11201 Benton Street, Loma Linda, California, as identified and completed by WEST.



3. The removal, cleanup, and disposal of the asbestos materials listed below relate directly to the asbestos containing materials as identified within the subject building. The set-up / preparation work completed by the asbestos removal Contractor will take into account that all walls and ceilings that are not part of the actual asbestos removal will be protected. The asbestos removal Contractor will submit a detailed set-up / preparation work space submittal and diagram to be pre-approved prior to commencement of any asbestos removal activities.
  4. If stairs and ramps are covered with 0.15 mm (6-mil) plastic, two layers must be used. Provide 19 mm (3/4 inch) exterior grade plywood treads held in place with duct tape/glue on the plastic. Do not cover rungs or rails with any isolation materials.
- F. Secondary Barriers:
1. A loose layer of 0.15 mm (6-mil) polyethylene sheeting shall be used as a drop cloth to protect the primary layers from debris generated during the abatement. This layer shall be replaced as needed during the work and at a minimum once per work day.
- G. Extension of the Regulated Area:
1. If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. Decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.
- H. Firestopping:
1. Through penetrations caused by cables, cable trays, pipes, sleeves, conduits, etc. must be firestopped with a fire-rated firestop system providing an airtight seal.
  2. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The Contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the VA representative immediately. All walls, floors and ceilings are considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.
  3. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

### **3.1.5 SANITARY FACILITIES**

- A. The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

### **3.1.6 PERSONAL PROTECTIVE EQUIPMENT**

- A. Provide whole body clothing, head coverings, gloves and foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.

### **3.1.7 PRE-CLEANING**

- A. The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.
- B. Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. All workers performing pre-cleaning activities must don appropriate personal protective equipment (PPE), as specified throughout this document and as approved in the Contractor's work plan. After items have been

pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.

- C. Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location. If ACM floor tile is attached to the carpet while the Contractor is removing the carpet that section of the carpet will be disposed of as asbestos waste.
- D. Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grilles or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After pre-cleaning, enclose fixed objects with 2 layers of 0.15 mm (6-mil) poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements. To be completed by the Asbestos Removal Contractor.
- E. Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

### **3.1.8 PRE-ABATEMENT ACTIVITIES**

- A. Pre-Abatement Meeting:
  - 1. The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPHI/CIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPHI/CIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.
- B. Pre-Abatement Construction and Operations:
  - 1. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
  - 2. Upon completion of all preparatory work, the CPHI/CIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved AHAP(s), especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation. The operational systems for respiratory protection and the negative pressure system shall be demonstrated for proper performance.
  - 3. The CPHI/CIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.
  - 4. Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification and all applicable regulations.

C. Pre-Abatement Inspections and Preparations:

Before any work begins on the construction of the regulated area, the Contractor will:

1. Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.
2. The VA Representative, the Contractor, and the VPIH/CIH must be aware of VA A/E Quality Alert 07/09 indicating the failure to identify asbestos in the areas listed as well as common issues when preparing specifications and contract documents. This is especially critical when demolition is planned, because AHERA surveys are non-destructive, and ACM may remain undetected. A NESHAPS (destructive) ACM inspection should be conducted on all building structures that will be demolished. Ensure the following areas are inspected on the project: lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside utility chases/walls; transite piping/ductwork/sheets; behind radiators; lab fume hoods; transite lab countertops; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawlspaces (previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior insulated wall panels; on underground fuel tanks; and steam line trench coverings.
3. Ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects required to be removed from the regulated area have been cleaned and removed or properly protected from contamination.
4. If present and required, remove and dispose of carpeting from floors in the regulated area.
5. Inspect existing firestopping in the regulated area. Correct as needed.

### **3.2 REMOVAL OF ACM**

#### **3.2.1 WETTING ACM**

- A. Use amended water for the wetting of ACM prior to removal. The Competent Person shall assure the wetting of ACM meets the definition of "adequately wet" in the EPA NESHAP regulation and OSHA's "wet methods" for the duration of the project. A removal encapsulant may be used instead of amended water with written approval of the VA's representative.
- B. Amended Water: Provide water to which a surfactant has been added shall be used to wet the ACM and reduce the potential for fiber release during disturbance of ACM. The mixture must be equal to or greater than the wetting provided by water amended by a surfactant consisting one ounce of 50% polyoxyethylene ester and 50% polyoxyethylene ether mixed with 19 L (5 gallons) of water.
- C. Removal Encapsulant: When authorized by VA, provide a penetrating encapsulant designed specifically for the removal of ACM. The material must, when used, result in adequate wetting of the ACM and retard fiber release during removal.

#### **3.2.2 SECONDARY BARRIER AND WALKWAYS**

- A. Install as a drop cloth a 0.15 mm (6-mil) poly sheet at the beginning of each work shift where removal is to be done during that shift. Completely cover non affected floors and any walls within 3 m (10 feet) of the area where work is to be done. Secure the secondary barrier with duct tape to prevent it from moving or debris from getting behind it. Remove the secondary barrier at the end of the shift or as work in the area is completed. Keep residue on the secondary barrier wetted. When removing, fold inward to prevent spillage and place in a disposal bag.
- B. Install walkways using 0.15 mm (6-mil) black poly between the regulated area and the decontamination facilities (PDF and W/EDF) to protect the primary layers from contamination and damage. Install the walkways at the beginning of each shift and remove at the end of each shift.

### 3.2.3 WET REMOVAL OF ACM

- A. Adequately and thoroughly wet the ACM to be removed prior to removal with amended water or when authorized by VA, removal encapsulant to reduce/prevent fiber release to the air. Adequate time (at a minimum two hours) must be allowed for the amended water or removal encapsulant to saturate the ACM. Abatement personnel must not disturb dry ACM. Use a fine spray of amended water or removal encapsulant. Saturate the material sufficiently to wet to the substrate without causing excessive dripping. The material must be sprayed repeatedly/continuously during the removal process in order to maintain adequately wet conditions. Removal encapsulants must be applied in accordance with the manufacturer's written instructions. Perforate or carefully separate, using wet methods, an outer covering that is painted or jacketed in order to allow penetration and wetting of the material. Where necessary, carefully remove covering while wetting to minimize fiber release. **In no event shall dry removal occur except when authorized in writing by the VPIH/CIH and VA when a greater safety hazard (e.g., electricity) is present.**
- B. If ACM does not wet well with amended water due to composition, coating or jacketing, remove as follows:
  1. Mist work area continuously with amended water whenever necessary to reduce airborne fiber levels.
  2. Remove saturated ACM in small sections. Do not allow material to dry out. As material is removed, bag material, while still wet into disposal bags. Twist the bag neck tightly, bend over (gooseneck) and seal with a minimum of three tight wraps of duct tape. Clean /decontaminate the outside of the bag of any residue and move to washdown station adjacent to W/EDF.
  3. Fireproofing or Architectural Finish on Scratch Coat: Spray with a fine mist of amended water or removal encapsulant. Allow time for saturation to the substrate. Do not over saturate causing excess dripping. Scrape material from substrate. Remove material in manageable quantities and control falling to staging or floor. If the falling distance is over 6 m (20 feet), use a drop chute to contain material through descent. Remove residue remaining on the scratch coat after scraping is done using a stiff bristle hand brush. If a removal encapsulant is used, remove residue completely before the encapsulant dries. Periodically re-wet the substrate with amended water as needed to prevent drying of the material before the residue is removed from the substrate.
  4. Fireproofing or Architectural Finish on Wire Lath: Spray with a fine mist of amended water or removal encapsulant. Allow time to completely saturate the material. Do not over saturate causing excess dripping. If the surface has been painted or otherwise coated, cut small holes as needed and apply amended water or removal encapsulant from above. Cut saturated wire lath into 600 x 1800 mm (2 x 6 feet) sections and cut hanger wires. Roll up complete with ACM, cover in burlap and hand place in disposal bag. Do not drop to floor. After removal of lath/ACM, remove any overspray on decking and structure using stiff bristle nylon brushes. Depending on hardness of overspray, scrapers may be needed for removal.
  5. Pipe/Tank/Vessel/Boiler Insulation: Remove the outer layer of wrap while spraying with amended water in order to saturate the ACM. Spray ACM with a fine mist of amended water or removal encapsulant. Allow time to saturate the material to the substrate. Cut bands holding pre-formed pipe insulation sections. Slit jacketing at the seams, remove and hand place in a disposal bag. Do not allow dropping to the floor. Remove molded fitting insulation/mud in large pieces and hand place in a disposal bag. Remove any residue on pipe or fitting with a stiff bristle nylon brush. In locations where pipe fitting insulation is removed from fibrous glass or other non-asbestos insulated straight runs of pipe, remove fibrous material at least 150 mm (6 inches) from the point it contacts the ACM.

### **3.2.4 WET REMOVAL OF AMOSITE**

- A. The following areas shown on drawings indicate locations of ACM which will require local exhaust ventilation and collection as described below, in addition to wet removal. Provide specific description /locations/ drawings.
- B. Provide local exhaust ventilation and collection systems to assure collection of amosite fibers at the point of generation. A 300 mm (12 inches) flexible rigid non-collapsing duct shall be located no more than 600 mm (2 feet) from any scraping/brushing activity. Primary filters must be replaced every 30 minutes on the negative air machines. Each scraping/brushing activity must have a negative air machine devoted to it. For pre-molded pipe insulation or cutting wire lathe attach a 1200 mm (4 feet) square flared end piece on the intake of the duct. Support the duct horizontally at a point 600 mm (2 feet) below the work to effect capture. One person in the crew shall be assigned to operate the duct collection system on a continual basis.
- C. Amosite does not wet well with amended water. Submit full information/documentation on the wetting agent proposed prior to start for review and approval by the VPIH/CIH and VA Contracting Officer. Insure that the material is worked on in small sections and is thoroughly and continuously wetted. Package as soon as possible while wet. Remove as required.

### **3.2.5 REMOVAL OF ACM/DIRT FLOORS AND OTHER SPECIAL PROCEDURES**

- A. For assumed ACM of newly discovered materials not listed within the asbestos survey report dated 10/24/12 for the stairwell project located at the VA Loma Linda Healthcare System, the CPIH shall develop and submit a procedure for review and approval as it relates to the removal of such materials. Local exhaust, contiguous monitoring, misting and careful work practices must be listed and followed within the proposed procedure.
- B. Crawlspace/Pipe Tunnels: When working in crawlspaces or pipe tunnels, remove all visible asbestos debris using wet methods (if possible) after set-up of PDF, W/EDF, and after establishing negative air systems as required. Perform work and decontaminate/clean-up; perform lockdown as needed and complete work as required in these specifications.

## **3.3 LOCKDOWN ENCAPSULATION**

### **3.3.1 GENERAL**

- A. Lockdown encapsulation is an integral part of the ACM removal. At the conclusion of ACM removal and before removal of the primary barriers, the Contractor shall encapsulate all surfaces with a bridging encapsulant.

### **3.3.2 DELIVERY AND STORAGE**

- A. Deliver materials to the job site in original, new and unopened containers bearing the manufacturer's name and label as well as the following information: name of material, manufacturer's stock number, date of manufacture, thinning instructions, application instructions and the MSDS for the material.

### **3.3.3 WORKER PROTECTION**

- A. Before beginning work with any material for which an MSDS has been submitted, provide workers with any required personal protective equipment. The required personal protective equipment shall be used whenever exposure to the material might occur. In addition to OSHA/specification requirements for respiratory protection, a paint pre-filter and an organic vapor cartridge, at a minimum, shall be used in addition to the HEPA filter when an organic solvent based encapsulant is used. The CPIH/CIH shall be responsible for provision of adequate respiratory protection. Note: Flammable and combustible encapsulants shall not be used, unless authorized in writing by the VA.



### **3.3.4 ENCAPSULATION OF SCRATCH COAT PLASTER OR PIPING**

- A. Apply two coats of lockdown encapsulant to the scratch coat plaster or piping after all ACM has been removed. Apply in strict accordance with the manufacturer's instructions. Any deviation from the instructions must be approved by the VA's representative in writing prior to commencing the work.
- B. Apply the lockdown encapsulant with an airless sprayer at a pressure and using a nozzle orifice as recommended by the manufacturer. Apply the first coat while the scratch coat is still damp from the asbestos removal process, after passing the visual inspection. If the surface has been allowed to dry, wet wipe or HEPA vacuum prior to spraying with encapsulant. Apply a second coat over the first coat in strict conformance with the manufacturer's instructions. Color the lockdown encapsulant and contrast the color in the second coat so that visual confirmation of completeness and uniform coverage of each coat is possible. Adhere to the manufacturer's instructions for coloring. At the completion of the encapsulation, the surface must be a uniform third color produced by the mixture.

### **3.3.5 SEALING EXPOSED EDGES**

- A. Seal edges of ACM exposed by removal work which is inaccessible, such as a sleeve, wall penetration, etc., with two coats of bridging encapsulant. Prior to sealing, permit the exposed edges to dry completely to permit penetration of the bridging encapsulant. Apply in accordance with 3.3.4 (B).

## **3.4 DISPOSAL OF ACM WASTE MATERIALS**

### **3.4.1 GENERAL**

- A. Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 100-185 regulations. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

### **3.4.2 PROCEDURES**

- A. The VA must be notified at least 24 hours in advance of any waste removed from the containment.
- B. Asbestos waste shall be packaged and moved through the W/EDF into a covered transport container in accordance with procedures in this specification. Waste shall be double-bagged and wetted with amended water prior to disposal. Wetted waste can be very heavy. Bags shall not be overfilled. Bags shall be securely sealed to prevent accidental opening and/or leakage. The top shall be tightly twisted and goose necked prior to tightly sealing with at least three wraps of duct tape. Ensure that unauthorized persons do not have access to the waste material once it is outside the regulated area. All transport containers must be covered at all times when not in use. NESHAP signs must be on containers during loading and unloading. Material shall not be transported in open vehicles. If drums are used for packaging, the drums shall be labeled properly and shall not be re-used.
- C. Waste Load Out: Waste load out shall be done in accordance with the procedures in W/EDF Decontamination Procedures. Sealed waste bags shall be decontaminated on exterior surfaces by wet cleaning and/or HEPA vacuuming before being placed in the second waste bag and sealed, which then must also be wet wiped or HEPA vacuumed.
- D. Asbestos waste with sharp edged components, i.e., nails, screws, lath, strapping, tin sheeting, jacketing, metal mesh, etc., which might tear poly bags shall be wrapped securely in burlap before packaging and, if needed, use a poly lined fiber drum as the second container, prior to disposal.

### **3.5 PROJECT DECONTAMINATION**

#### **3.5.1 GENERAL**

- A. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH/CIH.
- B. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.
- C. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

#### **3.5.2 REGULATED AREA CLEARANCE**

- A. Clearance air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

#### **3.5.3 WORK DESCRIPTION**

- A. Decontamination includes the clearance air testing in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities, and negative pressure systems.

#### **3.5.4 PRE-DECONTAMINATION CONDITIONS**

- A. Before decontamination starts, all ACM waste from the regulated area shall be collected and removed, and the loose 0.15 mm (6-mil) layer of poly removed while being adequately wetted with amended water and disposed of along with any gross debris generated by the work.
- B. At the start of decontamination, the following shall be in place:
  - 1. Primary barriers consisting of 2 layers of 0.15 mm (6-mil) poly on the floor and 0.1 mm (4-mil) poly on the walls.
  - 2. Critical barriers consisting of 2 layers of 0.15 mm (6-mil) poly which is the sole barrier between the regulated area and openings to the rest of the building or outside.
  - 3. Decontamination facilities for personnel and equipment in operating condition and the negative pressure system in operation.

#### **3.5.5 FIRST CLEANING**

- A. Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, and ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping/air blowing methods. Use each surface of a wetted cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. Additional cleaning(s) may be needed as determined by the CPIH/VPIH/CIH.

#### **3.5.6 PRE-CLEARANCE INSPECTION AND TESTING**

- A. Any on-site technician, industrial hygienist, certified industrial hygienist conducting any on-site monitoring, inspections, air sampling, and testing shall be certified through the State of California Division of Occupational Safety and Health (DOSH) as a Certified Asbestos Consultant (CAC) or

a Site Surveillance Technician (SST) performing only approved activities under the direction of a CAC.

- B. The CPIH/CIH and VPIH/CIH will perform a thorough and detailed visual inspection at the end of the cleaning to determine whether there is any visible residue in the regulated area. If the visual inspection is acceptable, the CPIH/CIH will perform pre-clearance sampling using aggressive clearance as detailed in 40 CFR 763 Subpart E (ASHERA) Appendix A (III)(B)(7)(d). If the sampling results show values below 0.01 f/cc, then the Contractor shall notify the VA's representative of the results with a brief report from the CPIH/CIH documenting the inspection and sampling results and a statement verifying that the regulated area is ready for lockdown encapsulation. The VA reserves the right to utilize their own VPIH/CIH to perform a pre-clearance inspection and testing for verification.

### **3.5.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES**

- A. With the express written permission of the VA's representative, perform lockdown encapsulation of all surfaces from which asbestos was abated in accordance with the procedures in this specification. Negative pressure shall be maintained in the regulated area during the lockdown application.

## **3.6 FINAL VISUAL INSPECTION AND AIR CLEARANCE TESTING**

### **3.6.1 GENERAL**

- A. Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH starting after the final cleaning.

### **3.6.2 FINAL VISUAL INSPECTION**

- A. Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no cost to the VA. Dust/material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

### **3.6.3 FINAL AIR CLEARANCE TESTING**

- A. After an acceptable final visual inspection by the VPIH/CIH and VA Representative, the VPIH/CIH will perform the final clearance testing. Air samples will be collected and analyzed in accordance with procedures for ASHERA in this specification. If work is less than 80 m/ 15 m<sup>2</sup>/ 1 m<sup>3</sup> (260 lf/ 160 ft<sup>2</sup>/ 35 ft<sup>3</sup>), 5 PCM samples shall be collected for clearance and a minimum of one field blank. If work is equal to or more than 80 m/ 15 m<sup>2</sup>/ 1 m<sup>3</sup> (260 lf/ 160 ft<sup>2</sup>/ 35 ft<sup>3</sup>), ASHERA TEM sampling shall be performed for clearance. TEM analysis shall be done in accordance with procedures for EPA ASHERA in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures until clearance is achieved. **All additional inspection and testing costs will be borne by the Contractor.**
- B. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

### **3.6.4 FINAL AIR CLEARANCE PROCEDURES**

- A. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to be at or below 0.01 f/cc as measured by the ASHERA PCM protocol, or 70 ASHERA structures per square millimeter (s/mm<sup>2</sup>) by ASHERA TEM.



- B. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:
1. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method or asbestos fibers counted using the AHERA TEM method.
  2. Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques. Samples will be collected on 0.8 $\mu$  MCE filters for PCM analysis and 0.45 $\mu$  Polycarbonate filters for TEM. A minimum of 1200 Liters of using calibrated pumps shall be collected for clearance samples. Before pumps are started, initiate aggressive air mixing sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). Air samples will be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off. The negative pressure system shall continue to operate.

### **3.6.5 CLEARANCE SAMPLING USING PCM – LESS THAN 260LF/160SF:**

- A. The VPIH/CIH will perform clearance samples as indicated by the specification.
- B. The NIOSH 7400 PCM method will be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 5 PCM clearance samples shall be collected. All samples must measure at or less than 0.01 f/cc to clear the regulated area.

### **3.6.6 CLEARANCE SAMPLING USING TEM – EQUAL TO OR MORE THAN 260LF/160SF: TEM**

- A. Clearance requires 13 samples be collected; 5 inside the regulated area; 5 outside the regulated area; and 3 field blanks.
- B. The TEM method will be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 13 clearance samples shall be collected. All samples must measure at equal to or less than 70 AHERA structures per square millimeter (s/mm<sup>2</sup>) AHERA TEM.

### **3.6.7 LABORATORY TESTING OF PCM CLEARANCE SAMPLES**

- A. The services of an AIHA accredited laboratory will be employed by the VA to perform analysis for the PCM air samples. The accredited laboratory shall be successfully participating in the AIHA Proficiency Analytical Testing (PAT) program. Samples will be sent daily by the VPIH/CIH so that verbal/faxed reports can be received within 24 hours. A complete record, certified by the laboratory, of all air monitoring tests and results will be furnished to the VA's representative and the Contractor.

### **3.6.8 LABORATORY TESTING OF TEM SAMPLES**

- A. Samples shall be sent by the VPIH/CIH to a NIST accredited laboratory for analysis by TEM. The laboratory shall be successfully participating in the NIST Airborne Asbestos Analysis (TEM) program. Verbal/faxed results from the laboratory shall be available within 24 hours after receipt of the samples. A complete record, certified by the laboratory, of all TEM results shall be furnished to the VA's representative and the Contractor.

### **3.6.9 LABORATORY TESTING OF BULK SAMPLES**

- A. Samples shall be sent by the VPIH/CIH or CPIH/CIH to a NIST accredited laboratory for analysis by PLM. The laboratory shall be successfully participating in the NIST Bulk Asbestos Analysis (PLM) program. Verbal/faxed results from the laboratory shall be available within 24 hours after

receipt of the samples. A complete record, certified by the laboratory, of all TEM results shall be furnished to the VA's representative and the Contractor.

### **3.7 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE**

#### **3.7.1 COMPLETION OF ABATEMENT WORK**

- A. After thorough decontamination, seal negative air machines with 2 layers of 0.15 mm (6-mil) poly and duct tape to form a tight seal at the intake/outlet ends before removal from the regulated area. Complete asbestos abatement work upon meeting the regulated area visual and air clearance criteria and fulfilling the following:
  - 1. Remove all equipment and materials from the project area.
  - 2. Dispose of all packaged ACM waste as required.
  - 3. Repair or replace all interior finishes damaged during the abatement work, as required.
  - 4. Fulfill other project closeout requirements as required in this specification.

#### **3.7.2 CERTIFICATE OF COMPLETION BY CONTRACTOR**

- A. The CPIH/CIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

#### **3.7.3 WORK SHIFTS**

- A. All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday-Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

#### **3.7.4 RE-INSULATION**

- A. If required as part of the contract, replace all asbestos containing insulation/fire-proofing with suitable non-asbestos material. Provide MSDS's for all replacement materials in advance of installation for VA approval. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.

--- END ---

**ATTACHMENT #1**

**CERTIFICATE OF COMPLETION**

DATE: \_\_\_\_\_ VA Project #: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_ Abatement Contractor: \_\_\_\_\_

VAMC/ADDRESS: \_\_\_\_\_

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):  
which took place from     /     /     to     /     /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That all abatement work was done in accordance with OSHA requirements and the manufacturer's recommendations.

CPIH/CIH Signature/Date: \_\_\_\_\_

CPIH/CIH Print Name: \_\_\_\_\_

Abatement Contractor Signature/Date: \_\_\_\_\_

Abatement Contractor Print Name: \_\_\_\_\_

**ATTACHMENT #2**

**CERTIFICATE OF WORKER'S ACKNOWLEDGMENT**

PROJECT NAME: \_\_\_\_\_ DATE: \_\_\_\_\_

PROJECT ADDRESS: \_\_\_\_\_

ABATEMENT CONTRACTOR'S NAME: \_\_\_\_\_

**WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS, YOUR CHANCES OF DEVELOPING LUNG CANCER ARE GREATER THAN THAT OF THE NON-SMOKING PUBLIC.**

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

**RESPIRATORY PROTECTION:** I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

**TRAINING COURSE:** I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards
- Medical Monitoring
- Air Monitoring
- Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
- Asbestos Waste Disposal

**MEDICAL EXAMINATION:** I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature: \_\_\_\_\_

Printed Name: \_\_\_\_\_

Social Security Number: \_\_\_\_\_

Witness: \_\_\_\_\_

**ATTACHMENT #3**

**AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION, AND TRAINING/ACCREDITATION**

VA PROJECT NAME AND NUMBER: \_\_\_\_\_

VA MEDICAL FACILITY: \_\_\_\_\_

ABATEMENT CONTRACTOR'S NAME AND ADDRESS: \_\_\_\_\_

1. I verify that the following individual

Name: \_\_\_\_\_ Social Security Number: \_\_\_\_\_

who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m)(n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

Address: \_\_\_\_\_

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.
3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.
4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH/CIH: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name of CPIH/CIH: \_\_\_\_\_

Signature of Contractor: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name of Contractor: \_\_\_\_\_

**ATTACHMENT #4**

**ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S  
ASBESTOS SPECIFICATIONS**

VA Project Location: \_\_\_\_\_

VA Project #: \_\_\_\_\_

VA Project Description: \_\_\_\_\_

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has (have) not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature \_\_\_\_\_ Date \_\_\_\_\_

Abatement Contractor Competent Person(s) \_\_\_\_\_ Date \_\_\_\_\_

**SECTION 02 83 33.13**  
**LEAD-BASED PAINT REMOVAL AND DISPOSAL**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies abatement and disposal of lead-based paint (LBP) and controls needed to limit occupational and environmental exposure to lead hazards.

**1.2 RELATED WORK**

- A. Section 02 82 11, TRADITIONAL ASBESTOS ABATEMENT
- B. Section 02 41 00, DEMOLITION
- C. Section 09 91 00, PAINTING

**1.3 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.
- B. Code of Federal Regulations (CFR):
  - CFR 29 Part 1910.....Occupational Safety and Health Standards
    - CFR 29 Part 1910.134.....Respiratory protection
    - CFR 29 Part 1910.1020.....Access to employee exposure and medical records
    - CFR 29 Part 1910.1025.....Lead
    - CFR 29 Part 1910.1200.....Hazard communication
  - CFR 29 Part 1926.....Safety and Health Regulations for Construction
    - CFR 29 Part 1926.57 ..... Ventilation
    - CFR 29 Part 1926.62 ..... Safety and Health Regulations for Construction
  - CFR 40 Part 260 .....Hazardous Waste Management System: General
  - CFR 40 Part 261 .....Identification and Listing of Hazardous Waste
  - CFR 40 Part 262 .....Standards Applicable to Generators of Hazardous Waste
  - CFR 40 Part 263 .....Standards Applicable to Transporters of Hazardous Waste
  - CFR 40 Part 264 .....Standards for Owners and Operations of Hazardous Waste Treatment, Storage, and Disposal Facilities
  - CFR 40 Part 265 .....Interim Status Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities
  - CFR 40 Part 268 .....Land Disposal Restrictions
  - CFR 49 Part 172 .....Hazardous Material Table, Special Provisions, Hazardous Material Communications, Emergency Response Information, and Training Requirements
  - CFR 49 Part 178 .....Specifications for Packaging



- C. National Fire Protection Association (NFPA):  
NFPA 701-2004.....Methods of Fire Test for Flame-Resistant Textiles and Films
- D. National Institute for Occupational Safety and Health (NIOSH)  
NIOSH OSHA Booklet 3142.....Lead in Construction
- E. Underwriters Laboratories (UL)  
UL 586-1996 (Rev 2009).....High-Efficiency, Particulate, Air Filter Units
- F. American National Standards Institute  
Z9.2-2012.....Fundamentals Governing the Design and Operation of Local  
Exhaust Systems  
Z88.6-2006.....Respiratory Protection

#### 1.4 DEFINITIONS

- A. Action Level: Employee exposure, without regard to use of respirations, to an airborne concentration of lead of 30 micrograms per cubic meter of air averaged over an 8-hour period. As used in this section, "30 micrograms per cubic meter of air" refers to the action level.
- B. Area Monitoring: Sampling of lead concentrations within the lead control area and inside the physical boundaries which is representative of the airborne lead concentrations which may reach the breathing zone of personnel potentially exposed to lead.
- C. Physical Boundary: Area physically roped or partitioned off around an enclosed lead control area to limit unauthorized entry of personnel. As used in this section, "inside boundary" shall mean the same as "outside lead control area."
- D. Certified Industrial Hygienist (CIH): As used in this section, refers to an Industrial Hygienist employed by the Contractor and is certified by the American Board of Industrial Hygiene in comprehensive practice.
- E. Change Rooms and Shower Facilities: Rooms within the designated physical boundary around the lead control area equipped with separate storage facilities for clean protective work clothing and equipment and for street clothes which prevent cross- contamination.
- F. Competent Person: A person capable of identifying lead hazards in the work area and is authorized by the contractor to take corrective action.
- G. Decontamination Room: Room for removal of contaminated personal protective equipment (PPE).
- H. Eight-Hour Time Weighted Average (TWA): Airborne concentration of lead averaged over an 8-hour workday to which an employee is exposed.
- I. High Efficiency Particulate Air (HEPA) Filter Equipment: HEPA filtered vacuuming equipment with a UL 586 filter system capable of collecting and retaining lead-contaminated paint dust. A high efficiency particulate filter means 99.97 percent efficient against 0.3 micron size particles.
- J. Lead: Metallic lead, inorganic lead compounds, and organic lead soaps. Excluded from this definition are other organic lead compounds.

- K. Lead Control Area: An enclosed area or structure with full containment to prevent the spread of lead dust, paint chips, or debris of lead-containing paint removal operations. The lead control area is isolated by physical boundaries to prevent unauthorized entry of personnel.
- L. Lead Permissible Exposure Limit (PEL): Fifty micrograms per cubic meter of air as an 8-hour time weighted average as determined by 29 CFR 1910.1025. If an employee is exposed for more than 8 hours in a work day, the PEL shall be determined by the following formula:  $PEL = \frac{400}{\text{No. of hours worked per day}}$  (micrograms/cubic meter of air)
- M. Personnel Monitoring: Sampling of lead concentrations within the breathing zone of an employee to determine the 8-hour time weighted average concentration in accordance with 29 CFR 1910.1025. Samples shall be representative of the employee's work tasks. Breathing zone shall be considered an area within a hemisphere, forward of the shoulders, with a radius of 150 mm to 225 mm (6 to 9 inches) and the center at the nose or mouth of an employee.

### **1.5 QUALITY ASSURANCE**

- A. Before exposure to lead-contaminated dust, provide workers with a comprehensive medical examination as required by 29 CFR 1926.62 (I) (1) (i) & (ii). The examination shall not be required if adequate records show that employees have been examined as required by 29 CFR 1926.62(I) without the last year.
- B. Medical Records: Maintain complete and accurate medical records of employees in accordance with 29 CFR 1910.1020.
- C. CIH Responsibilities: The Contractor shall employ a certified Industrial Hygienist who will be responsible for the following:
  - 1. Certify Training.
  - 2. Review and approve lead-containing paint removal plan for conformance to the applicable referenced standards.
  - 3. Inspect lead-containing paint removal work for conformance with the approved plan.
  - 4. Direct monitoring.
  - 5. Ensure work is performed in strict accordance with specifications at all times.
  - 6. Ensure hazardous exposure to personnel and to the environment are adequately controlled at all times.
- D. Training: Train each employee performing paint removal, disposal, and air sampling operations prior to the time of initial job assignment, in accordance with 29 CFR 1926.62.
- E. Training Certification: Submit certificates signed and dated by the CIH and by each employee stating that the employee has received training.
- F. Respiratory Protection Program:

1. Furnish each employee required to wear a negative pressure respirator or other appropriate type with a respirator fit test at the time of initial fitting and at least every 6 months thereafter as required by 29 CFR 1926.62.
  2. Establish and implement a respiratory protection program as required by 29 CFR 1910.134, 29 CFR 1910.1025, and 29 CFR 1926.62.
- G. Hazard Communication Program: Establish and implement a Hazard Communication Program as required by 29 CFR 1910.1200.
- H. Hazardous Waste Management: The Hazardous Waste Management plan shall comply with applicable requirements of federal, state, and local hazardous waste regulations and address:
1. Identification of hazardous wastes associated with the work.
  2. Estimated quantities of wastes to be generated and disposed of.
  3. Names and qualifications of each contractor that will be transporting, storing, treating, and disposing of the wastes. Include the facility location and a 24 hour point of contact. Furnish two copies of EPA, state, and local permits, and EPA Identification numbers.
  4. Names and qualifications (experience and training) of personnel who will be working on-site with hazardous wastes.
  5. List of waste handling equipment to be used in performing the work, to include cleaning, volume reduction, and transport equipment.
  6. Spill prevention, containment, and cleanup contingency measures to be implemented.
  7. Work plan and schedule for waste containment, removal and disposal. Wastes shall be cleaned up and containerized daily.
  8. Cost for hazardous waste disposal according to this plan.
- I. Safety and Health Compliance:
1. In addition to the detailed requirements of this specification, comply with laws, ordinances, rules, and regulations of federal, state, and local authorities regarding removing, handling, storing, transporting, and disposing of lead waste materials. Comply with the applicable requirements of the current issue of 29 CFR 1910.1025. Submit matters regarding interpretation of standards to the Contracting Officer for resolution before starting work.
  2. Where specification requirements and the referenced documents vary, the most stringent requirements shall apply.
  3. Contractor to follow but not be limited to the following standards and agencies concerning lead paint. Comply with the following local laws, ordinances, criteria, rules and regulations regarding removing, handling, storing, transporting, and disposing of lead-contaminated materials where more restrictive than federal regulations and as applicable:
    - a. Title X

- b. Title 17, California Code of Regulations, Division 1, Chapter 8: Accreditation, Certification and Work Practices for Lead-Based Paint and Lead Hazards
  - c. Senate Bill 460
  - d. Title 8, California Code of Regulations, Section 1532.1, Cal/OSHA Lead in Construction Standard
  - e. HUD "Requirements for Notification, Evaluation, and Reduction of LBP Hazards in Federally Owned Residential Property and Housing Receiving Federal Assistance"
  - f. The Lead-Based Paint Pre-Renovation Education Rule
  - g. City of Loma Linda
  - h. State of California
- J. Pre-Construction Conference: Along with the CIH, meet with the Contracting Officer to discuss in detail the lead-containing paint removal work plan, including work procedures and precautions for the work plan.

#### **1.6 SUBMITTALS**

- A. Submit the following in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Catalog Data:
  - Vacuum filters
  - Respirators
- C. Instructions: Paint removal materials. Include applicable material safety data sheets.
- D. Statements Certifications and Statements:
  - 1. Qualifications of CIH: Submit name, address, and telephone number of the CIH selected to perform responsibilities in paragraph entitled "CIH Responsibilities." Provide previous experience of the CIH. Submit proper documentation that the Industrial Hygienist is certified by the American Board of Industrial Hygiene in comprehensive practice, including certification number and date of certification/recertification.
  - 2. Testing Laboratory: Submit the name, address, and telephone number of the testing laboratory selected to perform the monitoring, testing, and reporting of airborne concentrations of lead. Provide proper documentation that persons performing the analysis have been judged proficient by successful participation within the last year in the National Institute for Occupational Safety and Health (NIOSH) Proficiency Analytical Testing (PAT) Program. The laboratory shall be accredited by the American Industrial Hygiene Association (AIHA). Provide AIHA documentation along with date of accreditation/reaccreditation.
  - 3. Lead-Containing Paint Removal Plan:
    - a. Submit a detailed job-specific plan of the work procedures to be used in the removal of lead-containing paint. The plan shall include a sketch showing the location, size, and

details of lead control areas, location and details of decontamination rooms, change rooms, shower facilities, and mechanical ventilation system.

- b. Include in the plan, eating, drinking, smoking and restroom procedures, interface of trades, sequencing of lead related work, collected wastewater and paint debris disposal plan, air sampling plan, respirators, protective equipment, and a detailed description of the method of containment of the operation to ensure that airborne lead concentrations of 30 micrograms per cubic meter of air are not exceeded outside of the lead control area.
  - c. Include air sampling, training and strategy, sampling methodology, frequency, duration of sampling, and qualifications of air monitoring personnel in the air sampling portion on the plan.
4. Field Test Reports: Monitoring Results: Submit monitoring results to the Contracting Officer within 3 working days, signed by the testing laboratory employee performing the air monitoring, the employee that analyzed the sample, and the CIH.
  5. Records:
    - a. Completed and signed hazardous waste manifest from treatment or disposal facility.
    - b. Certification of Medical Examinations
    - c. Employee training certification

## **PART 2 PRODUCTS**

**PAINT REMOVAL PRODUCTS:** Submit applicable Material Safety Data Sheets for paint removal products used in paint removal work. Use the least toxic product, suitable for the job and acceptable to the Industrial Hygienist.

## **PART 3 EXECUTION**

### **3.1 PROTECTION**

- A. Notification: Notify the Contracting Officer 20 days prior to the start of any paint removal work. Contractor is to file CDPH Form 8551 and post the form five (5) days prior to the start of lead paint activities.
- B. Lead Control Area Requirements:
  1. Establish a lead control area by completely enclosing with containment screens where lead-containing paint removal operations will be performed.
  2. The following is a list of lead materials as identified within the lead paint survey report dated March 26, 2014, for the VA Loma Linda Medical Center, 11201 Benton Street, Loma Linda, CA., as identified and completed by L. Y. Environmental, Inc.  
The removal, cleanup, and disposal of the lead glazed ceramic tiles listed below located within the subject project: Renovate Three Stairwells, VA Loma Linda Medical Center:
    - a. Interior Stair Handrails
    - b. Interior Stair Stringers (along walls)

3. Contain removal operations by the use of a negative pressure full containment system with at least one change room and with HEPA filtered exhaust.
- C. Protection of Existing Work to Remain: Perform paint removal work without damage or contamination of adjacent areas. Where existing work is damaged or contaminated, restore work to its original condition.
- D. Boundary Requirements: Provide physical boundaries around the lead control area by roping off the area [designated on the drawings] or providing curtains, portable partitions or other enclosures to ensure that airborne concentrations of lead will not reach 30 micrograms per cubic meter of air outside of the lead control area.
- E. Heating, Ventilating and Air Conditioning (HVAC) Systems: Shut down, lock out, and isolate HVAC systems that supply, exhaust, or pass through the lead control areas. Seal intake and exhaust vents in the lead control area with 6 mil plastic sheet and tape. Seal seams in HVAC components that pass through the lead control area.
- F. Change Room and Shower Facilities: Provide clean change rooms and shower facilities within the physical boundary around the designated lead control area in accordance with requirements of 29 CFR 1926.62.
- G. Mechanical Ventilation System:
  1. Use adequate ventilation to control personnel exposure to lead in accordance with 29 CFR 1926.57.
  2. To the extent feasible, use fixed local exhaust ventilation connected to HEPA filters or other collection systems, approved by the industrial hygienist. Local exhaust ventilation systems shall be designed, constructed, installed, and maintained in accordance with ANSI Z9.2.
  3. If air from exhaust ventilation is recirculated into the work place, the system shall have a high efficiency filter with reliable back-up filter and controls to monitor the concentration of lead in the return air and to bypass the recirculation system automatically if it fails. Air may be recirculated only where exhaust to the outside is not feasible.
- H. Personnel Protection: Personnel shall wear and use protective clothing and equipment as specified herein. Eating, smoking, or drinking is not permitted in the lead control area. No one will be permitted in the lead control area unless they have been given appropriate training and protective equipment.
- I. Warning Signs: Provide warning signs at approaches to lead control areas. Locate signs at such a distance that personnel may read the sign and take the necessary precautions before entering the area. Signs shall comply with the requirements of 29 CFR 1926.62.

### **3.2 WORK PROCEDURES**

- A. Perform removal of lead-containing paint in accordance with approved lead-containing paint removal plan. Use procedures and equipment required to limit occupational and environmental

exposure to lead when lead- containing paint is removed in accordance with 29 CFR 1926.62, except as specified herein. Dispose of removed paint chips and associated waste in compliance with Environmental Protection Agency (EPA), federal, state, and local requirements.

B. Personnel Exiting Procedures:

1. Whenever personnel exit the lead-controlled area, they shall perform the following procedures and shall not leave the work place wearing any clothing or equipment worn during the work day:
  - a. Vacuum themselves off.
  - b. Remove protective clothing in the decontamination room, and place them in an approved impermeable disposal bag.
  - c. Shower.
  - d. Change to clean clothes prior to leaving the physical boundary designated around the lead-contaminated job site.

C. Monitoring: Monitoring of airborne concentrations of lead shall be in accordance with 29 CFR 1910.1025 and as specified herein. Air monitoring, testing, and reporting shall be performed by a CIH or an Industrial Hygiene (IH) Technician who is under the direction of the CIH:

1. The CIH or the IH Technician under the direction of the CIH shall be on the job site directing the monitoring, and inspecting the lead-containing paint removal work to ensure that the requirements of the Contract have been satisfied during the entire lead-containing paint removal operation.
2. Take personal air monitoring samples on employees who are anticipated to have the greatest risk of exposure as determined by the CIH. In addition, take air monitoring samples on at least 25 percent of the work crew or a minimum of two employees, whichever is greater, during each work shift.
3. Submit results of air monitoring samples, signed by the CIH, within 48 hours after the air samples are taken. Notify the Contracting Officer immediately of exposure to lead at or in excess of the action level of 30 micrograms per cubic meter of air outside of the lead control area.

D. Monitoring During Paint Removal Work:

1. Perform personal and area monitoring during the entire paint removal operation. Sufficient area monitoring shall be conducted at the physical boundary to ensure unprotected personnel are not exposed above 30 micrograms per cubic meter of air at all times. If the outside boundary lead levels are at or exceed 30 micrograms per cubic meter of air, work shall be stopped and the CIH shall immediately correct the condition(s) causing the increased levels and notify the Contracting Officer immediately.



2. The CIH shall review the sampling data collected on that day to determine if condition(s) requires any further change in work methods. Removal work shall resume when approval is given by the CIH. The Contractor shall control the lead level outside of the work boundary to less than 30 micrograms per cubic meter of air at all times. As a minimum, conduct area monitoring daily on each shift in which lead paint removal operations are performed in areas immediately adjacent to the lead control area.
3. For outdoor operations, at least one sample on each shift shall be taken on the downwind side of the lead control area. If adjacent areas are contaminated, clean and visually inspect contaminated areas. The CIH shall certify that the area has been cleaned of lead contamination.

### **3.3 LEAD-CONTAINING PAINT REMOVAL**

- A. Remove paint within the areas designated on the drawings in order to completely expose the substrate. Take whatever precautions are necessary to minimize damage to the underlying substrate.
- B. Indoor Lead Paint Removal: Select paint removal processes to minimize contamination of work areas with lead-contaminated dust or other lead-contaminated debris/waste. This paint removal process should be described in the lead-containing paint removal plan. Perform manual sanding and scraping to the maximum extent feasible.

### **3.4 CLEANUP AND DISPOSAL**

- A. Cleanup: Maintain surfaces of the lead control area free of accumulations of paint chips and dust. Restrict the spread of dust and debris; keep waste from being distributed over the work area. Do not dry sweep or use compressed air to clean up the area. At the end of each shift and when the paint removal operation has been completed, clean the area of visible lead paint contamination by vacuuming with a HEPA filtered vacuum cleaner and wet mopping the area.
- B. Certification: The CIH shall certify in writing that the inside and outside the lead control area air monitoring samples are less than 30 micrograms per cubic meter of air, the respiratory protection for the employees was adequate, the work procedures were performed in accordance with 29 CFR 1926.62, and that there were no visible accumulations of lead-contaminated paint and dust on the worksite. Do not remove the lead control area or roped-off boundary and warning signs prior to the Contracting Officer's receipt of the CIH's certification. Reclean areas showing dust or residual paint chips.
- C. Testing of Lead-Containing Paint Residue and Used Abrasive Where indicated or when directed by the Contracting Officer, test lead containing paint residue and used abrasive in accordance with 40 CFR 261 for hazardous waste.
- D. Disposal:

1. Collect lead-contaminated waste, scrap, debris, bags, containers, equipment, and lead-contaminated clothing, which may produce airborne concentrations of lead particles.
  2. Store removed paint, lead-contaminated clothing and equipment, and lead-contaminated dust and cleaning debris into U.S. Department of Transportation (49 CFR 178) approved 55-gallon drums. Properly label each drum to identify the type of waste (49 CFR 172) and the date lead-contaminated wastes were first put into the drum. Obtain and complete the Uniform Hazardous Waste Manifest forms from the project liaison representing the Owner (VA).  
Comply with land disposal restriction notification requirements as required by 40 CFR 268:
    - a. At least 14 days prior to delivery, notify the Contracting Officer who will arrange for job site inspection of the drums and manifests.
    - b. As necessary, make lot deliveries of hazardous wastes to the PWC Hazardous Waste Storage Facility to ensure that drums do not remain on the jobsite longer than 90 calendar days from the date affixed to each drum.
    - a. Collect lead-contaminated waste, scrap, debris, bags, containers, equipment, and lead-contaminated clothing which may produce airborne concentrations of lead particles. Label the containers in accordance with 29 CFR 1926.62. Dispose of lead-contaminated waste material at an EPA and state approved hazardous waste treatment, storage, or disposal facility off Government property.
    - b. Store waste materials in U.S. Department of Transportation (49 CFR 178) approved 55-gallon drums. Properly label each drum to identify the type of waste (49 CFR 172) and the date the drum was filled. The Contracting Officer or an authorized representative will assign an area for interim storage of waste-containing drums. Do not store hazardous waste drums in interim storage longer than 90 calendar days from the date affixed to each drum.
    - c. Handle, store, transport, and dispose lead or lead-contaminated waste in accordance with 40 CFR 260, 40 CFR 261, 40 CFR 262, 40 CFR 263, 40 CFR 264, and 40 CFR 265.  
Comply with land disposal restriction notification requirements as required by 40 CFR 268.
- E. Disposal Documentation: Submit written evidence that the hazardous waste treatment, storage, or disposal facility (TSD) is approved for lead disposal by the EPA and state or local regulatory agencies. Submit one copy of the completed manifest, signed and dated by the initial transporter in accordance with 40 CFR 262.

--- E N D ---

**SECTION 05 50 00  
METAL FABRICATIONS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies items and assemblies fabricated from structural steel shapes and other materials as shown and specified.
- B. Items specified.
  - 1. Support for Wall and Ceiling Mounted Items: (12, 14A, 14C)

**1.2 RELATED WORK**

- A. Railings attached to steel stairs: Section 05 51 00, METAL STAIRS
- B. Colors, finishes, and textures: Section 09 06 00, SCHEDULE FOR FINISHES
- C. Prime and finish painting: Section 09 91 00, PAINTING

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
  - 1. Each item specified, showing complete detail, location in the project, material and size of components, method of joining various components and assemblies, finish, and location, size and type of anchors.
  - 2. Mark items requiring field assembly for erection identification and furnish erection drawings and instructions.
  - 3. Provide templates and rough-in measurements as required.
- C. Manufacturer's Certificates:
  - 1. Live load designs as specified.
- D. Design Calculations for specified live loads including dead loads.
- E. Furnish setting drawings and instructions for installation of anchors to be preset into concrete and masonry work, and for the positioning of items having anchors to be built into concrete or masonry construction.

#### 1.4 QUALITY ASSURANCE

- A. Each manufactured product shall meet, as a minimum, the requirements specified, and shall be a standard commercial product of a manufacturer regularly presently manufacturing items of type specified.
- B. Each product type shall be the same and be made by the same manufacturer.
- C. Assembled product to the greatest extent possible before delivery to the site.
- D. Include additional features, which are not specifically prohibited by this specification, but which are a part of the manufacturer's standard commercial product.

#### 1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME):
  - B18.2.2-87(R2005)..... Square and Hex Nuts
- C. American Society for Testing and Materials (ASTM):
  - A36/A36M-08 ..... Structural Steel
  - A123-09..... Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
  - A307-10..... Carbon Steel Bolts and Studs, 60,000 PSI Tensile Strength
  - A653/A653M-10 ..... Steel Sheet, Zinc Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot-Dip Process
  - F436-10 ..... Hardened Steel Washers
  - F593-02(R2008) ..... Stainless Steel Bolts, Hex Cap Screws, and Studs
  - F1667-11 ..... Driven Fasteners: Nails, Spikes and Staples
- D. American Welding Society (AWS):
  - D1.1-10..... Structural Welding Code Steel
  - D1.3-08..... Structural Welding Code Sheet Steel
- E. National Association of Architectural Metal Manufacturers (NAAMM)
  - AMP 500-06 ..... Metal Finishes Manual
- F. Structural Steel Painting Council (SSPC)/Society of Protective Coatings:
  - SP 1-04 ..... No. 1, Solvent Cleaning

SP 2-04 ..... No. 2, Hand Tool Cleaning

SP 3-04 ..... No. 3, Power Tool Cleaning

## **PART 2 - PRODUCTS**

### **2.1 MATERIALS**

- A. Structural Steel: ASTM A36
- B. Primer Paint: As specified in Section 09 91 00, PAINTING.
- C. Modular Channel Units:
  - 1. Factory fabricated, channel shaped, cold formed sheet steel shapes, complete with fittings bolts and nuts required for assembly.
  - 2. Form channel with in turned pyramid shaped clamping ridges on each side.
  - 3. Provide case hardened steel nuts with serrated grooves in the top edges designed to be inserted in the channel at any point and be given a quarter turn so as to engage the channel clamping ridges. Provide each nut with a spring designed to hold the nut in place.
  - 4. Factory finish channels and parts with oven baked primer when exposed to view. Channels fabricated of ASTM A525, G90 galvanized steel may have primer omitted in concealed locations. Finish screws and nuts with zinc coating.
  - 5. Fabricate snap-in closure plates to fit and close exposed channel openings of not more than 0.3 mm (0.0125 inch) thick stainless steel.

### **2.2 HARDWARE**

- A. Rough Hardware:
  - 1. Furnish rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electro-galvanizing process. Galvanized G-90 where specified.
- B. Fasteners:
  - 1. Bolts with Nuts:
    - a. ASME B18.2.2
    - b. ASTM A307 for 415 MPa (60,000 psi) tensile strength bolts
    - c. ASTM F468 for nonferrous bolts
    - d. ASTM F593 for stainless steel
  - 2. Screws: ASME B18.6.1

3. Washers: ASTM F436, type to suit material and anchorage
4. Nails: ASTM F1667, Type I, style 6 or 14 for finish work

## **2.3 FABRICATION GENERAL**

### **A. Material:**

1. Use material as specified. Use material of commercial quality and suitable for intended purpose for material that is not named or its standard of quality not specified.
2. Use material free of defects which could affect the appearance or service ability of the finished product.

### **B. Size:**

1. Size and thickness of members as shown.
2. When size and thickness is not specified or shown for an individual part, use size and thickness not less than that used for the same component on similar standard commercial items or in accordance with established shop methods.

### **C. Connections:**

1. Except as otherwise specified, connections may be made by welding, riveting or bolting.
2. Field riveting will not be approved.
3. Design size, number and placement of fasteners, to develop a joint strength of not less than the design value.
4. Holes, for rivets and bolts: Accurately punched or drilled and burrs removed.
5. Size and shape welds to develop the full design strength of the parts connected by welds and to transmit imposed stresses without permanent deformation or failure when subject to service loadings.
6. Use Rivets and bolts of material selected to prevent corrosion (electrolysis) at bimetallic contacts. Plated or coated material will not be approved.

### **D. Fasteners and Anchors:**

1. Use methods for fastening or anchoring metal fabrications to building construction as shown or specified.
2. Where fasteners and anchors are not shown, design the type, size, location and spacing to resist the loads imposed without deformation of the members or causing failure of the anchor or fastener, and suit the sequence of installation.

3. Use material and finish of the fasteners compatible with the kinds of materials which are fastened together and their location in the finished work.
4. Fasteners for securing metal fabrications to new construction only, may be by use of threaded or wedge type inserts or by anchors for welding to the metal fabrication for installation before the concrete is placed or as masonry is laid.
5. Fasteners for securing metal fabrication to existing construction or new construction may be expansion bolts, toggle bolts, power actuated drive pins, welding, self drilling and tapping screws or bolts.

E. Workmanship:

1. General:

- a. Fabricate items to design shown.
- b. Furnish members in longest lengths commercially available within the limits shown and specified.
- c. Fabricate straight, true, free from warp and twist, and where applicable square and in same plane.
- d. Provide holes, sinkages and reinforcement shown and required for fasteners and anchorage items.
- e. Provide openings, cut-outs, and tapped holes for attachment and clearances required for work of other trades.
- f. Prepare members for the installation and fitting of hardware.
- g. Cut openings in gratings and floor plates for the passage of ducts, sumps, pipes, conduits and similar items. Provide reinforcement to support cut edges.
- h. Fabricate surfaces and edges free from sharp edges, burrs and projections which may cause injury.

2. Welding:

- a. Weld in accordance with AWS.
- b. Welds shall show good fusion, be free from cracks and porosity and accomplish secure and rigid joints in proper alignment.
- c. Where exposed in the finished work, continuous weld for the full length of the members joined and have depressed areas filled and protruding welds finished smooth and flush with adjacent surfaces.
- d. Finish welded joints to match finish of adjacent surface.



3. Joining:
  - a. Miter or butt members at corners.
  - b. Where frames members are butted at corners, cut leg of frame member perpendicular to surface, as required for clearance.
4. Anchors:
  - a. Where metal fabrications are shown to be preset in concrete, weld 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 150 mm (6 inches) long with 25 mm (one inch) hooked end, to back of member at 600 mm (2 feet) on center, unless otherwise shown.
  - b. Where metal fabrications are shown to be built into masonry use 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 250 mm (10 inches) long with 50 mm (2 inch) hooked end, welded to back of member at 600 mm (2 feet) on center, unless otherwise shown.
5. Cutting and Fitting:
  - a. Accurately cut, machine and fit joints, corners, copes, and miters.
  - b. Fit removable members to be easily removed.
  - c. Design and construct field connections in the most practical place for appearance and ease of installation.
  - d. Fit pieces together as required.
  - e. Fabricate connections for ease of assembly and disassembly without use of special tools.
  - f. Joints firm when assembled.
  - g. Conceal joining, fitting and welding on exposed work as far as practical.
  - h. Do not show rivets and screws prominently on the exposed face.
  - i. The fit of components and the alignment of holes shall eliminate the need to modify component or to use exceptional force in the assembly of item and eliminate the need to use other than common tools.

F. Finish:

1. Finish exposed surfaces in accordance with NAAMM Metal Finishes Manual.
2. Steel and Iron: NAAMM AMP 504
  - a. Zinc coated (Galvanized): ASTM A123, G90 unless noted otherwise.
  - b. Surfaces exposed in the finished work:
    - 1) Finish smooth rough surfaces and remove projections.

- 2) Fill holes, dents and similar voids and depressions with epoxy type patching compound.

c. Shop Prime Painting:

1) Surfaces of Ferrous metal:

- a) Items not specified to have other coatings.
- b) Galvanized surfaces specified to have prime paint.
- c) Remove all loose mill scale, rust, and paint, by hand or power tool cleaning as defined in SSPC-SP2 and SP3.
- d) Clean of oil, grease, soil and other detrimental matter by use of solvents or cleaning compounds as defined in SSPC-SP1.
- e) After cleaning and finishing apply one coat of primer as specified in Section 09 91 00, PAINTING.

G. Protection:

1. Spot prime all abraded and damaged areas of zinc coating which expose the bare metal, using zinc rich paint on hot-dip zinc coat items and zinc dust primer on all other zinc coated items.

## 2.4 SUPPORTS

A. General:

1. Fabricate ASTM A36 structural steel shapes as shown.
2. Use clip angles or make provisions for welding hangers and braces to overhead construction.
3. Field connections may be welded or bolted.

B. For Wall Mounted Items:

1. For items supported by metal stud partitions.
2. Steel strip or hat channel minimum of 1.5 mm (0.0598 inch) thick.
3. Steel strip minimum of 150 mm (6 inches) wide, length extending one stud space beyond end of item supported.
4. Steel hat channels where shown. Flange cut and flatted for anchorage to stud.
5. Structural steel tube or channel for grab bars floor to structure above with clip angles or end plates formed for anchors.

## **PART 3 - EXECUTION**

### **3.1 INSTALLATION, GENERAL**

- A. Set work accurately, in alignment and where shown, plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Items set into concrete or masonry.
  - 1. Provide temporary bracing for such items until concrete or masonry is set.
  - 2. Place in accordance with setting drawings and instructions.
  - 3. Build strap anchors, into masonry as work progresses.
- C. Field weld in accordance with AWS.
  - 1. Design and finish as specified for shop welding.
  - 2. Use continuous weld unless specified otherwise.
- E. Install anchoring devices and fasteners as shown and as necessary for securing metal fabrications to building construction as specified. Power actuated drive pins may be used except for removable items and where members would be deformed or substrate damaged by their use.
- F. Spot prime all abraded and damaged areas of zinc coating as specified and all abraded and damaged areas of shop prime coat with same kind of paint used for shop priming.
- G. Isolate aluminum from dissimilar metals and from contact with concrete materials as required to prevent electrolysis and corrosion.
- H. Secure escutcheon plate with set screw.

### **3.2 INSTALLATION OF SUPPORTS**

- A. Anchorage to structure.
  - 1. Secure angles or channels and clips to overhead structural steel by continuous welding unless bolting is shown.
  - 2. Secure supports to concrete inserts by bolting or continuous welding as shown.
  - 3. Secure supports to mid-height of concrete beams when inserts do not exist with expansion bolts and to slabs with expansion bolts, unless shown otherwise.
  - 4. Secure steel plate or hat channels to studs as detailed.
- B. Supports for Wall Mounted items:
  - 1. Locate center of support at anchorage point of supported item.
  - 2. Locate supports where required for items shown.

### **3.3 CLEAN AND ADJUSTING**

- A. Adjust movable parts including hardware to operate as designed without binding or deformation of the members centered in the opening or frame and, where applicable, contact surfaces fit tight and even without forcing or warping the components.
- B. Clean after installation exposed prefinished and plated items and items fabricated from stainless steel, aluminum and copper alloys, as recommended by the metal manufacture and protected from damage until completion of the project.

--- E N D ---

**SECTION 05 51 00  
METAL STAIRS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. Section specifies steel railings and concrete slab repair.

**1.2 RELATED WORK**

- A. Wall handrails and railings for other than steel stairs: Section 05 50 00, METAL FABRICATIONS.
- B. Requirements for shop painting: Section 09 91 00, PAINTING.

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Show design, fabrication details, installation, connections, material, and size of members.

**1.4 APPLICATION PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation.
- B. American Society for Testing and Materials (ASTM):
  - A36/A36M-08 ..... Structural Steel
  - A47-99 (R2009) ..... Ferritic Malleable Iron Castings
  - A48-03(R2008) ..... Gray Iron Castings
  - A53-10 ..... Pipe, Steel, Black and Hot-Dipped Zinc-Coated Welded and Seamless
  - A307-10 ..... Carbon Steel Bolts and Studs, 60000 psi Tensile Strength
  - A563-07 ..... Carbon and Alloy Steel Nuts
- C. American Welding Society (AWS):
  - D1.1-10 ..... Structural Welding Code-Steel
  - D1.3-08 ..... Structural Welding Code-Sheet Steel
- D. The National Association of Architectural Metal Manufacturers (NAAMM) Manuals:

Metal Bar Gratings (ANSI/NAAMM MBG 531-09)

AMP521-01 .....Pipe Railing Manual, Including Round Tube

E. American Iron and Steel Institute (AISI):

2001 .....Design of Cold-Formed Steel Structural Members

## **PART 2 - PRODUCTS**

### **2.1 DESIGN CRITERIA**

- A. Structural design, fabrication and assembly in accordance with requirements of NAAMM Metal Stairs Manual, except as otherwise specified or shown.
- B. Design pipe railings in accordance with NAAMM Pipe Railing Manual for 900 N (200 pounds) in any direction at any point.

### **2.2 MATERIALS**

- A. Steel Pipe: ASTM A53, Standard Weight, zinc coated
- B. Steel Plate: ASTM A1011
- C. Iron Castings: ASTM A48, Class 30
- D. Malleable Iron Castings: ASTM A47
- E. Grout, Non-Shrinking: Premixed ferrous or non-ferrous, mixed and applied in accordance with manufacturer's recommendations. Grout shall show no settlement or vertical drying shrinkage at 3 days or thereafter based on initial measurement made at time of placement, and produce a compressive strength of at least 18 MPa (2500 psi) at 3 days and 35 MPa (5000 psi) at 28 days.

### **2.3 FABRICATION GENERAL**

- A. Fasteners:
  - 1. Conceal bolts and screws wherever possible.
  - 2. Use countersunk heads on exposed bolts and screws with ends of bolts and screws dressed flush after nuts are set.
- B. Welding:
  - 1. Structural steel, AWS D1.1 and sheet steel, AWS D1.3.
  - 2. Where possible, locate welds on unexposed side.
  - 3. Grind exposed welds smooth and true to contour of welded member.
  - 4. Remove welding splatter.

- C. Remove sharp edges and burrs.
- D. Shop Prime Painting: Prepare surface and apply primer as specified for ferrous metals in Section 09 91 00, PAINTING.

## **2.4 RAILINGS**

- A. Fabricate railings, including handrails, from steel pipe with flush.
  - 1. Connections may be standard fittings designed for welding, or coped or mitered pipe with full welds.
  - 2. Wall handrails are provided under Section 05 50 00, METAL FABRICATIONS.
- B. Return ends of handrail to wall and close free end.
- C. Provide standard terminal castings where fastened to newel.
- D. Space intermediate posts not over 1800 mm (6 feet) on center between end post or newel post.
- E. Fabricate handrail brackets from cast malleable iron.
- F. Provide standard terminal fittings at ends of post and rails.

## **PART 3 - EXECUTION**

### **3.1 RAILING INSTALLATION**

- A. Where new posts are required at existing slabs, remove existing slab not less than 25 mm (1 inch) below finished floor level to expose existing steel framing; neatly sawcut and size pocket as required for welding post to existing steel.
- B. Install standard terminal fittings at ends of posts and rails.
- C. Secure brackets, posts and rails to steel by welds, and to concrete with expansion sleeves and bolts.
- D. Set rails horizontal or parallel to rake of stairs to within 3 mm in 3650 mm (1/8-inch in 12 feet).
- E. Set posts plumb and aligned to within 3 mm in 3650 mm (1/8-inch in 12 feet).

### **3.2 FIELD PRIME PAINTING**

- A. When installation is complete, clean field welds and surrounding areas to bright metal, and coat with same primer paint used for shop priming.
- B. Touch-up abraded areas with same primer paint used for shop priming.
- C. Touch up abraded galvanized areas with zinc rich paint as specified in section 09 91 00, PAINTING.



### **3.3 RESURFACING FLOORS:**

Prepare exposed structural slab surface by roughening, broom cleaning, wetting, and grouting.

Apply non-shrink commercial grout, flush to top and edge of existing slab, finish smooth.

--- E N D ---

**SECTION 07 84 00  
FIRESTOPPING**

**PART 1 GENERAL**

**1.1 DESCRIPTION**

- A. Closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction.
- B. Closure of openings in walls against penetration of gases or smoke in smoke partitions.

**1.2 RELATED WORK**

- A. Sealants and application: Section 07 92 00, JOINT SEALANTS

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturers literature, data, and installation instructions for types of firestopping and smoke stopping used.
- C. List of FM, UL, or WH classification number of systems installed.
- D. Certified laboratory test reports for ASTM E814 tests for systems not listed by FM, UL, or WH proposed for use.

**1.4 DELIVERY AND STORAGE**

- A. Deliver materials in their original unopened containers with manufacturer's name and product identification.
- B. Store in a location providing protection from damage and exposure to the elements.

**1.5 WARRANTY**

- A. Firestopping work subject to the terms of the Article "Warranty of Construction", FAR clause 52.246-21, except extend the warranty period to five years.

**1.6 QUALITY ASSURANCE**

- A. FM, UL, or WH or other approved laboratory tested products will be acceptable.

**1.7 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):

E84-10.....Surface Burning Characteristics of Building Materials

E814-11.....Fire Tests of Through-Penetration Fire Stops

C. Factory Mutual Engineering and Research Corporation (FM):

Annual Issue Approval Guide Building Materials

D. Underwriters Laboratories, Inc. (UL):

Annual Issue Building Materials Directory

Annual Issue Fire Resistance Directory

1479-10 .....Fire Tests of Through-Penetration Firestops

E. Warnock Hersey (WH):

Annual Issue Certification Listings

## **PART 2 - PRODUCTS**

### **2.1 FIRESTOP SYSTEMS**

- A. Use either factory built (Firestop Devices) or field erected (through-Penetration Firestop Systems) to form a specific building system maintaining required integrity of the fire barrier and stop the passage of gases or smoke.
- B. Through-penetration firestop systems and firestop devices tested in accordance with ASTM E814 or UL 1479 using the "F" or "T" rating to maintain the same rating and integrity as the fire barrier being sealed. "T" ratings are not required for penetrations smaller than or equal to 100 mm (4 inches) nominal pipe or  $0.01 \text{ m}^2$  (16 sq. in.) in overall cross sectional area.
- C. Products requiring heat activation to seal an opening by its intumescence shall exhibit a demonstrated ability to function as designed to maintain the fire barrier.
- D. Firestop sealants used for firestopping or smoke sealing shall have following properties:
  - 1. Contain no flammable or toxic solvents.
  - 2. Have no dangerous or flammable out gassing during the drying or curing of products.
  - 3. Water-resistant after drying or curing and unaffected by high humidity, condensation or transient water exposure.
  - 4. When used in exposed areas, shall be capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.
- E. Firestopping system or devices used for penetrations by glass pipe, plastic pipe or conduits, unenclosed cables, or other non-metallic materials shall have following properties:

1. Classified for use with the particular type of penetrating material used.
  2. Penetrations containing loose electrical cables, computer data cables, and communications cables protected using firestopping systems that allow unrestricted cable changes without damage to the seal.
  3. Intumescent products which would expand to seal the opening and act as fire, smoke, toxic fumes, and, water sealant.
- F. Maximum flame spread of 25 and smoke development of 50 when tested in accordance with ASTM E84.
- G. FM, UL, or WH rated or tested by an approved laboratory in accordance with ASTM E814.
- H. Materials to be asbestos free.

## **2.2 SMOKE STOPPING IN SMOKE PARTITIONS**

- A. Use silicone sealant in smoke partitions as specified in Section 07 92 00, JOINT SEALANTS.
- B. Use mineral fiber filler and bond breaker behind sealant.
- C. Sealants shall have a maximum flame spread of 25 and smoke developed of 50 when tested in accordance with E84.
- D. When used in exposed areas capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

## **PART 3 - EXECUTION**

### **3.1 EXAMINATION**

Submit product data and installation instructions, as required by article, submittals, after an on site examination of areas to receive firestopping.

### **3.2 PREPARATION**

- A. Remove dirt, grease, oil, loose materials, or other substances that prevent adherence and bonding or application of the firestopping or smoke stopping materials.
- B. Remove insulation on insulated pipe for a distance of 150 mm (six inches) on either side of the fire rated assembly prior to applying the firestopping materials unless the firestopping materials are tested and approved for use on insulated pipes.

### **3.3 INSTALLATION**

- A. Do not begin work until the specified material data and installation instructions of the proposed firestopping systems have been submitted and approved.

- B. Install firestopping systems with smoke stopping in accordance with FM, UL, WH, or other approved system details and installation instructions.
- C. Install smoke stopping seals in smoke partitions.

### **3.4 CLEAN-UP AND ACCEPTANCE OF WORK**

- A. As work on each floor is completed, remove materials, litter, and debris.
- B. Do not move materials and equipment to the next-scheduled work area until completed work is inspected and accepted by the Project Engineer.
- C. Clean up spills of liquid type materials.

--- E N D ---

**SECTION 07 92 00  
JOINT SEALANTS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. Section covers all sealant and caulking materials and their application, wherever required for complete installation of building materials or systems.

**1.2 RELATED WORK:**

- A. Firestopping penetrations: Section 07 84 00, FIRESTOPPING
- B. Sound rated gypsum partitions/sound sealants: Section 09 29 00, GYPSUM BOARD

**1.3 QUALITY CONTROL:**

- A. Installer Qualifications: An experienced installer who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance.
- B. Source Limitations: Obtain each type of joint sealant through one source from a single manufacturer.
- C. Product Testing: Obtain test results from a qualified testing agency based on testing current sealant formulations within a 12-month period.
  - 1. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021.
  - 2. Test elastomeric joint sealants for compliance with requirements specified by reference to ASTM C920, and where applicable, to other standard test methods.
  - 3. Test other joint sealants for compliance with requirements indicated by referencing standard specifications and test methods.
- D. VOC: Acrylic latex and Silicon sealants shall have less than 50g/L VOC content.

**1.4 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's installation instructions for each product used.
- C. Cured samples of exposed sealants for each color where required to match adjacent material.
- D. Manufacturer's Literature and Data:

1. Caulking compound
2. Primers
3. Sealing compound, each type, including compatibility when different sealants are in contact with each other.

#### **1.5 PROJECT CONDITIONS:**

A. Environmental Limitations:

1. Do not proceed with installation of joint sealants under following conditions:
  - a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 5 degrees C (40 degrees F).
  - b. When joint substrates are wet.

B. Joint-Width Conditions:

1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.

C. Joint-Substrate Conditions:

1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

#### **1.6 DELIVERY, HANDLING, AND STORAGE:**

- A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.
- B. Carefully handle and store to prevent inclusion of foreign materials.
- C. Do not subject to sustained temperatures exceeding 32 degrees C (90 degrees F) or less than 5 degrees C (40 degrees F).

#### **1.7 DEFINITIONS:**

- A. Definitions of terms in accordance with ASTM C717 and as specified.
- B. Back-up Rod: A type of sealant backing
- C. Bond Breakers: A type of sealant backing
- D. Filler: A sealant backing used behind a back-up rod



### 1.8 WARRANTY:

- A. Warranty exterior sealing against leaks, adhesion, and cohesive failure, and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be extended to two years.
- B. General Warranty: Special warranty specified in this Article shall not deprive Government of other rights Government may have under other provisions of Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contractor under requirements of Contract Documents.

### 1.9 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - C509-06 .....Elastomeric Cellular Preformed Gasket and Sealing Material
  - C612-10 .....Mineral Fiber Block and Board Thermal Insulation
  - C717-10 .....Standard Terminology of Building Seals and Sealants
  - C834-10 .....Latex Sealants
  - C919-08. ....Use of Sealants in Acoustical Applications
  - C920-10 .....Elastomeric Joint Sealants
  - C1021-08 .....Laboratories Engaged in Testing of Building Sealants
  - C1193-09 .....Standard Guide for Use of Joint Sealants
  - C1330-02 (R2007) .....Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants
  - D1056-07 .....Specification for Flexible Cellular Materials—Sponge or Expanded Rubbe
  - E84-09.....Surface Burning Characteristics of Building Materials
- C. Sealant, Waterproofing and Restoration Institute (SWRI):
  - The Professionals' Guide

## **PART 2 - PRODUCTS**

### **.1 SEALANTS:**

- A. S-4:
  - 1. ASTM C920 polyurethane or polysulfide
  - 2. Type S
  - 3. Class 25
  - 4. Grade NS
  - 5. Shore A hardness of 25-40

### **2.2 CAULKING COMPOUND:**

- A. C-1: ASTM C834, acrylic latex
- B. C-2: One component acoustical caulking, non-drying, non-hardening, synthetic rubber

### **2.3 COLOR:**

- A. Sealants used with exposed masonry shall match color of mortar joints.
- B. Sealants used with unpainted concrete shall match color of adjacent concrete.
- C. Color of sealants for other locations shall be light gray or aluminum, unless specified otherwise.
- D. Caulking shall be light gray or white, unless specified otherwise.

### **2.4 JOINT SEALANT BACKING:**

- A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
- B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:
  - 1. Type C: Closed-cell material with a surface skin.
- C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056, nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32 degrees C (minus 26 degrees F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.
- D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint

surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

## **2.5 FILLER:**

- A. Mineral fiber board: ASTM C612, Class 1
- B. Thickness same as joint width
- C. Depth to fill void completely behind back-up rod.

## **2.6 PRIMER:**

- A. As recommended by manufacturer of caulking or sealant material.
- B. Stain free type

## **2.7 CLEANERS-NON POURIOUS SURFACES:**

- A. Chemical cleaners acceptable to manufacturer of sealants and sealant backing material, free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

# **PART 3 - EXECUTION**

## **3.1 INSPECTION:**

- A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.
- B. Coordinate for repair and resolution of unsound substrate materials.
- C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

## **3.2 PREPARATIONS:**

- A. Prepare joints in accordance with manufacturer's instructions and SWRI.
- B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer paint, or other foreign matter that would tend to destroy or impair adhesion.
  - 1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
  - 2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include the following:

- a. Concrete
  - b. Masonry
  - c. Unglazed surfaces of ceramic tile
- 3. Remove laitance and form-release agents from concrete.
- 4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants. Non-porous joint surfaces include the following:
  - a. Metal
- C. Do not cut or damage joint edges.
- D. Apply masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.
  - 1. Do not leave gaps between ends of sealant backings.
  - 2. Do not stretch, twist, puncture, or tear sealant backings.
  - 3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
- E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions.
  - 1. Apply primer prior to installation of back-up rod or bond breaker tape.
  - 2. Use brush or other approved means that will reach all parts of joints.
- F. Take all necessary steps to prevent three sided adhesion of sealants.

### **3.3 BACKING INSTALLATION:**

- A. Install back-up material, to form joints enclosed on three sides as required for specified depth of sealant.
- B. Where deep joints occur, install filler to fill space behind the back-up rod and position the rod at proper depth.
- C. Cut fillers installed by others to proper depth for installation of back-up rod and sealants.
- D. Install back-up rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.
- E. Where space for back-up rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.

- F. Take all necessary steps to prevent three sided adhesion of sealants.

### **3.4 SEALANT DEPTHS AND GEOMETRY:**

- A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.
- B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

### **3.5 INSTALLATION:**

- A. General:
1. Apply sealants and caulking only when ambient temperature is between 5 and 38 degrees C (40 and 100 degrees F).
  2. Do not use polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
  3. Do not use sealant type listed by manufacture as not suitable for use in locations specified.
  4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.
  5. Avoid dropping or smearing compound on adjacent surfaces.
  6. Fill joints solidly with compound and finish compound smooth.
  7. Tool joints to concave surface unless shown or specified otherwise.
  8. Apply compounds with nozzle size to fit joint width.
  9. Test sealants for compatibility with each other and substrate. Use only compatible sealant.
- B. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise.
- C. Where gypsum board partitions are of sound rated, fire rated, or smoke barrier construction, follow requirements of ASTM C919 only to seal all cut-outs and intersections with the adjoining construction unless specified otherwise.
1. Apply a 6 mm (1/4 inch) minimum bead of sealant each side of runners (tracks), including those used at partition intersections with dissimilar wall construction.
  2. Coordinate with application of gypsum board to install sealant immediately prior to application of gypsum board.
  3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing or application of veneer plaster-joint reinforcing.

4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cut-outs to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.
5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

### **3.6 FIELD QUALITY CONTROL:**

- A. Field-Adhesion Testing: Field-test joint-sealant adhesion to joint substrates as recommended by sealant manufacturer:
  1. Extent of Testing: Test completed elastomeric sealant joints as follows:
    - a. Perform 10 tests for first 300 m (1000 feet) of joint length for each type of elastomeric sealant and joint substrate.
    - b. Perform one test for each 300 m (1000 feet) of joint length thereafter or one test per each floor per elevation.
- B. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements. Record results in a field adhesion test log.
- C. Inspect tested joints and report on following:
  1. Whether sealants in joints connected to pulled-out portion failed to adhere to joint substrates or tore cohesively. Include data on pull distance used to test each type of product and joint substrate.
  2. Compare these results to determine if adhesion passes sealant manufacturer's field-adhesion hand-pull test criteria.
  3. Whether sealants filled joint cavities and are free from voids.
  4. Whether sealant dimensions and configurations comply with specified requirements.
- D. Record test results in a field adhesion test log. Include dates when sealants were installed, names of persons who installed sealants, test dates, test locations, whether joints were primed, adhesion results and percent elongations, sealant fill, sealant configuration, and sealant dimensions.
- E. Repair sealants pulled from test area by applying new sealants following same procedures used to originally seal joints. Ensure that original sealant surfaces are clean and new sealant contacts original sealant.
- F. Evaluation of Field-Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements, will be considered satisfactory. Remove

sealants that fail to adhere to joint substrates during testing or to comply with other requirements.  
Retest failed applications until test results prove sealants comply with indicated requirements.

### **3.7 CLEANING:**

- A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by the caulking or sealant manufacturer.
- B. After filling and finishing joints, remove masking tape.
- C. Leave adjacent surfaces in a clean and unstained condition.

### **3.8 LOCATIONS:**

- A. Interior Caulking:
  - 1. Typical Narrow Joint 6 mm, (1/4 inch) or less at Walls and Adjacent Components: Types C-1 and C-2
  - 2. Perimeter of Doors, which Adjoin Concrete or Masonry Surfaces: Types C-1 and C-2
  - 3. Exposed Acoustical Joint at Sound Rated Partitions: Type C-2
  - 4. Concealed Acoustic Sealant: Types S-4, C-1 and C-2

--- E N D ---



**SECTION 09 06 00**  
**SCHEDULE FOR FINISHES**

VAMC: Jerry L. Pettis Memorial, VA Healthcare Center

Location: Loma Linda, California

Project no. and Name: 605-14-662, Design Renovation of Three Stairwells

Submission: 100% Submission

Date: June 22, 2015

**SECTION 09 06 00  
SCHEDULE FOR FINISHES**

**PART I – GENERAL**

**1.1 DESCRIPTION**

- A. This section contains a coordinated system in which requirements for materials specified in other sections shown are identified by abbreviated material names and finish codes in the room finish schedule or shown for other locations.

**1.2 MANUFACTURERS**

- A. Manufacturer's trade names and numbers used herein are only to identify colors, finishes, textures and patterns. Products of other manufacturer's equivalent to colors, finishes, textures and patterns of manufacturers listed that meet requirements of technical specifications will be acceptable upon approval in writing by contracting officer for finish requirements.

**1.3 SUBMITALS**

- A. Submit in accordance with SECTION 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES-provide quadruplicate samples for color approval of materials and finishes specified in this section.

**1.4 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in text by basic designation only.
- B. Master Painting Institute: (MPI)  
2001 .....Architectural Painting Specification Manual

## PART 2- PRODUCTS

### 2.3 DIVISION 05 – METALS

#### A. SECTION 05 50 00, METAL FABRICATION

Item	Finish
Exposed Metal – support for wall and ceiling mounted item	Paint (PT-02) – Dunn Edwards Thundercloud Thundercloud DE5774

#### B. SECTION 05 51 00, METAL STAIRS

Component	Finish	Color
Newel Posts	Paint (PT-02)	Dunn Edwards Thundercloud Thundercloud DE5774
Guard Rails	Paint (PT-02)	Dunn Edwards Thundercloud Thundercloud DE5774
Handrails	Paint (PT-02)	Dunn Edwards Thundercloud Thundercloud DE5774
Grout	Non - shrink	Dunn Edwards Thundercloud Thundercloud DE5774

### 2.5 DIVISION 07 - THERMAL AND MOISTURE PROTECTION

#### A. SECTION 07 84 00, FIRE STOPPING

Material	Color	Manufacturer	Manufacturer Color
Joint Sealant	Safety Red	N/A	N/A

B. SECTION 07 92 00, JOINT SEALANTS

Material	Color	Manufacturer	Manufacturer Color
Joint Sealant	Light gray or aluminum		

**2.7 DIVISION 09 - FINISHES**

A. SECTION 09 65 13, RESILIENT BASE STAIR TREADS AND ACCESSORIES

Finish Code *	Item	Size	Manufacturer	Mfg Name/No.
BS-01	Rubber Base	6" High	Johnsonite	thermoset rubber wall base #41 sea breeze
RF-02	Rubber Top Stair Tread	(Existing) V.I.F.	Johnsonite	rubber raised round tiles #41 sea breeze with #47 brown vision strip
RF-03	Rubber Stair Treads and Risers	(Existing) V.I.F.	Johnsonite	rubber tread/riser, raised round with #47 brown vision strip #45 sandalwood w/ #47 brown insert visual strip

B. SECTION 09 65 19, RESILIENT TILE FLOORING

Finish Code *	Item	Size	Manufacturer	Mfg Name/No.
RF-01	Rubber Tile Flooring	24"X24"	Johnsonite	rubber raised round tiles #41 sea breeze

\* See drawing sheets AF101 thru AF103 and AE401 thru AE403 for locations

C. SECTION 09 91 00, PAINT AND COATINGS

1. MPI Gloss and Sheen Standards

Gloss @60

Sheen @85

Gloss Level 1, a traditional matte finish-flat	max 5 units, and	max 10 units
Gloss Level 2, a high side sheen flat-"a velvet-like" finish	max 10 units, and	10-35 units
Gloss Level 3, a traditional "egg-shell like" finish	10-25 units, and	10-35 units
Gloss Level 4 a "satin-like" finish	20-35 units, and	min. 35 units
Gloss Level 5 a traditional semi-gloss		35-70 units
Gloss Level 6 a traditional gloss		70-85 units
Gloss level 7 a high gloss		more than 85 units

2. Paint code *	Gloss	Manufacturer	Mfg. Color Name/No.
PT-01	Level 7	Dunn Edwards	Tapering Light Tapering Light DE5497
PT-02	Level 7	Dunn Edwards	Thundercloud Thundercloud DE5774
PT-03	Level 7	Dunn Edwards	Blustery Wind Blustery Wind DE6304
PT-04	Level 7	Dunn Edwards	Dull sage Dull sage DE5499
PT-05	Level 7	Dunn Edwards	Frozen Tundra Frozen Tundra DE5793
PT-06	Level 7	Dunn Edwards	Hazelnut Hazelnut DE6032

\* See drawing sheets AF101 thru AF103 and AE401 thru AE403 for locations

C. SECTION 09 72 16, VINYL COATED FABRIC WALLCOVERING (W)

Finish Code	Manufacturer **	Color
TBD	Murals Your Way "Luxuriant" line	Bright white. Maximum range 0.80 DE

\*\* Image(s) to be determined - VA to select

## 2.8 DIVISION 10 - SPECIALTIES

### A. SECTION 10 26 00, WALL GUARDS AND CORNER GUARDS

Item	Material	Manufacturer	Mfg. Color Name/No.
Corner Guards	Stainless Steel	CS Construction Specialties	CO8 with fasteners

### B. SECTION 10 14 00, INTERIOR SIGNS

Sign Type	Component	Manufacturer	Mfg. Color Name/No.
Government Furnish Contractor Install		N/A	

## 2.13 DIVISION 13 - SPECIAL CONSTRUCTION

### A. SECTION 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON STRUCTURAL COMPONENTS

Item	Location	Finish	Color
Seismic Bracing	As Occurs	Paint	Match adjacent surface: PT-01 for wall field paint PT-02 for metal

## 2.16 DIVISION 26 - ELECTRICAL

### A. SECTION 26 51 00, BUILDING LIGHTING INTERIOR

Fixture Type	Finish	Color
Fluorescent	Factory Finish	White

### **PART III EXECUTION**

#### **3.1 FINISH SCHEDULES & MISCELLANEOUS ABBREVIATIONS**

FINISH SCHEDULE ABBREVIATIONS	
Term	Abbreviation
Paint	PT
Resilient base stair treads and Resilient tile flooring	RF
Rubber Base	BS

DESIGNER NOTE: Do not substitute these symbols. Add new symbols as required.

#### **3.3 ROOM FINISH SCHEDULE**

- A. Match adjoining or existing similar surfaces colors, textures or patterns where disturbed or damaged by alterations or new work when not scheduled.
- B. ROOM FINISH SCHEDULE : See Finish Schedule on sheet AF601.

**--- E N D---**

**SECTION 09 29 00  
GYPSUM BOARD**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies installation and finishing of gypsum board.

**1.2 RELATED WORK**

- A. Installation of Support for Wall and Ceiling Mounted Items: Section 05 50 00, METAL FABRICATIONS
- B. Acoustical Sealants: Section 07 92 00, JOINT SEALANTS

**1.3 TERMINOLOGY**

- A. Definitions and description of terms shall be in accordance with ASTM C11, C840, and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by the trusses or bar joists.
- C. "Yoked": Gypsum board cut out for opening with no joint at the opening (along door jamb or above the door).

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Cornerbead and edge trim
  - 2. Finishing materials
  - 3. Laminating adhesive
  - 4. Gypsum board, each type
- C. Shop Drawings:
  - 1. Typical gypsum board installation, showing corner details, edge trim details and the like.
  - 2. Typical sound rated assembly, showing treatment at perimeter of partitions and penetrations at gypsum board.



3. Typical fire rated assembly and column fireproofing, indicating details of construction same as that used in fire rating test.

D. Samples:

1. Cornerbead
2. Edge trim
3. Control joints

E. Test Results:

1. Fire rating test, each fire rating required for each assembly
2. Sound rating test

### 1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

In accordance with the requirements of ASTM C840

### 1.6 ENVIRONMENTAL CONDITIONS

In accordance with the requirements of ASTM C840

### 1.7 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
- C11-08..... Terminology Relating to Gypsum and Related Building Materials and Systems
- C475-02..... Joint Compound and Joint Tape for Finishing Gypsum Board
- C840-08..... Application and Finishing of Gypsum Board
- C919-08..... Sealants in Acoustical Applications
- C954-07..... Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Stud from 0.033 in. (0.84mm) to 0.112 in. (2.84mm) in thickness
- C1002-07..... Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
- C1047-05..... Accessories for Gypsum Wallboard and Gypsum Veneer Base
- C1396-06..... Gypsum Board

E84-08..... Surface Burning Characteristics of Building Materials

C. Underwriters Laboratories Inc. (UL):

Latest Edition..... Fire Resistance Directory

D. Inchcape Testing Services (ITS):

Latest Editions..... Certification Listings

## **PART 2 - PRODUCTS**

### **2.1 GYPSUM BOARD**

- A. Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick unless shown otherwise. Shall contain a minimum of 20 percent recycled gypsum.
- B. Gypsum cores shall contain maximum percentage of post industrial recycled gypsum content available in the area (a minimum of 95 percent post industrial recycled gypsum content). Paper facings shall contain 100 percent post-consumer recycled paper content.

### **2.2 ACCESSORIES**

- A. ASTM C1047, except form of 0.39 mm (0.015 inch/30 gauge) thick zinc coated steel sheet or rigid PVC plastic.
- B. Flanges not less than 22 mm (7/8 inch) wide with punchouts or deformations as required to provide compound bond.

### **2.4 FASTENERS**

- A. ASTM C1002 and ASTM C840, except as otherwise specified.
- B. ASTM C954, for steel studs thicker than 0.84 mm (0.033 inch/22 gauge)
- C. Select screws of size and type recommended by the manufacturer of the material being fastened.
- D. For fire rated construction, type and size same as used in fire rating test.
- E. Clips: Zinc-coated (galvanized) steel; gypsum board manufacturer's standard items.

### **2.5 FINISHING MATERIALS AND LAMINATING ADHESIVE**

- A. ASTM C475 and ASTM C840. Free of antifreeze, vinyl adhesives, preservatives, biocides and other VOC. Adhesive shall contain a maximum VOC content of 50 g/L.

## **PART 3 - EXECUTION**

### **3.1 GYPSUM BOARD HEIGHTS**

- A. Extend all layers of gypsum board from floor to underside of structure overhead on following partitions and furring:

1. Two sides of partitions:
    - a. Fire rated partitions
    - b. Smoke partitions
    - c. Sound rated partitions
    - d. Full height partitions shown (FHP)
    - e. Corridor partitions
  2. One side of partitions or furring:
    - a. Inside of exterior wall furring or stud construction
    - b. Room side of room without suspended ceilings
    - c. Furring for pipes and duct shafts, except where fire rated shaft wall construction is shown.
  3. Extend all layers of gypsum board construction used for fireproofing of columns from floor to underside of structure overhead, unless shown otherwise.
- B. In locations other than those specified, extend gypsum board from floor to heights as follows:
1. Not less than 100 mm (4 inches) above suspended acoustical ceilings
  2. At ceiling of suspended gypsum board ceilings
  3. At existing ceilings

### **3.2 INSTALLING GYPSUM BOARD**

- A. Coordinate installation of gypsum board with other trades and related work.
- B. Install gypsum board in accordance with ASTM C840, except as otherwise specified.
- C. Use gypsum boards in maximum practical lengths to minimize number of end joints.
- D. Bring gypsum board into contact, but do not force into place.
- E. Ceilings:
  1. For single-ply construction, use perpendicular application.
  2. For two-ply assemblies:
    - a. Use perpendicular application.
    - b. Apply face ply of gypsum board so that joints of face ply do not occur at joints of base ply with joints over framing members.
- F. Walls (Except Shaft Walls):

1. When gypsum board is installed parallel to framing members, space fasteners 300 mm (12 inches) on center in field of the board, and 200 mm (8 inches) on center along edges.
2. When gypsum board is installed perpendicular to framing members, space fasteners 300 mm (12 inches) on center in field and along edges.
3. Stagger screws on abutting edges or ends.
4. For single-ply construction, apply gypsum board with long dimension either parallel or perpendicular to framing members as required to minimize number of joints except gypsum board shall be applied vertically over "Z" furring channels.
5. For two-ply gypsum board assemblies, apply base ply of gypsum board to assure minimum number of joints in face layer. Apply face ply of wallboard to base ply so that joints of face ply do not occur at joints of base ply with joints over framing members.
6. No offset in exposed face of walls and partitions will be permitted because of single-ply or two-ply application requirements.
7. Control Joints ASTM C840 and as follows:
  - a. Locate at both side jambs of openings if gypsum board is not "yoked". Use one system throughout.
  - b. Not required for wall lengths less than 9000 mm (30 feet).
  - c. Extend control joints the full height of the wall or length of soffit/ceiling membrane.

G. Acoustical or Sound Rated Partitions, Fire and Smoke Partitions:

1. Cut gypsum board for a space approximately 3 mm to 6 mm (1/8 to 1/4 inch) wide around partition perimeter.
2. Coordinate for application of caulking or sealants to space prior to taping and finishing.
3. For sound rated partitions, use sealing compound (ASTM C919) to fill the annular spaces between all receptacle boxes and the partition finish material through which the boxes protrude to seal all holes and/or openings on the back and sides of the boxes. STC minimum values as shown.

H. Electrical and Telecommunications Boxes:

1. Seal annular spaces between electrical and telecommunications receptacle boxes and gypsum board partitions.

I. Accessories:

1. Set accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified.

2. Install in one piece, without the limits of the longest commercially available lengths.
3. Corner Beads:
  - a. Install at all vertical and horizontal external corners and where shown.
  - b. Use screws only. Do not use crimping tool.
4. Edge Trim (casings Beads):
  - a. At both sides of expansion and control joints unless shown otherwise.
  - b. Where gypsum board terminates against dissimilar materials and at perimeter of openings, except where covered by flanges, casings or permanently built-in equipment.
  - c. Where gypsum board surfaces of non-load bearing assemblies abut load bearing members.
  - d. Where shown.

### **3.3 FINISHING OF GYPSUM BOARD**

- A. Finish joints, edges, corners, and fastener heads in accordance with ASTM C840. Use Level 4 finish for all finished areas open to public view.
- B. Before proceeding with installation of finishing materials, assure the following:
  1. Gypsum board is fastened and held close to framing or furring.
  2. Fastening heads in gypsum board are slightly below surface in dimple formed by driving tool.
- C. Finish joints, fasteners, and all openings, including openings around penetrations, on that part of the gypsum board extending above suspended ceilings to seal surface of non-decorated smoke barrier, fire rated, and sound rated gypsum board construction. After the installation of hanger rods, hanger wires, supports, equipment, conduits, piping and similar work, seal remaining openings and maintain the integrity of the smoke barrier, fire rated, and sound rated construction. Sanding is not required of non decorated surfaces.

### **3.4 REPAIRS**

- A. After taping and finishing has been completed, and before decoration, repair all damaged and defective work, including nondecorated surfaces.
- B. Patch holes or openings 13 mm (1/2 inch) or less in diameter, or equivalent size, with a setting type finishing compound or patching plaster.
- C. Repair holes or openings over 13 mm (1/2 inch) diameter, or equivalent size, with 16 mm (5/8 inch) thick gypsum board secured in such a manner as to provide solid substrate equivalent to undamaged surface.

- D. Tape and refinish scratched, abraded or damaged finish surfaces including cracks and joints in non decorated surface to provide smoke tight construction, fire protection equivalent to the fire rated construction, and STC equivalent to the sound rated construction.

--- E N D ---

**SECTION 09 65 13**  
**RESILIENT BASE AND ACCESSORIES AND RUBBER STAIR TREADS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the installation of vinyl base and skirting, rubber stair treads with fabricated rubber nosing trims, and resilient flooring on landings.

**1.2 RELATED WORK**

- A. Color and texture: Section 09 06 00, SCHEDULE FOR FINISHESS

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Description of each product
  - 2. Base and stair material manufacturer's recommendations for adhesives
  - 3. Application and installation instructions
- C. Samples:
  - 1. Base: 150 mm (6 inches) long, each type and color
  - 2. Stair Skirting: 150 mm (6 inches) long, each type and color
  - 3. Rubber Stair Treads: 150 mm (6 inches) long
  - 4. Fabricated Nosing Filler: 150 mm (6 inches) long
  - 4. Adhesive: Literature indicating each type

**1.4 DELIVERY**

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Materials from containers which have been distorted, damaged or opened prior to installation will be rejected.

**1.5 STORAGE**

- A. Store materials in weather tight and dry storage facility.
- B. Protect material from damage by handling and construction operations before, during, and after installation.

## 1.6 APPLICABLE PUBLICATIONS

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
- D2047-11..... Standard Test Method for Static Coefficient of Friction of Polish-Coated Flooring Surfaces as Measured by the James Machine
- D2240-05(2010).....Standard Test Method for Rubber Property—Durometer Hardness
- E648-14c.....Standard Test Method for Critical Radiant Flux of Floor-Covering Systems Using a Radiant Heat Energy Source
- E662-15.....Standard Test Method for Specific Optical Density of Smoke Generated by Solid Materials
- F925-13.....Standard Test Method for Resistance to Chemicals of Resilient Flooring
- F1514- 03(2008) .....Standard Test Method for Measuring Light Stability of Resilient Flooring by Color Change
- F1515- 03(2008) .....Standard Test Method for Measuring Light Stability of Resilient Flooring by Color Change
- F1861-08.....Resilient Wall Base
- F2169-15.....Standard Specification for Resilient Stair Treads
- C. Federal Specifications (Fed. Spec.):
- RR-T-650E ..... Treads, Metallic and Non-Metallic, Nonskid

## PART 2 - PRODUCTS

### 2.1 GENERAL

- A. Use only products by the same manufacturer and from the same production run.

### 2.2 RESILIENT BASE AND STAIR SKIRTING

- A. ASTM F1861, 3 mm (1/8 inch) thick, 100 mm (4 inches) high, Thermoplastics, Group 2-layered. Style B-cove.
- B. Where skirting occurs, use Style A-straight.



## 2.3 RUBBER TREADS / RISERS

- A. Fed. Spec. RR-T-650E, Composition A, Type 2, 5 mm (3/16 inch) thick on wear surface tapering to 3 mm (1/8 inch) thick at riser end. Vinyl stair treads shall not be acceptable.

B. Physical Properties:

1. Physical Properties of flooring system when tested as follows:

Property	Test	Value
Slip Resistance	ASTM D2047	SCOF $\geq$ 0.8
Hardness	ASTM D2240	Minimum 85 Shore A
Flame Resistance	ASTM E648	Class 1
Smoke Density	ASTM E662	< 450
Chemical Resistance	ASTM F925	Good
Resistance to Heat	ASTM F1514	$\Delta\Sigma \leq 8.0$
Resistance to Light	ASTM F1515	$\Delta\Sigma \leq 8.0$
Classification	ASTM F2169	Type TS, Class 1 and 2, Group 1 and 2

## 2.4 RUBBER NOSING FILLER

- A. Fabricate and install extruded rubber nosing filler conforming to existing “round” sub-tread nosing shape to create a “square” nosing and increase depth of existing treads. For further information refer to documents for prior project, “Design Renovation of Five Stairwells” (Stairwells 3, 4, 5, 6, and 8), VA Project No. 605-12-855.

1. See drawings for required data for dimensions and rubber composition.

## 2.5 PRIMER (FOR CONCRETE FLOORS)

- A. As recommended by the adhesive and tile manufacturer.

## 2.6 LEVELING COMPOUND (FOR CONCRETE FLOORS)

- A. Provide products with latex or polyvinyl acetate resins in the mix.

## 2.7 ADHESIVES

- A. Use products recommended by the material manufacturer for the conditions of use. Adhesives shall be compatible with tread, substrate, and rubber nosing filler.

1. Basis of Design: Johnsonite 930 two-part epoxy caulking compound. Products of other manufacturers satisfying the requirements of this specification shall be acceptable.

- B. Use low-VOC adhesive during installation. Water based adhesive with low VOC is preferred over solvent based adhesive.

1. OSHA Flammability Class IIIB, solvent free, polyurethane caulk. VOC: Less than 12 g/L; comply with SCAQMD Rule 1168.

## **PART 3 - EXECUTION**

### **3.1 PROJECT CONDITIONS**

- A. Maintain temperature of materials above 21 degrees C (70 degrees F), for 48 hours before installation.
- B. Maintain temperature of rooms where work occurs, between 21 and 27 degrees C (70 and 80 degrees F), for at least 48 hours before, during, and after installation.
- C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.

### **3.2 INSTALLATION REQUIREMENTS**

- A. The respective manufacturer's instructions for application and installation will be considered for use when approved by the Project Engineer.
- B. Submit proposed installation deviation from this specification to the Project Engineer indicating the differences in the method of installation.
- C. The Project Engineer reserves the right to have test portions of material installation removed to check for non-uniform adhesion and spotty adhesive coverage.

### **3.3 PREPARATION**

- A. Examine surfaces on which material is to be installed.
- B. Fill cracks, pits, and dents with leveling compound as appropriate to substrate.
- C. Level to 3 mm (1/8 inch) maximum variations.
- D. Do not use adhesive for leveling or filling.
- E. Grind, sand, or cut away protrusions; grind high spots.
- F. Clean substrate area of oil, grease, dust, paint, and deleterious substances.
- G. Substrate area dry and cured. Perform manufacturer's recommended bond and moisture test.
- H. Preparation for installation:
  - 1. Remove existing base and stair treads including adhesive.
  - 2. Do not use solvents to remove adhesives.
  - 3. Prepare substrates as required by adhesive and rubber tread manufacturer.

### **3.4 BASE INSTALLATION**

- A. Location:

1. Unless otherwise specified or shown, where base is scheduled, install base over toe space of base of casework, lockers, laboratory, pharmacy furniture island cabinets and where other equipment occurs.
2. Extend base scheduled for room into adjacent closet, alcoves, and around columns.

B. Application:

1. Apply adhesive uniformly with no bare spots.
2. Set base with joints aligned and butted to touch for entire height.
3. Before starting installation, layout base material to provide the minimum number of joints with no strip less than 600 mm (24 inches) length.
  - a. Short pieces to save material will not be permitted.
  - b. Locate joints as remote from corners as the material lengths or the wall configuration will permit.

C. Form corners and end stops as follows:

1. Use factory formed outside corners, 300 mm (12 inches) minimum length each side.
2. Score face of inside corner and notch cove.

D. Roll base for complete adhesion.

### **3.5 STAIR TREAD / RISER INSTALLATION**

A. Prepare surfaces to receive the treads / risers in accordance with applicable portions of paragraph "Preparation" as above.

B. Layout of Treads / Risers:

1. No joints will be accepted in treads / risers.
2. Set full treads on intermediate and floor landings.

C. Application:

1. Adhere fabricated "square" rubber nosing fillers to each rubber tread as indicated in drawings. Run a continuous 3 mm (1/8") bead of manufacturer recommended adhesive at inside of the rubber tread nosings, leaving no voids. Fully bed rubber nosing filler in adhesive and bead, tight to inside corner of rubber tread nosing.
2. Apply adhesive uniformly to back face of rubber treads / risers, including curved face of filler, with no bare spots; apply new rubber treads / risers to existing treads / risers.
3. Roll and pound treads / risers to assure adhesion.

### **3.6 CLEANING AND PROTECTION**

- A. Clean all exposed surfaces of base and adjoining areas of adhesive spatter before it sets.
- B. Keep traffic off resilient material for at least 72 hours after installation.
- C. Clean and polish materials in the following order:
  - 1. After two weeks, scrub resilient base, sheet rubber and treads materials with a minimum amount of water and a mild detergent. Leave surfaces clean and free of detergent residue. Polish resilient base to a gloss finish.
  - 2. Do not polish tread and sheet rubber materials.
- D. When construction traffic is anticipated, cover tread materials with reinforced Kraft paper and plywood or hardboard properly secured and maintained until removal as directed by the Project Engineer.
- E. Where protective materials are removed and immediately prior to acceptance, replace damaged materials and re-clean resilient materials. Damaged materials are defined as having cuts, gouges, scrapes or tears and not fully adhered.

--- E N D ---

**SECTION 09 65 19**  
**RESILIENT TILE FLOORING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the installation of solid vinyl tile flooring, vinyl composition tile flooring, rubber tile flooring, and accessories.

**1.2 RELATED WORK**

- A. Color and pattern and location in room finish schedule: Section 09 06 00, SCHEDULE FOR FINISHES
- B. Resilient Base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Description of each product
  - 2. Resilient material manufacturer's recommendations for adhesives, underlayment, primers and polish
  - 3. Application and installation instructions
- C. Samples:
  - 1. Tile: 300 mm by 300 mm (12 inches by 12 inches) for each type, pattern and color
  - 2. Edge Strips: 150 mm (6 inches) long, each type
- D. Shop Drawings:
  - 1. Layout of patterns shown on the drawings and in Section 09 06 00, SCHEDULE FOR FINISHES.
  - 2. Edge strip locations showing types and detail cross sections
- E. Test Reports:
  - 1. Abrasion resistance: Depth of wear for each tile type and color and volume loss of tile, certified by independent laboratory.
  - 2. Tested per ASTM F510.

#### **1.4 DELIVERY**

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Materials from containers which have been distorted, damaged or opened prior to installation will be rejected.

#### **1.5 STORAGE**

- A. Store materials in weathertight and dry storage facility.
- B. Protect from damage from handling, water, and temperature.

#### **1.6 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - D4078-02 (2008) ..... Water Emulsion Floor Finish
  - E648-10 ..... Critical Radiant Flux of Floor Covering Systems Using a Radiant Energy Source
  - E662-09 ..... Specific Optical Density of Smoke Generated by Solid Materials
  - E1155-96 (R2008) ..... Determining Floor Flatness and Floor Levelness Numbers
  - F510-93 (R 2008) ..... Resistance to Abrasion of Resilient Floor Coverings Using an Abrader with a Grit Feed Method
  - F710-08 ..... Preparing Concrete Floors to Receive Resilient Flooring
  - F1066-04 (R2010) ..... Vinyl Composition Floor Tile
- C. Resilient Floor Covering Institute (RFCI):
  - IP #2 ..... Installation Practice for Vinyl Composition Tile (VCT)
- D. Federal Specifications (Fed. Spec.):
  - SS-T-312 ..... Tile Floor: Asphalt, Rubber, Vinyl and Vinyl Composition

### **PART 2 - PRODUCTS**

#### **2.1 GENERAL**

- A. Furnish product type, materials of the same production run and meeting following criteria.

- B. Use adhesives, underlayment, primers and polish recommended by the floor resilient material manufacturer.
- C. Critical Radiant Flux: 0.45 watts per sq. cm or more, Class I, per ASTM E 648
- D. Smoke density: Less than 450 per ASTM E662

## **2.2 VINYL COMPOSITION TILE**

- A. ASTM F1066, Composition 1, Class 2 (through pattern), 300 mm (12 inches) square, 3 mm (1/8 inch) thick
- B. Color and pattern uniformly distributed throughout thickness.

## **2.3 ADHESIVES**

- A. Comply with applicable regulations regarding toxic and hazardous materials Green Seal (GS-36) for commercial adhesive.
- B. Use low-VOC adhesive during installation. Water based is preferred over solvent based adhesives.

## **2.4 PRIMER (FOR CONCRETE SUBFLOORS)**

- A. As recommended by the adhesive and tile manufacturer.

## **2.5 LEVELING COMPOUND (FOR CONCRETE FLOORS)**

- A. Provide cementitious products with latex or polyvinyl acetate resins in the mix.
- B. Determine the type of underlayment selected for use by the condition to be corrected.

## **2.6 POLISH AND CLEANERS**

- A. Cleaners: RFCI CL-1
- B. Polish: ASTM D4078

## **2.7 EDGE STRIPS**

- A. 28 mm (1-1/8 inches) wide unless shown otherwise.
- B. Bevel from maximum thickness to minimum thickness for flush joint unless shown otherwise.
- C. Extruded aluminum, mill finish, mechanically cleaned:
  - 1. Drill and counter sink edge strip for flat head screws.
  - 2. Space holes near ends and approximately 225 mm (9 inches) on center between.
- D. Resilient Edge Strip or Reducer Strip: Fed. Specs. SS-T-312, solid vinyl.

## **2.10 SCREWS**

- A. Stainless steel flat head screw

## **PART 3 - EXECUTION**

### **3.1 PROJECT CONDITIONS**

- A. Maintain temperature of materials a minimum of 22 degrees C (70 degrees F), for 48 hours before installation.
- B. Maintain temperature of rooms where work occurs between 21 and 27 degrees C (70 and 80 degrees F), for at least 48 hours before, during, and after installation.
- C. Do not install flooring until building is permanently enclosed and wet construction in or near areas to receive tile materials is complete, dry, and cured.

### **3.2 SUBFLOOR PREPARATION**

- A. Verify that concrete slabs comply with ASTM F710. At existing slabs, determine levelness by F-number method in accordance with ASTM E1155. Overall value shall not exceed as follows:
  - 1. FF30/FL20
- B. Correct conditions which will impair proper installation.
- C. Fill cracks, joints and other irregularities in concrete with leveling compound:
  - 1. Do not use adhesive for filling or leveling purposes.
  - 2. Do not use leveling compound to correct imperfections which can be corrected by spot grinding.
  - 3. Trowel to smooth surface free of trowel marks, pits, dents, protrusions, cracks or joints.
- D. Clean floor of oil, paint, dust, and deleterious substances: Leave floor dry and cured free of residue from existing curing or cleaning agents.
- E. Concrete Subfloor Testing: Determine Adhesion and dryness of the floor by bond and moisture tests as recommended by RFCI manual MRP.
- F. Perform additional subfloor preparation to obtain satisfactory adherence of flooring if subfloor test patches allows easy removal of tile.
- G. Prime the concrete subfloor if the primer will seal slab conditions that would inhibit bonding, or if priming is recommended by the tile or adhesive manufacturers.
- H. Preparation of existing installation shall include the removal of existing resilient floor and existing adhesive. Do not use solvents to remove adhesives.



### **3.3 INSTALLATION**

- A. Install in accordance with manufacturer's instructions for application and installation unless specified otherwise.
- B. Mix tile from at least two containers. An apparent line either of shades or pattern variance will not be accepted.
- C. Tile Layout:
  - 1. If layout is not shown on drawings, lay tile symmetrically about center of room or space with joints aligned.
  - 2. No tile shall be less than 150 mm (6 inches) and of equal width at walls.
  - 3. Place tile pattern in the same direction; do not alternate tiles.
- D. Trim tiles to touch for the length of intersections at pipes and vertical projections, seal joints at pipes with waterproof cement.
- E. Application:
  - 1. Apply adhesive uniformly with no bare spots.
    - a. Conform to RFC1-TM-6 for joint tightness and for corner intersection unless layout pattern shows random corner intersection.
    - b. More than 5 percent of the joints not touching will not be accepted.
  - 2. Roll tile floor with a minimum 45 kg (100-pound) roller. No exceptions.
  - 3. The Project Engineer may have test tiles removed to check for non-uniform adhesion, spotty adhesive coverage, and ease of removal. Install new tile for broken removed tile.
- F. Installation of Edge Strips:
  - 1. Locate edge strips under center line of doors unless otherwise shown.
  - 2. Set resilient edge strips in adhesive. Anchor metal edge strips with anchors and screws specified.
  - 3. Where tile edge is exposed, butt edge strip to touch along tile edge.

### **3.4 CLEANING AND PROTECTION**

- A. Clean adhesive marks on exposed surfaces during the application of resilient materials before the adhesive sets. Exposed adhesive is not acceptable.
- B. Keep traffic off resilient material for a minimum 72 hours after installation.
- C. Clean and polish materials in the following order:

1. For the first two weeks sweep and damp mopped only.
  2. After two weeks, scrub resilient materials with a minimum amount of water and a mild detergent. Leave surface clean and free of detergent residue.
  3. Apply polish to the floors in accordance with the polish manufacturer's instructions.
- D. When construction traffic occurs over tile, cover resilient materials with reinforced kraft paper properly secured and maintained until removal is directed by Project Engineer. At entrances and where wheeled vehicles or carts are used, cover tile with plywood, hardboard, or particle board over paper, secured and maintained until removal is directed by Project Engineer.
- E. When protective materials are removed and immediately prior to acceptance, replace any damage tile, re-clean resilient materials, lightly re-apply polish and buff floors.

### **3.5 LOCATION**

- A. Extend tile flooring for room into adjacent closets and alcoves.

--- E N D ---

**SECTION 09 72 16**  
**VINYL-COATED FABRIC WALL COVERINGS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

Section specifies fabric backed vinyl non-woven wallcovering and installation.

1. Furnish and install product incorporating VA-selected image(s).

**1.2 RELATED WORK**

- A. Color, pattern, type, direction of hanging and areas to receive wallcovering: Section 09 06 00, SCHEDULE FOR FINISHES. VA to select mural image(s).

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
  1. Each type and pattern as specified in Section 09 06 00, SCHEDULE FOR FINISHES.
  2. Size: Full width of mill run
- C. Manufacturer's Certificates:
  1. Compliance with CFFA W-101D
  2. Wallcovering manufacturer's approval of adhesive
- D. Manufacturer's Literature and Data:
  1. Primer and adhesive
  2. Installation instructions
  3. Maintenance instructions, including recommended materials and methods for maintaining wallcovering with precautions in use of cleaning material

**1.4 QUALITY ASSURANCE**

- A. Finish one complete space with each type (color and pattern) of wallcovering showing specified colors and patterns.
- B. Use approved sample spaces as a standard for work throughout the project.

## **1.5 DELIVERY, STORAGE AND HANDLING**

- A. Deliver in original unopened containers bearing the manufacturer's name, brand name, and product designation.
- B. Store in accordance with manufacturer's instructions.
- C. Handle to prevent damage to material.

## **1.6 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. Chemical Fabrics and Film Association, Inc., (CFFA):  
2575-96(R2011) ..... Vinyl Coated Fabric Wallcovering
- C. American Society for Testing and Materials (ASTM)  
E84-13a ..... Standard Test Method for Surface Burning Characteristics of  
Building Materials  
G21-09 ..... Determining Resistance of Synthetic Polymeric Materials to  
Fungi

## **PART 2 - PRODUCTS**

### **2.1 FABRIC BACKED VINYL NON-WOVEN WALLCOVERING WITH MURAL**

- A. Basis of Design: Products of Murals Your Way, 717 5<sup>th</sup> Street South, Hopkins, MN 55343; Phone: (888) 235-1318; Email: [www.muralsyourway.com](http://www.muralsyourway.com); "Luxuriant" line.
  - 1. Products of other manufacturers satisfying the requirements of this specification shall be acceptable.
- B. Fabric Backed Vinyl Non-Woven Wall Covering: Provide the following characteristics:
  - 1. Color: Bright white. Maximum range 0.80 DE
  - 2. Weight: 389 g/m (15 oz./lineal yard)
  - 3. Surface texture: Smooth
  - 4. Size: 1321 mm (52-inch) panel widths
  - 5. Pattern: Custom. Vinyl coated wall fabric to be imprinted with art work to be provided by Project Engineer.
  - 6. Ink: Manufacturer's standard UV protected ink with 20-year indoor fade resistance.
  - 7. Type: II (Medium Duty)

- 8. Class: A
- 9. Indoor air quality: Low VOC Emitting
- 10. Fire rating, ASTM E84:      Flame spread index: 5    (Class A 0-25)  
   Smoke development: 10 (Class A 0-450)
- B. Comply with CFFA-2575.
- C. Fungi Resistance: ASTM G21, rating of 0

## **2.2 ADHESIVE**

- A. Use only water-based adhesive having volatile organic compounds not exceeding 50 g/L.
- B. Vermin and mildew resistant

## **2.3 EDGE GUARDS OR TRIM**

- A. "J" shape with groove to receive the wallcovering as recommended by the wallcovering manufacturer.
- B. Concealed edge feathered, not less than 19 mm (3/4 inch) wide
- C. Designed for adhesive attachment.
- D. Use Vinyl.

## **PART 3 - EXECUTION**

### **3.1 JOB CONDITIONS**

- A. Temperatures:
  - 1. Do not perform work until surfaces and materials have been maintained at minimum of 15.5 degrees C (60 degrees F) for three days before work begins.
  - 2. Maintain minimum temperatures of 15.5 degrees C (60 degrees F) until adhesives are dried or cured.
- B. Lighting:
  - 1. Do not proceed unless a minimum lighting level of 1.35 candela/m<sup>2</sup> (15 candlepower/ft<sup>2</sup>) occurs.
  - 2. Measure light level at mid-height of wall.
- C. Ventilation:
  - 1. Provide uniform continuous ventilation in space.
  - 2. Ventilate for a time for not less than complete drying or curing of adhesive.

- D. Protect other surfaces from damage which may be caused by this work.
- E. Remove waste from building daily.

### **3.2 SURFACE CONDITION**

- A. Inspect surfaces to receive wallcoverings to assure that:
  - 1. Patches and repairs are completed.
  - 2. Surfaces are clean, smooth, and prime painted.
- B. Do not proceed until discovered defects have been corrected by other trades and surfaces are ready to receive wallcovering.
- C. Carefully remove electrical outlet and switch plates, mechanical diffusers, escutcheons, registers, surface hardware, fittings and fastenings, prior to starting work.
- D. Carefully store items for reinstallation.
- E. Install Edge Guard or Trim:
  - 1. Locate where shown or specified.
  - 2. Run edge guards from top of base to ceiling or wainscot cap in continuous length.
  - 3. Run wainscot cap trim level unless shown otherwise.
  - 4. Install as specified by manufacturer of edge guard or trim, in adhesive.
  - 5. Smooth adhesive edge. Do not leave adhesive exposed to view.
  - 6. Leave ready to receive wallcovering.

### **3.3 APPLICATION OF ADHESIVE**

- A. Mix and apply adhesives in accordance with manufacturer's directions.
- B. Prevent adhesive from getting on face of wallcovering.
- C. Apply adhesive to wallcovering back.

### **3.4 WALLCOVERING INSTALLATION**

- A. Use wallcovering of same batch or run in an area. Use fabric rolls in consecutive numerical sequence of manufacture.
- B. Install material completely adhered, smooth, clean, without wrinkles, air pockets, gaps or overlaps.
- C. Extend wallcovering continuous behind non-built-in casework and other items which are close to but not bolted to or touching the walls.

- D. Install wallcovering before installation of resilient base. Extend wallcovering not more than 6 mm (1/4 inch) below top of resilient base.
- E. Install panels consecutively in order in which they are cut from the roll including filling spaces above or below windows, doors, or similar penetrations.
- F. Do not install horizontal seams.
- G. Except on match patterns, hang fabric by reversing alternate strips, except as recommended by the manufacturer.
- H. Cutting:
  - 1. Cut on a work table with a straight edge.
  - 2. Joints or seams that are not cut clean are unacceptable.
  - 3. Trim additional selvage to achieve a color and pattern match at seams. Overlapped seams are not allowed.
  - 4. Do not double cut seams on wall unless specified.
  - 5. If double cutting on the wall is necessary, place a three inch strip of Type I wallcovering under pasted edge.
    - a. Do not cut into wall surface.
    - b. After cutting, remove strip and excess adhesive from seam before proceeding to next seam.
    - c. Smooth down seam in adhesive for tight bond and joint.
- I. Trim strip-matched patterns, which are not factory pre-trimmed.
- J. Inside Corners:
  - 1. Wrap wallcovering around corner.
  - 2. Do not seam within 50 mm (2 inches) of inside corners.
  - 3. Double cut seam.
- K. Outside Corners:
  - 1. Wrap wallcovering around corner.
  - 2. Do not seam within 150 mm (6 inches) of outside corners.
  - 3. Double cut seam.

### **3.5 PATCHING**

- A. Replace surface damaged wallcovering in a space as specified for new work:

1. Replace full height of surface.
  2. Replace from break in plane to break in plane when same batch or run is not used. Double cut seams.
  3. Adjoining differential colors from separate batches or runs are not acceptable.
- B. Correct loose or raised seams with adhesives to lay flat with tight bonded joint as specified for new work.

### **3.5 CLEANING AND INSTALLING TEMPORARY REMOVED ITEMS**

- A. Remove adhesive from wallcovering as work proceeds.
- B. Remove adhesives where spilled, splashed or splattered on wallcoverings or adjacent surfaces in a manner not to damage surface from which it is removed.
- C. Reinstall previously removed electrical outlet and switch plates, mechanical diffusers, escutcheons, registers, surface hardware, fittings, and fastenings.

--- E N D ---



**SECTION 09 91 00  
PAINTING**

**PART 1-GENERAL**

**1.1 DESCRIPTION**

- A. Section specifies field painting.
- B. Section specifies prime coats which may be applied in shop under other sections.

**1.2 RELATED WORK**

- A. Shop prime painting of steel and ferrous metals: Division 05 - METALS, Division 10 – SPECIALTIES, and Division 26 - ELECTRICAL sections
- B. Type of Finish, Color, and Gloss Level of Finish Coat: Section 09 06 00, SCHEDULE FOR FINISHES

**1.3 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:

Before work is started, or sample panels are prepared, submit manufacturer's literature, the current Master Painters Institute (MPI) "Approved Product List" indicating brand label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use subsequent MPI "Approved Product List", however, only one list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI "Approved Product List" where applicable is acceptable.

- C. Sample Panels:

1. After painters' materials have been approved and before work is started submit sample panels showing each type of finish and color specified.
2. Panels to show color: Composition board, 100 x 250 x 3 mm (4 x 10 x 1/8 inch)
3. Attach labels to panel stating the following:
  - a. Federal Specification Number or manufacturers name and product number of paints used.
  - b. Specification code number specified in Section 09 06 00, SCHEDULE FOR FINISHES.
  - c. Product type and color
  - d. Name of project

4. Strips showing not less than 50 mm (2-inch) wide strips of undercoats and 100 mm (4-inch) wide strip of finish coat.
- D. Sample of identity markers if used.
- E. Manufacturers' Certificates indicating compliance with specified requirements:
  1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified.

#### **1.4 DELIVERY AND STORAGE**

- A. Deliver materials to site in manufacturer's sealed container marked to show following:
  1. Name of manufacturer
  2. Product type
  3. Batch number
  4. Instructions for use
  5. Safety precautions
- B. In addition to manufacturer's label, provide a label legibly printed as following:
  1. Federal Specification Number, where applicable, and name of material
  2. Surface upon which material is to be applied.
  3. If paint or other coating, state coat types; prime, body or finish.
- C. Maintain space for storage, and handling of painting materials and equipment in a neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.
- D. Store materials at site at least 24 hours before using, at a temperature between 18 and 30 degrees C (65 and 85 degrees F).

#### **1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. American Conference of Governmental Industrial Hygienists (ACGIH):  
  
ACGIH TLV-BKLT-2012.....Threshold Limit Values (TLV) for Chemical Substances and  
Physical Agents and Biological Exposure Indices (BEIs)  
  
ACGIH TLV-DOC-2012.....Documentation of Threshold Limit Values and Biological Exposure  
Indices, (Seventh Edition)
- C. Master Painters Institute (MPI):

- No. 4-12.....Interior/ Exterior Latex Block Filler
- No. 9-12.....Exterior Alkyd Enamel (EO)
- No. 18-12.....Organic Zinc-Rich Coating
- No. 45-12.....Interior Primer Sealer
- No. 47-12.....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5 (AK)
- No. 50-12.....Interior Latex Primer Sealer
- No. 51-12.....Interior Alkyd, Eggshell, MPI Gloss Level 3
- No. 52-12.....Interior Latex, MPI Gloss Level 3 (LE)
- No. 53-12.....Interior Latex, Flat, MPI Gloss Level 1 (LE)
- No. 54-12.....Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)
- No. 95-12.....Fast Drying Metal Primer
- No. 114-12.....Interior Latex, Gloss (LE) and (LG)
- No. 134-12.....Waterborne Galvanized Primer
- No. 135-12.....Non-Cementitious Galvanized Primer
- No. 138-12.....Interior High Performance Latex, MPI Gloss Level 2 (LF)
- No. 139-12.....Interior High Performance Latex, MPI Gloss Level 3 (LL)
- No. 140-12.....Interior High Performance Latex, MPI Gloss Level 4
- No. 141-12.....Interior High Performance Latex (SG) MPI Gloss Level 5

D. Steel Structures Painting Council (SSPC):

- SSPC SP 1-04 (R2004).....Solvent Cleaning
- SSPC SP 2-04 (R2004).....Hand Tool Cleaning
- SSPC SP 3-04 (R2004).....Power Tool Cleaning

## **PART 2 - PRODUCTS**

### **2.1 MATERIALS**

- A. Interior/Exterior Latex Block Filler: MPI 4
- B. Exterior Alkyd Enamel (EO): MPI 9
- C. Organic Zinc Rich Coating: MPI 18
- D. Interior Primer Sealer: MPI 45

- E. Interior Alkyd, Semi-Gloss (AK): MPI 47
- F. Interior Latex Primer Sealer: MPI 50
- G. Interior Alkyd, Eggshell: MPI 51
- H. Interior Latex, MPI Gloss Level 3 (LE): MPI 52
- I. Interior Latex, Flat, MPI Gloss Level 1 (LE): MPI 53
- J. Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE): MPI 54
- K. Fast Drying Metal Primer: MPI 95
- L. Interior latex, Gloss (LE) and (LG): MPI 114
- M. Waterborne Galvanized Primer: MPI 134.
- N. Non-Cementitious Galvanized Primer: MPI 135
- O. Interior High Performance Latex, MPI Gloss Level 2 (LF): MPI 138
- P. Interior High Performance Latex, MPI Gloss Level 3 (LL): MPI 139
- Q. Interior High Performance Latex, MPI Gloss Level 4: MPI 140
- R. Interior High Performance Latex (SG), MPI Gloss Level 5: MPI 141

## **2.2 PAINT PROPERTIES**

- A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.
- B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.

## **2.3 REGULATORY REQUIREMENTS/QUALITY ASSURANCE**

- A. Paint materials shall conform to the restrictions of the local Environmental and Toxic Control jurisdiction.
  - 1. Volatile Organic Compounds (VOC): VOC content of paint materials shall not exceed 50 g/L for interior latex paints/primers and 50 g/L for exterior latex paints and primers.
  - 2. Lead-Base Paint:
    - a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.

- b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of Projectial structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.
- 3. Asbestos: Materials shall not contain asbestos.
- 4. Chromate, Cadmium, Mercury, and Silica: Materials shall not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
- 5. Human Carcinogens: Materials shall not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
- 6. Use high performance acrylic paints in place of alkyd paints, where possible.
- 7. VOC content for solvent-based paints shall not exceed 50 g/L and shall not be formulated with more than one percent aromatic hydro carbons by weight.

### **PART 3 - EXECUTION**

#### **3.1 JOB CONDITIONS**

- A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.
  - 1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
  - 2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each days work.
- B. Atmospheric and Surface Conditions:
  - 1. Do not apply coating when air or substrate conditions are:
    - a. Less than 3 degrees C (5 degrees F) above dew point.
    - b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the Contracting Officer and the product manufacturer. Under no circumstances shall application conditions exceed manufacturer recommendations.
  - 2. Maintain interior temperatures until paint dries hard.
  - 3. Do not paint in direct sunlight or on surfaces that the sun will soon warm.
  - 4. Apply only on clean, dry and frost-free surfaces except as follows:
    - a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces where allowed by manufacturer's printed instructions.

- b. Dampened with a fine mist of water on hot dry days concrete and masonry surfaces to which water thinned acrylic and cementitious paints are applied to prevent excessive suction and to cool surface.

### **3.2 SURFACE PREPARATION**

- A. Method of surface preparation is optional, provided results of finish painting produce solid even color and texture specified with no overlays.
- B. General:
  - 1. Remove prefinished items not to be painted such as lighting fixtures, escutcheon plates, hardware, trim, and similar items for reinstallation after paint is dried.
  - 2. Remove items for reinstallation and complete painting of such items and adjacent areas when item or adjacent surface is not accessible or finish is different.
  - 3. See other sections of specifications for specified surface conditions and prime coat.
  - 4. Clean surfaces for painting with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry.
- C. Ferrous Metals:
  - 1. Remove oil, grease, soil, drawing and cutting compounds, flux and other detrimental foreign matter in accordance with SSPC-SP 1 (Solvent Cleaning).
  - 2. Remove loose mill scale, rust, and paint, by hand or power tool cleaning, as defined in SSPC-SP 2 (Hand Tool Cleaning) and SSPC-SP 3 (Power Tool Cleaning). Exception: where high temperature aluminum paint is used, prepare surface in accordance with paint manufacturer's instructions.
  - 3. Fill dents, holes and similar voids and depressions in flat exposed surfaces of hollow steel doors and frames, access panels, roll-up steel doors and similar items specified to have semi-gloss or gloss finish with TT-F-322D (Filler, Two-Component Type, For Dents, Small Holes and Blow-Holes). Finish flush with adjacent surfaces.
    - a. This includes flat head countersunk screws used for permanent anchors.
    - b. Do not fill screws of item intended for removal such as glazing beads.
  - 4. Spot prime abraded and damaged areas in shop prime coat which expose bare metal with same type of paint used for prime coat. Feather edge of spot prime to produce smooth finish coat.
  - 5. Spot prime abraded and damaged areas which expose bare metal of factory finished items with paint as recommended by manufacturer of item.

D. Zinc-Coated (Galvanized) Metal, Surfaces Specified Painted:

1. Clean surfaces to remove grease, oil and other deterrents to paint adhesion in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Spot coat abraded and damaged areas of zinc-coating which expose base metal on hot-dip zinc-coated items with MPI 18 (Organic Zinc Rich Coating). Prime or spot prime with MPI 134 (Waterborne Galvanized Primer) or MPI 135 (Non-Cementitious Galvanized Primer) depending on finish coat compatibility.

E. Masonry and Concrete:

1. Clean and remove dust, dirt, oil, grease efflorescence, form release agents, laitance, and other deterrents to paint adhesion.
2. Use emulsion type cleaning agents to remove oil, grease, paint and similar products. Use of solvents, acid, or steam is not permitted.
3. Remove loose mortar in masonry work.
4. Repair broken and spalled concrete edges with concrete patching compound to match adjacent surfaces. Remove projections to level of adjacent surface by grinding or similar methods.

F. Gypsum Board:

1. Remove efflorescence, loose and chalking plaster or finishing materials.
2. Remove dust, dirt, and other deterrents to paint adhesion.
3. Fill holes, cracks, and other depressions with CID-A-A-1272A, Plaster, Gypsum (Spackling Compound) finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1 inch) in diameter as specified in Section for plaster or gypsum board.

### 3.3 PAINT PREPARATION

- A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
- B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.
- C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.
- D. Mix two component and two part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.

- E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

### **3.4 APPLICATION**

- A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.
- B. Unless otherwise specified, apply paint in three coats; prime, body, and finish. When two coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.
- C. Apply each coat evenly and cover substrate completely.
- D. Allow not less than 48 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by Project Engineer.
- E. Finish surfaces to show solid even color, free from runs, lumps, brushmarks, laps, holidays, or other defects.
- F. Apply by brush, roller or spray, except as otherwise specified.
- G. Do not spray paint in existing occupied spaces unless approved by Project Engineer, except in spaces sealed from existing occupied spaces.
  - 1. Apply painting materials specifically required by manufacturer to be applied by spraying.
  - 2. In areas, where paint is applied by spray, mask or enclose with polyethylene, or similar air tight material with edges and seams continuously sealed including items specified in WORK NOT PAINTED, motors, controls, telephone, and electrical equipment, fronts of sterilizes and other recessed equipment and similar prefinished items.
- I. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items except overhead roll-up doors and shutters.

### **3.5 PRIME PAINTING**

- A. After surface preparation prime surfaces before application of body and finish coats, except as otherwise specified.
- B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.
- C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.
- D. Metals except boilers, incinerator stacks, and engine exhaust pipes:
  - 1. Steel and iron: MPI 95 (Fast Drying Metal Primer)



2. Zinc-coated steel and iron: MPI 134 (Waterborne Galvanized Primer)
3. Machinery not factory finished: MPI 9 (Exterior Alkyd Enamel (EO))

E. Gypsum Board:

1. Surfaces scheduled to have MPI 53 (Interior Latex, Flat, MPI Gloss Level 1 LE)) or MPI 52 (Interior Latex, MPI Gloss Level 3 (LE)), MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)), MPI 114 (Interior Latex, Gloss (LE) and (LG)) finish.
2. Use MPI 53 (Interior Latex, MPI Gloss Level 3 (LE)) or MPI 52 (Interior Latex, MPI Gloss Level 3 (LE)), MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)), MPI 114 (Interior Latex, Gloss (LE) and (LG)) respectively.
3. Primer: MPI 50 (Interior Latex Primer Sealer)

F. Concrete and Masonry, Interior Surfaces of Ceilings and Walls:

1. MPI 53 (Interior Latex, Flat, MPI Gloss Level 1 LE)), MPI 52 (Interior Latex, MPI Gloss Level 3 (LE)), MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)), MPI 114 (Interior Latex, Gloss (LE) and (LG)), except use two coats where substrate has aged less than six months.
2. Use MPI 138 (Interior High Performance Latex, MPI Gloss Level 2 (LF)), MPI 139 (Interior High Performance Latex, MPI Gloss level 3 (LL)), MPI 140 (Interior High Performance latex, MPI Gloss Level 4), MPI 141 (Interior High Performance Latex (SG) MPI Gloss Level 5), or MPI 114 (Interior Latex, Gloss (LE) and (LG)) as scheduled.

### 3.6 INTERIOR FINISHES

A. Apply following finish coats over prime coats in spaces or on surfaces specified in Section 09 06 00, SCHEDULE FOR FINISHES.

B. Metal Work:

1. Apply to exposed surfaces.
2. Omit body and finish coats on surfaces concealed after installation except electrical conduit containing conductors over 600 volts.
3. Ferrous Metal, Galvanized Metal, and Other Metals Scheduled:
  - a. Apply two coats of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) unless specified otherwise.
  - b. Machinery: One coat MPI 9 (Exterior Alkyd Enamel (EO))

C. Gypsum Board:

1. One coat of MPI 45 (Interior Primer Sealer)
2. Two coats of MPI 138 (Interior High Performance Latex, MPI Gloss Level 2 (LF))

3. Two coats of MPI 51 (Interior Alkyd, Eggshell) (AK))

E. Masonry and Concrete Walls:

1. Over MPI 4 (Interior/Exterior Latex Block Filler) on CMU surfaces
2. Two coats of MPI 140 (Interior High Performance Latex MPI Gloss level 4)

I. Miscellaneous:

1. Apply where specified in Section 09 06 00, SCHEDULE FOR FINISHES.

### **3.7 REFINISHING EXISTING PAINTED SURFACES**

- A. Clean, patch and repair existing surfaces as specified under surface preparation.
- B. Remove and reinstall items as specified under surface preparation.
- C. Remove existing finishes or apply separation coats to prevent non compatible coatings from having contact.
- D. Patched or Replaced Areas in Surfaces and Components: Apply spot prime and body coats as specified for new work to repaired areas or replaced components.
- E. Except where scheduled for complete painting apply finish coat over plane surface to nearest break in plane, such as corner, reveal, or frame.
- F. Refinish areas as specified for new work to match adjoining work unless specified or scheduled otherwise.
- G. Sand or dull glossy surfaces prior to painting.
- H. Sand existing coatings to a feather edge so that transition between new and existing finish will not show in finished work.

### **3.8 PAINT COLOR**

- A. Color and gloss of finish coats is specified in Section 09 06 00, SCHEDULE FOR FINISHES.
- B. For additional requirements regarding color see Articles, REFINISHING EXISTING PAINTED SURFACE and MECHANICAL AND ELECTRICAL FIELD PAINTING SCHEDULE.
- C. Coat Colors:
  1. Color of priming coat: Lighter than body coat
  2. Color of body coat: Lighter than finish coat
  3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.

### 3.9 MECHANICAL AND ELECTRICAL WORK FIELD PAINTING SCHEDULE

- A. Field painting of mechanical and electrical consists of cleaning, touching-up abraded shop prime coats, and applying prime, body and finish coats to materials and equipment if not factory finished in space scheduled to be finished.
- B. In spaces not scheduled to be finish painted in Section 09 06 00, SCHEDULE FOR FINISHES paint as specified under paragraph H, colors.
- C. Paint various systems specified in Division 26 - ELECTRICAL
- D. Paint after tests have been completed.
- E. Omit prime coat from factory prime-coated items.
- F. Finish painting of mechanical and electrical equipment is not required when located in interstitial spaces, above suspended ceilings, in concealed areas such as pipe and electric closets, pipe basements, pipe tunnels, trenches, attics, roof spaces, shafts and furred spaces except on electrical conduit containing feeders 600 volts or more.
- G. Omit field painting of items specified in paragraph, Building and Structural WORK NOT PAINTED.
- H. Color:
  - 1. Paint items having no color specified in Section 09 06 00, SCHEDULE FOR FINISHES to match surrounding surfaces.
  - 2. Paint colors as specified in Section 09 06 00, SCHEDULE FOR FINISHES except for following:
    - a. Gray: Heating, ventilating, air conditioning and refrigeration equipment (except as required to match surrounding surfaces), and water and sewage treatment equipment and sewage ejection equipment.
    - b. Federal Safety Red: Exposed fire protection piping hydrants, post indicators, electrical conductors containing fire alarm control wiring, and fire alarm equipment.
    - c. Federal Safety Orange: Entire lengths of electrical conduits containing feeders 600 volts or more.
- I. Apply paint systems on properly prepared and primed surface as follows:
  - 1. Interior Locations:
    - a. Apply two coats of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) to following items:
      - 1) Metal under 94 degrees C (200 degrees F) of items such as bare piping, fittings, hangers and supports.

- 2) Equipment and systems such as hinged covers and frames for control cabinets and boxes, cast-iron radiators, electric conduits and panel boards.
- 3) Heating, ventilating, air conditioning, plumbing equipment, and machinery having shop prime coat and not factory finished.

### **3.10 BUILDING AND STRUCTURAL WORK FIELD PAINTING**

A. Painting and finishing of interior and exterior work except as specified under paragraph 3.10 B:

1. Painting and finishing of new and existing work including colors and gloss of finish selected is specified in Finish Schedule, Section 09 06 00, SCHEDULE FOR FINISHES.
2. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.
3. Painting of ferrous metal and galvanized metal.
4. Painting of wood with fire retardant paint exposed in attics, when used as mechanical equipment space.
5. Identity painting and safety painting.

B. Building and Structural Work not Painted:

1. Prefinished items:
  - a. Casework, doors, elevator entrances and cabs, metal panels, wall covering, and similar items specified factory finished under other sections.
  - b. Factory finished equipment and pre-engineered metal building components such as metal roof and wall panels.
2. Finished surfaces:
  - a. Hardware except ferrous metal.
  - b. Anodized aluminum, stainless steel, chromium plating, copper, and brass, except as otherwise specified.
  - c. Signs, fixtures, and other similar items integrally finished.
3. Concealed surfaces:
  - a. Inside dumbwaiter, elevator and duct shafts, interstitial spaces, pipe basements, crawl spaces, pipe tunnels, above ceilings, attics, except as otherwise specified.
  - b. Inside walls or other spaces behind access doors or panels
  - c. Surfaces concealed behind permanently installed casework and equipment.

4. Moving and operating parts:
  - a. Shafts, chains, gears, mechanical and electrical operators, linkages, and sprinkler heads, and sensing devices
5. Labels:
  - a. Code required label, such as Underwriters Laboratories Inc., Inchcape Testing Services, Inc., or Factory Mutual Research Corporation
  - b. Identification plates, instruction plates, performance rating, and nomenclature
6. Galvanized metal:
  - a. Exterior chain link fence and gates, corrugated metal areaways, and gratings
  - b. Gas Storage Racks
  - c. Except where specifically specified to be painted.
7. Metal safety treads and nosings
8. Gaskets
9. Concrete curbs, gutters, pavements, retaining walls, exterior exposed foundations walls and interior walls in pipe basements.
11. Structural steel encased in concrete, masonry, or other enclosure.
12. Structural steel to receive sprayed-on fire proofing.
13. Ceilings, walls, columns in interstitial spaces
14. Ceilings, walls, and columns in pipe basements

### **3.11 PROTECTION CLEAN UP, AND TOUCH-UP**

- A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.
- B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.
- C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

### **APPENDIX**

Coordinate the following abbreviations used in Section 09 91 00, PAINTING, with other Sections, especially Section 09 06 00, SCHEDULE FOR FINISHES and other COATING SECTIONS listed. Use the same abbreviation and terms consistently.

Paint or coating Abbreviation

Acrylic Emulsion	AE (MPI 10 – flat/MPI 11 – semigloss/MPI 119 - gloss)
Latex Emulsion	LE (MPI 53, flat/MPI 52, eggshell/MPI 54, semigloss/MPI 114, gloss Level 6)
Latex Flat	LF (MPI 138)
Latex Gloss	LG (MPI 114)
Latex Semigloss	SG (MPI 141)
Latex Low Luster	LL (MPI 139)

--- E N D ---

**SECTION 10 14 00  
SIGNAGE**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies interior signage for room numbers, directional signs, code required signs, telephone identification signs and temporary interior signs.

**1.2 RELATED WORK**

- A. Electrical: Related Electrical Specification Sections
- B. Lighted EXIT signs for egress purposes are specified under Division 26, ELECTRICAL.
- C. Color Finish: Section 09 06 00, SCHEDULE FOR FINISHES

**1.3 MANUFACTURER'S QUALIFICATIONS**

- A. Sign manufacturer shall provide evidence that they regularly and presently manufactures signs similar to those specified in this section as one of their principal products.

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 00, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Samples: Sign panels and frames, with letters and symbols, each type. Submit 2 sets. One set of samples will be retained by Project Engineer, other returned to Contractor.
  - 1. Sign Panel, 200 x 250 mm (8 x 10 inches), with letters
  - 2. Color samples of each color, 150 x 150 mm (6 x 6 inches). Show anticipated range of color and texture.
  - 3. Sample of typeface, arrow and symbols in a typical full size layout
- C. Manufacturer's Literature:
  - 1. Showing the methods and procedures proposed for the concealed anchorage of the signage system to each surface type.
  - 2. Manufacturer's printed specifications, anchorage details, installation and maintenance instructions
- D. Samples: Sign location plan, showing location, type and total number of signs required.
- E. Shop Drawings: Scaled for manufacture and fabrication of sign types. Identify materials, show joints, welds, anchorage, accessory items, mounting and finishes.

- F. Full size layout patterns for dimensional letters

### **1.5 DELIVERY AND STORAGE**

- A. Deliver materials to job in manufacturer's original sealed containers with brand name marked thereon. Protect materials from damage.
- B. Package to prevent damage or deterioration during shipment, handling, storage and installation. Maintain protective covering in place and in good repair until removal is necessary.
- C. Deliver signs only when the site and mounting services are ready for installation work to proceed.
- D. Store products in dry condition inside enclosed facilities.

### **1.6 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - B209-07 .....Aluminum and Aluminum-Alloy Sheet and Plate
  - B221-08 .....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and tubes
- C. Federal Specifications (Fed Spec):
  - MIL-PRF-8184F .....Plastic Sheet, Acrylic, Modified
  - MIL-P-46144C .....Plastic Sheet, Polycarbonate

### **1.7 MINIMUM SIGN REQUIREMENTS**

- A. Permanent Rooms and Spaces:
  - 1. Tactile and Braille Characters, raised minimum 0.793 mm (1/32 inch). Characters shall be accompanied by Grade 2 Braille.
  - 2. Type Styles: Characters shall be uppercase, Helvetica Regular or Helvetica Medium Condensed. Helvetica Medium shall not be used.
  - 3. Character Height: Minimum 16 mm (5/8 inch) high; maximum 50 mm (2 inches).
  - 4. Symbols (Pictograms): Equivalent written description shall be placed directly below symbol, outside of symbol's background field. Border dimensions of symbol background shall be minimum 150 mm (6 inches) high.
  - 5. Finish and Contrast: Characters and background shall be eggshell, matte or other non-glare finish with adequate contrast with background.



6. Mounting Location and Height: As shown. Mounted on wall adjacent to the latch side of the door and to avoid door swing and protruding objects.

B. Overhead Signs:

1. Type Styles: As shown. Characters shall have a width-to-height ratio between 3:5 and 1:1. Characters shall have a stroke width-to-height ratio of between 1:5 and 1:10.
2. Character Height: minimum 75 mm (3 inches) high for overhead signs. As shown, for directional signs.
3. Finish and Contrast: Same as for signs of permanent rooms and spaces
4. Mounting Location and Height: As shown.

**1.8 COLORS AND FINISHES:**

Section 09 06 00, SCHEDULE FOR FINISHES

**PART 2 - PRODUCTS**

**2.1 GENERAL**

- A. Signs of type, size and design shown on the drawings and as specified.
- B. Signs complete with lettering, framing and related components for a complete installation.
- C. Provide graphics items as completed units produced by a single manufacturer, including necessary mounting accessories, fittings and fastenings.
- D. Do not scale drawings for dimensions. Contractor to verify and be responsible for all dimensions and conditions shown by these drawings. Project Engineer to be notified of any discrepancy in drawing, in field directions or conditions, and/or of any changes required for all such construction details.
- E. The Sign Contractor, by commencing work of this section, assumes overall responsibility, as part of his warranty of work, to assure that assemblies, components and parts shown or required within the work of the section, comply with the Contract Documents. The Contractor shall further warrant: That all components, specified or required to satisfactorily complete the installation are compatible with each other and with conditions of installations.

**2.2 PRODUCTS**

- A. Aluminum:
  1. Sheet and Plate: ASTM B209
  2. Extrusions and Tubing: ASTM B221

- B. Cast Acrylic Sheet: MIL-PRF-8184F; Type II, class 1, Water white non-glare optically clear. Matte finish water white clear acrylic shall not be acceptable.
- C. Polycarbonate: MIL-P-46144C; Type I, class 1
- D. Vinyl: 0.1 mm thick machine cut, having a pressure sensitive adhesive and integral color.

## **2.3 SIGN STANDARDS**

- A. Topography:
  - 1. Type Style: Helvetica Regular or Helvetica Medium Condensed. Initial caps or all caps as indicated in Sign Message Schedule.
  - 2. Arrow: See graphic standards in drawings.
  - 3. Letter spacing: See graphic standards on drawings.
  - 4. All text, arrows, and symbols to be provided in size, colors, typefaces and letter spacing shown. Text shall be a true, clean, accurate reproduction of typeface(s) shown. Text shown in drawings is for layout purposes only; final text for signs is listed in Sign Message Schedule.
- B. Project Colors and Finishes: See Section 09 06 00, SCHEDULE FOR FINISHES.

## **2.4 SIGN TYPES**

- A. General:
  - 1. The interior sign system is comprised of sign types families that are identified by a letter and number which identify a particular group of signs. An additional number identifies a specific type of sign within that family.
    - a. IN indicates a component construction based sign.
- B. Interchangeable Component System:
  - 1. Sign Type Families: 03, 04, 05, 06, 07, 08, 09, 10, 11, 12, 13, 14, 15, 16, and 17.
  - 2. Interior sign system capable of being arranged in a variety of configurations with a minimum of attachments, devices and connectors.
    - a. Interchangeable nature of the system shall allow for changes of graphic components of the installed sign, without changing sign in its entirety.
    - b. Component Sign System is comprised of the following primary components:
      - 1) Rail Back utilizing horizontal rails, spaced to allow for uniform, modular sizing of sign types.
      - 2) Rail Insert mounted to back of Copy Panels to allow for attachment to Rail Back.

- 3) Copy Panels, made of a variety of materials to allow for different graphic needs.
  - 4) End Caps which interlock to Rail Back to enclose and secure changeable Copy Panels.
  - 5) Joiners and Accent Joiners connect separate Rail Backs together.
  - 6) Top Accent Bars which provide decorative trim cap that encloses the top of sign or can connect the sign to a Type 03 Room Number Sign.
- c. Rail Back, Rail Insert and End Caps in anodized extruded aluminum to allow for tight tolerances and consistent quality of fit and finish.
  - d. Signs in system shall be convertible in the field to allow for enlargement from one size to another in height and width through use of Joiners or Accent Joiners, which connect Rail Back panels together blindly, providing a butt joint between Copy Panels. Accent Joiners shall connect Rail Backs together with a visible 3 mm (0.125 inch) horizontal rib, flush to the adjacent copy insert surfaces.
  - e. Sign configurations shall vary in width from 225 mm (9 inches) to 2050 mm (80 inches), and have height dimensions of 50 mm (2 inches), 75 mm (3 inches), 150 mm (6 inches), 225 mm (9 inches) and 300 mm (12 inches). Height shall be increased beyond 300 mm (12 inches), by repeating height module in full or in part.
3. Rail Back functions as internal structural member of sign using 6063T5 extruded aluminum and anodized black.
    - a. Shall accept an extruded aluminum or plastic insert on one sign or on both sides, depending upon sign type.
    - b. Shall be convertible in field to allow for connection to other Rail Back panels, so that additive changes can be made to sign unit.
    - c. Rail shall allow for a variety of mounting devices including wall mounting for screw-on applications, using pressure sensitive tape, freestanding mount, ceiling mount and other mounting devices as needed.
  4. Rail Insert functions as a mounting device for Copy Panels on to the Rail Back. The Rail Insert mounts to the back of the Copy Panel with adhesive suitable for use with the particular copy insert material.
    - a. Shall allow Copy Panels to slide or snap into the horizontal Rail Back for ease of changeability.
    - b. Shall mount to the back of the Copy Panel with adhesive suitable for use with particular Copy Panel material.

5. Copy Panels shall accept various forms of copy and graphics, and attaches to the Rail Back with the Rail Insert. Copy Panels shall be either ABS plastic with integral color or an acrylic lacquer finish; photo polymer; or acrylic.
  - a. Interchangeable by sliding horizontally from either side of sign, and to other signs in system of equal or greater width or height.
  - b. Cleanable without use of special chemicals or cleaning solutions.
  - c. Copy Insert Materials.
    - 1) ABS Inserts - 2.3 mm (0.090 inches) extruded ABS plastic core with .07 mm (0.003 inch) acrylic cap bonded during extrusion/texturing process. Pressure bonded to extruded Rail Insert using adhesive. Background color is either integral or painted in acrylic lacquer. ABS inserts finished in a chromium industries #HM335RA texture pattern to prevent glare.
    - 2) Photo polymer Inserts - 3 mm (0.125 inch) phenolic photo polymer with raised copy etched to 2.3 mm (0.0937 inch), bonded to an ABS plastic or extruded aluminum insert with adhesive. Background color is painted in acrylic enamel.
    - 3) Changeable Paper/ Insert Holder - Extruded insert holder with integral Rail Insert for connection with structural back panel in 6063T5 aluminum with a black anodized finish. Inserts into holder are paper with a clear 0.7 mm (0.030 inch) textured cover. Background color is painted in acrylic lacquer.
    - 4) Acrylic - 2 mm (0.080 inch) non-glare acrylic. Pressure bonded to extruded Rail Insert using adhesive. Background color is painted in acrylic lacquer or acrylic enamel.
    - 5) Extruded 6063T5 aluminum with a black anodized finish Insert Holder with integral Rail Insert for connection with Structural Back Panel to hold a 0.7 mm (0.030 inch) textured polycarbonate insert and a Sliding Tile which mounts in the Inset Holder and slides horizontally.
    - 6) End Caps - Extruded using 6063T5 aluminum with a black anodized. End Caps interlock with Rail Back with clips to form an integral unit, enclosing and securing the changeable Copy Panels, without requiring tools for assembly.
      - a) Shall be interchangeable to either end of sign and to other signs in the system of equal height.
      - b) Mechanical fasteners can be added to the End Caps that will secure it to Rail Back to make sign tamper resistant.

- 7) Joiners - Extruded using 6063T5 aluminum with a black anodized finish. Rail Joiners connect Rail Backs together blindly, providing a butt joint between Copy Inserts.
- 8) Accent Joiners - Extruded using 6063T5 aluminum with a mirror polished finish. Joiner shall connect Rail Backs together with a visible 3 mm (0.125 inch) horizontal rib, flush to the adjacent Copy Panel surfaces.
- 9) Top Accent Rail - Extruded using 6063T5 aluminum with a mirror polished finish. Rail shall provide 3 mm (0.125 inch) high decorative trim cap, which butts flush to adjacent Copy Panel and encloses top of Rail Back and Copy Panel.
- 10) Typography
  - a) Vinyl First Surface Copy (non-tactile) - Applied Vinyl copy.
  - b) Subsurface Copy Inserts - Textured 1 mm (0.030 inch) clear polycarbonate face with subsurface applied Vinyl copy. Face shall be back sprayed with paint and laminated to an extruded aluminum carrier insert.
  - c) Integral Tactile Copy Inserts - phenolic photo polymer etched with 2.3 mm (0.0937 inch) raised copy.
  - d) Silk-screened First Surface Copy (non-tactile) - Injection molded or extruded ABS plastic or aluminum insert with first surface applied enamel silk-screened copy.

C. Sign Type Family 01, 02.01 thru 02.05, 08, 09 and 20:

1. All text and graphics are to be first surface silk-screened.
2. IN-01.12 & IN-01.13: Refer to Sign Type 03 specification for tactile and Braille portion of sign.
3. IN-02.4: All text and graphics are to be first surface vinyl letters.
4. IN-01.1: Preparation of artwork for reproduction of "fire and emergency evacuation maps" is by manufacturer.

D. Sign Type Families 03:

1. Tactile sign is to be made from a material that provides for letters, numbers and Braille to be integral with sign plaque material such as: photosensitive polyamide resin, etched metal, sandblasted phenolic or embossed material. Do not apply letters, numbers and Braille with adhesive.
2. Numbers, letters and Braille to be raised 0.793 mm (0.0312 inches) from the background surface. The draft of the letters, numbers and Braille to be tapered, vertical and clean.
3. Braille dots are to conform with standard dimensions for literary Braille; (a) Dot base diameter: 1.5 mm (0.059 inch); (b) Inter-dot spacing: 2.3 mm (0.090 inch); (c) Horizontal separation

- between cells: 6.0 mm (0.241 inch); (d) Vertical separation between cells: 10.0 mm (0.395 inch)
4. Entire assembly is painted in specified color. After painting, apply white or other specified color to surface of the numbers and letters. Entire sign is to have a protective clear coat sealant applied.
  5. Complete sign is to have an eggshell finish (11 to 19 degree on a 60 degree glossmeter).
- E. Sign Type Family 04 and 11:
1. All text and graphics are to be first surface applied vinyl letters.
  2. IN-04: When a Type IN-04 is to be mounted under a Type IN03, a connecting Accent Joiner is to be used to create a singular integrated sign.
- F. Sign Type 05:
1. Text if added to Copy Insert module to be first surface applied vinyl letters.
- G. Sign Type Family 06 and 07:
1. A11 text and graphics are to be first surface applied vinyl letters except for under sliding tile.
  2. Protect text, which is covered by sliding tile, so tile does not wear away letters.
- H. Sign Type Family 10:
1. Pocket depth is to be 0.3 mm (0.0150 inch).
- I. Sign Type Family 12 and 13:
1. A11 text and graphics are to be first surface applied vinyl letters.
  2. IN-12: Provide felt, cork or similar material on bottom of desk mounting bracket to protect counter surfaces.
- J. Sign Type Family 14, 15, and 16:
1. A11 text and graphics are to be first surface applied vinyl letters.
  2. IN-14.06: When added to top of IN-14.01, IN-14.04, or IN-14.05 a connecting Accent Joiner is to be used to create a singular integrated sign.
  3. Ceiling mounted signs required mounting hardware on the sign that allows for sign disconnection, removal and reinstallation and reconnection.
- K. Sign Type Family 17:
1. A11 text and graphics are to be first surface applied vinyl letters.
  2. IN-17: Directory constructed using elements of the Component System.

L. Sign Type Family 18:

1. A11 text and graphics are to be first surface applied stylus cut vinyl letters.
2. Provide in specified typeface, color and spacing, with each message or message group on a single quick release backing sheet.

M. Sign Type Family 19:

1. Dimensional letters are mill or laser cut acrylic in the size and thickness noted in the drawings.
2. Draft of letters is perpendicular to letters face.
3. All corners such as where a letter stem and bar intersect are to be square so the letter form is accurately reproduced.
4. Paint letters with acrylic polyurethane in specified color and finish.

N. Sign Type Family (See Specialty Signs Section) 21:

1. IN-21.01: 57 mm (2.25 inches) polished aluminum tube mounted to weighted 356 mm (14 inches) diameter polished aluminum base. Sign bracket to hold a 6 mm (0.25 inch) sign plaque.
2. IN-21.02: 57 mm (2.25 inches) polished aluminum tube vertical support mounted to a weighted polished 57 mm (2.25 inches) aluminum tubular base. Rail Back mechanically connected to vertical supports with Copy Panel attached to front and back.
3. IN-21.03 & 21.04: IN-21.02: 57 mm (2.25 inches) polished aluminum tube vertical support mounted to a weighted polished 57 mm (2.25 inches) aluminum tubular base. Rail Back mechanically connected to vertical supports with hinged locking glass door. Black felt covered changeable letter board or tan vinyl impregnated cork tack surface as background within case.

O. Sign Type Family 22:

1. IN-22.01: Extruded aluminum clip anodized black containing rollers to pinch and release paper. End caps are black plastic.
2. IN-22.02: Patient Information holder constructed of 18 gauge formed sheet metal painted in specified color. Polished aluminum connecting rods and buttons. Button covers for mounting screws are to permanently attach and securely conceal screws.

P. Temporary Interior Signs:

1. Fabricated from 50 kg (110 pound) matte finished white paper cut to 100 mm (4 inches) wide by 300 mm (12 inches) long. Punched 3 mm (0.125 inch) hole with edge of hole spaced 13 mm (0.5 inch) in from edge and centered on 100 mm (4-inch) side. Reinforce hole on both

- sides with suitable material that prevents tie form pulling through hole. Ties are steel wire 0.3 mm (0.120 inch) thick attached to tag with twist leaving 150 mm (6-inch) long free ends.
2. Mark architectural room number on sign, with broad felt marker in clearly legible numbers or letters that identify room, corridor or space as shown on floor plans.
  3. Install temporary signs to all rooms that have a room, corridor or space number. Attach to door frame, door knob or door pull.
    - a. Doors that do not require signs are: corridor doors in corridor with same number, folding doors or partitions, toilet doors, bathroom doors within and between rooms, closet doors within rooms, communicating doors in partitions between rooms with corridor entrance doors.
    - b. Replace and missing damaged or illegible signs.

## **2.5 FABRICATION**

- A. Design components to allow for expansion and contraction for a minimum material temperature range of 56 degrees C (100 degrees F), without causing buckling, excessive opening of joints or over stressing of adhesives, welds and fasteners.
- B. Form work to required shapes and sizes, with true curve lines and angles. Provide necessary rebates, lugs and brackets for assembly of units. Use concealed fasteners whenever and wherever possible.
- C. Shop fabricate so far as practicable. Joints fastened flush to conceal reinforcement, or welded where thickness or section permits.
- D. Contact surfaces of connected members to be true. Assemble so joints will be tight and practically unnoticeable, without use of filling compound.
- E. Signs shall have fine, even texture and be flat and sound. Lines and miters sharp, arises unbroken, profiles accurate and ornament true to pattern. Plane surfaces be smooth, flat, and without oil-canning, free of rack and twist. Maximum variation from plane of surface plus or minus 0.3 mm (0.015 inch). Restore texture to filed or cut areas.
- F. Level or straighten wrought work. Members shall have sharp lines and angles and smooth surfaces.
- G. Extruded members to be free from extrusion marks. Square turns and corners sharp, curves true.
- H. Drill holes for bolts and screws. Conceal fastenings where possible. Exposed ends and edges mill smooth, with corners slightly rounded. Form joints exposed to weather to exclude water.
- I. Finish hollow signs with matching material on all faces, tops, bottoms and ends. Edge joints tightly mitered to give appearance of solid material.



- J. All painted surfaces properly primed. Finish coating of paint to have complete coverage with no light or thin applications allowing substrate or primer to show. Finished surface smooth, free of scratches, gouges, drips, bubbles, thickness variations, foreign matter, and other imperfections.
- K. Movable parts, including hardware, are to be cleaned and adjusted to operate as designed without binding or deformation of members. Doors and covers centered in opening or frame. All contact surfaces fit tight and even without forcing or warping components.
- L. Pre-assemble items in shop to greatest extent possible to minimize field splicing and assembly. Disassemble units only as necessary for shipping and handling limitations. Clearly mark units for re-assembly and coordinated installation.
- M. No signs are to be manufactured until final sign message schedule and location review has been completed by the Project Engineer and forwarded to contractor.

### **PART 3 - EXECUTION**

#### **3.1 INSTALLATION**

- A. Protect products against damage during field handling and installation. Protect adjacent existing and newly placed construction, landscaping and finishes as necessary to prevent damage during installation. Paint and touch up any exposed fasteners and connecting hardware to match color and finish of surrounding surface.
- B. Mount signs in proper alignment, level and plumb according to the sign location plan and the dimensions given on elevation and sign location drawings. Where otherwise not dimensioned, signs shall be installed where best suited to provide a consistent appearance throughout the project. When exact position, angle, height or location is in doubt, contact Project Engineer for clarification.
- C. Contractor shall be responsible for all signs that are damaged, lost or stolen while materials are on the job site and up until the completion and final acceptance of the job.
- D. Remove or correct signs or installation work Project Engineer determines as unsafe or as an unsafe condition.
- E. At completion of sign installation, clean exposed sign surfaces. Clean and repair any adjoining surfaces and landscaping that became soiled or damaged as a result of installation of signs.
- F. Locate signs as shown on the Sign Location Plans.
- G. Certain signs may be installed on glass. A blank glass back up is required to be placed on opposite side of glass exactly behind sign being installed. This blank glass back up is to be the same size as sign being installed.

- H. Contractor will be responsible for verifying that behind each sign location there are no utility lines that will be affected by installation of signs. Any damage during installation of signs to utilities will be the sole responsibility of the Contractor to correct and repair.
- I. Furnish inserts and anchoring devices which must be set in concrete or other material for installation of signs. Provide setting drawings, templates, instructions and directions for installation of anchorage devices which may involve other trades.

- - - END - - -

**SECTION 10 26 00  
WALL AND DOOR PROTECTION**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies corner guards.

**1.2 SUBMITTALS**

- A. General: Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Product data and detailed specifications for each system component and installation accessory required, including installation methods for each type of substrate.
- C. Shop drawings showing locations, extent and installation details of corner guards. Show methods of attachment to adjoining construction.
- D. Samples for verification purposes: Submit the following samples, as proposed for this work, for verification of color, texture, pattern and guard.
  - 1. 300 mm (12-inch) long sample of each model specified.
- E. Product test reports from a qualified independent testing laboratory showing compliance of each component with requirements indicated.
- F. Maintenance data for wall protection system components for inclusion in the operating and maintenance manuals specified in Division 01, GENERAL REQUIREMENTS.

**1.04 QUALITY ASSURANCE**

- A. Installer qualifications: Engage an installer who has no less than 3 years experience in installation of systems similar in complexity to those required for this project.
- B. Manufacturer's qualifications: Not less than 5 years experience in the production of specified products and a record of successful in-service performance.
- C. Code compliance: Assemblies shall conform to all applicable codes including IBC.
- D. Fire performance characteristics: Provide engineered PETG wall protection system components with UL label indicating that they are identical to those tested in accordance with ASTM E84 for Class 1 characteristics listed below:
  - 1. Flame spread: 25 or less
  - 2. Smoke developed: 450 or less

- E. Chemical and stain resistance: Provide wall protection system components with chemical and stain resistance in accordance with ASTM D543.
- F. Color match: Provide wall protection components that are color matched in accordance with the following:
  - 1. Delta Ecmc of no greater than 1.0 using CIELab color space.
- G. Single source responsibility: Provide all components of the wall protection system manufactured by the same company to ensure compatibility of color, texture and physical properties.

#### **1.4 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
  - D543-14..... Standard Practices for Evaluating the Resistance of Plastics to Chemical Reagents
  - E84-13a..... Surface Burning Characteristics of Building Materials
- C. Underwriters Laboratories Inc. (UL):
  - Annual Issue..... Building Materials Directory

#### **1.5 DELIVERY, STORAGE AND HANDLING**

- A. Deliver materials to the project site in unopened original factory packaging clearly labeled to show manufacturer.
- B. Store materials in original, undamaged packaging in a cool, dry place out of direct sunlight and exposure to the elements. A minimum room temperature of 4 degrees C (40 degrees F) and a maximum of 38 degrees C (100 degrees F) shall be maintained.
- C. Material must be stored flat.

#### **1.5 PROJECT CONDITIONS**

- A. Materials must be acclimated in an environment of 18-24 degrees C (65-75 degrees F) for at least 24 hours prior to beginning the installation.
- B. Installation areas must be enclosed and weatherproofed before installation commences.

## **PART 2 - PRODUCTS**

### **2.1 BASIS OF DESIGN**

- A. Interior surface protection products specified herein and installed on the submittal drawings shall be manufactured by Construction Specialties, Inc.
- B. Products of other manufacturers satisfying the requirements of this specification shall be acceptable.

### **2.2 MATERIALS**

- A. Engineered PETG: Extruded material shall be high impact Acrovyn 4000 with smooth surface texture. Chemical and stain resistance shall be per ASTM D543 standards as established by the manufacturer. Colors to be indicated in the Finish Schedule from one of manufacturer's standard color range.

### **2.3 CORNER GUARDS**

- A. Engineered PETG Corner Guards to be Acrovyn 4000 by Construction Specialties: Surface mounted guards consisting of continuous Acrovyn 4000 cover.
  - 1. Model VA-200N, 90-degree surface mounted corner guard with 38 mm (1-½-inch) legs and self-adhesive tape backing.

### **2.4 FABRICATION**

- A. General: Fabricate wall protection systems to comply with requirements indicated for design, dimensions, detail, finish and member sizes.

## **PART 3 - INSTALLATION**

### **3.1 EXAMINATION**

- A. Verification of conditions: Examine areas and conditions under which work is to be performed and identify conditions detrimental to proper or timely completion.
  - 1. Do not proceed until unsatisfactory conditions have been corrected.

### **3.2 PREPARATION**

- A. Surface preparation: Prior to installation, clean substrate to remove dirt, debris and loose particles. Perform additional preparation procedures as required by manufacturer's instructions.
- B. Protection: Take all necessary steps to prevent damage to material during installation as required in manufacturer's installation instructions.

### **3.3 INSTALLATION**

- A. Install the work of this section in strict accordance with the manufacturer's recommendations, using only approved mounting hardware, and locating all components firmly into position, level and plumb.
- B. Temperature at the time of installation must be between 18-24 degrees C (65-75 degrees F) and be maintained for at least 48 hours after the installation.

### **3.4 CLEANING**

- A. General: Immediately upon completion of installation, clean guards in accordance with manufacturer's recommended cleaning method.
- B. Remove surplus materials, rubbish and debris resulting from installation as work progresses and upon completion of work.

### **3.5 PROTECTION**

- A. Protect installed materials to prevent damage by other trades. Use materials that may be easily removed without leaving residue or permanent stains.

--- E N D ---

**SECTION 13 05 41**  
**SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS**

**PART 1 – GENERAL**

**1.1 DESCRIPTION:**

- A. Provide seismic restraint in accordance with the requirements of this section in order to maintain the integrity of nonstructural components of the building so that they remain safe and functional in case of seismic event.
- B. Definitions: Non-structural building components are components or systems that are not part of the building's structural system whether inside or outside, above or below grade. Non-structural components of buildings include:
  - 1. Architectural Elements: Facades that are not part of the structural system and its shear resistant elements; cornices and other architectural projections and parapets that do not function structurally; glazing; nonbearing partitions; suspended ceilings; stairs isolated from the basic structure; cabinets; bookshelves; medical equipment; and storage racks.
  - 2. Electrical Elements: Power and lighting systems; substations; switchgear and switchboards; auxiliary engine-generator sets; transfer switches; motor control centers; motor generators; selector and controller panels; fire protection and alarm systems; special life support systems; and telephone and communication systems.

**1.2 RELATED WORK:**

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS

**1.3 QUALITY CONTROL:**

- A. Shop-Drawing Preparation:
  - 1. Have seismic-force-restraint shop drawings and calculations prepared by a professional structural engineer experienced in the area of seismic force restraints. The professional structural engineer shall be registered in the state where the project is located.
  - 2. Submit design tables and information used for the design-force levels, stamped and signed by a professional structural engineer registered in the State where project is located.
- B. Coordination:
  - 1. Do not install seismic restraints until seismic restraint submittals are approved by the Project Engineer.
  - 2. Coordinate and install trapezes or other multi-pipe hanger systems prior to pipe installation.

- C. Seismic Certification: In structures assigned to IBC Seismic Design Category C, D, E, or F, permanent equipment and components are to have Special Seismic Certification in accordance with requirements of section 13.2.2 of ASCE 7 except for equipment that is considered rugged as listed in section 2.2 OSHPD code application notice CAN No. 2-1708A.5, and shall comply with section 13.2.6 of ASCE 7.

#### **1.4 SUBMITTALS:**

- A. Submit a coordinated set of equipment anchorage drawings prior to installation including:
1. Description, layout, and location of items to be anchored or braced with anchorage or brace points noted and dimensioned.
  2. Details of anchorage or bracing at large scale with all members, parts brackets shown, together with all connections, bolts, welds etc. clearly identified and specified.
  3. Numerical value of design seismic brace loads
  4. For expansion bolts, include design load and capacity if different from those specified.
- B. Submit prior to installation, a coordinated set of bracing drawings for seismic protection of piping, with data identifying the various support-to-structure connections and seismic bracing structural connections, include:
1. Single-line piping diagrams on a floor-by-floor basis. Show all suspended piping for a given floor on the same plane.
  2. Type of pipe (Copper, steel, cast iron, insulated, non-insulated, etc.)
  3. Pipe contents
  4. Structural framing
  5. Location of all gravity load pipe supports and spacing requirements
  6. Numerical value of gravity load reactions
  7. Location of all seismic bracing
  8. Numerical value of applied seismic brace loads
  9. Type of connection (Vertical support, vertical support with seismic brace etc.)
  10. Seismic brace reaction type (tension or compression): Details illustrating all support and bracing components, methods of connections, and specific anchors to be used.
- C. Submit prior to installation, bracing drawings for seismic protection of suspended ductwork and suspended electrical and communication cables, include:



1. Details illustrating all support and bracing components, methods of connection, and specific anchors to be used.
  2. Numerical value of applied gravity and seismic loads and seismic loads acting on support and bracing components.
  3. Maximum spacing of hangers and bracing.
  4. Seal of registered structural engineer responsible for design.
- D. Submit design calculations prepared and sealed by the registered structural engineer specified above in paragraph 1.3A.
- E. Submit for concrete anchors, the appropriate ICBC evaluation reports, OSHPD pre-approvals, or lab test reports verifying compliance with OSHPD Interpretation of Regulations 28-6.

#### **1.5 APPLICABLE PUBLICATIONS:**

- A. The Publications listed below (including amendments, addenda revisions, supplements and errata) form a part of this specification to the extent referenced. The publications are referenced in text by basic designation only.
- B. American Concrete Institute (ACI):
- 355.2-07 ..... Qualification for Post-Installed Mechanical Anchors in Concrete and Commentary
- C. American Institute of Steel Construction (AISC):
- Load and Resistance Factor Design, Volume 1, Second Edition
- D. American Society for Testing and Materials (ASTM):
- A36/A36M-08 ..... Standard Specification for Carbon Structural Steel
- A53/A53M-10 ..... Standard Specification for Pipe, Steel, Black and Hot-Dipped, Zinc-Coated, Welded and Seamless
- A307-10 ..... Standard Specification for Carbon Steel Bolts and Studs; 60,000 PSI Tensile Strength.
- A325-10 ..... Standard Specification for Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength
- A325M-09 ..... Standard Specification for High-Strength Bolts for Structural Steel Joints [Metric]
- A490-10 ..... Standard Specification for Heat-Treated Steel Structural Bolts, 150 ksi Minimum Tensile Strength

- A490M-10.....Standard Specification for High-Strength Steel Bolts, Classes 10.9 and 10.9.3, for Structural Steel Joints [Metric]
- A500/A500M-10 .....Standard Specification for Cold-Formed Welded and Seamless Carbon Steel Structural Tubing in Rounds and Shapes
- A501-07 .....Specification for Hot-Formed Welded and Seamless Carbon Steel Structural Tubing
- A615/A615M-09 .....Standard Specification for Deformed and Plain Billet-Steel Bars for Concrete Reinforcement
- A992/A992M-06 .....Standard Specification for Steel for Structural Shapes for Use in Building Framing
- A996/A996M-09 .....Standard Specification for Rail-Steel and Axel-Steel Deformed Bars for Concrete Reinforcement
- E488-96(R2003).....Standard Test Method for Strength of Anchors in Concrete and Masonry Element
- E. American Society of Civil Engineers (ASCE 7) Latest Edition
- F. International Building Code (IBC) Latest Edition
- G. VA Seismic Design Requirements, H-18-8, February 2011
- H. National Uniform Seismic Installation Guidelines (NUSIG)
- I. Sheet Metal and Air Conditioning Contractors National Association  
(SMACNA): Seismic Restraint Manual - Guidelines for Mechanical Systems, 1998 Edition and Addenda

## **1.6 REGULATORY REQUIREMENT:**

- A. IBC 2015
- B. Exceptions: The seismic restraint of the following items may be omitted:
1. Equipment weighing less than 400 pounds, which is supported directly on the floor or roof.
  2. Equipment weighing less than 20 pounds, which is suspended from the roof or floor or hung from a wall.
  3. Gas and medical piping less than 2 ½ inches inside diameter
  5. All other piping less than 2 ½ inches inside diameter, except for automatic fire suppression systems

6. All piping suspended by individual hangers, 12 inches or less in length from the top of pipe to the bottom of the support for the hanger.
7. All electrical conduits, less than 2 ½ inches inside diameter
8. All rectangular air handling ducts less than six square feet in cross sectional area
9. All round air handling ducts less than 28 inches in diameter
10. All ducts suspended by hangers 12 inches or less in length from the top of the duct to the bottom of support for the hanger.

## **PART 2 – PRODUCTS**

### **2.1 STEEL:**

- A. Structural Steel: ASTM A36
- B. Structural Tubing: ASTM A500, Grade B
- C. Structural Tubing: ASTM A501
- D. Steel Pipe: ASTM A53/A53M, Grade B
- E. Bolts & Nuts: ASTM A307

### **2.2 CAST-IN-PLACE CONCRETE:**

- A. Concrete: 28 day strength,  $f'_c = 25$  MPa (3,000 psi)
- B. Reinforcing Steel: ASTM A615/615M or ASTM A996/A996M deformed

## **PART 3 – EXECUTION**

### **3.1 CONSTRUCTION, GENERAL:**

- A. Provide equipment supports and anchoring devices to withstand the seismic design forces, so that when seismic design forces are applied, the equipment cannot displace, overturn, or become inoperable.
- B. Provide anchorages in conformance with recommendations of the equipment manufacturer and as shown on approved shop drawings and calculations.
- C. Construct seismic restraints and anchorage to allow for thermal expansion.
- D. Testing Before Final Inspection:
  1. Test 10-percent of anchors in masonry and concrete per ASTM E488, and ACI 355.2 to determine that they meet the required load capacity. If any anchor fails to meet the required load, test the next 20 consecutive anchors, which are required to have zero failure, before resuming the 10-percent testing frequency.

2. Before scheduling Final Inspection, submit a report on this testing indicating the number and location of testing, and what anchor-loads were obtained.

### **3.2 EQUIPMENT RESTRAINT AND BRACING:**

- A. See drawings for equipment to be restrained or braced.

### **3.3 MECHANICAL DUCTWORK AND PIPING; BOILER PLANT STACKS AND BREACHING; ELECTRICAL BUSWAYS, CONDUITS, AND CABLE TRAYS; AND TELECOMMUNICATION WIRES AND CABLE TRAYS**

- A. Support and brace mechanical ductwork and piping; electrical busways, conduits and cable trays; and telecommunication wires and cable trays to resist directional forces (lateral, longitudinal and vertical).
- B. Brace duct and breeching branches with a minimum of 1 brace per branch.
- D. Provide supports and anchoring so that, upon application of seismic forces, piping remains fully connected as operable systems which will not displace sufficiently to damage adjacent or connecting equipment, or building members.
- E. Seismic Restraint of Piping:
  1. Design criteria:
    - a. Piping resiliently supported: Restrain to support 120 percent of the weight of the systems and components and contents.
    - b. Piping not resiliently supported: Restrain to support 60 percent of the weight of the system components and contents.
- F. Piping Connections: Provide flexible connections where pipes connect to equipment. Make the connections capable of accommodating relative differential movements between the pipe and equipment under conditions of earthquake shaking.

### **3.4 PARTITIONS**

- A. In buildings with flexible structural frames, anchor partitions to only structural element, such as a floor slab, and separate such partition by a physical gap from all other structural elements.
- B. Properly anchor masonry walls to the structure for restraint, so as to carry lateral loads imposed due to earthquake along with their own weight and other lateral forces.

### **3.5 CEILINGS AND LIGHTING FIXTURES**

- A. At regular intervals, laterally brace suspended ceilings against lateral and vertical movements, and provide with a physical separation at the walls.

- B. Independently support and laterally brace all lighting fixtures. Refer to applicable portion of lighting specification, Section 26 51 00, INTERIOR LIGHTING.

--- E N D ---

**SECTION 26 05 11  
REQUIREMENTS FOR ELECTRICAL INSTALLATIONS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section applies to all sections of Division 26.
- B. Furnish and install, lighting, lighting controls, and related accessories in accordance with the specifications and drawings.
- D. Conductor ampacities specified or shown on the drawings are based on copper conductors, with the conduit and raceways sized per NEC. Aluminum conductors are prohibited.

**1.2 MINIMUM REQUIREMENTS**

- A. The International Building Code (IBC), National Electrical Code (NEC), Underwriters Laboratories, Inc. (UL), and National Fire Protection Association (NFPA) codes and standards are the minimum requirements for materials and installation.
- B. The drawings and specifications shall govern in those instances where requirements are greater than those stated in the above codes and standards.

**1.3 TEST STANDARDS**

- A. All materials and equipment shall be listed, labeled, or certified by a Nationally Recognized Testing Laboratory (NRTL) to meet Underwriters Laboratories, Inc. (UL), standards where test standards have been established. Materials and equipment which are not covered by UL standards will be accepted, providing that materials and equipment are listed, labeled, certified or otherwise determined to meet the safety requirements of a NRTL. Materials and equipment which no NRTL accepts, certifies, lists, labels, or determines to be safe, will be considered if inspected or tested in accordance with national industrial standards, such as ANSI, NEMA, and NETA. Evidence of compliance shall include certified test reports and definitive shop drawings.
- B. Definitions:
  - 1. Listed: Materials and equipment included in a list published by an organization that is acceptable to the Authority Having Jurisdiction and concerned with evaluation of products or services, that maintains periodic inspection of production or listed materials and equipment or periodic evaluation of services, and whose listing states that the materials and equipment either meets appropriate designated standards or has been tested and found suitable for a specified purpose.
  - 2. Labeled: Materials and equipment to which has been attached a label, symbol, or other identifying mark of an organization that is acceptable to the Authority Having Jurisdiction and concerned with product evaluation, that maintains periodic inspection of production of labeled materials and equipment, and by whose labeling the manufacturer indicates compliance with appropriate standards or performance in a specified manner.
  - 3. Certified: Materials and equipment which:

- a. Have been tested and found by a NRTL to meet nationally recognized standards or to be safe for use in a specified manner.
  - b. Are periodically inspected by a NRTL.
  - c. Bear a label, tag, or other record of certification.
4. Nationally Recognized Testing Laboratory: Testing laboratory which is recognized and approved by the Secretary of Labor in accordance with OSHA regulations.

#### **1.4 QUALIFICATIONS (PRODUCTS AND SERVICES)**

- A. Manufacturer's Qualifications: The manufacturer shall regularly and currently produce, as one of the manufacturer's principal products, the materials and equipment specified for this project, and shall have manufactured the materials and equipment for at least three years.
- B. Product Qualification:
  1. Manufacturer's materials and equipment shall have been in satisfactory operation, on three installations of similar size and type as this project, for at least three years.
  2. The Government reserves the right to require the Contractor to submit a list of installations where the materials and equipment have been in operation before approval.
- C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

#### **1.5 APPLICABLE PUBLICATIONS**

- A. Applicable publications listed in all Sections of Division 26 are the latest issue, unless otherwise noted.
- B. Products specified in all sections of Division 26 shall comply with the applicable publications listed in each section.

#### **1.6 MANUFACTURED PRODUCTS**

- A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, and for which replacement parts shall be available.
- B. When more than one unit of the same class or type of materials and equipment is required, such units shall be the product of a single manufacturer.
- C. Equipment Assemblies and Components:
  1. Components of an assembled unit need not be products of the same manufacturer.
  2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
  3. Components shall be compatible with each other and with the total assembly for the intended service.
  4. Constituent parts which are similar shall be the product of a single manufacturer.
- D. Factory wiring and terminals shall be identified on the equipment being furnished and on all wiring diagrams.

## **1.7 VARIATIONS FROM CONTRACT REQUIREMENTS**

- A. Where the Government or the Contractor requests variations from the contract requirements, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, conduits, wire, controls, and installation methods.

## **1.8 MATERIALS AND EQUIPMENT PROTECTION**

- A. Materials and equipment shall be protected during shipment and storage against physical damage, vermin, dirt, corrosive substances, fumes, moisture, cold and rain.
  - 1. Store materials and equipment indoors in clean dry space with uniform temperature to prevent condensation.
  - 2. During installation, equipment shall be protected against entry of foreign matter, and be vacuum-cleaned both inside and outside before testing and operating. Compressed air shall not be used to clean equipment. Remove loose packing and flammable materials from inside equipment.
  - 3. Damaged equipment shall be repaired or replaced, as determined by the Project Engineer.
  - 4. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.
  - 5. Damaged paint on equipment shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

## **1.9 WORK PERFORMANCE**

- A. All electrical work shall comply with the requirements of NFPA 70 (NEC), NFPA 70B, NFPA 70E, OSHA Part 1910 subpart J – General Environmental Controls, OSHA Part 1910 subpart K – Medical and First Aid, and OSHA Part 1910 subpart S – Electrical, in addition to other references required by contract.
- B. Job site safety and worker safety is the responsibility of the Contractor.
- C. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished in this manner for the required work, the following requirements are mandatory:
  - 1. Electricians must use full protective equipment (i.e., certified and tested insulating material to cover exposed energized electrical components, certified and tested insulated tools, etc.) while working on energized systems in accordance with NFPA 70E.
  - 2. Before initiating any work, a job specific work plan must be developed by the Contractor with a peer review conducted and documented by the Project Engineer and Medical Center staff. The work plan must include procedures to be used on and near the live electrical equipment, barriers to be installed, safety equipment to be used, and exit pathways.
  - 3. Work on energized circuits or equipment cannot begin until prior written approval is obtained from the Project Engineer.



- D. For work that affects existing electrical systems, arrange, phase and perform work to assure minimal interference with normal functioning of the facility. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.
- E. New work shall be installed and connected to existing work neatly, safely and professionally. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.
- F. Coordinate location of equipment and conduit with other trades to minimize interference.

#### **1.10 EQUIPMENT INSTALLATION AND REQUIREMENTS**

- A. Equipment location shall be as close as practical to locations shown on the drawings.
- B. Working clearances shall not be less than specified in the NEC.
- C. Inaccessible Equipment:
  - 1. Where the Government determines that the Contractor has installed equipment not readily accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
  - 2. "Readily accessible" is defined as being capable of being reached quickly for operation, maintenance, or inspections without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.
- D. Electrical service entrance equipment and arrangements for temporary and permanent connections to the electric utility company's system shall conform to the electric utility company's requirements. Coordinate fuses, circuit breakers and relays with the electric utility company's system, and obtain electric utility company approval for sizes and settings of these devices.

#### **1.12 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. The Government's approval shall be obtained for all materials and equipment before delivery to the job site. Delivery, storage or installation of materials and equipment which has not had prior approval will not be permitted.
- C. All submittals shall include six copies of adequate descriptive literature, catalog cuts, shop drawings, test reports, certifications, samples, and other data necessary for the Government to ascertain that the proposed materials and equipment comply with drawing and specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify specific materials and equipment being submitted.
- D. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.
  - 1. Mark the submittals, "SUBMITTED UNDER SECTION \_\_\_\_\_".

2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
  3. Submit each section separately.
- E. The submittals shall include the following:
1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, manuals, pictures, nameplate data, and test reports as required.
  2. Elementary and interconnection wiring diagrams for communication and signal systems, control systems, and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
  3. Parts list which shall include information for replacement parts and ordering instructions, as recommended by the equipment manufacturer.
- F. Maintenance and Operation Manuals:
1. Submit as required for systems and equipment specified in the technical sections. Furnish in hardcover binders or an approved equivalent.
  2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, material, equipment, building, name of Contractor, and contract name and number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the material or equipment.
  3. Provide a table of contents and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
  4. The manuals shall include:
    - a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
    - b. A control sequence describing start-up, operation, and shutdown.
    - c. Description of the function of each principal item of equipment.
    - d. Installation instructions.
    - e. Safety precautions for operation and maintenance.
    - f. Diagrams and illustrations.
    - g. Periodic maintenance and testing procedures and frequencies, including replacement parts numbers.
    - h. Performance data.
    - i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare and replacement parts, and name of servicing organization.

- j. List of factory approved or qualified permanent servicing organizations for equipment repair and periodic testing and maintenance, including addresses and factory certification qualifications.
- G. Approvals will be based on complete submission of shop drawings, manuals, test reports, certifications, and samples as applicable.

**1.13 SINGULAR NUMBER**

- A. Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

**1.14 ACCEPTANCE CHECKS AND TESTS**

- A. The Contractor shall furnish the instruments, materials, and labor for tests.

**1.15 TRAINING**

- A. Training shall be provided in accordance with Article 1.25, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.
- B. Training shall be provided for the particular equipment or system as required in each associated specification.
- C. A training schedule shall be developed and submitted by the contractor and approved by the Project Engineer at least 30 days prior to the planned training.

**PART 2 - PRODUCTS (NOT USED)**

**PART 3 - EXECUTION (NOT USED)**

---END---

**SECTION 26 05 19**  
**LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the furnishing, installation, connection, and testing of the electrical conductors and cables for use in electrical systems rated 600 V and below, indicated as cable(s), conductor(s), wire, or wiring in this section.

**1.2 RELATED WORK**

- A. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire-resistant rated construction.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.

**1.3 QUALITY ASSURANCE**

- A. Refer to Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES), in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

**1.4 FACTORY TESTS**

- A. Conductors and cables shall be thoroughly tested at the factory per NEMA to ensure that there are no electrical defects. Factory tests shall be certified.

**1.5 SUBMITTALS**

- A. Submit six copies of the following in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
  - 1. Shop Drawings:
    - a. Submit sufficient information to demonstrate compliance with drawings and specifications.
    - b. Submit the following data for approval:
      - 1) Electrical ratings and insulation type for each conductor and cable.
      - 2) Splicing materials and pulling lubricant.
  - 2. Certifications: Two weeks prior to final inspection, submit the following.
    - a. Certification by the manufacturer that the conductors and cables conform to the requirements of the drawings and specifications.
    - b. Certification by the Contractor that the conductors and cables have been properly installed, adjusted, and tested.

**1.6 APPLICABLE PUBLICATIONS**

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are reference in the text by designation only.
- B. American Society of Testing Material (ASTM):

- D2301-10 ..... Standard Specification for Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape
- D2304-10 ..... Test Method for Thermal Endurance of Rigid Electrical Insulating Materials
- D3005-10 ..... Low-Temperature Resistant Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape
- C. National Electrical Manufacturers Association (NEMA):
  - WC 70-09 ..... Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy
- D. National Fire Protection Association (NFPA):
  - 70-11 ..... National Electrical Code (NEC)
- E. Underwriters Laboratories, Inc. (UL):
  - 44-10 ..... Thermoset-Insulated Wires and Cables
  - 83-08 ..... Thermoplastic-Insulated Wires and Cables
  - 467-07 ..... Grounding and Bonding Equipment
  - 486A-486B-03 ..... Wire Connectors
  - 486C-04 ..... Splicing Wire Connectors
  - 486D-05 ..... Sealed Wire Connector Systems
  - 486E-09 ..... Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors
  - 493-07 ..... Thermoplastic-Insulated Underground Feeder and Branch Circuit Cables
  - 514B-04 ..... Conduit, Tubing, and Cable Fittings

## **PART 2 - PRODUCTS**

### **2.1 CONDUCTORS AND CABLES**

- A. Conductors and cables shall be in accordance with NEMA, UL, as specified herein, and as shown on the drawings.
- B. All conductors shall be copper.
- C. Single Conductor and Cable:
  - 1. No. 12 AWG: Minimum size, except where smaller sizes are specified herein or shown on the drawings.
  - 2. No. 8 AWG and larger: Stranded.
  - 3. No. 10 AWG and smaller: Solid; except shall be stranded for final connection to motors, transformers, and vibrating equipment.
  - 4. Insulation: THHN-THWN and XHHW-2. XHHW-2 shall be used for isolated power systems.
- E. Color Code:
  - 1. No. 10 AWG and smaller: Solid color insulation or solid color coating.

2. No. 8 AWG and larger: Color-coded using one of the following methods:
  - a. Solid color insulation or solid color coating.
  - b. Stripes, bands, or hash marks of color specified.
  - c. Color using 19 mm (0.75 inches) wide tape.
4. For modifications and additions to existing wiring systems, color coding shall conform to the existing wiring system.
5. Conductors shall be color-coded as follows:

208/120 V	Phase	480/277 V
Black	A	Brown
Red	B	Orange
Blue	C	Yellow
White	Neutral	Gray *
* or white with colored (other than green) tracer.		

6. Lighting circuit "switch legs", and 3-way and 4-way switch "traveling wires," shall have color coding that is unique and distinct (e.g., pink and purple) from the color coding indicated above. The unique color codes shall be solid and in accordance with the NEC. Coordinate color coding in the field with the COTR.

## 2.2 SPLICES

- A. Splices shall be in accordance with NEC and UL.
- B. Above Ground Splices for No. 10 AWG and Smaller:
  1. Solderless, screw-on, reusable pressure cable type, with integral insulation, approved for copper and aluminum conductors.
  2. The integral insulator shall have a skirt to completely cover the stripped conductors.
  3. The number, size, and combination of conductors used with the connector, as listed on the manufacturer's packaging, shall be strictly followed.

## 2.3 CONNECTORS AND TERMINATIONS

- A. Mechanical type of high conductivity and corrosion-resistant material, listed for use with copper and aluminum conductors.
- B. Long barrel compression type of high conductivity and corrosion-resistant material, with minimum of two compression indents per wire, listed for use with copper and aluminum conductors.
- C. All bolts, nuts, and washers used to connect connections and terminations to bus bars or other termination points shall be zinc-plated steel.

## 2.4 CONTROL WIRING

- A. Unless otherwise specified elsewhere in these specifications, control wiring shall be as specified herein, except that the minimum size shall be not less than No. 14 AWG.

- B. Control wiring shall be sized such that the voltage drop under in-rush conditions does not adversely affect operation of the controls.

## **2.5 WIRE LUBRICATING COMPOUND**

- A. Lubricating compound shall be suitable for the wire insulation and conduit, and shall not harden or become adhesive.

## **PART 3 - EXECUTION**

### **3.1 GENERAL**

- A. Install conductors in accordance with the NEC, as specified, and as shown on the drawings.
- B. Install all conductors in raceway systems.
- C. Splice conductors only in outlet boxes or junction boxes.
- D. Conductors of different systems (e.g., 120 V and 277 V) shall not be installed in the same raceway.
- E. Install cable supports for all vertical feeders in accordance with the NEC. Provide split wedge type which firmly clamps each individual cable and tightens due to cable weight.
- F. In panelboards, cabinets, wireways, switches, enclosures, and equipment assemblies, neatly form, train, and tie the conductors with non-metallic ties.
- G. For connections to motors, transformers, and vibrating equipment, stranded conductors shall be used only from the last fixed point of connection to the motors, transformers, or vibrating equipment.
- H. Use expanding foam or non-hardening duct-seal to seal conduits entering a building, after installation of conductors.
- I. Conductor and Cable Pulling:
  - 1. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling. Use lubricants approved for the cable.
  - 2. Use nonmetallic pull ropes.
  - 3. Attach pull ropes by means of either woven basket grips or pulling eyes attached directly to the conductors approved by the COTR.
  - 4. All conductors in a single conduit shall be pulled simultaneously.
  - 5. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.
- J. No more than three branch circuits shall be installed in any one conduit.
- K. When stripping stranded conductors, use a tool that does not damage the conductor or remove conductor strands.

### **3.2 SPLICE AND TERMINATION INSTALLATION**

- A. Splices and terminations shall be mechanically and electrically secure, and tightened to manufacturer's published torque values using a torque screwdriver or wrench.

- B. Where the Government determines that unsatisfactory splices or terminations have been installed, replace the splices or terminations at no additional cost to the Government.

### **3.3 CONDUCTOR IDENTIFICATION**

- A. When using colored tape to identify phase, neutral, and ground conductors larger than No. 8 AWG, apply tape in half-overlapping turns for a minimum of 75 mm (3 inches) from terminal points, and in junction boxes, and pullboxes. Apply the last two laps of tape with no tension to prevent possible unwinding. Where cable markings are covered by tape, apply tags to cable, stating size and insulation type.

### **3.4 EXISTING CONDUCTORS**

- A. Unless specifically indicated on the plans, existing conductors shall not be reused.

### **3.5 CONTROL WIRING INSTALLATION**

- A. Unless otherwise specified in other sections, install control wiring and connect to equipment to perform the required functions as specified or as shown on the drawings.
- B. Install a separate power supply circuit for each system, except where otherwise shown on the drawings.

### **3.6 CONTROL WIRING IDENTIFICATION**

- A. Install a permanent wire marker on each wire at each termination.
- B. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.
- C. Wire markers shall retain their markings after cleaning.

### **3.7 ACCEPTANCE CHECKS AND TESTS**

- A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:
  - 1. Visual Inspection and Tests: Inspect physical condition.
  - 2. Electrical tests:
    - a. After installation but before connection to utilization devices, such as fixtures, test conductors phase-to-phase and phase-to-ground resistance with an insulation resistance tester. Existing conductors to be reused shall also be tested.
    - b. Applied voltage shall be 500 V DC for 300 V rated cable, and 1000 V DC for 600 V rated cable. Apply test for one minute or until reading is constant for 15 seconds, whichever is longer. Minimum insulation resistance values shall not be less than 25 megohms for 300 V rated cable and 100 megohms for 600 V rated cable.

---END---



**SECTION 26 05 33**  
**RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the furnishing, installation, and connection of conduit, fittings, and boxes, to form complete, coordinated, grounded raceway systems. Raceways are required for all wiring unless shown or specified otherwise.
- B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

**1.2 RELATED WORK**

- A. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire rated construction.
- B. Section 09 91 00, PAINTING: Identification and painting of conduit and other devices.
- C. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.

**1.3 QUALITY ASSURANCE**

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

**1.4 SUBMITTALS**

In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

- A. Manufacturer's Literature and Data: Showing each cable type and rating. The specific item proposed and its area of application shall be identified on the catalog cuts.
- B. Shop Drawings:
  - 1. Size and location of main feeders.
  - 2. Size and location of panels and pull-boxes.
  - 3. Layout of required conduit penetrations through structural elements.
- C. Certifications:
  - 1. Two weeks prior to the final inspection, submit four copies of the following certifications to the Project Engineer COTR:
    - a. Certification by the manufacturer that the material conforms to the requirements of the drawings and specifications.
    - b. Certification by the contractor that the material has been properly installed.

**1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

- B. American National Standards Institute (ANSI):
  - C80.1-05 .....Electrical Rigid Steel Conduit
  - C80.3-05 .....Steel Electrical Metal Tubing
- C. National Fire Protection Association (NFPA):
  - 70-08 .....National Electrical Code (NEC)
- D. Underwriters Laboratories, Inc. (UL):
  - 1-05 .....Flexible Metal Conduit
  - 6-07 .....Electrical Rigid Metal Conduit - Steel
  - 50-95 .....Enclosures for Electrical Equipment
  - 514A-04.....Metallic Outlet Boxes
  - 514B-04.....Conduit, Tubing, and Cable Fittings
  - 797-07 .....Electrical Metallic Tubing
- E. National Electrical Manufacturers Association (NEMA):
  - FB1-07 .....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit,  
Electrical Metallic Tubing and Cable

## **PART 2 - PRODUCTS**

### **2.1 MATERIAL**

- A. Conduit Size: In accordance with the NEC, but not less than 13 mm (0.5 in) unless otherwise shown. Where permitted by the NEC, 13 mm (0.5 in) flexible conduit may be used for tap connections to recessed lighting fixtures.
- B. Conduit:
  - 1. Rigid steel: Shall conform to UL 6 and ANSI C80.1.
  - 2. Electrical metallic tubing (EMT): Shall conform to UL 797 and ANSI C80.3. Maximum size not to exceed 105 mm (4 in) and shall be permitted only with cable rated 600 V or less.
  - 3. Flexible galvanized steel conduit: Shall conform to UL 1.
- C. Conduit Fittings:
  - 1. Rigid steel and IMC conduit fittings:
    - a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
    - b. Standard threaded couplings, locknuts, bushings, conduit bodies, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
    - c. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
    - d. Bushings: Metallic insulating type, consisting of an insulating insert, molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
    - e. Erickson (union-type) and set screw type couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use

set screws of case-hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.

- f. Sealing fittings: Threaded cast iron type. Use continuous drain-type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.
2. Electrical metallic tubing fittings:
  - a. Fittings and conduit bodies shall meet the requirements of UL 514B, ANSI C80.3, and NEMA FB1.
  - b. Only steel or malleable iron materials are acceptable.
  - c. Setscrew couplings and connectors: Use setscrews of case-hardened steel with hex head and cup point, to firmly seat in wall of conduit for positive grounding.
  - d. Indent-type connectors or couplings are prohibited.
  - e. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.
3. Flexible steel conduit fittings:
  - a. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
  - b. Clamp-type, with insulated throat.
4. Expansion and deflection couplings:
  - a. Conform to UL 467 and UL 514B.
  - b. Accommodate a 19 mm (0.75 in) deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.
  - c. Include internal flexible metal braid, sized to guarantee conduit ground continuity and a low-impedance path for fault currents, in accordance with UL 467 and the NEC tables for equipment grounding conductors.
  - d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat-resistant molded rubber material with stainless steel jacket clamps.
- D. Conduit Supports:
  1. Parts and hardware: Zinc-coat or provide equivalent corrosion protection.
  2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
  3. Multiple conduit (trapeze) hangers: Not less than 38 mm x 38 mm (1.5 x 1.5 in), 12-gauge steel, cold-formed, lipped channels; with not less than 9 mm (0.375 in) diameter steel hanger rods.
  4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.
- E. Outlet, Junction, and Pull Boxes:
  1. UL-50 and UL-514A.

2. Cast metal where required by the NEC or shown, and equipped with rustproof boxes.
  3. Sheet metal boxes: Galvanized steel, except where otherwise shown.
  4. Flush-mounted wall or ceiling boxes shall be installed with raised covers so that the front face of raised cover is flush with the wall. Surface-mounted wall or ceiling boxes shall be installed with surface-style flat or raised covers.
- F. Wireways: Equip with hinged covers, except where removable covers are shown. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for a complete system.

### **PART 3 - EXECUTION**

#### **3.1 PENETRATIONS**

- A. Cutting or Holes:
1. Cut holes in advance where they should be placed in the structural elements, such as ribs or beams. Obtain the approval of the Project Engineer COTR prior to drilling through structural elements.
  2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammers, impact electric, hand, or manual hammer-type drills are not allowed, except where permitted by the Project Engineer COTR as required by limited working space.
- B. Firestop: Where conduits, wireways, and other electrical raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING.
- C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal clearances around the conduit and make watertight, as specified in Section 07 92 00, JOINT SEALANTS.

#### **3.2 INSTALLATION, GENERAL**

- A. In accordance with UL, NEC, as shown, and as specified herein.
- B. Essential (Emergency) raceway systems shall be entirely independent of other raceway systems, except where shown on drawings.
- C. Install conduit as follows:
1. In complete mechanically and electrically continuous runs before pulling in cables or wires.
  2. Unless otherwise indicated on the drawings or specified herein, installation of all conduits shall be concealed within finished walls, floors, and ceilings.
  3. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new undamaged material.
  4. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
  5. Cut square, ream, remove burrs, and draw up tight.

6. Independently support conduit at 2.4 m (8 ft) on centers. Do not use other supports, i.e., suspended ceilings, suspended ceiling supporting members, lighting fixtures, conduits, mechanical piping, or mechanical ducts.
  7. Support within 300 mm (12 in) of changes of direction, and within 300 mm (12 in) of each enclosure to which connected.
  8. Close ends of empty conduit with plugs or caps at the rough-in stage until wires are pulled in, to prevent entry of debris.
  9. Conduit installations under fume and vent hoods are prohibited.
  10. Secure conduits to cabinets, junction boxes, pull-boxes, and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
  11. Conduit bodies shall only be used for changes in direction, and shall not contain splices.
- D. Conduit Bends:
1. Make bends with standard conduit bending machines.
  2. Conduit hickey may be used for slight offsets and for straightening stubbed out conduits.
  3. Bending of conduits with a pipe tee or vise is prohibited.
- E. Layout and Homeruns:
1. Install conduit with wiring, including homeruns, as shown on drawings.
  2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted approved by the Project Engineer COTR.

### **3.3 CONCEALED WORK INSTALLATION**

- A. In Concrete:
1. Conduit: Rigid steel or EMT. Do not install EMT in concrete slabs that are in contact with soil, gravel, or vapor barriers.
  2. Align and run conduit in direct lines.
  3. Install conduit through concrete beams only:
    - a. Where shown on the structural drawings.
    - b. As approved by the Project Engineer COTR prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
  4. Make couplings and connections watertight. Use thread compounds that are UL approved conductive type to ensure low resistance ground continuity through the conduits. Tightening setscrews with pliers is prohibited.
- B. Above Furred or Suspended Ceilings and in Walls:
1. Conduit for conductors 600 V and below: Rigid steel, IMC, or EMT. Mixing different types of conduits indiscriminately in the same system is prohibited.
  2. Align and run conduit parallel or perpendicular to the building lines.

3. Connect recessed lighting fixtures to conduit runs with maximum 1.8 m (6 ft) of flexible metal conduit extending from a junction box to the fixture.
4. Tightening setscrews with pliers is prohibited.

### **3.4 EXPOSED WORK INSTALLATION**

- A. Unless otherwise indicated on the drawings, exposed conduit is only permitted in mechanical and electrical rooms.
- B. Conduit for Conductors 600 V and Below: Rigid steel, IMC, or EMT. Mixing different types of conduits indiscriminately in the system is prohibited.
- C. Align and run conduit parallel or perpendicular to the building lines.
- D. Install horizontal runs close to the ceiling or beams and secure with conduit straps.
- E. Support horizontal or vertical runs at not over 2.4 m (8 ft) intervals.
- F. Painting:
  1. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
  2. Paint all conduits containing cables rated over 600 V safety orange. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (2 in) high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 6 m (20 ft) intervals in between.

### **3.5 WET OR DAMP LOCATIONS**

- A. Unless otherwise shown, use conduits of rigid steel or IMC.
- B. Provide sealing fittings to prevent passage of water vapor where conduits pass from warm to cold locations, i.e., refrigerated spaces, constant-temperature rooms, air-conditioned spaces, building exterior walls, roofs, or similar spaces.

### **3.6 EXPANSION JOINTS**

- A. Conduits 75 mm (3 in) and larger that are secured to the building structure on opposite sides of a building expansion joint require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.
- B. Provide conduits smaller than 75 mm (3 in) with junction boxes on both sides of the expansion joint. Connect conduits to junction boxes with sufficient slack of flexible conduit to produce 125 mm (5 in) vertical drop midway between the ends. Flexible conduit shall have a bonding jumper installed. In lieu of this flexible conduit, expansion and deflection couplings as specified above for conduits 375 mm (15 in) and larger are acceptable.
- C. Install expansion and deflection couplings where shown.
- D. Seismic Areas: In seismic areas, provide conduits rigidly secured to the building structure on opposite sides of a building expansion joint with junction boxes on both sides of the joint. Connect conduits to junction boxes with 375 mm (15 in) of slack flexible conduit. Flexible conduit shall have a copper green ground bonding jumper installed.

### **3.7 CONDUIT SUPPORTS, INSTALLATION**

- A. Safe working load shall not exceed one-quarter of proof test load of fastening devices.
- B. Use pipe straps or individual conduit hangers for supporting individual conduits.
- C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and 200 lbs (90 kg). Attach each conduit with U-bolts or other approved fasteners.
- D. Support conduit independently of junction boxes, pull-boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.
- E. Fasteners and Supports in Solid Masonry and Concrete:
  - 1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
  - 2. Existing Construction:
    - a. Steel expansion anchors not less than 6 mm (0.25 in) bolt size and not less than 28 mm (1.125 in) embedment.
    - b. Power set fasteners not less than 6 mm (0.25 in) diameter with depth of penetration not less than 75 mm (3 in).
    - c. Use vibration and shock-resistant anchors and fasteners for attaching to concrete ceilings.
- E. Hollow Masonry: Toggle bolts.
- F. Bolts supported only by plaster or gypsum wallboard are not acceptable.
- G. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.
- H. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
- I. Chain, wire, or perforated strap shall not be used to support or fasten conduit.
- J. Spring steel type supports or fasteners are prohibited for all uses except horizontal and vertical supports/fasteners within walls.
- K. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

### **3.8 BOX INSTALLATION**

- A. Boxes for Concealed Conduits:
  - 1. Flush-mounted.
  - 2. Provide raised covers for boxes to suit the wall or ceiling, construction, and finish.
- B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling-in operations.

- C. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
- D. Outlet boxes mounted back-to-back in the same wall are prohibited. A minimum 600 mm (24 in) center-to-center lateral spacing shall be maintained between boxes.
- E. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example "SIG-FA JB No. 1."
- F. On all branch circuit junction box covers, identify the circuits with black marker.

--- E N D ---



## **SECTION 26 09 23 LIGHTING CONTROLS**

### **PART 1 - GENERAL**

#### **1.1 DESCRIPTION**

This section specifies the furnishing, installation and connection of the lighting controls.

#### **1.2 RELATED WORK**

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General requirements that are common to more than one section of Division 26.
- B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- C. Section 26 27 26, WIRING DEVICES: Wiring devices used for control of the lighting systems.

#### **1.3 QUALITY ASSURANCE**

- A. Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

#### **1.4 SUBMITTALS**

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Product Data: For each type of lighting control, submit the following information.
  - 1. Manufacturer's catalog data.
  - 2. Wiring schematic and connection diagram.
  - 3. Installation details.
- C. Manuals:
  - 1. Submit, simultaneously with the shop drawings companion copies of complete maintenance and operating manuals including technical data sheets, and information for ordering replacement parts.
  - 2. Two weeks prior to the final inspection, submit four copies of the final updated maintenance and operating manuals, including any changes, to the Project Engineer.
- D. Certifications:
  - 1. Two weeks prior to final inspection, submit four copies of the following certifications to the Project Engineer:
    - a. Certification by the Contractor that the equipment has been properly installed, adjusted, and tested.

#### **1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

- B. Green Seal (GS):
  - GC-12.....Occupancy Sensors
- C. Illuminating Engineering Society of North America (IESNA):
  - IESNA LM-48 ..... Guide for Calibration of Photoelectric Control Devices
- D. National Electrical Manufacturer's Association (NEMA)
  - C136.10.....American National Standard for Roadway Lighting Equipment-  
Locking-Type Photocontrol Devices and Mating Receptacles -  
Physical and Electrical Interchangeability and Testing
- E. Underwriters Laboratories, Inc. (UL):
  - 20 ..... Standard for General-Use Snap Switches
  - 773 ..... Standard for Plug-In Locking Type Photocontrols for Use with  
Area Lighting
  - 773A..... Nonindustrial Photoelectric Switches for Lighting Control

## **PART 2 - PRODUCTS**

### **2.1 INDOOR OCCUPANCY SENSORS**

- A. Wall- or ceiling-mounting, solid-state units with a power supply and relay unit, suitable for the environmental conditions in which installed.
  - 1. Operation: Unless otherwise indicated, turn lights on when covered area is occupied and off when unoccupied; with a 1 to 15 minute adjustable time delay for turning lights off.
  - 2. Sensor Output: Contacts rated to operate the connected relay. Sensor shall be powered from the relay unit.
  - 3. Mounting:
    - a. Sensor: Suitable for mounting in any position on a standard outlet box.
    - b. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind hinged door.
  - 4. Indicator: LED, to show when motion is being detected during testing and normal operation of the sensor.
  - 5. Bypass Switch: Override the on function in case of sensor failure.
  - 6. Manual/automatic selector switch.
  - 7. Automatic Light-Level Sensor: Adjustable from 2 to 200 fc (21.5 to 2152 lx); keep lighting off when selected lighting level is present.
  - 8. Faceplate for Wall-Switch Replacement Type: Refer to wall plate material and color requirements for toggle switches, as specified in Section 26 27 26, WIRING DEVICES.
- B. Dual-technology Type: Ceiling mounting; combination PIR and ultrasonic detection methods, field-selectable.
  - 1. Sensitivity Adjustment: Separate for each sensing technology.
  - 2. Detector Sensitivity: Detect occurrences of 150mm (6-inch) minimum movement of any portion of a human body that presents a target of not less than 232 sq. cm (36 sq. in), and

detect a person of average size and weight moving not less than 305 mm (12 inches) in either a horizontal or a vertical manner at an approximate speed of 305 mm/s (12 inches/s).

3. Detection Coverage: as scheduled on drawings.

### **PART 3 - EXECUTION**

#### **3.1 INSTALLATION:**

- A. Installation shall be in accordance with the NEC, manufacturer's instructions and as shown on the drawings or specified.
- B. Aim outdoor photocell switch according to manufacturer's recommendations. Set adjustable window slide for 1 footcandle photocell turn-on.
- C. Aiming for wall-mounted and ceiling-mounted motion sensor switches shall be per manufacturer's recommendations.
- D. Set occupancy sensor "on" duration to 15 minutes.
- E. Locate light level sensors as indicated and in accordance with the manufacturer's recommendations. Adjust sensor for the scheduled light level at the typical work plane for that area.
- F. Label time switches and contactors with a unique designation.

#### **3.2 ACCEPTANCE CHECKS AND TESTS**

- A. Perform in accordance with the manufacturer's recommendations.
- B. Upon completion of installation, conduct an operating test to show that equipment operates in accordance with requirements of this section.
- C. Test for full range of dimming ballast and dimming controls capability. Observe for visually detectable flicker over full dimming range.
- D. Test occupancy sensors for proper operation. Observe for light control over entire area being covered.
- E. Program lighting control panels per schedule on drawings.

#### **3.3 FOLLOW-UP VERIFICATION**

Upon completion of acceptance checks and tests, the Contractor shall show by demonstration in service that the lighting control devices are in good operating condition and properly performing the intended function.

--- E N D ---

**SECTION 26 27 26**  
**WIRING DEVICES**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the furnishing, installation, connection, and testing of wiring devices.

**1.2 RELATED WORK**

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.
- B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- C. Section 26 51 00, INTERIOR LIGHTING: Fluorescent ballasts and LED drivers for use with manual dimming controls.

**1.3 QUALITY ASSURANCE**

- A. Refer to Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES), in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

**1.4 SUBMITTALS**

- A. Submit six copies of the following in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
1. Shop Drawings:
    - a. Submit sufficient information to demonstrate compliance with drawings and specifications.
    - b. Include electrical ratings, dimensions, mounting details, construction materials, grade, and termination information.
  2. Manuals:
    - a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals, including technical data sheets and information for ordering replacement parts.
    - b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
  3. Certifications: Two weeks prior to final inspection, submit the following.
    - a. Certification by the manufacturer that the wiring devices conform to the requirements of the drawings and specifications.
    - b. Certification by the Contractor that the wiring devices have been properly installed and adjusted.

## 1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. National Fire Protection Association (NFPA):
  - 70-11 ..... National Electrical Code (NEC)
  - 99-12 ..... Health Care Facilities
- C. National Electrical Manufacturers Association (NEMA):
  - WD 1-10 ..... General Color Requirements for Wiring Devices
  - WD 6-08 ..... Wiring Devices – Dimensional Specifications
- D. Underwriter's Laboratories, Inc. (UL):
  - 943-11 ..... Ground-Fault Circuit-Interrupters

## PART 2 - PRODUCTS

### 2.1 RECEPTACLES

- A. General: All receptacles shall comply with NEMA, NFPA, UL, and as shown on the drawings.
  - 1. Mounting straps shall be plated steel, with break-off plaster ears and shall include a self-grounding feature. Terminal screws shall be brass, brass plated or a copper alloy metal.
  - 2. Receptacles shall have provisions for back wiring with separate metal clamp type terminals (four minimum) and side wiring from four captively held binding screws.
- B. Duplex Receptacles: Hospital-grade, single phase, 20 ampere, 120 volts, 2-pole, 3-wire, NEMA 5-20R, with break-off feature for two-circuit operation.
  - 1. Bodies shall be ivory in color.
  - 6. Duplex Receptacles (not hospital grade): Shall be the same as hospital grade duplex receptacles except for the hospital grade listing and as follows.
    - a. Bodies shall be brown nylon.

### 2.4 WALL PLATES

- A. For receptacles or switches mounted adjacent to each other, wall plates shall be common for each group of receptacles.
- B. In areas requiring tamperproof wiring devices, wall plates shall be type 302 stainless steel, and shall have tamperproof screws and beveled edges.

## PART 3 - EXECUTION

### 3.1 INSTALLATION

- A. Installation shall be in accordance with the NEC and as shown as on the drawings.
- B. Install wiring devices after wall construction and painting is complete.
- C. The ground terminal of each wiring device shall be bonded to the outlet box with an approved green bonding jumper, and also connected to the branch circuit equipment grounding conductor.
- D. Provide barriers in multigang outlet boxes to comply with the NEC.

- E. Coordinate the electrical work with the work of other trades to ensure that wiring device flush outlets are positioned with box openings aligned with the face of the surrounding finish material. Pay special attention to installations in cabinet work, and in connection with laboratory equipment.
- F. Exact field locations of floors, walls, partitions, doors, windows, and equipment may vary from locations shown on the drawings. Prior to locating sleeves, boxes and chases for roughing-in of conduit and equipment, the Contractor shall coordinate exact field location of the above items with other trades.
- G. Install receptacles 450 mm (18 inches) above floor, and 152 mm (6 inches) above counter backsplash or workbenches. Install specific-use receptacles at heights shown on the drawings.
- H. Install vertically mounted receptacles with the ground pin up. Install horizontally mounted receptacles with the ground pin to the right.
- I. When required or recommended by the manufacturer, use a torque screwdriver. Tighten unused terminal screws.
- J. Label device plates with a permanent adhesive label listing panel and circuit feeding the wiring device.

### **3.2 ACCEPTANCE CHECKS AND TESTS**

- A. Perform manufacturer's required field checks in accordance with the manufacturer's recommendations. In addition, include the following:
  - 1. Visual Inspection and Tests:
    - a. Inspect physical and electrical condition.
    - b. Vacuum-clean surface metal raceway interior. Clean metal raceway exterior.
    - c. Test wiring devices for damaged conductors, high circuit resistance, poor connections, inadequate fault current path, defective devices, or similar problems using a portable receptacle tester. Correct circuit conditions, remove malfunctioning units and replace with new, and retest as specified above.
  - 2. Healthcare Occupancy Tests:
    - a. Test hospital grade receptacles for retention force per NFPA 99.

---END---

**SECTION 26 51 00  
INTERIOR LIGHTING**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. This section specifies the furnishing, installation, and connection of the interior lighting systems.  
The terms "lighting fixture," "fixture," and "luminaire" are used interchangeably.

**1.2 RELATED WORK**

- A. Section 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS: Requirement for seismic restraint for nonstructural Components.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.
- C. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Low-voltage conductors.

**1.3 QUALITY ASSURANCE**

- A. Refer to Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES), in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

**1.4 SUBMITTALS**

- A. Submit six copies of the following in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
  - 1. Shop Drawings:
    - a. Submit the following information for each type of lighting fixture.
    - b. Material and construction details, include information on housing and optics system.
    - c. Physical dimensions and description.
    - d. Wiring schematic and connection diagram.
    - e. Installation details.
    - f. Energy efficiency data.
    - g. Photometric data based on laboratory tests complying with IES Lighting Measurements testing and calculation guides.
    - h. Lamp data including lumen output (initial and mean), color rendition index (CRI), rated life (hours), and color temperature (degrees Kelvin).
    - i. For LED lighting fixtures, submit US DOE LED Lighting Facts label, and IES L70 rated life.
  - 2. Manuals:
    - a. Submit, simultaneously with the shop drawings, complete maintenance and operating manuals, including technical data sheets, wiring diagrams, and information for ordering replacement parts.

- b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
- 3. Certifications: Two weeks prior to final inspection, submit the following.
  - a. Certification by the Contractor that the interior lighting systems have been properly installed and tested.

## 1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. American Society for Testing and Materials (ASTM):
  - C635-07 ..... Manufacture, Performance, and Testing of Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings
- C. Environmental Protection Agency (EPA):
  - 40 CFR 261 ..... Identification and Listing of Hazardous Waste
- D. Federal Communications Commission (FCC):
  - CFR Title 47, Part 15 ..... Radio Frequency Devices
  - CFR Title 47, Part 18 ..... Industrial, Scientific, and Medical Equipment
- E. Illuminating Engineering Society (IES):
  - LM-79-08 ..... Electrical and Photometric Measurements of Solid-State Lighting Products
  - LM-80-08 ..... Measuring Lumen Maintenance of LED Light Sources
  - LM-82-12 ..... Characterization of LED Light Engines and LED Lamps for Electrical and Photometric Properties as a Function of Temperature
- F. Institute of Electrical and Electronic Engineers (IEEE):
  - C62.41-91 ..... Surge Voltages in Low Voltage AC Power Circuits
- G. International Code Council (ICC):
  - IBC-12 ..... International Building Code
- H. National Fire Protection Association (NFPA):
  - 70-11 ..... National Electrical Code (NEC)
  - 101-12 ..... Life Safety Code
- I. National Electrical Manufacturer's Association (NEMA):
  - SSL-1-10 ..... Electronic Drivers for LED Devices, Arrays, or Systems
- J. Underwriters Laboratories, Inc. (UL):
  - 496-08 ..... Lampholders
  - 8750-09 ..... Light Emitting Diode (LED) Light Sources for Use in Lighting Products



## **PART 2 - PRODUCTS**

### **2.1 LED LIGHT FIXTURES**

#### **A. General:**

1. LED light fixtures shall be in accordance with IES, NFPA, UL, as shown on the drawings, and as specified.
2. LED light fixtures shall be Reduction of Hazardous Substances (RoHS)-compliant.
3. LED drivers shall include the following features unless otherwise indicated:
  - a. Minimum efficiency: 85% at full load.
  - b. Minimum Operating Ambient Temperature: -20° C. (-4° F.)
  - c. Input Voltage: 120 - 277V (±10%) at 60 Hz.
  - d. Integral short circuit, open circuit, and overload protection.
  - e. Power Factor: ≥ 0.95.
  - f. Total Harmonic Distortion: ≤ 20%.
  - g. Comply with FCC 47 CFR Part 15.
4. LED modules shall include the following features unless otherwise indicated:
  - a. Comply with IES LM-79 and LM-80 requirements.
  - b. Minimum CRI 80 and color temperature 3000° K unless otherwise specified in LIGHTING FIXTURE SCHEDULE.
  - c. Minimum Rated Life: 50,000 hours per IES L70.
  - d. Light output lumens as indicated in the LIGHTING FIXTURE SCHEDULE.

#### **B. LED Troffers:**

1. LED drivers, modules, and reflector shall be accessible, serviceable, and replaceable from below the ceiling.
2. Housing, LED driver, and LED module shall be products of the same manufacturer.

## **PART 3 - EXECUTION**

### **3.1 INSTALLATION**

- A. Installation shall be in accordance with the NEC, manufacturer's instructions, and as shown on the drawings or specified.
- B. Align, mount, and level the lighting fixtures uniformly.
- C. Lighting Fixture Supports:
  1. Shall provide support for all of the fixtures. Supports may be anchored to channels of the ceiling construction, to the structural slab or to structural members within a partition, or above a suspended ceiling.
  2. Shall maintain the fixture positions after cleaning and relamping.
  3. Shall support the lighting fixtures without causing the ceiling or partition to deflect.
  4. Hardware for recessed lighting fixtures:

- a. All fixture mounting devices connecting fixtures to the ceiling system or building structure shall have a capacity for a horizontal force of 100 percent of the fixture weight and a vertical force of 400 percent of the fixture weight.
  - b. Mounting devices shall clamp the fixture to the ceiling system structure (main grid runners or fixture framing cross runners) at four points in such a manner as to resist spreading of these supporting members. Each support point device shall utilize a screw or approved hardware to "lock" the fixture housing to the ceiling system, restraining the fixture from movement in any direction relative to the ceiling. The screw (size No. 10 minimum) or approved hardware shall pass through the ceiling member (T-bar, channel or spline), or it may extend over the inside of the flange of the channel (or spline) that faces away from the fixture, in a manner that prevents any fixture movement.
  - c. In addition to the above, the following is required for fixtures exceeding 20 pounds (9 kg) in weight.
    - 1) Where fixtures mounted in ASTM Standard C635 "Intermediate Duty" and "Heavy Duty" ceilings and weigh between 20 pounds and 56 pounds (9 kg and 25 kg), provide two 12 gauge safety hangers hung slack between diagonal corners of the fixture and the building structure.
    - 2) Where fixtures weigh over 25 kg (56 pounds), they shall be independently supported from the building structure by approved hangers. Two-way angular bracing of hangers shall be provided to prevent lateral motion.
  - d. Where ceiling cross runners are installed for support of lighting fixtures, they must have a carrying capacity equal to that of the main ceiling runners and be rigidly secured to the main runners.
5. Surface mounted lighting fixtures:
- a. Fixtures shall be bolted against the ceiling independent of the outlet box at four points spaced near the corners of each unit. The bolts (or stud-clips) shall be minimum 6 mm (1/4 inch) bolt, secured to main ceiling runners and/or secured to cross runners. Non-turning studs may be attached to the main ceiling runners and cross runners with special non-friction clip devices designed for the purpose, provided they bolt through the runner, or are also secured to the building structure by 12 gauge safety hangers. Studs or bolts securing fixtures weighing in excess of 56 pounds (25 kg) shall be supported directly from the building structure.
  - b. Where ceiling cross runners are installed for support of lighting fixtures, they must have a carrying capacity equal to that of the main ceiling runners and be rigidly secured to the main runners.

- c. Fixtures less than 6.8 kg (15 pounds) in weight and occupying less than 3715 sq cm (two square feet) of ceiling area may, when designed for the purpose, be supported directly from the outlet box when all the following conditions are met.
    - 1) Screws attaching the fixture to the outlet box pass through round holes (not key-hole slots) in the fixture body.
    - 2) The outlet box is attached to a main ceiling runner (or cross runner) with approved hardware.
    - 3) The outlet box is supported vertically from the building structure.
  - d. Fixtures mounted in open construction shall be secured directly to the building structure with approved bolting and clamping devices.
- 6. Outlet boxes for support of lighting fixtures (where permitted) shall be secured directly to the building structure with approved devices or supported vertically in a hung ceiling from the building structure with a nine gauge wire hanger, and be secured by an approved device to a main ceiling runner or cross runner to prevent any horizontal movement relative to the ceiling.
- D. Furnish and install the new lamps as specified for all lighting fixtures installed under this project, and for all existing lighting fixtures reused under this project.
- E. The electrical and ceiling trades shall coordinate to ascertain that approved lighting fixtures are furnished in the proper sizes and installed with the proper devices (hangers, clips, trim frames, flanges, etc.), to match the ceiling system being installed.
- F. At completion of project, replace all defective components of the lighting fixtures at no cost to the Government.
- G. Dispose of lamps per requirements of Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT, and Section 02 41 00, DEMOLITION.

### **3.2 ACCEPTANCE CHECKS AND TESTS**

- A. Perform the following:
  - 1. Visual Inspection:
    - a. Verify proper operation by operating the lighting controls.
    - b. Visually inspect for damage to fixtures, lenses, reflectors, diffusers, and louvers. Clean fixtures, lenses, reflectors, diffusers, and louvers that have accumulated dust, dirt, or fingerprints during construction.
  - 2. Electrical tests:
    - a. Exercise dimming components of the lighting fixtures over full range of dimming capability by operating the control devices(s) in the presence of the COTR. Observe for visually detectable flicker over full dimming range, and replace defective components at no cost to the Government.
    - b. Burn-in all lamps that require specific aging period to operate properly, prior to occupancy by Government. Burn-in period to be 40 hours minimum, unless specifically

recommended otherwise by the lamp manufacturer. Burn-in dimmed fluorescent and compact fluorescent lamps for at least 100 hours at full voltage, unless specifically recommended otherwise by the lamp manufacturer. Replace any lamps and ballasts which fail during burn-in.

### **3.3 FOLLOW-UP VERIFICATION**

- A. Upon completion of acceptance checks and tests, the Contractor shall show by demonstration in service that the lighting systems are in good operating condition and properly performing the intended function.

---END---