



three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one quarter inch = one foot
one eighth inch = one foot
one sixteenth inch = one foot

1 2 3 4 5 6 7 8 9

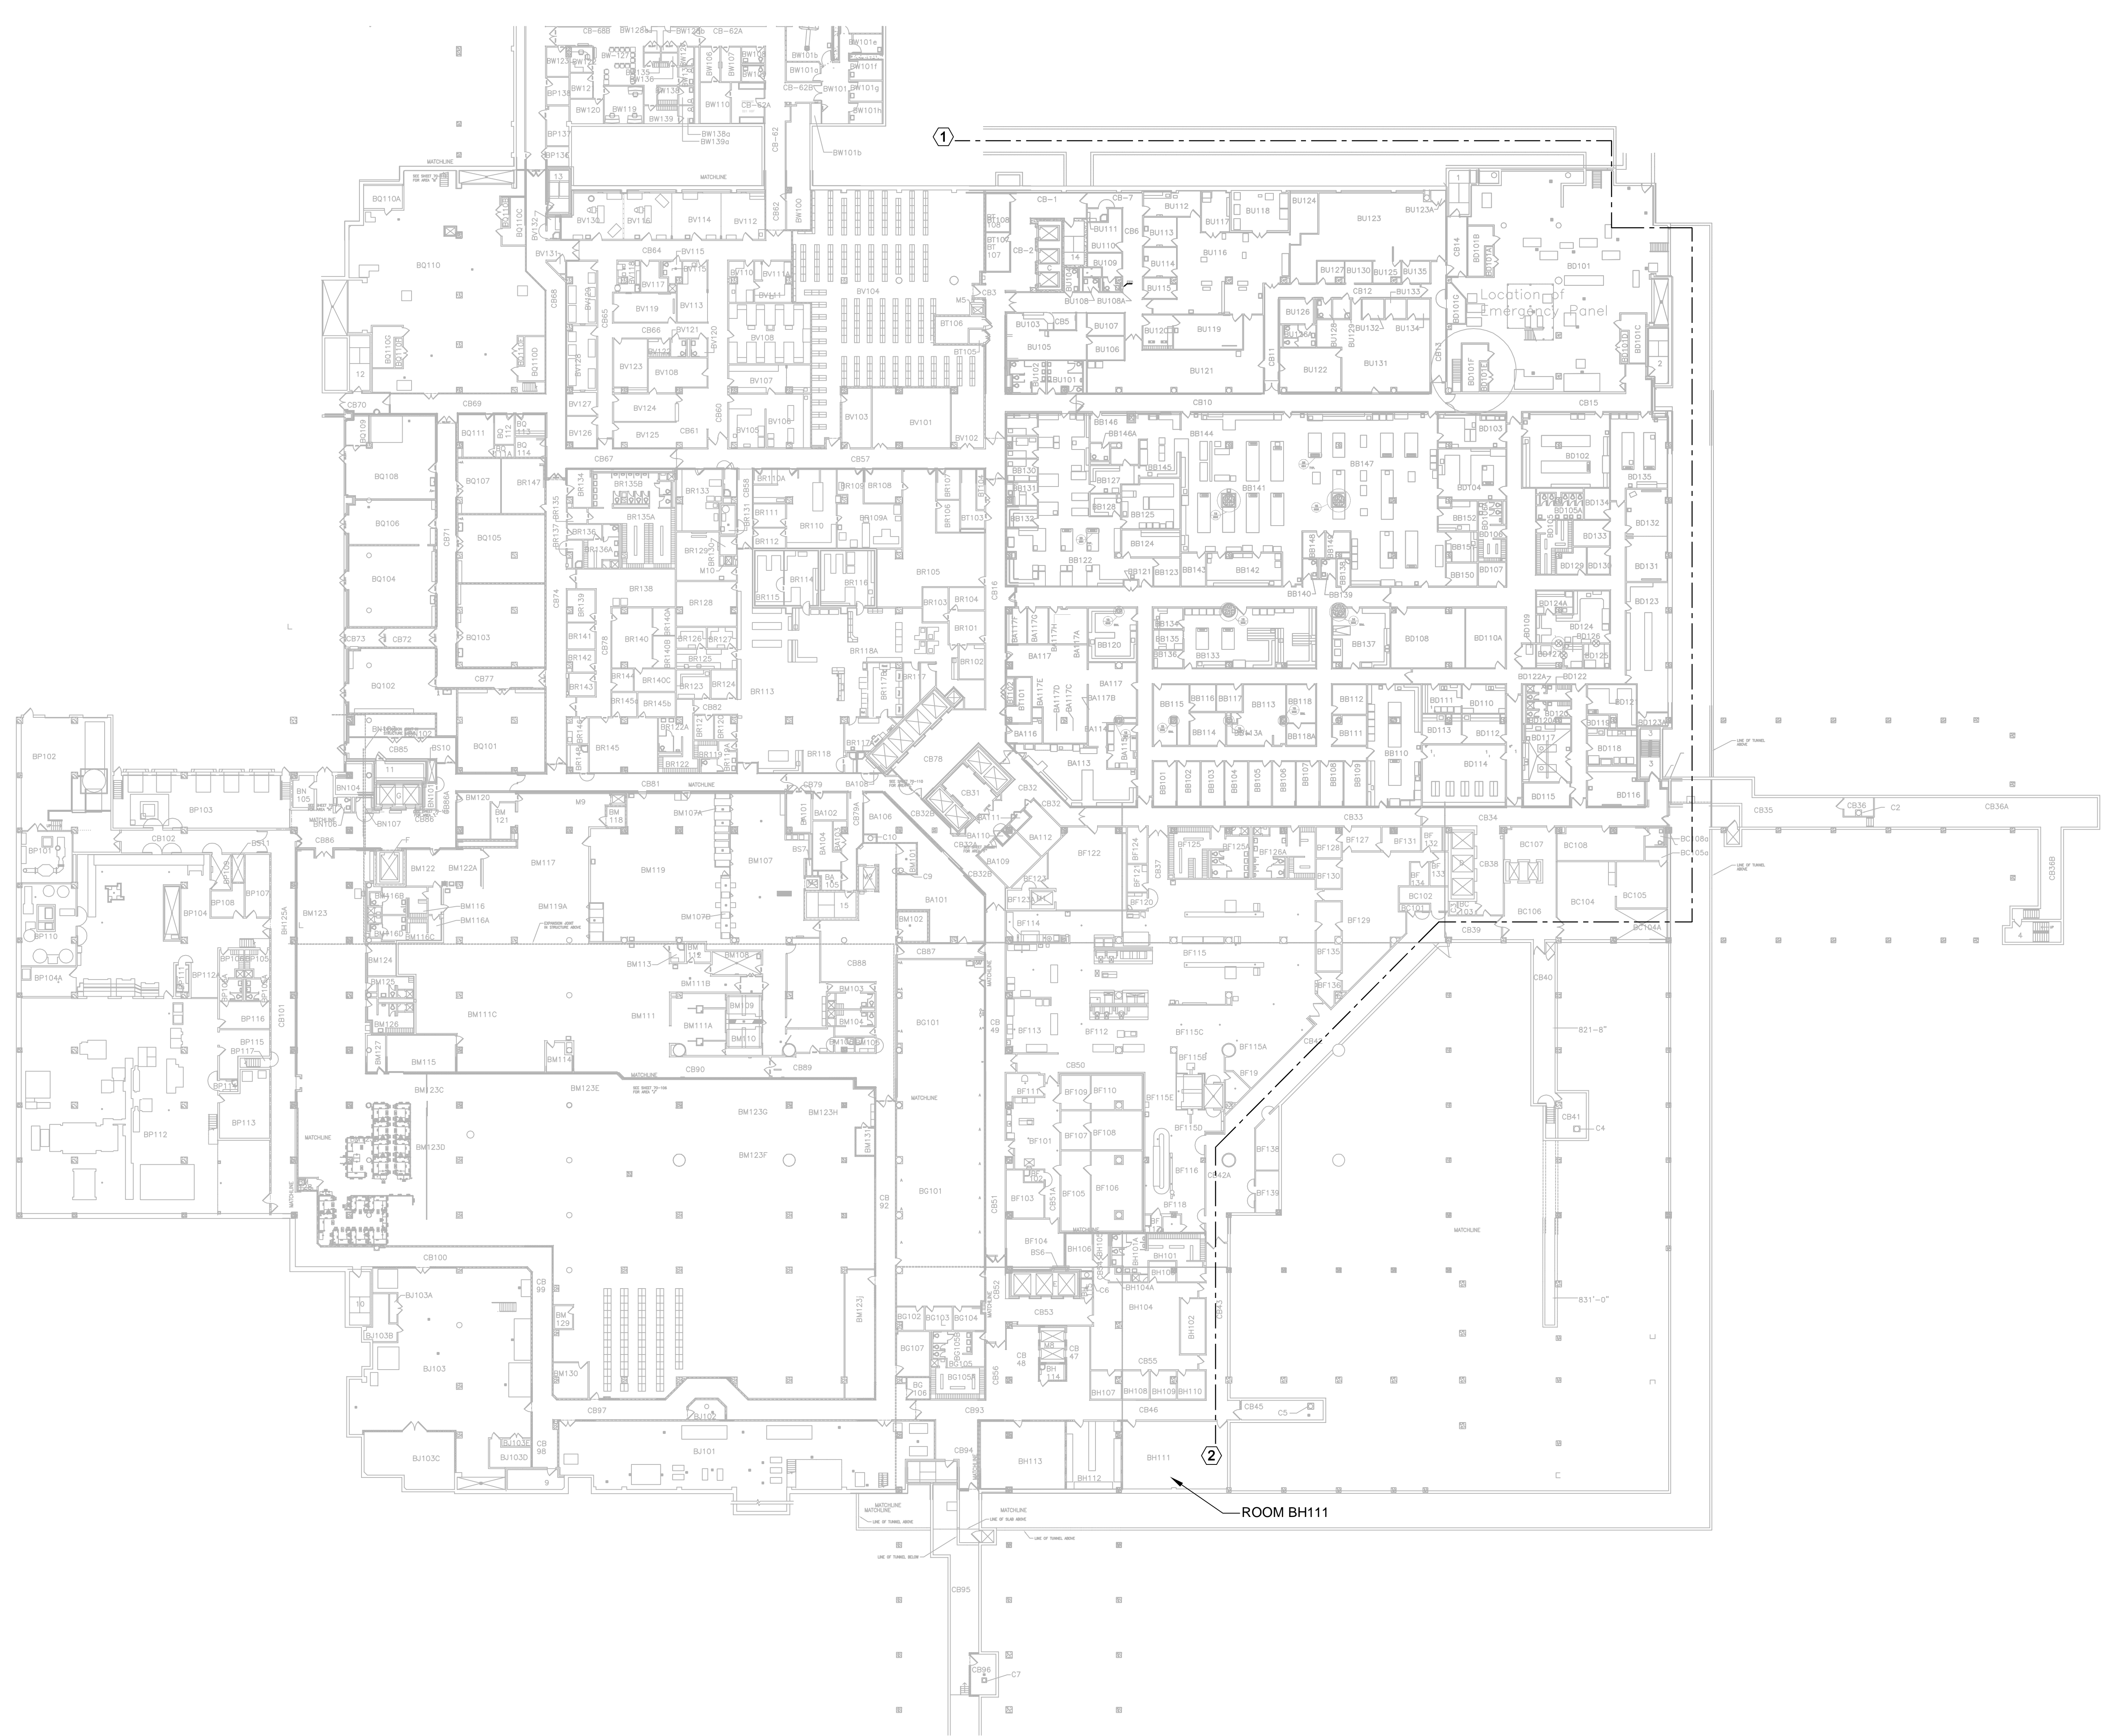

- KEY NOTES:**
- 1 PROVIDE A 1 1/2" CONDUIT FROM THE COMMUNICATIONS PULL BOX AND ROUTE TO ROOM BH-111. PROVIDE PULL BOXES BETWEEN BENDS TOTALING 180 DEGREES. PROVIDE PULL BOXES EVERY 500 FEET ON STRAIGHT RUNS. INSTALL THE INDOOR, 25 PAIR, CATEGORY 3 COPPER AND OPTICAL FIBER CABLES IN THE CONDUIT. COORDINATE CONDUIT ROUTING WITH EXISTING CONDITIONS AND THE CONTRACTING OFFICERS TECHNICAL REPRESENTATIVE (COTR).
 - 2 PROVIDE A 110 BLOCK AND TERMINATE THE CATEGORY 3 COPPER CABLE ON THE BLOCK. TERMINATE THE OPTICAL FIBER CABLE ON AN EXISTING FIBER TERMINATION ENCLOSURE. COORDINATE WITH EXISTING CONDITIONS AND THE CONTRACTING OFFICERS TECHNICAL REPRESENTATIVE (COTR).



1 SYSTEMS PLAN - MEDICAL CENTER BASEMENT
EY-125/1/32" = 1'-0"

		CONSULTANTS: SIGNIA DESIGN 2395 UNIVERSITY AVENUE W., SUITE 316 SAINT PAUL, MN 55114 PHONE: 651-209-6254 LANDSCAPE ANDERSON ENGINEERING 13605 1ST AVENUE NORTH, SUITE 100 PLYMOUTH, MN 55441 PHONE: 763-412-4000	ARCHITECTS/ENGINEERS: LEO A DALY PLANNING ARCHITECTURE ENGINEERING INTERIORS EST. 1915 730 Second Avenue South, Suite 1100 Minneapolis, MN 55402-2455 USA Tel 612-338-8741 Fax 612-338-4840 Project #023-10131-000	Drawing Title: SYSTEMS PLAN - MEDICAL CENTER BASEMENT I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am duly Licensed Professional Engineer under the laws of the State of Minnesota. Signature: Printed Name: Randall A. Jacobs Date: 02-24-2012 License: 25414	Project Title CONSTRUCT PARKING RAMP DESIGN		Project Number 618-820	Office of Construction and Facilities Management
Revisions:	Date				Location 1 VETERANS DRIVE MINNEAPOLIS, MN 55417	Building Number 78	Drawing Number EY-125 Drawing 115 of 116	