

GENERAL DEMOLITION NOTES


CONTRACTOR TO REFER TO SHEET AD101 FOR A COMPLETE LISTING OF GENERAL NOTES APPLICABLE TO THIS SHEET.

DEMOLITION PLAN NOTES

1. REMOVE ABANDONED EXHAUST FAN PIPING & PATCH ROOF DECK AS NECESSARY.
2. REMOVE EXISTING WALKWAY ROOF PADS.
3. EXISTING SLATE ROOF TO REMAIN. PROTECT AS NECESSARY.
4. REMOVE EXISTING ABANDONED MAKEUP AIR UNIT.
5. EXISTING SKYLIGHTS TO REMAIN. PROTECT.
6. REMOVE EXISTING ROOF EXPANSION JOINT COVER. RETAIN FOR REINSTALLATION.
7. RAISE SATELLITE AND REMOVE ROOF CURB. RETAIN SATELLITE FOR REINSTALLATION.
8. PROTECT & MAINTAIN EXISTING THROUGH WALL SCUPPERS.
9. REMOVE EXISTING EXHAUST FAN. CAP EXISTING CURB FOR FUTURE USE.
10. REMOVE EXISTING CONDENSING UNITS. PATCH AND REPAIR EXISTING ROOF DECK AS NECESSARY.

BID DEDUCT #4
ALL WORK ASSOCIATED WITH THE PLAN AREA SHOWN ON THIS SHEET SHALL BE PART OF BID DEDUCT ALTERNATE #4

KEY PLAN

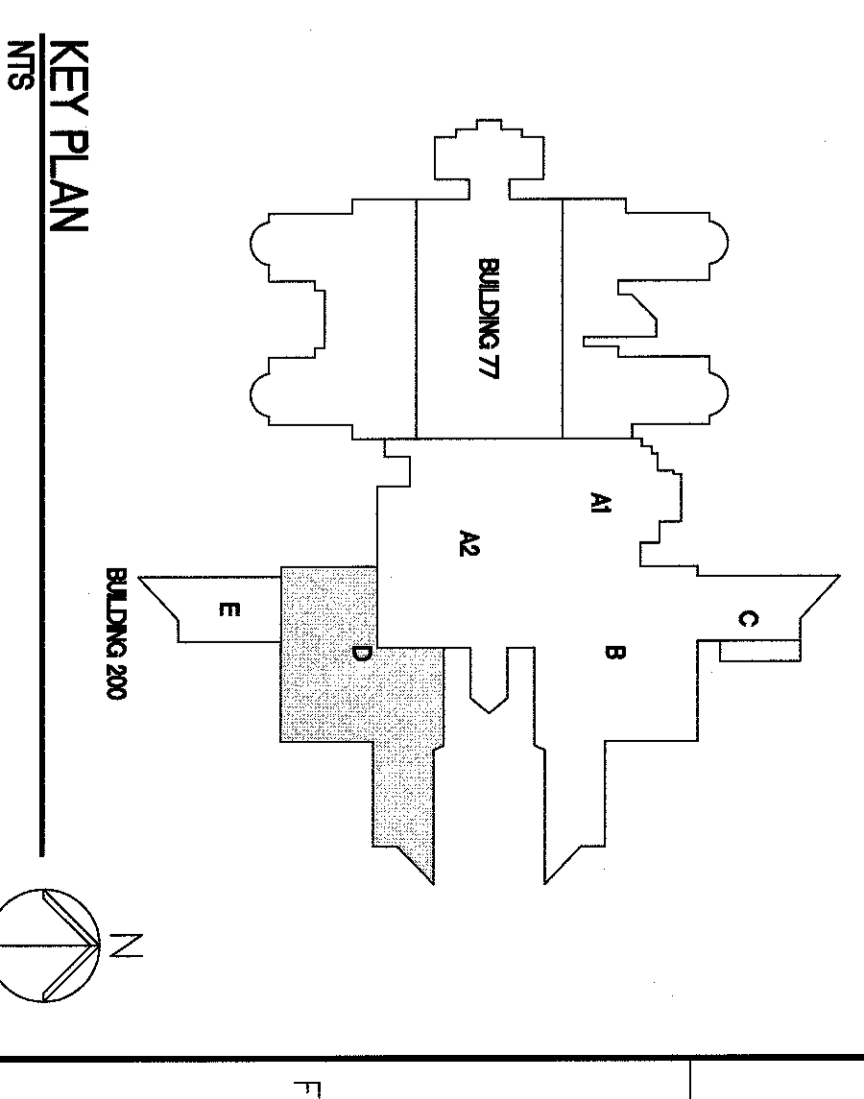

**FULLY SPINKLERED
 BID DOCUMENTS
 FOR CONSTRUCTION**

<p>Project Title</p> <p>DEMOLITION PLAN D</p>	<p>Project Title</p> <p>REPLACE ROOF BUILDING 200</p>	<p>Project Number</p> <p>621-16-108</p>	<p>Office of Construction and Facilities Management</p>
<p>Approved Project Director</p> <p><i>[Signature]</i></p>	<p>Location</p> <p>JAMES H. OULLEN VAMC</p>	<p>Building Number</p> <p>200</p>	<p>Department of Veterans Affairs</p>
<p>Date</p> <p>02-10-2017</p>	<p>Checked</p> <p>BNG</p>	<p>Drawing Number</p> <p>AD105</p>	<p>VA FORM 08-6231</p>
<p>CONSULTANTS:</p>		<p>ARCHITECT/ENGINEERS:</p> <p>paradigm</p> <p>Architecture Engineering Design-Build</p> <p>200 Emory Circle #201, Loudoun, VA 22079 • PH: 572.535.5111 • www.paradigm.com</p>	