




three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one quarter inch = one foot
one eighth inch = one foot

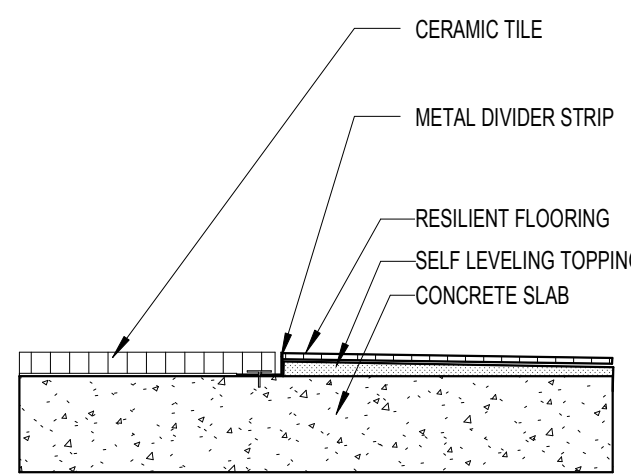


A1 CERAMIC TILE TO RESILIENT FLOORING
3" = 1'-0"

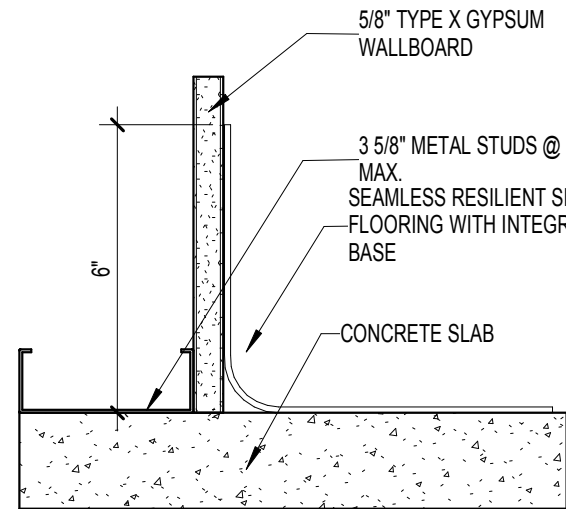


B1 TYPICAL INTEGRAL BASE DETAIL
3" = 1'-0"

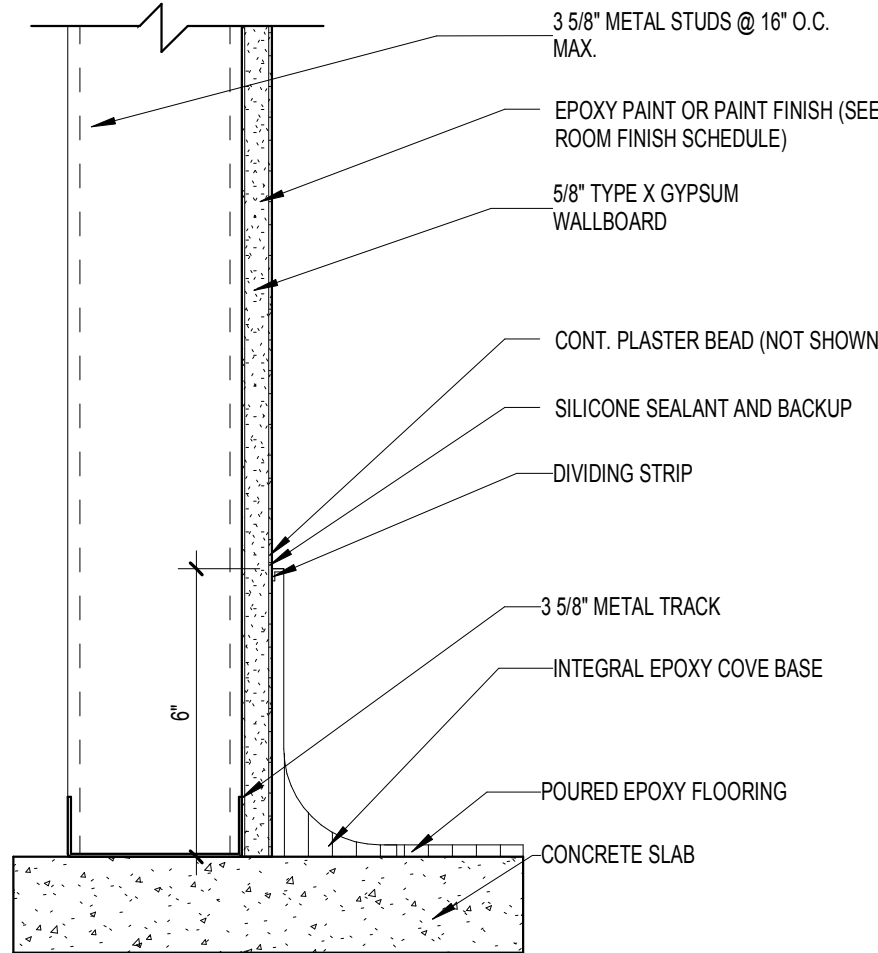


B2 EPOXY TERRAZZO INTEGRAL BASE
3" = 1'-0"

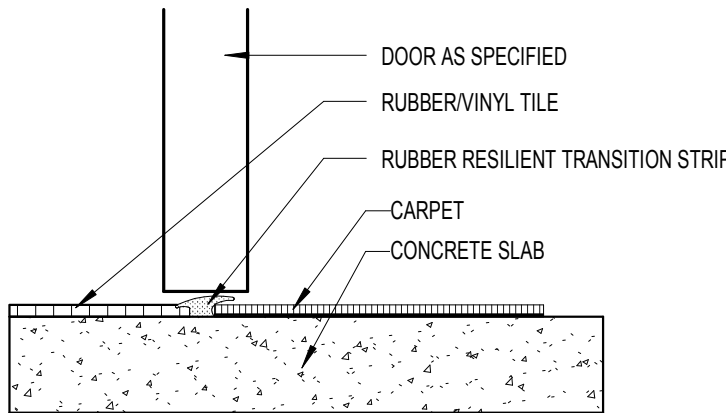


B3 RUBBER, VINYL TO CARPET
3" = 1'-0"

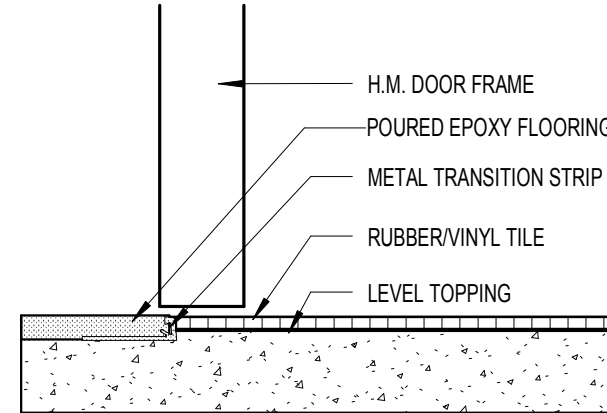


B4 RUBBER, VINYL TO PEF
3" = 1'-0"

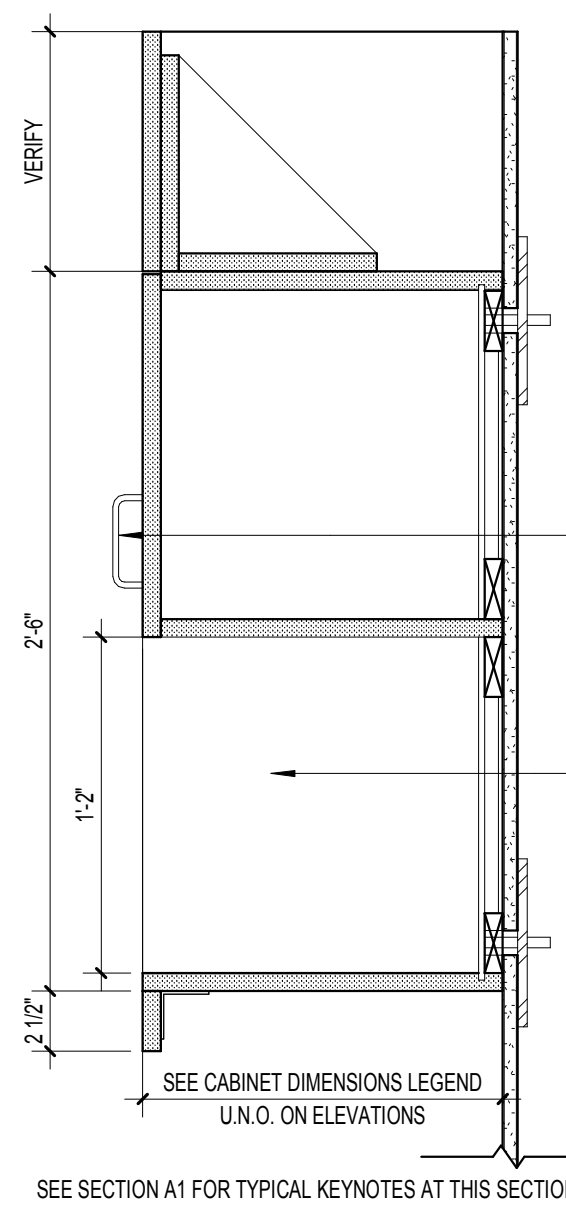


D1 SECTION @ UPPER CABINET
1 1/2" = 1'-0"

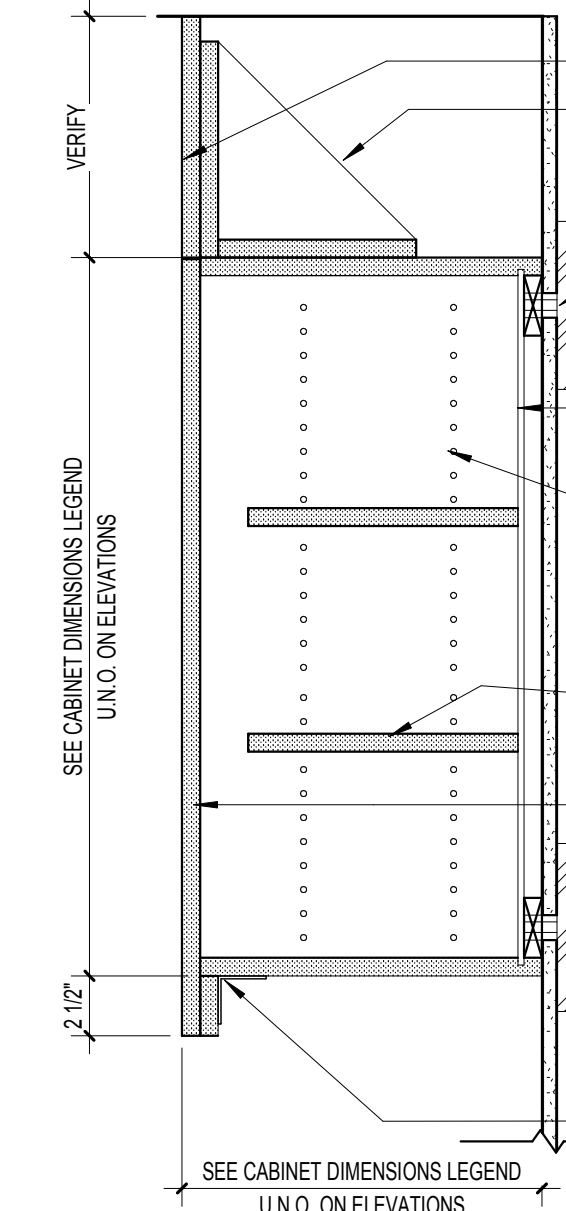


D2 SECTION @ UPPER CABINET
1 1/2" = 1'-0"

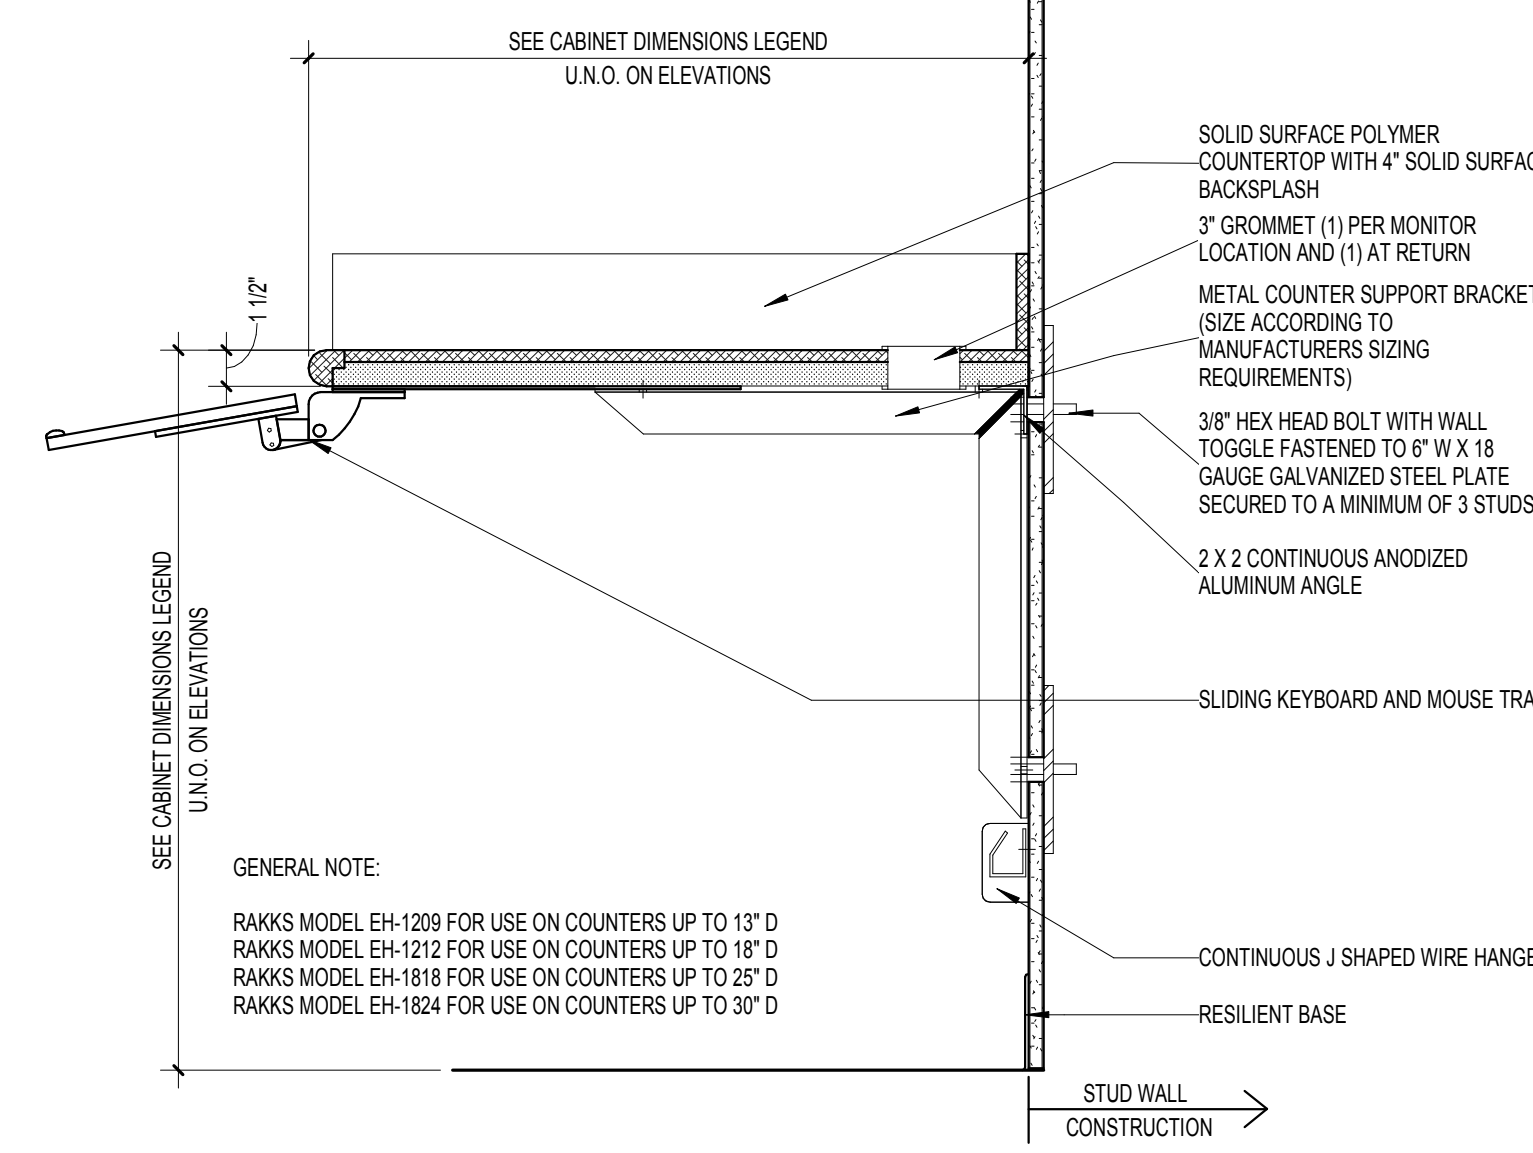


D3 SECTION @ WORK COUNTER
1 1/2" = 1'-0"

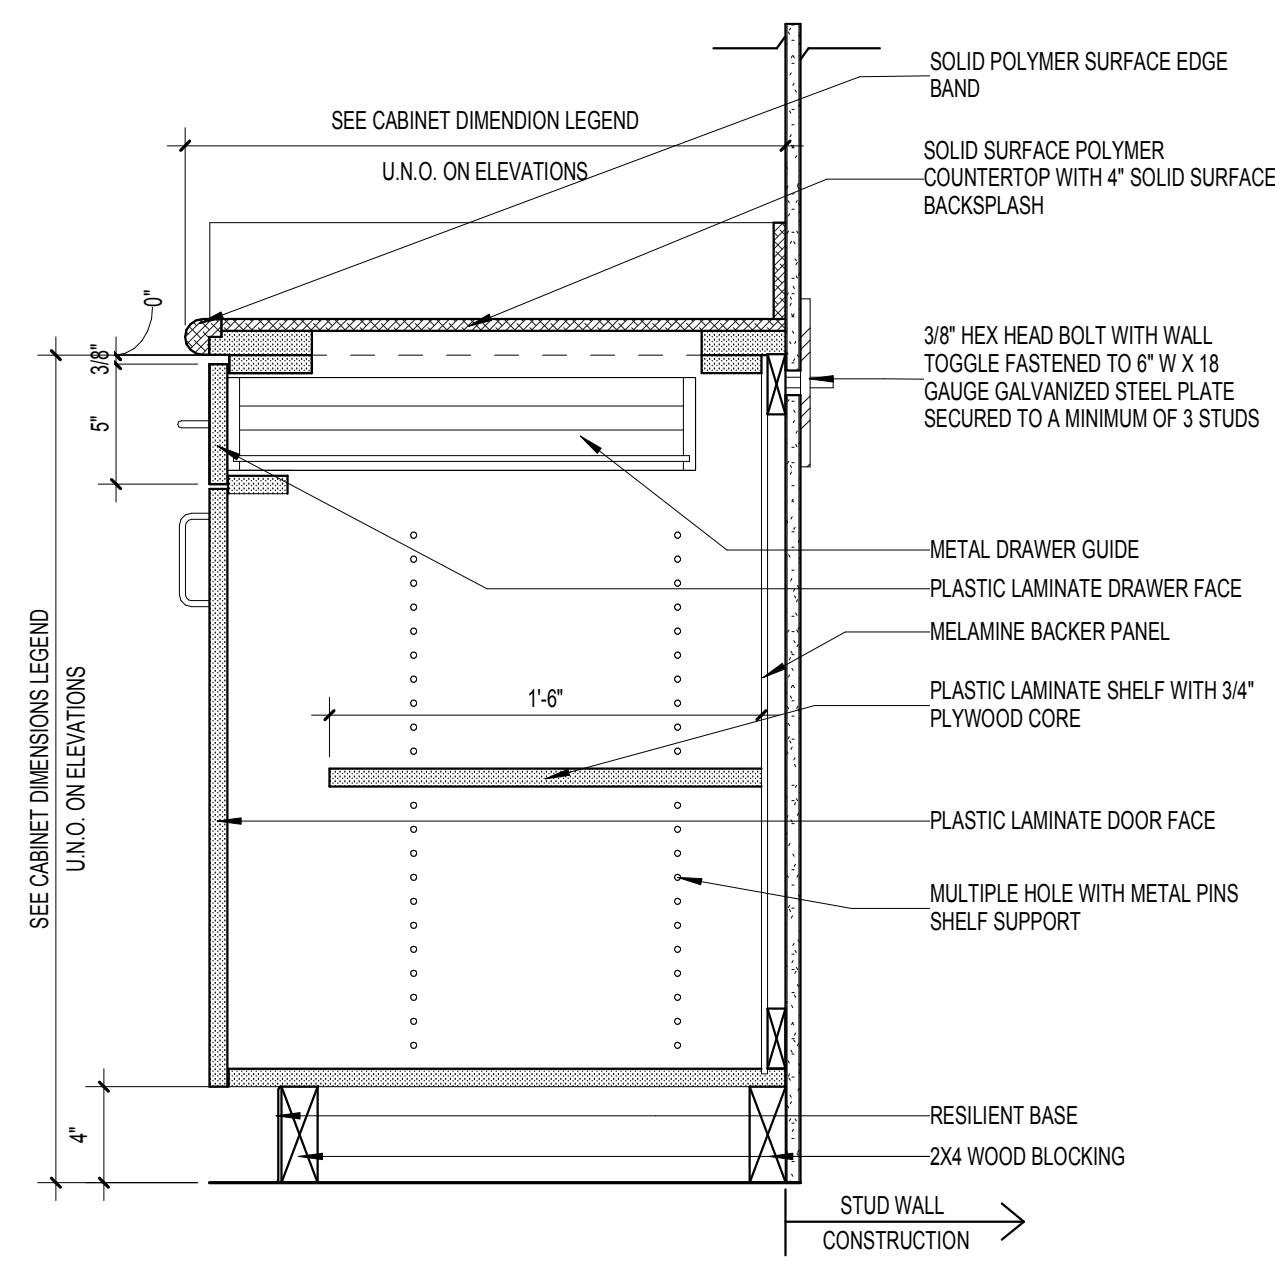


F1 SECTION @ TYPICAL BASE CABINET
1 1/2" = 1'-0"

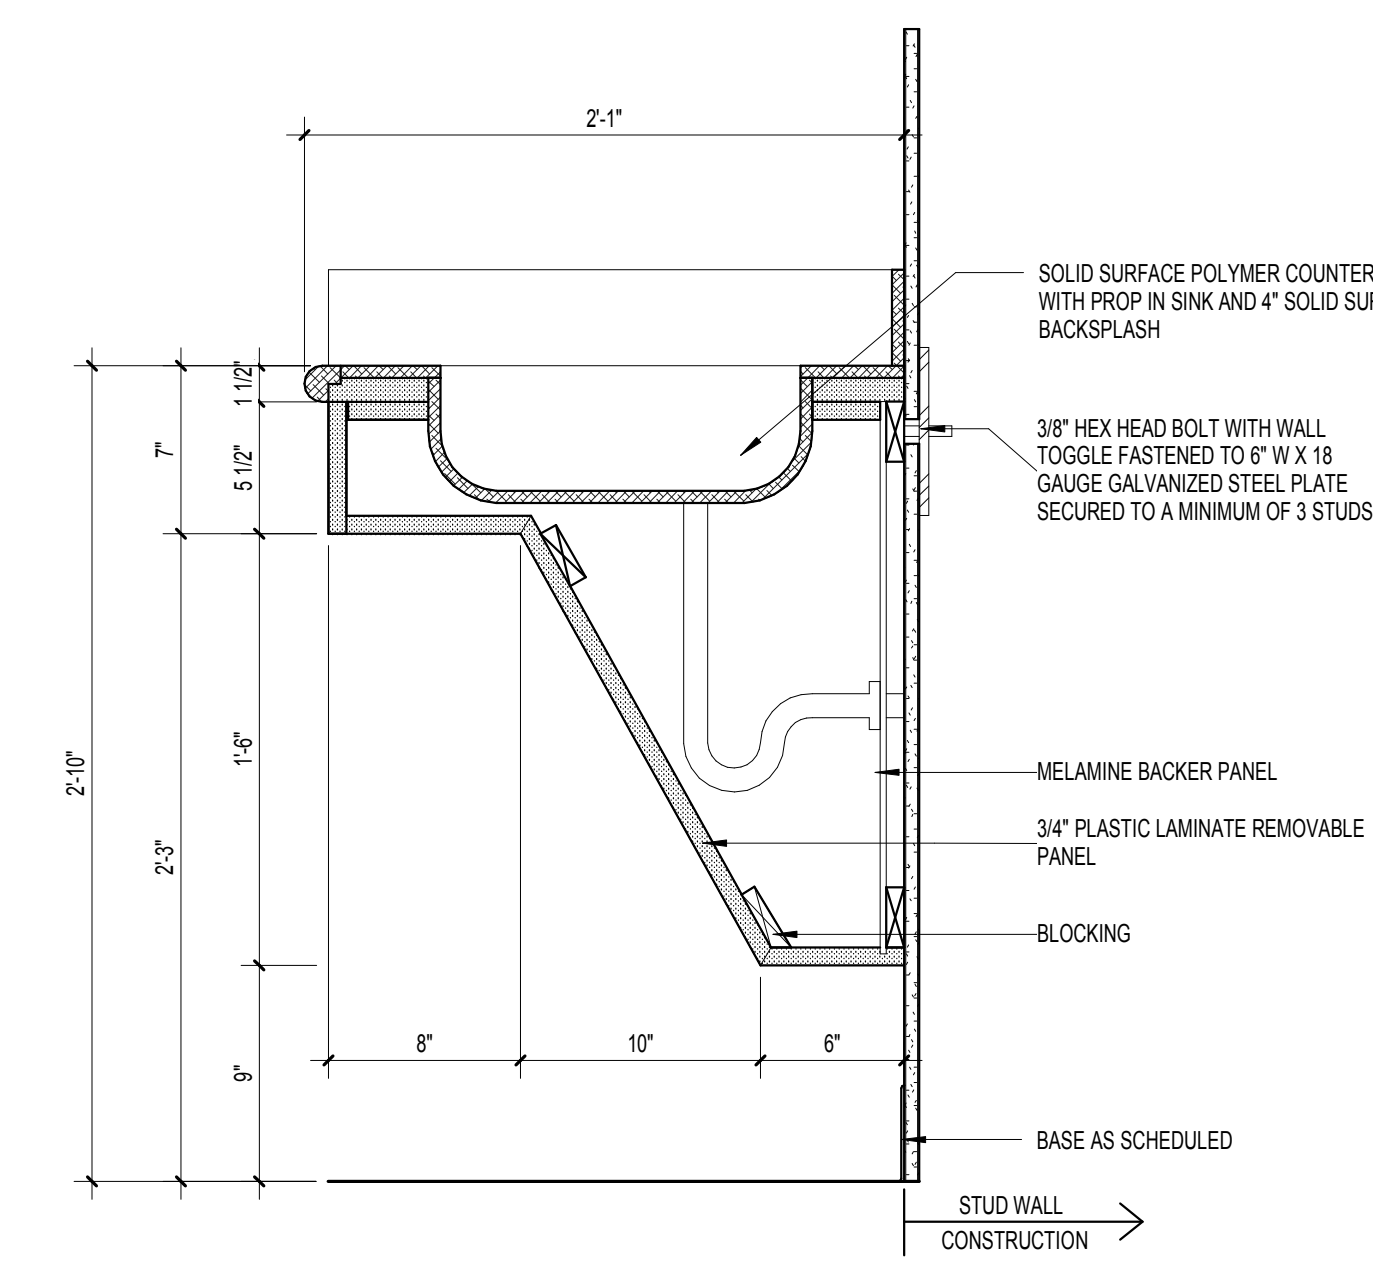

F2 SECTION @ SINK BASE CABINET - ADA ACCESSIBLE
1 1/2" = 1'-0"

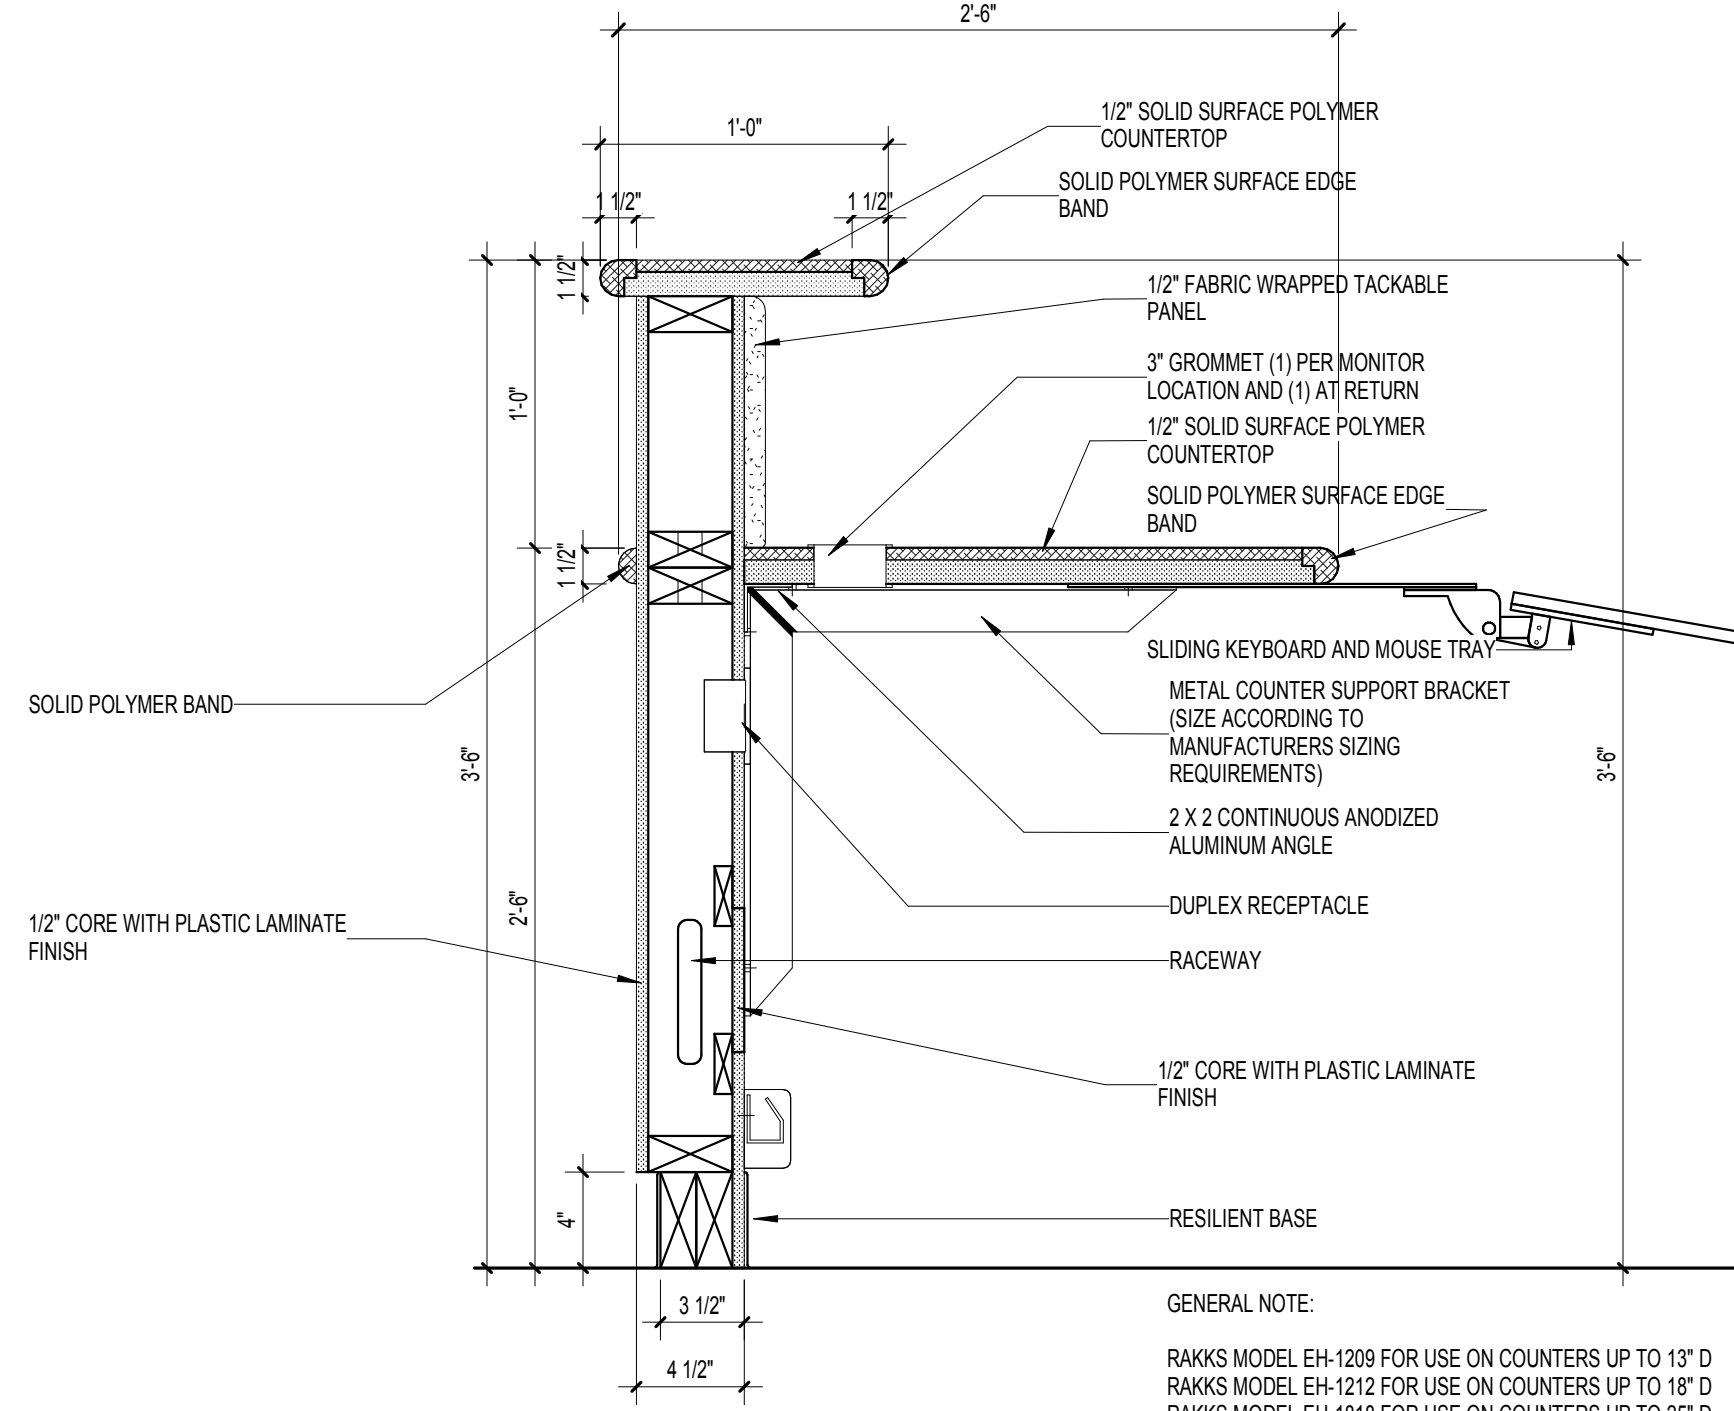


F4 SECTION @ TYPICAL NURSES STATION
1 1/2" = 1'-0"

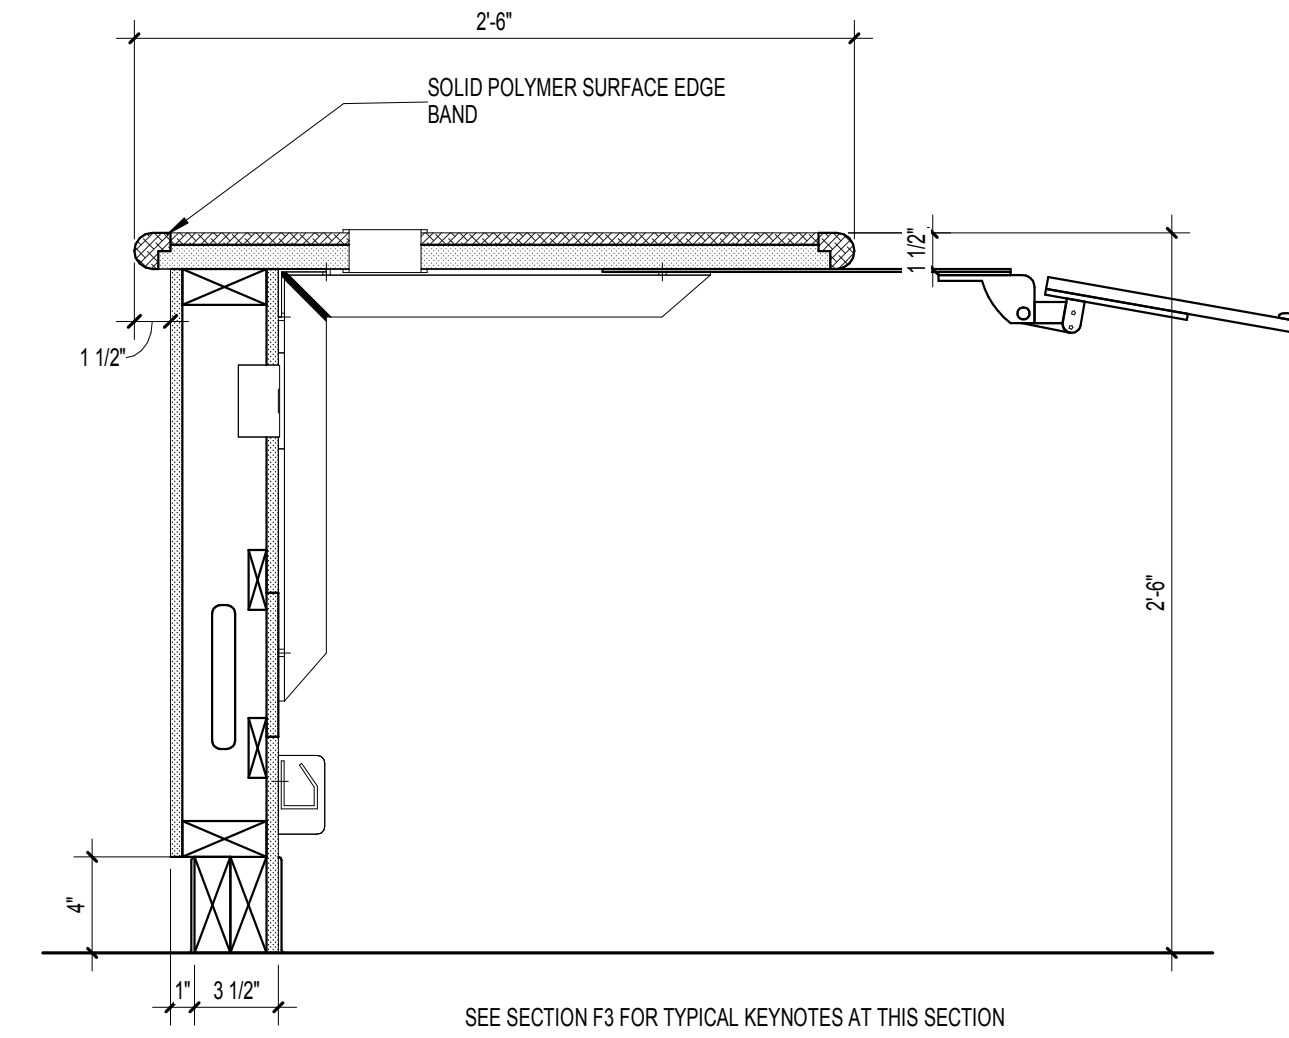




F7 SECTION @ TYPICAL RECEPTION DESK
1 1/2" = 1'-0"

TOILET ACCESSORY SCHEDULE						
ACCESSORY		MOUNTING HEIGHT		RESPONSIBILITY		
T.A. #	DESCRIPTION	HEIGHT	REMARKS	PURCHASED BY	PLACED BY	INSTALLED BY
TA-1A-6	Glass Mirror	3' - 4"	To Bottom of Reflective Surface	Contractor	Contractor	Contractor
TA-2C	Soap Dispenser	4' - 2 7/8"	To Top of Unit	Owner	Owner	Owner
TA-3E	Paper Towel Dispenser	3' - 4"	To Bottom of Unit	Contractor	Contractor	Contractor
TA-5A-2	Toilet Tissue Dispenser - Single Roll	1' - 7 3/4"	To Top of Unit	Owner	Owner	Owner
TA-6A-6	Grab Bar 42"	2' - 10"	To Top of Tubing	Contractor	Contractor	Contractor
TA-6B-1	Grab Bar 18" - Vertical	3' - 3"	To Bottom of Tubing	Contractor	Contractor	Contractor
TA-10B	Mop and Broom Holder with Shelf and Rag Hooks	6' - 0"	To Top of Unit	Contractor	Contractor	Contractor

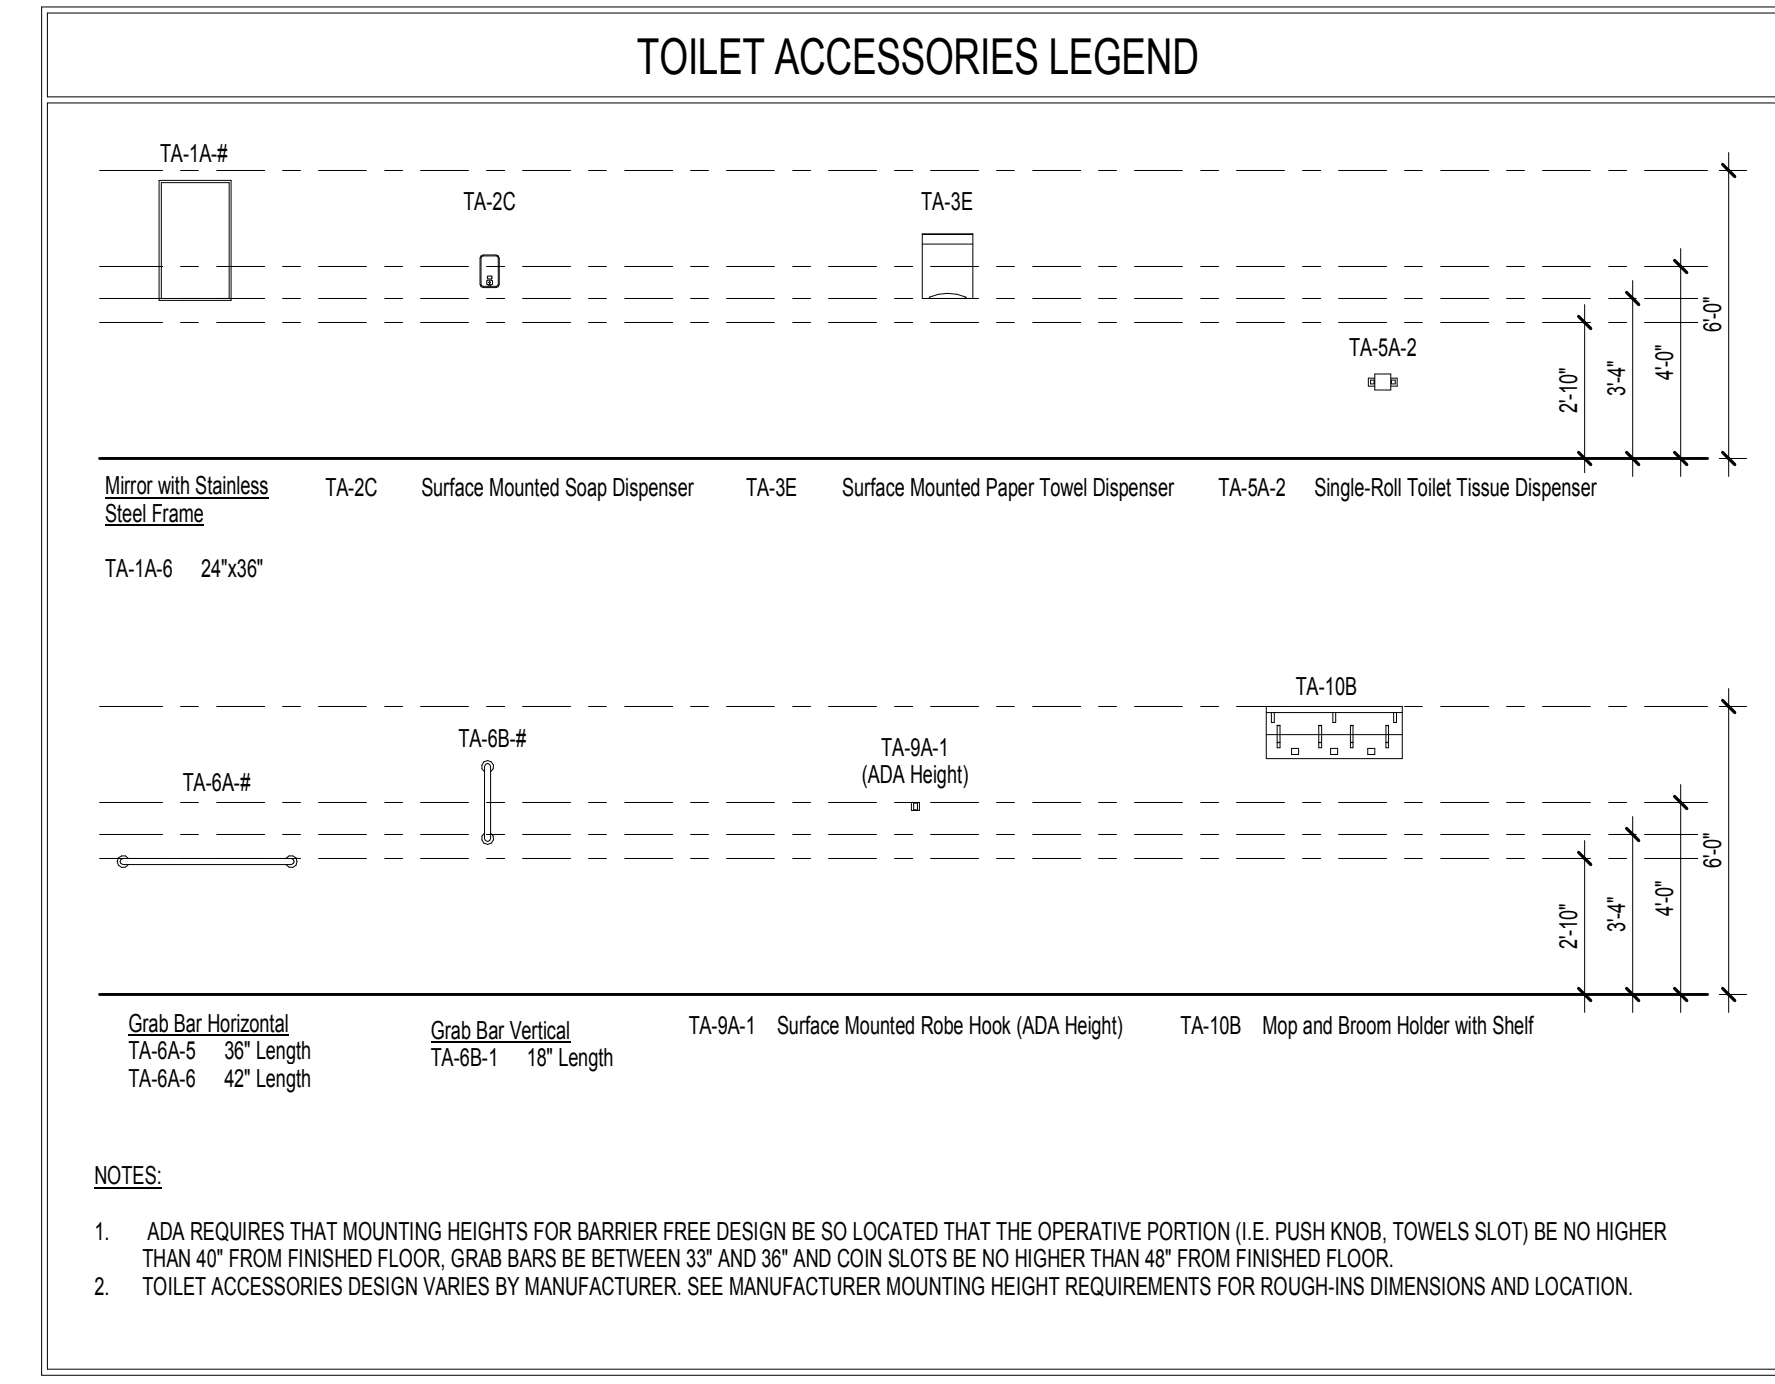

CABINET DIMENSIONS LEGEND

- CONTRACTOR TO FIELD VERIFY ALL DIMENSIONS BEFORE FABRICATION.
- DIMENSIONS DEVELOPED IN THIS LEGEND ARE TYPICAL UNLESS OTHERWISE NOTED IN ELEVATIONS AND/OR SECTIONS.

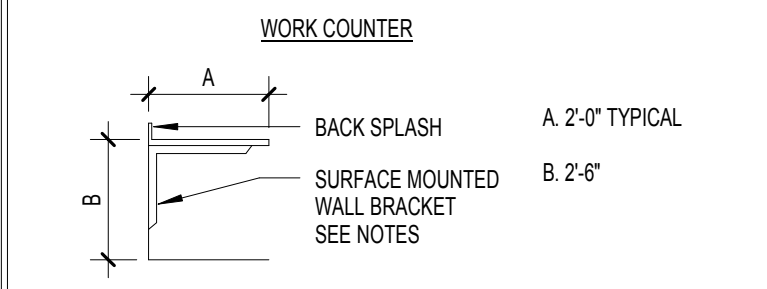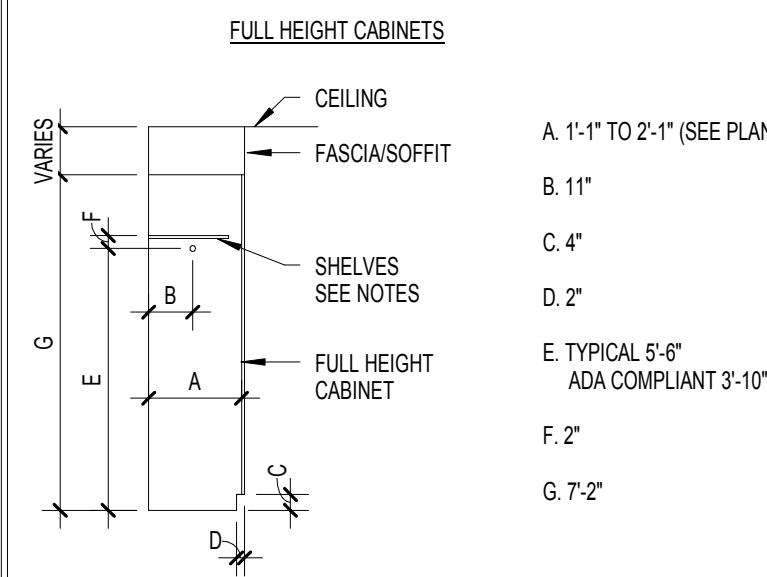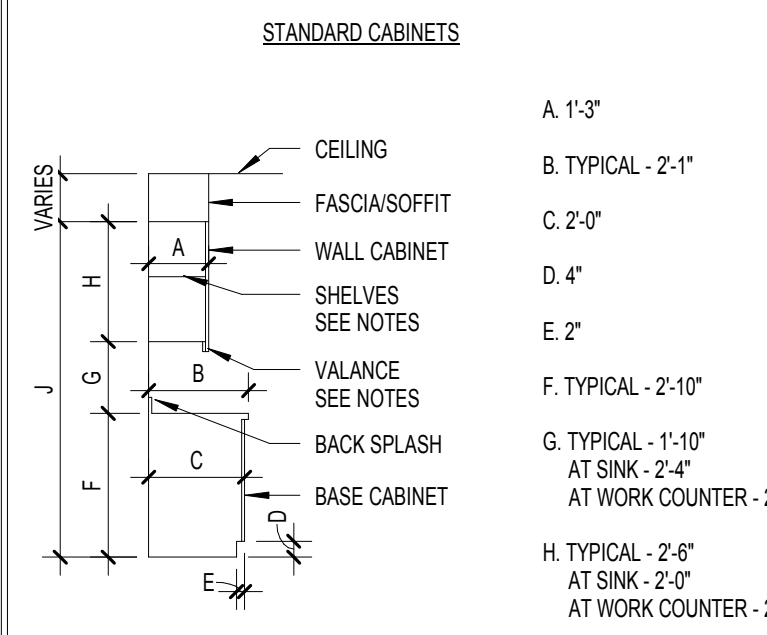


CASEWORK NOTES

- THESE NOTES ARE TYPICAL UNLESS OTHERWISE NOTED.
- ALL CASEWORK TO BE BALANCED CONSTRUCTION.
- ALL COUNTERTOPS WITH SINKS TO HAVE MOISTURE RESISTANT MDF SUBSTRATE.
- ALL EXPOSED AND SEMI EXPOSED PARTS, AS DETERMINED IN THE IDENTIFICATION OF PARTS NOTES, TO HAVE PLASTIC LAMINATE FINISH.
- ALL SIX FACES OF ADJUSTABLE SHELVING TO HAVE PLASTIC LAMINATE FINISH.
- ALL ADJUSTABLE SHELVING TO BE 12" DEEP UNLESS OTHERWISE NOTED.
- ALL SHELVES TO BE 3/4" THICK MDF FOR SPANS UP TO 3'-0". ADD 3/4" X 1-1/2" SOLID LUMBER DROPPED EDGE FOR SPANS OVER 3'-0" USE.
- ALL OPEN SPACE SIZES AND KNEE BRACES LOCATIONS TO BE VERIFIED WITH EQUIPMENT TO BE INSTALLED AND WITH ACTUAL ROOM DIMENSIONS.
- PROVIDE SURFACE MOUNTED WALL BRACKET FOR COUNTERTOPS WITH SPANS GREATER THAN 4'-0" UNLESS NOTED OTHERWISE.
- ALL PLASTIC LAMINATE JOINTS TO BE NOTED ON SHOP DRAWINGS.
- 4" BACKSPLASH AND ENDGRASP TYPICAL UNLESS OTHERWISE NOTED.
- ALL FINISHED END PANELS AT WALL CABINETS TO BE ONE CONTINUOUS PANEL INCLUDING VALANCE.
- ALL FINISHED END PANELS AT BASE CABINETS TO BE ONE CONTINUOUS PANEL INCLUDING BASE.
- ALL FILE CABINETS TO HAVE MINIMUM CLEAR DIMENSIONS TO ACCEPT STD. PENDULX FILE FRAME.
- ALL EXPOSED CORNERS OF COUNTERTOPS TO HAVE 1" RADIUS AND 3" AT NURSES STATION.
- AT CUTOUTS AND 1" SHAPED COUNTERTOPS, ALL INSIDE CORNERS TO BE SMOOTHLY ROUNDED WITH A MINIMUM CORNER RADIUS OF 1/2".
- INSTALL GROMMETS IN COUNTER TOPS @ 3'-0" ON CENTER.
- ALL WALL CABINETS TO HAVE VALANCE UNLESS NOTED OTHERWISE.
- FULL SHOWN INDICATES POSITION ONLY. SEE CODE FOR HINGE SIDE OF DOOR. LOCATE FULL OPPOSITE HINGE.
- IN EXISTING PARTITION WHERE METAL PLATE IS REQUIRED TO SUPPORT CABINETS, REMOVE SECTION OF EXISTING GYPSUM WALL BOARD TO INSTALL METAL PLATE.
- PROVIDE A MINIMUM 1-1/2" FILLER / SCRIBE STRIPS @ JUNCTION BETWEEN ALL BASE AND WALL CABINETS AND ADJACENT WALLS TO ALLOW DOORS TO SWING OPEN AT LEAST 90 DEGREES.


IDENTIFICATION OF PARTS NOTES

- A. EXPOSED PARTS - SURFACES VISIBLE WHEN:
- DRAWER FRONTS AND DOORS ARE CLOSED.
 - CABINETS AND SHELVING ARE OPEN TYPE OR BEHIND CLEAR GLASS DOORS.
 - BOTTOMS OF CABINETS ARE SEEN 42" OR MORE ABOVE FINISHED FLOOR.
 - TOPS OF CABINETS ARE SEEN BELOW 78" ABOVE FINISHED FLOOR, OR ARE VISIBLE FROM AN UPPER FLOOR OR STAIRCASE AFTER INSTALLATION.
 - PORTION OF CABINETS ARE VISIBLE AFTER FIXED APPLIANCES ARE INSTALLED.
 - FRONT EDGES OF CABINET BODY MEMBERS ARE VISIBLE OR SEEN THROUGH A GAP GREATER THAN 1/8" WITH DOORS AND DRAWERS CLOSED.
- B. SEMI-EXPOSED PARTS - SURFACES VISIBLE WHEN:
- DRAWER AND DOORS ARE IN THE OPEN POSITION.
 - BOTTOMS OF CABINETS ARE BETWEEN 30" AND UP TO 42" ABOVE FINISHED FLOOR.
 - ALL FRONT EDGES OF SHELVING BEHIND DOORS.
- C. CONCEALED SURFACES - SURFACES ARE CONCEALED WHEN:
- SURFACES ARE NOT VISIBLE AFTER INSTALLATION.
 - BOTTOMS OF CABINETS ARE LESS THAN 30" ABOVE FINISHED FLOOR.
 - TOPS OF CABINETS ARE OVER 78" ABOVE FINISHED FLOOR AND ARE NOT VISIBLE FROM AN UPPER FLOOR OR STAIRCASE AFTER INSTALLATION.
 - STRETCHERS, BLOCKING AND/OR COMPONENTS ARE CONCEALED BY DRAWERS.

TYPICAL BLOCKING/ANCHORING LOCATION

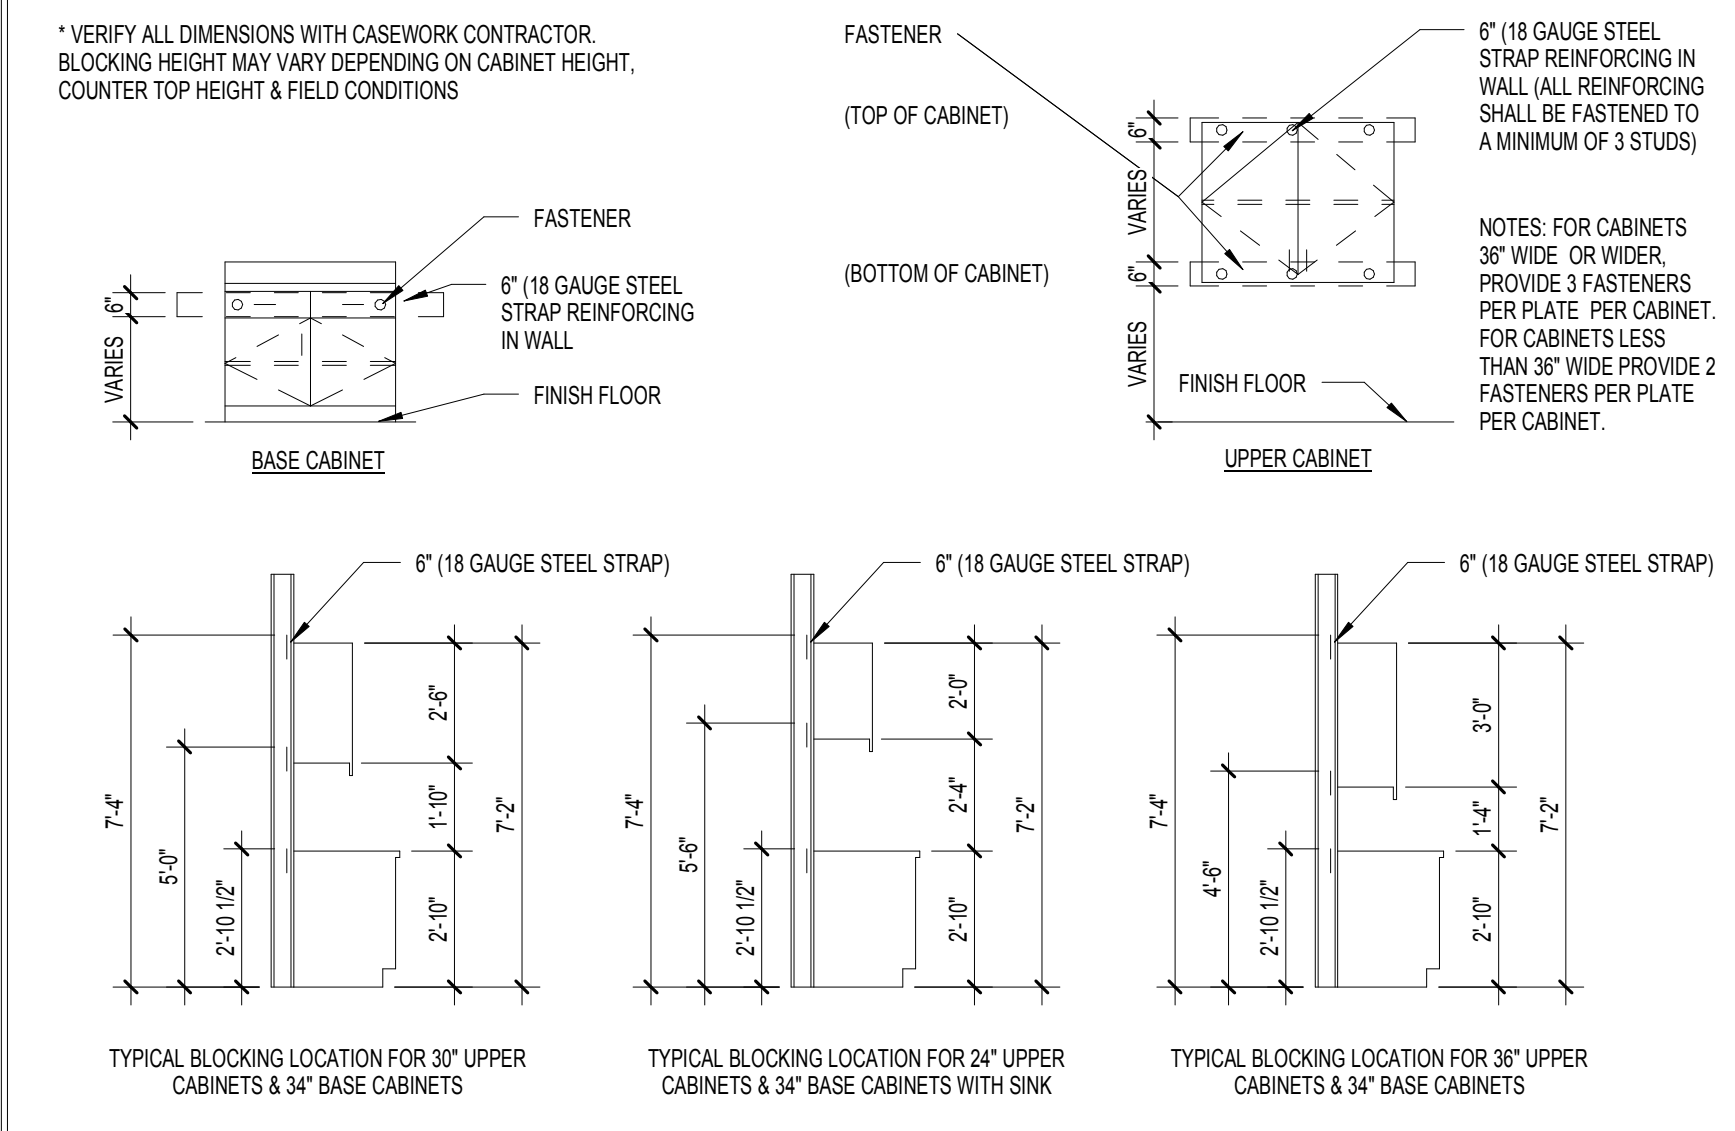

KEY ELEVATION

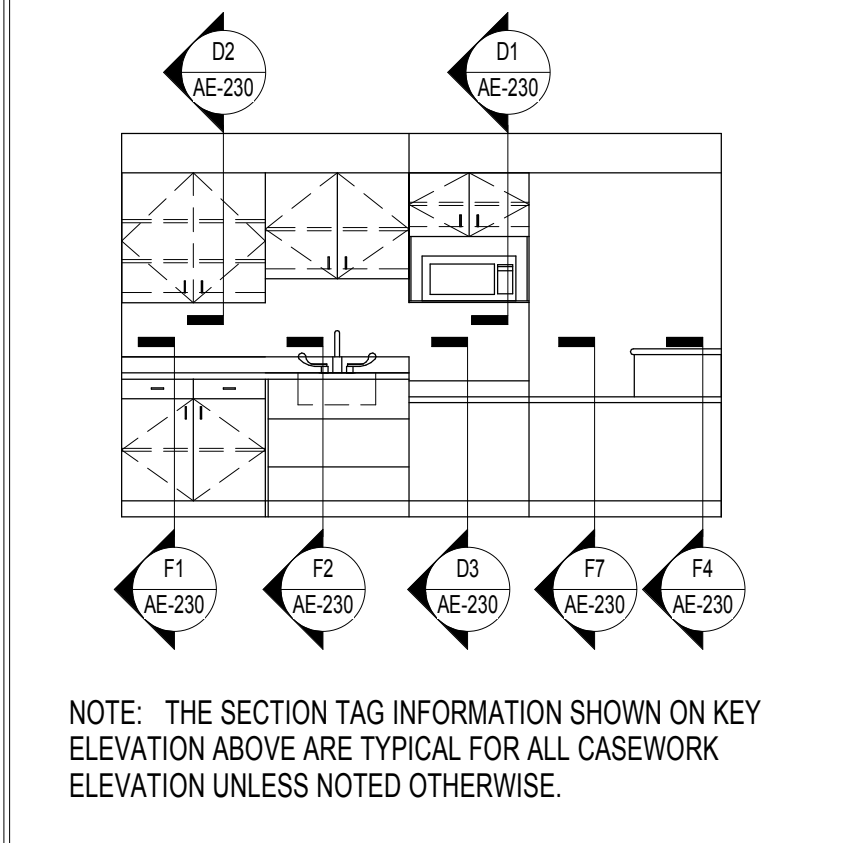

FULLY SPRINKLERED ISSUED FOR BID

CONSULTANTS: Lab Consultant: HERA MEP Engineer: H.F. Lenz 230 S. Broad Street, Suite 201 Philadelphia, PA 19102 Tel: (215) 670-5333 Fax: (215) 670-5334 1407 Scalp Avenue Johnstown, PA 15084 Tel: (814) 269-9366 Fax: (814) 269-9301	KEY PLAN:	ARCHITECT: ARRAY healthcare facilities solutions 2520 Renaissance Boulevard, Suite 110 King of Prussia, PA 19406 t: 610.270.0599 f: 610.270.0995 www.arrayhfs.com	Project Number 3515 Scale As indicated	Drawing Title DETAILS	Project Title REPLACEMENT OF AC-19 AND LABORATORY RENOVATION	VA Project Number VA244-P-1786 Building Number 2 Drawing Number AE-230	
Revisions <table><tr><td>Date</td><td></td></tr></table>	Date		Approved: Project Director	Location 3900 WOODLAND AVENUE PHILADELPHIA, PA 19104	Date 04-12-2012	Checked WJ	Drawn EN
Date							
Dwg. of	Office of Facilities Management	Department of Veterans Affairs					