


GENERAL NOTES:

1. AHU EQUIPMENT AND DEVICES TO BE DEMOLISHED ARE SHOWN FOR REFERENCE ONLY AND IN NO WAY REPRESENT THE TOTAL NUMBER AND EXACT LOCATION OF THE EQUIPMENT AND DEVICES. CONTRACTOR IS TO DISCONNECT AND REMOVE ALL ASSOCIATED DEVICES, WIRES, EXPOSED AND ABOVE CEILING CONDUITS, OUTLET BOXES, JUNCTION BOXES, ETC.
2. ON WALLS AND FLOORS THAT ARE TO REMAIN, IN-WALL AND BELOW FLOOR CONDUITS ARE TO REMAIN BUT REMOVE THE JUNCTION BOXES. CAP AND SEAL THE CONDUITS. REPAIR WALL AND FLOOR TO MATCH EXISTING.
3. CONTRACTOR SHALL VERIFY (E) CONDITIONS
4. DISCONNECT POWER AND CONTROL TO (E) THERMOSTAT. CONDUIT AND WIRING ARE TO REMAIN FOR REWIRE TO (N) THERMOSTAT.
5. REFER TO MECHANICAL DRAWINGS FOR INFORMATION.



SHEET NOTES:

- 1 REMOVE VAV BOXES ASSOCIATED POWER'S AND CONTROLS', CONDUIT AND WIRING BACK TO THE SOURCE PANEL OR THE LAST ACTIVE DEVICE.

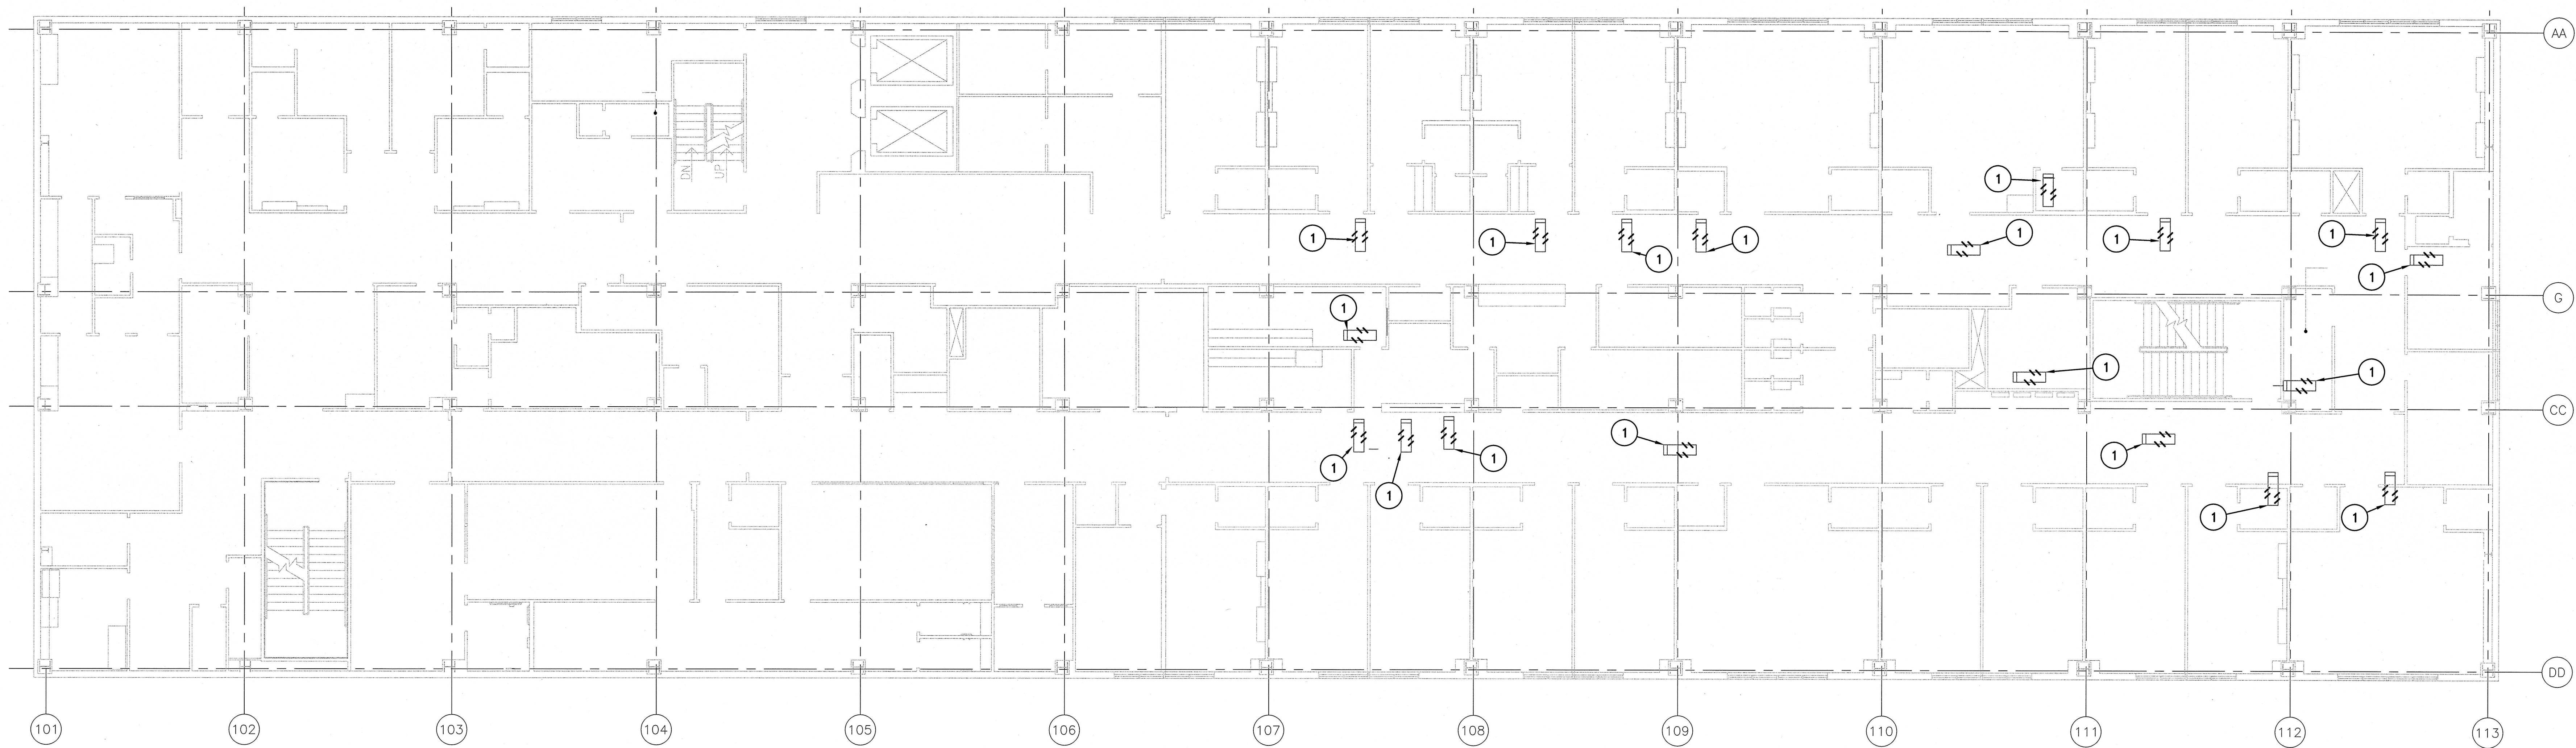

ELECTRICAL DEMOLITION PLAN 2ND FLOOR

SCALE: 1/8" = 1'-0"

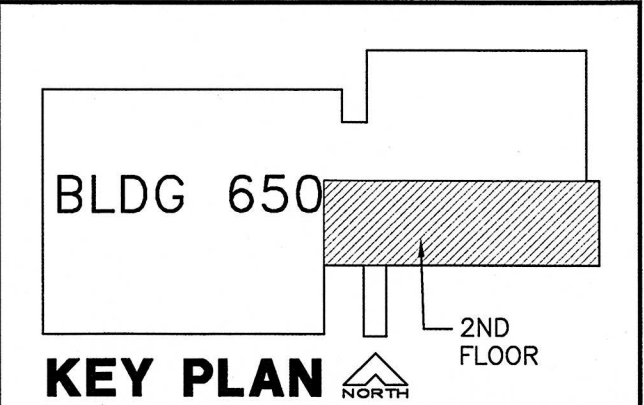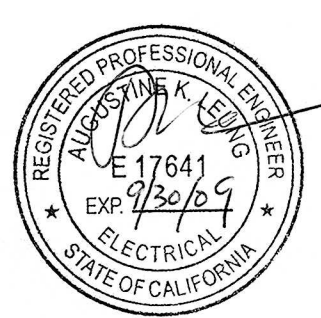

K.F. DAVIS ENGINEERING, INC
530 LA GONDA WAY, SUITE E
DANVILLE, CA 94526

Revisions:	Drawing Title: ELECTRICAL DEMOLITION PLAN 2ND FLOOR	Project Title: BLDG 650 REPLACE AIR HANDLERS 1 THRU 4, 7 AND 9 - 15	Date: 08/25/08
Approved:	Approved: Medical Center Director	Building Number:	Project No.: 61244-07-342
Approved:	Approved: Chief, Engineering Service	Location: MATHER VAMC MATHER CALIFORNIA	DRAWING No. E2.4
	Drawn: RMK		Dwg. Of
	Checked: AL		

