



**ARCHITECTURAL SYMBOLS**

- ℄ CENTER LINE
- (N) NEW WORK
- (E) EXISTING CONDITIONS
- ◄ ELEVATION INDICATOR
- CENTER LINE INDICATOR
- CONTRACT LIMIT LINE
- DEMOLITION LINE
- EXISTING TO REMAIN LINE
- FEATURES ABOVE LINE INDICATOR
- BREAK, ROUND (USER DEFINES SIZE)
- BREAK, STRAIGHT (SEE SECTION INDICATORS, BUILDING, WITH BREAK STANDARDS)
- DETAIL INDICATOR
- DETAIL INDICATOR
- DETAIL INDICATOR FOR SMALL CONDITIONS
- DIMENSION LINE
- DOOR OPENING/BORROWED LIGHT IDENTIFIER
- ROOM NAME AND NUMBER
- NORTH ARROW

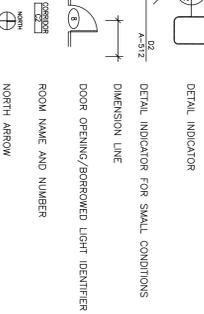

**MATERIALS LEGEND**


- CONCRETE TO REMAIN
- CONCRETE
- EARTH
- NEW CONSTRUCTION
- BASE COURSE

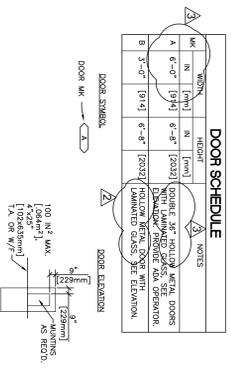


- NOTES:**
- ALL DOORS SHALL BE FINISH - 1/2" [12mm] TRACK UNLESS NOTED OTHERWISE.
  - TYP. ASIDE SHALL BE 8" [200mm] MIN. BOTTOM RAILS SHALL BE 12" MIN. [300mm].

**DOOR SCHEDULE**


- DOOR HARDWARE:**
- HARDWARE: EACH DOOR TO HAVE A CONTINUOUS HINGE STRIP, LOCK, LATCH PROTECTOR, CLOSER, FLOOR STOP, THRESHOLD, DOOR SWEEP, SET FRAME, SILENCE AND DIS-CHARGE TO THE FLOOR, AND THE LOCK ACCORDINGLY. HARDWARE SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS. HARDWARE SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS. HARDWARE SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.
  - ANTI-INTRUSION: CONTING. ALL HAND OPERATED HARDWARE (LATCHES, PULLS, PUSH BARS, PUSH PLATES, PROJECTS, AND FRAME BARS) SHALL BE PROVIDED WITH AN ANTI-INTRUSION/ANTI-TAMPER CONTING. THE HARDWARE SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.
  - CLOSERS: DOWNLY WITH AN 415X4 GRADE 1. PROVIDE FORGED AND CAST CLOSER BODY AND HAVE A MINIMUM SIDE MULTIPLE CLASSED FORCE.
  - HARDWARE SCHEDULE: A SCHEDULE HARDWARE CONSULT TO THE CORP THAT INCLUDES THE FOLLOWING INFORMATION: HARDWARE ITEM, QUANTITY, SIZE, REFERENCE PUBLICATION TYPE AND NUMBER, MANUFACTURER, SPECIFICATION, SERIALS, AND ANTI-INTRUSION/ANTI-TAMPER CONTING. THE HARDWARE SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS.

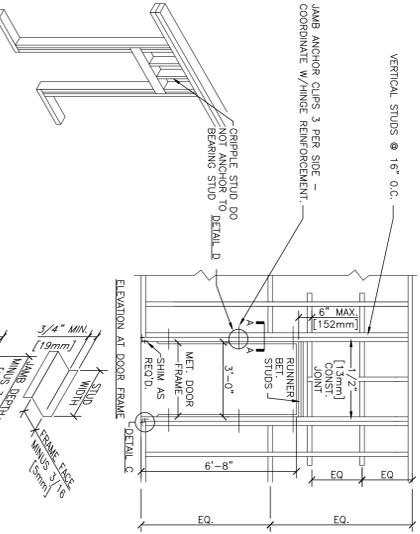


**1 FRAMING FOR DOORS**

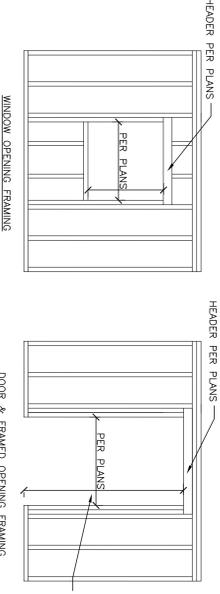


**2 TYP. OPENING FRAMING**

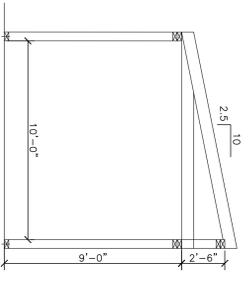


**3 WALKWAY FRAMING SECTION**

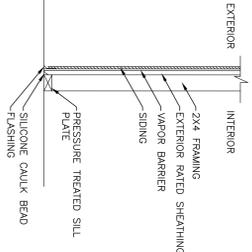


**4 WALL SECTION**

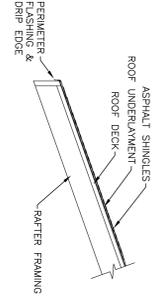


**5 ROOF SECTION**

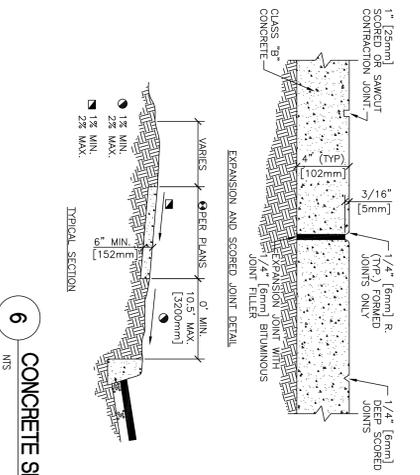

**6 CONCRETE SIDEWALK**

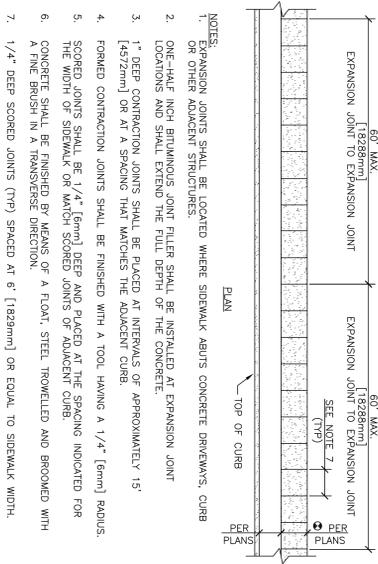

- NOTES:**
- EXPANSION JOINTS SHALL BE LOCATED WHERE SIDEWALK ABUTS CONCRETE DRIVEWAYS, CURB OR OTHER ADJACENT STRUCTURES.
  - ONE-HALF INCH BRITANNICUS JOINT FILLER SHALL BE INSTALLED AT EXPANSION JOINT LOCATIONS AND SHALL EXTEND THE FULL DEPTH OF THE CONCRETE.
  - 1" DEEP CONTRACTION JOINTS SHALL BE PLACED AT INTERVALS OF APPROXIMATELY 15' [4972mm] OR AT A SPACING THAT MATCHES THE ADJACENT CURB.
  - FORMED CONTRACTION JOINTS SHALL BE FINISHED WITH A TOOL, HAVING A 1/4" [6mm] RADIUS.
  - SCORED JOINTS SHALL BE 1/4" [6mm] DEEP AND PLACED AT THE SPACING INDICATED FOR THE WIDTH OF SIDEWALK OR MATCH SCORED JOINTS OF ADJACENT CURB.
  - CONCRETE SHALL BE FINISHED BY MEANS OF A FLOAT, STEEL TROWELED AND BROOMED WITH A FINE BRUSH IN A TRANSVERSE DIRECTION.
  - 1/4" DEEP SCORED JOINTS (TYP) SPACED AT 6' [1829mm] OR EQUAL TO SIDEWALK WIDTH.

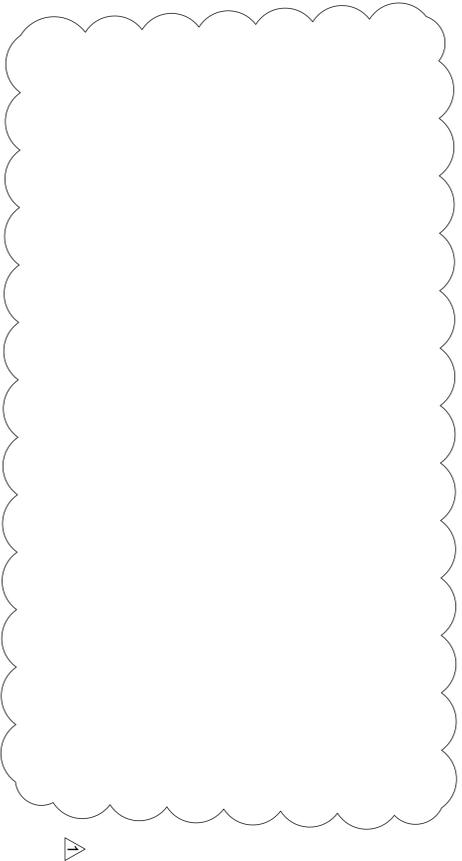

Revisions:	Date:
APPENDIX 3	08/27/2018
APPENDIX 2	08/20/2018
APPENDIX 1	08/16/2018

CONSULTANT	ARCHITECT/ENGINEER OF RECORD	STAMP
------------	------------------------------	-------

Office of Construction and Facilities Management	U.S. Department of Veterans Affairs
VA	
Approved: Project Director	
LEGEND AND DETAILS	Phase
FULLY SPRINKLERED	CONSTRUCTION DOCUMENTS
Project Title	CHEYENNE VAMC MRI BUILDING - TEMPORARY COVERED WALKWAY
Location	CHEYENNE, WY
Issue Date	08/07/18
Checked	MJB
Drawn	ELC
Project Number	442-18-014S
Building Number	MRI BUILDING
Drawing Number	A100

