

**Department of Veterans Affairs
Extension Corridor
Cleveland, Ohio**

VA Project No. 541-12-110



ISSUED FOR BIDDING
August 24, 2012

DEPARTMENT OF VETERANS AFFAIRS
EXTENSION CORRIDOR

TABLE OF CONTENTS
100% CONSTRUCTION DOCUMENTS
Section 00 01 10

	DIVISION 00 - SPECIAL SECTIONS	
00 01 10	Table of Contents	
00 01 15	List of Drawing Sheets	
	DIVISION 01 - GENERAL REQUIREMENTS	
01 00 00	General Requirements	
	Pre-Construction Risk Assessment	
	Infection Control Construction Permit	
	Site Specific Accident Prevention Plan	
	Site Specific Safety Plan Review Sheet	
	Green Environmental Management Systems (GEMS)	
	OSHA Requirements and Safety and Health Regulations	
01 31 00	Alternates	
01 32 16.14	Construction Progress Schedules	
01 33 23	Shop Drawings, Product Data, and Samples	
01 42 19	Reference Standards	
01 45 29	Testing Laboratory Services	
01 57 19	Temporary Environmental Controls	
01 58 16	Temporary Interior Signage	
01 74 19	Construction Waste Management	
	DIVISION 02 - EXISTING CONDITIONS	
02 41 00	Demolition	
	DIVISION 03 - CONCRETE	
03 30 00	Cast-In-Place Concrete	
	DIVISION 04 - MASONRY	
04 05 13	Masonry Mortaring	
04 05 16	Masonry Grouting	
04 20 00	Unit Masonry	
	DIVISION 05 - METALS	
05 12 00	Structural Steel Framing	
05 31 00	Steel Decking	
05 40 00	Cold-Formed Metal Framing	
05 50 00	Metal Fabrications	
	DIVISION 06 - WOOD, PLASTICS AND COMPOSITES	
06 10 00	Rough Carpentry	
06 16 00	Sheathing	
	DIVISION 07 - THERMAL AND MOISTURE PROTECTION	
07 11 13	Bituminous Damproofing	
07 21 13	Thermal Insulation	
07 22 00	Roof Insulation	
07 27 26	Fluid-Applied Membrane Air Barriers	

07 40 00	Metal Wall Panels	
07 53 60	Polyisobutylene Sheet Roofing	
07 60 00	Flashing and Sheet Metal	
07 72 00	Roof Accessories	
07 81 00	Applied Fireproofing	
07 84 00	Firestopping	
07 92 00	Joint Sealants	
	DIVISION 08 - OPENINGS	
08 11 13	Hollow Metal Doors and Frames	
08 31 13	Access Doors and Frames	
08 41 13	Aluminum-Framed Entrances and Storefronts	
08 44 13	Glazed Aluminum Curtain Walls	
08 71 00	Door Hardware	
08 71 13	Automatic Door Operators	
08 80 00	Glazing	
08 90 00	Louvers and Vents	
	DIVISION 09 - FINISHES	
09 22 16	Non-Structural Metal Framing	
09 29 00	Gypsum Board	
09 51 00	Acoustical Ceilings	
09 65 13	Resilient Base and Accessories	
09 65 16	Resilient Sheet Flooring	
09 67 23.30	Resinous Flooring	
09 91 00	Painting	
	DIVISION 10 - SPECIALTIES	
10 26 00	Wall and Door Protection	
10 44 13	Fire Extinguisher Cabinets	
	DIVISIONS 11 - 20	
	Not Used	
	DIVISION 21 - FIRE SUPPRESSION	
21 05 11	Common Work Results for Fire Suppression	
21 13 13	Wet Pipe Sprinkler Systems	
	DIVISION 22 - PLUMBING	
22 05 11	Common Work Results for Plumbing	
22 14 00	Facility Storm Drainage	
22 40 00	Plumbing Fixtures	
	DIVISION 23 - HEATING, VENTILATING, AND AIR CONDITIONING (HVAC)	
23 05 11	Common Work Results for HVAC and Steam Generation	
23 05 12	General Motor Requirements for HVAC Equipment	
23 05 41	Noise and Vibration Control for HVAC Piping and Equipment	
23 05 93	Testing, Adjusting, and Balancing for HVAC	
23 07 11	HVAC, Plumbing, and Boiler Plant Insulation	
23 09 23	Direct-Digital Control System for HVAC	
23 11 23	Facility Natural Gas Piping	
23 23 00	Refrigerant Piping	

23 31 00	HVAC Ducts and Casings	
23 37 00	Air Outlets and Inlets	
23 74 13	Packaged, Outdoor, Central-Station Air-Handling Units	
	DIVISIONS 24 - 25	
	Not Used	
	DIVISION 26 - ELECTRICAL	
26 05 11	Requirements for Electrical Installations	
26 05 21	Low-Voltage Electrical Power Conductors and Cables (600 Volts and Below)	
26 05 26	Grounding and Bonding for Electrical Systems	
26 05 33	Raceway and Boxes for Electrical Systems	
26 09 23	Lighting Controls	
26 24 16	Panelboards	
26 27 26	Wiring Devices	
26 29 21	Disconnect Switches	
26 51 00	Interior Lighting	
	DIVISION 27	
27 05 11	Requirements for Communications Installations	
27 05 26	Grounding and Bonding for Communications Systems	
27 05 33	Raceways and Boxes for Communications Systems	
27 51 16	Public Address and Mass Notification systems	
	DIVISION 28 - ELECTRONIC SAFETY AND SECURITY	
28 05 11	Requirements for Electronic Safety and Security Installations	
28 05 33	Raceways and Boxes for Electronic Safety and Security	
28 31 00	Fire Alarm Systems	
	DIVISIONS 29 - 30	
	Not Used	
	DIVISION 31 - EARTHWORK	
31 20 00	Earth Moving	
31 23 19	Dewatering	
31 63 26	Drilled Caissons	
	DIVISION 32 - EXTERIOR IMPROVEMENTS	
32 05 23	Cement and Concrete for Exterior Improvements	
32 12 16	Asphalt Paving	
32 31 13	Metal Fences and Gates	
32 84 00	Planting Irrigation	
32 90 00	Planting	
	DIVISIONS 33 - 49	
	Not Used	

- - - E N D - - -

SECTION 00 01 15
LIST OF DRAWING SHEETS

The Drawings listed below accompanying this Specification form a part of
the Contract.

<u>Drawing No.</u>	<u>Title</u>
<u>GENERAL</u>	
G-001	COVER SHEET
G-002	GENERAL INFORMATION SHEET
GC-101	LIFE SAFETY PLANS
<u>SURVEY/MAPPING</u>	
V-101	PROPERTY LINE SURVEY
V-102	EXISTING CONDITIONS SURVEY
<u>CIVIL</u>	
CU-101	UTILITY DEMOLITION PLAN
CU-102	UTILITY PLAN
CU-103	UTILITY PROFILES
CU-104	UTILITY DETAILS
CU-105	UTILITY PLAN ALTERNATE NO.2
CU-106	UTILITY PROFILE ALTERNATE NO.2
C-1	DEMOLITION AND STORM WATER POLLUTION PREVENTION PLANS
C-2	LAYOUT PLAN AND ALTERNATE NO.2 SITE PLAN
C-3	GRADING AND PAVING PLANS
C-4	SITE DETAILS
C-5	SITE DETAILS
<u>LANDSCAPE</u>	
L-1	IRRIGATION AND PLANTING PLANS
<u>STRUCTURAL</u>	
S-001	STRUCTURAL GENERAL NOTES
S-101	FOUNDATION, FIRST FLOOR & ROOF FRAMING PLAN
S-102	FIRST FLOOR ROOF FRAMING PLAN
S-501	TYPICAL CONCRETE DETAILS
S-502	CAISSON & GRADE BEAM TABLES AND DETAILS
S-510	STEEL COLUMN TABLE AND DETAILS
S-511	STEEL FRAMING SECTIONS
<u>ARCHITECTURAL</u>	
AD-101	DEMOLITION PLAN
AE-101	FLOOR PLANS
AE-102	ROOF PLANS
AE-201	EXTERIOR ELEVATIONS
AE-301	DEMOLITION SECTIONS
AE-311	WALL SECTIONS
AE-312	WALL SECTIONS
AE-501	WALL SECTION DETAILS
AE-502	WALL SECTION DETAILS
AE-511	EXTERIOR PLAN DETAILS
AE-512	EXTERIOR PLAN DETAILS
AE-513	EXTERIOR PLAN DETAILS
AE-601	INTERIOR PARTITION SCHEDULE, FINISH SCHEDULE
AE-611	DOOR & FRAME SCHEDULE
AR-101	REFLECTED CEILING PLANS

INTERIOR DESIGN

IN-101 FINISH FLOOR PLANS

FIRE SUPPRESSION

FX-001 FIRE SUPPRESSION ABBREVIATIONS, LEGENDS AND DETAILS
FX-10B BASEMENT FIRE SUPPRESSION PLAN
FX-101 FIRST FLOOR FIRE SUPPRESSION PLAN

MECHANICAL

ME-001 MECHANICAL SYMBOLS, ABBREVIATIONS AND LEGEND
ME-002 MECHANICAL CONTROLS LEGEND
MD-10B BASEMENT MECHANICAL DEMOLITION FLOOR PLAN
ME-10B BASEMENT MECHANICAL FLOOR PLAN
ME-101 FIRST FLOOR MECHANICAL FLOOR PLAN
ME-102 ROOF MECHANICAL PLAN
ME-501 MECHANICAL DETAILS
ME-502 MECHANICAL DETAILS
ME-503 MECHANICAL DETAILS
ME-601 MECHANICAL EQUIPMENT SCHEDULES
ME-701 CONTROL SEQUENCE OF OPERATIONS (PACKAGED ROOFTOP UNITS)
PL-001 PLUMBING SYMBOLS, ABBREVIATIONS AND LEGEND
PD-10B BASEMENT PLUMBING DEMOLITION FLOOR PLAN
PL-10B BASEMENT PLUMBING PLAN
PL-101 FIRST FLOOR PLUMBING PLAN
PL-102 ROOF PLUMBING PLAN

ELECTRICAL

E-001 ABBREVIATIONS, GENERAL NOTES AND LEGENDS
ED-101 ELECTRICAL DEMOLITION FLOOR PLANS
EL-101 ELECTRICAL LIGHTING FLOOR PLANS
EP-101 ELECTRICAL POWER FLOOR PLANS
EY-101 ELECTRICAL SYSTEM FLOOR PLANS
E-102 ELECTRICAL ROOF PLANS
E-401 ELECTRICAL PANEL LOCATIONS
E-611 LUMINAIRE SCHEDULE
E-631 PANEL SCHEDULES

TECHNOLOGY

TE-001 ABBREVIATIONS, GENERAL NOTES AND LEGENDS
TE-101 TECHNOLOGY DEVICE PLANS

- - - END - - -

SECTION 01 00 00
GENERAL REQUIREMENTS

TABLE OF CONTENTS

1.1 GENERAL INTENTION.....	1
1.2 STATEMENT OF BID ITEM(S)	2
1.4 construction security REQUIREMENTS.....	2
1.5 FIRE SAFETY	3
1.6 OPERATIONS AND STORAGE AREAS.....	7
1.7 ALTERATIONS	11
1.8 INFECTION PREVENTION MEASURES	12
1.9 DISPOSAL AND RETENTION.....	18
1.10 RESTORATION.....	19
1.11 As-Built Drawings.....	20
1.12 USE OF ROADWAYS.....	20
1.13 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT	20
1.14 TEMPORARY USE OF EXISTING ELEVATORS.....	22
1.15 TEMPORARY TOILETS.....	22
1.16 AVAILABILITY AND USE OF UTILITY SERVICES	23
1.17 NEW TELEPHONE EQUIPMENT.....	24
1.18 TESTS.....	24
1.19 INSTRUCTIONS.....	25
1.20 GOVERNMENT-FURNISHED PROPERTY.....	26
1.21 RELOCATED EQUIPMENT AND ITEMS.....	27

GENERAL REQUIREMENTS

SECTION 01 00 00
GENERAL REQUIREMENTS

1.1 GENERAL INTENTION

- A. Contractor shall completely prepare site for building operations, including demolition and removal of existing structures, and furnish labor and materials and perform work for Extension Corridor as required by drawings and specifications.
- B. Visits to the site, by Bidders, will be conducted as indicated in the Solicitation to Bidders.
- C. Offices of Westlake Reed Leskosky, as Architect-Engineers, will render certain technical services during construction. Such services shall be considered as advisory to the Government and shall not be construed as expressing or implying a contractual act of the Government without affirmations by Contracting Officer or his duly authorized representative.
- D. Before placement and installation of work subject to tests by testing laboratory retained and paid for by the Contractor, the Contractor shall notify the COTR in sufficient time to enable testing laboratory personnel to be present at the site in time for proper taking and testing of specimens and field inspection. Such prior notice shall be not less than three work days unless otherwise designated by the COTR.
- E. All employees of general contractor and subcontractors shall comply with VA security management program and obtain permission of the VA police, be identified by project and employer, and restricted from unauthorized access.
- F. Prior to commencing work, general contractor shall provide proof that a OSHA certified "competent person" (CP) (29 CFR 1926.20(b)(2)) will maintain a presence at the work site whenever the general or subcontractors are present.
 - 1. General contractor is required to provide a full time project manager or superintendent, dedicated to this project.
- G. Training:

GENERAL REQUIREMENTS

1. All employees of general contractor or subcontractors shall have the following required hours of OSHA certified Construction Safety course and /or other relevant competency training, as determined by VA CP with input from the ICRA team.
 - a. Superintendent: 30 hours
 - b. All other Workers: 10 hours
2. Submit training records of all such employees for approval before the start of work.

1.2 STATEMENT OF BID ITEM(S)

- A. ITEM 1, Extension Corridor: Work includes general construction, alterations, mechanical and electrical work, fire protection, utility systems, and necessary removal of existing structures and construction and certain other items. Work to be completed within 200 calendar days after receipt of Notice to Proceed.

1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR

- A. AFTER AWARD OF CONTRACT, zero (0) sets of specifications and drawings will be furnished.

1.4 CONSTRUCTION SECURITY REQUIREMENTS

A. Security Plan:

1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
2. The General Contractor is responsible for assuring that all subcontractors working on the project and their employees also comply with these regulations.

B. Security Procedures:

1. General Contractor's employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.

GENERAL REQUIREMENTS

2. For working outside the "regular hours" as defined in the contract, The General Contractor shall give 3 days notice to the Contracting Officer so that security arrangements can be provided for the employees. This notice is separate from any notices required for utility shutdown described later in this section.
3. No photography of VA premises is allowed without written permission of the Contracting Officer.
4. VA reserves the right to close down or shut down the project site and order General Contractor's employees off the premises in the event of a national emergency. The General Contractor may return to the site only with the written approval of the Contracting Officer.

C. Key Control:

1. The General Contractor shall provide duplicate keys and lock combinations to the COTR for the purpose of security inspections of every area of project including tool boxes and parked machines and take any emergency action.
2. The General Contractor shall turn over all permanent lock cylinders to the VA locksmith for permanent installation. See Section 08 71 00, DOOR HARDWARE and coordinate.
3. All construction doors/access doors must use VA key system, and remain locked at all times from the corridor/exterior side.

D. Motor Vehicle Restrictions

1. Vehicle authorization request shall be required for any vehicle entering the site and such request shall be submitted 24 hours before the date and time of access. Access shall be restricted to picking up and dropping off materials and supplies.
2. No parking is available at Medical Center for contractors and Contractor commuter vehicles shall be parked off-site.

1.5 FIRE SAFETY

- A. Applicable Publications: Publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

GENERAL REQUIREMENTS

1. American Society for Testing and Materials (ASTM):

E84-2008Surface Burning Characteristics of Building
Materials

2. National Fire Protection Association (NFPA):

10-2006Standard for Portable Fire Extinguishers

30-2007Flammable and Combustible Liquids Code

51B-2003Standard for Fire Prevention During Welding,
Cutting and Other Hot Work

70-2007National Electrical Code

241-2004Standard for Safeguarding Construction,
Alteration, and Demolition Operations

3. Occupational Safety and Health Administration (OSHA):

29 CFR 1926Safety and Health Regulations for Construction

B. Fire Safety Plan: Establish and maintain a fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to COTR and Facility Safety Manager for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. Prior to any worker for the contractor or subcontractors beginning work, they shall undergo a safety briefing provided by the general contractor's competent person per OSHA requirements. This briefing shall include information on the construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, etc. Documentation shall be provided to the COTR that individuals have undergone contractor's safety briefing.

1. A Hazardous Work Activity Checklist must be completed by the Contractor. Any activity with a YES response is to be detailed in the Site Specific Safety Plan. A sample Hazardous Work Activity Checklist is included at the end of this specification.

GENERAL REQUIREMENTS

- C. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.
- D. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).
- E. Temporary Construction Partitions:
1. Install and maintain temporary construction partitions to provide smoke-tight separations between construction areas and adjoining areas. Construct partitions of gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on both sides of fire retardant treated wood or metal steel studs. Extend the partitions through suspended ceilings to floor slab deck or roof. Seal joints and penetrations. At door openings, install Class C, ¾ hour fire/smoke rated doors with self-closing devices and VA locking system (storeroom type lock always locked from the corridor side).
 2. Install temporary construction partitions as shown on drawings to maintain integrity of existing exit stair enclosures, exit passageways, fire-rated enclosures of hazardous areas, horizontal exits, smoke barriers, vertical shafts and openings enclosures.
 3. Close openings in smoke barriers and fire-rated construction to maintain fire ratings. Seal penetrations with listed through-penetration firestop materials in accordance with Section 07 84 00, FIRESTOPPING.
 4. Temporary partitions shall be constructed outside of normal working hours, as defined in Article 1.6, Paragraph F.
- F. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.
- G. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with COTR.
- H. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to

GENERAL REQUIREMENTS

COTR. Any construction materials found in exit stairs or corridors will be disposed of at Contractor's expense.

- I. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.
- J. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.
- K. Sprinklers: Install, test and activate new automatic sprinklers prior to removing existing sprinklers.
- L. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with COTR. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the COTR.
- M. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with COTR.
- N. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with COTR. Obtain permits from COTR at least 48 hours in advance.
- O. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to COTR.
- P. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. In separate and detached buildings under construction, smoking is prohibited except in designated smoking rest areas.

GENERAL REQUIREMENTS

- Q. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily. (Refer to Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT for GEMS Policy Requirements)
- R. Perform other construction, alteration and demolition operations in accordance with 29 CFR 1926.
- S. If required, submit documentation to the COTR that personnel have been trained in the fire safety aspects of working in areas with impaired structural or compartmentalization features.
- T. See additional OSHA Requirements and Safety and Health Regulations attachment at the end of this specification section.

1.6 OPERATIONS AND STORAGE AREAS

- A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance.
- B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work. With the written consent of the Contracting Officer, the buildings and utilities may be abandoned and need not be removed.
- C. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.

GENERAL REQUIREMENTS

- D. Working space and space available for storing materials shall be as determined by the COTR.
- E. Workmen are subject to rules of Medical Center applicable to their conduct.
- F. Execute work so as to interfere as little as possible with normal functioning of Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment, and with work being done by others. Use of equipment and tools that transmit vibrations and noises through the building structure, are not permitted in buildings that are occupied, during construction, jointly by patients or medical personnel, and Contractor's personnel, except as permitted by COTR where required by limited working space.
 - 1. Schedule delivery of materials and equipment to immediate construction working areas within buildings in use by Department of Veterans Affairs in quantities sufficient that do not impede with Medical Center activities. Provide unobstructed access to Medical Center areas required to remain in operation.
 - 2. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of Contractor's materials and equipment will be permitted subject to fire and safety requirements and review and approval by COTR.
 - 3. Disruptive work to the VAMC, such as excessive noise, vibration, etc., is prohibited during normal working hours, 8 a.m. to 4:30 p.m., Monday through Friday. The COTR has sole discretion to stop work and require that it be performed after normal business hours, with no additional cost to the Government. Additionally, such work performed adjacent to occupied rooms is prohibited.
 - 4. The contractor shall thoroughly investigate the impact of shutdowns on patient and staff prior to proceeding with shutdown.
- G. Phasing: To insure such executions, Contractor shall furnish the COTR with a schedule of approximate phasing dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, Contractor shall notify the COTR two weeks in advance for final approval of the proposed date of starting work in

GENERAL REQUIREMENTS

each specific area of site, building or portion thereof. Arrange such dates to insure accomplishment of this work in successive sequences mutually agreeable to COTR and Contractor. Final inspection of each phase before moving to the next will be required through the Contracting Officer and COTR.

H. When a building is turned over to Contractor, Contractor shall accept entire responsibility therefore.

1. Contractor shall maintain a minimum temperature of 4 degrees C (40 degrees F) at all times, except as otherwise specified.
2. Contractor shall maintain in operating condition existing fire protection and alarm equipment. In connection with fire alarm equipment, Contractor shall make arrangements for pre-inspection of site with Fire Department or Company (Department of Veterans Affairs or municipal) whichever will be required to respond to an alarm from Contractor's employee or watchman.

I. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by COTR.

1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of COTR. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without the Medical Center Director's prior knowledge and written approval. Refer to specification Sections 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, 27 05 11 REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS and 28 05 11, REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS for additional requirements.

GENERAL REQUIREMENTS

2. Contractor shall submit a request to interrupt any such services to COTR, in writing, three (3) days in advance of a minor shut down and two (2) weeks in advance of major a interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.
 3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Medical Center. Interruption time approved by Medical Center may occur at other than Contractor's normal working hours.
 4. Major interruptions of any system, including crane and dock usage, must be requested, in writing, at least 14 calendar days prior to the desired time and shall be performed as directed by the COTR.
 5. In case of a contract construction emergency, service will be interrupted on approval of COTR. Such approval will be confirmed in writing as soon as practical.
 6. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the Contractor.
 7. All utility service shutdowns such as water, gas, steam, sewers, electricity, or fire protection shall occur during off-hours or weekends at no additional cost to the Government.
- J. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, which are to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged at project boundary line. The lines shall not be capped in finished areas, but shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas, or within walls or partitions; so that they are completely behind the finished surfaces.
- K. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:

GENERAL REQUIREMENTS

1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles.
 2. Method and scheduling of required cutting, altering and removal of existing roads, walks and entrances must be approved by the COTR.
- L. Coordinate the work for this contract with other construction operations as directed by COTR. This includes the scheduling of traffic and the use of roadways, as specified in Article, USE OF ROADWAYS.

1.7 ALTERATIONS

- A. Survey: Before any work is started, the Contractor shall make a thorough survey with the COTR areas of buildings in which alterations occur and areas which are anticipated routes of access, and furnish a report, signed by both, to the Contracting Officer. This report shall list by rooms and spaces:
1. Existing condition and types of resilient flooring, doors, windows, walls and other surfaces not required to be altered throughout affected areas of building.
 2. Existence and conditions of items such as plumbing fixtures and accessories, electrical fixtures, equipment, venetian blinds, shades, etc., required by drawings to be either reused or relocated, or both.
 3. Shall note any discrepancies between drawings and existing conditions at site.
 4. Shall designate areas for working space, materials storage and routes of access to areas within buildings where alterations occur and which have been agreed upon by Contractor and COTR.
- B. Any items required by drawings to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of COTR, to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by Contractor with new items in accordance with specifications which will be furnished by Government. Provided the contract work is changed by reason of this subparagraph B, the contract will be modified accordingly, under provisions of clause entitled

GENERAL REQUIREMENTS

"DIFFERING SITE CONDITIONS" (FAR 52.236-2) and "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).

C. Re-Survey: Thirty days before expected partial or final inspection date, the Contractor and COTR together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors, windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:

1. Re-survey report shall also list any damage caused by Contractor to such flooring and other surfaces, despite protection measures; and, will form basis for determining extent of repair work required of Contractor to restore damage caused by Contractor's workmen in executing work of this contract.

D. Protection: Provide the following protective measures:

1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.
2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.
3. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

1.8 INFECTION PREVENTION MEASURES

A. Infection Control permits (see sample at the end of this specification section) will be issued by the COTR. The Infection Control Permits will be posted outside the appropriate construction area. More than one permit may be issued for a construction project if the work is located in separate areas requiring separate classes. The primary project scope area for this project is: Class III, however, work outside the primary project scope area may vary. The required infection control precautions are denoted on the following table:

GENERAL REQUIREMENTS

Description of Required Infection Control Precautions by Class

During Construction Project	Upon Completion of Project
<p>CLASS I</p> <ol style="list-style-type: none"> 1. Notify and receive permission from the COTR to perform requested work. 2. Execute work by methods to minimize raising dust from construction operations. 3. Immediately replace a ceiling tile displaced for visual inspection. 	<ol style="list-style-type: none"> 1. Notify COTR for inspection once the work is complete.
<p>CLASS II</p> <ol style="list-style-type: none"> 1. Notify and receive permission from the COTR to perform requested work. 2. Provide active means to prevent airborne dust from dispersing into atmosphere. 3. Water mist work surfaces to control dust while cutting. 4. Seal unused doors with duct tape. 5. Block off and seal air vents. 6. Place dust mat at entrance and exit of work area. 7. Remove or isolate HVAC system in areas where work is being performed. 	<ol style="list-style-type: none"> 1. Wipe work surfaces with disinfectant. 2. Contain construction waste before transport in tightly covered containers. 3. Wet mop and/or vacuum with HEPA filtered vacuum before leaving work area. 4. Remove isolation of HVAC system in areas where work is being performed.

CLASS III	<ol style="list-style-type: none"> 1. Obtain and post valid Infection Control Construction Permit at each work site. Permit must be signed by COTR, I.C. Nurse and General Contractor to be valid. 2. Remove or isolate HVAC system in area where work is being done to prevent contamination of duct system. 3. Complete all critical barriers, i.e., sheetrock, plywood, plastic, to seal area from non-work area or implement control cube method (cart with plastic covering and sealed connection to work site with HEPA vacuum for vacuuming prior to exit) before construction begins. Construction of barrier will need to occur outside normal work shifts with approval of COTR. 4. Construct anteroom where possible and directed by COTR. 5. Maintain negative air pressure within work site utilizing HEPA equipped air filtration units. 6. Contain construction waste before transport in tightly covered containers. 7. Cover transport receptacles or carts. Tape covering unless solid lid. 8. If the spread of dust from construction personnel is not contained workers may be required to wear shoe covers and or be vacuumed prior to leaving worksite at the discretion of the COTR or I.C. Nurse. 9. Seal holes, pipes, conduits and punctures appropriately. 10. Include particle count readings on daily logs against baseline points as required by COTR 	<ol style="list-style-type: none"> 1. Do not remove barriers from work area until completed project is inspected by the owner's Safety Department. 2. Remove barrier materials carefully to minimize spreading of dirt and debris associated with construction. Barriers are required to be removed after hours with approval of COTR. 3. Vacuum work area with HEPA filtered vacuums. 4. Wet mop area with disinfectant. 5. Remove isolation of HVAC system in areas where work is being performed.
-----------	---	---

GENERAL REQUIREMENTS

	or I.C. Nurse.	
CLASS IV	<ol style="list-style-type: none"> 1. Follow all requirements listed in Class III as well as additional requirements listed below. 2. Construct anteroom and require all personnel to pass through this room so they can be vacuumed using a HEPA vacuum cleaner before leaving work site, or they can wear cloth or paper coveralls that are removed each time they leave the work site. 3. All personnel entering work site are required to wear shoe covers. Shoe covers must be changed each time the worker exits the work area. 	<ol style="list-style-type: none"> 1. Before work is turned over and accepted by the VA a certified I.H. must be used to certify cleaning as well as swab and air sampling of the area. These tests shall meet or exceed industry standards for the type of area being renovated.

B. An infection control orientation will be provided by the VA Infection Control Personnel to the Contractor prior to construction start.

C. Implement the requirements of VAMC's Infection Control Risk Assessment (ICRA) team. ICRA Group may monitor dust in the vicinity of the construction work and require the Contractor to take corrective action immediately if the safe levels are exceeded.

GENERAL REQUIREMENTS

D. Establish and maintain a dust control program as part of the contractor's infection preventive measures in accordance with the guidelines provided by ICRA Group as specified here. Prior to start of work, prepare a plan detailing project-specific dust protection measures, including periodic status reports, and submit to COTR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

1. All personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the medical center.

E. Medical Center Infection Control personnel shall monitor for airborne disease (e.g. aspergillosis) as appropriate during construction. A baseline of conditions may be established by the medical center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality. In addition:

1. The COTR and VAMC Infection Control personnel shall review pressure differential monitoring documentation to verify that pressure differentials in the construction zone and in the patient-care rooms are appropriate for their settings. The requirement for negative air pressure in the construction zone shall be maintained at all times. Upon notification, the contractor shall implement corrective measures to restore proper pressure differentials as needed.
2. In case of any problem, the medical center, along with assistance from the contractor, shall conduct an environmental assessment to find and eliminate the source.

F. In general, following preventive measures shall be adopted during construction to keep down dust and prevent mold.

1. Dampen debris to keep down dust and provide temporary construction partitions in existing structures where directed by COTR. Blank off ducts and diffusers to prevent circulation of dust into occupied areas during construction.
2. Do not perform dust producing tasks within occupied areas without the approval of the COTR. For construction in any areas that will remain

GENERAL REQUIREMENTS

jointly occupied by the medical Center and Contractor's workers, the Contractor shall:

- a. Provide dust proof temporary drywall construction barriers to completely separate construction from the operational areas of the hospital in order to contain dirt debris and dust. Barriers shall be sealed and made presentable on hospital occupied side. Install a self-closing rated door in a metal frame, commensurate with the partition, to allow worker access. Maintain negative air at all times. Barrier installation to be done outside normal Medical Center hours.
- b. HEPA filtration is required where the exhaust dust may reenter the breathing zone. Contractor shall verify that construction exhaust to exterior is not reintroduced to the medical center through intake vents, or building openings. Install HEPA (High Efficiency Particulate Accumulator) filter vacuum system rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. Insure continuous negative air pressures occurring within the work area. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Exhaust hoses shall be heavy duty, flexible steel reinforced and exhausted so that dust is not reintroduced to the Medical Center.
- c. Adhesive Walk-off/Carpet Walk-off Mats, minimum 600mm x 900mm (24" x 36"), shall be used at all interior transitions from the construction area to occupied medical center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.
- d. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as they are created. Transport these outside the construction area in containers with tightly fitting lids at the end of each shift.
- e. The contractor shall not haul debris through patient-care areas without prior approval of the COTR and the Medical Center. When,

GENERAL REQUIREMENTS

approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.

- f. Using a HEPA vacuum, clean inside the barrier and vacuum ceiling tile prior to replacement. Any ceiling access panels opened for investigation beyond sealed areas shall be sealed immediately when unattended.
- g. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.
- h. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.

G. Final Cleanup:

- 1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
- 2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
- 3. All new air ducts shall be cleaned prior to final inspection with reports submitted to COTR.

1.9 DISPOSAL AND RETENTION

- A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:

GENERAL REQUIREMENTS

1. Reserved items which are to remain property of the Government are identified by attached tags or noted on drawings or in specifications as items to be stored. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by COTR.
2. Items not reserved shall become property of the Contractor and be removed by Contractor from Medical Center.
3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractor's operation.

1.10 RESTORATION

- A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the COTR. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the COTR before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.
- B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.
- C. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workmen to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone) which

GENERAL REQUIREMENTS

are indicated on drawings and which are not scheduled for discontinuance or abandonment.

- D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2).
- E. Do not cut and patch operating elements and related components in a manner that results in reducing their capacity to perform as intended or that results in increased maintenance or decreased operational life or safety. This includes all fire-rated assemblies. Provide submittals indicating UL listed methods for patching all fire-rated assemblies.

1.11 AS-BUILT DRAWINGS

- A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications.
- B. All variations shall be shown in the same general detail as used in the contract drawings. To insure compliance, as-built drawings shall be made available for the COTR's review, as often as requested.
- C. Contractor shall deliver two approved completed sets of as-built drawings to the COTR within 15 calendar days after each completed phase and after the acceptance of the project by the COTR.
- D. Paragraphs A, B, & C shall also apply to all shop drawings.

1.12 USE OF ROADWAYS

- A. For hauling, use only established public roads and roads on Medical Center property and, when authorized by the COTR, such temporary roads which are necessary in the performance of contract work. Temporary roads shall be constructed by the Contractor at Contractor's expense. When necessary to cross curbing, sidewalks, or similar construction, they must be protected by well-constructed bridges.

1.13 TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT

- A. Use of new installed mechanical and electrical equipment to provide heat, ventilation, plumbing, light and power will be permitted subject to compliance with the following provisions:

GENERAL REQUIREMENTS

1. Permission to use each unit or system must be given by COTR. If the equipment is not installed and maintained in accordance with the following provisions, the COTR will withdraw permission for use of the equipment.
 2. Electrical installations used by the equipment shall be completed in accordance with the drawings and specifications to prevent damage to the equipment and the electrical systems, i.e. transformers, relays, circuit breakers, fuses, conductors, motor controllers and their overload elements shall be properly sized, coordinated and adjusted. Voltage supplied to each item of equipment shall be verified to be correct and it shall be determined that motors are not overloaded. The electrical equipment shall be thoroughly cleaned before using it and again immediately before final inspection including vacuum cleaning and wiping clean interior and exterior surfaces.
 3. Units shall be properly lubricated, balanced, and aligned. Vibrations must be eliminated.
 4. Automatic temperature control systems for preheat coils shall function properly and all safety controls shall function to prevent coil freeze-up damage.
 5. The air filtering system utilized shall be that which is designed for the system when complete, and all filter elements shall be replaced at completion of construction and prior to testing and balancing of system.
 6. All components of heat production and distribution system, metering equipment, condensate returns, and other auxiliary facilities used in temporary service shall be cleaned prior to use; maintained to prevent corrosion internally and externally during use; and cleaned, maintained and inspected prior to acceptance by the Government.
- B. Prior to final inspection, the equipment or parts used which show wear and tear beyond normal, shall be replaced with identical replacements, at no additional cost to the Government.
- C. This paragraph shall not reduce the requirements of the mechanical and electrical specifications sections.

GENERAL REQUIREMENTS

1.14 TEMPORARY USE OF EXISTING ELEVATORS

A. Use of existing elevators for handling building materials and Contractor's personnel will be permitted subject to following provisions:

1. Contractor makes all arrangements with the COTR for use of elevators. The COTR will ascertain that elevators are in proper condition. Contractor may use elevators for daily use for personnel only between the hours of 7:00 am and 6:00 pm and for special nonrecurring time intervals when permission is personnel for operating elevators will not be provided by the Department of Veterans Affairs.
2. Contractor to develop a proposed elevator usage plan for review and approval by COTR.
3. Contractor covers and provides maximum protection of following elevator components:
 - a. Entrance jambs, heads soffits and threshold plates.
 - b. Entrance columns, canopy, return panels and inside surfaces of car enclosure walls.
 - c. Finish flooring.
4. If brake lining of elevators are excessively worn or damaged during temporary use, they shall be removed and replaced by new brake lining.
5. All parts of main controller, starter, relay panel, selector, etc., worn or damaged during temporary use shall be removed and replaced with new parts, if recommended by elevator inspector after elevator is released by Contractor.
6. Place elevator in condition equal, less normal wear, to that existing at time it was placed in service of Contractor as approved by Contracting Officer.

1.15 TEMPORARY TOILETS

A. Provide where directed by COTR, ample temporary sanitary toilet accommodations with suitable sewer and water connections; or, when approved by COTR, provide suitable dry closets where directed. Keep such places clean and free from flies, and all connections and appliances

GENERAL REQUIREMENTS

connected therewith are to be removed prior to completion of contract, and premises left perfectly clean.

1.16 AVAILABILITY AND USE OF UTILITY SERVICES

- A. The Government shall make all reasonably required amounts of utilities available to the Contractor from existing outlets and supplies, as specified in the contract. The amount to be paid by the Contractor for chargeable electrical services shall be the prevailing rates charged to the Government. The Contractor shall carefully conserve any utilities furnished without charge.
- B. The Contractor, at Contractor's expense and in a workmanlike manner satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines. Before final acceptance of the work by the Government, the Contractor shall remove all the temporary connections, distribution lines, meters, and associated paraphernalia.
- C. Heat: Furnish temporary heat necessary to prevent injury to work and materials through dampness and cold. Use of open salamanders or any temporary heating devices which may be fire hazards or may smoke and damage finished work, will not be permitted. Maintain minimum temperatures as specified for various materials:
- D. Electricity (for Construction and Testing): Furnish all temporary electric services.
 - 1. Obtain electricity by connecting to the Medical Center electrical distribution system. The Contractor shall meter and pay for electricity required for electric cranes and hoisting devices, electrical welding devices and any electrical heating devices providing temporary heat. Electricity for all other uses is available at no cost to the Contractor.
- E. Water (for Construction and Testing): Furnish temporary water service.
 - 1. Obtain water by connecting to the Medical Center water distribution system. Provide reduced pressure backflow preventer at each connection. Water is available at no cost to the Contractor.

GENERAL REQUIREMENTS

2. Maintain connections, pipe, fittings and fixtures and conserve water-use so none is wasted. Failure to stop leakage or other wastes will be cause for revocation (at COTR's discretion) of use of water from Medical Center's system.

F. Steam: Furnish steam system for testing required in various sections of specifications.

1. Obtain steam for testing by connecting to the Medical Center steam distribution system. Steam is available at no cost to the Contractor.
2. Maintain connections, pipe, fittings and fixtures and conserve steam-use so none is wasted. Failure to stop leakage or other waste will be cause for revocation (at COTR's discretion), of use of steam from the Medical Center's system.

1.17 NEW TELEPHONE EQUIPMENT

- A. The contractor shall coordinate with the work of installation of telephone equipment by others if required. This work shall be completed before the building is turned over to VA.

1.18 TESTS

- A. Pre-test mechanical and electrical equipment and systems and make corrections required for proper operation of such systems before requesting final tests. Final test will not be conducted unless pre-tested.
- B. Conduct final tests required in various sections of specifications in presence of an authorized representative of the Contracting Officer. Contractor shall furnish all labor, materials, equipment, instruments, and forms, to conduct and record such tests.
- C. Mechanical and electrical systems shall be balanced, controlled and coordinated. A system is defined as the entire complex which must be coordinated to work together during normal operation to produce results for which the system is designed. For example, air conditioning supply air is only one part of entire system which provides comfort conditions for a building. Other related components are return air, exhaust air, steam, chilled water, refrigerant, hot water, controls and electricity, etc. Another example of a complex which involves several components of different disciplines is a boiler installation. Efficient and acceptable

GENERAL REQUIREMENTS

boiler operation depends upon the coordination and proper operation of fuel, combustion air, controls, steam, feedwater, condensate and other related components.

- D. All related components as defined above shall be functioning when any system component is tested. Tests shall be completed within a reasonably short period of time during which operating and environmental conditions remain reasonably constant.
- E. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components and of the entire system.

1.19 INSTRUCTIONS

- A. Contractor shall furnish Maintenance and Operating manuals and verbal instructions when required by the various sections of the specifications and as hereinafter specified.
- B. Manuals: Maintenance and operating manuals (four copies each) for each separate piece of equipment shall be delivered to the COTR coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing equipment similar to but of a different model, style, and size than that furnished will not be accepted.
- C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed instructions to assigned

GENERAL REQUIREMENTS

Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the COTR and shall be considered concluded only when the COTR is satisfied in regard to complete and thorough coverage. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the COTR, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

1.20 GOVERNMENT-FURNISHED PROPERTY

- A. The Government shall deliver to the Contractor, the Government-furnished property shown on the drawings.
 - B. Equipment furnished by Government to be installed by Contractor will be furnished to Contractor at the Medical Center.
 - C. Storage space for equipment will be provided by the Government and the Contractor shall be prepared to unload and store such equipment therein upon its receipt at the Medical Center.
 - D. Notify Contracting Officer in writing, 60 days in advance, of date on which Contractor will be prepared to receive equipment furnished by Government. Arrangements will then be made by the Government for delivery of equipment.
1. Immediately upon delivery of equipment, Contractor shall arrange for a joint inspection thereof with a representative of the Government. At such time the Contractor shall acknowledge receipt of equipment described, make notations, and immediately furnish the Government representative with a written statement as to its condition or shortages.

GENERAL REQUIREMENTS

2. Contractor thereafter is responsible for such equipment until such time as acceptance of contract work is made by the Government.

- E. Equipment furnished by the Government will be delivered in a partially assembled (knock down) condition in accordance with existing standard commercial practices, complete with all fittings, fastenings, and appliances necessary for connections to respective services installed under contract. All fittings and appliances (i.e., couplings, ells, tees, nipples, piping, conduits, cables, and the like) necessary to make the connection between the Government furnished equipment item and the utility stub-up shall be furnished and installed by the contractor at no additional cost to the Government.
- F. Completely assemble and install the Government furnished equipment in place ready for proper operation in accordance with specifications and drawings.
- G. Furnish supervision of installation of equipment at construction site by qualified factory trained technicians regularly employed by the equipment manufacturer.

1.21 RELOCATED EQUIPMENT AND ITEMS

- A. Contractor shall disconnect, dismantle as necessary, remove and reinstall in new location, all existing items indicated to be relocated by Contractor.
- B. Perform relocation of such equipment or items at such times and in such a manner as directed by the COTR.
- C. Suitably cap existing service lines, such as steam, condensate return, water, drain, gas, air, vacuum and/or electrical, whenever such lines are disconnected from equipment to be relocated. Remove abandoned lines in finished areas and cap as specified herein before under paragraph "Abandoned Lines".
- D. Provide all mechanical and electrical service connections, fittings, fastenings and any other materials necessary for assembly and installation of relocated equipment; and leave such equipment in proper operating condition.

GENERAL REQUIREMENTS

E. All service lines such as noted above for relocated equipment shall be in place at point of relocation ready for use before any existing equipment is disconnected. Make relocated existing equipment ready for operation or use immediately after reinstallation.

- - - E N D - - -

GENERAL REQUIREMENTS

Pre-Construction Risk Assessment

Project: _____ Project/Contract #: _____

This form may be used for projects or activities to determine if a Site Specific Safety Plan (SSSP) is necessary. If the contractor or vendor is not working independently (VAMC Supervisor is present and in control of the contractor) and the job is short duration (less than five working days) and the hazard analysis does not include any high risk activities, then Occupational Health and Safety may allow work without submitting a SSSP.

Activity	Yes	High Risk
1. Respiratory protection is required for the work being conducted List specifics: (activity being performed, PPE Being used, Training, Fit testing).		
2. Hearing protection is required for the work being conducted List specifics: (Type of noise; impact, constant, start up).		
3. Other personal protective equipment is required for the work being conducted, what activity? _____ List specifics: (Gloves, safety Glasses, hard hat, steel toes, overalls).		
4. Are there overhead hazards associated with the activity being conducted? Wires, power, communication, grounding, location(s), signage. List specifics:		Yes
5. Work is being conducted in a confined space. Permit required? Training?		PRCS

GENERAL REQUIREMENTS

Pre-Construction Risk Assessment

List specifics: Tanks, sewer, tunnels, Rescue Team notification.		Only
6. Ladders will be necessary for the work being conducted.		
7. Scaffolding will be necessary for the work being conducted. List specifics:		Greater than six feet
8. Other work platforms will be necessary for the work being conducted. List specifics: Rails, toe boards, netting		Greater than six feet
9. Fall protection is required for the work being conducted. List specifics:		Yes
10. ASBESTOS Abatement Exposure to asbestos may be associated with the work being conducted. List specifics: Renovation, Demolition, Emergency Response <u>29 CFR 1910.1001.</u>		Yes unless approved by the Asbestos Manager
Activity	Yes	High Risk
11. Hazardous materials will be used. MSDSs will be provided for known substances List specifics: 29 CFR 1910.1200.		

GENERAL REQUIREMENTS

Pre-Construction Risk Assessment

<p>12. Hot work (Cutting, Welding, Brazing, etc).</p> <p>Use of VAMC Cleveland Hot Work Policy (ECP 138-047) is required.</p>		
<p>13. Additional ventilation will be necessary for the work being conducted.</p> <p>List specifics: Reason for need of ventilation, confined space, foul odor, excessive heat.</p>		
<p>14. Operation and maintenance of electric power generation, control, transformation, transmission, and distribution lines and equipment are necessary for the work being conducted.</p> <p>List specifics:</p>		Yes
<p>15. Work will be conducted on energized equipment.</p> <p>Use of VAMC Cleveland Working on Energized Equipment policy (138-034) is required.</p> <p>List specifics: list voltages in area, emergency procedures.</p>		Yes
<p>16. Other electrical work will be conducted.</p> <p>List specifics:</p>		
<p>17. Lock Out/Tag Out will be necessary for the work being conducted.</p>		

GENERAL REQUIREMENTS

01 00 00 -3 RISK ASSESSMENT

Pre-Construction Risk Assessment

List specifics:		
18. Cranes, derricks, or slings will be necessary for the work being conducted. List specifics:		Yes
19. Excavating will be necessary for work being conducted. List site specifics:		Yes

GENERAL REQUIREMENTS

01 00 00 -4 RISK ASSESSMENT

Pre-Construction Risk Assessment

Activity	Yes	High Risk
20. Excavating or earthmoving equipment will be used. List specifics:		
21. Industrial trucks will be used. List specifics:		
22. Other motorized vehicles will be used. List specifics:		
23. Concrete and masonry construction operations will be necessary for work being conducted. List specifics: % of recycled components		
24. Steel erection activities will be necessary for the work being conducted. List specifics: New Steel % of recycled material,		Yes

GENERAL REQUIREMENTS

Pre-Construction Risk Assessment

25. Alteration, conversion, or improvement of existing electric transmission and distribution lines and equipment will be necessary for the work being conducted. List specifics:		Yes
26. Hand and portable powered tools or other hand-held equipment will be used.		
27. Compressed gas or compressed air equipment is necessary for work being conducted.		
28. List all other hazardous activities that will be conducted or potentially hazardous equipment that will be used including vibration hazards.		

Pre-Construction Risk Assessment

Activity	Yes	High Risk
29. Infection Control Risks identified. Infection Control Risk Assessment (ICRA) required- refer to Enclosure (1).		Yes unless approved by IC
30. Life Safety Risks identified. Interim Life Safety Risk Assessment Form -Attachment (4) - must be completed and submitted.		
31. Emergency Procedures Identified. Fire, severe weather, utility failure, etc.		
32. Demolition will be necessary for the work being conducted.		Yes
33. New Construction: Minimum ___%___ of total project waste shall be diverted from landfill. Recycled aggregate, Concrete, Steel.		
34. Interior Remodeling: Minimum ___%___ of total project waste shall be diverted from landfill. a) Ceiling tile b) Steel c) Carpet		

GENERAL REQUIREMENTS

01 00 00 -7 RISK ASSESSMENT

Pre-Construction Risk Assessment

--	--	--

Submitted by (Contractor) _____ Date: _____

Reviewed by (COTR) _____ Date: _____

Reviewed by (CSM) _____ Date: _____

SSSP Required Yes No

Project: _____ Project/Contract #: _____

GENERAL REQUIREMENTS

01 00 00 -8 RISK ASSESSMENT

Infection Control Construction Permit

Construction Class:

Project Name and Number:

Permit #:

Location of Construction:

COTR:

Telephone:

Contractor Performing Work:

Supervisor:

Telephone:

CLASS I

1. Obtain approval from COTR before activities begin
2. Work performed is limited to inspections and minor installations
3. Execute work by methods to minimize raising dust from inspection operations
4. Permit does not need to be posted for this classification.

CLASS II

1. Obtain and post infection control permit at work location before work begins
2. Provide active means to prevent air borne dust from dispersing into atmosphere
3. Place dust mat at entrances and exits of work sites
4. Tools and equipment must be cleaned prior to entrance to the medical center
5. Isolate HVAC and seal unused doors with duct tape
6. Contain construction waste before transport in tightly covered containers

CLASS III

1. Obtain and post infection control permit at work location before work begins
2. Follow all requirements listed for Class II in addition to requirements listed below
3. Isolate supply and return ductwork to prevent contamination of system.
4. Complete all critical dust barriers as well as the creation of an anti-room where required for inspection by COTR before work begins.
5. Maintain negative air pressure within work site utilizing HEPA equipped air filtration units.
6. Construct anteroom where required by COTR and I.C. Nurse

GENERAL REQUIREMENTS

01 00 00 -1 ICRA PERMIT

	<p>7. Obtain COTR approval before construction and removal of any dust partitions</p> <p>8. Include particle count readings on daily logs against baseline points as required by COTR or I.C. Nurse.</p>
<p>CLASS IV</p>	<p>1. Obtain and post infection control permit at work location before work begins</p> <p>2. Follow all requirements listed for Class III in addition to requirements listed below</p> <p>3. Workers are required to wear clean suites on site</p> <p>4. All personnel entering and leaving work site must be vacuumed using a HEPA filtered vacuum cleaner.</p> <p>5. This class of permit will require additional specialized precautions unique to each activity which will be listed below</p>
<p>Additional Requirements:</p>	
<p>Infection Control Nurse:</p>	<p>Date:</p>
<p>COTR:</p>	<p>Date:</p>
<p>Contractor:</p>	<p>Date:</p>

GENERAL REQUIREMENTS

01 00 00 -2 ICRA PERMIT

(Name) CONSTRUCTION
COMPANY

SITE SPECIFIC ACCIDENT PREVENTION PLAN

+

CONSTRUCTION HEALTH AND SAFETY PROGRAM

FOR

GENERAL REQUIREMENTS

01 00 00 -3 SAFETY PLAN

Name of Project

Location

Veterans Affairs Medical Center – Wade Park

Cleveland, Ohio

Project number given by contracting avoid confusion

PROJECT # 541-AB-XYZ

CONTRACT # VA541-A-XYZ

Template date 4/16/2010

RESPONSIBILITIES AND LINES OF AUTHORITY OF NAME CONSTRUCTION COMPANY

The following people have responsibilities and authority for corporate safety:

BACKGROUND INFORMATION (Prime)

I. Contractor: Name

GENERAL REQUIREMENTS

01 00 00 -4 ACCIDENT PREVENTION PLAN

Address

City, State Zip

II. Project Name: Wade Park Name

III. Project Description: Brief Description (541-xx-xxx)

IV. Contractor Accident Record: Contractor provide OSHA Log information

A. RESPONSIBILITIES

1. Chief Corporate Safety Officer: Contact Name (Contact telephone #)
Name Construction Company
Title

2. Site Safety Responsibilities: Contact Name (Contact telephone #)
Name Construction Company
Title

3. Project Safety Consulting: Contact Name (Contact telephone #)
Name Construction Company
Title

BACKGROUND INFORMATION (SUBCONTRACTOR)

GENERAL REQUIREMENTS

- | | | |
|------|-----------------------------|---|
| I. | Contractor: | Name
Address
City, State Zip |
| II. | Project Name: | Wade Park Name |
| III. | Project Description: | Brief Description |
| IV. | Contractor Accident Record: | Contractor provide OSHA Log information |

A. RESPONSIBILITIES

- | | | |
|----|---------------------------------|--|
| 1. | Chief Corporate Safety Officer: | Contact Name (Contact telephone #)
Name Construction Company
Title |
| 2. | Site Safety Responsibilities: | Contact Name (Contact telephone #)
Name Construction Company
Title |
| 3. | Project Safety Consulting: | Contact Name (Contact telephone #)
Name Construction Company
Title |

The overall lines of authority concerning safety and health will be as follows:

GENERAL REQUIREMENTS

Name – Title

Name – Title

A Site Safety and Health Officer will be provided at the work site at all times to perform safety and occupational health management, surveillance, inspections, and safety enforcement for the Contractor and subcontractors. The SSHO will be employed by the prime. SSHO qualifications with education certificates will be listed in Appendix B.

The competent person for Health Hazard Control and Respiratory Protection Program will conduct and document a hazard assessment in accordance with Section 06 to identify and evaluate. (What form of documentation).

Site Safety and Health Officer (SSHO) shall conduct daily safety and health inspections and maintain a written log which includes area/operation inspected, date of inspection, identified hazards, recommended corrective actions, estimated and actual dates of corrections. Safety inspection logs shall be attached to the Contractors daily quality control report. Current "Safety Logs" shall be readily available upon request.

SIGNATURE SHEET

The following persons are responsible for preparing and approving this plan:

Preparer:

Contact Name (Phone #)

Contact Title

Name Construction Company

GENERAL REQUIREMENTS

Date_____

GENERAL REQUIREMENTS

01 00 00 -8 ACCIDENT PREVENTION PLAN

SCOPE OF WORK SUMMARY

Summary

This job consists of (Basic Description) Please include the scope of work submitted for the project

Pre-demolition:

Describe the activity in sufficient detail to determine the safety program elements that will be required to be addressed in the body of the procedure – Section 6. Use the PCRA (Pre-Construction Risk Assessment) along with the Scope of Work to determine which elements need to be addressed for the pre-demolition phase.

Demolition:

Describe the activity in sufficient detail to determine the safety program elements that will be required to be addressed in the body of the procedure – Section 6. PCRA (Pre-Construction Risk Assessment) along with the Scope of Work to determine which elements need to be addressed for each of the demolition phase.

Construction:

Describe the activity in sufficient detail to determine the safety program elements that will be required to be addressed in the body of the procedure Section - 6. PCRA (Pre-Construction Risk Assessment) along with the Scope of Work to determine which elements need to be addressed for the construction phase.

GENERAL REQUIREMENTS

GENERAL REQUIREMENTS

01 00 00 -10 ACCIDENT PREVENTION PLAN

1. SITE ACCESS:

- a) Parking onsite is not provided by the VAMC Cleveland at the Wade Park Facility
- b) Access into the facility will be through entrances located close to the work area to avoid patient care areas. The following entrance that will be used by **Name** Construction Company employees will be submitted in writing or on the drawings:
(Enter the specific building access to be used)

2. WORK AREA SECURITY:

- a) All **Name** Construction Company employees will wear company identification badges or those provided by VAMC Cleveland Police Service.
- b) Patients, visitors and unauthorized VAMC Cleveland employees will be kept out of work areas using locked doors, barricades and safety postings as appropriate.

3. PLAN FOR PREVENTION OF ALCOHOL AND DRUG ABUSE

(Review – replace with your own company policy if this doesn't work for you)

- a) Due to the nature of our work, it is critical that all employees are free from the adverse effects of drugs and/or alcohol. The company is committed to providing a safe workplace for all its employees. The goal of this policy is to maintain a safe and secure work environment that is free from the effects of alcohol and drug abuse.
- b) The intent of this policy is to be responsive to the employees health needs by the early recognition and treatment of chemical dependency problems and behavioral/medical disorder, and to support the rights of the company and its employees to work within an alcohol / drug free environment.
- c) This policy is not applicable to physician prescribed drugs. Employees on such medication(s), which may adversely affect their job performance, should promptly discuss the matter with their supervisor.
 - Failure of the employee to so notify their supervisor can result in disciplinary action including discharge.
 - It should be noted that while legal, prescribed drugs could adversely affect the safety of the employee and other employees on the site.
 - All **Name** Construction employees are drug tested before hiring, periodically, and annually.

4. SITE SAFETY AUDITS (Inspections):

GENERAL REQUIREMENTS

a) INTERNAL INSPECTIONS

The site supervisor, who is the [Name](#) Construction competent person, will conduct the Site Safety and Health inspections. The competent person's certifications are located in Appendix B. [\(Put the Certifications in the Appendix B.\)](#) There will two types of safety inspections that will be performed on this job site.

- (1) A weekly Safety and Health inspection and report will be conducted by the site supervisor. The inspection forms will document and track the following information:
 - Any Violations
 - Date of violation
 - Nature of violation
 - Needed corrective action
 - Date of correction
 - Name of responsible person(s)
 - (a) In addition to the above items he will also notify any employee and/or subcontractor in writing of any violations.
 - (b) This information will be followed up on by the COTR or Construction Safety Group, as needed and/or requires immediate attention to the violations. (Should he notify VA of findings?)
 - (c) All safety inspection forms are reviewed to ensure that all noted corrective actions are within the applicable OSHA and Veterans Affairs Safety and Health Manual guidelines.
 - (d) This documentation will be kept (readily available?) at the project field office, and will aid in the audits of the Accident Prevention Plan.
- (2) The second type of Safety and Health Inspection will be a daily checklist.
 - (a) This too, will be performed each workday onsite, by the site supervisor.
 - (b) This documentation will be kept at the project field office, and will aid in the audits of the Accident Prevention Plan. (this too Should be made readily available?)

b) EXTERNAL INSPECTORS/CONSTRUCTION ROUNDS

GENERAL REQUIREMENTS

(1) At various times there may be announced and unannounced visits to the work area of any of the Contracted Construction Projects. They may be visited by some or all of the members of the Construction Safety Inspection Group.

(2) Prior to the activity of cutting and/or welding, the COTR for the Veterans Affairs will be contacted to assist in scheduling a site inspection and submission for a burn permit.

(3) Prior to any activity including digging and/or excavating, the COTR for the Veterans Affairs will be contacted to assist in scheduling a site inspection and submission for a permit.

(4) Prior to any activity including the renovation and/or penetration of rated walls, the COTR for the Veterans Affairs will be contacted to assist in scheduling a site inspection and submission for a permit.

(5) Prior to any activity including the removal or repair of Asbestos Containing Building Material, the COTR for the Veterans Affairs will be contacted to assist in scheduling a site inspection and submission for a permit.

c) INSPECTIONS BY OUTSIDE PARTIES i.e., OSHA, EPA, etc.

(1) Presentation of Credentials - Upon arrival at the work site or facility, the Compliance Officer must display his or her credentials and will ask to meet with the appropriate employer representative.

(2) The contractor must notify the projects COTR immediately upon the initial contact of the Compliance Officer's contact.

(3) Opening Conference – During an opening conference, the compliance officer will

explain the purpose of the inspection. The contractor's management representative must be prepared to discuss actions that have been taken to demonstrate their company's commitment to the health and safety of employees (e.g. work practices,

GENERAL REQUIREMENTS

safety and industrial hygiene standards, safety manuals, training conducted, internal inspections, etc).

(4) An authorized employee representative will be given the opportunity to attend the

opening conference and to accompany the compliance officer during the inspection. Employees may also be consulted during the conduct of the inspection. Employees who participate in the inspection, or are consulted by the compliance officer, are protected from discrimination for exercising their safety and health rights under the "Whistle Blowers Act".

(5) A contractor management representative and a VAMC Cleveland Safety

representative must accompany the compliance officer during the inspection and keep accurate notes of any actual or possible violations found by the compliance officer. Obvious violations detected by the compliance officer should be corrected on the spot where possible.

(6) It is imperative that existing operations, reports, logs, etc. not be misrepresented to the compliance officer. The penalty for making false statements or representation to OSHA or its compliance officers is a maximum of \$10,000 and 6 months imprisonment. In addition, the offending party can be subject to discipline by the company up to and including discharge.

(7) Closing Conference - After the inspection has been conducted, a closing conference will be held between the compliance officer, the employer and employee representatives and VAMC Cleveland. This is the best time, before possible issuance of a citation, to explain the company's position. It is imperative that we question any proposed findings or abatement periods that are unreasonable. Request that any citations be sent to the company with a copy to the VAMC Cleveland safety office.

5. SAFETY TRAINING /EDUCATION:

GENERAL REQUIREMENTS

a) Site orientation training:

All employees on site will be required to attend a Safety Training Orientation at the start of the project, or before they begin work at the job site. The site supervisor, competent person, will conduct the training. Training on the applicable requirements of this Site Specific Training Plan is mandatory and must be documented.

b) Supervisor and employee safety meetings:

The primary site supervisor, who is the competent person (certifications located in Appendix B), will conduct the initial employee site safety orientation. Mandatory safety meetings will be held on a weekly basis. Safety and health topics will vary from week to week on subject matter, utilizing the 29 CFR 1910 and 29 CFR 1926 standards, along with the Veterans Affairs Safety and Health Program and issues raised during construction.

(Place documentation of training sign-in sheets and agenda in Appendix B)

c) Employee training:

Name Construction Company employees will be trained, at the site safety orientation on the following topics:

- When PPE is necessary.
- What PPE is necessary and which PPE has been selected for each process the employee operates.
- How to properly put on, take off, adjust, and wear PPE.

6. ACCIDENT REPORTING:

All **Name** Construction employees on site will be required to attend an “Accident and Event Reporting” Orientation class at the start of the project, or before they begin work at the job site. The site supervisor, competent person, will conduct the above mentioned training.

GENERAL REQUIREMENTS

a) Accident investigations, reports, and logs:

The project manager and site supervisor will conduct all accident and near miss investigations. The site supervisor will maintain the OSHA 300 log. All documentation will be kept on the job site. Certifications for competent person(s) are located in Appendix B.

b) Immediate notification of major accidents:

Should a major accident occur, the following notifications will take place as soon as any injured person(s) are cared for:

Contact Name, Title

Contact Name, Title

Contact Name, Title

VA Safety Representative: Frank Wunderle

Local Emergency Services:

For Wade Park

Hospital	VA Wade Park Medical Facility 10701 East Blvd. Cleveland, Ohio 44106 Dial 2222 from any VA Phone
Hospital	University Hospitals 11100 Euclid Avenue Cleveland, Ohio 44106 911 / (216) 844-1000
Fire Department	911 / 216-664-6813
Security	Dial 4207 from any VA Phone

This listing will be posted in the field office.

c) Accident response plan:

GENERAL REQUIREMENTS

Name Construction Company intends to make certain all emergency incidents are handled in a proper and safe manner giving priority to the following:

- Life Safety
- Property Conservation
- Emergency Situation Investigation
- Return to Normal Operations

d) Exposure data / man hours worked:

(1) This section covers the following operations (**Fill in operation/s requiring additional training**) unless the employer can demonstrate that the operation does not involve employee exposure or the reasonable possibility for employee exposure to safety or health hazards. Example; (a negative impact statement or asbestos abatement)

(2) This information will be maintained by the site supervisor and verified by **Contact Name**. A daily log will be maintained of all man hours worked. This information will also be used to determine the final **TIR** for the project. Any data collected will be submitted to the COTR for their report.

7. EMERGENCY RESPONSE PLAN:

This plan covers the actions of all **Name** Construction employees. All subcontractors on site will be required to submit for approval, to **Name** Construction Company, their own site specific Emergency Response Plan. If not adequate, the subcontractor and their employees must be orientated to the **Name** Construction Company's "SITE SPECIFIC EMERGENCY RESPONSE PLAN", before they can begin work at this site.

a) Chemical Safety:

As part of this program, **Name** Construction Company will inform subcontractors, or their representatives of the site emergency response procedures and any potential fire, explosion, health, safety, or other hazards.

The following procedures address emergency response as follows:

- Pre-emergency planning and coordination with outside parties:
VAMC (COTR) will receive notification of date to start work, along with MSDS's of all substances brought onto the facility.
- Personal roles, lines of authority, training, and communication:

The personnel utilizing chemicals will contain the substances brought onto the facility. Plumbers will contain and handle all compressed gas cylinders, providing they have been trained and documented.

GENERAL REQUIREMENTS

In the case where a situation occurs that they cannot handle, all employees will be trained on evacuating the area, notifying the on-site supervisor, and workers in the immediate worksite.

- Emergency recognition and prevention:

All workers will, at the safety orientation, be informed of this site-specific emergency response plan and procedures.

All workers will be responsible to recognize hazards and their prevention, practice this at all times on the worksite.

All workers will be responsible to answer question from surveyors about general safety, health, and emergency procedures wherever they are on site.

b) Emergency plan for severe weather:

For the site-specific severe weather conditions that employees may encounter during the project, Name Construction Company has developed the following procedures.

First, Name Construction Company employees will adhere to all NWS warnings and advisories. For snowfall, the policy for workers is that a Level Three emergency, which is predicted heavy snow fall, or other dangerous weather conditions.

- Safe distances and places of refuge:

All workers at this site will be informed of the designated location of the safe zone. This will also be posted in the field office for all to be reminded of. In the event of an emergency occurrence, and the Local Fire Department, or any other entity is summoned, all workers will report to this zone to be accounted for.

- Site security and control:

In the event of an emergency, workers will notify the site supervisor or project manager of the situation, at that time, workers will report to the safe zone. The site supervisor and/or project manager will notify security and any other applicable authorities. Staying away from the immediate situation and not allowing any unauthorized personnel to enter until proper authorities arrive.

- Evacuation routes and procedures:

Any work will be performed on the interior of the building. Evacuation plans are posted in various locations throughout work area by the VA.

- Decontamination:

This would be required if there is a possibility of a large spill of hazardous material with the potential of contaminating contractor employees. Small spills and personnel contaminations are expected to be cleaned up using the contractors Hazard Communication program and associated MSDS requirements.

GENERAL REQUIREMENTS

c) Medical support:

It will be the duty of all workers onsite, including subcontractors, to immediately report to the site supervisor and/or project manager, COTR's any and all emergencies.

The following are items of concern regarding the handling of all medical support requirements:

(1) On site:

- For incidents occurring on site at Wade Park Veterans Affairs Medical Center; the victim(s) will be stabilized prior to be relocated to another institution.
- For non-emergency support first aid supplies will be kept at the [Name](#) Construction Company field office. All subcontractors will be required to supply properly trained personnel as well as their own first aid supplies.
- All supplies will be subject to our safety inspections. No one will perform first aid or CPR unless properly trained, and verification of certification is on file at the jobsite.

(2) Off site:

- For the Wade Park location, University Hospital Medical Center is located at 11100 Euclid Avenue (216) 844-1000.
- Maps are posted and available for all contractors on site (See Appendix A).
- Emergency medical treatment and first aid:
- Emergency alerting and response procedures:
- It will be the duty of all workers onsite, including subcontractors, to immediately respond to the COTR's, Construction Safety Team or Outside Inspectors from governmental agencies or agencies approving accreditation regarding their function during an emergency.

(3) Posting of emergency telephone numbers:

GENERAL REQUIREMENTS

The posting of these Emergency Telephone Numbers will be in the job field office, where all workers will have access to them. All employees and subcontractors will be made aware of these and the location at the safety orientation. The numbers are as follows:

Hospital	Wade Park Veterans Affairs Medical Center Dial 2222 from any VA Phone University Hospital 911 / (216) 844-1000
Fire Department	911 / (216) 664-6813
Security	Dial 4207 from any VA Phone

d) Hazard communication program:

This site specific Hazard Communication Plan has been implemented in accordance with 29 CFR 1910.1200.

All areas in which hazardous chemicals will be stored shall have the proper label and/or signs. The MSDS for all chemicals on site will be located in a book labeled MSDS, in the project field office.

The training of employees and subcontractors will be as follows:

- Where to find this program
- What is in this program
- All chemicals on this jobsite
- What is an MSDS
- How to find specific information on an MSDS
- Labeling system
- What area these chemicals are stored in, map indicating
- The proper handling procedures for these chemicals
- Spill/release clean up protocol

Should there be an immediate threat to life or property, the emergency response plan for the installation, which is to be on file at the field office.

It is mandatory that all subcontractors submit, before a new chemical is introduced to the worksite, that the proper MSDS is submitted to the site supervisor/project manager. It will be the responsibility of the site supervisor to inform all employees and subcontractors of the new chemical(s), introduce the MSDS, and the potential hazards of that chemical. The site supervisor and/or project manager will have the responsibility to notify the Contracting Officer / COTR of any and all new chemicals brought onto the facility.

Chemical storage areas, if needed, to be located per VA designated location.

GENERAL REQUIREMENTS

e) CORRECTIVE ACTIONS INVOLVING CLEAN-UP OPERATIONS AT SITES COVERED BY THE RESOURCE CONSERVATION AND RECOVERY ACT OF 1976 (RCRA) AS AMENDED (42 W.S.C. 6901 ET SEQ).

Clean-up operations required by a governmental body, whether Federal, state, local or other involving hazardous substance that are conducted at uncontrolled hazardous waste

sites (including, but not limited to, the EPA's National Priority Site List (NPL), state priority site lists, sites recommended for the EPA, NPL, and initial investigations of government identified sites which area conducted before the presence or absence of hazardous substances has been ascertained;

Voluntary clean-up operations at sites recognized by Federal, state, local or other governmental bodies as uncontrolled hazardous waste sites;

Operations involving hazardous waste that area conducted at treatment, storage, disposal (TSD) facilities regulated by 40 CFR Parts 264 and 265 pursuant to RCRA; or by agencies under agreement with U.S.E.P.A. to implement RCRA regulations; and Emergency response operations for releases of, or substantial threats of releases of, hazardous substances with regard to the location of the hazard.

8. FIRE PREVENTION PLAN:

We at [Name](#) Construction Company limit our employees participation to the use of portable fire extinguishers. The site supervisor at safety orientation will cover this Plan. The following topics will include:

- a) All areas controlled by the primary contractor are required to maintain fire protection during their occupancy. As a minimum smoke detectors and heat sensors shall be in place whenever the areas original fire protection has been compromised.
- b) All fire extinguishers must be checked and tagged every thirty day
- c) The general principles of fire extinguisher use and the hazards involved with incipient stage firefighting.
- d) Actions to be taken by authorized person(s)
 - (1) Evacuate area.
 - (2) Notify site supervisor and/or project manager.
 - (3) Determine if fire is incipient
 - (4) Utilize fire extinguisher.
 - (5) If fire or smoke is too great, report to safe zone.
 - (6) Make call to Fire Department if instructed by supervisor and/or project manager.

GENERAL REQUIREMENTS

- e) Actions to be taken by unauthorized person(s)
- (1) Evacuate area
 - (2) Notify supervisor and/or project manager.
 - (3) Report to safe zone.
 - (4) Make call to Fire Department if instructed by site supervisor and/or project manager.
- f) Only approved fire extinguishers will be onsite and checked on a daily basis by the site supervisor. These will be located in the following areas, but not limited to:
- (1) Portable Fire Extinguishers
 - (2) Individual Roles and Responsibilities
 - (3) Fire Watch
 - (4) Response Plans
 - (5) Safe Zone
 - (6) Notification
 - (7) Site Mapping
 - (8) Inside field office.
 - (9) In any area where cutting or welding is taking place
- g) The following sections listed below are all part of this Accident Prevention Plan. The information below contains additional requirements that are part of this Fire Prevention Plan:
- Safety and Health Inspections
 - Firefighting Plan
 - Posting of Emergency Numbers
 - Hazard Communication Program
 - Site Sanitation Plan
- (1) The risk of a job site fire can be avoided through; safety and health inspections, housekeeping, proper maintenance, proper storage and handling, ensuring all employees and subcontractors are performing their designated work duties properly, the handling of supplies and equipment as directed, following all guidelines set forth through operating manuals, instructions, and training,
- (2) All employees and subcontractors require the proper storage of combustibles. Combustible liquids must be stored and covered in approved containers.
- (3) All chemical spills including, of course, combustible liquids, must be cleaned up immediately.
- (4) All chemical and chemical products will be handled and stored in accordance with the procedures noted on their individual MSDS

GENERAL REQUIREMENTS

Note: Care must be taken when cleaning up chemical spills. Information on appropriate personal protective equipment, proper disposal, proper cleanup procedures, required ventilation, etc is found on the products MSDS.

- (5) Cleanup materials and damaged containers must be properly disposed.
- (6) Combustible liquids and trash must be segregated and stored away from ignition sources.
- (7) Approved portable fire extinguishers will be checked on daily basis, ensuring they are charged and ready for use.
- (8) Smoking is not permitted inside the facility. Only designated areas by the VA will be permitted (outside), with smoking debris discarded in designated areas..
- (9) Debris will not be allowed to accumulate on the job site and will be maintained daily.

h) Submission of a Burn Permit. [Name](#) Construction will submit a Burn Permit to the COTR to perform acetylene oxygen welding, brazing and cutting, the following precautionary measures will be required as part of this permit along with any additional requirements by the VA Medical Center Policy [138-012 \(Hot Work\)](#):

- (1) Inspect all surroundings and equipment to insure that combustible substances are not present in any area where contact of metal at a temperature above the flashpoint of any compound is possible.
- (2) Ensure that no open containers or spills of combustible substances are present.
- (3) Ensure that ignition is not possible by conduction, convection, radiation, or dispersion of molten metal.
- (4) Proper protection equipment and practices will be used, i.e., fireproof blankets, removal of combustible materials where practicable, and portable fire extinguishers of proper type on hand.
- (5) When the above operations are in use a continuous Fire Watch will be performed while equipment is being used.
- (6) Training in fire protection will occur at the site safety orientation. This training shall include the following topics, but not limited to:

GENERAL REQUIREMENTS

9. SITE SAFETY RULES:

Name Construction Company has developed a comprehensive safety and health program that addresses our specific safety and health concerns and provides guidance for the performance of our individual job tasks within the framework of appropriate Occupational Safety and Health Administration (OSHA) standards.

Safety requires not only that each person understand and perform individual tasks in a safe manner, but also that each individual is aware of his/her surroundings and is actively involved in the safety and health of others.

a) No Smoking: Smoking is not permitted inside the facility. Only designated areas by the VA will be permitted (outside), with smoking debris discarded in designated areas.

b) Accidents: In the event of an emergency, workers will notify the site supervisor or project manager of the situation, at that time, workers will report to the safe zone. The site supervisor and/or project manager will notify security and any other applicable authorities.

The goals for all projects are as follows:

- (1) Zero accident rate
- (2) Zero injury/illness rate
- (3) Compliance with all applicable Local, State, OSHA standards and Veterans Affairs Safety Directives

c) Hard Hats: Head Protection will be as follows:

- All workers on this site will be required to wear approved hard hats when working in the close proximity of heavy equipment and where structural steel is being hoisted
- In the area where another workers activities may exposing them to injury.

d) Hazard Reporting: Each employee is encouraged to contact their Supervisor immediately should a safety or health risk exist so that corrective action may be taken immediately.

GENERAL REQUIREMENTS

e) **Controlled Substances:** Therefore, the following actions are strictly prohibited and will prompt disciplinary action up to and including consideration for immediate discharge:

- (1) The illegal use, sale, arranging for sale, possession or manufacturing of narcotics, drugs or controlled substances while on the job or on VA property.
- (2) The use of alcohol or illegal drugs while on the job or VA property.

f) **Safety Devices:** [Name](#) Construction Company has fulfilled all required Safety and Health Plans and Programs according to regulation, and has installed all required safety device for the equipment being used for the tasks. Failure to use or to disable the mentioned safety device relating to CFR 1910 and 1926 standards to ensure 100% safety will be grounds for review .

The goal is to provide the company and its workers protection against those individuals who refuse to act in a consistently safe manner.

Without proper enforcement, the policy will not be able to deliver the intended results. Therefore, it is essential that all employees be held accountable to these guidelines for disciplinary actions up to and including discharge.

g) **Personnel Protective Equipment:** Procedures for implementing an effective PPE policy in accordance with 29 CFR 1910.132, will be as follows:

(1) During a pre-construction walk through, [Contact Name](#), the Project Manager, will perform a job site hazard assessment.

(a) **HAZARD ASSESSMENT:** The purpose of the survey is to identify sources of hazards to workers and co-workers. The documentation of this hazard assessment is located in PCRA (Pre-Construction Risk Assessment)

(b) **POTENTIAL HAZARD SOURCES** ([Adjust based on scope of work](#))

- [Surfaces that could become slick, uneven walking and working surfaces](#)
- [Welding / Brazing Hazards](#)
- [Quality Air Control](#)
- [Electrical Hazards](#)
- [Potential Overhead Obstructions \(above ceiling\)](#)
- [Fall Protection](#)
- [Rolling or pinching objects](#)
- [Sharp objects that might pierce feet or cut hands](#)
- [Motion that includes tool movement, moving machinery, or machine parts, or movement of](#)

GENERAL REQUIREMENTS

personnel that could result in collision with stationary objects.

(c) EMPLOYEE TRAINING: Name Construction Company employees will be trained, at the site safety orientation on the following topics:

- When PPE is necessary.
- What PPE is necessary and which PPE has been selected for each process the employee operates.
- How to properly put on, take off, adjust and wear PPE.

(2) Each of the basic hazards has been reviewed and a determination made as to the type, level of risk, and seriousness of potential injury.

- When exposure to hazards cannot be engineered completely out of normal operations or maintenance work.
- When safe work practices cannot provide sufficient additional protection.
- A Final method of control is through the use of protective clothing or equipment. These include eye protection, steel-toed shoes, hard hats, hearing protection, gloves, and fall protection

(3) Consideration has been given to the possibility of exposure to several hazards at once. The general procedure for determining appropriate protective equipment is to:

- Identify the potential hazards and the type of protective equipment that is available, and what protection it provides.
- Compare the capabilities of various types of PPE with the hazards associated with the environment.
- Select the PPE, which provides a level of protection greater than the minimum required to protect employees from the hazards.
- Select PPE that will fit each employee properly and provides protection from the hazard.
- The Hazard Assessment Worksheet is located in Appendix D.

h) Horseplay: Safety training needs will be identified by continual reassessment of our work methods, equipment and job sites as well as employee and management input. Observation of unsafe acts will be addressed immediately.

i) Reporting Under the Influence:

- (1) Arriving at work or working under the influence of alcohol or illegal drugs, narcotics or controlled substances.
- (2) Any illegal substance confiscated pursuant to this policy will be turned

GENERAL REQUIREMENTS

over to the proper authorities.

j) Flammable Liquid Storage: It is mandatory that all subcontractors submit, before a new chemical is introduced to the worksite, that the proper MSDS is submitted to the site supervisor/project manager. It will be the responsibility of the site supervisor to inform all employees and subcontractors of the new chemical(s), introduce the MSDS, and the potential hazards of that chemical. The site supervisor and/or project manager will have the responsibility to notify the Contracting Officer / COTR of any and all new chemicals brought onto the facility.

k) Heavy Equipment Operation

10. WEEKLY CONTRACTOR REVIEWS:

a) The primary site supervisor, who is the competent person (certifications in Appendix will conduct the initial employee site safety orientation.

b) Mandatory safety meetings will be held on a weekly basis. Safety and health topics will vary from week to week on subject matter, utilizing the 29 CFR 1910 and 29 CFR 1926 standards, along with the Veterans Affairs Safety and Health Program and issues raised during construction.(Place documentation of training sign-in sheets and agenda in Appendix B)

c) Safety takes a commitment from all personnel within our organization. Weekly Training will be interactive with an opportunity for all to actively participate, ask questions, make suggestions, and refer to our written policies and procedures.

11. COMPETENT PERSON:

a) A Site Safety and Health Officer (SSHO) will be provided at the work site at all times to perform safety and occupational health management, surveillance, inspections, and safety enforcement for the Contractor and subcontractors.

b) The SSHO will be employed by the prime. SSHO qualifications with education certificates will be listed in Appendix B.

GENERAL REQUIREMENTS

d) There will be a competent person for maintaining a Health Hazard Control and Respiratory Protection Program. They will conduct and document a hazard assessment in accordance with Section 06 to identify and evaluate the need and level of protection required for the activities being scheduled. (What form of documentation).

d) Conduct daily safety and health inspections and maintain a written log which includes area/operation inspected, date of inspection, identified hazards, recommended corrective actions, estimated and actual dates of corrections. Safety inspection logs shall be attached to the Contractors daily quality control report. Current "Safety Logs" shall be readily available upon request.

12. WRITTEN PROTOCOLS FOR OUTSIDE INSPECTIONS:

a) Presentation of Credentials - Upon arrival at the work site or facility, the OSHA compliance officer must display his or her credentials and will ask to meet with the appropriate employer representative.

b) The contractor must notify the COTR immediately upon the initial OSHA Contact.

(1) Opening Conference – During an opening conference, the compliance officer will explain the purpose of the inspection. Contractor Management representatives must be prepared to discuss actions that have been taken to demonstrate their company's commitment to the health and safety of employees (e.g. work practices, safety and industrial hygiene standards, safety manuals, training conducted, internal inspections, etc).

(2) An authorized employee representative will be given the opportunity to attend the opening conference and to accompany the compliance officer during the inspection. Employees may also be consulted during the conduct of the inspection. Employees who participate in the inspection, or are consulted by the compliance officer, are protected under the OSHA act from discrimination for exercising their safety and health rights.

GENERAL REQUIREMENTS

(3) A contractor management representative and a VAMC Cleveland Safety representative must accompany the compliance officer during the inspection and keep accurate notes of any actual or possible violations found by the compliance officer. Obvious violations detected by the compliance officer should be corrected on the spot where possible.

(4) It is imperative that existing operations, reports, logs, etc. not be misrepresented to the compliance officer. The penalty for making false statements or representation to OSHA or its compliance officers is a maximum of \$10,000 and 6 months imprisonment. In addition, the offending party can be subject to discipline by the company up to and including discharge

(5) Closing Conference - After the inspection has been conducted, a closing conference will be held between the compliance officer, the employer and employee representatives and VAMC Cleveland. This is the best time, before possible issuance of a citation, to explain the company's position. It is imperative that we question any proposed findings or abatement periods that are unreasonable. Request that any citations be sent to the company with a copy to the VAMC Cleveland safety office.

13. SUBCONTRACTOR SITE SPECIFIC SAFETY PLAN:

As part of employment with **Name** Construction Company, employees are required to comply with all aspects of their corporate level "Safety and Health Plan".

- Supervisors are expected and required to comply with all aspects of the corporate level "Safety and Health Plan" as well as to enforce all applicable requirements at the jobsite.
- Supervisors are expected and required to complete all necessary site safety documentation in a complete and timely manner.
- Supervisors are required to report all safety incidents to the main office as soon as possible. The projects COTR is to be notified ASAP. The above items represent the method used to ensure our goals are met.

14. REQUIRED POSTERS:

GENERAL REQUIREMENTS

This Policy Statement will be conspicuously posted in the job site office along with all other required postings including the OSHA Form 300, Log and Summary of Occupational Injuries and Illnesses.

15. SUBCONTRACTOR/SUPPLIERS ORIENTATION PROGRAM:

a) Identification of subcontractors:

Name of Subcontractor (List all subcontractors expected to be on site)

b) Controlling and coordination of subcontractors and suppliers:

Suppliers will be under close supervision during material delivery and pick-up. Communication with suppliers will be important to ensure loads are put in designated areas, and supplier is made aware of any immediate hazards in the area he/she will be in. A project schedule has been coordinated and submitted for approval for the coordination of the scope of work being performed.

c) SAFETY RESPONSIBILITIES OF SUBCONTRACTORS AND SUPPLIERS:

All subcontractors will be responsible to Submit and implement their corporate level Safety and Health Plan as appropriate for the project. Subcontractor shall submit these documents to **Name** Construction Company for approval prior to the start of their activities on the work site. In addition, they will be responsible for adhering to all applicable OSHA and the Veterans Affairs Safety and Health Program requirements. These documents will be verified through our own site safety inspections and meetings.

In the event that a subcontractor does not have the required safety and health programs, their employees will receive training utilizing **Name** Construction Company's safety and health programs prior to accessing the work site. This training will be documented and compliance with the provisions of **Name** Construction Company's Safety and Health programs will be mandatory as well as being readily accessible.

GENERAL REQUIREMENTS

16. REPORTING OF CATASTROPHIC EVENTS:

It is the policy of **Name** Construction Company to provide a work environment that is inherently safe. The safety and health of our employees is of primary importance as they are our most important resource

- Pre-emergency planning and coordination with outside parties:

VAMC (COTR) will receive notification of date to start work, along with MSDS's of all substances brought onto the facility.

- Personal roles, lines of authority, training, and communication:

The personnel utilizing chemicals will contain the substances brought onto the facility. Plumbers will contain and handle all compressed gas cylinders, providing they have been trained and documented.

In the case where a situation occurs that they cannot handle, all employees will be trained on evacuating the area, notifying the on-site supervisor, and workers in the immediate worksite.

- Emergency recognition and prevention:

All workers will, at the safety orientation, be informed of this site-specific emergency response plan and procedures.

All workers will be responsible to recognize hazards and their prevention, practice this at all times on the worksite.

All workers will be responsible to answer question from surveyors about general safety, health, and emergency procedures wherever they are on site.

- Safe distances and places of refuge:

All workers at this site will be informed of the designated location of the safe zone. This will also be posted in the field office for all to be reminded of. In the event of an emergency occurrence, and the Local Fire Department, or any other entity is summoned, all workers will report to this zone to be accounted for.

- Site security and control:

In the event of an emergency, workers will notify the site supervisor or project manager of the situation, at that time, workers will report to the safe zone. The site supervisor and/or project manager will notify security and any other applicable authorities. Staying away from the immediate situation and not allowing any unauthorized personnel to enter until proper authorities arrive.

- Evacuation routes and procedures:

GENERAL REQUIREMENTS

Any work will be performed on the interior of the building. Evacuation plans are posted in various locations throughout work area by the VA.

- Decontamination:

This would be required if there is a possibility of a large spill of hazardous material with the potential of contaminating contractor employees. Small spills and personnel contaminations are expected to be cleaned up using the contractors Hazard Communication program and associated MSDS requirements.

- Emergency medical treatment and first aid:

- Emergency alerting and response procedures:

It will be the duty of all workers onsite, including subcontractors, to immediately report to the site supervisor and/or project manager, COTR's any and all emergencies

17. Site specific plans to address PCRA:

- a. Only those hazards identified as "yes" on the PCRA need to be addressed.
- b. Modify the description of the safety precautions as needed to address the specific concern. You may refer to a company policy or company rule book to describe the safety precautions or safety plan; however, we will need to have a copy of your plan or policy on file.
- c. To place a check in the box
 - right click on the box
 - Click "Properties"
 - Click "Checked"
 - Click "OK"

GENERAL REQUIREMENTS

01 00 00 -33 ACCIDENT PREVENTION PLAN

Pre Construction Risk Assessment (PCRA)

	Description of safety precautions or reference to contractor Safety Procedures
<input type="checkbox"/>	(1) Respiratory Protection Plan <ul style="list-style-type: none"> ○ Describe of ACTIVITY requiring respiratory protection if applicable ○ NEED documentation of training. ○ Need documentation of fit test.
<input type="checkbox"/>	(2) Hearing: Protection Plan Any area with noise levels at or above 85dba will be required to wear hearing protection. When workers are utilizing loud equipment, or being exposed to such levels, hearing protection shall be provided.
<input type="checkbox"/>	(3) PPE other: Personal protective equipment (PPE) includes hard hats, gloves, safety glasses, steel-toed shoes/boots, hearing protection, and personal fall protection. <p style="margin-left: 40px;">Eye protection will be as follows:</p> <ul style="list-style-type: none"> ○ Safety glasses used for any worker performing, observing tasks that may result in flying objects, dust, or in the area where another workers activities may exposing them to eye injury. ○ During welding/cutting operations, the required filter lenses will be utilized according to the operation, electrode size and arc current. <p style="margin-left: 40px;">Foot Protection:</p> <ul style="list-style-type: none"> ○ All workers will be required to wear the appropriate foot protection. ○ Steel-toed shoes/boots are mandatory. <p style="margin-left: 40px;">Hand Protection:</p> <ul style="list-style-type: none"> ○ Workers may be exposed to hand injuries from; <ul style="list-style-type: none"> § sharp objects, § abrasive materials

GENERAL REQUIREMENTS

	<p>§ and weather.</p> <ul style="list-style-type: none"> ○ Gloves designed to protect against the specific hazard encountered are an effective means of reducing such risks and will be used on this project.
<input type="checkbox"/>	<p>(4) Overhead hazards: (Example)There will be X critical lifts required on this project. A crane will be utilized to load new materials onto Xth floor roof and remove demolished material from the roof. A plan will be submitted and approved prior to this work being performed.</p>
<input type="checkbox"/>	<p>(5) Confined space: Procedures for entering a confined space depend on the type of confined space and the scope of work associated with the entry.</p> <ul style="list-style-type: none"> a) The VAMC Cleveland Confined Space Entry Program provides the detailed information necessary for regulatory compliance. The contractor may use the VAMC Program or their own providing that it meets regulatory compliance and is reviewed and approved before entry is made. b) Under no circumstances should a person enter into a posted confined space without notifying the COTR. A "Shutdown Request" reviewed by Occupational Health and Safety and approved by the COTR will be used for this notification. c) Sub-basements are considered non-permit required confined spaces unless welding is performed or other hazards introduced that may create a hazardous atmosphere. When atmospheric hazards are identified then the sub-basements will be worked under the alternate procedure provisions provided that continuous ventilation is used to control the atmospheric hazard. d) Areas posted as "Permit Required" confined spaces will not be entered unless the hazards are eliminated and the space is reclassified. All tanks, voids, ventilation ducts and sewers are considered "Permit Required" confined spaces unless a hazard assessment is conducted and the space is reclassified. e) Employees entering confined spaces will be trained. Training will be based on the Confined Space Entry Program, ANSI National Standard "Safety Requirements for working in Tanks and other Confined Spaces" (ANSI Z117.1), or equivalent training
<input type="checkbox"/>	<p>(6) Ladders: Workers that may be performing work on ladders are instructed to adhere to the following:</p>

GENERAL REQUIREMENTS

	<ul style="list-style-type: none"> § Inspect before using § Place ladder using 4 to 1 rule § Never place base of ladder on objects § Never place ladder in front of door unless § Door is blocked in open position § Door is demarcated off § Door is locked
<input type="checkbox"/>	<p>(7) Scaffolding: For work that requires scaffolding use for employees and subcontractors, personal fall protection shall be mandatory, unless working less than 6 ft. The following topics listed will be conveyed to workers prior to scaffolding use</p> <ul style="list-style-type: none"> § Review scaffolding supplier pamphlet for proper construction § Inspect scaffolding structure before initial use/and daily § Report any defects immediately / do not use / tag out of service § Placement of structure § When fall protection is required § What you can tie off to
<input type="checkbox"/>	<p>(8) Work platforms: Describe type of platform required and specific requirements for its use.</p>
<input type="checkbox"/>	<p>(9) Fall protection: Personal Fall Protection Name Construction Company requires all employees working at or above 6' to wear personal fall protection, unless the personal fall protection creates a safety hazard by utilizing it. In that case, other means of fall protection shall be provided.</p>
<input type="checkbox"/>	<p>(10) Asbestos: As part of the Asbestos program, Name Construction Company will inform subcontractors, or their representatives of the site emergency response procedures and any potential fire, explosion, health, safety, or other hazards. The substances listed in Section 13, paragraph c, under MSDS, have the potential to be released or spilled. Section 13.c, Hazard Communication, lists some potential hazards that contractors and/or subcontractors my encounter. Also listed are the response actions to be taken and the proper notification.</p>
<input type="checkbox"/>	<p>(11) Hazardous materials: The substances listed in Section 13 paragraph c, under MSDS, have the potential to be released or spilled. Section 13 c, Hazard Communication, lists some potential hazards that contractors and/or subcontractors my encounter. Also listed are the response actions to be taken and the proper</p>

GENERAL REQUIREMENTS

	notification. MSDS sheets must be made available for review by the VAMC and contracted employees.
<input type="checkbox"/>	<p>(12) Hot work: The Name Construction Company will follow VAMC Cleveland's Hot work Policy (MCP 138-012), Name Construction will submit a Hot Work Permit to the COTR to perform acetylene oxygen welding, brazing and cutting, the following precautionary measures will be required.</p> <p>§ Inspect all surroundings and equipment to insure that combustible substances are not present in any area where contact of metal at a temperature above the flashpoint of any compound is possible.</p> <p>§ Ensure that no open containers or spills of combustible substances are present.</p> <p>§ Ensure that ignition is not possible by conduction, convection, radiation, or dispersion of molten metal.</p> <p>§ Proper protection equipment and practices will be used, i.e., fireproof blankets, removal of combustible materials where practicable, and portable fire extinguishers of proper type on hand.</p> <p>§ When the above operations are in use a continuous Fire Watch will be performed while equipment is being used.</p> <p>§ Training in fire protection will occur at the site safety orientation.</p>
<input type="checkbox"/>	<p>(13) Ventilation: Describe the type of forced ventilation that will be used and the reason it is required. Example: A 500 CFM Red Devil blower will be set up for welding operations in the sub-basement. The exhaust of this blower will be directed to the outside.</p>
<input type="checkbox"/>	<p>(14) Power distribution: Describe the circumstances that would make it necessary for disruption of power from the main power lines or associated transformers entering the facility.</p>
<input type="checkbox"/>	<p>(15) Work being done on energized equipment: Any work to be done on Energized Equipment must be done in accordance with Medical Center Policy (MCP) 138 – 03 (Working on Energized Equipment). The Medical Centers Directors permission is required to work any circuit energized. A Energized Circuit Work permit must be approved before starting work.</p>
<input type="checkbox"/>	<p>(16) Other electric: List Specifics</p>

GENERAL REQUIREMENTS

<input type="checkbox"/>	<p>(17) Loto:</p> <ul style="list-style-type: none"> § Only VA Employees will manipulate breakers or valves to perform a Lock Out Tag unless specific permission (in writing) is obtained by the Assistant Chief Engineering, M&O. § The VA will hang Locks or tags on valves or breakers as requested by the project manager. § After the VA places their lock on the device, then Name Construction Company will be allowed to place their lock on the device. § When clearing the Lock Out Tag Out, Name Construction. § Company will remove Name Construction's locks and notify the COTR. § The VA will then remove the VA locks and reposition the valve or breaker at the request of Name Construction Company.
<input type="checkbox"/>	<p>(18) Crane operation: (Example) There will be X critical lifts required on this project. A crane will be utilized to load new materials onto Xth floor roof and remove demolished material from the roof. A plan will be submitted and approved prior to this work being performed.</p>
<input type="checkbox"/>	<p>(19) Excavating; Trenches, ditches – Describe the type, name of competent person, trench boxes required and if necessary air sampling requirements.</p>
<input type="checkbox"/>	<p>(20) Earthmoving: (Example) The use of this equipment will be required on this project for moving of earth. Safety will be the responsibility of the company performing the work.</p>
<input type="checkbox"/>	<p>(21) Industrial trucks: (Example) The use of this equipment will be required on this project for loading materials onto the Xth floor roof. Industrial truck safety will be the responsibility of the company performing the work.</p>
<input type="checkbox"/>	<p>(22) Other motorized equipment: List type and specific use. Only qualified operators will be allowed to operate motorized equipment. Diesel powered equipment will not be used near medical Center Ventilation Intakes.</p>
<input type="checkbox"/>	<p>(23) Concrete, Masonry operations: Describe the work to be performed and what fall protection will be provided for workers on forms that are higher than six feet.</p>

GENERAL REQUIREMENTS

<input type="checkbox"/>	(24) Steel Erection: Describe the type of steel erection, fire protection coatings used and fall protection requirements if not already addressed in (10) Fall Protection.
<input type="checkbox"/>	(25) Alteration or Improvement of existing Electrical transmission and distribution lines and equipment. – Describe the scope of work and provisions made to ensure that the facility does not lose power during the work.
<input type="checkbox"/>	<p>(26) Hand & portable tools</p> <p>a) Hand Tools</p> <ol style="list-style-type: none"> .1 For your own protection, do not misuse your tools. Use tools only for the purpose for which they were designed. .2 Your job will be easier and much safer if tools are in good condition. Take care in handling and storing tools. .3 You and the person in charge must be satisfied that all the tools you use on the job, whether they are Company- or personally-owned, are in safe condition. .4 Tools with mushroomed heads, loose, split or broken handles, broken screw drivers, defective pliers, wrenches with spread jaws, defective cords, ground wires and plugs, etc., must not be used. .5 Never use a defective tool. Defective tools are to be removed from service and marked defective. .6 For your own protection, do not misuse your tools. .7 Cover sharp-edged and pointed tools with scabbards and guards. Always use the guards when the tools are not in use. .8 Never strike the hardened part of one tool against the hardened part of another tool or against any hardened surface. .9 Never use a file with a tang unless it is equipped with a handle. .10 Never throw tools from one person to another or from one level to

GENERAL REQUIREMENTS

	<p>another.</p> <p>.11 Hot tools, equipment or materials on tables or benches, even if they are metal covered, shall be properly identified.</p> <p>.12 Never use improper handles when you work with jacks. Always remove handles when they are not being used.</p> <p>.13 Never use metal-shielded spotlights or flashlights around exposed electrical equipment.</p> <p>b) Extension Cords</p> <p>.1 Use only approved extension cords and lamp guards. Extension cord lamps used in explosion-hazard atmospheres, such as oil vapor or flammable gases, must be equipped with guards and vapor-proof globes. Do not use a lamp with a switch.</p> <p>.2 When you use an extension cord around switchboards, switch structures or electrical equipment, it must have a non-metallic socket and guard.</p> <p>.3 Use only specially approved low voltage (6 or 12 Volt) extension cords or ground fault circuit interrupter (GFCI) when you need portable lighting in wet locations. This type of cord should be used when you work outdoors, in tanks or in other areas where moisture or condensation may be a hazard.</p> <p>.4 Use GFCI protected circuits where required by the electric code. If there is a question about the requirements, contact Engineering Service for resolution.</p> <p>c) Tool Containers</p> <p>.1 Cover any grating to prevent your tools or material from falling. When you are working on scaffolds or platforms, use a suitable container for any of your tools that are not actually being used.</p>
--	---

d) Power Tools

- .1 Always wear the proper personal protective equipment including but not limited to eye protection.
- .2 Before you use any power tool, check to make sure:
 - .it is properly tested;
 - all guards are in place;
 - all material is properly secured;
 - you disconnect the tool electrically before inserting or removing any attachments; and
 - you use GFCI protected circuits when required.
- .3 While a machine is in operation:
 - never remove chips with your hand; always use a suitable brush, hook or stick;
 - do not let the machine run unattended;
 - do not place tools or materials on machines where they can be jarred or pushed off;
 - never try to stop a machine using your hands or any other part of your body as a brake; and
 - both hands shall be used when working with portable tools.
- .4 You must unplug power tools when they are left unattended. You must shut off and de-pressurize (bleed down) pneumatic- or hydraulic-operated tools when they are left unattended.
- .5 Keep the floor around machines clean and free from oil. If you spill any oil, wipe it up immediately or use an oil absorbent. Slipping is one of the most common causes of accidents.
- .6 Carefully inspect grinding machines before you use them. Be sure that:

GENERAL REQUIREMENTS

	<ul style="list-style-type: none"> • you perform a ring test prior to installing a new wheel; • the wheel is secure on the driving shaft; • the wheel is in good condition; dress or replace the wheel as necessary; • the work rest is adjusted properly; and • the safety guard is in place and allows proper visibility to do the work. • Do not use the side of the wheel for grinding, unless it is specifically designed for side grinding. • Many wheels cannot stand up under side grinding. • Never drive a grinding wheel at speeds above that specified by the manufacturer. • When you grind small objects, hold them firmly in place with a suitable tool, not with your fingers. • Do not grind soft metals such as aluminum
<input type="checkbox"/>	<p>(27) Compressed Gasses: Compressed gas cylinders may be used at this worksite. These cylinders and gases present an injury hazard in the event that a regulator or cylinder is damaged and/or broken. The particular gases used will be (Name Gas). These hazards will be reduced by routine inspections and maintenance of compressed gas cylinders and by assuring all the units are secured from tipping. Safety caps will be installed on all cylinders that are not in use.</p> <p>Compressed gas cylinder will be kept away from excessive heat, will not be stored where they might be damaged or knocked over by passing or falling objects. The storage of oxygen and fuel gas compressed cylinders will be separated by at least 20 ft.</p>
<input type="checkbox"/>	<p>(28) Other hazardous activities (Name and describe safety precautions)</p>

GENERAL REQUIREMENTS

<input type="checkbox"/>	(29) Infection Control : Infection Control (216-791-3800 Ext 4791) has been contacted for work in patient care or high risk areas to conduct an Infection Control Risk Assessment (ICRA). Provisions of the ICRA will be followed unless changed by Infection Control.
<input type="checkbox"/>	(30) Life Safety: Occupational Health and Safety 216-791-3800 Ext 4172 has been contacted to conduct a Life Safety Risk Assessment. Interim Life Safety measures have been determined and will be posted outside of the construction area. Fire extinguishers will be provided inside the construction area and they will be inspected at a minimum of 30 day intervals. Provisions of the Interim Life Safety measures will be followed unless modified by Occupational Health and Safety. If penetrations are made in smoke/fire barriers the COTR will verify that they have been appropriately sealed before project completion.
<input type="checkbox"/>	(31) Emergency Procedures: Standard Emergency Response Plan is described in section 7. Additional provisions required for rescuing employees working at heights or working in Permit Required Confined Spaces will be as follows: Describe Specifics
<input type="checkbox"/>	(32) Demolition: Demolition is described in the Scope of Work Summary. Collection of demolition debris for recycling will minimize dust generation. All containers will be covered and employees will use appropriate methods for controlling the spread of dust outside the construction zone.
<input type="checkbox"/>	(33) New Construction Recycling: A minimum of X% of total project waste will be diverted to a landfill. a) Concrete b) Steel
<input type="checkbox"/>	(34) Interior Remodeling Recycling: A minimum of X% of total project waste will be diverted to a landfill. a) Ceiling Tile b) Steel c) Carpet

GENERAL REQUIREMENTS

<input type="checkbox"/>	(35)	General Recycling: The following categories of waste shall be diverted from a landfill (Check all that apply):
<input type="checkbox"/>		Green Waste (Biodegradable landscaping material)
<input type="checkbox"/>		Soil
<input type="checkbox"/>		Inserts (concrete, asphalt, masonry)
<input type="checkbox"/>		Clean dimensional wood, palette wood
<input type="checkbox"/>		Engineered wood products, plywood, particle board, I joints, etc.
<input type="checkbox"/>		Cardboard Paper packaging
<input type="checkbox"/>		Asphalt Roofing materials
<input type="checkbox"/>		Insulation
<input type="checkbox"/>		Gypsum board
<input type="checkbox"/>		Carpet and pad
<input type="checkbox"/>		Paint
<input type="checkbox"/>		Plastics: ABX, PVC
<input type="checkbox"/>		Beverage containers

GENERAL REQUIREMENTS

APPENDIX A


Evacuation Routes Work Zone Layouts and Maps to Emergency Services

Contractor and subcontractors working in the Medical Center will follow the posted exit signs and maps to evacuate the medical Center. To ensure all employees have been evacuated, they will meet at [\(Location\)](#).

GENERAL REQUIREMENTS

01 00 00 -45 ACCIDENT PREVENTION PLAN

Map from VAMC Cleveland (Wade Park Division) to University Hospital

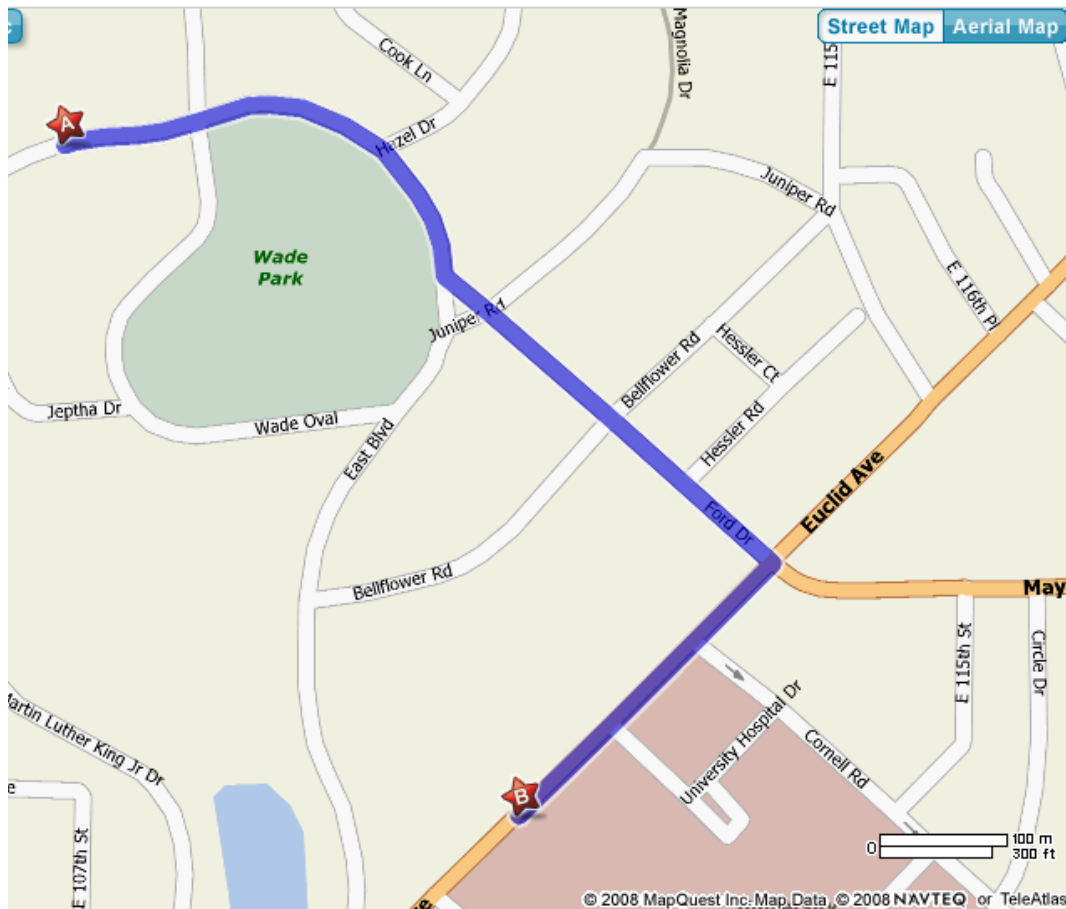

GENERAL REQUIREMENTS

01 00 00 -46 ACCIDENT PREVENTION PLAN

APPENDIX B

CERTIFICATIONS

&

JOBSITE DOCUMENTATION PROGRAM

List all individuals including their titles, who have completed

1. OSHA 30 Hour Construction Safety Course
2. OSHA 10 Hour construction Safety Course
3. Competent Person Certifications for Respiratory Protection, Fall Protection, Trenching and Shoring, etc. as required by the Scope of Work and applicable regulations.

GENERAL REQUIREMENTS

APPENDIX C

CONTRACTOR ACCIDENT RECORD

OSHA 300 FORM

To be updated and maintained in the on site construction office or the service company if an office is not located on station.

GENERAL REQUIREMENTS

01 00 00 -48 ACCIDENT PREVENTION PLAN

Site Specific Safety Plan Review Sheet

Project: _____ Date: _____

Plan Element	Yes	No	See Comments
1. Site Access and Control.			
2. Site Security.			
3. Substance Abuse Policy.			
4. Site Safety Audits (Inspections).			
5. Safety Training/Education Agenda.			
6. Accident Reporting and Investigation.			
7. Emergency Action Plan			
8. Fire Protection and Prevention.			
9. Site Safety Rules.			
a. No Smoking, except in designated areas.			
b. All accidents, no matter how minor, shall be reported immediately to your supervisor.			
c. Hard hats, construction-grade safety shoes, safety glasses, long pants, and shirts (with minimum 1/4-length sleeve) must be worn while on site.			
d. Report all hazards immediately to your supervisor.			
e. The possession, use, sale or distribution of controlled substances or alcohol on site is strictly prohibited, and is grounds for immediate dismissal.			
f. The overriding or defeating of any safety device is strictly prohibited and grounds for immediate dismissal.			
g. Failure to wear personal protective			

GENERAL REQUIREMENTS

equipment when and where applicable is grounds for immediate dismissal.			
h. Horseplay is strictly prohibited and is grounds for immediate dismissal.			
i. Reporting for work under the influence of drugs and/or alcohol is grounds for immediate dismissal.			
j. Flammable liquids and gases shall be stored in approved containers, and marked with content and appropriate hazard warnings.			
k. Only authorized employees shall be allowed to operate heavy equipment. Do not use tools for which you have not been trained. Contact your supervisor for appropriate training.			
10. Scheduling of weekly contractor safety reviews, site safety training, employee site orientation			
11. Provisions for Identification of Competent Person.			
12. Written protocols for addressing inspections by outside parties, i.e.,			
13. The General Contractor should receive and review the subcontractors Safety Plan to ensure the program is compliant with the site-specific plan. Subcontractors should be required, at a minimum, to submit written protocols relative to the hazards primary to the contractors line(s) of work (i.e., cranes, trenching and excavation, scaffolding, etc.).			
14. The required posters informing all employees of their rights and responsibilities should be posted in a prominent location within the workplace.			
15. A subcontractor orientation program			
16. Reporting of any fatality or catastrophic accident within 8 hours to the nearest OSHA Regional Office. Additionally, it is required that the local facility			

GENERAL REQUIREMENTS

Safety Officer be included in this report chain.			
17. Specific Plans to address hazards identified on the Hazardous Work Activity Checklist.			

	Plan not approved
	Plan Approved as Written
	Plan approved with the following items needed before a specific activity can begin

	Activity	Required documentation
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		

Comments:

GENERAL REQUIREMENTS

01 00 00 -51 SAFETY PLAN

Construction Safety Manager	
-----------------------------	--

GENERAL REQUIREMENTS

LOUIS STOKES CLEVELAND

MEDICAL CENTER POLICY 138-061

VA MEDICAL CENTER

December 6, 2010

10701 East Boulevard

Cleveland, OH 44106

GREEN ENVIRONMENTAL MANAGEMENT SYSTEM (GEMS) POLICY

1. PURPOSE

a. Executive Order 13148, Greening the Government through Leadership in Environmental Management, directed federal agencies to have a governing environmental policy in place for the operation of its facilities and required VHA facilities to implement an environmental management system. The Federal government has made significant progress in improving environmental and energy performance through a series of executive orders, Memoranda of Understanding, and other guidance. Implementing Executive Order 13423 Strengthening Federal Environmental, Energy, and Transportation Management, intends to build on that body of work and success by integrating and updating prior practices and requirements into a cohesive, strategic approach to further ensure enhanced performance and compliance with statutory and other legal requirements.

b. The most recent environmental EO (13514), "Federal Leadership in Environmental, Energy, and Economic Performance," was signed by President Obama on October 5, 2009. This EO does not rescind or eliminate the requirements of EO 13423 but instead expands on the energy reduction and environmental performance requirements for federal agencies.

c. The Louis Stokes VA Medical Center facilitates the use of its Green Environmental Management System (GEMS) Policy to attain continual improvement in environmental programs.

2. POLICY

a. The mission of the Louis Stokes Cleveland VA Medical Center is to deliver quality healthcare to our nation's veterans. In order to accomplish this mission, the VA Medical Center recognizes that it must operate so as to protect both the environment and the health and safety of patients, employees, and visitors. This governing

GENERAL REQUIREMENTS

environmental policy establishes a governing environmental policy to accomplish this mission. In accomplishing this mission of providing quality healthcare to our nation's veterans, it is this VA Medical Center's policy to:

(1) Further develop the VA Medical Center's GEMS program and implement Executive Order 13423 Strengthening Federal Environmental, Energy, and Transportation Management and 13514, "Federal Leadership in Environmental, Energy, and Economic Performance".

(2) Ensure VAMC employees at all levels be good stewards of the environment by complying with federal, state, and local environmental laws and other legal requirements, preventing pollution, minimizing waste, conserving cultural and natural resources, and continually improving environmental programs.

(3) Ensure top management commitment and accountability through the incorporation of position description elements and performance standards and/or measures related to environmental program management for appropriate senior-level VHA managers and other employees who have responsibilities related to the management of environmental programs.

(4) Place a high priority on obtaining funds and other necessary resources to ensure compliance by VA medical centers with Federal, state, and local environmental requirements, including implementation of GEMS. Top VHA managers must provide necessary support and resources to ensure the effectiveness of GEMS.

(5) Utilize sustainable practices to eliminate, minimize or mitigate adverse environmental impacts.

(6) Evaluate the operation of the VA Medical Center to incorporate actions into facility planning and procedures to reduce environmental vulnerabilities and ensure environmental compliance.

(7) Manage the operation of the medical center throughout its life cycle, from planning and acquisition through disposal and/or decommissioning to protect human

GENERAL REQUIREMENTS

health and the environment and minimize adverse effects on the natural environment consistent with VHA's mission.

(8) Comply with the requirements of VHA policy regarding Pollution Prevention (P2) Programs and integrate pollution prevention, waste minimization, natural resource conservation, affirmative procurement or "green" purchasing, life cycle costing, and environmental compliance into VA Medical Center operations, purchasing, planning, and decision making, wherever practical. Source reduction is the pollution prevention method of choice, followed by recycling, treatment of waste, and proper disposal.

(9) Use natural resources efficiently, maintain and protect plant and wildlife habitat consistent with the VA Medical Center's mission.

(10) Recognize that the development and construction at the VA Medical Center must consider the unique conditions of the environment of which the facility is a part.

(11) Train VA Medical Center staff as needed to carry out the environmental responsibilities of their position.

(12) Solicit input as appropriate, from stakeholders including staff, patients, visitors and the local community regarding environmental matters affecting the operation of the VHA facilities.

3. RESPONSIBILITY. All VA Medical Center employees must perform their functions consistent with regulatory requirements, VA environmental and other policies and its overall mission.

a. The Medical Center Director is responsible for supporting the VA Medical Center GEMS. The Medical Center Director ensures that adequate resources are provided to maintain effective monitoring and measuring and shall approve GEMS monitoring and measuring procedures.

GENERAL REQUIREMENTS

b. GEMS Coordinator:

(1) Is the key member and facilitator of the VA Medical Center GEMS Committee with technical expertise in environmental management systems, environmental technology and regulatory compliance.

(2) Is responsible for coordinating the various activities as well as periodic environmental compliance audits.

c. The GEMS Committee:

(1) Includes representatives from:

- (a) The Director's Office
- (b) Canteen Service
- (c) Contracting
- (d) Engineering
- (e) Engineering/Energy Manager
- (f) Chief, Environmental Management Service (Chairperson)
- (g) Infection Control
- (h) Material Management
- (i) Nutrition and Food Service
- (j) Nuclear Medicine
- (k) Nursing
- (l) Pathology and Laboratory Medicine Service
- (m) Pharmacy
- (n) Radiology
- (o) Research
- (p) Safety/Industrial Hygiene

(2) An effective GEMS Committee is vital for a successful GEMS Program. It should be used to facilitate organizational involvement in the GEMS Program. The GEMS Committee is responsible for:

- (a) Developing a comprehensive written GEMS Program.
- (b) Performing an annual review of the GEMS Program and making updates based on new information and results of audits and inspections.
- (c) Overseeing the development of GEMS and the implementation of EO 13423 and 13514.
- (d) Identifying significant aspects and impacts.

GENERAL REQUIREMENTS

(e) Setting and measuring objectives and targets.

(f) Approving corrective action plans to ensure an effective, continuously-improving program.

(g) Reviewing and approving monitoring and measuring for significant aspects.

(h) Submitting an annual report on the effectiveness of the GEMS to the Medical Center Director for approval.

4. PROCEDURES. GEMS procedures are contained within the GEMS Manual.

5. REFERENCES

a. VA Directive 0057, VA Environmental Management System and Governing Environmental Policy

b. VHA Directive 2005-011, VHA Green Environmental Management System (GEMS) and Governing Environmental Policy Statement

c. ISO 14001, Environmental Management Systems

d. Executive Order 13423, Strengthening Federal Environmental, Energy, and Transportation Management

e. Executive Order 13514, "Federal Leadership in Environmental, Energy, and Economic Performance"

6. RESCISSION. Medical Center Policy 138-061, Green Environmental Management Systems (GEMS) Policy dated June 1, 2009.

GENERAL REQUIREMENTS

7. REVIEW DATE. The review date of this policy is December 6, 2013.

8. FOLLOW-UP RESPONSIBILITY. Chief, Engineering Service.

//S//

SUSAN M. FUEHRER

Medical Center Director

GENERAL REQUIREMENTS

01 00 00 -58 GEMS POLICY

OSHA Requirements and Safety and Health Regulations

PART 1 - OSHA Requirements

1.1 General

- A. Contractors are required to comply with the Occupational Safety and Health Act of 1970. This will include the safety and health standard found in Code of Federal Regulations (CFR) 1910 and 1926. Copies of those standards can be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20420.
- B. In addition, Contractor will be required to comply with other applicable Medical Center policies and safety regulations. These policies and regulations will be presented to the Contractor at the pre-construction meeting. Each of the Contractor's employees will be required to read the statement of policies and regulations, and sign an acknowledgment that such policies and regulations are understood. Signed acknowledgment will be returned to the Contract Officer Technical Representative (COTR).
- C. Contractors involved with the removal, alteration or disturbance of asbestos-type insulation or materials or lead paint will be required to comply strictly with the regulations found in CFR 1910.1001 and the appropriate Environmental Protection Agency (EPA) lead regulations regarding disposal of asbestos or lead paint. Assistance in identifying asbestos or lead can be requested from the Medical Center's Industrial Hygienist and the COTR.
- D. Contractors entering locations of asbestos contamination or lead paint residue (i.e., pipe, basements, walls, windows) shall be responsible for providing respiratory protection to their employees and ensuring respirators are worn in accordance with the Occupational Safety and Health Administration (OSHA) [CFR 1910.1001(g)]. Asbestos-or lead paint-contaminated areas shall be defined on project drawings. The minimum equipment requirements will be a half-mask air-purifying respirator equipped with high efficiency filters and disposable coveralls, or as determined by air monitoring results.
- E. Contractor, along with other submittals and at least two weeks prior to bringing any materials on-site, must submit a complete list of chemicals the Contractor will use and Material Safety Data Sheets (MSDS) for all hazardous materials as defined in OSHA 1910.1200(d), Hazard Determination. Contracting Officer shall have final approval of all materials brought on site.
- F. The Contractor will be held solely responsible for the safety and health of

GENERAL REQUIREMENTS

their employees. The contractor will also be held responsible for protecting the health and safety of the VA Community (patients, staff, and visitors) from the unwanted effects of construction. VA staff will monitor the Contractor's performance in complying with all safety and health aspects of the project. Severe or constant violations may result in an immediate work stoppage or request for a Compliance Officer from the Occupational Safety and Health Administration.

- G. During all phases of demolition, construction and alterations, Contractors are required to understand and strictly follow National Fire Protection Association (NFPA) 241, Standard for Safeguarding Construction, Alteration and Demolition Operations. The Medical Center's Safety and Occupational Health Specialist or Industrial Hygienist will closely monitor the work area for compliance. Appropriate action will be taken for non-compliance.

PART 2 - Specific VA Medical Center Fire and Safety Policies, Procedures and Regulations

2.1 Introduction.

- A. The safety and fire protection of patients, employees, members of the public and government is one of continuous concern to this Medical Center.
- B. Contractors, their supervisors and employees are required to comply with Medical Center policies to ensure the occupational safety and health of all. Failure to comply may result in work stoppage.
- C. While working at this Medical Center, contractors are responsible for the occupational safety and health of their employees. Contractors are required to comply with the applicable OSHA standards found in 29 CFR 1910 for general industry and 29 CFR 1926 for construction. Failure to comply with these standards may result in work stoppage and a request to the Area Director of OSHA for a Compliance Officer to inspect your work site.
- D. Contractors are to comply with the requirements found in the National Fire Protection Association (NFPA) 241, Building Construction and Demolition Operation, and NFPA 51B, Fire Prevention in Use of Cutting and Welding Processes.
- E. Questions regarding occupational safety and health issues can be

GENERAL REQUIREMENTS

addressed to the Medical Center Safety and Occupational Health Specialist (ext. 4172) or Industrial Hygienist (ext. 4628).

- F. Smoking is not permitted in any interior areas of the Medical Center, including all interior stairwells, tunnels, construction and/or service/maintenance sites. Compliance with this policy by your direct and subcontracted labor force is required.

2.2 Hazard Communication

- A. Contractors shall comply with OSHA Standard 29 CFR 1926.59, Hazard Communication.
- B. Contractors shall submit to the COTR, copies of MSDS covering all hazardous materials to which the Contractor and VA employees are exposed.
- C. Contractors shall inform the Safety Officer of the hazards to which VA personnel and patients may be exposed.
- D. Contractors shall have a written Hazard Communication Program available at the construction site, which details how the Contractor will comply with 29 CFR 1926.59.

2.3 Fires

- A. All fires must be reported. In the event of a fire in your work area, use the nearest pull box station, and also notify Medical Center staff in the immediate area. Emergency notification can also be accomplished by dialing ext. 2222.
- B. Be sure to give the exact location from where you are calling and the nature of the emergency. If a Contractor experiences a fire that was rapidly extinguished by your staff, you still must notify the COTR within an hour of the event so that an investigation of the fire can be accomplished.

2.4 Fire Alarms, Smoke Detection and Sprinkler System

If the nature of your work requires the deactivation of the fire alarm, smoke detection or sprinkler system, you must notify the COTR. Notification must be made in accordance with the major and minor shutdown requirements of the specification so time can be allowed to deactivate the system and provide alternative measures for fire protection. Under no circumstance is a Contractor allowed to deactivate any of the fire protection systems in this Medical Center.

GENERAL REQUIREMENTS

2.5 Smoke Detectors

False alarms will not be tolerated. You are required to be familiar with the location of the smoke detectors in your work area. When performing cutting, burning or welding or any other operations that may cause smoke or dust, you must take steps to temporarily cover smoke detectors in order to prevent false alarms. Failure to take the appropriate action will result in the Contracting Officer assessing actual costs for government response for each false alarm that is preventable. Prior to covering the smoke detectors, the Contractor will notify the COTR, who will also be notified when the covers are removed.

2.6 Hot Work Permit

- A. Hot work is defined as operations including, but not limited to, cutting, welding, thermal welding, brazing, soldering, grinding, thermal spraying, thawing pipes or any similar situation. If such work is required, whenever possible the Contractor must notify the COTR no less than three (3) days in advance of such work. The Competent Hot Work Supervisor (CHWS) will inspect the work area and issue a Hot Work Permit, authorizing the performance of such work.
- B. All hot work will be performed in compliance with the Medical Center's policy 138-012 regarding Hot Work Permits and NFPA 241, Safeguarding Construction, Alteration and Demolition Operations; and NFPA 51B, Fire Prevention in Use of Cutting and Welding Processes; and applicable OSHA standard. A hot work permit will only be issued to individuals familiar with these regulations.
- C. A Hot Work Permit will be issued only for the period necessary to perform such work. In the event the time necessary will exceed one day, a Hot Work Permit may be issued for the period needed; however, the CHWS will inspect the area daily. Hot Work Permit will apply only to the location identified on the permit. If additional areas involve hot work, then additional permits must be requested.
- D. Contractors will not be allowed to perform hot work processes without the appropriate permit.
- E. Any work involving the Medical Center's fire protection system will require advance notification. Under no circumstance will the Contractor or employee attempt to alter or tamper with the existing fire protection system.
- F. Thirty minutes following completion of the hot work, the Fire Watch will

GENERAL REQUIREMENTS

perform an inspection of the area to confirm that sparks or drops of hot metal are not present.

2.7 Temporary Enclosures

Only non-combustible materials will be used to construct temporary enclosures or barriers at this Medical Center. Materials used to construct dust barriers must conform to NFPA 701, Standard Methods of Fire Tests for Flame-Resistant Textiles and Films.

2.8 Flammable Liquids

All flammable liquids will be kept in approved safety containers. Only the amount necessary for your immediate work will be allowed in the building. Flammable liquids must be removed from the building at the end of each day.

2.9 Compressed Gas Cylinders

Compressed gas shall be secured in an upright position at all times. A suitable cylinder cart will be used to transport compressed gas cylinders. Only those compressed gas cylinders necessary for immediate work will be allowed in occupied buildings. All other compressed gas cylinders will be stored outside of buildings in a designated area. Contractors will comply with applicable standards compressed gas cylinders found in 29 CFR 1910 and 1926 (OSHA).

2.10 Internal Combustion Engine-Powered Equipment

Equipment powered by an internal combustion engine (such as saws, compressors, generators, etc.) will not be used in an occupied building. Special consideration may be given for unoccupied buildings only if the OSHA and NFPA requirements have been met.

2.11 Powder-Activated Tools

The operator of powder-activated tools must be trained and certified to use them. Powder-activated tools will be kept secured at all times. When not in use, the tools will be locked up. When in use, the operator will have the tool under his immediate control.

2.12 Tools

- A. Under no circumstances will equipment, tools and other items of work to be left unattended for any reason. All tools, equipment and items of work must be under the immediate control of your employee.

GENERAL REQUIREMENTS

- B. If for some reason a work area must be left unattended, then tools and other equipment must be placed in an appropriate box or container and locked. All tool boxes, containers or any other device used for the storage of tools and equipment will be provided with a latch and padlock, and will be kept locked at all times, except for putting in and removing tools.
- C. All doors to work areas will be closed and locked when rooms are left unattended. Failure to comply with this policy will be considered a violation of VA Regulations 1.218(b), Failure to comply with signs of a directive and restrictive nature posted for safety purposes, and subject to a \$50.00 fine. Subsequent similar violations may result in both imposition of such a fine as well as the Contracting Officer taking action under the contract's Accident Prevention Clause [Federal Acquisition Regulation (FAR) 52.236-13] to suspend all contract work until violations may be satisfactorily resolved, or under FAR 52.236-5, Material and Workmanship Clause, to remove from the worksite any personnel deemed by the Contracting Officer to be careless to the point of jeopardizing the welfare of facility patients or staff.
- D. You must report any tools or equipment that are missing to the VA Police Department.
- E. Tools and equipment found unattended will be confiscated and removed from the work area.

2.13 Ladders

Ladders must not be left unattended in an upright position. Ladders must be attended at all times or taken down, and chained securely to a stationary object.

2.14 Scaffolds

All scaffolds will be attended at all times. When not in use, an effective barricade (fence) will be erected around the scaffold to prevent use by unauthorized personnel (Reference OSHA 1926, Subpart L).

2.15 Excavations

The contractor shall comply with OSHA 1926, Subpart P. An OSHA Competent Person must be on site during the excavation. The contractor shall coordinate with COTR and utility companies prior to the excavation to identify underground utilities tanks, etc. All excavations left unattended will be provided with a barricade suitable to prevent entry by unauthorized persons.

GENERAL REQUIREMENTS

2.16 Storage

You must make prior arrangements with the COTR for the storage of building materials. Storage will not be allowed to accumulate in the Medical Center buildings.

2.17 Trash and Debris

You must remove all trash and debris from the work area on a daily basis. Trash and debris will not be allowed to accumulate inside or outside of the buildings. You are responsible for making arrangements for removal of trash from the Medical Center facility.

2.18 Protection of Floors

It may be necessary at times to take steps to protect floors from dirt, debris, paint, etc. A tarp or other protective covering may be used in accordance with specifications outlined in the general requirements section. However, you must maintain the proper amount of floor space for the safe passage of pedestrian traffic.

2.19 Signs

Signs must be placed at the entrance to work areas warning people of your work. Signs must be suitable for the condition of the work. Small pieces of paper with printing or writing are not acceptable. The VA Medical Center (VAMC) Safety Officer or COTR can be consulted in this matter.

2.20 Accidents and Injuries

Contractors must report all accidents and injuries involving their employees.

2.21 Infection Control

Contractors must control the generation of dust and the contamination of patient care surfaces, supplies and equipment. During demolition phases of the construction:

- A. The construction area shall be under negative pressure, ensuring there is an appreciable flow of clean air from the VA-occupied portion of the facility into the construction area. The airflow shall be sufficiently strong enough to draw in the plastic door flaps commonly located at the construction entrance or at the specific site within the construction area.

GENERAL REQUIREMENTS

- B. Construction debris being transported through the VA-occupied portion of the facility shall be covered and/or wetted.
- C. Construction employees shall remove dust-laden clothing before entering the VA-occupied portion of the facility.
- D. Carpet/sticky mats shall be placed at all construction entrances, and be satisfactorily maintained so as to minimize the tracking of dust into the VA-occupied portion of the facility.
- E. Dry sweeping of dust and debris is not to be performed.
- F. Contractor must obtain an Infection Control Construction permit from the COTR before work can begin. A separate permit is required for each area work is being done. Permit must be signed by the I.C. Nurse, COTR, and Contractor. Permit is required to be posted outside work site at all times.

(Control measures B - E above must be practiced during the construction phase.)

2.22 Confined Space Entry

- A. Contractor will be notified if a project work area contains spaces requiring a confined space work permit. Entry to these confined space areas will only be permitted through compliance with a permit space program meeting the requirements of 29 CFR 1910.146 and 1926.21(b)(6).
- B. Contractor will be apprised of the elements including the hazards identified and the Medical Center's (last employer) experience with the space that makes the space in question a permit space.
- C. Contractor will be apprised of any precautions or procedures that the Medical Center has implemented for the protection of employees in or near permit space where Contractor personnel will be working.
- D. Medical Center and Contractor will coordinate entry operations when both Medical Center personnel and Contractor personnel will be working in or near permit spaces as required by 29 CFR 1910.146(d)(ii) and 1926.21(b)(6).
- E. Contractor will obtain any available information regarding permit space hazards and entry operation from the Medical Center.
- F. At the conclusion of the entry operations, the Medical Center and

GENERAL REQUIREMENTS

Contractor will discuss any hazards confronted or created in permit spaces.

- G. The Contractor is responsible for complying with 29 CFR 1910.246(d) through (g) and 1926.21(b)(6). The Medical Center, does not provide rescue and emergency services required by 29 CFR 1910.246(k) and 1926.21(b)(6).

2.23 Contractor Parking and Material Delivery

Contractor's parking is not available at the medical center and the delivery of building materials tools, etc., must be pre-arranged with the COTR.

GENERAL REQUIREMENTS

01 00 00 -67 OSHA REQUIREMENTS

SECTION 01 31 00
ALTERNATES

PART 1 GENERAL

1.1 DESCRIPTION

A. This section describes Alternates to the Base Bid.

1.2 SUMMARY

A. Section includes administrative and procedural requirements for alternates.

1.3 DEFINITIONS

A. Definition in "Alternate" Paragraph below assumes the normal bidding situation applies, with Contractors stating Alternate amounts requested on the Bid Form. It also assumes that the Contracting Officer will decide to accept or reject Alternates before signing Contractor Agreement and that Bidding Requirements stipulate terms under which Contracting Officer will accept or reject alternates.

B. Alternate: An amount proposed by Bidders and stated on the Bid Form for certain work defined in the bidding requirements that may be added to or deducted from the Base Bid amount if Contracting Officer decides to accept a corresponding change either in the amount of construction to be completed or in the products, materials, equipment, systems, or installation methods described in the Contract Documents.

1. Alternates described in this Section are part of the Work only if enumerated in the Agreement.

2. The cost or credit for each Alternate is the net addition to or deduction from the Contract Sum to incorporate Alternate into the Work. No other adjustments are made to the Contract Sum.

1.4 PROCEDURES

A. Coordination: Revise or adjust affected adjacent work as necessary to completely integrate work of the alternate into Project.

1. Include as part of each alternate, miscellaneous devices, accessory objects, and similar items incidental to or required for a complete installation whether or not indicated as part of Alternate.

B. Notification: Immediately following award of the Contract, notify each party involved, in writing, of the status of each Alternate. Indicate if Alternates have been accepted, rejected, or deferred for later consideration. Include a complete description of negotiated revisions to Alternates.

- C. Execute accepted Alternates under the same conditions as other work of the Contract.
- D. Schedule: A Schedule of Alternates is included at the end of this Section.

PART 2 - PRODUCTS (NOT USED)

PART 3 - SCHEDULE OF ALTERNATES

3.1 SCHEDULE OF ALTERNATES

- A. Items listed with each Alternate below indicate some items to be included with that alternate. Refer to drawings for full scope of each Alternate.
- B. DEDUCT ALTERNATE #1: First Floor Level of Corridor
 - 1. Delete the First Floor Level of the Corridor. No work is needed in this area if Deduct Alternate is accepted.
- C. DEDUCT ALTERNATE #2: Delete Landscaping and Exterior Plaza
 - 1. Delete the landscape scope, civil scope, exterior plaza work as indicated on the Drawings. This work is not needed in this area if Deduct Alternate is accepted.

- - - E N D - - -

SECTION 01 32 16.14
CONSTRUCTION PROGRESS SCHEDULES

PART 1- GENERAL

1.1 DESCRIPTION:

- A. The Contractor shall develop a Construction Progress Schedule demonstrating fulfillment of the contract requirements, shall keep the schedule up-to-date in accordance with the requirements of this section and shall utilize the plan for scheduling, coordinating and monitoring work under this contract (including all activities of subcontractors, equipment vendors and suppliers). Conventional Critical Path Method (CPM) Precedence Diagramming Method (PDM) technique will be utilized to satisfy both time and cost applications. All schedule data and reports required under this specification section shall be based upon regular total float, not relative total float schedules.
- B. Contractor shall not perform any work onsite until the schedule associated with that work is first approved by the VA.

1.2 CONTRACTOR'S REPRESENTATIVE:

- A. The Contractor shall designate an authorized representative in the firm who will be responsible for the preparation of the contract schedule, review and report progress of the project with and to the Contracting Officer's representative.
- B. The Contractor's representative shall have direct project control and complete authority to act on behalf of the Contractor in fulfilling the requirements of this specification section and such authority shall not be interrupted throughout the duration of the project.

1.3 CONTRACTOR'S CONSULTANT:

- A. To prepare the schedule and electronic copy, which reflects the Contractor's project plan, the Contractor may engage an independent CPM consultant who is skilled in the time and cost application of scheduling using (PDM) network techniques for construction projects, the cost of which is included in the Contractor's bid; or prepared by Contractor's own qualified staff member.

1.4 COMPUTER PRODUCED SCHEDULES

- A. The contractor shall provide to the VA weekly computer processing of all computer-produced time/cost schedules and reports generated from weekly project updates. This weekly computer service will include: three copies of up to five different reports (inclusive of all pages) to the contracting officer's representative; a hard copy listing of all project

schedule changes, and associated data, made at the update; and the resulting weekly updated schedule. These must be submitted with and substantively support the contractor's monthly payment request and the signed lookahead report. The COTR shall identify the five different report formats that the contractor shall provide based upon the weekly schedule updates.

- B. The contractor is responsible for the correctness and timeliness of the computer-produced reports. The Contractor is also responsible for the accurate and timely submittal of the updated project schedule and all CPM data necessary to produce the computer reports and payment request that is specified.
- C. The VA shall report errors in computer-produced reports to the Contractor's representative within ten calendar days from receipt of reports. The Contractor will reprocess the computer-produced reports and associated electronic copy, when requested by the Contracting Officer's representative, to correct errors which affect the payment and schedule for the project.

1.5 THE COMPLETE PROJECT NETWORK DIAGRAM SUBMITTAL

- A. Within 14 calendar days after receipt of Notice to Proceed, the Contractor shall submit for the Contracting Officer's review; three blue line copies of the complete schedule on sheets of paper 765 x 1070 mm (30 x 42 inches). The submittal shall also include three copies of a computer-produced activity/event ID schedule showing project duration; phase completion dates; and other data, including event cost. Each activity/event on the computer-produced schedule shall contain as a minimum, but not limited to, activity/event ID, duration, predecessor and successor relationships, trade code, area code, description, budget amount, early start date, early finish date, late start date, late finish date and total float. Work activity/event relationships shall be restricted to finish-to-start, only, without lead or lag constraints. Activity/event date constraints, not required by the contract, will not be accepted unless submitted to and approved by the Contracting Officer. The contractor shall make a separate written detailed request to the Contracting Officer identifying these date constraints and secure the Contracting Officer's written approval before incorporating them into the schedule. The Contracting Officer's separate approval of the schedule shall not excuse the contractor of this requirement. Logic events (non-work) will be permitted where necessary to reflect proper logic among work events, but must have a zero duration. The complete

working schedule shall reflect the Contractor's approach to scheduling the complete project. The final schedule in its original form shall contain no contract changes or delays which may have been incurred during the final schedule development period and shall reflect the Contractors as bid schedule. These changes/delays shall be entered at the first update after the final schedule has been approved. The Contractor should provide their requests for time and supporting time extension analysis for contract time as a result of contract changes/delays, after this update, and in accordance with Article, ADJUSTMENT OF CONTRACT COMPLETION.

- B. Within 14 calendar days after receipt of the complete project schedule, the Contracting Officer or his representative, will accept or reject the schedule.
- C. The VA will process and return the approved baseline schedule data to the contractor for subsequent project schedule reporting and updating. This approved baseline schedule and the computer-produced schedule(s) generated there from shall constitute the approved baseline schedule until subsequently revised in accordance with the requirements of this section.
- D. The Complete Project Schedule will contain approximately 100 work activities/events.

1.6 WORK ACTIVITY/EVENT COST DATA

- A. The Contractor shall cost load all work activities/events except procurement activities. The cumulative amount of all cost loaded work activities/events (including alternates) shall equal the total contract price. Prorate overhead, profit and general conditions on all work activities/events for the entire project length. The contractor shall generate from this information cash flow curves indicating graphically the total percentage of work activity/event dollar value scheduled to be in place on early finish, late finish. These cash flow curves will be used by the Contracting Officer to assist him in determining approval or disapproval of the cost loading. In the event of disapproval, the Contractor shall revise and resubmit in accordance with Article, THE COMPLETE PROJECT SCHEDULE SUBMITTAL. Negative work activity/event cost data will not be acceptable, except on VA issued contract changes.
- B. In accordance with Article PERFORMANCE OF WORK BY THE CONTRACTOR in the GENERAL CONDITIONS, the Contractor shall submit, simultaneously with the cost per work activity/event of the construction schedule required by this Section, a responsibility code for all activities/events (referred

to as "branches" in the GENERAL CONDITIONS) of the project for which the Contractor's forces will perform the work.

- C. The Contractor shall cost load work activities/events for ASBESTOS ABATEMENT. The sum of asbestos abatement work activity/event costs shall equal the value of the asbestos bid item in the Contractors' bid.
- D. The Contractor shall cost load work activities/events for all BID ITEMS. The sum of the cost loading for each bid item work activities/events shall equal the value of the item in the Contractors' bid.
- E. Work activities/events for Contractor bond shall have a trade code and area code of BOND.


1.7 SCHEDULE REQUIREMENTS

- A. Show on the schedule the sequence and interdependence of work activities/events required for complete performance of all items of work. In preparing the schedule, the Contractor shall:
 - 1. Exercise sufficient care to produce a clear, legible and accurate schedule. Computer plotted schedules shall legibly display and plot all information required by the VA CPM activity/event legend or the computer plotted schedule will not be acceptable. If the computer plotted schedule is not found acceptable by the contracting officer's representative, then the schedule will need to be hand drafted and meet legibility requirements. Group activities related to specific physical areas of the project, on the schedule for ease of understanding and simplification. Provide a key plan on each schedule sheet showing the project area associated with the work activities/events shown on that sheet.
 - 2. Show the following on each work activity/event:
 - a. Activity/Event ID number.
 - b. Concise description of the work represented by the activity/event. (35 characters or less including spaces preferred).
 - c. Performance responsibility or trade code (five alpha characters or less): GEN, MECH, ELEC, CARP, PLAST, or other acceptable abbreviations.
 - d. Duration (in work days.)
 - e. Cost (in accordance with Article, ACTIVITY/EVENT COST DATA of this section and less than \$9,999,999 per activity).
 - f. Work location or area code (five characters or less), descriptive of the area involved.
 - g. Manpower required (average number of men per day).

- h. The SYMBOL LEGEND format shown below and on the drawing, CPM-1 (Sample CPM Network) is mandatory and shall be followed in preparing final schedules.

SYMBOL LEGEND

Show Network Diagram page number location(s) for all incoming/outgoing node connector(s).

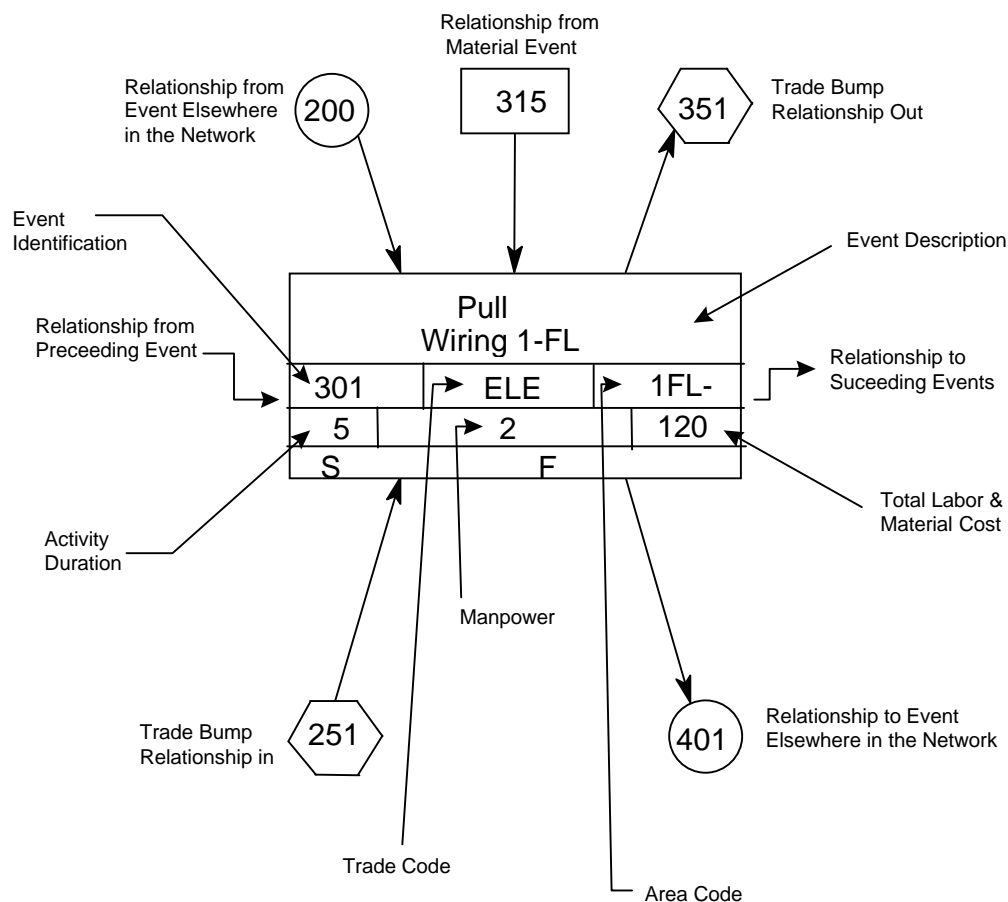

3. Show activities/events as:

- a. Contractor's time required for submittal of shop drawings, templates, fabrication, delivery and similar pre-construction work.
- b. Contracting Officer's and Architect-Engineer's review and approval of shop drawings, equipment schedules, samples, template, or similar items.
- c. Interruption of VA Medical Center utilities, delivery of Government furnished equipment, and rough-in drawings, project phasing and any other specification requirements.

- d. Test, balance and adjust various systems and pieces of equipment, maintenance and operation manuals, instructions and preventive maintenance tasks.
 - e. VA inspection and acceptance activity/event with a minimum duration of five work days at the end of each phase and immediately preceding any VA move activity/event required by the contract phasing for that phase. Schedule these activities/events so that only one phase is scheduled for completion within the same 30 consecutive calendar day period (except for those phases immediately preceding the final acceptance). Maintain this scheduling condition throughout the length of the contract unless waived by the Contracting Officer's representative in writing.
 - f. Work activities/events for the asbestos abatement bid item shall have a trade code of ASB.
 - g. Bid items other than the Base Bid (ITEM 1) and Asbestos Abatement item shall have trade codes corresponding to the appropriate bid item number (e.g., ITM 3, ITM 4 and other items).
- 4. Show not only the activities/events for actual construction work for each trade category of the project, but also trade relationships to indicate the movement of trades from one area, floor, or building, to another area, floor, or building, for at least five trades who are performing major work under this contract.
 - 5. Break up the work into activities/events of a duration no longer than 30 work days each, except as to non-construction activities/events (i.e., procurement of materials, delivery of equipment, concrete and asphalt curing) and any other activities/events for which the Contracting Officer may approve the showing of a longer duration. The duration for VA approval of any required submittal, shop drawing, or other submittals shall not be less than 20 work days. Refer to drawing CPM-1 for VA approval activities/events which will require minimum duration longer than 30 workdays. The construction time as determined by the CPM schedule from early start to late finish for any sub-phase, phase or the entire project shall not exceed the contract time(s) specified or shown.
 - 6. Describe work activities/events clearly, so the work is readily identifiable for assessment of completion. Activities/events labeled "start," "continue," or "completion," are not specific and will not be allowed. Lead and lag time activities will not be acceptable.
 - 7. Uniquely number each activity/event with numbers ranging from 1 to 99998 only. The schedule should be generally numbered in sequence;

left to right; top to bottom, and omitting numbers ending in 3, 6, and 9.

- B. Submit the following supporting data in addition to the schedule, activity/event ID schedule and electronic file (s). Failure of the Contractor to include this data will delay the review of the submittal until the Contracting Officer is in receipt of the missing data:
1. The proposed number of working days per week.
 2. The holidays to be observed during the life of the contract (by day, month, and year).
 3. The planned number of shifts per day.
 4. The number of hours per shift.
 5. List the major construction equipment to be used on the site, describing how each piece relates to and will be used in support of the submitted schedule work activities/events.
 6. Provide a typed, doubled spaced, description, at least one page in length, of the plan and your approach to constructing the project.
- C. To the extent that the schedule or any revised schedule shows anything not jointly agreed upon, it shall not be deemed to have been approved by the Contracting Officer. Failure to include any element of work required for the performance of this contract shall not excuse the Contractor from completing all work required within any applicable completion date of each phase regardless of the Contracting Officer's approval of the schedule.
- D. Electronic Copy Requirements and CPM Activity/Event Record
Specifications: Submit to the VA an electronic file(s) containing one file of the data required to produce the schedule, reflecting all the activities/events of the complete project schedule being submitted.

1.8 PAYMENT TO THE CONTRACTOR:

- A. Monthly, the contractor shall submit the AIA application and certificate for payment documents G702 & G703 reflecting updated schedule activities and cost data in accordance with the provisions of the following Article, PAYMENT AND PROGRESS REPORTING, as the basis upon which progress payments will be made pursuant to Article, PAYMENT UNDER FIXED-PRICE CONSTRUCTION CONTRACTS of the GENERAL CONDITIONS. The Contractor is entitled to a monthly progress payment upon approval of estimates as determined from the currently approved updated computer-produced calendar-dated schedule unless, in special situations, the Contracting Officer permits an exception to this requirement. Monthly payment requests shall include: three copies of up to five different

reports (inclusive of all pages) to the contracting officer's representative; a listing of all project schedule changes, and associated data, made at the update; and an electronic file (s) of the resulting weekly updated schedule. These must be submitted with and substantively support the contractor's monthly application and certificate for payment request documents.

- B. When the Contractor fails or refuses to furnish to the Contracting Officer the information and schedule in electronic format, which, in the sole judgment of the Contracting Officer, is necessary for processing the monthly progress payment, the Contractor shall not be deemed to have provided an estimate and supporting schedule data upon which progress payment may be made.

1.9 PAYMENT AND PROGRESS REPORTING

- A. Weekly job site progress meetings shall be held on dates mutually agreed to by the Contracting Officer (or Contracting Officer's representative) and the Contractor. Contractor and the CPM consultant will be required to attend all weekly progress meetings. Presence of Subcontractors during progress meeting is optional unless required by the Contracting Officer (or Contracting Officer's representative). The Contractor shall update the project schedule and all other data required by this section shall be accurately filled in and completed prior to the weekly progress meeting. The Contractor shall provide this information to the Contracting Officer or the VA representative in completed form three work days in advance of the progress meeting. Job progress will be reviewed to verify:

1. Actual start and/or finish dates for updated/completed activities/events.
2. Remaining duration, required to complete each activity/event started, or scheduled to start, but not completed.
3. Logic, time and cost data for change orders, and supplemental agreements that are to be incorporated into the schedule and computer-produced schedules. Changes in activity/event sequence and duration which have been made pursuant to the provisions of following Article, ADJUSTMENT OF CONTRACT COMPLETION.
4. Percentage for completed and partially completed activities/events.
5. Logic and duration revisions required by this section of the specifications.
6. Activity/event duration and percent complete shall be updated independently.

- B. The Contractor shall submit a narrative report as a part of his weekly review and update, in a form agreed upon by the Contractor and the Contracting Officer. The narrative report shall include a description of problem areas; current and anticipated delaying factors and their estimated impact on performance of other activities/events and completion dates; and an explanation of corrective action taken or proposed. This report is in addition to the daily reports pursuant to the provisions of Article, DAILY REPORT OF WORKERS AND MATERIALS in the GENERAL CONDITIONS.
- C. After completion of the joint review and the Contracting Officer's approval of all entries, the contractor will generate an updated computer-produced calendar-dated schedule and supply the Contracting Officer's representative with reports in accordance with the Article, COMPUTER PRODUCED SCHEDULES, specified.
- D. After completing the weekly schedule update, the contractor's scheduling consultant shall rerun all current period contract change(s) against the prior approved weekly project schedule. The analysis shall only include original workday durations and schedule logic agreed upon by the contractor and COTR for the contract change(s). When there is a disagreement on logic and/or durations, the consultant shall use the schedule logic and/or durations provided and approved by the COTR. After each rerun update, the resulting electronic project schedule data file shall be appropriately identified and submitted to the VA in accordance to the requirements listed in articles 1.4 and 1.7. This electronic submission is separate from the regular weekly project schedule update requirements and shall be submitted to the COTR within fourteen (14) calendar days of completing the regular schedule update. Before inserting the contract changes durations, care must be taken to ensure that only the original durations will be used for the analysis, not the reported durations after progress. In addition, once the final schedule is approved, the contractor must recreate all manual progress payment updates on this approved schedule and associated reruns for contract changes in each of these update periods as outlined above for regular update periods. This will require detailed record keeping for each of the manual progress payment updates.
- E. After VA acceptance and approval of the final schedule, and after each weekly update, the contractor shall submit to the Contracting Officer three blue line copies of a revised complete schedule showing all completed and partially completed activities/events, contract changes

and logic changes made on the intervening updates or at the first update on the final diagram. The Contracting Officer may elect to have the contractor do this on a less frequent basis, but it shall be done on a quarterly basis as a minimum.

- F. Following approval of the CPM schedule, the VA, the General Contractor, its approved CPM Consultant, COTR office representatives, and all subcontractors needed, as determined by the SRE, shall meet to discuss the weekly updated schedule. The main emphasis shall be to address work activities to avoid slippage of project schedule and to identify any necessary actions required to maintain project schedule during the reporting period. The Government representatives and the Contractor should conclude the meeting with a clear understanding of those work and administrative actions necessary to maintain project schedule status during the reporting period. This schedule coordination meeting will occur after each weekly project schedule update meeting utilizing the resulting schedule reports from that schedule update. If the project is behind schedule, discussions should include ways to prevent further slippage as well as ways to improve the project schedule status, when appropriate.

1.10 RESPONSIBILITY FOR COMPLETION

- A. Whenever it becomes apparent from the current weekly progress review meeting or the weekly computer-produced calendar-dated schedule that phasing or contract completion dates will not be met, the Contractor shall execute some or all of the following remedial actions:
1. Increase construction manpower in such quantities and crafts as necessary to eliminate the backlog of work.
 2. Increase the number of working hours per shift, shifts per working day, working days per week, the amount of construction equipment, or any combination of the foregoing to eliminate the backlog of work.
 3. Reschedule the work in conformance with the specification requirements.
- B. Prior to proceeding with any of the above actions, the Contractor shall notify and obtain approval from the Contracting Officer for the proposed schedule changes. If such actions are approved, the CPM revisions shall be incorporated by the Contractor into the schedule before the next update, at no additional cost to the Government.

1.11 CHANGES TO SCHEDULE

- A. Within 30 calendar days after VA acceptance and approval of any updated computer-produced schedule, the Contractor will submit a revised

schedule, the associated electronic copy, and a list of any activity/event changes including predecessors and successors for any of the following reasons:

1. Delay in completion of any activity/event or group of activities/events, indicate an extension of the project completion by 20 working days or 10 percent of the remaining project duration, whichever is less. Such delays which may be involved with contract changes, strikes, unusual weather, and other delays will not relieve the Contractor from the requirements specified unless the conditions are shown on the CPM as the direct cause for delaying the project beyond the acceptable limits.
 2. Delays in submittals, or deliveries, or work stoppage are encountered which make rescheduling of the work necessary.
 3. The schedule does not represent the actual prosecution and progress of the project.
 4. When there is, or has been, a substantial revision to the activity/event costs of the schedule regardless of the cause for these revisions.
- B. CPM revisions made under this paragraph which affect the previously approved computer-produced schedules for Government furnished equipment, vacating of areas by the VA Medical Center, contract phase(s) and sub phase(s), utilities furnished by the Government to the Contractor, or any other previously contracted item, must be furnished in writing to the Contracting Officer for approval.
- C. Contracting Officer's approval for the revised schedule and all relevant data is contingent upon compliance with all other paragraphs of this section and any other previous agreements by the Contracting Officer or the VA representative.
- D. The cost of revisions to the schedule resulting from contract changes will be included in the proposal for changes in work as specified in Article, CHANGES of the GENERAL CONDITIONS, and will be based on the complexity of the revision or contract change, man hours expended in analyzing the change, and the total cost of the change.
- E. The cost of revisions to the schedule not resulting from contract changes is the responsibility of the Contractor.
- 1.12 ADJUSTMENT OF CONTRACT COMPLETION
- A. The contract completion time will be adjusted only for causes specified in this contract. Request for an extension of the contract completion date by the Contractor shall be supported with a justification, CPM data

and supporting evidence as the Contracting Officer may deem necessary for determination as to whether or not the Contractor is entitled to an extension of time under the provisions of the contract. Submission of proof based on revised activity/event logic, durations (in work days) and costs is obligatory to any approvals. The schedule must clearly display that the Contractor has used, in full, all the float time available for the work involved in this request. The Contracting Officer's determination as to the total number of days of contract extension will be based upon the current computer-produced calendar-dated schedule for the time period in question and all other relevant information.

- B. Actual delays in activities/events which, according to the computer-produced calendar-dated schedule, do not affect the extended and predicted contract completion dates shown by the critical path in the network, will not be the basis for a change to the contract completion date. The Contracting Officer will within a reasonable time after receipt of such justification and supporting evidence, review the facts and advise the Contractor in writing of the Contracting Officer's decision.
- C. The Contractor shall submit each request for a change in the contract completion date to the Contracting Officer in accordance with the provisions specified under Article, CHANGES, in the GENERAL CONDITIONS. The Contractor shall include, as a part of each change order proposal, a sketch showing all CPM logic revisions, duration (in work days) changes, and cost changes, for work in question and its relationship to other activities on the approved schedule.
- D. All delays due to non-work activities/events such as RFI's, WEATHER, STRIKES, and similar non-work activities/events shall be analyzed on a month by month basis.

- - - E N D - - -

SECTION 01 33 23
SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES

- 1-1. For the purposes of this contract, samples, test reports, certificates, and manufacturers' literature and data shall also be subject to the previously referenced requirements. The following text refers to all items collectively as SUBMITTALS.
- 1-2. Submit for approval, all of the items specifically mentioned under the separate sections of the specification, with information sufficient to evidence full compliance with contract requirements. Materials, fabricated articles and the like to be installed in permanent work shall equal those of approved submittals. After an item has been approved, no change in brand or make will be permitted unless:
 - A. Satisfactory written evidence is presented to, and approved by Contracting Officer, that manufacturer cannot make scheduled delivery of approved item or;
 - B. Item delivered has been rejected and substitution of a suitable item is an urgent necessity or;
 - C. Other conditions become apparent which indicates approval of such substitute item to be in best interest of the Government.
- 1-3. SUBMITTAL REGISTER: The Contractor shall prepare a Submittal Register and submit all items specified in other sections of these specifications on that Submittal Register. Submit electronic file(one working spreadsheet file and one copy in PDF format) to the Contracting Officer for approval within 10 calendar days after Notice to Proceed. The Contractor shall keep this electronic file up-to-date and shall submit it to the Government (in PDF format) together with the monthly payment request. The approved Submittal Register will become the scheduling document and will be used to control submittals throughout the life of the contract. The Submittal Register and the progress schedules shall be coordinated. At a minimum the Submittal Register will include the following information for each submittal:
 1. Specification section
 2. Description of submittal
 3. Date submittal will be issued for review/approval
 4. Date submittal to be returned to contractor

- 1-4. SCHEDULING: Submittals covering component items forming a system or items that are interrelated shall be scheduled to be coordinated and submitted concurrently. Certifications to be submitted with the pertinent drawings shall be so scheduled. Adequate time (a minimum of 30 calendar days exclusive of mailing time) shall be allowed and shown on the Submittal Register for review and approval. No delay damages or time extensions will be allowed for time lost in late submittals. The Contractor shall carefully control his procurement operations to ensure that each individual submittal is made on or before the Contractor scheduled submittal date shown on the approved "Submittal Register."
- 1-5. Submittals will be reviewed for compliance with contract requirements by Architect-Engineer, and action thereon will be taken by the Contracting Officer's Technical Representative (COTR) on behalf of the Contracting Officer.
- 1-6. Upon receipt of submittals, Contractor will assign a file number thereto. In any subsequent correspondence, all parties shall refer to this file and identification number to expedite replies relative to previously approved or disapproved submittals.
- 1-7. The Government reserves the right to require additional submittals, whether or not particularly mentioned in this contract. If additional submittals beyond those required by the contract are furnished pursuant to request therefor by Contracting Officer, adjustment in contract price and time will be made in accordance with Articles titled CHANGES (FAR 52.243-4) and CHANGES - SUPPLEMENT (VAAR 852.236-88) of the GENERAL CONDITIONS.
- 1-8. Schedules called for in specifications and shown on shop drawings shall be submitted for use and information of Department of Veterans Affairs and Architect-Engineer. However, the Contractor shall assume responsibility for coordinating and verifying schedules. The Contracting Officer and Architect-Engineer assumes no responsibility for checking schedules or layout drawings for exact sizes, exact numbers and detailed positioning of items.
- 1-9. Submittals - Electronic submittals shall be required in lieu of paper copies. Electronic submittals shall be submitted to the COTR in PDF format along with an executable transmittal file. Submittals shall be printed out, marked up, processed, and returned electronically to the Contractor's Project Manager.

- A. Submit samples required by Section 09 06 00, SCHEDULE FOR FINISHES, in quadruplicate. Submit other samples in single units unless otherwise specified. Sample submittals must be submitted by Contractor only and shipped prepaid to the COTR.
- B. Submittals will receive consideration only when covered by a transmittal letter signed by Contractor. Letter shall be sent via electronic mail and shall contain the list of items, name of Medical Center, name of Contractor, contract number, applicable specification paragraph numbers, applicable drawing numbers (and other information required for exact identification of location for each item), manufacturer and brand, ASTM or Federal Specification Number (if any) and such additional information as may be required by specifications for particular item being furnished. In addition, catalogs shall be marked to indicate specific items submitted for approval.
 - 1. A copy of letter must be included with items, and any items received without identification letter will be considered "unclaimed goods" and held for a limited time only.
 - 2. Each sample, certificate, manufacturers' literature and data shall be labeled to indicate the name and location of the Medical Center, name of Contractor, manufacturer, brand, contract number and ASTM or Federal Specification Number as applicable and location(s) on project.
 - 3. Required certificates shall be signed by an authorized representative of manufacturer or supplier of material, and by Contractor.
- C. In addition to complying with all applicable requirements specified in this section, samples which are required to have Laboratory Tests (those preceded by symbol "LT" under the separate sections of the specification shall be tested, at the expense of Contractor, in a commercial laboratory approved by Contracting Officer.
 - 1. Laboratory shall furnish Contracting Officer with a certificate stating that it is fully equipped and qualified to perform intended work, is fully acquainted with specification requirements and intended use of materials and is an independent establishment in no way connected with organization of Contractor or with manufacturer or supplier of materials to be tested.
 - 2. Certificates shall also set forth a list of comparable projects upon which laboratory has performed similar functions during past five years.
 - 3. Samples and laboratory tests shall be sent directly to approved commercial testing laboratory.

4. Contractor shall send a copy of transmittal letter to both the COTR and to Architect-Engineer simultaneously with submission of material to a commercial testing laboratory.
 5. Laboratory test reports shall be sent directly to the COTR for appropriate action.
 6. Laboratory reports shall list contract specification test requirements and a comparative list of the laboratory test results. When tests show that the material meets specification requirements, the laboratory shall so certify on test report.
 7. Laboratory test reports shall also include a recommendation for approval or disapproval of tested item.
- D. If submittal samples have been disapproved, resubmit new samples as soon as possible after notification of disapproval. Such new samples shall be marked "Resubmitted Sample" in addition to containing other previously specified information required on label and in transmittal letter.
- E. Approved samples will be kept on file by the COTR at the site until completion of contract, at which time such samples will be delivered to Contractor as Contractor's property. Where noted in technical sections of specifications, approved samples in good condition may be used in their proper locations in contract work. At completion of contract, samples that are not approved will be returned to Contractor only upon request and at Contractor's expense. Such request should be made prior to completion of the contract. Disapproved samples that are not requested for return by Contractor will be discarded after completion of contract.
- F. Submittal drawings (shop, erection or setting drawings) and schedules, required for work of various trades, shall be checked before submission by technically qualified employees of Contractor for accuracy, completeness and compliance with contract requirements. These drawings and schedules shall be stamped and signed by Contractor certifying to such check.
1. Each drawing shall have marked thereon, proper descriptive title, including Medical Center location, project number, manufacturer's number, reference to contract drawing number, detail Section Number, and Specification Section Number.
 2. A space 120 mm by 125 mm (4-3/4 by 5 inches) shall be reserved on each drawing to accommodate approval or disapproval stamp.

- - - E N D - - -

SECTION 01 42 19
REFERENCE STANDARDS

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)

- A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to - GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.
- B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)

The specifications and standards cited in this solicitation can be examined at the following location:

DEPARTMENT OF VETERANS AFFAIRS
Office of Construction & Facilities Management
Facilities Quality Service (00CFM1A)
425 Eye Street N.W, (sixth floor)
Washington, DC 20001
Telephone Numbers: (202) 632-5249 or (202) 632-5178
Between 9:00 AM - 3:00 PM

1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3) (JUN 1988)

The specifications cited in this solicitation may be obtained from the associations or organizations listed below.

AA	Aluminum Association Inc. http://www.aluminum.org
AABC	Associated Air Balance Council http://www.aabchg.com
AAMA	American Architectural Manufacturer's Association http://www.aamanet.org
AAN	American Nursery and Landscape Association http://www.anla.org
AASHTO	American Association of State Highway and Transportation Officials http://www.aashto.org
AATCC	American Association of Textile Chemists and Colorists http://www.aatcc.org
ACGIH	American Conference of Governmental Industrial Hygienists http://www.acgih.org
ACI	American Concrete Institute http://www.aci-int.net
ACPA	American Concrete Pipe Association http://www.concrete-pipe.org
ACPPA	American Concrete Pressure Pipe Association http://www.acppa.org
ADC	Air Diffusion Council http://flexibleduct.org
AGA	American Gas Association http://www.aga.org
AGC	Associated General Contractors of America http://www.agc.org

AGMA	American Gear Manufacturers Association, Inc. http://www.agma.org
AHAM	Association of Home Appliance Manufacturers http://www.aham.org
AISC	American Institute of Steel Construction http://www.aisc.org
AISI	American Iron and Steel Institute http://www.steel.org
AITC	American Institute of Timber Construction http://www.aitc-glulam.org
AMCA	Air Movement and Control Association, Inc. http://www.amca.org
ANLA	American Nursery & Landscape Association http://www.anla.org
ANSI	American National Standards Institute, Inc. http://www.ansi.org
APA	The Engineered Wood Association http://www.apawood.org
ARI	Air-Conditioning and Refrigeration Institute http://www.ari.org
ASAE	American Society of Agricultural Engineers http://www.asae.org
ASCE	American Society of Civil Engineers http://www.asce.org
ASHRAE	American Society of Heating, Refrigerating, and Air-Conditioning Engineers http://www.ashrae.org
ASME	American Society of Mechanical Engineers http://www.asme.org
ASSE	American Society of Sanitary Engineering http://www.asse-plumbing.org

ASTM	American Society for Testing and Materials http://www.astm.org
AWI	Architectural Woodwork Institute http://www.awinet.org
AWS	American Welding Society http://www.aws.org
AWWA	American Water Works Association http://www.awwa.org
BHMA	Builders Hardware Manufacturers Association http://www.buildershardware.com
BIA	Brick Institute of America http://www.bia.org
CAGI	Compressed Air and Gas Institute http://www.cagi.org
CGA	Compressed Gas Association, Inc. http://www.cganet.com
CI	The Chlorine Institute, Inc. http://www.chlorineinstitute.org
CISCA	Ceilings and Interior Systems Construction Association http://www.cisca.org
CISPI	Cast Iron Soil Pipe Institute http://www.cispi.org
CLFMI	Chain Link Fence Manufacturers Institute http://www.chainlinkinfo.org
CPMB	Concrete Plant Manufacturers Bureau http://www.cpmc.org
CRA	California Redwood Association http://www.calredwood.org
CRSI	Concrete Reinforcing Steel Institute http://www.crsi.org

CTI	Cooling Technology Institute http://www.cti.org
DHI	Door and Hardware Institute http://www.dhi.org
EGSA	Electrical Generating Systems Association http://www.egsa.org
EEI	Edison Electric Institute http://www.eei.org
EPA	Environmental Protection Agency http://www.epa.gov
ETL	ETL Testing Laboratories, Inc. http://www.etl.com
FAA	Federal Aviation Administration http://www.faa.gov
FCC	Federal Communications Commission http://www.fcc.gov
FPS	The Forest Products Society http://www.forestprod.org
GANA	Glass Association of North America http://www.cssinfo.com/info/gana.html/
FM	Factory Mutual Insurance http://www.fmglobal.com
GA	Gypsum Association http://www.gypsum.org
GSA	General Services Administration http://www.gsa.gov
HI	Hydraulic Institute http://www.pumps.org
HPVA	Hardwood Plywood & Veneer Association http://www.hpva.org

ICBO	International Conference of Building Officials http://www.icbo.org
ICEA	Insulated Cable Engineers Association Inc. http://www.icea.net
\ICAC	Institute of Clean Air Companies http://www.icac.com
IEEE	Institute of Electrical and Electronics Engineers http://www.ieee.org/
IMSA	International Municipal Signal Association http://www.imsasafety.org
IPCEA	Insulated Power Cable Engineers Association
NBMA	Metal Buildings Manufacturers Association http://www.mbma.com
MSS	Manufacturers Standardization Society of the Valve and Fittings Industry Inc. http://www.mss-hq.com
NAAMM	National Association of Architectural Metal Manufacturers http://www.naamm.org
NAPHCC	Plumbing-Heating-Cooling Contractors Association http://www.phccweb.org.org
NBS	National Bureau of Standards See - NIST
NBBPVI	National Board of Boiler and Pressure Vessel Inspectors http://www.nationboard.org
NEC	National Electric Code See - NFPA National Fire Protection Association
NEMA	National Electrical Manufacturers Association http://www.nema.org
NFPA	National Fire Protection Association http://www.nfpa.org

NHLA National Hardwood Lumber Association
<http://www.natlhardwood.org>

NIH National Institute of Health
<http://www.nih.gov>

NIST National Institute of Standards and Technology
<http://www.nist.gov>

NLMA Northeastern Lumber Manufacturers Association, Inc.
<http://www.nelma.org>

NPA National Particleboard Association
18928 Premiere Court
Gaithersburg, MD 20879
(301) 670-0604

NSF National Sanitation Foundation
<http://www.nsf.org>

NWWDA Window and Door Manufacturers Association
<http://www.nwwda.org>

OSHA Occupational Safety and Health Administration
Department of Labor
<http://www.osha.gov>

PCA Portland Cement Association
<http://www.portcement.org>

PCI Precast Prestressed Concrete Institute
<http://www.pci.org>

PPI The Plastic Pipe Institute
<http://www.plasticpipe.org>

PEI Porcelain Enamel Institute, Inc.
<http://www.porcelainenamel.com>

PTI Post-Tensioning Institute
<http://www.post-tensioning.org>

RFICI The Resilient Floor Covering Institute
<http://www.rfci.com>

RIS Redwood Inspection Service
See - CRA

RMA Rubber Manufacturers Association, Inc.
<http://www.rma.org>

SCMA Southern Cypress Manufacturers Association
<http://www.cypressinfo.org>

SDI Steel Door Institute
<http://www.steeldoor.org>

IGMA Insulating Glass Manufacturers Alliance
<http://www.igmaonline.org>

SJI Steel Joist Institute
<http://www.steeljoist.org>

SMACNA Sheet Metal and Air-Conditioning Contractors
National Association, Inc.
<http://www.smacna.org>

SSPC The Society for Protective Coatings
<http://www.sspc.org>

STI Steel Tank Institute
<http://www.steeltank.com>

SWI Steel Window Institute
<http://www.steelwindows.com>

TCA Tile Council of America, Inc.
<http://www.tileusa.com>

TEMA Tubular Exchange Manufacturers Association
<http://www.tema.org>

TPI Truss Plate Institute, Inc.
583 D'Onofrio Drive; Suite 200
Madison, WI 53719
(608) 833-5900

UBC The Uniform Building Code
See ICBO

UL Underwriters' Laboratories Incorporated
<http://www.ul.com>

ULC Underwriters' Laboratories of Canada
<http://www.ulc.ca>

WCLIB West Coast Lumber Inspection Bureau
6980 SW Varns Road, P.O. Box 23145
Portland, OR 97223
(503) 639-0651

WRCLA Western Red Cedar Lumber Association
P.O. Box 120786
New Brighton, MN 55112
(612) 633-4334

WWPA Western Wood Products Association
<http://www.wwpa.org>

- - - E N D - - -

SECTION 01 45 29
TESTING LABORATORY SERVICES

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies materials testing activities and inspection services required during project construction to be provided by a Testing Laboratory retained and paid for by Contractor.

1.2 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by the basic designation only.
- B. American Association of State Highway and Transportation Officials (AASHTO):
- T27-06Sieve Analysis of Fine and Coarse Aggregates
 - T96-02 (R2006)Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
 - T99-01 (R2004)The Moisture-Density Relations of Soils Using a 2.5 Kg (5.5 lb.) Rammer and a 305 mm (12 in.) Drop
 - T104-99 (R2003)Soundness of Aggregate by Use of Sodium Sulfate or Magnesium Sulfate
 - T180-01 (R2004)Moisture-Density Relations of Soils using a 4.54 kg (10 lb.) Rammer and a 457 mm (18 in.) Drop
 - T191-02(R2006)Density of Soil In-Place by the Sand-Cone Method
- C. American Concrete Institute (ACI):
- 506.4R-94 (R2004)Guide for the Evaluation of Shotcrete
- D. American Society for Testing and Materials (ASTM):
- A325-06Structural Bolts, Steel, Heat Treated, 120/105 ksi Minimum Tensile Strength
 - A370-07Definitions for Mechanical Testing of Steel Products
 - A416/A416M-06Steel Strand, Uncoated Seven-Wire for Prestressed Concrete
 - A490-06Heat Treated Steel Structural Bolts, 150 ksi Minimum Tensile Strength
 - C31/C31M-06Making and Curing Concrete Test Specimens in the Field
 - C33-03Concrete Aggregates

C39/C39M-05Compressive Strength of Cylindrical Concrete
Specimens

C109/C109M-05Compressive Strength of Hydraulic Cement Mortars

C138-07Unit Weight, Yield, and Air Content
(Gravimetric) of Concrete

C140-07Sampling and Testing Concrete Masonry Units and
Related Units

C143/C143M-05Slump of Hydraulic Cement Concrete

C172-07Sampling Freshly Mixed Concrete

C173-07Air Content of freshly Mixed Concrete by the
Volumetric Method

C330-05Lightweight Aggregates for Structural Concrete

C567-05Density Structural Lightweight Concrete

C780-07Pre-construction and Construction Evaluation of
Mortars for Plain and Reinforced Unit Masonry

C1019-08Sampling and Testing Grout

C1064/C1064M-05Freshly Mixed Portland Cement Concrete

C1077-06Laboratories Testing Concrete and Concrete
Aggregates for Use in Construction and Criteria
for Laboratory Evaluation

C1314-07Compressive Strength of Masonry Prisms

D698-07Laboratory Compaction Characteristics of Soil
Using Standard Effort

D1143-07Piles Under Static Axial Compressive Load

D1188-07Bulk Specific Gravity and Density of Compacted
Bituminous Mixtures Using Paraffin-Coated
Specimens

D1556-07Density and Unit Weight of Soil in Place by the
Sand-Cone Method

D1557-07Laboratory Compaction Characteristics of Soil
Using Modified Effort

D2166-06Unconfined Compressive Strength of Cohesive Soil

D2167-94(R2001)Density and Unit Weight of Soil in Place by the
Rubber Balloon Method

D2216-05Laboratory Determination of Water (Moisture)
Content of Soil and Rock by Mass

D2922-05Density of soil and Soil-Aggregate in Place by
Nuclear Methods (Shallow Depth)

D2974-07Moisture, Ash, and Organic Matter of Peat and
Other Organic Soils

D3666-(2002)Minimum Requirements for Agencies Testing and
Inspection Bituminous Paving Materials
D3740-07Minimum Requirements for Agencies Engaged in the
Testing and Inspecting Road and Paving Material
E94-04Radiographic Testing
E164-03Ultrasonic Contact Examination of Weldments
E329-07Agencies Engaged in Construction Inspection
and/or Testing
E543-06Agencies Performing Non-Destructive Testing
E605-93(R2006)Thickness and Density of Sprayed Fire-Resistive
Material (SFRM) Applied to Structural Members
E709-(2001)Guide for Magnetic Particle Examination
E1155-96(R2008)Determining FF Floor Flatness and FL Floor
Levelness Numbers

E. American Welding Society (AWS):

D1.1-07Structural Welding Code-Steel

1.3 REQUIREMENTS:

- A. Accreditation Requirements: Construction materials testing laboratories must be accredited by a laboratory accreditation authority and will be required to submit a copy of the Certificate of Accreditation and Scope of Accreditation. The laboratory's scope of accreditation must include the appropriate ASTM standards (i.e.; E 329, C 1077, D 3666, D3740, A 880, E 543) listed in the technical sections of the specifications. Laboratories engaged in Hazardous Materials Testing shall meet the requirements of OSHA and EPA. The policy applies to the specific laboratory performing the actual testing, not just the "Corporate Office."
- B. Inspection and Testing: Testing laboratory shall inspect materials and workmanship and perform tests described herein and additional tests requested by Contracting Officer's Technical Representative (COTR). When it appears materials furnished, or work performed by Contractor fail to meet construction contract requirements, Testing Laboratory shall direct attention of COTR to such failure.
- C. Written Reports: Testing laboratory shall submit test reports to COTR, Contractor, unless other arrangements are agreed to in writing by the COTR. Submit reports of tests that fail to meet construction contract requirements on colored paper.
- D. Verbal Reports: Give verbal notification to COTR immediately of any irregularity.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 EARTHWORK:

- A. General: The Testing Laboratory shall provide qualified personnel, materials, equipment, and transportation as required to perform the services identified/required herein, within the agreed to schedule and/or time frame. The work to be performed shall be as identified herein and shall include but not be limited to the following:
1. Observe fill and subgrades during proof-rolling to evaluate suitability of surface material to receive fill or base course. Provide recommendations to the Resident Engineer regarding suitability or unsuitability of areas where proof-rolling was observed. Where unsuitable results are observed, witness excavation of unsuitable material and recommend to Resident Engineer extent of removal and replacement of unsuitable materials and observe proof-rolling of replaced areas until satisfactory results are obtained.
 2. Provide part time observation of fill placement and compaction and field density testing in building areas and provide part time observation of fill placement and compaction and field density testing in pavement areas to verify that earthwork compaction obtained is in accordance with contract documents.
 3. Provide supervised geotechnical technician to inspect excavation, subsurface preparation, and backfill for structural fill.
- B. Testing Compaction:
1. Determine maximum density and optimum moisture content for each type of fill, backfill and subgrade material used, in compliance with AASHTO T99/T180.
 2. Make field density tests in accordance with the primary testing method following AASHTO T238 wherever possible. Field density tests utilizing AASHTO T191 or AASHTO T205 shall be utilized on a case by case basis only if there are problems with the validity of the results from the primary method due to specific site field conditions. Should the testing laboratory propose these alternative methods, they should provide satisfactory explanation to the COTR before the tests are conducted.
 - a. Building Slab Subgrade: At least one test of subgrade for every 185 m² (2000 square feet) of building slab, but in no case fewer than three tests. In each compacted fill layer, perform one test

for every 185 m² (2000 square feet) of overlaying building slab, but in no case fewer than three tests.

- b. Foundation Wall Backfill: One test per 30 m (100 feet) of each layer of compacted fill but in no case fewer than two tests.
 - c. Pavement Subgrade: One test for each 335 m² (400 square yards), but in no case fewer than two tests.
 - d. Curb, Gutter, and Sidewalk: One test for each 90 m (300 feet), but in no case fewer than two tests.
 - e. Trenches: One test at maximum 30 m (100 foot) intervals per 1200 mm (4 foot) of vertical lift and at changes in required density, but in no case fewer than two tests.
 - f. Footing Subgrade: At least one test for each layer of soil on which footings will be placed. Subsequent verification and approval of each footing subgrade may be based on a visual comparison of each subgrade with related tested subgrade when acceptable to Resident Engineer. In each compacted fill layer below wall footings, perform one field density test for every 30 m (100 feet) of wall. Verify subgrade is level, all loose or disturbed soils have been removed, and correlate actual soil conditions observed with those indicated by test borings.
- C. Testing for Footing Bearing Capacity: Evaluate if suitable bearing capacity material is encountered in footing subgrade.
- D. Testing Materials: Test suitability of on-site and off-site borrow as directed by COTR.

3.2 FOUNDATION CAISSONS:

- A. Concrete Testing: Test concrete including materials for concrete as required in Article, CONCRETE of this section, except make two test cylinders for each day's placement of concrete.
- B. Maintain a record of concrete used in each caisson. Compare records with calculated volumes.
- C. Inspect percussion hole in bottom of each caisson to determine that material is capable of supporting design load.
- D. Inspect sides and bottom of each caisson for compliance with contract documents.
- E. Submit a certified "Caisson Field Record" for each caisson, recording actual elevation at bottom of shaft; final center line location of top; variation of shaft from plumb; results of all tests performed; actual allowable bearing capacity of bottom; depth of socket into rock; levelness of bottom; seepage of water; still water level (if allowed to

flood); variation of shaft (from dimensions shown); location and size of reinforcement, and evidence of seams, voids, or channels below the bottom. Verify the actual bearing capacity of the rock strata by the use of a calibrated penetrometer or other acceptable method.

F. Caissons Bearing on Hardpan: Take undisturbed samples, suitable for tests required, from caisson bottom. Make auger probe to a depth of 2.5 meters (8 feet) below bottom and visually inspect and classify soil. Verify continuity of strata and thickness.

1. Conduct the following test on each sample, and report results and evaluations to the COTR:
 - a. Unconfined Compression Test (ASTM D2166).
 - b. Moisture Content (ASTM D2216).
 - c. Density.

3.3 LANDSCAPING:

- A. Test topsoil for organic materials, pH, phosphate, potash content, and gradation of particles.
 1. Test for organic material by using ASTM D2974.
 2. Determine percent of silt, sand, clay, and foreign materials such as rock, roots, and vegetation.
- B. Submit laboratory test report of topsoil to COTR.
- C. Stockpiled Topsoil - From isolated locations, gather two (2) random samples for each 100 cubic yards of stockpiled topsoil and submit test data for each sample.

3.4 SITE WORK CONCRETE:

- A. Test site work concrete including materials for concrete as required in Article CONCRETE of this section.

3.5 CONCRETE:

- A. Batch Plant Inspection and Materials Testing:
 1. Perform continuous batch plant inspection until concrete quality is established to satisfaction of COTR with concurrence of Contracting Officer and perform periodic inspections thereafter as determined by COTR.
 2. Periodically inspect and test batch proportioning equipment for accuracy and report deficiencies to COTR.
 3. Sample and test mix ingredients as necessary to insure compliance with specifications.
 4. Sample and test aggregates daily and as necessary for moisture content. Test the dry rodded weight of the coarse aggregate whenever

a sieve analysis is made, and when it appears there has been a change in the aggregate.

5. Certify, in duplicate, ingredients and proportions and amounts of ingredients in concrete conform to approved trial mixes. When concrete is batched or mixed off immediate building site, certify (by signing, initialing or stamping thereon) on delivery slips (duplicate) that ingredients in truck-load mixes conform to proportions of aggregate weight, cement factor, and water-cement ratio of approved trial mixes.

B. Field Inspection and Materials Testing:

1. Provide a technician at site of placement at all times to perform concrete sampling and testing.
2. Review the delivery tickets of the ready-mix concrete trucks arriving on-site. Notify the Contractor if the concrete cannot be placed within the specified time limits or if the type of concrete delivered is incorrect. Reject any loads that do not comply with the Specification requirements. Rejected loads are to be removed from the site at the Contractor's expense. Any rejected concrete that is placed will be subject to removal.
3. Take concrete samples at point of placement in accordance with ASTM C172. Mold and cure compression test cylinders in accordance with ASTM C31. Make at least three cylinders for each 40 m³ (50 cubic yards) or less of each concrete type, and at least three cylinders for any one day's pour for each concrete type. Label each cylinder with an identification number. COTR may require additional cylinders to be molded and cured under job conditions.
4. Perform slump tests in accordance with ASTM C143. Test the first truck each day, and every time test cylinders are made. Test pumped concrete at the hopper and at the discharge end of the hose at the beginning of each day's pumping operations to determine change in slump.
5. Determine the air content of concrete per ASTM C173. For concrete required to be air-entrained, test the first truck and every 20 m³ (25 cubic yards) thereafter each day. For concrete not required to be air-entrained, test every 80 m³ (100 cubic yards) at random. For pumped concrete, initially test concrete at both the hopper and the discharge end of the hose to determine change in air content.
6. If slump or air content fall outside specified limits, make another test immediately from another portion of same batch.

7. Perform unit weight tests in compliance with ASTM C138 for normal weight concrete and ASTM C567 for lightweight concrete. Test the first truck and each time cylinders are made.
8. Notify laboratory technician at batch plant of mix irregularities and request materials and proportioning check.
9. Verify that specified mixing has been accomplished.
10. Environmental Conditions: Determine the temperature per ASTM C1064 for each truckload of concrete during hot weather and cold weather concreting operations:
 - a. When ambient air temperature falls below 4.4 degrees C (40 degrees F), record maximum and minimum air temperatures in each 24 hour period; record air temperature inside protective enclosure; record minimum temperature of surface of hardened concrete.
 - b. When ambient air temperature rises above 29.4 degrees C (85 degrees F), record maximum and minimum air temperature in each 24 hour period; record minimum relative humidity; record maximum wind velocity; record maximum temperature of surface of hardened concrete.
11. Inspect the reinforcing steel placement, including bar size, bar spacing, top and bottom concrete cover, proper tie into the chairs, and grade of steel prior to concrete placement. Submit detailed report of observations.
12. Observe conveying, placement, and consolidation of concrete for conformance to specifications.
13. Observe condition of formed surfaces upon removal of formwork prior to repair of surface defects and observe repair of surface defects.
14. Observe curing procedures for conformance with specifications, record dates of concrete placement, start of preliminary curing, start of final curing, end of curing period.
15. Observe preparations for placement of concrete:
 - a. Inspect handling, conveying, and placing equipment, inspect vibrating and compaction equipment.
 - b. Inspect preparation of construction, expansion, and isolation joints.
16. Observe preparations for protection from hot weather, cold weather, sun, and rain, and preparations for curing.
17. Observe concrete mixing:
 - a. Monitor and record amount of water added at project site.
 - b. Observe minimum and maximum mixing times.
18. Measure concrete flatwork for levelness and flatness as follows:

- a. Perform Floor Tolerance Measurements F_F and F_L in accordance with ASTM E1155. Calculate the actual overall F- numbers using the inferior/superior area method.
 - b. Perform all floor tolerance measurements within 48 hours after slab installation and prior to removal of shoring and formwork.
 - c. Provide the Contractor and the COTR with the results of all profile tests, including a running tabulation of the overall F_F and F_L values for all slabs installed to date, within 72 hours after each slab installation.
19. Other inspections:
- a. Grouting under base plates.
 - b. Grouting anchor bolts and reinforcing steel in hardened concrete.
- C. Laboratory Tests of Field Samples:
1. Test compression test cylinders for strength in accordance with ASTM C39. For each test series, test one cylinder at 7 days and one cylinder at 28 days. Use remaining cylinder as a spare tested as directed by COTR. Compile laboratory test reports as follows:
Compressive strength test shall be result of one cylinder, except when one cylinder shows evidence of improper sampling, molding or testing, in which case it shall be discarded and strength of spare cylinder shall be used.
 2. Make weight tests of hardened lightweight structural concrete in accordance with ASTM C567.
 3. Furnish certified compression test reports (duplicate) to COTR. In test report, indicate the following information:
 - a. Cylinder identification number and date cast.
 - b. Specific location at which test samples were taken.
 - c. Type of concrete, slump, and percent air.
 - d. Compressive strength of concrete in MPa (psi).
 - e. Weight of lightweight structural concrete in kg/m^3 (pounds per cubic feet).
 - f. Weather conditions during placing.
 - g. Temperature of concrete in each test cylinder when test cylinder was molded.
 - h. Maximum and minimum ambient temperature during placing.
 - i. Ambient temperature when concrete sample in test cylinder was taken.
 - j. Date delivered to laboratory and date tested.

3.6 REINFORCEMENT:

- A. Review mill test reports furnished by Contractor.

3.7 MASONRY:

A. Mortar Tests:

1. Laboratory compressive strength test:
 - a. Comply with ASTM C780.
 - b. Obtain samples during or immediately after discharge from batch mixer.
 - c. Furnish molds with 50 mm (2 inch), 3 compartment gang cube.
 - d. Test one sample at 7 days and 2 samples at 28 days.
2. Two tests during first week of operation; one test per week after initial test until masonry completion.

B. Grout Tests:

1. Laboratory compressive strength test:
 - a. Comply with ASTM C1019.
 - b. Test one sample at 7 days and 2 samples at 28 days.
 - c. Perform test for each 230 m² (2500 square feet) of masonry.

C. Masonry Unit Tests:

1. Laboratory Compressive Strength Test:
 - a. Comply with ASTM C140.
 - b. Test 3 samples for each 460 m² (5000 square feet) of wall area.

- D. Prism Tests: For each type of wall construction indicated, test masonry prisms per ASTM C1314 for each 460 m² (5000 square feet) of wall area. Prepare one set of prisms for testing at 7 days and one set for testing at 28 days.

3.8 STRUCTURAL STEEL:

- A. General: Provide shop and field inspection and testing services to certify structural steel work is done in accordance with contract documents. Welding shall conform to AWS D1.1 Structural Welding Code.

B. Prefabrication Inspection:

1. Review design and shop detail drawings for size, length, type and location of all welds to be made.
2. Approve welding procedure qualifications either by pre-qualification or by witnessing qualifications tests.
3. Approve welder qualifications by certification or retesting.
4. Approve procedure for control of distortion and shrinkage stresses.
5. Approve procedures for welding in accordance with applicable sections of AWS D1.1.

C. Fabrication and Erection:

1. Weld Inspection:

- a. Inspect welding equipment for capacity, maintenance and working condition.
- b. Verify specified electrodes and handling and storage of electrodes in accordance with AWS D1.1.
- c. Inspect preparation and assembly of materials to be welded for conformance with AWS D1.1.
- d. Inspect preheating and interpass temperatures for conformance with AWS D1.1.
- e. Measure 25 percent of fillet welds.
- f. Welding Magnetic Particle Testing: Test in accordance with ASTM E709 for a minimum of:
 - 1) 20 percent of all shear plate fillet welds at random, final pass only.
 - 2) 20 percent of all continuity plate and bracing gusset plate fillet welds, at random, final pass only.
 - 3) 100 percent of tension member fillet welds (i.e., hanger connection plates and other similar connections) for root and final passes.
 - 4) 20 percent of length of built-up column member partial penetration and fillet welds at random for root and final passes.
 - 5) 100 percent of length of built-up girder member partial penetration and fillet welds for root and final passes.
- g. Welding Ultrasonic Testing: Test in accordance with ASTM E164 and AWS D1.1 for 100 percent of all full penetration welds, braced and moment frame column splices, and a minimum of 20 percent of all other partial penetration column splices, at random.
- h. Verify that correction of rejected welds are made in accordance with AWS D1.1.
- i. Testing and inspection do not relieve the Contractor of the responsibility for providing materials and fabrication procedures in compliance with the specified requirements.

2. Bolt Inspection:

- a. Inspect high-strength bolted connections in accordance AISC Specifications for Structural Joints Using ASTM A325 or A490 Bolts.
- b. Slip-Critical Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in each connection in accordance with AISC Specifications for Structural Joints Using

ASTM A325 or A490 Bolts. Inspect all bolts in connection when one or more are rejected.

- c. Fully Pre-tensioned Connections: Inspect 10 percent of bolts, but not less than 2 bolts, selected at random in 25 percent of connections in accordance with AISC Specification for Structural Joints Using ASTM A325 or A490 Bolts. Inspect all bolts in connection when one or more are rejected.
 - d. Bolts installed by turn-of-nut tightening may be inspected with calibrated wrench when visual inspection was not performed during tightening.
 - e. Snug Tight Connections: Inspect 10 percent of connections verifying that plies of connected elements have been brought into snug contact.
 - f. Inspect field erected assemblies; verify locations of structural steel for plumbness, level, and alignment.
- D. Submit inspection reports, record of welders and their certification, and identification, and instances of noncompliance to COTR.

3.9 STEEL DECKING:

- A. Provide field inspection of welds of metal deck to the supporting steel, and testing services to insure steel decking has been installed in accordance with contract documents and manufacturer's requirements.
- B. Qualification of Field Welding: Qualify welding processes and welding operators in accordance with "Welder Qualification" procedures of AWS D1.1. Refer to the "Plug Weld Qualification Procedure" in Part 3 "Field Quality Control."
- C. Submit inspection reports, certification, and instances of noncompliance to COTR.

3.10 SPRAYED-ON FIREPROOFING:

- A. Provide field inspection and testing services to certify sprayed-on fireproofing has been applied in accordance with contract documents.
- B. Obtain a copy of approved submittals from COTR.
- C. Use approved installation in test areas as criteria for inspection of work.
- D. Test sprayed-on fireproofing for thickness and density in accordance with ASTM E605.
 - 1. Thickness gauge specified in ASTM E605 may be modified for pole extension so that overhead sprayed material can be reached from floor.
- E. Location of test areas for field tests as follows:

1. Thickness: Select one bay per floor, or one bay for each 930 m² (10,000 square feet) of floor area, whichever provides for greater number of tests. Take thickness determinations from each of following locations: Metal deck, beam, and column.
 2. Density: Take density determinations from each floor, or one test from each 930 m² (10,000 square feet) of floor area, whichever provides for greater number of tests, from each of the following areas: Underside of metal deck, beam flanges, and beam web.
- F. Submit inspection reports, certification, and instances of noncompliance to COTR.

- - - E N D - - -

SECTION 01 57 19
TEMPORARY ENVIRONMENTAL CONTROLS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the control of environmental pollution and damage that the Contractor must consider for air, water, and land resources. It includes management of visual aesthetics, noise, solid waste, radiant energy, and radioactive materials, as well as other pollutants and resources encountered or generated by the Contractor. The Contractor is obligated to consider specified control measures with the costs included within the various contract items of work.
- B. Environmental pollution and damage is defined as the presence of chemical, physical, or biological elements or agents which:
1. Adversely effect human health or welfare,
 2. Unfavorably alter ecological balances of importance to human life,
 3. Effect other species of importance to humankind, or;
 4. Degrade the utility of the environment for aesthetic, cultural, and historical purposes.
- C. Definitions of Pollutants:
1. Chemical Waste: Petroleum products, bituminous materials, salts, acids, alkalis, herbicides, pesticides, organic chemicals, and inorganic wastes.
 2. Debris: Combustible and noncombustible wastes, such as leaves, tree trimmings, ashes, and waste materials resulting from construction or maintenance and repair work.
 3. Sediment: Soil and other debris that has been eroded and transported by runoff water.
 4. Solid Waste: Rubbish, debris, garbage, and other discarded solid materials resulting from industrial, commercial, and agricultural operations and from community activities.
 5. Surface Discharge: The term "Surface Discharge" implies that the water is discharged with possible sheeting action and subsequent soil erosion may occur. Waters that are surface discharged may terminate in drainage ditches, storm sewers, creeks, and/or "water of the United States" and would require a permit to discharge water from the governing agency.
 6. Rubbish: Combustible and noncombustible wastes such as paper, boxes, glass and crockery, metal and lumber scrap, tin cans, and bones.

7. Sanitary Wastes:

- a. Sewage: Domestic sanitary sewage and human and animal waste.
- b. Garbage: Refuse and scraps resulting from preparation, cooking, dispensing, and consumption of food.

1.2 QUALITY CONTROL

- A. Establish and maintain quality control for the environmental protection of all items set forth herein.
- B. Record on daily reports any problems in complying with laws, regulations, and ordinances. Note any corrective action taken.

1.3 REFERENCES

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.
- B. U.S. National Archives and Records Administration (NARA):
33 CFR 328Definitions

1.4 SUBMITTALS

- A. In accordance with Section, 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:
 - 1. Environmental Protection Plan: After the contract is awarded and prior to the commencement of the work, the Contractor shall meet with the Contracting Officer's Technical Representative (COTR) to discuss the proposed Environmental Protection Plan and to develop mutual understanding relative to details of environmental protection. Not more than 20 days after the meeting, the Contractor shall prepare and submit to the COTR for approval, a written and/or graphic Environmental Protection Plan including, but not limited to, the following:
 - a. Name(s) of person(s) within the Contractor's organization who is (are) responsible for ensuring adherence to the Environmental Protection Plan.
 - b. Name(s) and qualifications of person(s) responsible for manifesting hazardous waste to be removed from the site.
 - c. Name(s) and qualifications of person(s) responsible for training the Contractor's environmental protection personnel.
 - d. Description of the Contractor's environmental protection personnel training program.
 - e. A list of Federal, State, and local laws, regulations, and permits concerning environmental protection, pollution control, noise control and abatement that are applicable to the Contractor's

proposed operations and the requirements imposed by those laws, regulations, and permits.

- f. Methods for protection of features to be preserved within authorized work areas including trees, shrubs, vines, grasses, ground cover, landscape features, air and water quality, fish and wildlife, soil, historical, and archeological and cultural resources.
 - g. Procedures to provide the environmental protection that comply with the applicable laws and regulations. Describe the procedures to correct pollution of the environment due to accident, natural causes, or failure to follow the procedures as described in the Environmental Protection Plan.
 - h. Permits, licenses, and the location of the solid waste disposal area.
 - i. Drawings showing locations of any proposed temporary excavations or embankments for haul roads, material storage areas, structures, sanitary facilities, and stockpiles of excess or spoil materials. Include as part of an Erosion Control Plan approved by the District Office of the U.S. Soil Conservation Service and the Department of Veterans Affairs.
 - j. Environmental Monitoring Plans for the job site including land, water, air, and noise.
 - k. Work Area Plan showing the proposed activity in each portion of the area and identifying the areas of limited use or nonuse. Plan should include measures for marking the limits of use areas. This plan may be incorporated within the Erosion Control Plan.
- B. Approval of the Contractor's Environmental Protection Plan will not relieve the Contractor of responsibility for adequate and continued control of pollutants and other environmental protection measures.

1.5 PROTECTION OF ENVIRONMENTAL RESOURCES

- A. Protect environmental resources within the project boundaries and those affected outside the limits of permanent work during the entire period of this contract. Confine activities to areas defined by the specifications and drawings.
- B. Protection of Land Resources: Prior to construction, identify all land resources to be preserved within the work area. Do not remove, cut, deface, injure, or destroy land resources including trees, shrubs, vines, grasses, top soil, and land forms without permission from the COTR. Do not fasten or attach ropes, cables, or guys to trees for

anchorage unless specifically authorized, or where special emergency use is permitted.

1. Work Area Limits: Prior to any construction, mark the areas that require work to be performed under this contract. Mark or fence isolated areas within the general work area that are to be saved and protected. Protect monuments, works of art, and markers before construction operations begin. Convey to all personnel the purpose of marking and protecting all necessary objects.
2. Protection of Landscape: Protect trees, shrubs, vines, grasses, land forms, and other landscape features shown on the drawings to be preserved by marking, fencing, or using any other approved techniques.
 - a. Box and protect from damage existing trees and shrubs to remain on the construction site.
 - b. Immediately repair all damage to existing trees and shrubs by trimming, cleaning, and painting with antiseptic tree paint.
 - c. Do not store building materials or perform construction activities closer to existing trees or shrubs than the farthest extension of their limbs.
3. Reduction of Exposure of Unprotected Erodible Soils: Plan and conduct earthwork to minimize the duration of exposure of unprotected soils. Clear areas in reasonably sized increments only as needed to use. Form earthwork to final grade as shown. Immediately protect side slopes and back slopes upon completion of rough grading.
4. Temporary Protection of Disturbed Areas: Construct diversion ditches, benches, and berms to retard and divert runoff from the construction site to protected drainage areas approved under paragraph 208 of the Clean Water Act.
5. Erosion and Sedimentation Control Devices: The erosion and sediment controls selected and maintained by the Contractor shall be such that water quality standards are not violated as a result of the Contractor's activities. Construct or install all temporary and permanent erosion and sedimentation control features on the Environmental Protection Plan. Maintain temporary erosion and sediment control measures such as berms, dikes, drains, sedimentation basins, grassing, and mulching, until permanent drainage and erosion control facilities are completed and operative.
6. Manage borrow areas on Government property to minimize erosion and to prevent sediment from entering nearby water courses or lakes.

7. Manage and control spoil areas on Government property to limit spoil to areas on the Environmental Protection Plan and prevent erosion of soil or sediment from entering nearby water courses or lakes.
 8. Protect adjacent areas from despoilment by temporary excavations and embankments.
 9. Handle and dispose of solid wastes in such a manner that will prevent contamination of the environment. Place solid wastes (excluding clearing debris) in containers that are emptied on a regular schedule. Transport all solid waste off Government property and dispose of waste in compliance with Federal, State, and local requirements.
 10. Store chemical waste away from the work areas in corrosion resistant containers and dispose of waste in accordance with Federal, State, and local regulations.
 11. Handle discarded materials other than those included in the solid waste category as directed by the COTR.
- C. Protection of Water Resources: Keep construction activities under surveillance, management, and control to avoid pollution of surface and ground waters and sewer systems. Implement management techniques to control water pollution by the listed construction activities that are included in this contract.
1. Washing and Curing Water: Do not allow wastewater directly derived from construction activities to enter water areas. Collect and place wastewater in retention ponds allowing the suspended material to settle, the pollutants to separate, or the water to evaporate.
- D. Protection of Air Resources: Keep construction activities under surveillance, management, and control to minimize pollution of air resources. Burning is not permitted on the job site. Keep activities, equipment, processes, and work operated or performed, in strict accordance with the State of Ohio, Ohio EPA Division of Air Pollution Control, and Federal emission and performance laws and standards. Maintain ambient air quality standards set by the Environmental Protection Agency, for those construction operations and activities specified.
1. Particulates: Control dust particles, aerosols, and gaseous by-products from all construction activities, processing, and preparation of materials (such as from asphaltic batch plants) at all times, including weekends, holidays, and hours when work is not in progress.

2. Particulates Control: Maintain all excavations, stockpiles, haul roads, permanent and temporary access roads, plant sites, spoil areas, borrow areas, and all other work areas within or outside the project boundaries free from particulates which would cause a hazard or a nuisance. Sprinklering, chemical treatment of an approved type, light bituminous treatment, baghouse, scrubbers, electrostatic precipitators, or other methods are permitted to control particulates in the work area.
 3. Hydrocarbons and Carbon Monoxide: Control monoxide emissions from equipment to Federal and State allowable limits.
 4. Odors: Control odors of construction activities and prevent obnoxious odors from occurring.
- E. Reduction of Noise: Minimize noise using every action possible. Perform noise-producing work in less sensitive hours of the day or week as directed by the COTR. Maintain noise-produced work at or below the decibel levels and within the time periods specified.
1. Perform construction activities involving repetitive, high-level impact noise only between 8:00 a.m. and 6:00 p.m. unless otherwise permitted by local ordinance or the COTR. Repetitive impact noise on the property shall not exceed the following dB limitations:

Time Duration of Impact Noise	Sound Level in dB
More than 12 minutes in any hour	70
Less than 30 seconds of any hour	85
Less than three minutes of any hour	80
Less than 12 minutes of any hour	75

2. Provide sound-deadening devices on equipment and take noise abatement measures that are necessary to comply with the requirements of this contract, consisting of, but not limited to, the following:
 - a. Maintain maximum permissible construction equipment noise levels at 15 m (50 feet) (dBA):

EARTHMOVING		MATERIALS HANDLING	
FRONT LOADERS	75	CONCRETE MIXERS	75
BACKHOES	75	CONCRETE PUMPS	75
DOZERS	75	CRANES	75
TRACTORS	75	DERRICKS IMPACT	75
SCAPERS	80	PILE DRIVERS	95
GRADERS	75	JACK HAMMERS	75
TRUCKS	75	ROCK DRILLS	80

PAVERS, STATIONARY	80	PNEUMATIC TOOLS	80
PUMPS	75	BLASTING	75
GENERATORS	75	SAWS	75
COMPRESSORS	75	VIBRATORS	75

- b. Use shields or other physical barriers to restrict noise transmission.
 - c. Provide soundproof housings or enclosures for noise-producing machinery.
 - d. Use efficient silencers on equipment air intakes.
 - e. Use efficient intake and exhaust mufflers on internal combustion engines that are maintained so equipment performs below noise levels specified.
 - f. Line hoppers and storage bins with sound deadening material.
 - g. Conduct truck loading, unloading, and hauling operations so that noise is kept to a minimum.
3. Measure sound level for noise exposure due to the construction at least once every five successive working days while work is being performed above 55 dB(A) noise level. Measure noise exposure at the property line or 15 m (50 feet) from the noise source, whichever is greater. Measure the sound levels on the A weighing network of a General Purpose sound level meter at slow response. To minimize the effect of reflective sound waves at buildings, take measurements at 900 to 1800 mm (three to six feet) in front of any building face. Submit the recorded information to the COTR noting any problems and the alternatives for mitigating actions.
- F. Restoration of Damaged Property: If any direct or indirect damage is done to public or private property resulting from any act, omission, neglect, or misconduct, the Contractor shall restore the damaged property to a condition equal to that existing before the damage at no additional cost to the Government. Repair, rebuild, or restore property as directed or make good such damage in an acceptable manner.
- G. Final Clean-up: On completion of project and after removal of all debris, rubbish, and temporary construction, Contractor shall leave the construction area in a clean condition satisfactory to the COTR. Cleaning shall include off the station disposal of all items and materials not required to be salvaged, as well as all debris and rubbish resulting from demolition and new work operations.

- - - E N D - - -

SECTION 01 58 16
TEMPORARY INTERIOR SIGNAGE

PART 1 GENERAL

1.1 DESCRIPTION

- A. This section specifies temporary interior signs.

PART 2 PRODUCTS

2.1 TEMPORARY SIGNS

- A. Fabricate from 50 Kg (110 pound) mat finish white paper.
- B. Cut to 100 mm (4-inch) wide by 300 mm (12 inch) long size tag.
- C. Punch 3 mm (1/8-inch) diameter hole centered on 100 mm (4-inch) dimension of tag. Edge of Hole spaced approximately 13 mm (1/2-inch) from one end on tag.
- D. Reinforce hole on both sides with gummed cloth washer or other suitable material capable of preventing tie pulling through paper edge.
- E. Ties: Steel wire 0.3 mm (0.0120-inch) thick, attach to tag with twist tie, leaving 150 mm (6-inch) long free ends.

PART 3 EXECUTION

3.1 INSTALLATION

- A. Install temporary signs attached to room door frame or room door knob, lever, or pull for doors on corridor openings.
- B. Mark on signs with felt tip marker having approximately 3 mm (1/8-inch) wide stroke for clearly legible numbers or letters.
- C. Identify room with numbers as designated on floor plans.

3.2 LOCATION

- A. Install on doors that have room, corridor, and space numbers shown.
- B. Doors that do not require signs are as follows:
1. Corridor barrier doors (cross-corridor) in corridor with same number.
 2. Folding doors or partitions.
 3. Toilet or bathroom doors within and between rooms.
 4. Communicating doors in partitions between rooms with corridor entrance doors.
 5. Closet doors within rooms.
- C. Replace missing, damaged, or illegible signs.

- - - E N D - - -

SECTION 01 74 19
CONSTRUCTION WASTE MANAGEMENT

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.
- B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.
- C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:
 - 1. Waste Management Plan development and implementation.
 - 2. Techniques to minimize waste generation.
 - 3. Sorting and separating of waste materials.
 - 4. Salvage of existing materials and items for reuse or resale.
 - 5. Recycling of materials that cannot be reused or sold.
- D. At a minimum the following waste categories shall be diverted from landfills:
 - 1. Soil.
 - 2. Inerts (eg, concrete, masonry and asphalt).
 - 3. Clean dimensional wood and palette wood.
 - 4. Green waste (biodegradable landscaping materials).
 - 5. Engineered wood products (plywood, particle board and I-joists, etc).
 - 6. Metal products (eg, steel, wire, beverage containers, copper, etc).
 - 7. Cardboard, paper and packaging.
 - 8. Bitumen roofing materials.
 - 9. Plastics (eg, ABS, PVC).
 - 10. Carpet and/or pad.
 - 11. Gypsum board.
 - 12. Insulation.
 - 13. Paint.
 - 14. Fluorescent lamps.

1.2 RELATED WORK

- A. Section 02 41 00, DEMOLITION.
- B. Section 01 00 00, GENERAL REQUIREMENTS.

1.3 QUALITY ASSURANCE

- A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction /Demolition waste includes products of the following:
1. Excess or unusable construction materials.
 2. Packaging used for construction products.
 3. Poor planning and/or layout.
 4. Construction error.
 5. Over ordering.
 6. Weather damage.
 7. Contamination.
 8. Mishandling.
 9. Breakage.
- B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.
- C. Contractor shall develop and implement procedures to reuse and recycle new materials to a minimum of 50 percent.
- D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.
- E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations. The Whole Building Design Guide website <http://www.cwm.wbdg.org> provides a Construction Waste Management Database that contains information on companies that haul, collect, and process recyclable debris from construction projects.
- F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.

- G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.
- H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

1.4 TERMINOLOGY

- A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.
- B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.
- C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.
- D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.
- E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).
- F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.
- G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.
- H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.
- I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.
- J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.
- K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.

- L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.
 - 1. On-site Recycling - Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
 - 2. Off-site Recycling - Materials hauled to a location and used in an altered form in the manufacture of new products.
- M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facilities permit or be regulated by the local enforcement agency.
- N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.
- O. Return: To give back reusable items or unused products to vendors for credit.
- P. Salvage: To remove waste materials from the site for resale or re-use by a third party.
- Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.
- R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.
- S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

1.5 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:
- B. Prepare and submit to the Contracting Officer's Technical Representative (COTR) a written demolition debris management plan. The plan shall include, but not be limited to, the following information:
 - 1. Procedures to be used for debris management.
 - 2. Techniques to be used to minimize waste generation.
 - 3. Analysis of the estimated job site waste to be generated:

- a. List of each material and quantity to be salvaged, reused, recycled.
 - b. List of each material and quantity proposed to be taken to a landfill.
 - 4. Detailed description of the Means/Methods to be used for material handling.
 - a. On site: Material separation, storage, protection where applicable.
 - b. Off site: Transportation means and destination. Include list of materials.
 - 1) Description of materials to be site-separated and self-hauled to designated facilities.
 - 2) Description of mixed materials to be collected by designated waste haulers and removed from the site.
 - c. The names and locations of mixed debris reuse and recycling facilities or sites.
 - d. The names and locations of trash disposal landfill facilities or sites.
 - e. Documentation that the facilities or sites are approved to receive the materials.
 - C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.
 - D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.
- 1.6 APPLICABLE PUBLICATIONS
- A Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.
 - B. U.S. Green Building Council (USGBC):
LEED Green Building Rating System for New Construction
- 1.7 RECORDS
- Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration. Records shall be kept in accordance with the LEED Reference Guide and LEED Template.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. List of each material and quantity to be salvaged, recycled, reused.
- B. List of each material and quantity proposed to be taken to a landfill.
- C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

PART 3 - EXECUTION

3.1 COLLECTION

- A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.
- B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.
- C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

3.2 DISPOSAL

- A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.
- B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

3.3 REPORT

- A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.
- B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.
- C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices. Include the net total costs for each disposal.

541-12-110

LOUIS STOKES VAMC CLEVELAND

- - - E N D - - -

SECTION 02 41 00
DEMOLITION

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies demolition and removal of buildings, portions of buildings, utilities, other structures and debris from trash dumps shown.

1.2 RELATED WORK:

- A. Demolition and removal of roads, walks, curbs, and on-grade slabs outside buildings to be demolished: Section 31 20 00, EARTH MOVING.
- B. Safety Requirements: GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
- C. Disconnecting utility services prior to demolition: Section 01 00 00, GENERAL REQUIREMENTS.
- D. Reserved items that are to remain the property of the Government: Section 01 00 00, GENERAL REQUIREMENTS.
- E. Environmental Protection: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- F. Construction Waste Management: Section 017419 CONSTRUCTION WASTE MANAGEMENT.
- G. Infectious Control: Section 01 00 00, GENERAL REQUIREMENTS, Article 1.7, INFECTION PREVENTION MEASURES.

1.3 PROTECTION:

- A. Perform demolition in such manner as to eliminate hazards to persons and property; to minimize interference with use of adjacent areas, utilities and structures or interruption of use of such utilities; and to provide free passage to and from such adjacent areas of structures. Comply with requirements of GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
- B. Provide safeguards, including warning signs, barricades, temporary fences, warning lights, and other similar items that are required for protection of all personnel during demolition and removal operations.
- C. Maintain fences, barricades, lights, and other similar items around exposed excavations until such excavations have been completely filled.
- D. Provide enclosed dust chutes with control gates from each floor to carry debris to truck beds and govern flow of material into truck. Provide overhead bridges of tight board or prefabricated metal construction at dust chutes to protect persons and property from falling debris.
- E. Prevent spread of flying particles and dust. Sprinkle rubbish and debris with water to keep dust to a minimum. Do not use water if it results in

hazardous or objectionable condition such as, but not limited to; ice, flooding, or pollution. Vacuum and dust the work area daily.

F. In addition to previously listed fire and safety rules to be observed in performance of work, include following:

1. No wall or part of wall shall be permitted to fall outwardly from structures.
2. Wherever a cutting torch or other equipment that might cause a fire is used, provide and maintain fire extinguishers nearby ready for immediate use. Instruct all possible users in use of fire extinguishers.
3. Keep hydrants clear and accessible at all times. Prohibit debris from accumulating within a radius of 4500 mm (15 feet) of fire hydrants.

G. Before beginning any demolition work, the Contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the Medical Center; any damaged items shall be repaired or replaced as approved by the Contracting Officer's Technical Representative (COTR). The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required. The Contractor shall ensure that structural elements are not overloaded and shall be responsible for increasing structural supports or adding new supports as may be required as a result of any cutting, removal, or demolition work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for existing construction weakened by demolition or removal works. Repairs, reinforcement, or structural replacement must have COTR's approval.

H. The work shall comply with the requirements of Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

I. The work shall comply with the requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article 1.7 INFECTION PREVENTION MEASURES.

1.4 UTILITY SERVICES:

- A. Demolish and remove outside utility service lines shown to be removed.
- B. Remove abandoned outside utility lines that would interfere with installation of new utility lines and new construction.

PART 2 - PRODUCTS (NOT USED)

PART 3 - EXECUTION

3.1 DEMOLITION:

- A. Completely demolish and remove buildings and structures, including all appurtenances related or connected thereto, as noted below:
 - 1. As required for installation of new utility service lines.
 - 2. To full depth within an area defined by hypothetical lines located 1500 mm (5 feet) outside building lines of new structures.
- B. Debris, including brick, concrete, stone, metals and similar materials shall become property of Contractor and shall be disposed of by him daily, off the Medical Center to avoid accumulation at the demolition site. Materials that cannot be removed daily shall be stored in areas specified by the COTR. Break up concrete slabs below grade that do not require removal from present location into pieces not exceeding 600 mm (24 inches) square to permit drainage. Contractor shall dispose debris in compliance with applicable federal, state or local permits, rules and/or regulations.
- C. Remove and legally dispose of all materials, other than earth to remain as part of project work, from any trash dumps shown. Materials removed shall become property of contractor and shall be disposed of in compliance with applicable federal, state or local permits, rules and/or regulations. All materials in the indicated trash dump areas, including above surrounding grade and extending to a depth of 1500mm (5feet) below surrounding grade, shall be included as part of the lump sum compensation for the work of this section. Materials that are located beneath the surface of the surrounding ground more than 1500 mm (5 feet), or materials that are discovered to be hazardous, shall be handled as unforeseen.
- D. Remove existing utilities as indicated or uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the Resident Engineer. When Utility lines are encountered that are not indicated on the drawings, the COTR shall be notified prior to further work in that area.

3.2 CLEAN-UP:

- A. On completion of work of this section and after removal of all debris, leave site in clean condition satisfactory to Resident Engineer. Clean-up shall include off the Medical Center disposal of all items and materials not required to remain property of the Government as well as all debris and rubbish resulting from demolition operations.

541-12-110

LOUIS STOKES VAMC CLEVELAND

- - - E N D - - -

DEMOLITION
02 41 00 - 4

SECTION 03 30 00
CAST-IN-PLACE CONCRETE

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies cast-in-place structural concrete and materials and mixes for other concrete.

1.2 RELATED WORK:

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Concrete roads, walks, and similar exterior site work: Section 32 05 23, CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS.
- C. Section 316326, DRILLED CAISSONS

1.3 TESTING AGENCY FOR CONCRETE MIX DESIGN:

- A. Testing agency retained and reimbursed by the Contractor and approved by Contracting Officer's Technical Representative (COTR).
- B. Testing agency maintaining active participation in Program of Cement and Concrete Reference Laboratory (CCRL) of National Institute of Standards and Technology.
- C. Testing agency shall furnish equipment and qualified technicians to establish proportions of ingredients for concrete mixes.

1.4 TOLERANCES:

- A. Formwork: ACI 117, except the elevation tolerance of formed surfaces before removal of shores is +0 mm (+0 inch) and -20 mm (-3/4 inch).
- B. Reinforcement Fabricating and Placing: ACI 117, except that fabrication tolerance for bar sizes Nos. 10, 13, and 16 (Nos. 3, 4, and 5) (Tolerance Symbol 1 in Fig. 2.1(a), ACI, 117) used as column ties or stirrups is +0 mm (+0 inch) and -13 mm (-1/2 inch) where gross bar length is less than 3600 mm (12 feet), or +0 mm (+0 inch) and -20 mm (-3/4 inch) where gross bar length is 3600 mm (12 feet) or more.
- C. Cross-Sectional Dimension: ACI 117, except tolerance for thickness of slabs 12 inches or less is +20 mm (+3/4 inch) and - 6 mm (-1/4 inch). Tolerance of thickness of beams more than 300 mm (12 inch) but less than 900 mm (3 feet) is +20 mm (+3/4 inch) and -10 mm (-3/8 inch).
- D. Slab Finishes: ACI 117, Section 4.5.6, F-number method in accordance with ASTM E1155, except as follows:
 - 1. Test entire slab surface, including those areas within 600 mm (2 feet) of construction joints and vertical elements that project through slab surface.

2. Maximum elevation change which may occur within 600 mm (2 feet) of any column or wall element is 6 mm (0.25 inches).
3. Allow sample measurement lines that are perpendicular to construction joints to extend past joint into previous placement no further than 1500 mm (5 feet).

1.5 REGULATORY REQUIREMENTS:

- A. ACI SP-66 - ACI Detailing Manual.
- B. ACI 318 - Building Code Requirements for Reinforced Concrete.
- C. ACI 301 - Standard Specifications for Structural Concrete.

1.6 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Shop Drawings: Reinforcing steel: Complete shop drawings
- C. Manufacturer's Certificates:
 1. Air-entraining admixture.
 2. Chemical admixtures, including chloride ion content.
 3. Liquid membrane-forming compounds for curing concrete.
 4. Non-shrinking grout.
- D. Testing Agency for Concrete Mix Design: Approval request including qualifications of principals and technicians and evidence of active participation in program of Cement and Concrete Reference Laboratory (CCRL) of National Institute of Standards and Technology.
- E. Test Report for Concrete Mix Designs: Trial mixes including water-cement/fly ash ratio curves, concrete mix ingredients, and admixtures.

1.7 DELIVERY, STORAGE, AND HANDLING:

- A. Conform to ACI 304. Store aggregate separately for each kind or grade, to prevent segregation of sizes and avoid inclusion of dirt and other materials.
- B. Deliver cement in original sealed containers bearing name of brand and manufacturer, and marked with net weight of contents. Store in suitable watertight building in which floor is raised at least 300 mm (1 foot) above ground. Store bulk cement and fly ash in separate suitable bins.
- C. Deliver other packaged materials for use in concrete in original sealed containers, plainly marked with manufacturer's name and brand, and protect from damage until used.

1.8 PRE-CONCRETE CONFERENCE:

- A. General: At least 15 days prior to submittal of design mixes, conduct a meeting to review proposed methods of concrete construction to achieve the required results.

- B. Agenda: Includes but is not limited to:
 - 1. Submittals.
 - 2. Coordination of work.
 - 3. Availability of material.
 - 4. Concrete mix design including admixtures.
 - 5. Methods of placing, finishing, and curing.
 - 6. Finish criteria required to obtain required flatness and levelness.
 - 7. Timing of floor finish measurements.
 - 8. Material inspection and testing.
- C. Attendees: Include but not limited to representatives of Contractor; subcontractors involved in supplying, conveying, placing, finishing, and curing concrete; COTR; Consulting Engineer; Department of Veterans Affairs retained testing laboratories for concrete testing and finish (F-number) verification.
- D. Minutes of the meeting: Contractor shall take minutes and type and distribute the minutes to attendees within five days of the meeting.

1.9 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Concrete Institute (ACI):
 - 117-10.....Tolerances for Concrete Construction and
Materials
 - 211.1-91 (R2004).....Selecting Proportions for Normal, Heavyweight,
and Mass Concrete
 - 214R-02.....Evaluation of Strength Test Results of Concrete
 - 301-10.....Structural Concrete
 - 304R-00 (R2009).....Guide for Measuring, Mixing, Transporting, and
Placing Concrete
 - 305R-10.....Hot Weather Concreting
 - 306R-10.....Cold Weather Concreting
 - 308R-01 (R2008).....Standard Practice for Curing Concrete
 - 309R-05.....Guide for Consolidation of Concrete
 - 318-08.....Building Code Requirements for Reinforced
Concrete and Commentary
 - 347-04.....Guide to Formwork for Concrete
 - SP-66-04.....ACI Detailing Manual
- C. American National Standards Institute and American Hardboard Association (ANSI/AHA):
 - A135.4-2004.....Basic Hardboard

D. American Society for Testing and Materials (ASTM):

A82/A82M-07.....Steel Wire, Plain, for Concrete Reinforcement
A185/185M-07.....Steel Welded Wire Fabric, Plain, for Concrete
Reinforcement
A615/A615M-09.....Deformed and Plain Billet-Steel Bars for
Concrete Reinforcement
C31/C31M-08.....Making and Curing Concrete Test Specimens in the
field
C33-07.....Concrete Aggregates
C39/C39M-09.....Compressive Strength of Cylindrical Concrete
Specimens
C94/C94M-09.....Ready-Mixed Concrete
C143/C143M-10.....Slump of Hydraulic Cement Concrete
C150-09.....Portland Cement
C171-07.....Sheet Materials for Curing Concrete
C172-08.....Sampling Freshly Mixed Concrete
C173-10.....Air Content of Freshly Mixed Concrete by the
Volumetric Method
C192/C192M-07.....Making and Curing Concrete Test Specimens in the
Laboratory
C231-09.....Air Content of Freshly Mixed Concrete by the
Pressure Method
C260-06.....Air-Entraining Admixtures for Concrete
C309-07.....Liquid Membrane-Forming Compounds for Curing
Concrete
C494/C494M-10.....Chemical Admixtures for Concrete
C618-08.....Coal Fly Ash and Raw or Calcined Natural
Pozzolan for Use as a Mineral Admixture in
Concrete
C666/C666M-03.....Resistance of Concrete to Rapid Freezing and
Thawing
D1751-04 (R2008).....Preformed Expansion Joint Filler for Concrete
Paving and Structural Construction (Non-
extruding and Resilient Bituminous Types)
E1155-96 (R2008).....Determining F_F Floor Flatness and F_L Floor
Levelness Numbers

E. American Welding Society (AWS):

D1.4/D1.4M-11.....Structural Welding Code - Reinforcing Steel

F. Concrete Reinforcing Steel Institute (CRSI):

Handbook 2008

G. U. S. Department of Commerce Product Standard (PS):

PS 1.....Construction and Industrial Plywood

PS 20.....American Softwood Lumber

H. U. S. Army Corps of Engineers Handbook for Concrete and Cement:

CRD C572.....Polyvinyl Chloride Waterstops

PART 2 - PRODUCTS:

2.1 FORMS:

- A. Wood: PS 20 free from loose knots and suitable to facilitate finishing concrete surface specified; tongue and grooved.
- B. Plywood: PS-1 Exterior Grade B-B (concrete-form) 16 mm (5/8 inch), or 20 mm (3/4 inch) thick for unlined contact form. B-B High Density Concrete Form Overlay optional.
- C. Form Ties: Develop a minimum working strength of 13.35 kN (3000 pounds) when fully assembled. Ties shall be adjustable in length to permit tightening of forms and not have any lugs, cones, washers to act as spreader within form, nor leave a hole larger than 20 mm (3/4 inch) diameter, or a depression in exposed concrete surface, or leave metal closer than 40 mm (1 1/2 inches) to concrete surface. Wire ties not permitted. Cutting ties back from concrete face not permitted.

2.2 MATERIALS:

- A. Portland Cement: ASTM C150 Type I or II.
- B. Fly Ash: ASTM C618, Class C or F including supplementary optional requirements relating to reactive aggregates and alkalies, and loss on ignition (LOI) not to exceed 5 percent.
- C. Coarse Aggregate: ASTM C33.
 - 1. Size 67 or Size 467 may be used for footings and walls over 300 mm (12 inches) thick.
 - 2. Maximum size of coarse aggregates not more than one-fifth of narrowest dimension between sides of forms, one-third of depth of slabs, nor three-fourth of minimum clear spacing between reinforcing bars.
- D. Fine Aggregate: ASTM C33. Fine aggregate for applied concrete floor topping shall pass a 4.75 mm (No. 4) sieve, 10 percent maximum shall pass a 150 μ m (No. 100) sieve.
- E. Mixing Water: Fresh, clean, and potable.
- F. Admixtures:
 - 1. Water Reducing Admixture: ASTM C494, Type A and not contain more chloride ions than are present in municipal drinking water.

2. Water Reducing, Retarding Admixture: ASTM C494, Type D and not contain more chloride ions than are present in municipal drinking water.
3. High-Range Water-Reducing Admixture (Superplasticizer): ASTM C494, Type F or G, and not contain more chloride ions than are present in municipal drinking water.
4. Non-Corrosive, Non-Chloride Accelerator: ASTM C494, Type C or E, and not contain more chloride ions than are present in municipal drinking water. Admixture manufacturer must have long-term non-corrosive test data from an independent testing laboratory of at least one year duration using an acceptable accelerated corrosion test method such as that using electrical potential measures.
5. Air Entraining Admixture: ASTM C260.
6. Prohibited Admixtures: Calcium chloride, thiocyanate or admixtures containing more than 0.05 percent chloride ions are not permitted.
7. Certification: Written conformance to the requirements above and the chloride ion content of the admixture prior to mix design review.
8. Admixtures for Color Concrete: Shall be colored, water-reducing, set-controlling admixture for vertical architectural concrete. System shall provide permanent integral color conditioning. Admixture must be pre-measured and packaged into disintegrating bags for accurate addition into concrete mix and certified to meet ASTM C494, AASHTO M194 and ASTM C979.
 - a. Chromix' Admixture for Color Conditioned Concrete as manufactured by L.M. Scofield Company, 4155 Scofield Road, Douglasville GA 30134, telephone (800)800-9900 or (770)920-6000, fax (770)920-6060, website www.scofield.com. Or approved equal.
- G. Vapor Barrier: ASTM E1745, Class A, 0.25 mm (10 mil).
- H. Reinforcing Steel: ASTM A615, or ASTM A996, deformed, grade as shown.
- I. Welded Wire Fabric: ASTM A185.
- J. Cold Drawn Steel Wire: ASTM A82.
- K. Supports, Spacers, and Chairs: Types which will hold reinforcement in position shown in accordance with requirements of ACI 318 except as specified.
- L. Sheet Materials for Curing Concrete: ASTM C171.
- M. Liquid Membrane-forming Compounds for Curing Concrete: ASTM C309, Type I, with fugitive dye. Compound shall be compatible with scheduled surface treatment, such as paint and resilient tile, and shall not discolor concrete surface.
- N. Non-Shrink Grout:

1. ASTM C1107, pre-mixed, produce a compressive strength of at least 18 MPa at three days and 35 MPa (5000 psi) at 28 days. Furnish test data from an independent laboratory indicating that the grout when placed at a fluid consistency shall achieve 95 percent bearing under a 1200 mm x 1200 mm (4 foot by 4 foot) base plate.
 2. Where high fluidity or increased placing time is required, furnish test data from an independent laboratory indicating that the grout when placed at a fluid consistency shall achieve 95 percent under an 450 mm x 900 mm (18 inch by 36 inch) base plate.
- O. Adhesive Binder: ASTM C881.
1. Polyvinyl Chloride Waterstop: CRD C572.
 2. Porous Backfill: Crushed stone or gravel graded from 25 mm to 20 mm (1 inch to 3/4 inch).
 3. Epoxy Joint Filler: Two component, 100 percent solids compound, with a minimum shore D hardness of 50.
 4. Bonding Admixture: Non-rewettable, polymer modified, bonding compound.
- P. Expansion and Isolation Joint-filler Strips: ASTM D1751, asphalt-saturated cellulosic fiber.
- Q. Anti-Graffiti Coating: Urethane resin permanent coating, non-yellowing. System shall provide a non-glossy protective coating on all site concrete retaining walls that shall allow removal of spray paint, lipstick, marker, nail polish or multiple component paint products by power washing, solvent cleaning or readily available graffiti removal agents. System shall be a non-sacrificial coating that shall not discolor during removal of graffiti.
1. Submit to COTR test results from an independent laboratory showing that the coating shows no evidence of cracking or adhesive loss after 100 freeze-thaw cycles and the product's effectiveness in graffiti removal with use of cleaning procedures and products recommended by manufacturer. Products shall also be tested for accelerated weathering to indicate no evidence of cracking, checking or adhesion loss after 5000 hours of exposure in a Twin Arc Weathermeter. Testing shall be per Federal Specification GDT71.

2.3 CONCRETE MIXES:

- A. Mix Designs: Proportioned in accordance with Section 5.3, "Proportioning on the Basis of Field Experience and/or Trial Mixtures" of ACI 318.
1. If trial mixes are used, make a set of at least 6 cylinders in accordance with ASTM C192 for test purposes from each trial mix; test three for compressive strength at 7 days and three at 28 days.

2. Submit a report of results of each test series, include a detailed listing of the proportions of trial mix or mixes, including cement, fly ash, admixtures, weight of fine and coarse aggregate per m³ (cubic yard) measured dry rodded and damp loose, specific gravity, fineness modulus, percentage of moisture, air content, water-cement plus fly ash ratio, and consistency of each cylinder in terms of slump.
 3. Prepare a curve showing relationship between water-cement plus fly ash ratio at 7-day and 28-day compressive strengths. Plot each curve using at least three specimens.
 4. If the field experience method is used, submit complete standard deviation analysis.
- B. After approval of mixes no substitution in material or change in proportions of approval mixes may be made without additional tests and approval of COTR or as specified. Making and testing of preliminary test cylinders may be carried on pending approval of cement and fly ash, providing Contractor and manufacturer certify that ingredients used in making test cylinders are the same. COTR may allow Contractor to proceed with depositing concrete for certain portions of work, pending final approval of cement and fly ash and approval of design mix.
- C. Cement Factor: Maintain minimum cement factors in Table I regardless of compressive strength developed above minimums. Fly ash may be substituted for up to 20 percent of the minimum cement factor at option of Contractor, except fly ash may not be used in concrete designated as architectural concrete.

TABLE I - CEMENT AND WATER FACTORS FOR CONCRETE

Concrete Strength		Non-Air-Entrained	Air-Entrained	
Min. 28 Day Comp. Str. MPa (psi)	Min. Cement kg/m ³ (lbs/c. yd)	Max. Water Cement Ratio	Min. Cement kg/m ³ (lbs/c. yd)	Max. Water Cement Ratio
30 (4000) ^{1,3}	325 (550)	0.55	340 (570)	0.50
25 (3000) ^{1,3}	280 (470)	0.65	290 (490)	0.55

1. If trial mixes are used, the proposed mix design shall achieve a compressive strength 8.3 MPa (1200 psi) in excess of f'c

* Determined by Laboratory in accordance with ACI 211.1 for normal concrete.

- D. Maximum Slump: Maximum slump, as determined by ASTM C143 with tolerances as established by ASTM C94, for concrete to be vibrated shall be as shown in Table II.

TABLE II - MAXIMUM SLUMP, MM (INCHES) *

Type of Construction	Normal Weight Concrete	
Reinforced Footings and Substructure Walls	75mm (3 inches)	
Slabs, Reinforced Walls,	100 mm (4 inches)	

- * Slump may be increased by the use of the approved high-range water-reducing admixture (superplasticizer). Tolerances as established by ASTM C94. Concrete containing the high-range-water-reducing admixture may have a maximum slump of 225 mm (9 inches). The concrete shall arrive at the job site at a slump of 50 mm to 75 mm (2 inches to 3 inches. This should be verified, and then the high-range-water-reducing admixture added to increase the slump to the approved level.
- E. Air-Entrainment: Air-entrainment of normal weight concrete shall conform with Table III. Determine air content by either ASTM C173 or ASTM C231.

**TABLE III - TOTAL AIR CONTENT
FOR VARIOUS SIZES OF COARSE AGGREGATES (NORMAL CONCRETE)**

Nominal Maximum Size of Total Air Content	Coarse Aggregate, mm (Inches) Percentage by Volume
10 mm (3/8 in).6 to 10	13 mm (1/2 in).5 to 9
20 mm (3/4 in).4 to 8	25 mm (1 in).3-1/2 to 6-1/2
40 mm (1 1/2 in).3 to 6	

- F. High early strength concrete, made with Type III cement or Type I cement plus non-corrosive accelerator, shall have a 7-day compressive strength equal to specified minimum 28-day compressive strength for concrete type specified made with standard Portland cement.
- G. Concrete slabs placed at air temperatures below 10 degrees C (50 degrees Fahrenheit) use non-corrosive, non-chloride accelerator. Concrete required to be air entrained use approved air entraining admixture. Pumped concrete, use high-range water-reducing admixture (superplasticizer).

- H. Durability: Use air entrainment for exterior exposed concrete subjected to freezing and thawing and other concrete shown or specified. Air content as shown in Table III or Table IV.
- I. Enforcing Strength Requirements: Test as specified in Section 01 45 29, TESTING LABORATORY SERVICES, during the progress of the work. Seven-day tests may be used as indicators of 28-day strength. Average of any three 28-day consecutive strength tests of laboratory-cured specimens representing each type of concrete shall be equal to or greater than specified strength. No single test shall be more than 3.5 MPa (500 psi) below specified strength. Interpret field test results in accordance with ACI 214. Should strengths shown by test specimens fall below required values, COTR may require any one or any combination of the following corrective actions, at no additional cost to the Government:
1. Require changes in mix proportions by selecting one of the other appropriate trial mixes or changing proportions, including cement content, of approved trial mix.
 2. Require additional curing and protection.
 3. If five consecutive tests fall below 95 percent of minimum values given in Table I or if test results are so low as to raise a question as to the safety of the structure, COTR may direct Contractor to take cores from portions of the structure. Use results from cores tested by the Contractor retained testing agency to analyze structure.
 4. If strength of core drilled specimens falls below 85 percent of minimum value given in Table I, COTR may order load tests, made by Contractor retained testing agency, on portions of building so affected. Load tests in accordance with ACI 318 and criteria of acceptability of concrete under test as given therein.
 5. Concrete work, judged inadequate by structural analysis, by results of load test, or for any reason, shall be reinforced with additional construction or replaced, if directed by the COTR.
- J. Concrete Mixtures for Site Elements
1. Site Retaining Walls: proportion normal weight concrete.
 - a. Minimum Compressive Strength: 4500 psi at 28 days.
 - b. Slump Limit: 4 inch (+/- 1 inch) (except where utilizing Super Plasticizers and as approved by Resident Engineer).
 - c. Air Content: 6%+/-1%.
 - d. Water requirement reduction of 7 - 8 percent.
 - e. Minimum six sacks of cement per cubic yard of concrete.

- f. No calcium chloride, additional water reducing admixtures, water proofing agents, or cement substitutes, such as fly ash or slag, shall be allowed in mix.
- g. Admixture for color concrete - Scofield 'Chromix' - color as determined.

2.4 BATCHING AND MIXING:

- A. General: Concrete shall be "Ready-Mixed" and comply with ACI 318 and ASTM C94, except as specified. Batch mixing at the site is permitted. Mixing process and equipment must be approved by COTR. With each batch of concrete, furnish certified delivery tickets listing information in Paragraph 16.1 and 16.2 of ASTM C94. Maximum delivery temperature of concrete is 38°C (100 degrees Fahrenheit). Minimum delivery temperature as follows:

Atmospheric Temperature	Minimum Concrete Temperature
-1. degrees to 4.4 degrees C (30 degrees to 40 degrees F)	15.6 degrees C (60 degrees F.)
-17 degrees C to -1.1 degrees C (0 degrees to 30 degrees F.)	21 degrees C (70 degrees F.)

- B. The concrete mix should be controlled to provide good batch-to-batch uniformity. Ready-mix trucks should be in good condition. The cement should be weighed accurately. The same brand of cement, source of sand, and water/cement ratio should be maintained for each load of concrete of the same color. A method is available for wet-checking the approximate color of each load before placing. Manufacturer should be consulted for details.
- C. Before batching, the drum must be thoroughly clean and wet. The quantity of colored concrete mixed should not be less than one-third of the capacity of the mixing drum (a minimum of three cubic yards in a nine cubic yard load) and should always be in full cubic yard (cubic meter) increments. Approximately 40 gallons (150 L) of the mix water, and preferably, a portion of the aggregates should be batched into the mixer drum. Then one unopened Tossin bag of the specified CHROMIX Admixture, correctly packaged for the mix design, should be added for each cubic yard (meter) of concrete. The remaining ingredients should be added, and the load mixed at the specified mixing speed for a minimum of 130 revolutions, before discharging. CHROMIX Admixtures should never be added to an empty drum or at the tail end of a load.
- D. When pumping, the pump should be capable of depositing a low-slump concrete mix containing one-inch rock and must be primed with an

identically colored slurry mix. The SCOFIELD Tossin bag should not be added to the slurry mix but opened, and the color-conditioning admixture batched directly into the mix.

- E. When depositing, the concrete should be deposited near its final position to avoid segregation due to re-handling or flowing. If held-back water is added at the job site, the concrete should be mixed at mixing speed for a minimum of 30 revolutions after addition of the water and before depositing. The slump of the concrete should be consistent throughout the project at four inches (100 mm) or less, and in no event should exceed five inches (125 mm) for any load. No water should be added after a portion of the load has been discharged. Measuring and adjusting the air content of the load is recommended immediately prior to placement. Concrete that has started to set must not be re-tempered, but should be discarded.

2.5 EXECUTION - INSTALLATION

- A. Framework for architectural concrete must be of the highest quality to obtain smooth, straight, non-yielding surfaces. Unless a form liner has been specified, a resin, high-density overlay or an epoxy or urethane-coated plywood should be used. Alternatively, all plywood plugs (boats) must be filled and the forms coated with a material that is sufficiently heavy to prevent unwanted grain transfer, such as a polyurethane.
- B. For color uniformity, procedures and materials used in preparing the forms must not be varied during the job. All forms should be cleaned thoroughly prior to use or reuse. Release agents must be non-staining.
- C. All plastic snap-tie cones should be of the non-leaking type. After cleaning, joints in the forms should be sealed with a two-inch wide vinyl or polyester tape. Alternatively, the joints may be sealed with a silicone sealant applied to the edges during assembly.
- D. To prevent staining of the finished concrete surface, form ties should leave no metal closer to the surface of the concrete than 1-1/2 inches. The location of tie holes is normally selected so as not to detract from the overall appearance of the structure, since it is virtually impossible to conceal them completely.
- E. All walls should be cast to their full height between engineered vertical joints.
- F. All concrete should be placed carefully so that surface grinding can be avoided and a minimum of patching will be required. When possible, both external and internal vibrators should be used. Over-vibration should be avoided, and internal vibrators must not be used to move the concrete.

- G. To produce more uniform color, all forms should be stripped when the concrete is the same age. All vertical surfaces should be sandblasted sufficiently to remove minor form marks and any colored residue resulting from water, cement, and coloring agents migrating (bleeding) toward the forms during concrete placement, vibration, and compaction.
- H. To protect the finished surfaces from dirt and moisture penetration, a high-quality, clear anti-graffiti coating should be applied after the walls have been textured, patched and allowed to cure for a minimum of 28 days.

PART 3 - EXECUTION

3.1 FORMWORK:

- A. General: Design in accordance with ACI 347 is the responsibility of the Contractor. The Contractor shall retain a registered Professional Engineer to design the formwork, shores, and reshores.
 - 1. Form boards and plywood forms may be reused for contact surfaces of exposed concrete only if thoroughly cleaned, patched, and repaired and COTR approves their reuse.
 - 2. Provide forms for concrete footings unless COTR determines forms are not necessary.
- B. Treating and Wetting: Treat or wet contact forms as follows:
 - 1. Coat plywood and board forms with non-staining form sealer. In hot weather, cool forms by wetting with cool water just before concrete is placed.
 - 2. Clean and coat removable metal forms with light form oil before reinforcement is placed. In hot weather, cool metal forms by thoroughly wetting with water just before placing concrete.
 - 3. Use sealer on reused plywood forms as specified for new material.
- C. Size and Spacing of Studs: Size and space studs, wales and other framing members for wall forms so as not to exceed safe working stress of kind of lumber used nor to develop deflection greater than $1/270$ of free span of member.
- D. Unlined Forms: Use plywood forms to obtain a smooth finish for concrete surfaces. Tightly butt edges of sheets to prevent leakage. Back up all vertical joints solidly and nail edges of adjacent sheets to same stud with 6d box nails spaced not over 150 mm (6 inches) apart.
- E. Lined Forms: May be used in lieu of unlined plywood forms. Back up form lining solidly with square edge board lumber securely nailed to studs with all edges in close contact to prevent bulging of lining. No joints in lining and backing may coincide. Nail abutted edges of sheets to same backing board. Nail lining at not over 200 mm (8 inches) on center along

edges and with at least one nail to each square foot of surface area; nails to be 3d blued shingle or similar nails with thin flatheads.

F. Wall Form Ties: Locate wall form ties in symmetrically level horizontal rows at each line of wales and in plumb vertical tiers. Space ties to maintain true, plumb surfaces. Provide one row of ties within 150 mm (6 inches) above each construction joint. Space through-ties adjacent to horizontal and vertical construction joints not over 450 mm (18 inches) on center.

1. Tighten row of ties at bottom of form just before placing concrete and, if necessary, during placing of concrete to prevent seepage of concrete and to obtain a clean line. Ties to be entirely removed shall be loosened 24 hours after concrete is placed and shall be pulled from least important face when removed.

2. Coat surfaces of all metal that is to be removed with paraffin, cup grease or a suitable compound to facilitate removal.

G. Inserts, Sleeves, and Similar Items: Flashing reglets, steel strips, masonry ties, anchors, wood blocks, nailing strips, grounds, inserts, wire hangers, sleeves, drains, guard angles, forms for floor hinge boxes, inserts or bond blocks for elevator guide rails and supports, and other items specified as furnished under this and other sections of specifications and required to be in their final position at time concrete is placed shall be properly located, accurately positioned, and built into construction, and maintained securely in place.

1. Locate inserts or hanger wires for furred and suspended ceilings only in bottom of concrete joists, or similar concrete member of overhead concrete joist construction.

2. Install sleeves, inserts and similar items for mechanical services in accordance with drawings prepared specially for mechanical services. Contractor is responsible for accuracy and completeness of drawings and shall coordinate requirements for mechanical services and equipment.

3. Do not install sleeves in beams or columns except where shown or permitted by COTR. Install sleeves in beams or columns that are not shown, but are permitted by the COTR, and require no structural changes, at no additional cost to the Government.

4. Minimum clear distance of embedded items such as conduit and pipe is at least three times diameter of conduit or pipe, except at stub-ups and other similar locations.

5. Provide recesses and blockouts in floor slabs for door closers and other hardware as necessary in accordance with manufacturer's instructions.

H. Construction Tolerances:

1. Set and maintain concrete formwork to assure erection of completed work within tolerances specified and to accommodate installation of other rough and finish materials. Accomplish remedial work necessary for correcting excessive tolerances. Erected work that exceeds specified tolerance limits shall be remedied or removed and replaced, at no additional cost to the Government.
2. Permissible surface irregularities for various classes of materials are defined as "finishes" in specification sections covering individual materials. They are to be distinguished from tolerances specified which are applicable to surface irregularities of structural elements.

3.2 PLACING REINFORCEMENT:

- A. General: Details of concrete reinforcement in accordance with ACI 318 and ACI 315, unless otherwise shown.
- B. Placing: Place reinforcement conforming to CRSI DA4, unless otherwise shown.
 1. Place reinforcing bars accurately and tie securely at intersections and splices with 1.6 mm (16 gauge) black annealed wire. Use epoxy-coated tie wire with epoxy-coated reinforcing. Secure reinforcing bars against displacement during the placing of concrete by spacers, chairs, or other similar supports. Portions of supports, spacers, and chairs in contact with formwork shall be made of plastic in areas that will be exposed when building is occupied. Type, number, and spacing of supports conform to ACI 315. Where concrete slabs are placed on ground, use concrete blocks or other non-corrodible material of proper height, for support of reinforcement. Use of brick or stone supports will not be permitted.
 2. Lap welded wire fabric at least 1 1/2 mesh panels plus end extension of wires not less than 300 mm (12 inches) in structural slabs. Lap welded wire fabric at least 1/2 mesh panels plus end extension of wires not less than 150 mm (6 inches) in slabs on grade.
 3. Splice column steel at no points other than at footings and floor levels unless otherwise shown.
- C. Spacing: Minimum clear distances between parallel bars, except in columns and multiple layers of bars in beams shall be equal to nominal

diameter of bars. Minimum clear spacing is 25 mm (1 inch) or 1-1/3 times maximum size of coarse aggregate.

- D. Splicing: Splices of reinforcement made only as required or shown or specified. Accomplish splicing as follows:
 - 1. Lap splices: Do not use lap splices for bars larger than Number 36 (Number 11). Minimum lengths of lap as shown.
- E. Bending: Bend bars cold, unless otherwise approved. Do not field bend bars partially embedded in concrete, except when approved by COTR.
- F. Cleaning: Metal reinforcement, at time concrete is placed, shall be free from loose flaky rust, mud, oil, or similar coatings that will reduce bond.
- G. Future Bonding: Protect exposed reinforcement bars intended for bonding with future work by wrapping with felt and coating felt with a bituminous compound unless otherwise shown.

3.3 VAPOR BARRIER:

- A. Except where membrane waterproofing is required, interior concrete slab on grade shall be placed on a continuous vapor barrier.
 - 1. Place 100 mm (4 inches) of fine granular fill over the vapor barrier to act as a blotter for concrete slab.
 - 2. Vapor barrier joints lapped 150 mm (6 inches) and sealed with compatible waterproof pressure-sensitive tape.
 - 3. Patch punctures and tears.

3.4 CONSTRUCTION JOINTS:

- A. Unless otherwise shown, location of construction joints to limit individual placement shall not exceed 24,000 mm (80 feet) in any horizontal direction, except slabs on grade which shall have construction joints shown. Allow 48 hours to elapse between pouring adjacent sections unless this requirement is waived by COTR.
- B. Locate construction joints in suspended floors near the quarter-point of spans for slabs, beams or girders, unless a beam intersects a girder at center, in which case joint in girder shall be offset a distance equal to twice width of beam. Provide keys and inclined dowels as shown. Provide longitudinal keys as shown.
- C. Place concrete for columns slowly and in one operation between joints. Install joints in concrete columns at underside of deepest beam or girder framing into column.
- D. Allow 2 hours to elapse after column is cast before concrete of supported beam, girder or slab is placed. Place girders, beams, grade beams, column capitals, brackets, and haunches at the same time as slab unless otherwise shown.

- E. Install polyvinyl chloride or rubber water seals, as shown in accordance with manufacturer's instructions, to form continuous watertight seal.

3.5 EXPANSION JOINTS:

- A. Clean expansion joint surfaces before installing premolded filler and placing adjacent concrete.
- B. Install polyvinyl chloride or rubber water seals, as shown in accordance with manufacturer's instructions, to form continuous watertight seal.

3.6 PLACING CONCRETE:

- A. Preparation:
 - 1. Remove hardened concrete, wood chips, shavings and other debris from forms.
 - 2. Remove hardened concrete and foreign materials from interior surfaces of mixing and conveying equipment.
 - 3. Have forms and reinforcement inspected and approved by COTR before depositing concrete.
 - 4. Provide runways for wheeling equipment to convey concrete to point of deposit. Keep equipment on runways which are not supported by or bear on reinforcement. Provide similar runways for protection of vapor barrier on coarse fill.
- B. Bonding: Before depositing new concrete on or against concrete which has been set, thoroughly roughen and clean existing surfaces of laitance, foreign matter, and loose particles.
oose material.
- C. Conveying Concrete: Convey concrete from mixer to final place of deposit by a method which will prevent segregation. Method of conveying concrete subject to approval of COTR.
- D. Placing: For special requirements see Paragraphs, HOT WEATHER and COLD WEATHER.
 - 1. Do not place concrete when weather conditions prevent proper placement and consolidation, or when concrete has attained its initial set, or has contained its water or cement content more than 1 1/2 hours.
 - 2. Deposit concrete in forms as near as practicable in its final position. Prevent splashing of forms or reinforcement with concrete in advance of placing concrete.
 - 3. Do not drop concrete freely more than 3000 mm (10 feet) for concrete containing the high-range water-reducing admixture (superplasticizer) or 1500 mm (5 feet) for conventional concrete. Where greater drops are required, use a tremie or flexible spout (canvas elephant trunk), attached to a suitable hopper.

4. Discharge contents of tremies or flexible spouts in horizontal layers not exceeding 500 mm (20 inches) in thickness, and space tremies such as to provide a minimum of lateral movement of concrete.
 5. Continuously place concrete until an entire unit between construction joints is placed. Rate and method of placing concrete shall be such that no concrete between construction joints will be deposited upon or against partly set concrete, after it's initial set has taken place, or after 45 minutes of elapsed time during concrete placement.
 6. On bottom of members with severe congestion of reinforcement, deposit 25 mm (1 inch) layer of flowing concrete containing the specified high-range water-reducing admixture (superplasticizer). Successive concrete lifts may be a continuation of this concrete or concrete with a conventional slump.
- E. Consolidation: Conform to ACI 309. Immediately after depositing, spade concrete next to forms, work around reinforcement and into angles of forms, tamp lightly by hand, and compact with mechanical vibrator applied directly into concrete at approximately 450 mm (18 inch) intervals. Mechanical vibrator shall be power driven, hand operated type with minimum frequency of 5000 cycles per minute having an intensity sufficient to cause flow or settlement of concrete into place. Vibrate concrete to produce thorough compaction, complete embedment of reinforcement and concrete of uniform and maximum density without segregation of mix. Do not transport concrete in forms by vibration.
1. Use of form vibration shall be approved only when concrete sections are too thin or too inaccessible for use of internal vibration.
 2. Carry on vibration continuously with placing of concrete. Do not insert vibrator into concrete that has begun to set.

3.7 HOT WEATHER:

Follow the recommendations of ACI 305 or as specified to prevent problems in the manufacturing, placing, and curing of concrete that can adversely affect the properties and serviceability of the hardened concrete. Methods proposed for cooling materials and arrangements for protecting concrete shall be made in advance of concrete placement and approved by COTR.

3.8 COLD WEATHER:

Follow the recommendations of ACI 306 or as specified to prevent freezing of concrete and to permit concrete to gain strength properly. Use only the specified non-corrosive, non-chloride accelerator. Do not use calcium chloride, thiocyanates or admixtures containing more than 0.05 percent chloride ions. Methods proposed for heating materials and

arrangements for protecting concrete shall be made in advance of concrete placement and approved by COTR.

3.9 PROTECTION AND CURING:

A. Conform to ACI 308: Initial curing shall immediately follow the finishing operation. Protect exposed surfaces of concrete from premature drying, wash by rain and running water, wind, mechanical injury, and excessively hot or cold temperatures. Keep concrete not covered with membrane or other curing material continuously wet for at least 7 days after placing, except wet curing period for high-early-strength concrete shall be not less than 3 days. Keep wood forms continuously wet to prevent moisture loss until forms are removed. Cure exposed concrete surfaces as described below. Other curing methods may be used if approved by COTR.

1. Liquid curing and sealing compounds: Apply by power-driven spray or roller in accordance with the manufacturer's instructions. Apply immediately after finishing. Maximum coverage 10m²/L (400 square feet per gallon) on steel troweled surfaces and 7.5m²/L (300 square feet per gallon) on floated or broomed surfaces for the curing/sealing compound.
2. Plastic sheets: Apply as soon as concrete has hardened sufficiently to prevent surface damage. Utilize widest practical width sheet and overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with tape.
3. Paper: Utilize widest practical width paper and overlap adjacent sheets 50 mm (2 inches). Tightly seal joints with sand, wood planks, pressure-sensitive tape, mastic or glue.

3.10 REMOVAL OF FORMS:

- A. Remove in a manner to assure complete safety of structure after the following conditions have been met.
1. Where structure as a whole is supported on shores, forms for beams and girder sides, columns, and similar vertical structural members may be removed after 24 hours, provided concrete has hardened sufficiently to prevent surface damage and curing is continued without any lapse in time as specified for exposed surfaces.
 2. Take particular care in removing forms of architectural exposed concrete to insure surfaces are not marred or gouged, and that corners and arises are true, sharp and unbroken.
- B. Control Test: Use to determine if the concrete has attained sufficient strength and curing to permit removal of supporting forms. Cylinders required for control tests taken in accordance with ASTM C172, molded in

accordance with ASTM C31, and tested in accordance with ASTM C39. Control cylinders cured and protected in the same manner as the structure they represent. Supporting forms or shoring not removed until strength of control test cylinders have attained at least 70 percent of minimum 28-day compressive strength specified. Exercise care to assure that newly unsupported portions of structure are not subjected to heavy construction or material loading.

- C. Reshoring: Reshoring is required if superimposed load plus dead load of the floor exceeds the capacity of the floor at the time of loading. Reshoring accomplished in accordance with ACI 347 at no additional cost to the Government.

3.11 CONCRETE SURFACE PREPARATION:

- A. Metal Removal: Unnecessary metal items cut back flush with face of concrete members.
- B. Patching: Maintain curing and start patching as soon as forms are removed. Do not apply curing compounds to concrete surfaces requiring patching until patching is completed. Use cement mortar for patching of same composition as that used in concrete. Use white or gray Portland cement as necessary to obtain finish color matching surrounding concrete. Thoroughly clean areas to be patched. Cut out honeycombed or otherwise defective areas to solid concrete to a depth of not less than 25 mm (1 inch). Cut edge perpendicular to surface of concrete. Saturate with water area to be patched, and at least 150 mm (6 inches) surrounding before placing patching mortar. Give area to be patched a brush coat of cement grout followed immediately by patching mortar. Cement grout composed of one part Portland cement, 1.5 parts fine sand, bonding admixture, and water at a 50:50 ratio, mix to achieve consistency of thick paint. Mix patching mortar approximately 1 hour before placing and remix occasionally during this period without addition of water. Compact mortar into place and screed slightly higher than surrounding surface. After initial shrinkage has occurred, finish to match color and texture of adjoining surfaces. Cure patches as specified for other concrete. Fill form tie holes which extend entirely through walls from unexposed face by means of a pressure gun or other suitable device to force mortar through wall. Wipe excess mortar off exposed face with a cloth.
- C. Upon removal of forms, clean vertical concrete surface that is to receive bonded applied cementitious application with wire brushes or by sand blasting to remove unset material, laitance, and loose particles to

expose aggregates to provide a clean, firm, granular surface for bond of applied finish.

3.12 CONCRETE FINISHES:

A. Vertical Finishes:

1. Unfinished areas: Vertical concrete surfaces not exposed to the public will not require additional finishing.
2. Interior and exterior exposed areas to be painted: Remove fins, burrs and similar projections on surfaces flush, and smooth by mechanical means approved by COTR, and by rubbing lightly with a fine abrasive stone or hone. Use ample water during rubbing without working up a lather of mortar or changing texture of concrete.
3. Interior and exterior exposed areas finished: Give a grout finish of uniform color and smooth finish treated as follows:
 - a. After concrete has hardened and laitance, fins and burrs removed, scrub concrete with wire brushes. Clean stained concrete surfaces by use of a hone stone.
 - b. Apply grout composed of one part of Portland cement, one part fine sand, smaller than a 600 μ m (No. 30) sieve. Work grout into surface of concrete with cork floats or fiber brushes until all pits, and honeycombs are filled.
 - c. After grout has hardened slightly, but while still plastic, scrape grout off with a sponge rubber float and, about 1 hour later, rub concrete vigorously with burlap to remove any excess grout remaining on surfaces.
 - d. In hot, dry weather use a fog spray to keep grout wet during setting period. Complete finish of area in same day. Make limits of finished areas at natural breaks in wall surface. Leave no grout on concrete surface overnight.

B. Slab Finishes:

1. Monitoring and Adjustment: Provide continuous cycle of placement, measurement, evaluation and adjustment of procedures to produce slabs within specified tolerances. Determine elevations of cast-in-place slab soffits prior to removal of shores. Provide information to COTR and floor consultant for evaluation and recommendations for subsequent placements.
2. Set perimeter forms to serve as screed using either optical or laser instruments. For slabs on grade, wet screeds may be used to establish initial grade during strike-off, unless COTR determines that the method is proving insufficient to meet required finish tolerances and directs use of rigid screed guides. Where wet screeds are allowed,

- they shall be placed using grade stakes set by optical or laser instruments. Use rigid screed guides, as opposed to wet screeds, to control strike-off elevation for all types of elevated (non slab-on-grade) slabs. Divide bays into halves or thirds by hard screeds. Adjust as necessary where monitoring of previous placements indicates unshored structural steel deflections to other than a level profile.
3. Place slabs monolithically. Once slab placement commences, complete finishing operations within same day. Slope finished slab to floor drains where they occur, whether shown or not.
 4. Use straightedges specifically made for screeding, such as hollow magnesium straightedges or power strike-offs. Do not use pieces of dimensioned lumber. Strike off and screed slab to a true surface at required elevations. Use optical or laser instruments to check concrete finished surface grade after strike-off. Repeat strike-off as necessary. Complete screeding before any excess moisture or bleeding water is present on surface. Do not sprinkle dry cement on the surface.
 5. Immediately following screeding, and before any bleed water appears, use a 3000 mm (10 foot) wide highway straightedge in a cutting and filling operation to achieve surface flatness. Do not use bull floats or darbys, except that darbying may be allowed for narrow slabs and restricted spaces.
 6. Wait until water sheen disappears and surface stiffens before proceeding further. Do not perform subsequent operations until concrete will sustain foot pressure with maximum of 6 mm (1/4 inch) indentation.
 7. Float Finish: Slabs to receive unbonded toppings, steel trowel finish, fill, mortar setting beds, or a built-up roof shall be floated to a smooth, dense uniform, sandy textured finish. During floating, while surface is still soft, check surface for flatness using a 3000 mm (10 foot) highway straightedge. Correct high spots by cutting down and correct low spots by filling in with material of same composition as floor finish. Remove any surface projections and re-float to a uniform texture.
 8. Steel Trowel Finish: Concrete surfaces to receive resilient floor covering or carpet, monolithic floor slabs to be exposed to view in finished work, and other interior surfaces for which no other finish is indicated. Steel trowel immediately following floating. During final troweling, tilt steel trowel at a slight angle and exert heavy pressure to compact cement paste and form a dense, smooth surface.

Finished surface shall be smooth, free of trowel marks, and uniform in texture and appearance.

9. Broom Finish: Finish exterior slabs with a bristle brush moistened with clear water after surfaces have been floated. Brush in a direction transverse to main traffic. Match texture approved by COTR from sample panel.
10. Finished slab flatness (FF) and levelness (FL) values comply with the following minimum requirements:
 - a. Areas not specified otherwise in b. below:

Slab on Grade:

Specified overall value	F _F 25/F _L 20
Minimum local value	F _F 17/F _L 15

Level suspended slabs (shored until after testing) and topping slabs:

Specified overall value	FF 25/FL 20
Minimum local value	FF 17/FL 15

Level tolerance such that 80 percent of all points fall within a 20 mm (3/4 inch) envelope +10 mm, -10 mm (+3/8 inch, -3/8 inch) from the design elevation.
 - b. Areas that will be exposed, receive thin-set tile or resilient flooring:

Slab on grade:

Specified overall value	FF 36/FL 20
Minimum local value	FF 24/FL 15

Level tolerance such that 80 percent of all points fall within a 20 mm (3/4 inch) envelope +10 mm, -10 mm (+3/8 inch, -3/8 inch) from the design elevation.
 - c. "Specified overall value" is based on the composite of all measured values in a placement derived in accordance with ASTM E1155.
 - d. "Minimum local value" (MLV) describes the flatness or levelness below which repair or replacement is required. MLV is based on the results of an individual placement and applies to a minimum local area. Minimum local area boundaries may not cross a construction joint or expansion joint. A minimum local area will be bounded by construction and/or control joints, or by column lines and/or half-column lines, whichever is smaller.
11. Measurements

- a. Department of Veterans Affairs retained testing laboratory will take measurements as directed by COTR, to verify compliance with F_F , F_L , and other finish requirements. Measurements will occur within 72 hours after completion of concrete placement (weekends and holidays excluded). Make measurements before shores or forms are removed to insure the "as-built" levelness is accurately assessed. Profile data for above characteristics may be collected using a laser level or any Type II apparatus (ASTM E1155, "profileograph" or "dipstick"). Contractor's surveyor shall establish reference elevations to be used by Department of Veterans Affairs retained testing laboratory.
 - b. Contractor not experienced in using F_F and F_L criteria is encouraged to retain the services of a floor consultant to assist with recommendations concerning adjustments to slab thicknesses, finishing techniques, and procedures on measurements of the finish as it progresses in order to achieve the specific flatness and levelness numbers.
12. Acceptance/ Rejection:
- a. If individual slab section measures less than either of specified minimum local F_F/F_L numbers, that section shall be rejected and remedial measures shall be required. Sectional boundaries may be set at construction and contraction (control) joints, and not smaller than one-half bay.
 - b. If composite value of entire slab installation, combination of all local results, measures less than either of specified overall F_F/F_L numbers, then whole slab shall be rejected and remedial measures shall be required.
13. Remedial Measures for Rejected Slabs: Correct rejected slab areas by grinding, planing, surface repair with underlayment compound or repair topping, retopping, or removal and replacement of entire rejected slab areas, as directed by COTR, until a slab finish constructed within specified tolerances is accepted.

3.13 SURFACE TREATMENTS:

- A. Prepare concrete surface per directions of surface treatment manufacturer.

3.14 RETAINING WALLS:

- A. Use air-entrained concrete.
- B. Expansion and contraction joints, waterstops, weep holes, reinforcement and railing sleeves installed and constructed as shown.

- C. Exposed surfaces finished to match adjacent concrete surfaces, new or existing.
- D. Place porous backfill as shown.

- - - E N D - - -

SECTION 04 05 13
MASONRY MORTARING

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. Section specifies mortar materials and mixes.

1.2 RELATED WORK:

- A. Mortar used in Section:
 - 1. Section 04 05 16, MASONRY GROUTING.
 - 2. Section 04 20 00, UNIT MASONRY.
- B. Mortar Color: Section 09 06 00, SCHEDULE FOR FINISHES.

1.3 TESTING LABORATORY-CONTRACTOR RETAINED

- A. Engage a commercial testing laboratory approved by Contracting Officer's Technical Representative (COTR) to perform tests specified below.
- B. Submit information regarding testing laboratory's facilities and qualifications of technical personnel to COTR.

1.4 TESTS

- A. Test mortar and materials specified.
- B. Certified test reports.
- C. Identify materials by type, brand name and manufacturer or by origin.
- D. Do not use materials until laboratory test reports are approved by COTR.
- E. After tests have been made and materials approved, do not change without additional test and approval of COTR.
- F. Testing:
 - 1. Test materials proposed for use for compliance with specifications in accordance with test methods contained in referenced specifications and as follows:
 - 2. Mortar:
 - a. Test for compressive strength and water retention; ASTM C270.
 - b. Mortar compressive strengths 28 days as follows:
 - Type S: Minimum 12400 kPa (1800 psi) at 28 days.
 - Type N: Minimum 5170 kPa (750 psi) at 28 days.
 - 3. Cement:
 - a. Test for water soluble alkali (nonstaining) when nonstaining cement is specified.
 - b. Nonstaining cement shall contain not more than 0.03 percent water soluble alkali.
 - 4. Sand: Test for deleterious substances, organic impurities, soundness and grading.

- G. During progress of work, testing laboratory specified in Section 01 45 29, TESTING LABORATORY SERVICES, takes and tests samples as specified in that section. Testing procedures and test methods in ASTM C780.

1.5 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Certificates:
1. Testing laboratory's facilities and qualifications of its technical personnel.
 2. Indicating that following items meet specifications:
 - a. Portland cement.
 - b. Mortar cement.
 - c. Hydrated lime.
 - d. Fine aggregate (sand).
- C. Laboratory Test Reports:
1. Mortar, each type.
 2. Admixtures.
- D. Manufacturer's Literature and Data:
1. Cement, each kind.
 2. Hydrated lime.
 3. Admixtures.

1.6 PRODUCT DELIVERY, STORAGE AND HANDLING

- A. Deliver masonry materials in original sealed containers marked with name of manufacturer and identification of contents.
- B. Store masonry materials under waterproof covers on planking clear of ground, and protect damage from handling, dirt, stain, water and wind.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
- C40-04Organic Impurities in Fine Aggregates for
Concrete
- C109-08Compressive Strength of Hydraulic Cement Mortars
(Using 2-in. or 50-MM Cube Specimens)
- C144-04Aggregate for Masonry Mortar
- C150-09Portland Cement
- C207-06Hydrated Lime for Masonry Purposes
- C270-10Mortar for Unit Masonry

C307-03(R2008)Tensile Strength of Chemical - Resistant Mortar,
Grouts, and Monolithic Surfacing
C321-00(R2005)Bond Strength of Chemical-Resistant Mortars
C348-08Flexural Strength of Hydraulic Cement Mortars
C595-10Blended Hydraulic Cement
C780-10Preconstruction and Construction Evaluation of
Mortars for Plain and Reinforced Unit Masonry
C979-10Pigments for Integrally Colored Concrete

PART 2 - PRODUCTS

2.1 HYDRATED LIME

A. ASTM C207, Type S.

2.2 AGGREGATE FOR MASONRY MORTAR

A. ASTM C144 and as follows:

1. Light colored sand for mortar for laying face brick.

B. Test sand for color value in accordance with ASTM C40. Sand producing color darker than specified standard is unacceptable.

2.3 PORTLAND CEMENT

A. ASTM C150, Type I.

2.4 WATER

A. Potable, free of substances that are detrimental to mortar, masonry, and metal.

2.5 MASONRY MORTAR

A. Conform to ASTM C270.

B. Admixtures:

1. Do not use mortar admixtures unless approved by COTR.

2. Submit laboratory test report showing effect of proposed admixture on strength, water retention, and water repellency of mortar.

3. Do not use antifreeze compounds.

C. Colored Mortar:

1. Maintain uniform mortar color for exposed work throughout.

2. Match mortar color in approved sample or mock-up.

3. Color of mortar for new masonry work to match color of existing mortar unless specified otherwise.

PART 3 - EXECUTION

3.1 MIXING

A. Mix in a mechanically operated mortar mixer.

1. Mix mortar for at least three minutes but not more than five minutes.

B. Measure ingredients by volume. Measure by the use of a container of known capacity.

- C. Mix water with dry ingredients in sufficient amount to provide a workable mixture which will adhere to vertical surfaces of masonry units.
- D. Mortar that has stiffened because of loss of water through evaporations:
 - 1. Re-tempered by adding water to restore to proper consistency and workability.
 - 2. Discard mortar that has reached its initial set or has not been used within two hours.

3.2 MORTAR USE LOCATION

- A. Use Type S mortar for masonry containing vertical reinforcing bars (non-engineered) and engineered reinforced unit masonry work.
- B. For brick veneer over frame back up walls, use Type N portland cement-lime mortar.
- C. Use Type N mortar for other masonry work, except as otherwise specified.

- - - E N D - - -

SECTION 04 05 16
MASONRY GROUTING

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. Section specifies grout materials and mixes.

1.2 RELATED WORK:

- A. Grout used in Section:

- 1. Section 04 20 00, UNIT MASONRY.

1.3 TESTS:

- A. Test grout and materials specified.
- B. Certified test reports.
- C. Identify materials by type, brand name and manufacturer or by origin.
- D. Do not use materials until laboratory test reports are approved by Contracting Officer's Technical Representative (COTR).
- E. After tests have been made and materials approved, do not change without additional test and approval of COTR.
- F. Testing:
 - 1. Test materials proposed for use for compliance with specifications in accordance with test methods contained in referenced specifications and as follows:
 - 2. Grout:
 - a. Test for compressive strength; ASTM C1019.
 - b. Grout compressive strength of 13790 kPa (2000 psi) at 28 days.
 - 3. Cement:
 - a. Test for water soluble alkali (nonstaining) when nonstaining cement is specified.
 - b. Nonstaining cement shall contain not more than 0.03 percent water soluble alkali.
 - 4. Sand: Test for deleterious substances, organic impurities, soundness and grading.

1.4 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Certificates:
 - 1. Indicating that following items meet specifications:
 - a. Portland cement.
 - b. Grout.
 - c. Hydrated lime.
 - d. Fine aggregate (sand).

e. Coarse aggregate for grout.

C. Laboratory Test Reports:

1. Grout, each type.
2. Admixtures.

D. Manufacturer's Literature and Data:

1. Cement, each kind.
2. Hydrated lime.
3. Admixtures.

1.5 PRODUCT DELIVERY, STORAGE AND HANDLING:

- A. Deliver masonry materials in original sealed containers marked with name of manufacturer and identification of contents.
- B. Store masonry materials under waterproof covers on planking clear of ground, and protect damage from handling, dirt, stain, water and wind.

1.6 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - C40-04Organic Impurities in Fine Aggregates for
Concrete
 - C150-09Portland Cement
 - C207-06Hydrated Lime for Masonry Purposes
 - C404-07Aggregate for Masonry Grout
 - C476-10Grout for Masonry
 - C1019-11Sampling and Testing Grout

PART 2 - PRODUCTS

2.1 HYDRATED LIME:

- A. ASTM C207, Type S.

2.2 AGGREGATE FOR MASONRY GROUT:

- A. ASTM C404, Size 8.

2.3 PORTLAND CEMENT:

- A. ASTM C150, Type I.

2.4 WATER:

- A. Potable, free of substances that are detrimental to grout, masonry, and metal.

2.5 GROUT:

- A. Conform to ASTM C476.
- B. Grout type proportioned by volume as follows:
 1. Fine Grout:

- a. Portland cement or blended hydraulic cement: one part.
 - b. Hydrated lime: 0 to 1/10 part.
 - c. Fine aggregate: 2-1/4 to three times sum of volumes of cement and lime used.
2. Coarse Grout:
- a. Portland cement or blended hydraulic cement: one part.
 - b. Hydrated lime: 0 to 1/10 part.
 - c. Fine aggregate: 2-1/4 to three times sum of volumes of cement and lime used.
 - d. Coarse aggregate: one to two times sum of volumes of cement and lime used.
3. Sum of volumes of fine and coarse aggregates: Do not exceed four times sum of volumes of cement and lime used.

PART 3 - EXECUTION

3.1 MIXING:

- A. Mix in a mechanically operated grout mixer.
 1. Mix grout for at least five minutes.
- B. Measure ingredients by volume. Measure by the use of a container of known capacity.
- C. Mix water with grout dry ingredients in sufficient amount to bring grout mixture to a pouring consistency.

3.2 GROUT USE LOCATIONS:

- A. Use fine grout for filling wall cavities and cells of concrete masonry units where the smallest dimension is 50 mm (2 inches) or less.
- B. Use either fine grout or coarse grout for filling wall cavities and cells of concrete masonry units where the smallest dimension is greater than 50 mm (2 inches).
- C. Do not use grout for filling bond beam or lintel units.

- - - E N D - - -

SECTION 04 20 00
UNIT MASONRY

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies requirements for construction of masonry unit walls.

1.2 RELATED WORK

- A. Mortars and grouts: Section 04 05 13, MASONRY MORTARING, Section 04 05 16, MASONRY GROUTING.
- B. Steel lintels and shelf angles: Section 05 50 00, METAL FABRICATIONS.
- C. Cavity insulation: Section 07 21 13, THERMAL INSULATION.
- D. Flashing: Section 07 60 00, FLASHING AND SHEET METAL.
- E. Sealants and sealant installation: Section 07 92 00, JOINT SEALANTS.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
- B. Samples:
1. Face brick, sample panel, 200 mm by 400 mm (8 inches by 16 inches,) showing full color range and texture of bricks, bond, and proposed mortar joints.
 2. Concrete masonry units, when exposed in finish work.
 3. Anchors, and ties, one each and joint reinforcing 1200 mm (48 inches) long.
- C. Shop Drawings:
1. Special masonry shapes.
 2. Drawings, showing reinforcement, applicable dimensions and methods of hanging soffit or lintel masonry and reinforcing masonry for embedment of anchors for hung fixtures.
 3. Concrete masonry units for typical window and door openings, and, for special conditions as affected by structural conditions.
 4. Shop Drawings: Submit shop drawings for fabrication, bending, and placement of reinforcing bars. Comply with ACI 315. Show bar schedules, diagrams of bent bars, stirrup spacing, lateral ties and other arrangements and assemblies as required for fabrication and placement of reinforcement for unit masonry work.
- D. Certificates:
1. Certificates signed by manufacturer, including name and address of contractor, project location, and the quantity, and date or dates of shipment of delivery to which certificate applies.

2. Indicating that the following items meet specification requirements:
 - a. Face brick.
 - b. Solid and load-bearing concrete masonry units.
3. Testing laboratories facilities and qualifications of its principals and key personnel to perform tests specified.

F. Manufacturer's Literature and Data:

1. Anchors, ties, and reinforcement.
2. Shear keys.
3. Reinforcing bars.

1.4 SAMPLE PANEL

- A. Before starting masonry, lay up a sample panel in accordance with Masonry Standards Joint Committee (MSJC) and Brick Industry Association (BIA).
 1. Use masonry units from random cubes of units delivered on site.
 2. Include reinforcing, ties, and anchors.
 3. Show brick-to-brick joints as well as brick-to-curtainwall joints.
- B. Use sample panels approved by Contracting Officer's Technical Representative (COTR) for standard of workmanship of new masonry work.
- C. Use sample panel to test cleaning methods.

1.5 WARRANTY

- A. Warrant exterior masonry walls against moisture leaks and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be five years.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - A951-06Steel Wire for Masonry Joint Reinforcement.
 - A615/A615M-09Deformed and Plain Billet-Steel Bars for
Concrete Reinforcement.
 - A675/A675M-03(R2009) ...Standard Specification for Steel Bars, Carbon,
Hot-Wrought, Special Quality, Mechanical
PropertiesC34-03 Structural Clay Load-Bearing
Wall Tile
 - C56-10Structural Clay Non-Load-Bearing Tile
 - C62-10Building Brick (Solid Masonry Units Made From
Clay or Shale)

- C67-09Sampling and Testing Brick and Structural Clay
Tile
- C90-11Load-Bearing Concrete Masonry Units
- C126-10Ceramic Glazed Structural Clay Facing Tile,
Facing Brick, and Solid Masonry Units
- C216-10Facing Brick (Solid Masonry Units Made From Clay
or Shale)
- C476-10Standard Specification for Grout for Masonry
- C612-10Mineral Fiber Block and Board Thermal Insulation
- C744-11Prefaced Concrete and Calcium Silicate Masonry
Units.
- D1056-07Flexible Cellular Materials - Sponge or Expanded
Rubber
- D2000-08Rubber Products in Automotive Applications
- D2240-05(R2010)Rubber Property - Durometer Hardness
- D3574-08Flexible Cellular Materials-Slab, Bonded, and
Molded Urethane Foams
- F1667-11Fasteners: Nails, Spikes and Staples
- C. Masonry Industry Council:
Hot and Cold Weather Masonry Construction Manual-98 (R2000).
- D. American Welding Society (AWS):
D1.4-11 Structural Welding Code - Reinforcing Steel.
- E. Federal Specifications (FS):
FF-S-107C-00Screws, Tapping and Drive
- F. Brick Industry Association - Technical Notes on Brick Construction
(BIA):
11-2001Guide Specifications for Brick Masonry, Part I
11A-1988Guide Specifications for Brick Masonry, Part II
11B-1988Guide Specifications for Brick Masonry, Part III
Execution
11C-1998Guide Specification for Brick Masonry Engineered
Brick Masonry, Part IV
11D-1988Guide Specifications for Brick Masonry
Engineered Brick Masonry, Part IV continued
- G. Masonry Standards Joint Committee; Specifications for Masonry Structures
TMS 602-08/ACI 530.1-08/ASCE 6-08 (2008 MSJC Book Version TMS-0402-08).

PART 2 - PRODUCTS

2.1 BRICK

A. Face Brick:

1. ASTM C216, Grade SW, Type FBS.
2. Brick when tested in accordance with ASTM C67: Classified slightly efflorescent or better.
3. Size: Modular.

B. Building Brick: ASTM C62, Grade MW for backup and interior work; Grade SW where in contact with earth.

2.2 CONCRETE MASONRY UNITS

A. Hollow and Solid Load-Bearing Concrete Masonry Units: ASTM C90.

1. Unit Weight: Normal weight.
2. Sizes: Modular.
4. Use bullnose concrete masonry units at corners exposed in finished work with 25 mm (one inch) minimum radius rounded vertical exterior corners (bullnose units).

B. Concrete Brick: ASTM C55.

2.3 REINFORCEMENT

A. Steel Reinforcing Bars: ASTM A615M, deformed bars, 420 MPa (Grade 60) for bars No. 10 to No. 57 (No. 3 to No. 18), except as otherwise indicated.

B. Shop-fabricate reinforcement bars which are shown to be bent or hooked.

C. Joint Reinforcement:

1. Form from wire complying with ASTM A951.
2. Galvanized after fabrication.
3. Width of joint reinforcement 40 mm (0.16 inches) less than nominal width of masonry wall or partition.
4. Cross wires welded to longitudinal wires.
5. Joint reinforcement at least 3000 mm (10 feet) in length.
6. Joint reinforcement in rolls is not acceptable.
7. Joint reinforcement that is crimped to form drip is not acceptable.
8. Maximum spacing of cross wires 400 mm (16 inch) to longitudinal wires.
9. Ladder Design:
 - a. Longitudinal wires deformed 5 mm (0.20 inch) diameter wire.
 - b. Cross wires 4 mm (0.16 inch) diameter.
10. Trussed Design:
 - a. Longitudinal and cross wires not less than 4 mm (0.16 inch nominal) diameter.
 - b. Longitudinal wires deformed.

2.4 ANCHORS AND TIES

A. Steel Reinforcing Bars: ASTM A615, deformed bars, grade as shown.

B. Multiple Wythes and Cavity wall ties:

1. Longitudinal wires 4 mm (0.16 inch), two in each wythe with ladder truss wires 4 mm (0.16 inch) overlay, welded to each longitudinal wire.
2. Longitudinal wires 4 mm (0.16 inch) with U shape 4 mm (0.16 inch) rectangular ties extending into other wythe not less than 75 mm (3 inches) spaced 400 mm o.c. (16 inches). Adjustable type with U shape tie designed to receive 4 mm (0.16 inch) pintle projecting into other wythe 75 mm (3 inches min.).

C. Adjustable Veneer Anchor for Frame Walls:

1. Two piece, adjustable anchor and tie.
2. Anchor and tie may be either type; use only one type throughout.
3. Loop Type:
 - a. Anchor: Screw-on galvanized steel anchor strap 2.75 mm (0.11 inch) by 19 mm (3/4 inch) wide by 225 mm (9 inches) long, with 9 mm (0.35 inch) offset and 100 mm (4 inch) adjustment. Provide 5 mm (0.20 inch) hole at each end for fasteners.
 - b. Ties: Triangular tie, fabricated of 5 mm (0.20 inch) diameter galvanized cold drawn steel wire. Ties long enough to engage the anchor and be embedded not less than 50 mm (2 inches) into the bed joint of the masonry veneer.
4. Angle Type:
 - a. Anchor: Minimum 2 mm (16 gage) thick galvanized steel angle shaped anchor strap. Provide hole in vertical leg for fastener. Provide hole near end of outstanding leg to suit upstanding portion of tie.
 - b. Tie: Fabricate from 5 mm (0.20 inch) diameter galvanized cold drawn steel wire. Form "L" shape to be embedded not less than 50 mm (2 inches) into the bed joint of the masonry veneer and provide upstanding leg to fit through hole in anchor and be long enough to allow 50 mm (2 inches) of vertical adjustment.

D. Dovetail Anchors:

1. Corrugated steel dovetail anchors formed of 1.5 mm (0.0598 inch) thick by 25 mm (1 inch) wide galvanized steel, 90 mm (3-1/2 inches) long where used to anchor 100 mm (4 inch) nominal thick masonry units, 140 mm (5-1/2 inches) long for masonry units more than 100 mm (4 inches) thick.
2. Triangular wire dovetail anchor 100 mm (4 inch) wide formed of 4 mm (9 gage) steel wire with galvanized steel dovetail insert. Anchor

length to extend at least 75 mm (3 inches) into masonry, 25 mm (1 inch) into 40 mm (1-1/2 inch) thick units.

3. Form dovetail anchor slots from 0.6 mm (0.0239 inch) thick galvanized steel (with felt or fiber filler).

E. Individual ties:

1. Rectangular ties: Form from 5 mm (3/16 inch) diameter galvanized steel rod to a rectangular shape not less than 50 mm (2 inches) wide by sufficient length for ends of ties to extend within 25 mm (1 inch) of each face of wall. Ties that are crimped to form drip are not permitted.
2. Adjustable Cavity Wall Ties:
 - a. Adjustable wall ties may be used at Contractor's option.
 - b. Two piece type permitting up to 40 mm (1-1/2 inch) adjustment.
 - c. Form ties from 5 mm (3/16 inch) diameter galvanized steel wire.
 - d. Form one piece to a rectangular shape 105 mm (4-1/8 inches) wide by length required to extend into the bed joint 50 mm (2 inches).
 - e. Form the other piece to a 75 mm (3 inch) long by 75 mm (3 inch) wide shape, having a 75 mm (3 inch) long bent section for engaging the 105 mm (4-1/8 inch) wide piece to form adjustable connection.

F. Wall Ties, (Mesh or Wire):

1. Mesh wall ties formed of ASTM A82, W0.5, 2 mm, (16 gage) galvanized steel wire 13 mm by 13 mm (1/2 inch by 1/2 inch) mesh, 75 mm (3 inches) wide by 200 mm (8 inches) long.
2. Rectangular wire wall ties formed of W1.4, 3 mm, (9 gage) galvanized steel wire 50 mm (2 inches) wide by 200 mm (8 inches) long.

G. Corrugated Wall Tie:

1. Form from 1.5 mm (0.0598 inch) thick corrugated, galvanized steel 30 mm (1-1/4 inches) wide by lengths so as to extend at least 100 mm (4 inches) into joints of new masonry plus 38 mm (1-1/2 inch) turn-up.
2. Provide 5 mm (3/16 inch) hole in turn-up for fastener attachment.

2.5 PREFORMED COMPRESSIBLE JOINT FILLER

- A. Thickness and depth to fill the joint as specified.
- B. Closed Cell Neoprene: ASTM D1056, Type 2, Class A, Grade 1, B2F1.
- C. Non-Combustible Type: ASTM C612, Class 5, 1800 degrees F.

2.6 ACCESSORIES

- A. Weep Hole Wicks: Glass fiber ropes, 10 mm (3/8 inch) minimum diameter, 300 mm (12 inches) long.
- B. Box Board:
 1. Mineral Fiber Board: ASTM C612, Class 1.

2. 25 mm (1 inch) thickness.
3. Other spacing material having similar characteristics may be used subject to the COTR's approval.

C. Masonry Cleaner:

1. Detergent type cleaner selected for each type masonry used.
2. Acid cleaners are not acceptable.
3. Use soapless type specially prepared for cleaning brick or concrete masonry as appropriate.

D. Fasteners:

1. Concrete Nails: ASTM F1667, Type I, Style 11, 19 mm (3/4 inch) minimum length.
2. Masonry Nails: ASTM F1667, Type I, Style 17, 19 mm (3/4 inch) minimum length.
3. Screws: FS-FF-S-107, Type A, AB, SF thread forming or cutting.

E. Cavity Drainage Material:

1. Free-draining mesh, made from polymer strands that will not degrade within the wall cavity.

F. Rubberized-Asphalt Flashing:

1. Composite flashing product consisting of a pliable, adhesive rubberized-asphalt compound, bonded to a high-density, cross-laminated polyethylene film to produce an overall thickness of not less than 0.040 inch (1.02 mm).
2. Accessories: Provide preformed corners, end dams, other special shapes, and seaming materials produced by flashing manufacturer.

PART 3 - EXECUTION

3.1 JOB CONDITIONS

A. Protection:

1. Cover tops of walls with nonstaining waterproof covering, when work is not in progress. Secure to prevent wind blow off.
2. On new work protect base of wall from mud, dirt, mortar droppings, and other materials that will stain face, until final landscaping or other site work is completed.

B. Cold Weather Protection:

1. Masonry may be laid in freezing weather when methods of protection are utilized.
2. Comply with MSJC and "Hot and Cold Weather Masonry Construction Manual".

3.2 CONSTRUCTION TOLERANCES

- A. Lay masonry units plumb, level and true to line within the tolerances as per MSJC requirements and as follows:
- B. Maximum variation from plumb:
 - 1. In 3000 mm (10 feet) - 6 mm (1/4 inch).
 - 2. In 6000 mm (20 feet) - 10 mm (3/8 inch).
 - 3. In 12 000 mm (40 feet) or more - 13 mm (1/2 inch).
- C. Maximum variation from level:
 - 1. In any bay or up to 6000 mm (20 feet) - 6 mm (1/4 inch).
 - 2. In 12 000 mm (40 feet) or more - 13 mm (1/2 inch).
- D. Maximum variation from linear building lines:
 - 1. In any bay or up to 6000 mm (20 feet) - 13 mm (1/2 inch).
 - 2. In 12 000 mm (40 feet) or more - 19 mm (3/4 inch).
- E. Maximum variation in cross-sectional dimensions of columns and thickness of walls from dimensions shown:
 - 1. Minus 6 mm (1/4 inch).
 - 2. Plus 13 mm (1/2 inch).
- F. Maximum variation in prepared opening dimensions:
 - 1. Accurate to minus 0 mm (0 inch).
 - 2. Plus 6 mm (1/4 inch).

3.3 INSTALLATION GENERAL

- A. Keep finish work free from mortar smears or spatters, and leave neat and clean.
- B. Anchor masonry as specified in Paragraph, ANCHORAGE.
- C. Wall Openings:
 - 1. Fill hollow metal frames built into masonry walls and partitions solid with mortar as laying of masonry progresses.
 - 2. If items are not available when walls are built, prepare openings for subsequent installation.
- D. Tooling Joints:
 - 1. Do not tool until mortar has stiffened enough to retain thumb print when thumb is pressed against mortar.
 - 2. Tool while mortar is soft enough to be compressed into joints and not raked out.
 - 3. Finish joints in exterior face masonry work with a jointing tool, and provide smooth, water-tight concave joint unless specified otherwise.
 - 4. Tool Exposed interior joints in finish work concave unless specified otherwise.

E. Partition Height:

1. Extend partitions at least 100 mm (four inches) above suspended ceiling or to overhead construction where no ceiling occurs.
2. Extend following partitions to overhead construction.
 - a. Where noted FHP (full height partition), and FP (fire partition) and smoke partitions (SP) on drawings.
 - b. Both walls at expansion joints.
 - c. Corridor walls.
 - d. Walls at stairway and stair halls, elevators, dumbwaiters, trash and laundry chute shafts, and other vertical shafts.
 - e. Walls at refrigerator space.
 - f. Reinforced masonry partitions
3. Extend finish masonry partitions at least four-inches above suspended ceiling and continue with concrete masonry units or structural clay tile to overhead construction:

F. Lintels:

1. Lintels are not required for openings less than 1000 mm (3 feet 4 inches) wide that have hollow metal frames.
2. Openings 1025 mm (3 feet 5 inches) wide to 1600 mm (5 feet 4 inches) wide with no structural steel lintel or frames, require a lintel formed of concrete masonry lintel or bond beam units filled with grout per ASTM C476 and reinforced with 1- #15m (1-#5) rod top and bottom for each 100 mm (4 inches) of nominal thickness unless shown otherwise.
3. Precast lintels of 25 Mpa (3000 psi) concrete, of same thickness as partition, and with one Number 5 deformed bar top and bottom for each 100 mm (4 inches) of nominal thickness, may be used in lieu of reinforced CMU masonry lintels.
4. Use steel lintels, for openings over 1600 mm (5 feet 4 inches) wide, brick masonry, and elevator openings unless shown otherwise.
5. Doors having overhead concealed door closers require a steel lintel, and a pocket for closer box.
6. Length for minimum bearing of 100 mm (4 inches) at ends.
7. Build masonry openings or arches over wood or metal centering and supports when steel lintels are not used.

G. Wall, Furring, and Partition Units:

1. Lay out field units to provide for running bond of walls and partitions, with vertical joints in second course centering on first course units unless specified otherwise.
2. Align head joints of alternate vertical courses.

3. At sides of openings, balance head joints in each course on vertical center lines of openings.
 4. Use no piece shorter than 100 mm (4 inches) long.
 5. On interior partitions provide a 6 mm (1/4 inch) open joint for caulking between existing construction, exterior walls, concrete work, and abutting masonry partitions.
 6. Use not less than 100 mm (4 inches) nominal thick masonry for free standing furring unless shown otherwise.
 7. Do not abut existing plastered surfaces except suspended ceilings with new masonry partitions.
- H. Use not less than 100 mm (4 inches) nominal thick masonry for fireproofing steel columns unless shown otherwise.
- I. Before connecting new masonry with previously laid, remove loosened masonry or mortar, and clean and wet work in place as specified under wetting.
- J. Chases:
1. Do not install chases in masonry walls and partitions exposed to view in finished work, including painted or coated finishes on masonry.
 2. Masonry 100 mm (4 inch) nominal thick may have electrical conduits 25 mm (1 inch) or less in diameter when covered with soaps, or other finishes.
 3. Full recess chases after installation of conduit, with mortar and finish flush.
 4. When pipes or conduits, or both occur in hollow masonry unit partitions retain at least one web of the hollow masonry units.
- K. Wetting and Wetting Test:
1. Test and wet brick or clay tile in accordance with BIA 11B.
 2. Do not wet concrete masonry units or glazed structural facing tile before laying.
- L. Temporary Formwork: Provide formwork and shores as required for temporary support of reinforced masonry elements.
- M. Construct formwork to conform to shape, line and dimensions shown. Make sufficiently tight to prevent leakage of mortar, grout, or concrete (if any). Brace, tie and support as required to maintain position and shape during construction and curing of reinforced masonry.
- N. Do not remove forms and shores until reinforced masonry members have hardened sufficiently to carry their own weight and all other reasonable temporary loads that may be placed on them during construction.

- O. Allow not less than the following minimum time to elapse after completion of members before removing shores or forms, provided suitable curing conditions have been obtained during the curing period.

1. 10 days for girders and beams.
2. 7 days for slabs.

3.4 ANCHORAGE

A. Veneer to Frame Walls:

1. Use adjustable veneer anchors.
2. Fasten anchor to stud through sheathing with self drilling and tapping screw, one at each end of loop type anchor.
3. Space anchors not more than 400 mm (16 inches) on center vertically at each stud.

B. Veneer to Concrete Walls:

1. Install dovetail slots in concrete vertically at 600 mm (2 feet) on centers.
2. Locate dovetail anchors at 400 mm (16 inch) maximum vertical intervals.
3. Anchor new masonry facing to existing concrete with corrugated wall ties spaced at 400 mm, (16 inch) maximum vertical intervals, and at 600 mm (2 feet) maximum horizontal intervals. Fasten ties to concrete with power actuated fasteners or concrete nails.

C. Masonry Facing to Backup and Cavity Wall Ties:

1. Use individual ties for new work.
2. Stagger ties in alternate courses, and space at 400 mm (16 inches) maximum vertically, and 600 mm (2 feet) horizontally.
3. At openings, provide additional ties spaced not more than 900 mm (3 feet) apart vertically around perimeter of opening, and within 300 mm (12 inches) from edge of opening.
4. Anchor new masonry facing to existing masonry with corrugated wall ties spaced at 400 mm (16 inch) maximum vertical intervals and at every second masonry unit horizontally. Fasten ties to masonry with masonry nails.
5. Option: Use joint reinforcing for multiple wythes and cavity wall ties spaced not more than 400 mm (16 inches) vertically.
6. Tie interior and exterior wythes of reinforced masonry walls together with individual ties. Provide ties at intervals not to exceed 600 mm (24 inches) on center horizontally, and 400 mm (16 inches) on center vertically. Lay ties in the same line vertically in order to facilitate vibrating of the grout pours.

D. Anchorage of Abutting Masonry:

1. Anchor interior 100 mm (4 inch) thick masonry partitions to exterior masonry walls with wall ties. Space ties at 600 mm (2 foot) maximum vertical intervals. Extend ties 100 mm (4 inches) minimum into masonry.
2. Anchor interior masonry bearing walls or interior masonry partitions over 100 mm (4 inches) thick to masonry walls with rigid wall anchors spaced at 400 mm (16 inch) maximum vertical intervals.
3. Anchor abutting masonry walls and partitions to concrete with dovetail anchors. Install dovetail slots vertically in concrete at centerline of abutting wall or partition. Locate dovetail anchors at 400 mm (16 inch) maximum vertical intervals. Secure anchors to existing wall with two 9 mm (3/8 inch) by 75 mm (3 inch) expansion bolts or two power-driven fasteners.
4. Anchor abutting interior masonry partitions to existing concrete and existing masonry construction, with corrugated wall ties. Extend ties at least 100 mm (4 inches) into joints of new masonry. Fastened to existing concrete and masonry construction, with powder actuated drive pins, nail or other means that provides rigid anchorage. Install anchors at 400 mm (16 inch) maximum vertical intervals.

E. Masonry Furring:

1. Anchor masonry furring less than 100 mm (4 inches) nominal thick to masonry walls or to concrete with corrugated wall ties or dovetail anchors.
2. Space not over 600 mm (2 feet) on centers in both directions.

F. Anchorage to Steel Beams or Columns:

1. Use adjustable beam anchors on each flange.
2. At columns weld the 6 mm (1/4 inch) steel rod to steel columns at 300 mm (12 inch) intervals, and place wire ties in masonry courses at 400 mm (16 inches) maximum vertically.

3.5 REINFORCEMENT

A. Joint Reinforcement:

1. Use as joint reinforcement in CMU wythe of combination brick and CMU, cavity walls, and single wythe concrete masonry unit walls or partitions.
2. Reinforcing may be used in lieu of individual ties for anchoring brick facing to CMU backup in exterior masonry walls.
3. Locate joint reinforcement in mortar joints at 400 mm (16 inch) maximum vertical intervals.

4. Additional joint reinforcement is required in mortar joints at both 200 mm (8 inches) and 400 (16 inches) above and below windows, doors, louvers and similar openings in masonry, except where other type anchors are required for anchorage of masonry to concrete structure.

B. Steel Reinforcing Bars:

1. Install in cells of hollow masonry units where required for vertical reinforcement and in bond beam units for lintels and bond beam horizontal reinforcement. Install in wall cavities of reinforced masonry walls where shown.
2. Use grade 60 bars if not specified otherwise.
3. Bond Beams:
 - a. Form Bond beams of load-bearing concrete masonry units filled with ASTM C476 grout and reinforced with 2-#15m (#5) reinforcing steel unless shown otherwise. Do not cut reinforcement.
 - b. Brake bond beams only at expansion joints and at control joints, if shown.

3.6 BRICK EXPANSION AND CMU CONTROL JOINTS.

- A. Provide brick expansion (BEJ) and CMU control (CJ) joints where shown on drawings.
- B. Keep joint free of mortar and other debris.
- C. Where joints occur in masonry walls.
 1. Install preformed compressible joint filler in brick wythe.
 2. Install cross shaped shear keys in concrete masonry unit wythe with preformed compressible joint filler on each side of shear key unless otherwise specified.
 3. Install filler, backer rod, and sealant on exposed faces.
- D. Use standard notched concrete masonry units (sash blocks) made in full and half-length units where shear keys are used to create a continuous vertical joint.
- E. Interrupt steel joint reinforcement at expansion and control joints unless otherwise shown.
- F. Fill opening in exposed face of expansion and control joints with sealant as specified in Section 07 92 00, JOINT SEALANTS.

3.7 BUILDING EXPANSION JOINTS

- A. Keep joint free of mortar. Remove mortar and other debris.
- B. Install non-combustible, compressible type joint filler to fill space completely except where sealant is shown on joints in exposed finish work.

- C. Where joints are on exposed faces, provide depth for backer rod and sealant as specified in Section 07 92 00, JOINT SEALANTS, unless shown otherwise.

3.8 ISOLATION SEAL

- A. Where full height walls or partitions lie parallel or perpendicular to and under structural beams or shelf angles, provide a separation between walls or partitions and bottom of beams or shelf angles not less than the masonry joint thickness unless shown otherwise.
- B. Insert in the separation, a continuous full width strip of non-combustible type compressible joint filler.
- C. Where exposed in finish work, cut back filler material in the joint enough to allow for the joint to be filled with sealant material specified in Section 07 92 00, JOINT SEALANTS.

3.9 BRICKWORK

- A. Lay clay brick in accordance with BIA Technical Note 11 series.
- B. Laying:
 - 1. Lay brick in running bond with course of masonry bonded at corners unless shown otherwise. Match bond of existing building on alterations and additions.
 - 2. Maintain bond pattern throughout.
 - 3. Do not use brick smaller than half-brick at any angle, corner, break or jamb.
 - 4. Where length of cut brick is greater than one half but less than a whole brick, maintain the vertical joint location of such units.
 - 5. Lay exposed brickwork joints symmetrical about center lines of openings.
 - 6. Do not structural bond multi wythe brick walls unless shown.
 - 7. Before starting work, lay facing brick on foundation wall and adjust bond to openings, angles, and corners.
 - 8. Lay brick for sills with wash and drip.
 - 9. Build solid brickwork as required for anchorage of items.
- C. Joints:
 - 1. Exterior and interior joint widths: Lay for three equal joints in 200 mm (eight inches) vertically, unless shown otherwise.
 - 2. Rake joints for pointing with colored mortar when colored mortar is not full depth.
- D. Weep Holes:

1. Install weep holes at 600 mm (24 inches) on center in bottom of vertical joints of exterior masonry veneer or cavity wall facing over foundations, bond beams, and other water stops in the wall.
2. Form weep holes using wicks made of mineral fiber insulation strips turned up 200 mm (8 inches) in cavity. Anchor top of strip to backup to securely hold in place.
3. Install sand or pea gravel in cavity approximately 75 mm (3 inches) high between weep holes.

E. Cavity Type Exterior Walls:

1. Keep air space clean of mortar accumulations and debris.
 - a. Clean cavity by use of hard rubber, wood or metal channel strips having soft material on sides contacting wythes.
 - b. Lift strips with wires before placing next courses of horizontal joint reinforcement or individual ties or adjustable cavity wall ties.
2. For each lift lay two courses of concrete masonry units, followed by six courses of brick facing.
3. Lay the interior wythe of the masonry wall full height where dampproofing is required on cavity face. Coordinate to install dampproofing prior to laying outer wythe.
4. Insulated Cavity Type Exterior Walls:
 - a. Install the insulation against the cavity face of inner masonry wythe.
 - b. Place insulation between rows of ties or joint reinforcing or bond to masonry surface with a bonding agent as recommended by the manufacturer of the insulation.
 - c. Lay the outer masonry wythe up with an air space between insulation and masonry units.
5. Veneer Framed Walls:
 - a. Build with 100 mm (4 inches) of face brick over sheathed stud wall with air space.
 - b. Keep air space clean of mortar accumulations and debris.

3.10 CONCRETE MASONRY UNITS

A. Kind and Users:

1. Provide special concrete masonry shapes as required, // including lintel and bond beam units, sash units, and corner units //. Use solid concrete masonry units, where full units cannot be used, or where needed for anchorage of accessories.

2. Provide solid load-bearing concrete masonry units or grout the cell of hollow units at jambs of openings in walls, where structural members impose loads directly on concrete masonry, and where shown.
3. Provide rounded corner (bullnose) shapes at opening jambs in exposed work and at exterior corners.
4. Do not use brick jambs in exposed finish work.
5. Use concrete building brick only as filler in backup material where not exposed.
6. Masonry assemblies shall meet the required fire resistance in fire rated partitions of type and construction that will provide fire rating as shown.

B. Laying:

1. Lay concrete masonry units with 10 mm (3/8 inch) joints, with a bond overlap of not less than 1/4 of the unit length, except where stack bond is required.
2. Do not wet concrete masonry units before laying.
3. Bond external corners of partitions by overlapping alternate courses.
4. Lay first course in a full mortar bed.
5. Set anchorage items as work progress.
6. Where ends of anchors, bolts, and other embedded items, project into voids of units, completely fill such voids with mortar or grout.
7. Provide a 6 mm (1/4 inch) open joint for caulking between existing construction, exterior walls, concrete work, and abutting masonry partitions.
8. Lay concrete masonry units with full face shell mortar beds and fill head joint beds for depth equivalent to face shell thickness.
9. Lay concrete masonry units so that cores of units, that are to be filled with grout, are vertically continuous with joints of cross webs of such cores completely filled with mortar. Unobstructed core openings not less than 50 mm (2 inches) by 75 mm (3 inches).
10. Do not wedge the masonry against the steel reinforcing. Minimum 13 mm (1/2 inch) clear distance between reinforcing and masonry units.
11. Install deformed reinforcing bars of sizes shown.
12. Steel reinforcement, at time of placement, free of loose flaky rust, mud, oil, or other coatings that will destroy or reduce bond.
13. Steel reinforcement in place before grouting.
14. Minimum clear distance between parallel bars: One bar diameter.
15. Hold vertical steel reinforcement in place by centering clips, caging devices, tie wire, or other approved methods, vertically at spacings noted.

16. Support vertical bars near each end and at intermediate intervals not exceeding 192 bar diameters.
17. Reinforcement shall be fully encased by grout or concrete.
18. Splice reinforcement or attach reinforcement to dowels by placing in contact and secured or by placing the reinforcement within 1/5 of the required bar splice length.
19. Stagger splices in adjacent horizontal reinforcing bars. Lap reinforcing bars at splices a minimum of 40 bar diameters.
20. Grout cells of concrete masonry units, containing the reinforcing bars, solid as specified under grouting.
21. Cavity and joint horizontal reinforcement may be placed as the masonry work progresses.

3.11 GROUTING

A. Preparation:

1. Clean grout space of mortar droppings before placing grout.
2. Close cleanouts.
3. Install vertical solid masonry dams across grout space for full height of wall at intervals of not more than 9000 mm (30 feet). Do not bond dam units into wythes as masonry headers.
4. Verify reinforcing bars are in cells of units or between wythes as shown.

B. Placing:

1. Place grout by hand bucket, concrete hopper, or grout pump.
2. Consolidate each lift of grout after free water has disappeared but before plasticity is lost.
3. Do not slush with mortar or use mortar with grout.
4. Interruptions:
 - a. When grouting must be stopped for more than an hour, top off grout 40 mm (1-1/2 inch) below top of last masonry course.
 - b. Grout from dam to dam on high lift method.
 - c. A longitudinal run of masonry may be stopped off only by raking back one-half a masonry unit length in each course and stopping grout 100 mm (4 inches) back of rake on low lift method.

C. Puddling Method:

1. Double wythe masonry constructed grouted in lifts not to exceed 300 mm (12 inches) or less than 50 mm (2 inches) wide.
2. Consolidate by puddling with a grout stick during and immediately after placing.

3. Grout the cores of concrete masonry units containing the reinforcing bars solid as the masonry work progresses.

D. Low Lift Method:

1. Construct masonry to a height of 1.5 m (5 ft) maximum before grouting.
2. Grout in one continuous operation and consolidate grout by mechanical vibration and reconsolidate after initial water loss and settlement has occurred.

E. High Lift Method:

1. Do not pour grout until masonry wall has properly cured a minimum of 4 hours.
2. Place grout in lifts not exceeding 1.5 m (5 ft).
3. Exception:
Where the following conditions are met, place grout in lifts not exceeding 3.86 m (12.67 ft).
 - a. The masonry has cured for at least 4 hours.
 - b. The grout slump is maintained between 254 and 279 mm (10 and 11 in).
 - c. No intermediate reinforced bond beams are placed between the top and the bottom of the pour height.
4. When vibrating succeeding lifts, extend vibrator 300 to 450 mm (12 to 18 inches) into the preceding lift to close any shrinkage cracks or separation from the masonry units.

3.12 PLACING REINFORCEMENT

- A. General: Clean reinforcement of loose rust, mill scale, earth, ice or other materials which will reduce bond to mortar or grout. Do not use reinforcement bars with kinks or bends not shown on the Contract Drawings or final shop drawings, or bars with reduced cross-section due to excessive rusting or other causes.
- B. Position reinforcement accurately at the spacing indicated. Support and secure vertical bars against displacement. Horizontal reinforcement may be placed as the masonry work progresses. Where vertical bars are shown in close proximity, provide a clear distance between bars of not less than the nominal bar diameter or 25 mm (1 inch), whichever is greater.
- C. For columns, piers and pilasters, provide a clear distance between vertical bars as indicated, but not less than 1 1/2 times the nominal bar diameter or 38 mm (1-1/2 inches), whichever is greater. Provide lateral ties as indicated.

- D. Splice reinforcement bars where shown; do not splice at other places unless accepted by the Resident Engineer. Provide lapped splices, unless otherwise indicated. In splicing vertical bars or attaching to dowels, lap ends, place in contact and wire tie.
- E. Provide not less than minimum lap as indicated on shop drawings, or if not indicated, as required by governing code.
- F. Embed metal ties in mortar joints as work progresses, with a minimum mortar cover of 15 mm (5/8 inch) on exterior face of walls and 13 mm (1/2 inch) at other locations.
- G. Embed prefabricated horizontal joint reinforcement as the work progresses, with a minimum cover of 15 mm (5/8 inch) on exterior face of walls and 13 mm (1/2 inch) at other locations. Lap joint reinforcement not less than 150 mm (6 inches) at ends. Use prefabricated "L" and "T" sections to provide continuity at corners and intersections. Cut and bend joint reinforcement as recommended by manufacturer for continuity at returns, offsets, column fireproofing, pipe enclosures and other special conditions.
- H. Anchoring: Anchor reinforced masonry work to supporting structure as indicated.
- I. Anchor reinforced masonry walls to non-reinforced masonry where they intersect.

3.13 INSTALLATION OF REINFORCED CONCRETE UNIT MASONRY

- A. Do not wet concrete masonry units (CMU).
- B. Lay CMU units with full-face shell mortar beds. Fill vertical head joints (end joints between units) solidly with mortar from face of unit to a distance behind face equal to not less than the thickness of longitudinal face shells. Solidly bed cross-webs of starting courses in mortar. Maintain head and bed joint widths shown, or if not shown, provide 10 mm (3/8 inch) joints.
- C. Where solid CMU units are shown, lay with full mortar head and bed joints.
- D. Walls:
 - 1. Pattern Bond: Lay CMU wall units in 1/2-running bond with vertical joints in each course centered on units in courses above and below, unless otherwise indicated. Bond and interlock each course at corners and intersections. Use special-shaped units where shown, and as required for corners, jambs, sash, control joints, lintels, bond beams and other special conditions.

2. Maintain vertical continuity of core or cell cavities, which are to be reinforced and grouted, to provide minimum clear dimension indicated and to provide minimum clearance and grout coverage for vertical reinforcement bars. Keep cavities free of mortar. Solidly bed webs in mortar where adjacent to reinforced cores or cells.
3. Where horizontal reinforced beams (bond beams) are shown, use special units or modify regular units to allow for placement of continuous horizontal reinforcement bars. Place small mesh expanded metal lath or wire screening in mortar joints under bond beam courses over cores or cells of non-reinforced vertical cells, or provide units with solid bottoms.

E. Columns, Piers and Pilasters:

1. Use CMU units of the size, shape and number of vertical core spaces shown. If not shown, use units which provide minimum clearances and grout coverage for number and size of vertical reinforcement bars shown.
2. Provide pattern bond shown, or if not shown, alternate head joints in vertical alignment.

F. Grouting:

1. Use "Fine Grout" per ASTM C476 for filling spaces less than 100 mm (4 inches) in one or both horizontal directions.
2. Use "Coarse Grout" per ASTM C476 for filling 100 mm (4 inch) spaces or larger in both horizontal directions.
3. Grouting Technique: At the Contractor's option, use either low-lift or high-lift grouting techniques subject to requirements which follow.

G. Low-Lift Grouting:

1. Provide minimum clear dimension of 50 mm (2 inches) and clear area of 5160 mm² (8 square inches) in vertical cores to be grouted.
2. Place vertical reinforcement prior to grouting of CMU. Extend above elevation of maximum pour height as required for splicing. Support in position at vertical intervals not exceeding 192 bar diameters nor 3 m (10 feet).
3. Lay CMU to maximum pour height. Do not exceed 1.5 m (5 foot) height, or if bond beam occurs below 1.5 m (5 foot) height, stop pour 38 mm (1-1/2 in) below top of bond beam.
4. Pour grout using chute container with spout or pump hose. Rod or vibrate grout during placing. Place grout continuously; do not interrupt pouring of grout for more than one hour. Terminate grout pours 38 mm (1-1/2 inches) below top course of pour.

5. Bond Beams: Stop grout in vertical cells 38 mm (1-1/2 inches) below bond beam course. Place horizontal reinforcement in bond beams; lap at corners and intersections as shown. Place grout in bond beam course before filling vertical cores above bond beam.

H. High-Lift Grouting:

1. Do not use high-lift grouting technique for grouting of CMU unless minimum cavity dimension and area is 75 mm (3 inches) and 6450 mm² (10 square inches), respectively.
2. Provide cleanout holes in first course at all vertical cells which are to be filled with grout.
3. Use units with one face shell removed and provide temporary supports for units above, or use header units with concrete brick supports, or cut openings in one face shell.
4. Construct masonry to full height of maximum grout pour specified, prior to placing grout.
5. Limit grout lifts to a maximum height of 1.5 m (5 feet) and grout pour to a maximum height of 7.3 m (24 feet), for single wythe hollow concrete masonry walls, unless otherwise indicated.
6. Place vertical reinforcement before grouting. Place before or after laying masonry units, as required by job conditions. Tie vertical reinforcement to dowels at base of masonry where shown and thread CMU over or around reinforcement. Support vertical reinforcement at intervals not exceeding 192 bar diameters nor 3 m (10 feet).
7. Where individual bars are placed after laying masonry, place wire loops extending into cells as masonry is laid and loosed before mortar sets. After insertion of reinforcement bar, pull loops and bar to proper position and tie free ends.
8. Where reinforcement is prefabricated into cage units before placing, fabricate units with vertical reinforcement bars and lateral ties of the size and spacing indicated.
9. Place horizontal beam reinforcement as the masonry units are laid.
10. Embed lateral tie reinforcement in mortar joints where indicated. Place as masonry units are laid, at vertical spacing shown.
11. Where lateral ties are shown in contact with vertical reinforcement bars, embed additional lateral tie reinforcement in mortar joints. Place as shown, or if not shown, provide as required to prevent grout blowout or rupture of CMU face shells, but provide not less than 4.1 mm diameter (8 gage) wire ties spaced 400 mm (16 inches) o.c. for members with 500 mm (20 inches) or less side dimensions, and 200 mm

(8 inches) o.c. for members with side dimensions exceeding 500 mm (20 inches).

12. Preparation of Grout Spaces: Prior to grouting, inspect and clean grout spaces. Remove dust, dirt, mortar droppings, loose pieces of masonry and other foreign materials from grout spaces. Clean reinforcement and adjust to proper position. Clean top surface of structural members supporting masonry to ensure bond. After final cleaning and inspection, close cleanout holes and brace closures to resist grout pressures.
13. Do not place grout until entire height of masonry to be grouted has attained sufficient strength to resist displacement of masonry units and breaking of mortar bond. Install shores and bracing, if required, before starting grouting operations.
14. Place grout by pumping into grout spaces unless alternate methods are acceptable to the COTR.
15. Limit grout pours to sections which can be completed in one working day with not more than one hour interruption of pouring operation. Place grout in lifts which do not exceed 1.5 m (5 feet). Allow not less than 30 minutes, nor more than one hour between lifts of a given pour. Mechanically consolidate each grout lift during pouring operation.
16. Place grout in lintels or beams over openings in one continuous pour.
17. Where bond beam occurs more than one course below top of pour, fill bond beam course to within 25 mm (1 inch) of vertically reinforced cavities, during construction of masonry.
18. When more than one pour is required to complete a given section of masonry, extend reinforcement beyond masonry as required for splicing. Pour grout to within 38 mm (1-1/2 inches) of top course of first pour. After grouted masonry is cured, lay masonry units and place reinforcement for second pour section before grouting. Repeat sequence if more pours are required.

3.14 CLEANING AND REPAIR

A. General:

1. Clean exposed masonry surfaces on completion.
2. Protect adjoining construction materials and landscaping during cleaning operations.
3. Cut out defective exposed new joints to depth of approximately 19 mm (3/4 inch) and repoint.

4. Remove mortar droppings and other foreign substances from wall surfaces.

B. Brickwork:

1. First wet surfaces with clean water, then wash down with a solution of soapless detergent. Do not use muriatic acid.
2. Brush with stiff fiber brushes while washing, and immediately thereafter hose down with clean water.
3. Free clean surfaces of traces of detergent, foreign streaks, or stains of any nature.

C. Concrete Masonry Units:

1. Immediately following setting, brush exposed surfaces free of mortar or other foreign matter.
2. Allow mud to dry before brushing.

D. Brick Units:

1. Clean as recommended by tile or brick manufacturer. Protect light colored mortar joints from discoloration during cleaning.
2. Prepare schedule of test locations.

- - - E N D - - -

**SECTION 05 12 00
STRUCTURAL STEEL FRAMING**

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies structural steel shown and classified by Section 2, Code of Standard Practice for Steel Buildings and Bridges.

1.2 RELATED WORK:

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Painting: Section 09 91 00, PAINTING.
- C. Steel Decking: Section 05 31 00, STEEL DECKING.
- D. Fireproofing: Section 07 81 00, APPLIED FIREPROOFING.

1.3 QUALITY ASSURANCE:

- A. Fabricator and erector shall maintain a program of quality assurance in conformance with Section 8, Code of Standard Practice for Steel Buildings and Bridges. Work shall be fabricated in an AISC certified Category Complex Steel Building Structures fabrication plant.
- B. Before authorizing the commencement of steel erection, the controlling contractor shall ensure that the steel erector is provided with the written notification required by 29 CFR 1926.752. Provide copy of this notification to the Contracting Officer's Technical Representative (COTR).

1.4 TOLERANCES:

Fabrication tolerances for structural steel shall be held within limits established by ASTM A6, by Section 7, Code of Standard Practice for Buildings and Bridges, and by Standard Mill Practice - General Information (AISC ASD Manual, Ninth Edition, Page 1-145, except as follows:

- A. Elevation tolerance for top surface of steel beams and girders at connections to columns at time floor is erected is 13 mm (1/2 inch).
- B. Elevation tolerance for closure plates at the building perimeter and at slab openings prior to concrete placement is 6 mm (1/4 inch).

1.5 DESIGN:

- A. Connections: Design and detail all connections for each member size, steel grade and connection type to resist the loads and reactions indicated on the drawings or specified herein. Use details consistent with the details shown on the Drawings, supplementing where necessary. The details shown on the Drawings are conceptual and do not indicate the required weld sizes or number of bolts unless specifically noted. Use

rational engineering design and standard practice in detailing, accounting for all loads and eccentricities in both the connection and the members. Promptly notify the COTR of any location where the connection design criteria is not clearly indicated. The design of all connections is subject to the review and acceptance of the COTR. Submit structural calculations prepared and sealed by a qualified engineer registered in the state where the project is located. Submit calculations for review before preparation of detail drawings.

1.6 REGULATORY REQUIREMENTS:

- A. AISC: Specification for Structural Steel Buildings - Allowable Stress Design.
- B. AISC: Code of Standard Practice for Steel Buildings and Bridges.

1.7 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop and Erection Drawings: Complete
- C. Certificates:
 - 1. Welding materials.
 - 2. Shop coat primer paint.
- D. Test Reports:
 - 1. Welders' qualifying tests.
- E. Design Calculations and Drawings:
 - 1. Connection calculations, if required.
- F. Record Surveys.

1.8 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Institute of Steel Construction (AISC):
 - 1. Specification for Structural Steel Buildings - Allowable Stress Design and Plastic Design (Second Edition, 2005)
 - 2. Load and Resistance Factor Design Specification for Structural Steel Buildings (Second Edition, 1995)
 - 3. Code of Standard Practice for Steel Buildings and Bridges (2010).
- C. American National Standards Institute (ANSI):
 - B18.22.1-65 (R2008).....Plain Washers
 - B18.22M-81 (R2000).....Metric Plain Washers
- D. American Society for Testing and Materials (ASTM):

- A6/A6M-09.....Standard Specification for General Requirements
for Rolled Structural Steel Bars, Plates,
Shapes, and Sheet Piling
- A36/A36M-08.....Standard Specification for Carbon Structural
Steel
- A325-10.....Standard Specification for Structural Bolts,
Steel, Heat Treated, 120/105 ksi Minimum Tensile
Strength
- A490-10.....Standard Specification for Heat-Treated Steel
Structural Bolts 150 ksi Minimum Tensile
Strength
- A500/A500M-10.....Standard Specification for Cold Formed Welded
and Seamless Carbon Steel Structural Tubing in
Rounds and Shapes
- A501-07.....Standard Specification for Hot-Formed Welded and
Seamless Carbon Steel Structural Tubing
- A992/A992M-06.....Standard Specification for Structural Steel
Shapes
- E. American Welding Society (AWS):
D1.1/D1.1M-10.....Structural Welding Code-Steel
- F. Research Council on Structural Connections (RCSC) of The Engineering
Foundation:
Specification for Structural Joints Using ASTM A325 or A490 Bolts
- G. Military Specifications (Mil. Spec.):
MIL-P-21035.....Paint, High Zinc Dust Content, Galvanizing,
Repair
- H. Occupational Safety and Health Administration (OSHA):
29 CFR Part 1926-2001...Safety Standards for Steel Erection

PART 2 - PRODUCTS

2.1 MATERIALS:

- A. Structural Steel: W and S Shapes A992
Other Shapes: ASTM A36.
- B. Structural Tubing: ASTM A500, Grade B.
- C. Structural Tubing: ASTM A501.
- D. Bolts, Nuts and Washers:
1. High-strength bolts, including nuts and washers: ASTM A325 or A490.
 2. Bolts and nuts, other than high-strength: ASTM A307, Grade A.
 3. Plain washers, other than those in contact with high-strength bolt heads and nuts: ANSI Standard B18.22.1.

E. Zinc Coating: ASTM A123.

F. Galvanizing Repair Paint: Mil. Spec. MIL-P-21035.

PART 3 - EXECUTION

3.1 CONNECTIONS (SHOP AND FIELD) :

- A. Welding: Welding in accordance with AWS D1.1. Welds shall be made only by welders and welding operators who have been previously qualified by tests as prescribed in AWS D1.1 to perform type of work required.
- B. High-Strength Bolts: High-strength bolts tightened to a bolt tension not less than proof load given in Specification for Structural Joints Using ASTM A325 or A490 Bolts. Tightening done with properly calibrated wrenches, by turn-of-nut method or by use of direct tension indicators (bolts or washers). Tighten bolts in connections identified as slip-critical using Direct Tension Indicators or the turn-of-the-nut method. Twist-off torque bolts are not an acceptable alternate fastener for slip critical connections.

3.2 FABRICATION:

Fabrication in accordance with Chapter M, Specification for Steel Buildings - Allowable Stress Design and Plastic Design.

3.3 SHOP PAINTING:

- A. General: Shop paint steel with primer in accordance with Section 6, Code of Standard Practice for Steel Buildings and Bridges.
- B. Shop paint for steel surfaces is specified in Section 09 91 00, PAINTING.
- C. Do not apply paint to following:
 - 1. Surfaces within 50 mm (2 inches) of joints to be welded in field.
 - 2. Surfaces which will be encased in concrete.
 - 3. Surfaces which will receive sprayed on fireproofing.
- D. Zinc Coated (Hot Dip Galvanized) per ASTM A123 (after fabrication):
Touch-up after erection: Clean and wire brush any abraded and other spots worn through zinc coating, including threaded portions of bolts and welds and touch-up with galvanizing repair paint.

3.4 ERECTION:

- A. General: Erection in accordance with Section 7, Code of Standard Practice for Steel Buildings and Bridges.
- B. Temporary Supports: Temporary support of structural steel frames during erection in accordance with Section 7, Code of Standard Practice for Steel Buildings and Bridges.

3.5 FIELD PAINTING:

- A. After erection, touch-up steel surfaces specified to be shop painted. After welding is completed, clean and prime areas not painted due to field welding.
- B. Finish painting of steel surfaces is specified in Section 09 91 00, PAINTING.

3.6 SURVEY:

Upon completion of finish bolting or welding on any part of the work, and prior to start of work by other trades that may be supported, attached, or applied to the structural steel work, submit a certified report of survey to COTR for approval. Reports shall be prepared by Registered Land Surveyor or Registered Civil Engineer as specified in Section 01 00 00, GENERAL REQUIREMENTS. Report shall specify that location of structural steel is acceptable for plumbness, level and alignment within specified tolerances specified in the AISC Manual.

- - - E N D - - -

**SECTION 05 31 00
STEEL DECKING**

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies material and services required for installation of steel decking as shown and specified.

1.2 RELATED WORK:

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.

1.3 DESIGN REQUIREMENTS:

- A. Design steel decking in accordance with AISI publication, "Specification for the Design of Cold-formed Steel Structural Members" except as otherwise shown or specified.
- B. Design all elements with the latest published version of applicable codes.

1.4 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Shop and erection drawings showing decking unit layout, connections to supporting members, and similar information necessary for completing installation as shown and specified, including supplementary framing, sump pans, cant strips, cut openings, special jointing or other accessories. Show welding, side lap, closure, deck reinforcing and closure reinforcing details. Show openings required for work of other trades, including openings not shown on structural drawings. Indicate where temporary shoring is required to satisfy design criteria.
- C. Manufacturer's Literature and Data: Showing steel decking section properties and specifying structural characteristics.
- D. Insurance Certification: Assist the Government in preparation and submittal of roof installation acceptance certification as may be necessary in connection with fire and extended coverage insurance.

1.5 QUALITY ASSURANCE:

- A. FM Listing: Provide metal roof deck units which have been evaluated by Factory Mutual Global and are listed in "Factory Mutual Research Approval Guide" for "Class 1" fire rated construction.

1.6 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - A36/A36M-08.....Standard Specification for Carbon Structural Steel
 - A611-97.....Standard Specification for Structural Steel (SS), Sheet, Carbon, Cold-Rolled
 - A653/A653M-08.....Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvanized) by the Hot-Dip Process
- C. American Iron and Steel Institute (AISI):
 - 1. Specification and Commentary for the Design of Cold-Formed Steel Structural Members
- D. American Welding Society (AWS):
 - D1.3-08.....Structural Welding Code - Sheet Steel
- E. Factory Mutual (FM Global):
 - 1. Loss Prevention Data Sheet 1-28: Wind Loads to Roof Systems and Roof Deck Securement
 - 2. Factory Mutual Research Approval Guide (2002)
- F. Military Specifications (Mil. Spec.)
 - MIL-P-21035B.....Paint, High Zinc Dust Content, Galvanizing Repair

PART 2 - PRODUCTS**2.1 MATERIALS:**

- A. Steel Decking: ASTM A653, Structural Quality.
- B. Galvanizing: ASTM A653, G60.
- C. Galvanizing Repair Paint: Mil. Spec. MIL-P-21035B.
- D. Miscellaneous Steel Shapes: ASTM A36.
- E. Welding Electrode: E60XX minimum.
- F. Sheet Metal Accessories: ASTM A653, galvanized, unless noted otherwise. Provide accessories of every kind required to complete the installation of metal decking in the system shown. Finish sheet metal items to match deck including, but not limited to, the following items:
 - 1. Metal Cover Plates: For end-abutting deck units, to close gaps at changes in deck direction, columns, walls and openings. Same quality as deck units but not less than 1.3 mm (18 gauge) sheet steel.

2. Continuous Sheet Metal Edging: At openings and roof deck edges. Same quality as deck units but not less than 1.3 mm (18 gauge) steel. Side and end closures supporting concrete and their attachment to supporting steel shall be designed by the manufacturer to safely support the wet weight of concrete and construction loads. The deflection of cantilever closures shall be limited to 3 mm (1/8 inch) maximum.
3. Metal Closure Strips: For openings between decking and other construction, of not less than 1.3 mm (18 gauge) sheet steel of the same quality as the deck units. Form to the configuration required to provide tight-fitting closures at open ends of flutes and sides of decking.
4. Cant Strips: Provide bent metal 45 degree leg cant strips where indicated on the Drawings. Fabricate cant strips from 1 mm (20 gauge) metal with a minimum 125 mm (5 inch) face width.
5. Seat Angles for Deck: Provide where a beam does not frame into a column.
6. Sump Pans for Roof Drains: Fabricated from single piece of minimum 1.9 mm (14 gauge) galvanized sheet steel with level bottoms and sloping sides to direct water flow to drain, unless otherwise shown. Provide sump pans of adequate size to receive roof drains and with bearing flanges not less than 75 mm (3 inches) wide. Recess pans not less than 38 mm (1 1/2 inches) below roof deck surface, unless otherwise shown or required by deck configuration. Holes for drains will be cut in the field.

2.2 REQUIREMENTS:

- A. Provide steel decking of the type, depth, gauge, and section properties as shown.
- B. Metal Form Deck - Type 1: Single pan fluted units utilized as a permanent form for reinforced concrete slabs. Comply with the depth and gauge requirements as shown on the Contract Documents.
 1. Finish: Galvanized G-60.
- C. Metal Roof Deck: Single pan fluted units with flat horizontal top surfaces utilized to act as a permanent support for all superimposed loads. Comply with the depth and minimum gauge requirements as shown on the Contract Documents.
 1. Deck type see Drawings.
 2. Finish: Galvanized G-60.

- D. Do not use steel deck for hanging supports for any type or kind of building components including suspended ceilings, electrical light fixtures, plumbing, heating, or air conditioning pipes or ducts or electrical conduits.

PART 3 - EXECUTION

3.1 ERECTION:

- A. Do not start installation of metal decking until corresponding steel framework has been plumbed, aligned and completed and until temporary shoring, where required, has been installed. Remove any oil, dirt, paint, ice, water and rust from steel surfaces to which metal decking will be welded.
- B. Coordinate and cooperate with structural steel erector in locating decking bundles to prevent overloading of structural members.
- C. Do not use floor deck units for storage or working platforms until permanently secured. Do not overload deck units once placed. Replace any deck units that become damaged after erection and prior to casting concrete at no cost to the Government.
- D. Place steel decking units at right angles to supporting members. End laps of sheets of roof deck shall be a minimum of 50 mm (2 inches) and shall occur over supports.
- E. Fastening Deck Units:
 - 1. Fasten floor deck units to steel supporting members by not less than 16 mm (5/8 inch) diameter puddle welds or elongated welds of equal strength, spaced not more than 305 mm (12 inches) o.c. with a minimum of two welds per unit at each support. Where two units abut, fasten each unit individually to the supporting steel framework.
 - 2. Tack weld or use self-tapping No. 8 or larger machine screws at 915 mm (3 feet) o.c. for fastening end closures. Only use welds to attach longitudinal end closures.
 - 3. Weld side laps of adjacent floor deck units that span more than 1524 mm (5 feet). Fasten at midspan or 915 mm (3 feet) o.c., whichever is smaller.
 - 4. Fasten roof deck units to steel supporting members by not less than 16 mm (5/8 inch) diameter puddle welds or elongated welds of equal strength, spaced not more than 305 mm (12 inches) o.c. at every support, and at closer spacing where required for lateral force resistance by diaphragm action. In addition, secure deck to each supporting member in ribs where side laps occur. Power driven fasteners may be used in lieu of welding for roof deck if strength

equivalent to the welding specified above is provided. Submit test data and design calculations verifying equivalent design strength.

5. Mechanically fasten side laps of adjacent roof deck units with spans greater than 1524 mm (5 feet) between supports, at intervals not exceeding 915 mm (3 feet) o.c., or midspan, whichever is closer, using self-tapping No. 8 or larger machine screws.
6. Provide any additional fastening necessary to comply with the requirements of Underwriters Laboratories and/or Factory Mutual to achieve the required ratings.

F. Cutting and Fitting:

1. Cut all metal deck units to proper length in the shop prior to shipping.
2. Field cutting by the metal deck erector is restricted to bevel cuts, notching to fit around columns and similar items, and cutting openings that are located and dimensioned on the Structural Drawings.
3. Other penetrations shown on the approved metal deck shop drawings but not shown on the Structural Drawings are to be located, cut and reinforced by the trade requiring the opening.
4. Make all cuts neat and trim using a metal saw, drill or punchout device; cutting with torches is expressly prohibited.
5. Do not make any cuts in the metal deck that are not shown on the approved metal deck drawings. If an additional opening not shown on the approved shop drawings is required, submit a sketch, to scale, locating the required new opening and any other openings and supports in the immediate area. Do not cut the opening until the sketch has been reviewed and accepted by the COTR. Provide any additional reinforcing or framing required for the opening at no cost to the Government. Failure to comply with these requirements is cause for rejection of the work and removal and replacement of the affected metal deck.
6. Reinforcement at Openings: Provide additional metal reinforcement and closure pieces as required for strength, continuity of decking, and support of other work shown.

3.2 WELDING:

Welds shall be made only by welders and welding operators who have been previously qualified by tests as prescribed in AWS D1.3.

3.3 FIELD REPAIR:

1. Areas scarred during erection.
2. Welds to be thoroughly cleaned and touched-up. Touch-up paint for zinc-coated units shall be zinc rich galvanizing repair paint.

541-12-110

LOUIS STOKES VAMC CLEVELAND

- - - E N D - - -

STEEL DECKING
05 31 00 - 6

**SECTION 05 40 00
COLD-FORMED METAL FRAMING**

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies materials and services required for installation of cold-formed steel, including tracks and required accessories as shown and specified. This Section includes the following:
1. Exterior non-load-bearing steel stud curtain wall.
 2. Framing for masonry.
 3. Framing for composite metal panels.

1.2 RELATED WORK:

- A. Structural steel framing: Section 05 12 00, STRUCTURAL STEEL FRAMING.
- B. Metal panels: Section 07 40 00, METAL WALL PANELS
- C. Non-load-bearing metal stud framing assemblies: Section 09 22 16, NON-STRUCTURAL METAL FRAMING.
- D. Gypsum board assemblies: Section 09 29 00, GYPSUM BOARD.
- E. Curtain Wall System: Section 08 44 13, GLAZED ALUMINUM CURTAIN WALLS.

1.3 DESIGN REQUIREMENTS:

- A. Design steel in accordance with American Iron and Steel Institute Publication "Specification for the Design of Cold-Formed Steel Structural Members", except as otherwise shown or specified.
- B. Structural Performance: Engineer, fabricate and erect cold-formed metal framing with the minimum physical and structural properties indicated.
- C. Structural Performance: Engineer, fabricate, and erect cold-formed metal framing to withstand design loads within limits and under conditions required.
1. Design Loads: As indicated.
 2. Design framing systems to withstand design loads without deflections greater than the following:
 - a. Exterior Non-load-Bearing Curtain Wall: Lateral deflection of 1/600 of the wall height.
 - b. Other Exterior Non-load-Bearing wall: Lateral deflection of 1/240 of the wall height for backup of metal panel systems and 1/600 of the wall height for backup of masonry systems.
 3. Design framing systems to provide for movement of framing members without damage or overstressing, sheathing failure, connection failure, undue strain on fasteners and anchors, or other detrimental

- effects when subject to a maximum ambient temperature change (range) of 67 degrees C (120 degrees F).
4. Design framing system to accommodate deflection of primary building structure and construction tolerances, and to maintain clearances at openings.
 5. Design exterior non-load-bearing curtain wall framing to accommodate lateral deflection without regard to contribution of sheathing materials.
 6. Engineering Responsibility: Engage a fabricator who assumes undivided responsibility for engineering cold-formed metal framing by employing a qualified professional engineer to prepare design calculations, shop drawings, and other structural data.

1.4 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Shop and erection drawings showing steel unit layout, connections to supporting members, and information necessary to complete installation as shown and specified.
- C. Manufacturer's Literature and Data: Showing steel component sections and specifying structural characteristics.
- D. For cold-formed metal framing indicated to comply with certain design loadings, include structural analysis data sealed and signed by the qualified professional engineer who was responsible for its preparation.

1.5 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Iron and Steel Institute (AISI):
Specification and Commentary for the Design of Cold-Formed Steel Structural Members (1996)
- C. American Society of Testing and Materials (ASTM):
A36/A36M-08.....Standard Specifications for Carbon Structural Steel
A123/A123M-09.....Standard Specifications for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
A153/A153M-09.....Standard Specifications for Zinc Coating (Hot-Dip) on Iron and Steel Hardware

- A307-10.....Standard Specifications for Carbon Steel Bolts
and Studs
- A653/A653M-10.....Standard Specifications for Steel Sheet, Zinc-
Coated (Galvanized) or Zinc-Iron Alloy-Coated
(Galvannealed) by the Hot-Dip Process
- C1107/C1107M-08.....Standard Specifications for Packaged Dry,
Hydraulic-Cement Grout (Non-shrink)
- E488-96 (R2003) Standard Test Methods for Strength of Anchors
in Concrete and Masonry Elements
- E1190-95 (R2007)Standard Test Methods for Strength of Power-
Actuated Fasteners Installed in Structural
Members
- D. American Welding Society (AWS):
- D1.3/D1.3M-08.....Structural Welding Code-Sheet Steel
- E. Military Specifications (Mil. Spec.):
- MIL-P-21035B.....Paint, High Zinc Dust Content, Galvanizing
Repair

PART 2 - PRODUCTS

2.1 MATERIALS:

- A. Sheet Steel for joists, studs and accessories 16 gage and heavier: ASTM A653, structural steel, zinc coated G60, with a yield of 340 MPa (50 ksi) minimum.
- B. Sheet Steel for joists, studs and accessories 18 gage and lighter: ASTM A653, structural steel, zinc coated G60, with a yield of 230 MPa (33 ksi) minimum.
- C. Galvanizing Repair Paint: MIL-P-21035B.
- D. Nonmetallic, Non-shrink Grout: Premixed, nonmetallic, noncorrosive, nonstaining grout containing selected silica sands, Portland cement, shrinkage-compensating agents, plasticizing and water-reducing agents, complying with ASTM C1107, with fluid consistency and a 30 minute working time.

2.2 WALL FRAMING:

- A. Steel Studs: Manufacturer's standard C-shaped steel studs of web depth indicated, with lipped flanges, and complying with the following:
1. Minimum Design Uncoated-Steel Thickness:

1.20 mm (0.0474 inch)

2. Minimum Flange Width: 1-5/8 inches
3. Web: Unpunched.

B. Steel Track: Manufacturer's standard U-shaped steel track, unpunched, of web depths indicated, with straight flanges, and complying with the following:

1. Design Uncoated-Steel Thickness: Matching steel studs.
2. Flange Width: Manufacturer's standard deep flange where indicated, standard flange elsewhere.

2.3 FRAMING ACCESSORIES:

- A. Fabricate steel framing accessories of the same material and finish used for framing members, with a minimum yield strength of 230 MPa (33 ksi).
- B. Provide accessories of manufacturer's standard thickness and configuration, unless otherwise indicated, as follows:
1. Supplementary framing.
 2. Bracing, bridging, and solid blocking.
 3. Deflection track and vertical slide clips.

2.4 ANCHORS, CLIPS, AND FASTENERS:

- A. Steel Shapes and Clips: ASTM A36, zinc coated by the hot-dip process according to ASTM A123.
- B. Cast-in-Place Anchor Bolts and Studs: ASTM A307, Grade A, zinc coated by the hot-dip process according to ASTM A153.
- C. Expansion Anchors: Fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 5 times the design load, as determined by testing per ASTM E488 conducted by a qualified independent testing agency.
- D. Power-Actuated Anchors: Fastener system of type suitable for application indicated, fabricated from corrosion-resistant materials, with capability to sustain, without failure, a load equal to 10 times the design load, as determined by testing per ASTM E1190 conducted by a qualified independent testing agency.
- E. Mechanical Fasteners: Corrosion-resistant coated, self-drilling, self-threading steel drill screws. Low-profile head beneath sheathing, manufacturer's standard elsewhere.

2.5 REQUIREMENTS:

- A. Welding in accordance with AWS D1.3
- B. Furnish members and accessories by one manufacturer only.

PART 3 - EXECUTION**3.1 FABRICATION:**

- A. Framing components may be preassembled into panels. Panels shall be square with components attached.
- B. Cut framing components squarely or as required for attachment. Cut framing members by sawing or shearing; do not torch cut.
- C. Hold members in place until fastened.
- D. Fasten cold-formed metal framing members by welding or screw fastening, as standard with fabricator. Wire tying of framing members is not permitted.
 - 1. Comply with AWS requirements and procedures for welding, appearance and quality of welds, and methods used in correcting welding work.
 - 2. Locate mechanical fasteners and install according to cold-formed metal framing manufacturer's instructions with screw penetrating joined members by not less than 3 exposed screw threads.
- E. Where required, provide specified insulation in double header members and double jamb studs which will not be accessible after erection.

3.2 ERECTION:

- A. Handle and lift prefabricated panels in a manner as to not distort any member.
- B. Securely anchor tracks to supports as shown.
- C. At butt joints, securely anchor two pieces of track to same supporting member or butt-weld or splice together.
- D. Plumb, align, and securely attach studs to flanges or webs of both upper and lower tracks.
- E. Install jack studs above and below openings and as required to furnish support. Securely attach jack studs to supporting members.
- F. Install headers in all openings that are larger than the stud spacing in that wall.
- G. Attach bridging for studs in a manner to prevent stud rotation. Space bridging rows as shown.
- H. Studs in one piece for their entire length, splices will not be permitted.
- I. Provide end blocking where joist ends are not restrained from rotation.
- J. Provide temporary bracing and leave in place until framing is permanently stabilized.
- K. Do not bridge building expansion joints with cold-formed metal framing. Independently frame both sides of joints.

- L. Fasten reinforcement plate over web penetrations that exceed size of manufacturer's standard punched openings.

3.3 TOLERANCES:

- A. Vertical alignment (plumbness) of studs shall be within 1/960th of the span.
- B. Horizontal alignment (levelness) of walls shall be within 1/960th of their respective lengths.
- C. Spacing of studs shall not be more than 3 mm (1/8 inch) +/- from the designed spacing providing that the cumulative error does not exceed the requirements of the finishing materials.

3.4 FIELD REPAIR:

Touch-up damaged galvanizing with galvanizing repair paint.

- - - E N D - - -

SECTION 05 50 00
METAL FABRICATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies items and assemblies fabricated from structural steel shapes and other materials as shown and specified.
- B. Items specified.
 - 1. Loose Lintels
 - 2. Shelf Angles

1.2 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
 - 1. Each item specified, showing complete detail, location in the project, material and size of components, method of joining various components and assemblies, finish, and location, size and type of anchors.
 - 2. Mark items requiring field assembly for erection identification and furnish erection drawings and instructions.
 - 3. Provide templates and rough-in measurements as required.
- C. Manufacturer's Certificates:
 - 1. Live load designs as specified.
- D. Design Calculations for specified live loads including dead loads.
- E. Furnish setting drawings and instructions for installation of anchors to be preset into concrete and masonry work, and for the positioning of items having anchors to be built into concrete or masonry construction.

1.3 QUALITY ASSURANCE

- A. Each manufactured product shall meet, as a minimum, the requirements specified, and shall be a standard commercial product of a manufacturer regularly presently manufacturing items of type specified.
- B. Each product type shall be the same and be made by the same manufacturer.
- C. Assembled product to the greatest extent possible before delivery to the site.
- D. Include additional features, which are not specifically prohibited by this specification, but which are a part of the manufacturer's standard commercial product.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME):
- B18.6.1-97Wood Screws
 - B18.2.2-87(R2005)Square and Hex Nuts
- C. American Society for Testing and Materials (ASTM):
- A36/A36M-08Structural Steel
 - A47-99(R2009)Malleable Iron Castings
 - A48-03(R2008)Gray Iron Castings
 - A53-10Pipe, Steel, Black and Hot-Dipped, Zinc-Coated
Welded and Seamless
 - A123-09Zinc (Hot-Dip Galvanized) Coatings on Iron and
Steel Products
 - A307-10Carbon Steel Bolts and Studs, 60,000 PSI Tensile
Strength
 - A391/A391M-07Grade 80 Alloy Steel Chain
 - A653/A653M-10Steel Sheet, Zinc Coated (Galvanized) or Zinc-
Iron Alloy Coated (Galvannealed) by the Hot-Dip
Process
 - A786/A786M-09Rolled Steel Floor Plate
 - B456-03(R2009)Electrodeposited Coatings of Copper Plus Nickel
Plus Chromium and Nickel Plus Chromium
 - C1107-08Packaged Dry, Hydraulic-Cement Grout (Nonshrink)
 - D3656-07Insect Screening and Louver Cloth Woven from
Vinyl-Coated Glass Yarns
 - F436-10Hardened Steel Washers
 - F468-10Nonferrous Bolts, Hex Cap Screws, and Studs for
General Use
 - F593-02(R2008)Stainless Steel Bolts, Hex Cap Screws, and Studs
 - F1667-11Driven Fasteners: Nails, Spikes and Staples
- D. American Welding Society (AWS):
- D1.1-10Structural Welding Code Steel
 - D1.2-08Structural Welding Code Aluminum
 - D1.3-08Structural Welding Code Sheet Steel
- E. National Association of Architectural Metal Manufacturers (NAAMM)
- AMP 521-01Pipe Railing Manual
 - AMP 500-06Metal Finishes Manual

MBG 531-09Metal Bar Grating Manual

MBG 532-09Heavy Duty Metal Bar Grating Manual

F. Structural Steel Painting Council (SSPC)/Society of Protective Coatings:

SP 1-04No. 1, Solvent Cleaning

SP 2-04No. 2, Hand Tool Cleaning

SP 3-04No. 3, Power Tool Cleaning

G. Federal Specifications (Fed. Spec):

RR-T-650ETreads, Metallic and Nonmetallic, Nonskid

PART 2 - PRODUCTS

2.1 MATERIALS

A. Structural Steel: ASTM A36.

B. Primer Paint: As specified in Section 09 91 00, PAINTING.

2.2 HARDWARE

A. Rough Hardware:

1. Furnish rough hardware with a standard plating, applied after punching, forming and assembly of parts; galvanized, cadmium plated, or zinc-coated by electro-galvanizing process. Galvanized G-90 where specified.

2. Use G90 galvanized coating on ferrous metal for exterior work unless non-ferrous metal or stainless is used.

B. Fasteners:

1. Bolts with Nuts:

a. ASME B18.2.2.

b. ASTM A307 for 415 MPa (60,000 psi) tensile strength bolts.

c. ASTM F468 for nonferrous bolts.

d. ASTM F593 for stainless steel.

2. Screws: ASME B18.6.1.

3. Washers: ASTM F436, type to suit material and anchorage.

2.3 FABRICATION GENERAL

A. Material

1. Use material as specified. Use material of commercial quality and suitable for intended purpose for material that is not named or its standard of quality not specified.

2. Use material free of defects which could affect the appearance or service ability of the finished product.

B. Size:

1. Size and thickness of members as shown.

2. When size and thickness is not specified or shown for an individual part, use size and thickness not less than that used for the same

component on similar standard commercial items or in accordance with established shop methods.

C. Connections

1. Except as otherwise specified, connections may be made by welding, riveting or bolting.
2. Field riveting will not be approved.
3. Design size, number and placement of fasteners, to develop a joint strength of not less than the design value.
4. Holes, for rivets and bolts: Accurately punched or drilled and burrs removed.
5. Size and shape welds to develop the full design strength of the parts connected by welds and to transmit imposed stresses without permanent deformation or failure when subject to service loadings.
6. Use Rivets and bolts of material selected to prevent corrosion (electrolysis) at bimetallic contacts. Plated or coated material will not be approved.
7. Use stainless steel connectors for removable members machine screws or bolts.

D. Fasteners and Anchors

1. Use methods for fastening or anchoring metal fabrications to building construction as shown or specified.
2. Where fasteners and anchors are not shown, design the type, size, location and spacing to resist the loads imposed without deformation of the members or causing failure of the anchor or fastener, and suit the sequence of installation.
3. Use material and finish of the fasteners compatible with the kinds of materials which are fastened together and their location in the finished work.
4. Fasteners for securing metal fabrications to new construction only, may be by use of threaded or wedge type inserts or by anchors for welding to the metal fabrication for installation before the concrete is placed or as masonry is laid.
5. Fasteners for securing metal fabrication to existing construction or new construction may be expansion bolts, toggle bolts, power actuated drive pins, welding, self drilling and tapping screws or bolts.

E. Workmanship

1. General:
 - a. Fabricate items to design shown.
 - b. Furnish members in longest lengths commercially available within the limits shown and specified.

- c. Fabricate straight, true, free from warp and twist, and where applicable square and in same plane.
 - d. Provide holes, sinkages and reinforcement shown and required for fasteners and anchorage items.
 - e. Provide openings, cut-outs, and tapped holes for attachment and clearances required for work of other trades.
 - f. Prepare members for the installation and fitting of hardware.
 - g. Fabricate surfaces and edges free from sharp edges, burrs and projections which may cause injury.
2. Welding:
- a. Weld in accordance with AWS.
 - b. Welds shall show good fusion, be free from cracks and porosity and accomplish secure and rigid joints in proper alignment.
 - c. Where exposed in the finished work, continuous weld for the full length of the members joined and have depressed areas filled and protruding welds finished smooth and flush with adjacent surfaces.
 - d. Finish welded joints to match finish of adjacent surface.
3. Joining:
- a. Miter or butt members at corners.
 - b. Where frames members are butted at corners, cut leg of frame member perpendicular to surface, as required for clearance.
4. Anchors:
- a. Where metal fabrications are shown to be preset in concrete, weld 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 150 mm (6 inches) long with 25 mm (one inch) hooked end, to back of member at 600 mm (2 feet) on center, unless otherwise shown.
 - b. Where metal fabrications are shown to be built into masonry use 32 x 3 mm (1-1/4 by 1/8 inch) steel strap anchors, 250 mm (10 inches) long with 50 mm (2 inch) hooked end, welded to back of member at 600 mm (2 feet) on center, unless otherwise shown.
5. Cutting and Fitting:
- a. Accurately cut, machine and fit joints, corners, copes, and miters.
 - b. Fit removable members to be easily removed.
 - c. Design and construct field connections in the most practical place for appearance and ease of installation.
 - d. Fit pieces together as required.
 - e. Fabricate connections for ease of assembly and disassembly without use of special tools.
 - f. Joints firm when assembled.

- g. Conceal joining, fitting and welding on exposed work as far as practical.
- h. Do not show rivets and screws prominently on the exposed face.
- i. The fit of components and the alignment of holes shall eliminate the need to modify component or to use exceptional force in the assembly of item and eliminate the need to use other than common tools.

F. Finish:

- 1. Finish exposed surfaces in accordance with NAAMM Metal Finishes Manual.
- 2. Steel and Iron: NAAMM AMP 504.
 - a. Zinc coated (Galvanized): ASTM A123, G90 unless noted otherwise.
 - b. Surfaces exposed in the finished work:
 - 1) Finish smooth rough surfaces and remove projections.
 - 2) Fill holes, dents and similar voids and depressions with epoxy type patching compound.
 - c. Shop Prime Painting:
 - 1) Surfaces of Ferrous metal:
 - a) Items not specified to have other coatings.
 - b) Galvanized surfaces specified to have prime paint.
 - c) Remove all loose mill scale, rust, and paint, by hand or power tool cleaning as defined in SSPC-SP2 and SP3.
 - d) Clean of oil, grease, soil and other detrimental matter by use of solvents or cleaning compounds as defined in SSPC-SP1.
 - e) After cleaning and finishing apply one coat of primer as specified in Section 09 91 00, PAINTING.
 - 2) Non ferrous metals: Comply with MAAMM-500 series.

G. Protection:

- 1. Spot prime all abraded and damaged areas of zinc coating which expose the bare metal, using zinc rich paint on hot-dip zinc coat items and zinc dust primer on all other zinc coated items.

2.4 LOOSE LINTELS

- A. Furnish lintels of sizes shown. Where size of lintels is not shown, provide the sizes specified.
- B. Fabricate lintels with not less than 150 mm (6 inch) bearing at each end for nonbearing masonry walls, and 200 mm (8 inch) bearing at each end for bearing walls.

- C. Provide one angle lintel for each 100 mm (4 inches) of masonry thickness as follows except as otherwise specified or shown.
 - 1. Openings 750 mm to 1800 mm (2-1/2 feet to 6 feet) - 100 x 90 x 8 mm (4 x 3-1/2 x 5/16 inch).
 - 2. Openings 1800 mm to 3000 mm (6 feet to 10 feet) - 150 x 90 x 9 mm (6 x 3-1/2 x 3/8 inch).
- D. For 150 mm (6 inch) thick masonry openings 750 mm to 3000 mm (2-1/2 feet to 10 feet) use one angle 150 x 90 x 9 mm (6 x 3-1/2 x 3/8 inch).
- E. Provide bearing plates for lintels where shown.
- F. Weld or bolt upstanding legs of double angle lintels together with 19 mm (3/4 inch bolts) spaced at 300 mm (12 inches) on centers.
- G. Insert spreaders at bolt points to separate the angles for insertion of metal windows, louver, and other anchorage.
- H. Where shown or specified, punch upstanding legs of single lintels to suit size and spacing of anchor bolts.

2.5 SHELF ANGLES

- A. Fabricate from steel angles of size shown.
- B. Fabricate angles with horizontal slotted holes for 19 mm (3/4 inch) bolts spaced at not over 900 mm (3 feet) on centers and within 300 mm (12 inches) of ends.
- C. Provide adjustable malleable iron inserts for embedded in concrete framing.

PART 3 - EXECUTION

3.1 INSTALLATION, GENERAL

- A. Set work accurately, in alignment and where shown, plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Items set into concrete or masonry.
 - 1. Provide temporary bracing for such items until concrete or masonry is set.
 - 2. Place in accordance with setting drawings and instructions.
 - 3. Build strap anchors, into masonry as work progresses.
- C. Field weld in accordance with AWS.
 - 1. Design and finish as specified for shop welding.
 - 2. Use continuous weld unless specified otherwise.
- D. Install anchoring devices and fasteners as shown and as necessary for securing metal fabrications to building construction as specified. Power actuated drive pins may be used except for removable items and where members would be deformed or substrate damaged by their use.

- E. Spot prime all abraded and damaged areas of zinc coating as specified and all abraded and damaged areas of shop prime coat with same kind of paint used for shop priming.

3.2 STEEL LINTELS

- A. Use lintel sizes and combinations shown or specified.
- B. Install lintels with longest leg upstanding, except for openings in 150 mm (6 inch) masonry walls install lintels with longest leg horizontal.
- C. Install lintels to have not less than 150 mm (6 inch) bearing at each end for nonbearing walls, and 200 mm (8 inch) bearing at each end for bearing walls.

3.3 SHELF ANGLES

- A. Anchor shelf angles with 19 mm (3/4 inch) bolts unless shown otherwise in adjustable malleable iron inserts, set level at elevation shown.
- B. Provide expansion space at end of members.

3.4 CLEAN AND ADJUSTING

- A. Adjust movable parts including hardware to operate as designed without binding or deformation of the members centered in the opening or frame and, where applicable, contact surfaces fit tight and even without forcing or warping the components.
- B. Clean after installation exposed prefinished and plated items and items fabricated from stainless steel, aluminum and copper alloys, as recommended by the metal manufacture and protected from damage until completion of the project.

- - - E N D - - -

SECTION 06 10 00
ROUGH CARPENTRY

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. Section specifies wood blocking, framing, sheathing, furring, nailers, sub-flooring, rough hardware, and light wood construction.

1.2 RELATED WORK:

- A. Gypsum sheathing: Section 09 29 00, GYPSUM BOARD.
- B. Cement board sheathing: Section 06 16 00, SHEATHING.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings showing framing connection details, fasteners, connections and dimensions.

1.4 PRODUCT DELIVERY, STORAGE AND HANDLING:

- A. Protect lumber and other products from dampness both during and after delivery at site.
- B. Pile lumber in stacks in such manner as to provide air circulation around surfaces of each piece.
- C. Stack plywood and other board products so as to prevent warping.
- D. Locate stacks on well drained areas, supported at least 150 mm (6 inches) above grade and cover with well ventilated sheds having firmly constructed over hanging roof with sufficient end wall to protect lumber from driving rain.

1.5 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Society of Mechanical Engineers (ASME):
 - B18.2.1-96(R2005)Square and Hex Bolts and Screws
 - B18.2.2-87Square and Hex Nuts
 - B18.6.1-97Wood Screws
 - B18.6.4-98(R2005)Thread Forming and Thread Cutting Tapping Screws and Metallic Drive Screws
- C. American Plywood Association (APA):
 - E30-07Engineered Wood Construction Guide
- D. American Society for Testing And Materials (ASTM):
 - A47-99(R2009)Ferritic Malleable Iron Castings
 - A48-03(R2008)Gray Iron Castings

- A653/A653M-10Steel Sheet Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot Dip Process
- C954-10Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Studs from 0.033 inch (2.24 mm) to 0.112-inch (2.84 mm) in thickness
- C1002-07Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Metal Studs
- F844-07Washers, Steel, Plain (Flat) Unhardened for General Use
- F1667-08Nails, Spikes, and Staples
- E. Federal Specifications (Fed. Spec.):
 - MM-L-736CLumber; Hardwood
- F. Commercial Item Description (CID):
 - A-A-55615Shield, Expansion (Wood Screw and Lag Bolt Self Threading Anchors)
- G. Military Specification (Mil. Spec.):
 - MIL-L-19140ELumber and Plywood, Fire-Retardant Treated
- H. U.S. Department of Commerce Product Standard (PS)
 - PS 20-05American Softwood Lumber Standard

PART 2 - PRODUCTS

2.1 LUMBER:

- A. Unless otherwise specified, each piece of lumber bear grade mark, stamp, or other identifying marks indicating grades of material, and rules or standards under which produced.
 - 1. Identifying marks in accordance with rule or standard under which material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.
 - 2. Inspection agency for lumber approved by the Board of Review, American Lumber Standards Committee, to grade species used.
- B. Lumber Other Than Structural:
 - 1. Unless otherwise specified, species graded under the grading rules of an inspection agency approved by Board of Review, American Lumber Standards Committee.

2. Furring, blocking, nailers and similar items 100 mm (4 inches) and narrower Standard Grade; and, members 150 mm (6 inches) and wider, Number 2 Grade.

C. Sizes:

1. Conforming to Prod. Std., PS20.
2. Size references are nominal sizes, unless otherwise specified, actual sizes within manufacturing tolerances allowed by standard under which produced.

D. Moisture Content:

1. At time of delivery and maintained at the site.
2. Boards and lumber 50 mm (2 inches) and less in thickness: 19 percent or less.
3. Lumber over 50 mm (2 inches) thick: 25 percent or less.

E. Fire Retardant Treatment:

1. Mil Spec. MIL-L-19140 with piece of treated material bearing identification of testing agency and showing performance rating.
2. Treatment and performance inspection, by an independent and qualified testing agency that establishes performance ratings.

F. Preservative Treatment:

1. Do not treat Heart Redwood and Western Red Cedar.
2. Treat wood members and plywood exposed to weather or in contact with plaster, masonry or concrete, including framing of open roofed structures; sills, sole plates, furring, and sleepers that are less than 600 mm (24 inches) from ground; nailers, edge strips, blocking, crickets, curbs, cant, vent strips and other members used in connection with roofing and flashing materials.
3. Treat other members specified as preservative treated (PT).
4. Preservative treat by the pressure method complying with ASTM D1760, except any process involving the use of Chromated Copper arsenate (CCA) for pressure treating wood is not permitted.

2.2 ROUGH HARDWARE AND ADHESIVES:

A. Anchor Bolts:

1. ASME B18.2.1 and ANSI B18.2.2 galvanized, 13 mm (1/2 inch) unless shown otherwise.
2. Extend at least 200 mm (8 inches) into masonry or concrete with ends bent 50 mm (2 inches).

- B. Miscellaneous Bolts: Expansion Bolts: C1D, A-A-55615; lag bolt, long enough to extend at least 65 mm (2-1/2 inches) into masonry or concrete. Use 13 mm (1/2 inch) bolt unless shown otherwise.

C. Washers

1. ASTM F844.
2. Use zinc or cadmium coated steel or cast iron for washers exposed to weather.

D. Screws:

1. Wood to Wood: ANSI B18.6.1 or ASTM C1002.
2. Wood to Steel: ASTM C954, or ASTM C1002.

E. Nails:

1. Size and type best suited for purpose unless noted otherwise. Use aluminum-alloy nails, plated nails, or zinc-coated nails, for nailing wood work exposed to weather and on roof blocking.
2. ASTM F1667:
 - a. Common: Type I, Style 10.
 - b. Concrete: Type I, Style 11.
 - c. Barbed: Type I, Style 26.
 - d. Underlayment: Type I, Style 25.
 - e. Masonry: Type I, Style 27.

PART 3 - EXECUTION

3.1 INSTALLATION OF FRAMING AND MISCELLANEOUS WOOD MEMBERS:

A. Fasteners:

1. Bolts:
 - a. Fit bolt heads and nuts bearing on wood with washers.
 - b. Countersink bolt heads flush with the surface of nailers.
 - c. Embed in concrete and solid masonry or use expansion bolts. Special bolts or screws designed for anchor to solid masonry or concrete in drilled holes may be used.
 - d. Use toggle bolts to hollow masonry or sheet metal.
 - e. Use bolts to steel over 2.84 mm (0.112 inch, 11 gage) in thickness. Secure wood nailers to vertical structural steel members with bolts, placed one at ends of nailer and 600 mm (24 inch) intervals between end bolts. Use clips to beam flanges.
2. Drill Screws to steel less than 2.84 mm (0.112 inch) thick.
 - a. ASTM C1002 for steel less than 0.84 mm (0.033 inch) thick.
 - b. ASTM C 954 for steel over 0.84 mm (0.033 inch) thick.
3. Power actuated drive pins may be used where practical to anchor to solid masonry, concrete, or steel.
4. Do not anchor to wood plugs or nailing blocks in masonry or concrete. Use metal plugs, inserts or similar fastening.
5. Screws to Join Wood:

- a. Where shown or option to nails.
 - b. ASTM C1002, sized to provide not less than 25 mm (1 inch) penetration into anchorage member.
 - c. Spaced same as nails.
- B. Blocking Nailers, and Furring:
- 1. Install furring, blocking, nailers, and grounds where shown.
 - 2. Use longest lengths practicable.
 - 3. Use fire retardant treated wood blocking where shown at openings and where shown or specified.
 - 4. Layers of Blocking or Plates:
 - a. Stagger end joints between upper and lower pieces.
 - b. Nail at ends and not over 600 mm (24 inches) between ends.
 - c. Stagger nails from side to side of wood member over 125 mm (5 inches) in width.
 - 5. Unless otherwise shown, use wall furring 25 mm by 75 mm (1 inch by 3 inch) continuous wood strips installed plumb on walls, using wood shims where necessary so face of furring forms a true, even plane. Space furring not over 400 mm (16 inches on centers, butt joints over bearings and rigidly secure in place. Anchor furring on 400 mm (16 inches) centers.

- - - E N D - - -

SECTION 06 16 00
SHEATHING

PART 1 - GENERAL

1.1 DESCRIPTION

A This section specifies the following sheathing:

1. Glass-mat exterior grade gypsum sheathing.
2. Cement board sheathing.

1.2 RELATED WORK

- A. Steel framing: Section 05 40 00, COLD-FORMED METAL FRAMING
- B. Weather-resistant barriers: Section 07 27 26, FLUID-APPLIED MEMBRANE AIR BARRIERS.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples:
1. Glass-mat exterior grade gypsum panels, 200 mm by 200 mm (8 inches by 8 inches), minimum size.
 2. Cement board panels, 200 mm by 200 mm (8 inches by 8 inches), minimum size.
 3. Fasteners, each type used.
 4. Reinforcing tape for joints 300 mm (12 inches) long.
- C. Product Data:
1. For each type of sheathing product indicated.
 2. Reinforcing tape.
 3. Fasteners.

1.4 DELIVERY AND STORAGE

- A. Deliver materials in containers with labels legible and intact.
- B. Store materials so as to prevent damage or contamination.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American National Standards Institute (ANSI):
- A118.9-1999Cementitious Backer Units
- C. American Society for Testing and Materials (ASTM):
- C11-04Terminology Relating to Gypsum and Related Building Materials and Systems

C475-02Joint Compound and Joint Tape for Finishing Gypsum Board

C840-04Application and Finishing of Gypsum Board

C954-04Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Stud from 0.033 in. (0.84mm) to 0.112 in. (2.84mm) in thickness

C1002-04Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs

C1047-04Accessories for Gypsum Wallboard and Gypsum Veneer Base

C1177-04Glass Mat Gypsum Substrate for Use as Sheathing

C1278-01Fiber-Reinforced Gypsum Panel

C1396-04Gypsum Board

E84-04Surface Burning Characteristics of Building Materials

PART 2 - PRODUCTS

2.1 GLASS-MAT GYPSUM SHEATHING BOARD

- A. Composition: Gypsum sheathing manufactured in accordance with ASTM C1177 with glass mats both sides and long edges, water resistant treated core.
- B. Fire Resistance: Noncombustible when tested in accordance with ASTM E 136.
- C. Thickness: As indicated on Drawings.

2.2 CEMENT BOARD SHEATHING

- A. Conform to ANSI A118.9, except physical property requirements defined in Table 1 changed to not less than the minimum values stated below.
- B. Property Minimum Average Value

1. Water Absorption by Weight, ASTM D1037	20 percent maximum
2. Flame Spread	5
3. Smoke Density	0
4. Thickness	as indicated on Drawings
5. Minimum Width	800 mm (32 inches)

2.3 ACCESSORY MATERIALS

- A. Fasteners: Steel drill screws, in length recommended by sheathing manufacturer for thickness of sheathing board to be attached, with organic-polymer or other corrosion protective coating having a salt-spray resistance of more than 800 hours according to ASTM B 117.
 - 1. ASTM C1002, for steel framing less than 0.0329 inch (0.835 mm) thick.

2. ASTM C954, for steel framing from 0.033 to 0.112 inch (0.84 to 2.84 mm) thick.
- B. Sealant for Glass-Mat Gypsum Sheathing Board: Silicone emulsion sealant complying with ASTM C834, compatible with sheathing tape and sheathing, and recommended by tape and sheathing manufacturers for use with glass-fiber sheathing tape and covering exposed fasteners.
- C. Sheathing Tape for Glass-Mat Gypsum Sheathing Board: Self-adhering glass-fiber tape, minimum 2 inches (50 mm) wide. 10 by 10 or 10 by 20 threads/inch (390 by 390 or 390 by 780 threads/m), of type recommended by sheathing and tape manufacturers for use with the silicone emulsion sealant in sealing joints in glass-mat gypsum sheathing board and with a history of successful in-service use.
- D. Joint Reinforcing Tape for Cement Board:
 1. Minimum 100 mm (4-inches) wide open mesh alkali resistant.
 2. Glass fiber mesh polymer coated as recommended by Cement Board manufacturer.

PART 3 - EXECUTION

3.1 ENVIRONMENTAL REQUIREMENTS

- A. Do not install units when temperature is below 4.5 degrees celsius (40 degrees F).
- B. Do not install joint reinforcing tape when temperature is below 10 degrees celsius (50 degrees F).

3.2 GLASS-MAT GYPSUM SHEATHING

- A. Comply with GA-253 and with manufacturer's written instructions.
 1. Fasten gypsum sheathing to cold-formed metal framing with screws.
 2. Install boards with a 3/8-inch (9.5-mm) gap where non-load-bearing construction abuts structural elements.
 3. Install boards with a 1/4-inch (6.4-mm) gap where they abut masonry or similar materials that might retain moisture, to prevent wicking.
- B. Apply fasteners so heads bear tightly against face of sheathing boards but do not cut into facing.
- C. Horizontal Installation: Install sheathing with V-grooved edge down and tongue edge up. Interlock tongue with groove to bring long edges in contact with edges of adjacent boards without forcing. Abut ends of boards over centers of studs, and stagger end joints of adjacent boards not less than one stud spacing. Attach boards at perimeter and within field of board to each steel stud.
 1. Space fasteners approximately 8 inches (200 mm) o.c. and set back a minimum of 3/8 inch (9.5 mm) from edges and ends of boards.

- D. Vertical Installation: Install board vertical edges centered over studs. Abut ends and edges of each board with those of adjacent boards. Attach boards at perimeter and within field of board to each stud.
 - 1. Space fasteners approximately 8 inches (200 mm) o.c. and set back a minimum of 3/8 inch (9.5 mm) from edges and ends of boards.
- E. Joint and Penetration Treatment: Seal sheathing joints according to sheathing manufacturer's written recommendations.
 - 1. Apply elastomeric sealant on joints and fasteners and trowel flat. Apply sufficient quantity of sealant to completely cover joints and fasteners after troweling. Seal other penetrations and openings.
 - 2. Apply glass fiber sheathing tape to glass-mat gypsum board sheathing board joints, and apply and trowel silicone emulsion sealant to embed sealant in entire face of tape. Apply sealant to exposed fasteners with a trowel so fasteners are completely covered. Seal other penetrations and openings.

3.3 CEMENT BOARD INSTALLATION

- A. Remove wrapping and separate to allow air circulation for not less than seven days before installation.
- B. Installing Cement Board Units:
 - 1. Apply cement board sheathing immediately over water barrier in accordance with ANSI A108.11, with rounded edges and rough side to exterior, except as specified otherwise.
 - 2. Secure units to framing members with screws spaced not more than 200 mm (8 inches) on center and not closer than 13 mm (1/2-inch) from the edge of the unit.
 - 3. Install screws so that the screw heads do not penetrate the surface of unit.
 - 4. Install 13 mm (1/2-inch) wide horizontal control joints at floors and vertical control joints not over 4.87 m (16 feet) on center unless shown otherwise, maintain alignment.
 - 5. Stop units at edges of building expansion joints.
 - 6. Minimum bearing over framing members: 19 mm (3/4-inch.)
- C. Joint and Surface Treatment: Apply joint reinforcing tape over joints, exposed edges, and corners using adhesive recommended by manufacturer.
- D. Leave surface flush and ready to receive subsequent finishes.

3.4 PROTECTION AND REPAIR

- A. Protect board with temporary coverings against moisture until subsequent finish is applied.
- B. Patch and repair damaged surface prior to application of subsequent finish.

1. Fill cracks.
2. Replace loose, spalling or missing joint finish.
3. Replace broken or damaged boards.

- - - E N D - - -

SECTION 07 11 13
BITUMINOUS DAMPPROOFING

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies materials and workmanship for bituminous dampproofing on concrete and masonry surfaces.

1.2 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Product description.
 - 2. Application instructions.

1.3 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - D226-09Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing
 - D449-03(R2008)Asphalt Used in Dampproofing and Waterproofing
 - D1227-95(R2007)Emulsified Asphalt Used as a Protective Coating for Roofing

PART 2 - PRODUCTS

2.1 ASPHALT EMULSION (COLD APPLIED):

- A. ASTM D1227, Type III (spray grade)

PART 3 - EXECUTION

3.1 SURFACE PREPARATION:

- A. Surfaces to receive dampproofing shall be clean and smooth.
- B. Remove foreign matter, loose particles of mortar or other cementitious droppings.
- C. Clean and wash soil or dirt particles from surface.
- D. Remove free water; surfaces may remain damp.

3.2 APPLICATION:

- A. Comply with Manufacturer written instructions for methods and rates of dampproofing application, cleaning and installation of any protection course.

- B. Apply each coat at the rate of not less than 1 L/m² (2-1/2 gallons per 100 square feet) and allow not less than 24 hours drying time after application.

3.3 LOCATION:

- A. Apply to surfaces where shown.

- - - E N D - - -

SECTION 07 21 13
THERMAL INSULATION

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies thermal and acoustical insulation for buildings.
- B. Acoustical insulation is identified by thickness and words "Acoustical Insulation".

1.2 RELATED WORK:

- A. Insulation in connection with roofing and waterproofing: Section 07 22 00, ROOF INSULATION.
- B. Safing insulation: Section 07 84 00, FIRESTOPPING.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Insulation, each type used
 - 2. Adhesive, each type used.
 - 3. Tape
- C. Certificates: Stating the type, thickness and "R" value (thermal resistance) of the insulation to be installed.

1.4 STORAGE AND HANDLING:

- A. Store insulation materials in weathertight enclosure.
- B. Protect insulation from damage from handling, weather and construction operations before, during, and after installation.

1.5 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - C270-08Mortar for Unit Masonry
 - C553-08Mineral Fiber Blanket Thermal Insulation for
Commercial and Industrial Applications
 - C578-08Rigid, Cellular Polystyrene Thermal Insulation
 - C591-08Unfaced Preformed Rigid Cellular
Polyisocynurate Thermal Insulation
 - C612-04Mineral Fiber Block and Board Thermal
Insulation

- C665-06Mineral Fiber Blanket Thermal Insulation for
Light Frame Construction and Manufactured
Housing
- C954-07Steel Drill Screws for the Application of
Gypsum Panel Products or Metal Plaster Base to
Steel Studs From 0.033 (0.84 mm) inch to 0.112
inch (2.84 mm) in thickness
- C1002-07Steel Self-Piercing Tapping Screws for the
Application of Gypsum Panel Products or Metal
Plaster Bases to Wood Studs or Steel Studs
- D312-00(R2006)Asphalt Used in Roofing
- E84-08Surface Burning Characteristics of Building
Materials
- F1667-05Driven Fasteners: Nails, Spikes and Staples.

PART 2 - PRODUCTS

2.1 INSULATION - GENERAL:

- A. Where thermal resistance ("R" value) is specified or shown for insulation, the thickness shown on the drawings is nominal. Use only insulation with actual thickness that is not less than that required to provide the thermal resistance specified.
- B. Where "R" value is not specified for insulation, use the thickness shown on the drawings.
- C. Where more than one type of insulation is specified, the type of insulation for each use is optional, except use only one type of insulation in any particular area.
- D. Insulation Products shall comply with following minimum content standards for recovered materials:

Material Type	Percent by Weight
Perlite composite board	23 percent post consumer recovered paper
Rigid foam	9 percent recovered material
Foam-in-place	5 percent recovered material
Glass fiber reinforced	6 percent recovered material
Phenolic rigid foam	5 percent recovered material
Rock wool material	75 percent recovered material

The minimum-content standards are based on the weight (not the volume) of the material in the insulating core only.

2.2 MASONRY CAVITY WALL INSULATION:

- A. Polystyrene Board: ASTM C578, Type X.

2.3 PERIMETER INSULATION IN CONTACT WITH SOIL:

- A. Polystyrene Board: ASTM C578.
 - 1. Type X, at masonry cavity.

2.4 EXTERIOR FRAMING OR FURRING INSULATION:

- A. Batt, unless otherwise indicated.
- B. Mineral Fiber: ASTM C665, Type I.
- C. Vapor Retarder: Polyimide film vapor retarder for use with unfaced, vapor permeable glass fiber and mineral wool insulation in wall cavities; ASTM E86.

2.5 ACOUSTICAL INSULATION:

- A. Mineral Fiber boards: ASTM C553, Type II, flexible, or Type III, semirigid (4.5 pound nominal density).
- B. Mineral Fiber Batt or Blankets: ASTM C665. Maximum flame spread of 25 and smoke development of 450 when tested in accordance with ASTM E84.
- C. Thickness as shown; of widths and lengths to fit tight against framing.

2.6 WATER REPELLENT, MINERAL-WOOL BOARD INSULATION:

- A. Unfaced Mineral Fiber Board: ASTM C612, Type IB, 13 mm (1/2 inch thick).

2.7 CURTAINWALL INSULATION:

- A. Glass Fiber Board: ASTM C612, Type 1B. Foil faced and taped curtain wall insulation.

2.8 FASTENERS:

- A. Staples or Nails: ASTM F1667, zinc-coated, size and type best suited for purpose.
- B. Screws: ASTM C954 or C1002, size and length best suited for purpose with washer not less than 50 mm (two inches) in diameter.
- C. Impaling Pins: Steel pins with head not less than 50 mm (two inches) in diameter with adhesive for anchorage to substrate. Provide impaling pins of length to extend beyond insulation and retain cap washer when washer is placed on the pin.

2.9 ADHESIVE:

- A. As recommended by the manufacturer of the insulation.
- B. Asphalt: ASTM D312, Type III or IV.
- C. Mortar: ASTM C270, Type 0.

2.10 TAPE:

- A. Pressure sensitive adhesive on one face.
- B. Perm rating of not more than 0.50.

PART 3 - EXECUTION

3.1 INSTALLATION - GENERAL

- A. Install insulation with the vapor barrier facing the heated side, unless specified otherwise.
- B. Install rigid insulating units with joints close and flush, in regular courses and with cross joints broken.
- C. Install batt or blanket insulation with tight joints and filling framing void completely. Seal cuts, tears, and unlapped joints with tape.
- D. Fit insulation tight against adjoining construction and penetrations, unless specified otherwise.

3.2 MASONRY CAVITY WALLS:

- A. Mount insulation on exterior faces of inner wythes of masonry cavity walls and brick faced concrete walls. Fill joints with same material used for bonding.
- B. Bond polystyrene board to surfaces with adhesive or Portland cement mortar mixed and applied in accordance with recommendations of insulation manufacturer.

3.3 PERIMETER INSULATION:

- A. Vertical insulation:
 - 1. Fill joints of insulation with same material used for bonding.
 - 2. Bond polystyrene board to surfaces with adhesive or Portland cement mortar mixed and applied in accordance with recommendations of insulation manufacturer.
- B. Horizontal insulation under concrete floor slab:
 - 1. Lay insulation boards and blocks horizontally on level, compacted and drained fill.
 - 2. Extend insulation from foundation walls towards center of building not less than 600 mm (24 inches) or as shown.

3.4 EXTERIOR FRAMING OR FURRING BLANKET INSULATION:

- A. Pack insulation around door frames and windows and in building expansion joints, door soffits and other voids. Pack behind outlets around pipes, ducts, and services encased in walls. Open voids are not permitted. Hold insulation in place with pressure sensitive tape.

- B. Lap vapor retarder flanges together over face of framing for continuous surface. Seal all penetrations through the insulation.
- C. Fasten blanket insulation between metal studs or framing and exterior wall furring by continuous pressure sensitive tape along flanged edges.
- D. Fasten blanket insulation between wood studs or framing with nails or staples through flanged edges on face of stud. Space fastenings not more than 150 mm (six inches) apart.

3.5 RIGID INSULATION ON SURFACE OF EXTERIOR WALLS, FLOORS, AND UNDERSIDE OF FLOORS:

- A. On the interior face of solid masonry and concrete walls, beams, beam soffits, underside of floors, and to the face of studs for interior wall finish where shown.
- B. Bond to solid vertical surfaces with adhesive as recommended by insulation manufacturer. Fill joints with adhesive cement.
- C. Use impaling pins for attachment to underside of horizontal surfaces. Space fastenings as required to hold insulation in place and prevent sagging.
- D. Fasten board insulation to face of studs with screws, nails or staples. Space fastenings not more than 300 mm (12 inches) apart. Stagger fasteners at joints of boards. Install at each corner.
- E. Curtain wall insulation:
 - 1. Seal all edges. Tape all seams, including at perimeter of curtain wall framing.

3.6 ACOUSTICAL INSULATION:

- A. Fasten blanket insulation between metal studs and wall furring with continuous pressure sensitive tape along edges or adhesive.
- B. Pack insulation around door frames and windows and in cracks, expansion joints, control joints, door soffits and other voids. Pack behind outlets, around pipes, ducts, and services encased in wall or partition. Hold insulation in place with pressure sensitive tape or adhesive.
- C. Do not compress insulation below required thickness except where embedded items prevent required thickness.
- D. Where acoustical insulation is installed above suspended ceilings install blanket at right angles to the main runners or framing. Extend insulation over wall insulation systems not extending to structure above.

- E. Where semirigid insulation is used which is not full thickness of cavity, adhere to one side of cavity maintaining continuity of insulation and covering penetrations or embedments in insulation.
- F. Where sound deadening board is shown, secure with adhesive to masonry or concrete walls and with screws to metal or wood framing. Secure sufficiently in place until subsequent cover is installed. Seal all cracks with caulking.

- - - E N D - - -

SECTION 07 22 00
ROOF INSULATION

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Roof insulation and vapor retarder on new construction ready to receive roofing or waterproofing membrane.

1.2 RELATED WORK

- A. Wood blocking and edge strips: Section 06 10 00, ROUGH CARPENTRY.
B. Perimeter, rigid, and batt or blanket insulation not part of roofing system: Section 07 21 13, THERMAL INSULATION.
C. Sheet metal components and wind uplift requirements for roof-edge design: Section 07 60 00, FLASHING AND SHEET METAL.

1.3 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
- B. American Society of Heating, Refrigeration and Air Conditioning (ASHRAE):
90.1-07Energy Standard for Buildings Except Low-Rise Residential Buildings
- C. ASTM International (ASTM):
C1289-10Faced Rigid Cellular Polyisocyanurate Thermal Insulation Board
D41-05Asphalt Primer Used in Roofing, Dampproofing, and Waterproofing
D312-06Asphalt Used in Roofing
D2178-04Asphalt Glass Felt Used in Roofing and Waterproofing
D2822-05Asphalt Roof Cement
D4586-07Standard Specification for Asphalt Roof Cement, Asbestos-Free
E84-09Standard Test Method for Surface Burning Characteristics of Building Material
F1667-05Driven Fasteners: Nails, Spikes, and Staples
- D. FM Approvals: RoofNav Approved Roofing Assemblies and Products.

- 4450-89Approved Standard for Class 1 Insulated Steel
Deck Roofs
- 4470-10Approved Standard for Class 1 Roof Coverings
- 1-28-09Loss Prevention Data Sheet: Design Wind Loads.
- 1-29-09Loss Prevention Data Sheet: Above-Deck Roof
Components
- 1-49-09Loss Prevention Data Sheet: Perimeter Flashing
- E. National Roofing Contractors Association: Roofing and Waterproofing
Manual
- F. U.S. Department of Agriculture (USDA): USDA BioPreferred Catalog,
www.biopreferred.gov
- G. Underwriters Laboratories, Inc. (UL): Fire Resistance Directory (2009)
- H. U.S. Department of Commerce National Institute of Standards and
Technology (NIST):
- DOC PS 1-09U.S. Product Standard for Construction and
Industrial Plywood
- DOC PS 2-04Performance Standard for Wood-Based Structural-
Use Panels.

1.4 PERFORMANCE REQUIREMENTS

- A. Thermal Performance: Provide roof insulation meeting minimum overall
average R-value of 33, with minimum R-value at any location of 10.
- B. FM Approvals: Provide roof insulation complying with requirements in
FM Approvals 4450 and 4470 as part of specified roofing system, listed
in FM Approvals "RoofNav" as part of roofing system meeting
Fire/Windstorm Classification in Division 07 roofing section.

1.5 QUALITY CONTROL

- A. Requirements of Division 07 roofing section for qualifications of
roofing system insulation Installer; Work of this Section shall be
performed by same Installer.
- B. Requirements of Division 07 roofing section for inspection of Work of
this Section and qualifications of Inspector.
- C. Unless specified otherwise, comply with the recommendations of the NRCA
"Roofing and Waterproofing Manual" applicable to insulation for
storage, handling, and application.
- D. Requirements of roofing system uplift pressure design for specified
roofing system.

- E. Requirements of applicable FM Approval for specified roofing system insulation attachment.

1.6 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Product Data:
 - 1. Asphalt and adhesive materials, each type.
 - 2. Roofing cement, each type.
 - 3. Roof insulation, each type.
 - 4. Fastening requirements.
 - 5. Insulation span data for flutes of metal decks.
- C. Shop Drawings: Include plans, sections, details, and attachments.
 - 1. Nailers, cants, and terminations.
 - 2. Layout of insulation showing slopes, tapers, penetration, and edge conditions.
- D. Samples:
 - 1. Roof insulation, each type.
 - 2. Nails and fasteners, each type.
- E. Certificates:
 - 1. Indicating type, thermal conductance, and minimum and average thickness of insulation.
 - 2. Indicating materials and method of application of insulation system meet the requirements of FM Approvals for specified roofing system.
- F. Laboratory Test Reports: Thermal values of insulation products.
- G. Layout of tapered roof system showing units required.
- H. Documentation of supervisors' and inspectors' qualifications.

1.7 DELIVERY, STORAGE AND MARKING

- A. Comply with the recommendations of the NRCA "Roofing and Waterproofing Manual" applicable to built-up roofing for storage, handling and installation requirements.
- B. Keep materials dry, and store in dry, weather-tight facilities or under canvas tarps. Use of polyethylene or plastic tarps to cover materials is not permitted. Store above ground or deck level on wood pallets. Cover ground under stored materials with plastic tarp.
 - 1. Store rolled materials (felts, base sheets, paper) on end. Do not store materials on top of rolled material.

2. Store foam insulation away from areas where welding is being performed and where contact with open flames is possible.
- C. Protect from damage from handling, weather and construction operations before, during, and after installation.

1.8 QUALITY ASSURANCE:

- A. Roof insulation on combustible or steel decks shall have a flame spread rating not greater than 75 and a smoke developed rating not greater than 150, exclusive of covering, when tested in accordance with ASTM E84, or shall have successfully passed FM Approvals 4450.
 1. Insulation bearing the UL label and listed in the UL Building Materials Directory as meeting the flame spread and smoke developed ratings will be accepted in-lieu-of copies of test reports.
 2. Compliance with flame spread and smoke developed ratings will not be required when insulation has been tested as part of a roof construction assembly of the particular type used for this project and the construction is listed as fire-classified in the UL Building Materials Directory or listed as Class I roof deck construction in the FM Approvals "RoofNav."
 3. Insulation tested as part of a roof construction assembly shall bear UL or FM labels attesting to the ratings specified herein.

PART 2 - PRODUCTS

2.1 ADHESIVE MATERIALS

- A. Adhesive Materials, General: Adhesive and sealant materials recommended by roofing system manufacturer for intended use, identical to materials utilized in approved listed roofing system, and compatible with roofing membrane.
 1. Liquid-type adhesive materials shall comply with VOC limits of authorities having jurisdiction.
 2. Adhesives and sealants that are not on the exterior side of weather barrier shall comply with the following limits for VOC content when calculated according to 40 CFR 59, Subpart D (EPA Method 24):
 - a. Plastic Foam Adhesives: 50 g/L.
 - b. Multipurpose Construction Adhesives: 70 g/L.
 - c. Fiberglass Adhesives: 80 g/L.
 - d. Contact Adhesives: 80 g/L.
 - e. Other Adhesives: 250 g/L.
 - f. Nonmembrane Roof Sealants: 300 g/L.

- g. Sealant Primers for Nonporous Substrates: 250 g/L.
- h. Sealant Primers for Porous Substrates: 775 g/L.
- B. Primer: ASTM D41.
- C. Asphalt: ASTM D312, Type III or IV for vapor retarders and insulation.
- D. Modified Asphaltic Insulation Adhesive: Insulation manufacturer's recommended modified asphaltic, asbestos-free, cold-applied adhesive formulated to attach roof insulation to substrate or to another insulation layer.
- E. Roof Cement: Asbestos free, ASTM D2822, Type I or Type II, ; or, D4586, Type I or Type II.

2.2 ROOF INSULATION

- A. Roof Insulation, General: Preformed roof insulation boards approved by roofing manufacturer and listed as component of FM Approvals-approved roofing system.
- B. Polyisocyanurate Board Insulation: ASTM C1289, Type II, Class 1, Grade 2, felt or glass-fiber mat facer on both major surfaces.
- C. Tapered Roof Insulation System:
 - 1. Fabricate of mineral fiberboard, polyisocyanurate, perlite board, or cellular glass. Use only one insulation material for tapered sections. Use only factory-tapered insulation.
 - 2. Cut to provide high and low points with crickets and slopes as shown.
 - 3. Minimum thickness of tapered sections; 38 mm (1-1/2 inch).
 - 4. Minimum slope 1:48 (1/4 inch per 12 inches).

2.3 INSULATION ACCESSORIES

- A. Glass (Felt): ASTM D2178, Type VI, heavy duty ply sheet.
- B. Cants and Tapered Edge Strips:
 - 1. Wood Cant Strips: Refer to Division 06 Section "Rough Carpentry."
 - 2. Insulation Cant Strips: ASTM C208, Type II, Grade 1, cellulosic-fiber insulation board.
 - 3. Tapered Edge Strips: 1:12 (one inch per foot), from 0 mm (0 inches), 300 mm to 450 mm (12 inches to 18 inches) wide.
- C. Vapor Retarder:
 - 1. Glass-Fiber Felts: ASTM D2178, Type IV, asphalt impregnated.
 - 2. Self-Adhering Sheet Vapor Retarder: ASTM D1970, minimum of 1.0-mm- (40-mil-) thick, polyethylene film laminated to layer of rubberized asphalt adhesive, or 0.76- to 1.0-mm- (30- to 40-mil-) thick,

polyethylene film laminated to layer of butyl rubber adhesive;
maximum permeance rating of 6 ng/Pa x s x sq. m (0.1 perm).

D. Roof Board

1. Fiberglass-Mat Faced Gypsum Roof Board, minimum 1/2" (13 mm) thick.

2.4 FASTENERS

- A. Fasteners: Factory-coated steel fasteners and metal or plastic plates complying with FM Approvals 4470, designed for fastening substrate board to roof deck.
- B. Staples and Nails: ASTM F1667. Type as designated for item anchored and for substrate.

PART 3 - EXECUTION

3.1 GENERAL

- A. Do not apply roof insulation if deck will be used for subsequent work platform, storage of materials, or staging or scaffolding will be erected thereon.
- B. Entire roof deck construction of any section of the building shall be completed before insulation system work is begun. Curbs, blocking, edge strips, and other components which insulation, roofing and base flashing is attached to shall be in place ready to receive insulation and roofing. Coordinate roof insulation operations with roofing and sheet metal work so that insulation is installed to permit continuous roofing operations.
- C. Insulation system materials shall be dry and damage free when applied. Do not use broken insulation or insulation with damaged facings. Remove damaged insulation from the site immediately.
- D. Dry out surfaces, including the flutes of metal deck, that become wet from any cause during progress of the work before roofing work is resumed. Apply materials only to dry substrates.
- E. Except for temporary protection specified, do not apply materials during damp or rainy weather, during excessive wind conditions, nor while moisture (dew, fog, snow, ice) or frost is present in any amount in or on the materials when temperature is below 10°C (50 OF). Do not apply materials to substrate having temperature of 10°C (50 OF) or less.
- F. Phased construction is not permitted. The complete installation of all flashing, insulation, and roofing shall be completed in the same day except for the area where temporary protection is required when work

is stopped.

3.2 SURFACE PREPARATION

- A. Sweep decks to broom clean condition. Remove all dust, dirt or debris.
- B. Remove projections that might damage materials.

3.3 SELECTION OF RIGID INSULATION

A. Insulation Type:

- 1. Use not less than two layers of insulation unless specified otherwise.
- 2. Where tapered insulation is used, all insulation shall be factory tapered.
- 3. Use same insulation as existing for roof repair and alterations unless specified otherwise.

B. Insulation Thickness:

- 1. Thickness of roof insulation shown on drawings is nominal. Actual thickness shall provide the thermal resistance "R" value of not less than 13 for uniform thickness. (Average thickness where tapered insulation is used).
- 2. The minimum thickness of insulation for metal decks shall not be less than recommended by the insulation manufacturer to span the rib opening (flute size) of the metal deck used.
- 3. When thickness of insulation to be used is more or less than that shown on the drawings, make adjustments in the alignment and location of roof drains, flashing, gravel stops, fascias and similar items at no additional cost to the Government.
- 4. Where tapered insulation is used, the thickness of the insulation at high points and roof edges shall be as shown on the drawings; the thickness at the low point (drains) shall be not less than 38 mm (1-1/2 inches).
- 5. Use not less than two layers of insulation when insulation is 25 mm (one inch) or more in thickness unless specified otherwise.

3.4 INSTALLATION OF INSULATION

- A. Lay insulating units with close joints, in regular courses and with cross joints broken. When laid in more than one layer, break joints of succeeding layers of roof insulation with those in preceding layer. Bed insulation layers in adhesive in accordance with manufacturer's recommendations and firmly walk into place. Keep adhesive below surface of insulation to receive single ply rubber roofing.

- B. Lay units with long dimension perpendicular to the rolled (longitudinal) direction of the roofing felt.
- C. Cover all insulation installed on the same day by either:
 - 1. The roofing membrane as specified.
 - 2. Temporary protection as specified.
- D. Seal all cut edges at penetrations and at edges against blocking with roof cement. Extend roof cement a minimum of two inches beyond edge of roof membrane.
- E. Cut to fit tight against blocking or penetrations.
- F. Steel Deck:
 - 1. Material and method of application of insulation systems used on metal decks shall meet the requirements of Underwriter's laboratories for Class A or Factory Mutual Research Corporation for Class I Insulated Steel Roof Deck.
 - 2. Mechanically anchor first layer of insulation to steel deck to conform to FM Class 1-90, Insulated Steel Roof Deck.
 - 3. Locate the long dimension edge joints to have solid bearing on top of deck ribs, do not cantilever over deck rib openings or flutes.

- - - E N D - - -

FLUID-APPLIED MEMBRANE AIR BARRIERS

PART 1 - GENERAL

1.1 DESCRIPTION

A. This Section specifies:

1. A fluid-applied membrane air/water barrier, vapor retarding, used for cavity wall assemblies.

1.2 RELATED WORK

- A. Vapor retarder under slab on grade: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- B. Embedded flashings: Section 04 20 00, UNIT MASONRY.
- C. Rigid board insulation: Section 07 21 13, THERMAL INSULATION.
- D. Sheet metal flashing: Section 07 60 00, FLASHING AND SHEET METAL.
- E. Joint-sealant materials and installation: Section 07 92 00, JOINT SEALANTS.

1.3 PERFORMANCE REQUIREMENTS

- A. General: Air/water/vapor barrier shall be capable of performing as a continuous vapor-retarding and vapor permeable air barrier and as a liquid-water drainage plane flashed to discharge to the exterior incidental condensation or water penetration. Air/water/vapor barrier assemblies shall be capable of accommodating substrate movement and of sealing substrate expansion and control joints, construction material changes, and transitions at perimeter conditions without deterioration and air leakage exceeding specified limits.

1.4 SUBMITTALS

- A. Product Data: Include manufacturer's written instructions for evaluating, preparing, and treating substrate; technical data; and tested physical and performance properties of air/water/vapor barrier.
- B. Shop Drawings: Show locations and extent of air/water/vapor barrier. Include details for substrate joints and cracks, counterflashing strip, penetrations, inside and outside corners, terminations, and tie-ins with adjoining construction.
 1. Include details of interfaces with other materials that form part of air/water/vapor barrier.
 2. Include details of mockups.
- C. Product Certificates: For air/water/vapor barriers, certifying compatibility of air/water/vapor barrier and accessory materials with

Project materials that connect to or that come in contact with the barrier; signed by product manufacturer.

- D. Qualification Data: For Applicator.
- E. Product Test Reports: Based on evaluation of comprehensive tests performed by a qualified testing agency, for air/water/vapor barriers.

1.5 QUALITY ASSURANCE

- A. Applicator Qualifications: A firm experienced in applying air/water/vapor barrier materials similar in material, design, and extent to those indicated for this Project, whose work has resulted in applications with a record of successful in-service performance.
- B. Field Mock-up: Provide materials for field mockups specified in Section 04 20 00, Unit Masonry.
- C. Preinstallation Conference: Conduct conference at Project site.
 - 1. Include installers of other construction connecting to air/water/vapor barrier, including waterproofing, masonry, sealants, louvers and door frames.
 - 2. Review air/water/vapor barrier requirements including surface preparation, substrate condition and pretreatment, minimum substrate curing period, forecasted weather conditions, special details and sheet flashings, installation procedures, sequence of installation, and protection and repairs.

1.6 DELIVERY, STORAGE, AND HANDLING

- A. Store liquid materials in their original undamaged packages in a clean, dry, protected location and within temperature range required by air/water/vapor barrier manufacturer.
- B. Remove and replace liquid materials that cannot be applied within their stated shelf life.
- C. Store rolls according to manufacturer's written instructions.
- D. Protect stored materials from direct sunlight.

1.7 PROJECT CONDITIONS

- A. Environmental Limitations: Apply air/water/vapor barrier within the range of ambient and substrate temperatures recommended by air/water/vapor barrier manufacturer. Protect substrates from environmental conditions that affect performance of air/water/vapor barrier. Do not apply air/water/vapor barrier to a damp or wet substrate or during snow, rain, fog, or mist.

PART 2 - PRODUCTS

2.1 FLUID-APPLIED MEMBRANE AIR/WATER/VAPOR BARRIER

- A. Fluid-Applied, Vapor-Retarding Membrane Air Barrier: Elastomeric, modified bituminous membrane.
 - 1. Physical and Performance Properties:
 - a. Membrane Air Permeance: Not to exceed 0.004 cfm x sq. ft. of surface area at 1.57-lbf/sq. ft. (0.02 L/s x sq. m of surface area at 75-Pa) pressure difference; ASTM E 2178.
 - b. Membrane Vapor Permeance: Not to exceed 0.1 perm (5.8 ng/Pa x s x sq. m); ASTM E 96.

2.2 AUXILIARY MATERIALS

- A. General: Auxiliary materials recommended by air/water/vapor barrier manufacturer for intended use and compatible with air/water/vapor barrier membrane. Liquid-type auxiliary materials shall comply with VOC limits of authorities having jurisdiction.
- B. Primer: Liquid primer recommended for substrate by manufacturer of air/water/vapor barrier material.
- C. Counterflashing Strip: Modified bituminous, 40-mil- (1.0-mm-) thick, self-adhering sheet consisting of 32 mils (0.8 mm) of rubberized asphalt laminated to an 8-mil- (0.2-mm-) thick, crosslaminated polyethylene film with release liner backing.
- D. Joint Reinforcing Strip: Air/water/vapor barrier manufacturer's glass-fiber-mesh tape.
- E. Substrate Patching Membrane: Manufacturer's standard trowel-grade substrate filler.
- F. Adhesive and Tape: Air/water/vapor barrier manufacturer's standard adhesive and pressure-sensitive adhesive tape.
- G. Modified Bituminous Transition Strip: Vapor-retarding, 40-mil- (1.0-mm-) thick, smooth-surfaced, self-adhering; consisting of 36 mils (0.9 mm) of rubberized asphalt laminated to a 4-mil- (0.1-mm-) thick polyethylene film with release liner backing.
- H. Joint Sealant: ASTM C 920, single-component, neutral-curing silicone; Class 100/50 (low-modulus), Grade NS, Use NT related to exposure, and, as applicable to joint substrates indicated, Use O. Comply with Section 07 92 00, JOINT SEALANTS.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Examine substrates, areas, and conditions, with Installer present, for compliance with requirements and other conditions affecting performance.
 - 1. Verify that substrates are sound and free of oil, grease, dirt, excess mortar, or other contaminants.
 - 2. Verify that concrete has cured and aged for minimum time period recommended by air/water/vapor barrier manufacturer.
 - 3. Verify that concrete is visibly dry and free of moisture. Test for capillary moisture by plastic sheet method according to ASTM D 4263.
 - 4. Verify that masonry joints are flush and completely filled with mortar.
 - 5. Proceed with installation only after unsatisfactory conditions have been corrected.

3.2 SURFACE PREPARATION

- A. Clean, prepare, treat, and seal substrate according to manufacturer's written instructions. Provide clean, dust-free, and dry substrate for air/water/vapor barrier application.
- B. Mask off adjoining surfaces not covered by air/water/vapor barrier to prevent spillage and overspray affecting other construction.
- C. Remove grease, oil, bitumen, form-release agents, paints, curing compounds, and other penetrating contaminants or film-forming coatings from concrete.
- D. Remove fins, ridges, mortar, and other projections and fill honeycomb, aggregate pockets, holes, and other voids in concrete with substrate patching membrane.
- E. Remove excess mortar from masonry ties, shelf angles, and other obstructions.
- F. At changes in substrate plane, apply sealant or termination mastic beads at sharp corners and edges to form a smooth transition from one plane to another.
- G. Cover gaps in substrate plane and form a smooth transition from one substrate plane to another with stainless-steel sheet mechanically fastened to structural framing to provide continuous support for air/water/vapor barrier.

3.3 JOINT TREATMENT

- A. Concrete and Masonry: Prepare, treat, rout, and fill joints and cracks in substrate according to ASTM C 1193 and air/water/vapor barrier manufacturer's written instructions. Remove dust and dirt from joints and cracks complying with ASTM D 4258 before coating surfaces.

3.4 TRANSITION STRIP INSTALLATION

- A. Install strips, transition strips, and auxiliary materials according to air/water/vapor barrier manufacturer's written instructions to form a seal with adjacent construction and maintain a continuous air/water/vapor barrier.
- B. Apply primer to substrates at required rate and allow to dry. Limit priming to areas that will be covered by air/water/vapor barrier sheet in same day. Reprime areas exposed for more than 24 hours.
- C. Connect and seal exterior wall air/water/vapor barrier membrane continuously to concrete below-grade structures, floor-to floor construction, exterior louvers, exterior door framing, and other construction used in exterior wall openings, using accessory materials.
- D. At end of each working day, seal top edge of strips and transition strips to substrate with termination mastic.
- E. Apply joint sealants forming part of air/water/vapor barrier assembly within manufacturer's recommended application temperature ranges. Consult manufacturer when sealant cannot be applied within these temperature ranges.
- F. Seal strips and transition strips around masonry reinforcing or ties and penetrations with termination mastic.
- G. Seal top of through-wall flashings to air/water/vapor barrier with an additional 6-inch- (150-mm-) wide, modified bituminous or counterflashing strip.
- H. Seal exposed edges of strips at seams, cuts, penetrations, and terminations not concealed by metal counterflashings or ending in reglets with termination mastic.
- I. Repair punctures, voids, and deficient lapped seams in strips and transition strips. Slit and flatten fishmouths and blisters. Patch with transition strips extending 6 inches (150 mm) beyond repaired areas in strip direction.

3.5 AIR/WATER/VAPOR BARRIER MEMBRANE INSTALLATION

- A. Apply air/water/vapor barrier membrane to form a seal with strips and transition strips and to achieve a continuous air/water/vapor barrier according to air/water/vapor barrier manufacturer's written instructions.
- B. Apply air/water/vapor barrier membrane within manufacturer's recommended application temperature ranges.
- C. Apply primer to substrates at required rate and allow to dry. Limit priming to areas that will be covered by air/water/vapor barrier sheet in same day. Reprime areas exposed for more than 24 hours.
- D. Apply a continuous unbroken air/water/vapor barrier to substrates according to manufacturer's written recommended minimum thickness. Apply membrane in full contact around protrusions such as masonry ties.
- E. Apply strip and transition strip a minimum of 1 inch (25 mm) onto cured air membrane or strip and transition strip over cured air membrane overlapping 3 inches (75 mm) onto each surface according to air/water/vapor barrier manufacturer's written instructions.
- F. Do not cover air/water/vapor barrier until it has been tested and inspected by Owner's testing agency.
- G. Correct deficiencies in or remove air/water/vapor barrier that does not comply with requirements; repair substrates and reapply air/water/vapor barrier components.

3.6 CLEANING AND PROTECTION

- A. Protect air/water/vapor barrier system from damage during application and remainder of construction period, according to manufacturer's written instructions.
- B. Clean spills, stains, and soiling from construction that would be exposed in the completed work using cleaning agents and procedures recommended by manufacturer of affected construction.
- C. Remove masking materials after installation.

- - - END - - -

SECTION 07 40 00
METAL WALL PANELS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies insulated metal wall panels and composite metal wall panel system.

1.2 RELATED WORK

- A. Sealant: Section 07 92 00, JOINT SEALANTS.
B. Cold formed metal framing system: Section 05 40 00, COLD FORMED METAL FRAMING.

1.3 MANUFACTURER'S QUALIFICATIONS

- A. Insulated metal wall panels and composite metal wall systems shall be products of a manufacturer regularly engaged in the fabrication and erection of metal panels and composite metal wall and roof systems of the type and design shown and specified.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
B. Samples: Metal panel, 150 mm (six inch) square, showing finish, each color and texture.
C. Shop Drawings: Show details of construction and installation of insulated metal wall panels and composite metal panel system. Include details of collateral steel framing, U value, thickness and kind of material, closures, flashing, fastenings and related components and accessories.
D. Manufacturer's Literature and Data: Wall and roof panels

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extend referenced. The publications are referenced in the text by the basic designation only.
B. American Society for Testing and Materials (ASTM):
A653/A653M-10..... Steel Sheet, Zinc-Coated (Galvanized), or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
A463-10..... Steel Sheet, Cold-Rolled, Aluminum-Coated, by the Hot-Dip Process
A924/A924M-10..... Steel Sheet, Metallic Coated by the Hot-Dip Process

A1008/A1008M-10.....	Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy
B209/209M-07.....	Aluminum and Aluminum Alloy Sheet and Plate
C1396-11.....	Standard Specification for Gypsum Board
C553-08.....	Mineral Fiber Blanket Thermal Insulation for Commercial and Industrial Applications
C591-09.....	Unfaced Preformed Rigid Cellular Polyisocyanurate Thermal Insulation
C612-10.....	Mineral Fiber Block and Board Thermal Insulation

PART 2 - PRODUCTS

2.1 COMPOSITE METAL WALL PANELS

A. Material

1. Aluminum Sheet: ASTM B209, 3003 alloy, minimum 0.020 inch thick aluminum.
2. Composition: Two metal sheets sandwiching a rigid plastic core formed in a continuous process with no glues or adhesives between dissimilar materials.
3. Panel Thickness: 0.157 inch (4 mm) overall thickness; 1.12 psf panel weight minimum.

B. Fasteners: Non-corrosive fasteners as recommended by panel manufacturer, concealed where possible.

C. Stiffeners and Clips: Panel stiffener and mounting clips as required for a complete installation.

D. Attachment System and Mounting Brackets: Attachment system for mounting to substrate and framing as detailed on Drawings and in accordance with approved shop drawings.

E. Sealants and Gaskets: Materials within the panel system shall be manufacturer's standard materials and assemblies.

F. Flashing: Aluminum flashing material finished to match metal panels.

G. Joint Sealants: Refer to Section 07 92 00, JOINT SEALANTS. Colors of sealant shall match panels as acceptable to Architect.

2.2 INSULATED METAL WALL PANELS

A. Material:

1. Steel, Sheet, Galvanized: ASTM A653/A653M, Structural.
2. Grade 40, galvanized coating conforming to ASTM A924/A924M, Class Z 275 G-90.

B. Polyisocyanurate Insulation: Closed cell, modified polyisocyanurate foam using a non-CFC blowing agent, foam-in-place type, with a maximum flame-spread index of 25 and smoke-developed index of 450.

1. Closed-Cell Contents: 90 percent when tested according to ASTM D 2856.

C. Fasteners:

1. Fasteners for steel panels shall be galvanized or cadmium plated steel.
2. Fasteners of size, type and holding strength as recommended by manufacturer.

2.3 FABRICATION

A. General: Fabricate and finish panels and accessories at factory to greatest extent possible. Comply with indicated profiles, dimensional requirements, and structural requirements. Provide means for expansion and contraction at joints and concealed fasteners.

B. Insulated Metal Wall Panels: Panel system shall consist of an insulating core enclosed between two metal face sheets, of configuration shown on Drawings.

1. Construct panels by pressing members together to form a structural unit with closed ends.
2. Furnish wall panels in one continuous length for full height, or at least one story height with no horizontal joints, except at openings. Overall dimensions of panels are shown on Drawings.
3. Connection between panels shall be by interlocking joints filled with sealant.
4. Work shall include metal and bituminous closures, fastenings, flashing, clip, caulking and related components and accessories.
5. Construct panels as follows:
 - a. Exterior face of wall sheet: 22 gage galvanized steel.
 - b. Interior liner face of wall sheet: 22 gage galvanized steel.
 - c. Sub-girts shall be 1.0 mm (0.0396 inches) thick galvanized steel hat channels designed to receive panel fasteners or clips.
 - d. Accessories and fastenings shall be the same material and finish as the panels. Thickness and installation of accessories and flashing shall be as recommended by panel manufacturer.

C. Composite Metal Panel System: Fabricate and finish panels and accessories at factory to greatest extent possible. Comply with indicated profiles, dimensional requirements, and structural requirements. Provide means for expansion and contraction at joints and concealed fasteners. ss of wall system is shown on the drawings.

Provide connection between panels with joints filled with sealant specified in Section 07 92 00, JOINT SEALANTS. Seal joints between related components as required to make the work water-tight.

1. Work for wall system shall include steel framing members, fastenings, flashings, coping accessories and clips, caulking, vertical steel angles at existing building and all related components and accessories. Construct wall system as follows:
2. Rout and Return Dry System: Fabricator and installer must provide an engineered pressure relief system including extruded perimeter frame, drainage gutter, all extrusions, clips, fasteners, anchors, spacers, trim, flashings, gaskets, sealants, and related materials and components to provide a complete installation.
3. Tolerances:
 - a. Panel Bow: Maximum 0.8% of panel dimension in width and length
 - b. Appearance: Panel lines, breaks, and angles shall be sharp, true, and surfaces free from warp or buckle.
4. Joints: Joints in horizontal bands to be centered on curtain wall vertical mullions. All other composite metal panel joints to be as indicated on Drawings.

2.4 FINISH

- A. For composite wall panels, the finishes shall be as follows for aluminum face sheets:
 1. AA-R1X finish Fluoropolymer enamel finish, consisting of a chemical pre-treatment of the base aluminum; then applying a primer coat of 0.1 to 0.4 mil dry film thickness; a polyvinylidene fluoride resin finish coat of 0.8 mil minimum dry film thickness on one side, and a wash coat of 0.3 to 0.4 mil minimum dry film thickness applied to reverse side.
- B. For steel face sheets, the finishes shall be as follows:
 1. Fluorocarbon finish, consisting of a prime coat and a polyvinylidene fluoride finish coat of 1.0 mil minimum dry film thickness on one side, and a wash coat of 0.5 mil minimum dry film thickness applied to reverse side.
 2. Baked-on enamel prime coat 0.5 mil thick for steel interior liner face sheet for insulated wall panels.
- C. Finish numbers for aluminum specified herein are in accordance with The Aluminum Association's Designation System. Each aluminum finish number preceded by letters AA identifies it as an Aluminum Association designation.

- D. Aluminum alloy used for color coating shall be as required to produce specified color.
1. Color shall match adjacent Lab/Warehouse building.
 - a. Composite Metal Panel: Factory finish (baked on primer coat), smooth, flat, flouropolymer 2-coat system.
 - b. Insulated Metal Panel: Standard embossed plank, 22 gauge smooth, flush, flourofinish.
 2. Color for sheet aluminum shall not deviate more than the colors of extrusion samples.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General: Install panels in accordance with the manufacturer's approved erection instructions and diagrams, except as specified otherwise. Panels shall be in full and firm contact with supports and with each other at side and end laps. Where panels are cut in the field, or where any of the factory applied coverings or coatings are abraded or damaged in handling or installation, they shall, after the necessary repairs have been made with material of the same type and color as the weather coating, be approved before being installed. All cut ends and edges, including those at openings through the sheets shall be sealed completely. Correct defects or errors in the materials in an approved manner. Replace materials which cannot be corrected in an approved manner with nondefective material. Provide molded closure strips where indicated and whenever sheets terminate with open ends after installation.
- B. Wall Panels: Apply panels with the configuration shown on Drawings. Seal side and end laps with joint sealing material. Flash and seal walls at the base, at the top, around windows, door frames, framed louvers, and other similar openings. Install closure strips, flashings, and sealing material in an approved manner that will assure complete weather tightness. Flashing will not be required where approved "self-flashing" panels are used.
- C. Flashing: All flashing and related closures and accessories in connection with the preformed metal panels shall be provided as indicated and as necessary to provide a watertight installation. Details of installation, which are not indicated, shall be in accordance with the panel manufacturer's printed instruction and details, or the approved shop drawings. Installation shall allow for expansion and contraction of flashing.

E. Fasteners: Fastener spacings shall be in accordance with the manufacturer's recommendations, and as necessary to withstand the design loads indicated. Install fasteners in valleys or crowns as recommended by the manufacturer of the sheet being used. Install fasteners in straight lines within a tolerance of 13 mm (1/2-inch) in the length of a bay. Drive exposed penetrating type fasteners normal to the surface, and to a uniform depth to seat gasketed washers properly, and drive so as not to damage factory applied coating. Exercise extreme care in drilling pilot holes for fastenings to keep drills perpendicular and centered in valleys, or crowns, as applicable. After drilling, remove metal filings and burrs from holes prior to installing fasteners and washers. Torque used in applying fasteners shall not exceed that recommended by the manufacturer. Remove panels deformed or otherwise damaged by over-torqued fastenings, and provide new panels. Remove metal shavings and filings from roofs on completion to prevent rusting and discoloration of the panels.

3.2 ISOLATION OF ALUMINUM

- A. Isolate aluminum in contact with or fastened to dissimilar metals other than stainless steel, white bronze, or other metal compatible with aluminum by one of the following:
1. Painting the dissimilar metal with a prime coat of Zinc-Molybdate followed by two coats of aluminum paint.
 2. Placing a non-abrasive tape or gasket between the aluminum and the dissimilar metal.
- B. Paint aluminum in contact with or built into mortar, concrete, plaster, or other masonry materials with a coat of alkali-resistant bituminous paint.
- C. Paint aluminum in contact with wood or other absorptive materials, that may become repeatedly wet, with two coats of bituminous paint, or two coats of aluminum paint. Seal joints with caulking material.

3.3 PROTECTION AND CLEANING

- A. Protect panels and other components from damage during and after erection, and until project is accepted by the Government.
- B. After completion of work, all exposed finished surfaces of panels shall be cleaned of soil, discoloration and disfiguration. Touch-up abraded surfaces of panels.

- - - E N D - - -

SECTION 07 53 60

POLYISOBUTYLENE SHEET ROOFING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Polyisobutylene (PIB) partially adhered sheet roofing system.
 - 1. PIB sheet membrane roofing (adhered to rigid insulation).
 - 2. PIB sheet membrane flashing (at pipe penetrations, roof drains, equipment supports, curbs, parapets, lightning protection) .
 - 3. Flashing termination reglets.
 - 4. Sealants.
 - 5. Walkway pads.
 - 6. Fasteners and related accessories for a complete installation.
- B. System shall comply with requirements for FM-I-90 and U.L. Class "A".

1.2 RELATED WORK

- A. Treated wood framing, blocking, and nailers: Section 06 10 00, ROUGH CARPENTRY.
- B. Rigid Polyisocyanurate Roof Insulation: Section 07 22 00, ROOF INSULATION
- C. Extruded Aluminum Copings and Fascias, and Expansion Joints: Section 07 72 00, ROOF ACCESSORIES.

1.3 QUALITY ASSURANCE

- A. Approved applicator by the membrane roofing system manufacturer, and certified by the manufacturer as having the necessary expertise to install the specific system.
- B. Pre-Roofing Meeting:
 - 1. Upon completion of roof deck installation and prior to any roofing application, hold a pre-roofing meeting arranged by the Contractor and attended by the Roofing Inspection, Material Manufacturers Technical Representative, Roofing Applicator, Contractor, and COTR.
 - 2. Discuss specific expectations and responsibilities, construction procedures, specification requirements, application, environmental conditions, job and surface readiness, material storage, and protection.
 - 3. Inspect roof deck at this time to:
 - a. Verify that work of other trades which penetrates roof deck is completed.
 - b. Determine adequacy of deck anchorage, presence of foreign material, moisture and unlevel surfaces, or other conditions

that would prevent application of roofing system from commencing or cause a roof failure.

- c. Examine samples and installation instructions of manufacturer.

C. Upon completion of installation, provide inspection by roof membrane manufacturer to assure that installation is in accordance with manufacturer's requirements.

D. Provide on-site inspection by roof membrane manufacturer.

1.4 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Applicators approval certification by manufacturer.

C. Shop Drawings:

- 1. Sheet membrane layout.
- 2. Termination details.

D. Manufacturer's installation instructions revised for project.

E. Samples:

- 1. Sheet membrane: One 8-1/2 inch by II-inch piece.
- 2. Sheet flashing: One 8-1/2 inch by II-inch piece.
- 3. Self-adhered: Two 12-inch square samples or welded seams to represent quality of field welded seams.

1.5 DELIVERY, STORAGE AND HANDLING

A. Deliver, store, and handle materials as specified by manufacturer.

B. Store volatile materials separate from other materials with separation to prevent fire from damaging the work, or other materials.

1.6 WARRANTY

A. Roofing work shall conform to terms of "Warranty of Construction", FAR clause 52.246-21, except extend the warranty period to twenty (20) years for labor and materials.

1.7 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications and referenced in the text by the basic designation only.

B. National Roofing Contractors Association (NRCA):
Third Edition The NRCA Roofing and Waterproofing Manual.

C. Factory Mutual Engineering and Research Corporation (FM):
Annual Issue Approval Guide Building Materials

D. Underwriters Laboratories, Inc. (UL):
Annual Issue Building Materials Directory

Annual Issue Fire Resistance Directory

PART 2 - PRODUCTS

2.1 PIB SHEET ROOFING

- A. Reinforced with non-woven synthetic fleece backing.
- B. Weight: 0.57 pounds per square foot.
- C. Thickness: 100 mil thick sheet for partially adhered system.
- D. Color: White.

2.2 PIB FLASHING SHEET

- A. Non-reinforced PIB material at drains, stacks and membrane penetrations, thickness as recommended by membrane manufacturer.
- B. Fleece reinforced PIB material at curb and wall flashing surfaces, thickness as recommended by membrane manufacturer.

2.3 MISCELLANEOUS ROOFING MEMBRANE MATERIALS

- A. Adhesives: Cold applied type as recommended by membrane manufacturer.
- B. Primers, termination reglets, fasteners, sealant; as recommended by membrane manufacturer.

2.4 FLEXIBLE TUBING

- A. Closed cell neoprene, butyl polyethylene, vinyl, or polyethylene tube or rod and as approved by membrane manufacturer.
- B. Diameter approximately 1-1/2 times joint width.

2.5 WALKWAY PADS

- A. Walkway pad, compatible with roof membrane, install as per manufacturers' specification.
- B. Refer to Drawings for locations.

PART 3 - EXECUTION

3.1 GENERAL

- A. Do not apply roof membrane if deck will be used for subsequent work platform, storage of materials, or staging or scaffolding will be erected thereon unless protection provided to distribute loads less than one-half compression resistance of roofing system materials.
 - 1. Curbs, blocking, edge strips, and other components to which roofing and flashing is attached in place ready to receive insulation and, roofing.
 - 2. Complete installation of flashing, insulation, and roofing in the same day except for the area where temporary protection is required when work is stopped.
- B. Phased construction is not permitted.
- C. Apply materials only to dry permitted.

D. Except for temporary protection specified, do not apply materials during damp or rainy weather, during excessive wind conditions, nor while moisture (dew, snow, fog, ice, or frost) is present in an amount in or on the materials.

1. Do not apply materials to substrate having temperature of 4 C (40 degrees F) or less, or when materials applied with the roof require higher application temperature.
2. Do not apply materials when the temperature is below 4 (40 degrees F).

E. Temporary Protection:

1. Install temporary protection consisting of a temporary seal and water cut-offs at the end of each day's work and when work is halted for an indefinite period or work is stopped when precipitation is imminent.
2. Temporarily seal exposed surfaces of insulation within the roofing membrane.
3. Do not leave insulation surfaces or edges exposed.
4. Use polyethylene film or building paper to separate roof sheet from urethane adhesive materials.
5. Apply the temporary seal and water cut off by extending the roof membrane beyond the insulation and securely embedding the edge of the roof membrane in 6 mm (1/4-inch) thick by 50 mm (two-inches) wide strip of temporary closure sealant (polyurethane foam night sealant) and weight edge with sandbags, to prevent displacement; space sandbags not over 2400 mm (eight-foot) centers. Check daily to insure temporary seal remains watertight. Reseal open areas and weight down.
6. Before the work resumes, cut off and discard portions of the roof membrane in contact with roof cement or urethane foam materials.
 - a. Cut not less than 150 mm (six-inches) back from roof cement coated edges or surfaces.
 - b. Remove temporary polyethylene film or building paper.
7. Remove and discard sandbags contaminated with bituminous products.
8. For roof areas that are to remain intact and that are subject to foot traffic and damage, provide temporary wood walkways with notches in sleepers to permit free drainage.
9. Provide 4'x 8' Homosote board or polyisocynurate insulation over roofing membrane under temporary wood walkways and adjacent areas. Round all edges and corners of wood bearing on roof

surface.

3.2 PREPARATION

- A. Remove dirt, debris, and surface moisture. Cover or fill voids greater than 6 mm (1/4-in) wide to provide solid support for roof membrane.

3.3 INSTALLATION OF ROOF INSULATION

- A. Installation of rigid polyisocynurate insulation is specified in Section 07 22 00, ROOF INSULATION.

3.4 INSTALLATION OF ROOFING AND FLASHING

A. Partially Adhered System:

- 1. Apply cold bonding adhesive over installed rigid insulation in accordance with membrane manufacturer's published instructions and as directed by manufacturer's field service representative.

B. Flashing Roof Drains:

- 1. Install PIB roof drain flashing as recommended by the membrane manufacturer.

C. Installing PIB Flashing and Pipe Flashing:

- 1. Install PIB flashing membrane to pipes, walls or curbs to a height not less than 200 mm (eight-inches) above roof surfaces and 100 mm (four-inches) or roof membrane and as indicated on Drawings.
 - a. Adhere flashing to pipe, wall or curb with cold bonding adhesive.
 - b. Form inside and outside corners of PIB flashing membrane in accordance with manufacturer's approved details.
- 2. Anchor top of flashing to walls or curbs with termination reglets according to manufacturer's approved details.
- 3. Apply sealant to top edge of flashing.

D. Installing Building Expansion Joints:

- 1. Coordinate installation with roof expansion joint system.
- 2. Install flexible tubing 1-1/2 times width of joint over joint.
- 3. Comply with manufacturer's approved details.

3.5 WALKWAY PADS

- A. Clean membrane where pads are applied.
- B. Adhere pads to membrane with membrane manufacturer's recommended adhesive.
- C. Refer to Drawings for locations.

3.6 FIELD QUALITY CONTROL

- A. Examine and probe seams in the membrane and flashing in the presence

of the Contracting Officer's Technical Representative and Membrane Manufacturer's Inspector.

- B. Probe the edges of welded seams with a blunt tipped instrument. Use sufficient hand pressure to detect marginal bonds, voids, skips, and fishmouths.
- C. Repair fishmouths and wrinkles by cutting to lay flat and installing patch over cut area extending 100 mm (four-inches) beyond cut.

- - - E N D - - -

SECTION 07 60 00
FLASHING AND SHEET METAL

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Formed sheet metal work for flashing, copings, and roof edge metal are specified in this section.

1.2 RELATED WORK

- A. Membrane base flashings and stripping: Section 07 53 60, POLYISOBUTYLENE SHEET ROOFING.
- B. Joint Sealants: Section 07 92 00, JOINT SEALANTS.
- C. Integral flashing components of manufactured roof specialties and accessories or equipment: Section 07 72 00, ROOF ACCESSORIES, Division 22, PLUMBING sections, and Division 23 HVAC sections.
- G. Paint materials and application: Section 09 91 00, PAINTING.

1.3 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
- B. Aluminum Association (AA):
- AA-C22A41Aluminum Chemically etched medium matte, with clear anodic coating, Class I Architectural, 0.7-mil thick
- AA-C22A42Chemically etched medium matte, with integrally colored anodic coating, Class I Architectural, 0.7 mils thick
- AA-C22A44Chemically etched medium matte with electrolytically deposited metallic compound, integrally colored coating Class I Architectural, 0.7-mil thick finish
- C. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):
- ANSI/SPRI ES-1-03Wind Design Standard for Edge Systems Used with Low Slope Roofing Systems
- D. American Architectural Manufacturers Association (AAMA):

- AAMA 620Voluntary Specification for High Performance
Organic Coatings on Coil Coated Architectural
Aluminum
- AAMA 621Voluntary Specification for High Performance
Organic Coatings on Coil Coated Architectural
Hot Dipped Galvanized (HDG) and Zinc-Aluminum
Coated Steel Substrates
- E. ASTM International (ASTM):
- A167-99(R2009)Stainless and Heat-Resisting Chromium-Nickel
Steel Plate, Sheet, and Strip
- A653/A653M-09Steel Sheet Zinc-Coated (Galvanized) or Zinc
Alloy Coated (Galvanized) by the Hot- Dip
Process
- B32-08Solder Metal
- B209-07Aluminum and Aluminum-Alloy Sheet and Plate
- B370-09Copper Sheet and Strip for Building
Construction
- D173-03Bitumen-Saturated Cotton Fabrics Used in
Roofing and Waterproofing
- D412-06Vulcanized Rubber and Thermoplastic Elastomers-
Tension
- D1187-97(R2002)Asphalt Base Emulsions for Use as Protective
Coatings for Metal
- D1784-08Rigid Poly (Vinyl Chloride) (PVC) Compounds and
Chlorinated Poly (Vinyl Chloride) (CPVC)
Compounds
- D3656-07Insect Screening and Louver Cloth Woven from
Vinyl-Coated Glass Yarns
- D4586-07Asphalt Roof Cement, Asbestos Free
- F. Sheet Metal and Air Conditioning Contractors National Association
(SMACNA): Architectural Sheet Metal Manual.
- G. National Association of Architectural Metal Manufacturers (NAAMM):
- AMP 500-06Metal Finishes Manual
- H. Federal Specification (Fed. Spec):
- A-A-1925AShield, Expansion; (Nail Anchors)
- UU-B-790ABuilding Paper, Vegetable Fiber

I. International Code Commission (ICC): International Building Code,
Current Edition

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: For all specified items, including:
 - 1. Flashings
 - 2. Copings
- C. Manufacturer's Literature and Data: For all specified items, including:
 - 1. Two-piece counterflashing
 - 2. Thru wall flashing
 - 3. Nonreinforced, elastomeric sheeting
- D. Certificates: Indicating compliance with specified finishing requirements, from applicator and contractor.

PART 2 - PRODUCTS

2.1 FLASHING AND SHEET METAL MATERIALS

- A. Stainless Steel: ASTM A167, Type 302B, dead soft temper.
- B. Aluminum Sheet: ASTM B209, alloy 3003-H14 //except alloy used for color anodized aluminum shall be as required to produce specified color. Alloy required to produce specified color shall have the same structural properties as alloy 3003-H14//.
- C. Galvanized Sheet: ASTM, A653.
- D. Nonreinforced, Elastomeric Sheeting: Elastomeric substances reduced to thermoplastic state and extruded into continuous homogenous sheet (0.056 inch) thick. Sheeting shall have not less than 7 MPa (1,000 psi) tensile strength and not more than seven percent tension-set at 50 percent elongation when tested in accordance with ASTM D412. Sheeting shall show no cracking or flaking when bent through 180 degrees over a 1 mm (1/32 inch) diameter mandrel and then bent at same point over same size mandrel in opposite direction through 360 degrees at temperature of -30°C (-20 °F).

2.2 FLASHING ACCESSORIES

- A. Solder: ASTM B32; flux type and alloy composition as required for use with metals to be soldered.
- B. Rosin Paper: Fed-Spec. UU-B-790, Type I, Grade D, Style 1b, Rosin-sized sheathing paper, weighing approximately 3 Kg/10 m²(6 lbs/100 sf).

C. Bituminous Paint: ASTM D1187, Type I.

D. Fasteners:

1. Use stainless steel for stainless steel and aluminum alloy. Use galvanized steel or stainless steel for galvanized steel.
2. Nails:
 - a. Minimum diameter for stainless steel nails: 2 mm (0.095 inch) and annular threaded.
 - b. Length to provide not less than 22 mm (7/8 inch) penetration into anchorage.
3. Rivets: Not less than 3 mm (1/8 inch) diameter.
4. Expansion Shields: Fed Spec A-A-1925A.

E. Sealant: As specified in Section 07 92 00, JOINT SEALANTS for exterior locations.

F. Roof Cement: ASTM D4586.

2.3 SHEET METAL THICKNESS

- A. Except as otherwise shown or specified use thickness or weight of sheet metal as follows:
- B. Concealed Locations (Built into Construction):
 1. Stainless steel: 0.25 mm (0.010 inch) thick.
 2. Galvanized steel: 0.5 mm (0.021 inch) thick.
- C. Exposed Locations:
 1. Stainless steel: 0.4 mm (0.015 inch).
- D. Thickness of aluminum or galvanized steel is specified with each item.

2.4 FABRICATION, GENERAL

- A. Jointing:
 1. In general, stainless steel joints, except expansion and contraction joints, shall be locked and soldered.
 2. Jointing of stainless steel over 0.45 mm (0.018 inch) thick shall be done by lapping, riveting and soldering.
 3. Joints shall conform to following requirements:
 - a. Flat-lock joints shall finish not less than 19 mm (3/4 inch) wide.
 - b. Lap joints subject to stress shall finish not less than 25 mm (one inch) wide and shall be soldered and riveted.
 - c. Unsoldered lap joints shall finish not less than 100 mm (4 inches) wide.
 4. Flat and lap joints shall be made in direction of flow.

5. Edges of nonreinforced elastomeric sheeting shall be jointed by lapping not less than 100 mm (4 inches) in the direction of flow and cementing with asphalt roof cement or sealant as required by the manufacturer's printed instructions.
6. Soldering:
 - a. Pre tin both mating surfaces with solder for a width not less than 38 mm (1 1/2 inches) of stainless steel.
 - b. Treat in accordance with metal producers recommendations other sheet metal required to be soldered.
 - c. Completely remove acid and flux after soldering is completed.

B. Cleats:

1. Fabricate cleats to secure flashings and sheet metal work over 300 mm (12 inches) wide and where specified.
2. Provide cleats for maximum spacing of 300 mm (12 inch) centers unless specified otherwise.
3. Form cleats of same metal and weights or thickness as the sheet metal being installed unless specified otherwise.
4. Fabricate cleats from 50 mm (2 inch) wide strip. Form end with not less than 19 mm (3/4 inch) wide loose lock to item for anchorage. Form other end of length to receive nails free of item to be anchored and end edge to be folded over and cover nail heads.

C. Edge Strips or Continuous Cleats:

1. Fabricate continuous edge strips where shown and specified to secure loose edges of the sheet metal work.
2. Except as otherwise specified, fabricate edge strips of minimum 1.25 mm (0.050 inch) thick aluminum.
3. Use material compatible with sheet metal to be secured by the edge strip.
4. Fabricate in 3000 mm (10 feet) maximum lengths with not less than 19 mm (3/4 inch) loose lock into metal secured by edge strip.
5. Fabricate Strips for fascia anchorage to extend below the supporting wood construction to form a drip and to allow the flashing to be hooked over the lower edge at least 19 mm (3/4-inch).
6. Fabricate anchor edge maximum width of 75 mm (3 inches) or of sufficient width to provide adequate bearing area to insure a rigid installation using 1.6 mm (0.0625 inch) thick aluminum.

D. Drips:

1. Form drips at lower edge of sheet metal counter-flashings (cap flashings), fascias, gravel stops, wall copings, by folding edge back 13 mm (1/2 inch) and bending out 45 degrees from vertical to carry water away from the wall.
2. Form drip to provide hook to engage cleat or edge strip for fastening for not less than 19 mm (3/4 inch) loose lock where shown.

E. Edges:

1. Edges of flashings concealed in masonry joints opposite drain side shall be turned up 6 mm (1/4 inch) to form dam, unless otherwise specified or shown otherwise.
2. Finish exposed edges of flashing with a 6 mm (1/4 inch) hem formed by folding edge of flashing back on itself when not hooked to edge strip or cleat. Use 6 mm (1/4 inch) minimum penetration beyond wall face with drip for through-wall flashing exposed edge.
3. All metal roof edges shall meet requirements of IBC, current edition.

F. Metal Options:

1. Where options are permitted for different metals use only one metal throughout.
2. Stainless steel may be used in concealed locations for fasteners of other metals exposed to view.
3. Where copper gravel stops, copings and flashings will carry water onto cast stone, stone, or architectural concrete, or stainless steel.

2.5 FINISHES

- A. Use same finish on adjacent metal or components and exposed metal surfaces unless specified or shown otherwise.
- B. In accordance with NAAMM Metal Finishes Manual AMP 500, unless otherwise specified.
- C. Finish exposed metal surfaces as follows, unless specified otherwise:
 1. Stainless Steel: Finish No. 2B or 2D.
 2. Aluminum:
 - a. Fluorocarbon Finish: AAMA 620, high performance organic coating.
 4. Steel and Galvanized Steel:
 - a. Manufacturer's finish:
 - 1) Fluorocarbon Finish: AAMA 621, high performance organic coating.

2.6 THROUGH-WALL FLASHINGS

- A. Form through-wall flashing to provide a mechanical bond or key against lateral movement in all directions. Install a sheet having 2 mm (1/16 inch) deep transverse channels spaced four to every 25 mm (one inch), or ribbed diagonal pattern, or having other deformation unless specified otherwise.
 - 1. Fabricate in not less than 2400 mm (8 feet) lengths; 3000 mm (10 feet) maximum lengths.
 - 2. Fabricate so keying nests at overlaps.
- B. For Masonry Work When Concealed Except for Drip:
 - 1. Stainless steel.
 - 2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
 - 3. Form exposed portions of flashing with drip, approximately 6 mm (1/4 inch) projection beyond wall face.
- C. For Masonry Work When Exposed Edge Forms a Receiver for Counter Flashing:
 - 1. Use same metal and thickness as counter flashing.
 - 2. Form an integral dam at least 5 mm (3/16 inch) high at back edge.
 - 3. Form exposed portion as snap lock receiver for counter flashing upper edge.
- D. Window Sill Flashing and Lintel Flashing:
 - 1. Use stainless steel flat sheet, or nonreinforced elastomeric sheeting.
 - 2. Fabricate flashing at ends with folded corners to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening.
 - 3. Turn up back edge as shown.
 - 4. Form exposed portion with drip as specified or receiver.
- E. Door Sill Flashing:
 - 1. Where concealed, use 0.5 mm (0.018 inch) thick stainless steel.
 - 2. Where shown on drawings as combined counter flashing under threshold, sill plate, door sill, or where subject to foot traffic, use 0.6 mm (0.024 inch) stainless steel.
 - 3. Fabricate flashing at ends to turn up 5 mm (3/16 inch) in first vertical masonry joint beyond masonry opening with folded corners.

2.6 COUNTERFLASHING (CAP FLASHING)

- A. Stainless steel, unless specified otherwise.

B. Fabricate to lap base flashing a minimum of 100 mm (4 inches) with drip:

1. Form lock seams for outside corners. Allow for lap joints at ends and inside corners.
2. In general, form flashing in lengths not less than 2400 mm (8 feet) and not more than 3000 mm (10 feet).
3. Two-piece, lock in type flashing may be used in-lieu-of one piece counter-flashing.
4. Manufactured assemblies may be used.
5. Where counterflashing is installed at new work use an integral flange at the top designed to be extended into the masonry joint or reglet in concrete.
6. Where counterflashing is installed at existing work use surface applied type, formed to provide a space for the application of sealant at the top edge.

C. One-piece Counterflashing:

1. Back edge turned up and fabricate to lock into reglet in concrete.
2. Upper edge formed to extend full depth of masonry unit in mortar joint with back edge turned up 6 mm (1/4 inch).

D. Two-Piece Counterflashing:

1. Receiver to extend into masonry wall depth of masonry unit with back edge turned up 6 mm (1/4 inch) and exposed edge designed to receive and lock counterflashing upper edge when inserted.
2. Counterflashing upper edge designed to snap lock into receiver.

E. Surface Mounted Counterflashing; one or two piece:

1. Use at existing or new surfaces where flashing can not be inserted in vertical surface.
2. One piece fabricate upper edge folded double for 65 mm (2 1/2 inches) with top 19 mm (3/4 inch) bent out to form "V" joint sealant pocket with vertical surface. Perforate flat double area against vertical surface with horizontally slotted fastener holes at 400 mm (16 inch) centers between end holes. Option: One piece surface mounted counter-flashing (cap flashing) may be used. Fabricate as detailed on Plate 51 of SMACNA Architectural Sheet Metal Manual.
3. Two pieces: Fabricate upper edge to lock into surface mounted receiver. Fabricate receiver joint sealant pocket on upper edge and lower edge to receive counterflashing, with slotted fastener holes at 400 mm (16 inch) centers between upper and lower edge.

F. Pipe Counterflashing:

1. Form flashing for water-tight umbrella with upper portion against pipe to receive a draw band and upper edge to form a "V" joint sealant receiver approximately 19 mm (3/4 inch) deep.
2. Fabricate 100 mm (4 inch) over lap at end.
3. Fabricate draw band of same metal as counter flashing. Use 0.33 mm (0.013 inch) thick stainless steel.
4. Use stainless steel bolt on draw band tightening assembly.
5. Vent pipe counter flashing may be fabricated to omit draw band and turn down 25 mm (one inch) inside vent pipe.

G. Where vented edge decks intersect vertical surfaces, form in one piece, shape to slope down to a point level with and in front of edge-set notched plank; then, down vertically, overlapping base flashing.

2.14 REGLETS

- A. Fabricate reglets of one of stainless steel, not less than 0.3 mm (0.012 inch) thick.
- B. Fill open-type reglets with fiberboard or other suitable separator, to prevent crushing of the slot during installation.
- C. Bend edges of reglets for setting into concrete to an angle of not less than 45 degrees, and make wide enough to provide firm anchorage in the concrete.
- D. Fabricate reglets for building into horizontal masonry mortar joints not less than 19 mm (3/4 inch) deep, nor more than 25 mm (one inch) deep.
- E. Fabricate mitered corners, fittings, and special shapes as may be required by details.
- F. Reglets for concrete may be formed to receive flashing and have a 10 mm (3/8 inch), 45 degree snap lock.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General:

1. Install flashing and sheet metal items as shown in Sheet Metal and Air Conditioning Contractors National Association, Inc., publication, ARCHITECTURAL SHEET METAL MANUAL, except as otherwise shown or specified.
2. Apply Sealant as specified in Section 07 92 00, JOINT SEALANTS.

3. Apply sheet metal and other flashing material to surfaces which are smooth, sound, clean, dry and free from defects that might affect the application.
4. Remove projections which would puncture the materials and fill holes and depressions with material compatible with the substrate. Cover holes or cracks in wood wider than 6 mm (1/4 inch) with sheet metal compatible with the roofing and flashing material used.
5. Coordinate with masonry work for the application of a skim coat of mortar to surfaces of unit masonry to receive flashing material before the application of flashing.
6. Confine direct nailing of sheet metal to strips 300 mm (12 inch) or less wide. Nail flashing along one edge only. Space nail not over 100 mm (4 inches) on center unless specified otherwise.
7. Install bolts, rivets, and screws where indicated, specified, or required in accordance with the SMACNA Sheet Metal Manual. Space rivets at 75 mm (3 inch) on centers in two rows in a staggered position. Use neoprene washers under fastener heads when fastener head is exposed.
8. Coordinate with roofing work for the installation of metal base flashings and other metal items having roof flanges for anchorage and watertight installation.
9. Nail continuous cleats on 75 mm (3 inch) on centers in two rows in a staggered position.
10. Nail individual cleats with two nails and bend end tab over nail heads. Lock other end of cleat into hemmed edge.
11. Install flashings in conjunction with other trades so that flashings are inserted in other materials and joined together to provide a water tight installation.
12. Where required to prevent galvanic action between dissimilar metal isolate the contact areas of dissimilar metal with sheet lead, waterproof building paper, or a coat of bituminous paint.
13. Isolate aluminum in contact with dissimilar metals others than stainless steel, white bronze or other metal compatible with aluminum by:
 - a. Paint dissimilar metal with a prime coat of zinc-chromate or other suitable primer, followed by two coats of aluminum paint.
 - b. Paint dissimilar metal with a coat of bituminous paint.

- c. Apply an approved caulking material between aluminum and dissimilar metal.
- 14. Paint aluminum in contact with or built into mortar, concrete, plaster, or other masonry materials with a coat of bituminous paint.
- 15. Paint aluminum in contact with absorptive materials that may become repeatedly wet with two coats of bituminous paint or two coats of aluminum paint.
- 16. Bitumen Stops:
 - a. Install bitumen stops for built-up roof opening penetrations through deck and at formed sheet metal gravel stops.
 - b. Nail leg of bitumen stop at 300 mm (12 inch) intervals to nailing strip at roof edge before roofing material is installed.

3.2 THROUGH-WALL FLASHING

A. General:

1. Install continuous through-wall flashing between top of concrete foundation walls and bottom of masonry building walls; at top of concrete floors; under masonry, concrete, or stone copings and elsewhere as shown.
2. Where exposed portions are used as a counterflashings, lap base flashings at least 100 mm (4 inches) and use thickness of metal as specified for exposed locations.
3. Exposed edge of flashing may be formed as a receiver for two piece counter flashing as specified.
4. Terminate exterior edge beyond face of wall approximately 6 mm (1/4 inch) with drip edge where not part of counter flashing.
5. Turn back edge up 6 mm (1/4 inch) unless noted otherwise where flashing terminates in mortar joint or hollow masonry unit joint.
6. Terminate interior raised edge in masonry backup unit approximately 38 mm (1 1/2 inch) into unit unless shown otherwise.
7. Under copings terminate both edges beyond face of wall approximately 6 mm (1/4 inch) with drip edge.
8. Lap end joints at least two corrugations, but not less than 100 mm (4 inches). Seal laps with sealant.
9. Where dowels, reinforcing bars and fastening devices penetrate flashing, seal penetration with sealing compound. Sealing compound is specified in Section 07 92 00, JOINT SEALANTS.

10. Coordinate with other work to set in a bed of mortar above and below flashing so that total thickness of the two layers of mortar and flashing are same as regular mortar joint.
11. Where ends of flashing terminate turn ends up 25 mm (1 inch) and fold corners to form dam extending to wall face in vertical mortar or veneer joint.
12. Turn flashing up not less than 200 mm (8 inch) between masonry or behind exterior veneer.
13. When flashing terminates in reglet extend flashing full depth into reglet and secure with lead or plastic wedges spaced 150 mm (6 inch) on center.
14. Continue flashing around columns:
 - a. Where flashing cannot be inserted in column reglet hold flashing vertical leg against column.
 - b. Counterflash top edge with 75 mm (3 inch) wide strip of saturated cotton unless shown otherwise. Secure cotton strip with roof cement to column. Lap base flashing with cotton strip 38 mm (1 1/2 inch).
- B. Flashing at top of concrete foundation walls where concrete is exposed. Turn up not less than 200 mm (8 inch) high and into masonry backup mortar joint or reglet in concrete backup as specified.
- C. Flashing at Top of Concrete Floors (except where shelf angles occur): Place flashing in horizontal masonry joint not less than 200 mm (8 inch) below floor slab and extend into backup masonry joint at floor slab 38 mm (1 1/2 inch).
- D. Flashing at Cavity Wall Construction: Where flashing occurs in cavity walls turn vertical portion up against backup under waterproofing, if any, into mortar joint. Turn up over insulation, if any, and horizontally through insulation into mortar joint.
- E. Flashing at Veneer Walls:
 1. Install near line of finish floors over shelf angles or where shown.
 2. Turn up against sheathing.
 3. At stud framing, hem top edge 19 mm (3/4 inch) and secure to each stud with stainless steel fasteners through sheathing.
 4. At concrete backing, extend flashing into reglet as specified.
 5. Coordinate with installation of waterproofing or asphalt felt for lap over top of flashing.
- F. Lintel Flashing when not part of shelf angle flashing:

1. Install flashing full length of lintel to nearest vertical joint in masonry over veneer.
2. Turn ends up 25 mm (one inch) and fold corners to form dam and extend end to face of wall.
3. Turn back edge up to top of lintel; terminate back edge as specified for back-up wall.

G. Window Sill Flashing:

1. Install flashing to extend not less than 100 mm (4 inch) beyond ends of sill into vertical joint of masonry or veneer.
2. Turn back edge up to terminate under window frame.
3. Turn ends up 25 mm (one inch) and fold corners to form dam and extend to face of wall.

H. Door Sill Flashing:

1. Install flashing under bottom of plate sills of doors over curbs opening onto roofs. Extend flashing out to form counter flashing or receiver for counter flashing over base flashing. Set in sealant.
2. Extend sill flashing 200 mm (8 inch) beyond jamb opening. Turn ends up one inch in vertical masonry joint, extend end to face of wall. Join to counter flashing for water tight joint.
3. Where doors thresholds cover over waterproof membranes install sill flashing over water proof membrane under thresholds. Extend beyond opening to cover exposed portion of waterproof membrane and not less than 150 mm (6 inch) beyond door jamb opening at ends. Turn up approximately 6 mm (1/4 inch) under threshold.

3.3 COUNTERFLASHING (CAP FLASHING)

A. General:

1. Install counterflashing over and in conjunction with installation of base flashings, except as otherwise specified or shown.
2. Install counterflashing to lap base flashings not less than 100 mm (4 inch).
3. Install upper edge or top of counterflashing not less than 225 mm (9 inch) above top of the roofing.
4. Lap joints not less than 100 mm (4 inch). Stagger joints with relation to metal base flashing joints.
5. Use surface applied counterflashing on existing surfaces and new work where not possible to integrate into item.

6. When fastening to concrete or masonry, use screws driven in expansion shields set in concrete or masonry. Use screws to wood and sheet metal. Set fasteners in mortar joints of masonry work.

B. One Piece Counterflashing:

1. Where flashing is installed at new masonry, coordinate to insure proper height, embed in mortar, and end lap.
2. Where flashing is installed in reglet in concrete insert upper edge into reglet. Hold flashing in place with lead wedges spaced not more than 200 mm (8 inch) apart. Fill joint with sealant.
3. Where flashing is surface mounted on flat surfaces.
 - a. When top edge is double folded anchor flat portion below sealant "V" joint with fasteners spaced not over 400 mm (16 inch) on center:
 - 1) Locate fasteners in masonry mortar joints.
 - 2) Use screws to sheet metal or wood.
 - b. Fill joint at top with sealant.
4. Where flashing or hood is mounted on pipe.
 - a. Secure with draw band tight against pipe.
 - b. Set hood and secure to pipe with a one by 25 mm x 3 mm (1 x 1/8 inch) bolt on stainless steel draw band type clamp, or a stainless worm gear type clamp.
 - c. Completely fill joint at top with sealant.

C. Two-Piece Counterflashing:

1. Where receiver is installed at new masonry coordinate to insure proper height, embed in mortar, and lap.
2. Surface applied type receiver:
 - a. Secure to face construction in accordance, with manufacturers instructions.
 - b. Completely fill space at the top edge of receiver with sealant.
3. Insert counter flashing in receiver in accordance with fabricator or manufacturer's instructions and to fit tight against base flashing.

- D. Where vented edge occur install so lower edge of counterflashing is against base flashing.

- E. When counter flashing is a component of other flashing install as shown.

3.4 REGLETS

- A. Install reglets in a manner to provide a watertight installation.

- B. Locate reglets not less than 225 mm (9 inch) nor more than 400 mm (16 inch) above roofing, and not less than 125 mm (5 inch) nor more than 325 mm (13 inch) above cant strip.
- C. Butt and align end joints on each section of reglet and securely hold in position until concrete or mortar are hardened:
 - 1. Coordinate reglets for anchorage into concrete with formwork construction.
 - 2. Coordinate reglets for masonry to locate horizontally into mortar joints.

3.5 COPINGS

A. General:

- 1. On walls topped with a wood plank, install a continuous edge strip on the front and rear edge of the plank. Lock the coping to the edge strip with a 19 mm (3/4 inch) loose lock seam.
- 2. Where shown turn down roof side of coping and extend down over base flashing as specified for counter-flashing. Secure counter-flashing to lock strip in coping at continuous cleat.
- 3. Install ends adjoining existing construction so as to form space for installation of sealants. Sealant is specified in Section 07 92 00, JOINT SEALANTS.

B. Aluminum Coping:

- 1. Install with 6 mm (1/4 inch) joint between ends of coping sections.
- 2. Install joint covers, centered at each joint, and securely lock in place.

- - - E N D - - -

SECTION 07 72 00
ROOF ACCESSORIES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies copings, gravel stops, fascias, and expansion joints.

1.2 RELATED WORK

- A. Sealant material and installation: Section 07 92 00, JOINT SEALANTS.
- B. General insulation: Section 07 21 13, THERMAL INSULATION
- C. Rigid insulations for roofing: Section 07 22 00, ROOF INSULATION

1.3 QUALITY CONTROL

- A. All roof accessories shall be the products of manufacturers regularly engaged in producing the kinds of products specified.
- B. Each accessory type shall be the same and be made by the same manufacturer.
- C. Each accessory shall be completely assembled to the greatest extent possible before delivery to the site.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples: Representative sample panel of color anodized aluminum not less than 100 mm X 100 mm (four by four inches), except extrusions shall be a width not less than section to be used. Sample shall show coating with integral color and texture and shall include manufacturer's identifying label.
- C. Shop Drawings: Each item specified showing design, details of construction, installation and fastenings.
- D. Manufacturer's Literature and Data: Each item specified.
- E. Certificates: Stating that aluminum has been given specified thickness of anodizing.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extend referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Material (ASTM):
 - B209/209M-07Aluminum and Aluminum Alloy-Sheet and Plate
 - B221/221M-08Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
 - C612-10Mineral Fiber Block and Board Thermal Insulation

D1187-97 (R2002)Asphalt-Base Emulsions for Use as Protective
Coatings for Metal

C. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06Metal Finishes Manual

D. American Architectural Manufacturers Association (AAMA):
2605-11High Performance Organic Coatings on
Architectural Extrusions and Panels.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Aluminum, Extruded: ASTM B221/B221M.
- B. Aluminum Sheet: ASTM B209/B209M.
- C. Galvanized Sheet Steel: ASTM A526/A526M; G-90 coating.
- D. Insulation: ASTM C612, Class 1 or 2.
- ~~E.~~ Asphalt Coating: ASTM D 1187, Type I, quick setting.

2.2 COPINGS

- A. Fabricate of aluminum not less than 2-mm (0.08 inch thick).
- B. Turn outer edges down each face of wall as shown.
- C. Maximum lengths of 3000 mm (10 feet).
- D. Shop fabricate external and internal corners as one piece assemblies with not less than 300 mm (12 inch) leg lengths.
- E. Provide 100 mm (four inch) wide 0.8 mm (0.032 inch) thick watertight joint covers.
- F. Provide anchor gutter bar of 0.8 mm (0.032 inch) thick with anchor holes formed for underside of joint.
- G. Provide concealed guttered splice plate of 0.8 mm (0.032 inch) thick with butyl or other resilient seal strips anchored to splice plate for underside of joint. Use galvanized steel anchor plate providing compression spring anchoring of coping cover.
- H. Finish: Fluorocarbon as specified.

2.3 EXTRUDED ALUMINUM GRAVEL STOPS AND FASCIAS

- A. Roof-Edge Fascia: Manufactured, two-piece, roof-edge fascia consisting of snap-on metal fascia cover in section lengths not exceeding 12 feet (3.6 m) and a continuous formed- or extruded-aluminum anchor bar with integral drip-edge cleat to engage fascia cover. Provide matching corner units.
 - 1. Fascia Cover: Fabricated from the following exposed metal:
 - a. Formed Aluminum: 0.040 inch (1.02 mm) thick.
 - 2. Corners: Factory mitered and continuously welded or mechanically clinched and sealed watertight.

3. Splice Plates: Concealed, of same material, finish, and shape as fascia cover.

2.4 EXTRUDED ALUMINUM ROOF EXPANSION JOINT COVERS

- A. Fabricate in 3000 mm (10 foot) lengths with fastener openings slotting for expansion not over 600 mm (24 inch) centers.
- B. Provide four-way expansion, for joint widths shown.
- C. Mill finish on aluminum.
- D. Form waterstop or moisture seals of continuous sheets of neoprene, not less than 0.8 mm (0.032 inch) thick.
- E. Fabricate corners as one piece assembly with mitered and welded joint and least dimension legs not less than 300 mm (12 inches) long.
- F. Factory fabricate end caps and transitions to insure waterproof assembly.
- G. Three piece assembly:
 1. Roof expansion joint cover system consists of an extruded aluminum cover, extruded frame or curb vertical section, galvanized steel cant, and aluminum compression clamp counter flashing, complete with moisture seals. Form cover and vertical section from extruded aluminum, 2 mm (0.080 inch) minimum thickness with spring stainless steel tension or pivot bar.
 2. Form cant from galvanized steel not less than 0.8 (0.029 inch) thick formed to profile shown.
 3. Form splice plates of not less than 0.8 mm (0.032 inch) thick aluminum sheet.
 4. Form counter flashing member of 1.3 mm (0.050 inch) thick sheet aluminum, secured with screws to the top edge of the vertical section and providing compression clamp over base flashing.
 5. Provide compression gasket separating cover from curb bearing.
- H. Two piece assembly:
 1. Roof expansion joint system consists of an extruded aluminum cover combination extruded aluminum frame or curb with integral adjustable counter flashing flange, and moisture seals.
 2. Form cover from extruded aluminum 2 mm (0.078 inch) minimum thickness.
 3. Form cover anchor system of stainless steel pivot bar.
 4. Form frame assembly of not less than 2 mm (0.076 inch) aluminum except for flashing portion.
 5. Provide compression gasket separating cover from curb at bearing.

2.5 FINISH

- A. In accordance with NAAMM Amp 500-505.
- B. Aluminum, Mill Finish: AA-MIX, as fabricated.
- C. Fluorocarbon Finish: AAMA 2605.2 high performance organic coating.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install roof accessories where shown.
- B. Secure with fasteners in accordance with manufacture's printed installation instructions and approved shop drawings unless shown otherwise.
- C. Coordinate to install insulation where shown; see Section 07 21 13, THERMAL INSULATION and Section 07 22 00, ROOF INSULATION.
- D. Comply with section 07 92 00, JOINT SEALANTS to install sealants where manufactures installation instructions require sealant.
- E. Coordinate with roofing work for installation of items in sequence to prevent water infiltration.
- F. Gravel Stops and Fascias:
 - 1. Install gravel stops and fascia with butt joints with approximately 6 mm (1/4 inch) space for expansion.
 - 2. Over each joint provide cover plates of sheet aluminum, complete with concealed sheet aluminum flashing, centered under each joint.
 - 3. Lap cover plates and concealed flashing over the gravel stop and fascia not less than four inches.
 - 4. Extend concealed flashing over built-up roofing, embed in roof cement and turn down over face of blocking at roof edge.
- G. Aluminum Coping:
 - 1. Install sections of coping with approximately 6 mm (1/4-inch) space between ends of sections.
 - 2. Center joint gutter bar and covers at joints and securely lock in place.
 - 3. When snap-on system is used insure front and back edges are locked in place.

3.2 PROTECTION OF ALUMINUM

- A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with two coats of asphalt coating (complete coverage), or by separating the contact surfaces with a preformed neoprene tape having pressure sensitive adhesive coating on side.

- B. Paint aluminum in contact with wood, concrete and masonry, or other absorptive materials, that may become repeatedly wet, with two coats of asphalt coating.

3.3 ADJUSTING

- A. Adjust expansion joints to close tightly and be watertight; insuring maximum allowance for building movement.

3.4 PROTECTION

- A. Protect roof accessories from damage during installation and after completion of the work from subsequent construction.

- - - E N D - - -

SECTION 07 81 00
APPLIED FIREPROOFING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies mineral fiber and cementitious coverings to provide fire resistance to interior structural steel members shown.

1.2 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Manufacturer's complete and detailed application instructions and specifications.
 - 2. Manufacturer's repair and patching instructions.
- C. Certificates:
 - 1. Certificate from testing laboratory attesting fireproofing material and application method meet the specified fire ratings.
 - a. List thickness and density of material required to meet fire ratings.
 - b. Accompanied by complete test report and test record.
 - 2. Manufacturer's certificate indicating sprayed-on fireproofing material supplied under the Contract is same within manufacturing tolerance as fireproofing material tested.
- D. Miscellaneous:
 - 1. Manufacturer's written approval of surfaces to receive sprayed-on fireproofing.
 - 2. Manufacturer's written approval of completed installation.
 - 3. Manufacturer's written approval of the applicators of fireproofing material.

1.3 PRODUCT DELIVERY, STORAGE AND HANDLING

- A. Deliver to job-site in sealed containers marked and labeled to show manufacturer's name and brand and certification of compliance with the specified requirements.
- B. Remove damaged containers from the site.
- C. Store the materials off the ground, under cover, away from damp surfaces.
- D. Keep dry until ready for use.
- E. Remove materials that have been exposed to water before installation from the site.

1.4 QUALITY CONTROL

- A. Test for fire endurance in accordance with ASTM E119, for fire rating specified, in a nationally recognized laboratory.
- B. Manufacturer's inspection and approval of surfaces to receive fireproofing as specified under paragraph Examination.
- C. Manufacturer's approval of fireproofing applications.
- D. Manufacturer's approval of completed installation.
- E. Manufacturer's representative shall observe and advise at the commencement of application, and shall visit the site as required thereafter for the purpose of ascertaining proper application.
- F. Pre-Application Test Area.
 - 1. Apply a test area consisting of a typical overhead fireproofing installation, including not less than 4.5 m (15 feet) of beam and deck.
 - a. Apply to one column.
 - b. Apply for the hourly ratings used.
 - 2. Install in location selected by the Contracting Officer's Technical Representative (COTR), for approval by the representative of the fireproofing material manufacturer and by the Government.
 - 3. Perform Bond test on painted steel in accordance with ASTM E736.
 - 4. Do not proceed in other areas until installation of test area has been completed and approved.
 - 5. Keep approved installation area open for observation as criteria for sprayed-on fireproofing.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - C841-03(R2008)Installation of Interior Lathing and Furring
 - C847-10Metal Lath
 - E84-10Surface Burning Characteristics of Building Materials
 - E119-10Fire Tests of Building Construction and Materials
 - E605-93(R2006)Thickness and Density of Sprayed Fire-Resistive Materials Applied to Structural Members

- E736-00(R2006)Cohesion/Adhesion of Sprayed Fire-Resistive
Materials Applied to Structural Members
- E759-92(R2005)The Effect of Deflection on Sprayed Fire-
Resistive Material Applied to Structural
Members
- E760-92(R2005)Impact on Bonding of Sprayed Fire-Resistive
Material Applied to Structural Members
- E761-92(R2005)Compressive Strength of Fire-Resistive Material
Applied to Structural Members
- E859-93(R2006)Air Erosion of Sprayed Fire-Resistive Materials
Applied to Structural Members
- E937-93(R2005)Corrosion of Steel by Sprayed Fire-Resistive
Material Applied to Structural Members
- E1042-02(R2008)Acoustically, Absorptive Materials Applied by
Trowel or Spray.
- G21-09Determining Resistance of Synthetic Polymeric
Materials to Fungi

C. Underwriters Laboratories, Inc. (UL):

Fire Resistance Directory...Latest Edition including Supplements

D. Warnock Hersey (WH):

Certification Listings .Latest Edition

E. Factory Mutual System (FM):

Approval GuideLatest Edition including Supplements

PART 2 - PRODUCTS

2.1 SPRAYED-ON FIREPROOFING

A. ASTM E1042, Class (a), Category A.

1. Type I, factory mixed cementitious materials with approved aggregate for exposed locations.
2. Type II, factory mixed mineral fiber with integral inorganic binders minimum 240 kg/m³ (15 lb/ft³) density per ASTM E605 test unless specified otherwise for concealed locations. Use in areas that are completely encased.

B. Materials containing asbestos are not permitted.

C. Fireproofing characteristics when applied in the thickness and density required to achieve the fire-rating specified.

	Characteristic	Test	Results
1.	Deflection	ASTM E759	No cracking, spalling, or delamination when backing to

			which it is applied has a deflection up to 1/120 in 3m (10 ft.)
2.	Corrosion-Resistance	ASTM E937	No promotion of corrosion of steel.
3.	Bond Impact	ASTM E760	No cracking, spalling, or delamination.
4.	Cohesion/Adhesion (Bond Strength)	ASTM E736	Minimum cohesive/adhesive strength of 9.57 kPa (200 lbf/ft ²) for protected areas. 19.15 kPa (400 lbf/ft ²) for exposed areas.
5.	Air Erosion	ASTM E859	Maximum gain weight of the collecting filter 0.27gm/m ² (0.025 gm/ft ²).
6.	Compressive Strength	ASTM E761	Minimum compressive strength 48 kPa (1000psf).
7.	Surface Burning Characteristics with adhesive and sealer to be used	ASTM E84	Flame spread 25 or less smoke developed 50 or less
8.	Fungi Resistance	ASTM G21	Resistance to mold growth when inoculated with aspergillus niger (28 days for general application)

2.2 ADHESIVE

- A. Bonding adhesive for Type II (fibrous) materials as recommended and supplied by the fireproofing material manufacturer.
- B. Adhesive may be an integral part of the material or applied separately to surface receiving fireproofing material.

2.3 SEALER

- A. Sealer for Type II (fibrous) material as recommended and supplied by the fireproofing material manufacturer.
- B. Surface burning characteristics as specified for fireproofing material.
- C. Fungus resistant.
- D. Sealer may be an integral part of the material or applied separately to the exposed surface. When applied separately use contrasting color pigmented sealer, white preferred.

2.4 WATER

- A. Clean, fresh, and free from organic and mineral impurities.
- B. pH of 6.9 to 7.1.

2.5 MECHANICAL BOND MATERIAL

- A. Expanded Metal Lath: ASTM C847, minimum weight of 0.92 kg/m² (1.7 pounds per square yard).
- B. Fasteners: ASTM C841.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Verify surfaces to receive fireproofing are clean and free of dust, soot, oil, grease, water soluble materials or any foreign substance which would prevent adhesion of the fireproofing material.
- B. Verify hangers, inserts and clips are installed before the application of fireproofing material.
- C. Verify ductwork, piping, and other obstructing material and equipment is not installed that will interfere with fireproofing installation.
- D. Verify concrete work on steel decking and concrete encased steel is completed.
- E. Verify temperature and enclosure conditions are required by fireproofing material manufacturer.

3.2 APPLICATION

- A. Do not start application until written approval has been obtained from manufacturer of fireproofing materials that surfaces have been inspected by the manufacturer or his representative, and are suitable to receive sprayed-on fireproofing.
- B. Coordinate application of fireproofing material with other trades.
- C. Application of Metal Lath:
 - 1. Apply to beam and columns having painted surfaces which fail ASTM E736 Bond Test requirements in pre-application test area.
 - 2. Apply to beam flanges 300 mm (12-inches) or more in width.
 - 3. Apply to column flanges 400 mm (16-inches) or more in width.
 - 4. Apply to beam or column web 400 mm (16-inches) or more in depth.
 - 5. Tack weld or mechanically fasten on maximum of 300 mm (12-inch) center.
 - 6. Lap and tie lath member in accordance with ASTM C841.
- D. Mix and apply in accordance with manufacturer's instructions.
 - 1. Mechanically control material and water ratios.
 - 2. Apply adhesive and sealer, when not an integral part of the materials, in accordance with the manufacturer's instructions.

3. Apply to density and thickness indicated in UL Fire Resistance Directory, FM Approval Guide, or WH Certification Listings unless specified otherwise. Test in accordance with ASTM E119.
4. Minimum applied dry density per cubic meter (cubic foot) for the underside of the walk on deck (interstitial) hung purl in or beam and steel deck, columns in interstitial spaces and mechanical equipment rooms shall be as follows:
 - a. Type I - 240 kg/m³ (15 lb/ft³).
 - b. Type II - 350 kg/m³ (22 lb/ft³).
- E. Application shall be completed in one area, inspected and approved by Resident Engineer before removal of application equipment and proceeding with further work.
- F. Apply fireproofing material on interior structural steel members and on underside of interior steel floor and roof decks, except on following surfaces:
 1. Structural steel and underside of steel decks in elevator machine room.
 2. Steel members in elevator hoist ways.
 3. Areas used as air handling plenums.
 4. Steel to be encased in concrete or designated to receive other type of fireproofing.

3.3 FIELD TESTS

- A. Tests of applied material will be performed by VA retained Testing Laboratory. See Section 01 45 29, TESTING LABORATORY SERVICES.
- B. COTR will select area to be tested in specific bays on each floor using a geometric grid pattern.
- C. Test for thickness and density in accordance with ASTM E605. Areas showing thickness less than that required as a result of fire endurance test will be rejected.
- D. Areas showing less than required fireproofing characteristics will be rejected on the following field tests.
 1. Test for cohesion/adhesion: ASTM E736.
 2. Test for bond impact strength: ASTM E760.

3.4 PATCHING AND REPAIRING

- A. Inspect after mechanical, electrical and other trades have completed work in contact with fireproofing material, but before sprayed material is covered by subsequent construction.

- B. Perform corrective measures in accordance with fireproofing material Manufacturer's recommendations.
 - 1. Respray areas requiring additional fireproofing material to provide the required thickness, and replace dislodged or removed material.
 - 2. Spray material for patching by machine directly on point to be patched, or into a container and then hand apply.
 - 3. Hand mixing of material is not permitted.
- C. Repair:
 - 1. Respray all test and rejected areas.
 - 2. Patch fireproofing material which is removed or disturbed after approval.
- D. Perform final inspection of sprayed areas after patching and repair.

- - - E N D - - -

SECTION 07 84 00
FIRESTOPPING

PART 1 GENERAL

1.1 DESCRIPTION

- A. Closures of openings in walls, floors, and roof decks against penetration of flame, heat, and smoke or gases in fire resistant rated construction.
- B. Closure of openings in walls against penetration of gases or smoke in smoke partitions.

1.2 RELATED WORK

- A. Spray applied fireproofing: Section 07 81 00, APPLIED FIREPROOFING
- B. Sealants and application: Section 07 92 00, JOINT SEALANTS.
- C. Fire and smoke damper assemblies in ductwork: Section 23 31 00, HVAC DUCTS AND CASINGS, and Section 23 37 00, AIR OUTLETS AND INLETS.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturers literature, data, and installation instructions for types of firestopping and smoke stopping used.
- C. List of FM, UL, or WH classification number of systems installed.
- D. Certified laboratory test reports for ASTM E814 tests for systems not listed by FM, UL, or WH proposed for use.

1.4 DELIVERY AND STORAGE

- A. Deliver materials in their original unopened containers with manufacturer's name and product identification.
- B. Store in a location providing protection from damage and exposure to the elements.

1.5 WARRANTY

- A. Firestopping work subject to the terms of the Article "Warranty of Construction", FAR clause 52.246-21, except extend the warranty period to five years.

1.6 QUALITY ASSURANCE

- A. FM, UL, or WH or other approved laboratory tested products will be acceptable.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

B. American Society for Testing and Materials (ASTM):

E84-10Surface Burning Characteristics of Building
Materials

E814-11Fire Tests of Through-Penetration Fire Stops

C. Factory Mutual Engineering and Research Corporation (FM):

Annual Issue Approval Guide Building Materials

D. Underwriters Laboratories, Inc. (UL):

Annual Issue Building Materials Directory

Annual Issue Fire Resistance Directory

1479-10Fire Tests of Through-Penetration Firestops

E. Warnock Hersey (WH):

Annual Issue Certification Listings

PART 2 - PRODUCTS

2.1 FIRESTOP SYSTEMS

- A. Use either factory built (Firestop Devices) or field erected (through-Penetration Firestop Systems) to form a specific building system maintaining required integrity of the fire barrier and stop the passage of gases or smoke.
- B. Through-penetration firestop systems and firestop devices tested in accordance with ASTM E814 or UL 1479 using the "F" or "T" rating to maintain the same rating and integrity as the fire barrier being sealed. "T" ratings are not required for penetrations smaller than or equal to 100 mm (4 in) nominal pipe or 0.01 m² (16 sq. in.) in overall cross sectional area.
- C. Products requiring heat activation to seal an opening by its intumescence shall exhibit a demonstrated ability to function as designed to maintain the fire barrier.
- D. Firestop sealants used for firestopping or smoke sealing shall have following properties:
 - 1. Contain no flammable or toxic solvents.
 - 2. Have no dangerous or flammable out gassing during the drying or curing of products.
 - 3. Water-resistant after drying or curing and unaffected by high humidity, condensation or transient water exposure.
 - 4. When used in exposed areas, shall be capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

- E. Firestopping system or devices used for penetrations by glass pipe, plastic pipe or conduits, unenclosed cables, or other non-metallic materials shall have following properties:
 - 1. Classified for use with the particular type of penetrating material used.
 - 2. Penetrations containing loose electrical cables, computer data cables, and communications cables protected using firestopping systems that allow unrestricted cable changes without damage to the seal.
 - 3. Intumescent products which would expand to seal the opening and act as fire, smoke, toxic fumes, and, water sealant.
- F. Maximum flame spread of 25 and smoke development of 50 when tested in accordance with ASTM E84.
- G. FM, UL, or WH rated or tested by an approved laboratory in accordance with ASTM E814.
- H. Materials to be asbestos free.

2.2 SMOKE STOPPING IN SMOKE PARTITIONS

- A. Use acrylic latex sealant in smoke partitions as specified in Section 07 92 00, JOINT SEALANTS.
- B. Use mineral fiber filler and bond breaker behind sealant.
- C. Sealants shall have a maximum flame spread of 25 and smoke developed of 50 when tested in accordance with E84.
- D. When used in exposed areas capable of being sanded and finished with similar surface treatments as used on the surrounding wall or floor surface.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Submit product data and installation instructions, as required by article, submittals, after an on site examination of areas to receive firestopping.

3.2 PREPARATION

- A. Remove dirt, grease, oil, loose materials, or other substances that prevent adherence and bonding or application of the firestopping or smoke stopping materials.
- B. Remove insulation on insulated pipe for a distance of 150 mm (six inches) on either side of the fire rated assembly prior to applying the firestopping materials unless the firestopping materials are tested and approved for use on insulated pipes.

3.3 INSTALLATION

- A. Do not begin work until the specified material data and installation instructions of the proposed firestopping systems have been submitted and approved.
- B. Install firestopping systems with smoke stopping in accordance with FM, UL, WH, or other approved system details and installation instructions.
- C. Install smoke stopping seals in smoke partitions.

3.4 CLEAN-UP AND ACCEPTANCE OF WORK

- A. As work on each floor is completed, remove materials, litter, and debris.
- B. Do not move materials and equipment to the next-scheduled work area until completed work is inspected and accepted by the Contracting Officer's Technical Representative.
- C. Clean up spills of liquid type materials.

- - - E N D - - -

SECTION 07 92 00
JOINT SEALANTS

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. Section covers all sealant and caulking materials and their application, wherever required for complete installation of building materials or systems.

1.2 RELATED WORK:

- A. Masonry control and expansion joint: Section 04 20 00, UNIT MASONRY.
- B. Firestopping penetrations: Section 07 84 00, FIRESTOPPING.
- C. Glazing: Section 08 80 00, GLAZING.
- D. Glazed aluminum curtain wall: Section 08 44 13, GLAZED ALUMINUM CURTAIN WALLS.
- E. Mechanical Work: Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING and Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

1.3 QUALITY CONTROL:

- A. Installer Qualifications: An experienced installer who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance.
- B. Source Limitations: Obtain each type of joint sealant through one source from a single manufacturer.
- C. Product Testing: Obtain test results from a qualified testing agency based on testing current sealant formulations within a 12-month period.
 - 1. Testing Agency Qualifications: An independent testing agency qualified according to ASTM C1021.
 - 2. Test elastomeric joint sealants for compliance with requirements specified by reference to ASTM C920, and where applicable, to other standard test methods.
 - 3. Test elastomeric joint sealants according to SWRI's Sealant Validation Program for compliance with requirements specified by reference to ASTM C920 for adhesion and cohesion under cyclic movement, adhesion-in peel, and indentation hardness.
 - 4. Test other joint sealants for compliance with requirements indicated by referencing standard specifications and test methods.

D. Preconstruction Field-Adhesion Testing: Before installing elastomeric sealants, field test their adhesion to joint substrates in accordance with sealant manufacturer's recommendations:

1. Locate test joints where indicated or, if not indicated, as directed by Contracting Officer's Technical Representative (COTR).
2. Conduct field tests for each application indicated below:
 - a. Each type of elastomeric sealant and joint substrate indicated.
 - b. Each type of non-elastomeric sealant and joint substrate indicated.
3. Notify COTR seven days in advance of dates and times when test joints will be erected.

E. VOC: Acrylic latex and Silicon sealants shall have less than 50g/l VOC content.

F. Mockups: Before installing joint sealants, apply elastomeric sealants as follows to verify selections made under sample Submittals and to demonstrate aesthetic effects and qualities of materials and execution:

1. Joints in mockups of assemblies specified in other Sections that are indicated to receive elastomeric joint sealants, which are specified by reference to this section.

1.4 SUBMITTALS:

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's installation instructions for each product used.

C. Cured samples of exposed sealants for each color where required to match adjacent material.

D. Manufacturer's Literature and Data:

1. Caulking compound
2. Primers
3. Sealing compound, each type, including compatibility when different sealants are in contact with each other.

1.5 PROJECT CONDITIONS:

A. Environmental Limitations:

1. Do not proceed with installation of joint sealants under following conditions:
 - a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 °C (40 °F).
 - b. When joint substrates are wet.

B. Joint-Width Conditions:

1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.

C. Joint-Substrate Conditions:

1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

1.6 DELIVERY, HANDLING, AND STORAGE:

- A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.
- B. Carefully handle and store to prevent inclusion of foreign materials.
- C. Do not subject to sustained temperatures exceeding 32° C (90° F) or less than 5° C (40° F).

1.7 DEFINITIONS:

- A. Definitions of terms in accordance with ASTM C717 and as specified.
- B. Back-up Rod: A type of sealant backing.
- C. Bond Breakers: A type of sealant backing.
- D. Filler: A sealant backing used behind a back-up rod.

1.8 WARRANTY:

- A. Warranty exterior sealing against leaks, adhesion, and cohesive failure, and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be extended to two years.
- B. General Warranty: Special warranty specified in this Article shall not deprive Government of other rights Government may have under other provisions of Contract Documents and shall be in addition to, and run concurrent with, other warranties made by Contractor under requirements of Contract Documents.

1.9 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - C509-06Elastomeric Cellular Preformed Gasket and Sealing Material.
 - C612-10Mineral Fiber Block and Board Thermal Insulation.

- C717-10Standard Terminology of Building Seals and Sealants.
- C834-10Latex Sealants.
- C919-08.Use of Sealants in Acoustical Applications.
- C920-10Elastomeric Joint Sealants.
- C1021-08Laboratories Engaged in Testing of Building Sealants.
- C1193-09Standard Guide for Use of Joint Sealants.
- C1330-02 (R2007)Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants.
- D1056-07Specification for Flexible Cellular Materials—Sponge or Expanded Rubber.
- E84-09Surface Burning Characteristics of Building Materials.

C. Sealant, Waterproofing and Restoration Institute (SWRI).
The Professionals' Guide

PART 2 - PRODUCTS

2.1 SEALANTS:

A. S-1:

1. ASTM C920, polyurethane or polysulfide.
2. Type M.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 20-40

B. S-2:

1. ASTM C920, polyurethane or polysulfide.
2. Type M.
3. Class 25.
4. Grade P.
5. Shore A hardness of 25-40.

C. S-3:

1. ASTM C920, polyurethane or polysulfide.
2. Type S.
3. Class 25, joint movement range of plus or minus 50 percent.
4. Grade NS.
5. Shore A hardness of 15-25.
6. Minimum elongation of 700 percent.

D. S-4:

1. ASTM C920 polyurethane or polysulfide.
2. Type S.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 25-40.

E. S-5: NOT USED.

F. S-6:

1. ASTM C920, silicone, neutral cure.
2. Type S.
3. Class: Joint movement range of plus 100 percent to minus 50 percent.
4. Grade NS.
5. Shore A hardness of 15-20.
6. Minimum elongation of 1200 percent.

G. S-7: NOT USED.

H. S-8: NOT USED.

I. S-9: NOT USED.

J. S-10: NOT USED.

K. S-11:

1. ASTM C920 polyurethane.
2. Type M/S.
3. Class 25.
4. Grade P/NS.
5. Shore A hardness of 35 to 50.

2.2 CAULKING COMPOUND:

- A. C-1: ASTM C834, acrylic latex.
- B. C-2: One component acoustical caulking, non drying, non hardening, synthetic rubber.

2.3 COLOR:

- A. Sealants used with exposed masonry shall match color of mortar joints.
- B. Sealants used with unpainted concrete shall match color of adjacent concrete.
- C. Color of sealants for other locations shall be light gray or aluminum, unless specified otherwise.
- D. Caulking shall be light gray or white, unless specified otherwise.

2.4 JOINT SEALANT BACKING:

- A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers,

and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.

- B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:
 - 1. Type C: Closed-cell material with a surface skin.
- C. Elastomeric Tubing Sealant Backings: Neoprene, butyl, EPDM, or silicone tubing complying with ASTM D1056, nonabsorbent to water and gas, and capable of remaining resilient at temperatures down to minus 32° C (minus 26° F). Provide products with low compression set and of size and shape to provide a secondary seal, to control sealant depth, and otherwise contribute to optimum sealant performance.
- D. Bond-Breaker Tape: Polyethylene tape or other plastic tape recommended by sealant manufacturer for preventing sealant from adhering to rigid, inflexible joint-filler materials or joint surfaces at back of joint where such adhesion would result in sealant failure. Provide self-adhesive tape where applicable.

2.5 FILLER:

- A. Mineral fiber board: ASTM C612, Class 1.
- B. Thickness same as joint width.
- C. Depth to fill void completely behind back-up rod.

2.6 PRIMER:

- A. As recommended by manufacturer of caulking or sealant material.
- B. Stain free type.

2.7 CLEANERS-NON POURIOUS SURFACES:

- A. Chemical cleaners acceptable to manufacturer of sealants and sealant backing material, free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

PART 3 - EXECUTION

3.1 INSPECTION:

- A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.
- B. Coordinate for repair and resolution of unsound substrate materials.
- C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

3.2 PREPARATIONS:

- A. Prepare joints in accordance with manufacturer's instructions and SWRI.

- B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer paint, or other foreign matter that would tend to destroy or impair adhesion.
 - 1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
 - 2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include the following:
 - a. Concrete.
 - b. Masonry.
 - 3. Remove laitance and form-release agents from concrete.
 - 4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.
 - a. Metal.
 - b. Glass.
 - C. Do not cut or damage joint edges.
 - D. Apply masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.
 - 1. Do not leave gaps between ends of sealant backings.
 - 2. Do not stretch, twist, puncture, or tear sealant backings.
 - 3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
 - E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions.
 - 1. Apply primer prior to installation of back-up rod or bond breaker tape.
 - 2. Use brush or other approved means that will reach all parts of joints.
 - F. Take all necessary steps to prevent three sided adhesion of sealants.
- 3.3 BACKING INSTALLATION:
- A. Install back-up material, to form joints enclosed on three sides as required for specified depth of sealant.
 - B. Where deep joints occur, install filler to fill space behind the back-up rod and position the rod at proper depth.

- C. Cut fillers installed by others to proper depth for installation of back-up rod and sealants.
- D. Install back-up rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.
- E. Where space for back-up rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.
- F. Take all necessary steps to prevent three sided adhesion of sealants.

3.4 SEALANT DEPTHS AND GEOMETRY:

- A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.
- B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

3.5 INSTALLATION:

A. General:

1. Apply sealants and caulking only when ambient temperature is between 5° C and 38° C (40° and 100° F).
2. Do not use polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
3. Do not use sealant type listed by manufacture as not suitable for use in locations specified.
4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.
5. Avoid dropping or smearing compound on adjacent surfaces.
6. Fill joints solidly with compound and finish compound smooth.
7. Tool joints to concave surface unless shown or specified otherwise.
8. Finish paving or floor joints flush unless joint is otherwise detailed.
9. Apply compounds with nozzle size to fit joint width.
10. Test sealants for compatibility with each other and substrate. Use only compatible sealant.

B. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise.

C. Where gypsum board partitions are of sound rated, fire rated, or smoke barrier construction, follow requirements of ASTM C919 only to seal all

cut-outs and intersections with the adjoining construction unless specified otherwise.

1. Apply a 6 mm (1/4 inch) minimum bead of sealant each side of runners (tracks), including those used at partition intersections with dissimilar wall construction.
2. Coordinate with application of gypsum board to install sealant immediately prior to application of gypsum board.
3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing.
4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cut-outs to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.
5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

3.6 FIELD QUALITY CONTROL:

- A. Field-Adhesion Testing: Field-test joint-sealant adhesion to joint substrates as recommended by sealant manufacturer:
 1. Extent of Testing: Test completed elastomeric sealant joints as follows:
 - a. Perform 10 tests for first 300 m (1000 feet) of joint length for each type of elastomeric sealant and joint substrate.
 - b. Perform one test for each 300 m (1000 feet) of joint length thereafter or one test per each floor per elevation.
- B. Inspect joints for complete fill, for absence of voids, and for joint configuration complying with specified requirements. Record results in a field adhesion test log.
- C. Inspect tested joints and report on following:
 1. Whether sealants in joints connected to pulled-out portion failed to adhere to joint substrates or tore cohesively. Include data on pull distance used to test each type of product and joint substrate.
 2. Compare these results to determine if adhesion passes sealant manufacturer's field-adhesion hand-pull test criteria.
 3. Whether sealants filled joint cavities and are free from voids.
 4. Whether sealant dimensions and configurations comply with specified requirements.
- D. Record test results in a field adhesion test log. Include dates when sealants were installed, names of persons who installed sealants, test

dates, test locations, whether joints were primed, adhesion results and percent elongations, sealant fill, sealant configuration, and sealant dimensions.

- E. Repair sealants pulled from test area by applying new sealants following same procedures used to originally seal joints. Ensure that original sealant surfaces are clean and new sealant contacts original sealant.
- F. Evaluation of Field-Test Results: Sealants not evidencing adhesive failure from testing or noncompliance with other indicated requirements, will be considered satisfactory. Remove sealants that fail to adhere to joint substrates during testing or to comply with other requirements. Retest failed applications until test results prove sealants comply with indicated requirements.

3.7 CLEANING:

- A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by the caulking or sealant manufacturer.
- B. After filling and finishing joints, remove masking tape.
- C. Leave adjacent surfaces in a clean and unstained condition.

3.8 LOCATIONS:

- A. Exterior Building Joints, Horizontal and Vertical:
 - 1. Metal to Metal: Type S-1, S-2
 - 2. Metal to Masonry: Type S-1
 - 3. Masonry to Masonry: Type S-1
 - 4. Threshold Setting Bed: Type S-1, S-3, S-4
 - 5. Masonry Expansion and Control Joints: Type S-6
- B. Metal Reglets and Flashings:
 - 1. Flashings to Wall: Type S-6
 - 2. Metal to Metal: Type S-6
- C. Horizontal Traffic Joints:
 - 1. Concrete Paving, Unit Pavers: Type S-11
- D. Interior Caulking:
 - 1. Typical Narrow Joint 6 mm, (1/4 inch) or less at Walls and Adjacent Components: Types C-1 and C-2.
 - 2. Perimeter of Doors, Windows, Access Panels which Adjoin Concrete or Masonry Surfaces: Types C-1 and C-2.
 - 3. Joints at Masonry Walls and Columns, Piers, Concrete Walls or Exterior Walls: Types C-1 and C-2.

4. Exposed Isolation Joints at Top of Full Height Walls: Types C-1 and C-2.

5. Concealed Acoustic Sealant Types S-4, C-1 and C-2.

- - - E N D - - -

SECTION 08 11 13
HOLLOW METAL DOORS AND FRAMES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies steel doors, steel frames and related components.
- B. Terms relating to steel doors and frames as defined in ANSI A250.7 and as specified.

1.2 RELATED WORK

- A. Aluminum frames entrance work: Section 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS.
- B. Door Hardware: Section 08 71 00, DOOR HARDWARE.
- C. Glazing: Section 08 80 00, GLAZING.

1.3 TESTING

- A. An independent testing laboratory shall perform testing.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturers Literature and Data:
 - 1. Fire rated doors and frames, showing conformance with NFPA 80 and Underwriters Laboratory, Inc., or Intertek Testing Services or Factory Mutual fire rating requirements.

1.5 SHIPMENT

- A. Prior to shipment label each door and frame to show location, size, door swing and other pertinent information.
- B. Fasten temporary steel spreaders across the bottom of each door frame.

1.6 STORAGE AND HANDLING

- A. Store doors and frames at the site under cover.
- B. Protect from rust and damage during storage and erection until completion.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. Door and Hardware Institute (DHI):
 - A115 SeriesSteel Door and Frame Preparation for Hardware, Series A115.1 through A115.17 (Dates Vary)

C. Steel Door Institute (SDI):

- 113-01Thermal Transmittance of Steel Door and Frame Assemblies
- 128-1997Acoustical Performance for Steel Door and Frame Assemblies
- A250.8-03 (ANSI)SDI-100 Recommended Specifications for Standard Steel Doors and Frames
- A250.7-2002 (ANSI).Nomenclature for Standard Steel Doors and Frames

D. American Society for Testing and Materials (ASTM):

- A568-07Steel, Sheet, Carbon, and High-Strength, Low-alloy, Hot-Rolled and Cold-Rolled
- A1008-08Steel, sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy and High Strength Low Alloy with Improved Formability
- D1621-04Compressive Properties of Rigid Cellular Plastics
- D3656-07Insect Screening and Louver Cloth Woven from Vinyl Coated Glass Yarns
- E90-04Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions

E. The National Association Architectural Metal Manufacturers (NAAMM):
Metal Finishes Manual (1988 Edition)

F. National Fire Protection Association (NFPA):

- 80-09Fire Doors and Fire Windows

G. Underwriters Laboratories, Inc. (UL):

- Fire Resistance Directory

H. Intertek Testing Services (ITS):

- Certifications Listings...Latest Edition

I. Factory Mutual System (FM):

- Approval Guide

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Sheet Steel: ASTM A1008, cold-rolled for panels (face sheets) of doors.
- B. Anchors, Fastenings and Accessories: Fastenings anchors, clips connecting members and sleeves from zinc coated steel.
- C. Prime Paint: Paint that meets or exceeds the requirements of A250.8.

2.2 FABRICATION GENERAL

A. GENERAL:

1. Follow SDI A250.8 for fabrication of standard steel doors, except as specified otherwise. Doors to receive hardware specified in Section 08 71 00, DOOR HARDWARE. Tolerances as per SDI A250.8. Thickness, 44 mm (1-3/4 inches), unless otherwise shown.
2. Close top edge of exterior doors flush and seal to prevent water intrusion.
3. When vertical steel stiffeners are used for core construction, fill spaces between stiffeners with mineral fiber insulation.
4. Core constructions as applicable to meet performance requirements included in ANSI/SDI A250.3, A250.4, and A250.10 of one of the following:
 - a. Kraft honeycomb
 - b. Polyurethane
 - c. Polystyrene
 - d. Unitized steel Grid
 - e. Mineral fiberboard
 - f. Vertical steel stiffeners

B. Standard Duty Doors: SDI A250.8, Level 1, Model 2 of size and design shown. Use for interior locations only. Do not use for stairwell doors.

C. Heavy Duty Doors: SDI A250.8, Level 2, Model 2 of size and design shown.

D. Extra Heavy Duty Doors: SDI A250.8, Level 3, Model 2 of size and design shown. Use for stairwell doors.

E. Smoke Doors:

1. Close top and vertical edges flush.
2. Provide seamless vertical edges.
3. Apply Steel astragal to the meeting style at the active leaf of pair of doors or double egress doors.
4. Provide clearance at head, jamb and sill as specified in NFPA 80.

F. Fire Rated Doors (Labeled):

1. Conform to NFPA 80 when tested by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual for the class of door or door opening shown.
2. Fire rated labels of metal, with raised or incised markings of approving laboratory shall be permanently attached to doors.

3. Close top and vertical edges of doors flush. Vertical edges shall be seamless. Apply steel astragal to the meeting stile of the active leaf of pairs of fire rated doors, except where vertical rod exit devices are specified for both leaves swinging in the same direction.
4. Construct fire rated doors in stairwell enclosures for maximum transmitted temperature rise of 230 °C (450 °F) above ambient temperature at end of 30 minutes of fire exposure when tested in accordance with ASTM E152.

2.3 METAL FRAMES

A. General:

1. SDI A250.8, 1.3 mm (0.053 inch) thick sheet steel, types and styles as shown or scheduled.
2. Frames for exterior doors: Fabricate from 1.7 mm (0.067 inch) thick galvanized steel conforming to ASTM A525.
3. Frames for labeled fire rated doors and windows.
 - a. Comply with NFPA 80. Test by Underwriters Laboratories, Inc., Inchcape Testing Services, or Factory Mutual.
 - b. Fire rated labels of approving laboratory permanently attached to frames as evidence of conformance with these requirements. Provide labels of metal or engraved stamp, with raised or incised markings.
4. Knocked-down frames are not acceptable.

B. Reinforcement and Covers:

1. SDI A250.8 for, minimum thickness of steel reinforcement welded to back of frames.
2. Provide mortar guards securely fastened to back of hardware reinforcements.
3. Where concealed door closers are installed within the head of the door frames, prepare frames for closers and provide 1 mm (0.042 inch) thick steel removable stop sections for access to concealed face plates and control valves, except when cover plates are furnished with closer.

C. Glazed Openings:

1. Integral stop on exterior, corridor, or secure side of door.
2. Design rabbet width and depth to receive glazing material or panel shown or specified.

D. Frame Anchors:

1. Floor anchors:

- a. Where floor fills occur, provide extension type floor anchors to compensate for depth of fill.
- b. At bottom of jamb use 1.3 mm (0.053 inch) thick steel clip angles welded to jamb and drilled to receive two 6 mm (1/4 inch) floor bolts. Use 50 mm x 50 mm (2 inch by 2 inch) 9 mm by (3/8 inch) clip angle for lead lined frames, drilled for 9 mm (3/8 inch) floor bolts.
- c. Where mullions occur, provide 2.3 mm (0.093 inch) thick steel channel anchors, drilled for two 6 mm (1/4 inch) floor bolts and frame anchor screws.
- d. Where sill sections occur, provide continuous 1 mm (0.042 inch) thick steel rough bucks drilled for 6 mm (1/4 inch) floor bolts and frame anchor screws. Space floor bolts at 50 mm (24 inches) on center.

2. Jamb anchors:

- a. Locate anchors on jambs near top and bottom of each frame, and at intermediate points not over 600 mm (24 inches) apart, except for fire rated frames space anchors as required by labeling authority.
- b. Form jamb anchors of not less than 1 mm (0.042 inch) thick steel unless otherwise specified.
- c. Anchors set in masonry: Use adjustable anchors designed for friction fit against the frame and for extension into the masonry not less than 250 mm (10 inches). Use one of following type:
 - 1) Wire loop type of 5 mm (3/16 inch) diameter wire.
 - 2) T-shape or strap and stirrup type of corrugated or perforated sheet steel.
- d. Anchors for stud partitions: Either weld to frame or use lock-in snap-in type. Provide tabs for securing anchor to the sides of the studs.
- e. Anchors for frames set in prepared openings:
 - 1) Steel pipe spacers with 6 mm (1/4 inch) inside diameter welded to plate reinforcing at jamb stops or hat shaped formed strap spacers, 50 mm (2 inches) wide, welded to jamb near stop.
 - 2) Drill jamb stop and strap spacers for 6 mm (1/4 inch) flat head bolts to pass thru frame and spacers.

- 3) Two piece frames: Subframe or rough buck drilled for 6 mm (1/4 inch) bolts.
- f. Anchors for observation windows and other continuous frames set in stud partitions.
 - 1) In addition to jamb anchors, weld clip anchors to sills and heads of continuous frames over 1200 mm (4 feet) long.
 - 2) Anchors spaced 600 mm (24 inches) on centers maximum.
- g. Modify frame anchors to fit special frame and wall construction and provide special anchors where shown or required.

2.4 SHOP PAINTING

SDI A250.8.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Plumb, align and brace frames securely until permanent anchors are set.
 1. Use triangular bracing near each corner on both sides of frames with temporary wood spreaders at midpoint.
 2. Use wood spreaders at bottom of frame if the shipping spreader is removed.
 3. Protect frame from accidental abuse.
 4. Where construction will permit concealment, leave the shipping spreaders in place after installation, otherwise remove the spreaders after the frames are set and anchored.
 5. Remove wood spreaders and braces only after the walls are built and jamb anchors are secured.
- B. Floor Anchors:
 1. Anchor the bottom of door frames to floor with two 6 mm (1/4 inch) diameter expansion bolts. Use 9 mm (3/8 inch) bolts on lead lined frames.
 2. Power actuated drive pins may be used to secure frame anchors to concrete floors.
- C. Jamb Anchors:
 1. Anchors in masonry walls: Embed anchors in mortar. Fill space between frame and masonry wall with grout or mortar as walls are built.
 2. Coat frame back with a bituminous coating prior to lining of grout filling in masonry walls.
 3. Secure anchors to sides of studs with two fasteners through anchor tabs. Use steel drill screws to steel studs.

4. Frames set in prepared openings of masonry or concrete: Expansion bolt to wall with 6 mm (1/4 inch) expansion bolts through spacers. Where subframes or rough bucks are used, 6 mm (1/4 inch) expansion bolts on 600 mm (24 inch) centers or power activated drive pins 600 mm (24 inches) on centers. Secure two piece frames to subframe or rough buck with machine screws on both faces.
- D. Install anchors for labeled fire rated doors to provide rating as required.

- - - E N D - - -

SECTION 08 31 13
ACCESS DOORS AND FRAMES

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. Section specifies access doors or panels.

1.2 RELATED WORK:

- A. Lock Cylinders: Section 08 71 00, DOOR HARDWARE.
- C. Locations of access doors for duct work cleanouts: Section 23 31 00, HVAC DUCTS AND CASINGS and Section 23 37 00, AIR OUTLETS AND INLETS.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Access doors, each type, showing construction, location and installation details.
- C. Manufacturer's Literature and Data: Access doors, each type.

1.4 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in the text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - A167-99(R-2009)Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip
 - A1008-10Steel Sheet, Cold-Rolled, Carbon, Structural, High Strength Low-Alloy
- C. American Welding Society (AWS):
 - D1.3-08Structural Welding Code Sheet Steel
- D. National Fire Protection Association (NFPA):
 - 80-10Fire Doors and Windows
- E. The National Association of Architectural Metal Manufacturers (NAAMM):
 - AMP 500 SeriesMetal Finishes Manual
- F. Underwriters Laboratories, Inc. (UL):
 - Fire Resistance Directory

PART 2 - PRODUCTS

2.1 FABRICATION, GENERAL

- A. Fabricate components to be straight, square, flat and in same plane where required.
 - 1. Slightly round exposed edges and without burrs, snags and sharp edges.

2. Exposed welds continuous and ground smooth.
 3. Weld in accordance with AWS D1.3.
 - B. Number of locks and non-continuous hinges as required to maintain alignment of panel with frame.
 - C. Provide anchors or make provisions in frame for anchoring to adjacent construction. Provide size, number and location of anchors on four sides to secure access door in opening.
- 2.2 ACCESS DOORS, FLUSH PANEL:
- A. Door Panel:
 1. Form of 1.9 mm (0.0747 inch) thick steel sheet.
 2. Reinforce to maintain flat surface.
 - B. Frame:
 1. Form of 1.5 mm (0.0598 inch) thick steel sheet of depth and configuration to suit material and type of construction where installed.
 2. Provide surface mounted units having frame flange at perimeter where installed in concrete, masonry, or gypsum board construction.
 3. Weld exposed joints in flange and grind smooth.
 - C. Hinge:
 1. Concealed spring hinge to allow panel to open 175 degrees.
 2. Provide removable hinge pin to allow removal of panel from frame.
 - D. Lock:
 1. Flush, screwdriver operated cam lock.
- 2.3 FINISH:
- A. Provide in accordance with NAAMM AMP 500 series on exposed surfaces.
 - B. Steel Surfaces: Baked-on prime coat over a protective phosphate coating.
- 2.4 SIZE:
- A. Minimum 600 mm (24 inches) square door unless otherwise shown.

PART 3 - EXECUTION

3.1 LOCATION:

- A. Provide access panels or doors wherever any valves, traps, dampers, cleanouts, and other control items of mechanical, electrical and conveyor work are concealed in wall or partition, or are above ceiling of gypsum board or plaster.
- B. Use fire rated doors in fire rated partitions and ceilings.

- C. Use flush panels in partitions and gypsum board or plaster ceilings, except lay-in acoustical panel ceilings or upward access acoustical tile ceilings.

3.2 INSTALLATION, GENERAL:

- A. Install access doors in openings to have sides vertical in wall installations, and parallel to ceiling suspension grid or side walls when installed in ceiling.
- B. Set frames so that edge of frames without flanges will finish flush with surrounding finish surfaces.
- C. Set frames with flanges to overlap opening and so that face will be uniformly spaced from the finish surface.

3.3 ANCHORAGE:

- A. Secure frames to adjacent construction using anchors attached to frames or by use of bolts or screws through the frame members.
- B. Type, size and number of anchoring device suitable for the material surrounding the opening, maintain alignment, and resist displacement during normal use of access door.

3.4 ADJUSTMENT:

- A. Adjust hardware so that door panel will open freely.
- B. Adjust door when closed so door panel is centered in the frame.

- - - E N D - - -

SECTION 08 41 13
ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. This section specifies aluminum entrance work including storefront construction, hung doors, and other components to make a complete assembly.

1.2 RELATED WORK:

- A. Glass and Glazing: Section 08 80 00, GLAZING.
- B. Hardware: Section 08 71 00, DOOR HARDWARE.
- C. Automatic Door Operators: Section 08 71 13, AUTOMATIC DOOR OPERATORS.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: (1/2 full scale) showing construction, anchorage, reinforcement, and installation details.
- C. Manufacturer's Literature and Data:
 - 1. Doors, each type.
 - 2. Entrance and Storefront framing construction.
- D. Samples:
 - 1. Door corner section, 450 mm x 450 mm (18 x 18 inches), of each door type specified, showing vertical and top hinge edges, door closer reinforcement, internal reinforcement, and insulation, of flush panel door.
- E. Manufacturer's Certificates:
 - 1. Stating that aluminum has been given specified thickness of anodizing.
 - 2. Indicating manufacturer's qualifications specified.

1.4 QUALITY ASSURANCE:

- A. Approval by Contracting Officer is required of products of proposed manufacturer, or supplier, and will be based upon submission by Contractor certification.
- B. Certify manufacturer regularly and presently manufactures aluminum entrances and storefronts as one of their principal products.

1.5 DELIVERY, STORAGE AND HANDLING:

- A. Deliver aluminum entrance and storefront material to the site in packages or containers; labeled for identification with the manufacturer's name, brand and contents.

- B. Store aluminum entrance and storefront material in weather-tight and dry storage facility.
- C. Protect from damage from handling, weather and construction operations before, during and after installation.

1.6 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - B209-07Aluminum and Aluminum-Alloy Sheet and Plate
 - B221-08Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
 - E283-04Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen
 - E331-00(R2009)Water Penetration of Exterior Windows, Curtain Walls, and Doors by Uniform Static Air Pressure Difference
 - F468-10Nonferrous Bolts, Hex Cap Screws, and Studs for General Use
 - F593-02(R2008)Stainless Steel Bolts, Hex Cap Screws, and Studs
- C. National Association of Architectural Metal Manufacturers (NAAMM):
 - AMP 500 SeriesMetal Finishes Manual
- D. American Architectural Manufacturer's Association (AAMA):
 - 2604-10High Performance Organic Coatings on Architectural Aluminum Extrusions and Panels
- E. American Welding Society (AWS):
 - D1.2-08Structural Welding Code Aluminum

1.7 PERFORMANCE REQUIREMENTS:

- A. Shapes and thickness of framing members shall be sufficient to withstand a design wind load of not less than the load determined by the requirements on the structural drawings of supported area with a deflection of not more than 1/175 times the length of the member and a safety factor of not less than 1.65 (applied to overall load failure of the unit). Provide glazing beads, moldings, and trim of not less than 1.25 mm (0.050 inch) nominal thickness.

- B. Air Infiltration: When tested in accordance with ASTM E 283, air infiltration shall not exceed 2.63×10^{-5} cm per square meter (0.06 cubic feet per minute per square foot) of fixed area at a test pressure of 0.30 kPa (6.24 pounds per square foot) 80 kilometers (50 mile) per hour wind.
- C. Water Penetration: When tested in accordance with ASTM E 331, there shall be no water penetration at a pressure of 0.38 kPa (8 pounds per square foot) of fixed area.
- D. Structural Sealant: Capable of withstanding tensile and shear stresses imposed by aluminum-framed systems without failing adhesively or cohesively. When tested for preconstruction adhesion and compatibility, cohesive failure of sealant shall occur before adhesive failure.

PART 2 - PRODUCTS

2.1 MATERIALS:

- A. Aluminum, ASTM B209 and B221:
 - 1. Alloy 6063 temper T5 for doors, door frames, fixed glass sidelights, storefronts, and transoms.
 - 2. Alloy 6061 temper T6 for guide tracks for sliding doors and other extruded structural members.
- B. Thermal Break: Manufacturer standard low conductive material retarding heat flow in the framework, where insulating glass is scheduled.
- C. Fasteners:
 - 1. Aluminum: ASTM F468, Alloy 2024.
 - 2. Stainless Steel: ASTM F593, Alloy Groups 1, 2 and 3.

2.2 FABRICATION:

- A. Fabricate doors of extruded aluminum sections not less than 3 mm (0.125 inch) thick. Fabricate glazing beads of aluminum not less than 1.0 mm (0.050 inch) thick.
- B. Accurately form metal parts and accurately fit and rigidly assemble joints, except those joints designed to accommodate movement. Seal joints to prevent leakage of both air and water.
- C. Make welds in aluminum in accordance with the recommended practice AWA D1.2. Use electrodes and methods recommended by the manufacturers of the metals and alloys being welded. Make welds behind finished surfaces so as to cause no distortion or discoloration of the exposed side. Clean welded joints of welding flux and dress exposed and contact surfaces.

- D. Make provisions in doors and frames to receive the specified hardware and accessories. Coordinate schedule and template for hardware specified under Section 08 71 00, DOOR HARDWARE. Where concealed closers or other mechanisms are required, provide the necessary space, cutouts, and reinforcement for secure fastening.
- E. Fit and assemble the work at the manufacturer's plant. Mark work that cannot be permanently plant-assembled to assure proper assembly in the field.

2.3 PROTECTION OF ALUMINUM:

- A. Isolate aluminum from contact with dissimilar metals other than stainless steel, white bronze, or zinc by any of the following:
 - 1. Coat the dissimilar metal with two coats of heavy-bodied alkali resistant bituminous paint.
 - 2. Place caulking compound, or non-absorptive tape, or gasket between the aluminum and the dissimilar metal.
 - 3. Paint aluminum in contact with mortar, concrete and plaster, with a coat of aluminum paint primer.

2.4 FRAMES:

- A. Fabricate doors, frames, mullions, transoms, frames for fixed glass and similar members from extruded aluminum not less than 3 mm (0.125 inch) thick.
- B. Provide integral stops and glass rebates and applied snap-on type trim.
- C. Use concealed screws, bolts and other fasteners. Secure cover boxes to frames in back of all lock strike cutouts.
- D. Fabricate framework with thermal breaks in frames where insulating glass is scheduled and specified under Section 08 80 00, GLAZING.

2.5 STILE AND RAIL DOORS:

- A. Nominal 45 mm (1-3/4 inch) thick, with stile and head rail 90 mm (3-1/2 inches) wide, and bottom rail 200 mm (8 inches) wide.
- B. Bevel single-acting doors 3 mm (1/8 inch) at lock, hinge and meeting stile edges. Provide clearances of 2 mm (1/16 inch) at hinge stiles, 3 mm (1/8 inch) at lock stiles and top rails, and 5 mm (3/16 inch) at floors and thresholds. Form glass rebates integrally with stiles and rails. Glazing beads may be formed integrally with stiles and rails or applied type secured with fasteners at 150 mm (six inches) on centers.
- C. Construct doors with a system of welded joints or interlocking dovetail joints between stiles and rails. Clamp door together through top and bottom rails with 9 mm (3/8 inch) primed steel rod extending into the

stiles, and having a self-locking nut and washer at each end. Reinforce stiles and rails to prevent door distortion when tie rods are tightened. Provide a compensating spring-type washer under each nut to take up any stresses that may develop. Construct joints between rails and stiles to remain rigid and tight when door is operated.

- D. Weather-stripping: Provide removable, woven pile type (silicone-treated) weather-stripping attached to aluminum or vinyl holder. Make slots for applying weather-stripping integral with doors and door frame stops. Apply continuous weather-stripping to heads, jambs, bottom, and meeting stiles of doors and frames. Install weather-stripping so doors can swing freely and close positively.

2.6 REINFORCEMENT FOR BUILDERS HARDWARE:

- A. Fabricate from stainless steel plates.
- B. Hinge and pivot reinforcing: 4.55 mm (0.1793 inch) thick.
- C. Reinforcing for lock face, flush bolts, concealed holders, concealed or surface mounted closers: 2.66 mm (0.1046 inch) thick.
- D. Reinforcing for all other surface mounted hardware: 1.5 mm (0.0598 inch) thick.

2.7 COLUMN COVERS AND TRIM

- A. Fabricate column covers and trim shown from 1.5 mm (0.0625 inch) thick sheet aluminum of longest available lengths.
- B. Use concealed fasteners.
- C. Provide aluminum stiffener and other supporting members shown or as required to maintain the integrity of the components.

2.8 FINISH

- A. In accordance with NAAMM AMP 500 series.
- B. Clear Anodized Aluminum: AA-C22A41 Chemically etched medium matte with clear anodic coating, Class 1 Architectural, 0.7 mil thick.
- C. Apply one coat of bituminous paint to concealed aluminum surfaces in contact with cementitious or dissimilar materials.

2.9 GLAZING SYSTEMS

- A. Glazing: As specified in Section 08 80 00, GLAZING.
- B. Glazing Sealants: For structural-sealant-glazed systems, as recommended by manufacturer for joint type, and as follows:
 - 1. Structural Sealant: ASTM C 1184, single-component neutral-curing silicone formulation that is compatible with system components with which it comes in contact, specifically formulated and tested for

use as structural sealant and approved by a structural-sealant manufacturer for use in aluminum-framed systems indicated.

PART 3 - EXECUTION

3.1 INSTALLATION:

- A. Allowable Installation Tolerances: Install work plumb and true, in alignment and in relation to lines and grades shown. Variation of 3 mm (1/8 inch) in 2400 mm (eight feet), non-accumulative, is maximum permissible for plumb, level, warp, bow and alignment.
- B. Anchor aluminum frames to adjoining construction at heads, jambs and bottom and to steel supports, and bracing. Anchor frames with stainless steel or aluminum countersunk flathead, expansion bolts or machine screws, as applicable. Use aluminum clips for internal connections of adjoining frame sections.
- C. Where work is installed within masonry or concrete openings, place no parts other than built-in anchors and provision for operating devices located in the floor, until after the masonry or concrete work is completed.
- D. Install hardware specified under Section 08 71 00, DOOR HARDWARE.
- E. Install hung door operators specified under Section 08 71 13, AUTOMATIC DOOR OPERATORS.
- F. Structural-Sealant Glazing:
 - 1. Prepare surfaces that will contact structural sealant according to sealant manufacturer's written instructions to ensure compatibility and adhesion. Preparation includes, but is not limited to, cleaning and priming surfaces.
 - 2. Install weatherseal sealant according to Section 07 92 00, JOINT SEALANTS and according to sealant manufacturer's written instructions to produce weatherproof joints. Install joint filler behind sealant as recommended by sealant manufacturer.

3.2 ADJUSTING:

- A. After installation of entrance and storefront work is completed, adjust and lubricate operating mechanisms to insure proper performance.

3.3 PROTECTION, CLEANING AND REPAIRING:

- A. Remove all mastic smears and other unsightly marks, and repair any damaged or disfiguration of the work. Protect the installed work against damage or abuse.

- - - E N D - - -

SECTION 08 44 13
GLAZED ALUMINUM CURTAIN WALLS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Section specifies glazed aluminum curtain wall system.
 - 1. Thermally isolated, pressure equalized on interior.
 - 2. Type: Stick system to include following:
 - a. Glass and Glass Spandrel Panels.
 - b. Integral reinforcing.
 - c. Closures, trim, subsills and flashings.
 - d. Column covers.
 - e. Fasteners, anchors, and related reinforcement.

1.2 RELATED WORK

- A. Structural steel: Section 05 12 00, STRUCTURAL STEEL FRAMING.
- B. Miscellaneous metal members: Section 05 50 00, METAL FABRICATIONS.
- C. Firestopping between curtain wall and structure: Section 07 84 00, FIRESTOPPING.
- D. Sheet metal flashing and trim: Section 07 60 00, FLASHING AND SHEET METAL.
 - a. Joint sealants: Section 07 92 00, JOINT SEALANTS.
- E. Aluminum and glass hinged entry doors and storefront construction: Section 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS.

1.3 QUALITY ASSURANCE

- A. Qualifications:
 - 1. Approval is required of products or service of proposed manufacturer, suppliers and installers, and will be based upon submission by Contractor of certification that:
 - a. Manufacturers Qualifications: Manufacturer with five (5) years continuous documented experience in design, fabrication, and installation of glazed aluminum curtain wall systems of type and size required for that project.
 - b. Installer: Manufacturer approved in writing. Continuously installed glazed aluminum curtain walls systems for previous five (5) years.
 - c. Manufacturer shall provide technical field representation at project site, as a minimum, at start of project, during middle, towards end of project, and during field testing of field mockup panel.

- d. Testing Laboratory: Contractor retained. Engage an AAMA accredited commercial testing laboratory to perform tests specified. Submit information regarding testing laboratory's facilities and qualifications of technical personnel to perform testing specified in this section.
 - e. Product Options: Information on Drawings and in Specifications establishes requirements for aesthetic effects and performance characteristics of glazed aluminum curtain wall system. Aesthetic effects are indicated by dimensions, arrangements, alignment, and profiles of components and assemblies as they relate to sightlines, one another, and adjoining construction. Performance characteristics are indicated by criteria subject to verification by one or more methods including preconstruction testing, field testing, or in-service performance.
 - 1) Do not modify intended aesthetic effects. If modifications are proposed, submit comprehensive explanatory data for review.
 - f. Qualification of Welders:
 - 1) Welding shall be performed by certified welders qualified in accordance with AWS D1.2, using procedures, materials, and equipment of the type required for this work.
- B. Mockup
- 1. Construct, at job site, full size typical wall unit which incorporates horizontal and vertical joints, framing, window units, panels, glazing, sealants, and other accessories as detailed and specified. Mock-up wall unit location, size and design shall be as indicated. Orient mockup to be facing full sun when constructed.
- //2. Performance Test //
- //a. Conduct performance test after approval of visual aspects has been obtained. Finished work shall match approved mock-up. //
 - //b. Refer to Performance Requirements and Field Quality Control Articles, included hereinafter, for testing requirements. //
- //3. Approved Mock-up //
- //a. After completion and approval of test results of job site mockup, as directed, approved mock-up panel shall be used as minimum standard of comparison for entire curtain wall system. //
- C. Pre-Installation Conference
- 1. Prior to starting installation of glazed curtain wall system schedule conference with Contracting Officer to ensure following:
 - a. Clear understanding of drawings and specifications.

- b. Onsite inspection and acceptance of structural and pertinent structural details relating to curtain wall system.
- c. Coordination of work of various trades involved in providing system. Conference shall be attended by Contractor; personnel directly responsible for installation of curtain wall system, flashing and sheet metal work, firestopping system and curtain wall manufacturer and their Technical Field Representatives. Conflicts shall be resolved and confirmed in writing.

1.4 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Product Data:
 - 1. Manufacturer's standard details and fabrication methods.
 - 2. Data on finishing, components, and accessories.
 - 3. Instructions: Submit descriptive literature, detail specifications, available performance test data and instructions for installation, and adjustments.
 - 4. Recommendations for maintenance and cleaning of exterior surfaces.
- C. Shop Drawings:
 - 1. Show elevations of glazed curtain wall system at 1:50 (1/4 inch) scale, metal gages, details of construction, methods of anchorage, glazing details, and details of installation.
 - 2. Submit for curtain wall system, accessories, and mock-up. Tentative approval of drawings shall be received before fabrication of mock-up. Final approval of drawings shall be deferred pending approval of mock-up and accessories. Drawings shall indicate in detail all system parts including elevations, full size sections, framing, jointing, panels, types and thickness of metal anchorage details, flashing and coping details, field connections, weep and drainage system, finishes, sealing methods, glazing, glass sizes and details, firestopping insulation materials, and erection details.
 - 3. Operation and Maintenance Manuals
 - a. Submit cleaning and maintenance instructions.
- D. Samples:
 - 1. Submit pairs of samples of each specified color and finish on 300 mm (12-inch) long section by width of each tubular, or extruded shape section or 300 mm by 300 mm (12-inch by 12-inch) wide sections of sheet shapes.

2. Submit corner section of framing members showing fasteners, panels, glazing methods, glazing materials, and weather-stripping. Submit one sample minimum 300 mm by 300 mm (12 inches by 12 inches). In lieu of submitting separate samples for corner section, intermediate section, and panel, one composite sample incorporating all components and features listed may be submitted.
3. Where normal color variations are anticipated, include 2 or more units in set indicating extreme limits of color variations.

E. Glass:

1. Specified in Section 08 80 00, GLAZING.

F. Quality Control Submittals:

1. Design Data:

- a. Submit structural and thermal calculations for complete wall assembly. Structural calculations and design shop drawings shall be signed and sealed by a structural engineer registered in state in which project is to be located.

2. Factory Test Reports:

- a. Test Reports: Provide certified test reports, for each of following listed tests, from a qualified independent testing laboratory showing that glazed aluminum curtain wall system assembly has been tested in accordance with specified test procedures and complies with performance characteristics as indicated by manufacturer's testing procedures. Manufacturer shall submit appropriate testing numbers for specific tests indicated below.
 - 1) Deflection and structural tests.
 - 2) Water penetration tests.
 - 3) Air infiltration tests.
 - 4) Delamination tests.
 - 5) Thermal conductance tests.
 - 6) Submit factory tests required except that where a curtain wall system or component of similar type, size, and design as specified for this project has been previously tested within last year, under conditions specified herein, resulting test reports may be submitted in lieu of listed testing.

G. Manufacturer's Certificates:

1. Submit Certificates of Compliance, with specification requirements, for the following:
 - a. Metal extrusions.
 - b. Metal accessories.

- c. Stating that aluminum has been given specified thickness of anodizing or organic coating finish.
 - d. Indicating manufacturer's and installer's meet qualifications as specified.
 - e. Submit list of equivalent size installations, for both manufacturer and installer, which have had satisfactory and efficient operation.
- H. Manufacturer's Field Reports:
- 1. Submit field reports of manufacturer's field representative observations of curtain wall installation indicating observations made during inspection at beginning of project, during middle of installation and at conclusion of project. Indicate results of field testing of mockup field panel, and any directions given Contractor for corrective action.

1.5 DELIVERY, STORAGE AND HANDLING

- A. Refer to AAMA CW 10 for care and handling of architectural aluminum from shop to site.
- B. Prior to packaging for shipment from factory, mark wall components to correspond with shop and erection drawings and their placement location and erection.
- C. Prior to shipment from factory, place knocked-down lineal members in cardboard containers and cover finished surfaces of members with protective covering of adhesive paper, waterproof tape, or strippable plastic. Do not cover metal surfaces that will be in contact with sealants after installation.
- D. Inspect materials delivered to site for damage; unload and store with ventilation, free from heavy dust, not subject to combustion products or sources of water, and shall permit easy access for inspection and handling. Sealing and caulking compounds, including handling, shall be in accordance with requirements of Section 07 92 00 JOINT SEALANTS.

1.6 PROJECT CONDITIONS

- A. Field Measurements: Where glazed aluminum curtain wall systems are indicated to fit to other construction, verify dimensions of other construction by field measurements before fabrication and indicate measurements on Shop Drawings. Coordinate fabrication schedule with construction progress to avoid delaying Work.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referred to in text by basic designation only.
- B. American Architectural Manufacturers Association (AAMA):
- MCWM-1-89Metal Curtain Wall Manual
 - CW 10-04Care and Handling of Architectural Aluminum from Shop to Site
 - CW 11-85Design Windloads for Buildings and Boundary Layer Wind Tunnel Testing
 - CW 13-85Structural Sealant Glazing Systems (A Design Guide)
 - CWG 1-89Installation of Aluminum Curtain Walls
 - TIR A1-04Sound Control for Fenestration Products
 - TIR A8-08Structural Performance of Composite Thermal Barrier Framing Systems
 - TIR A9-91Metal Curtain Wall Fasteners
 - TIR A11-04Maximum Allowable Deflection of Framing Systems for Building Cladding Components of Design Wind Loads
 - 101/I.S.2/A440-08Windows, Doors and Unit Skylights
 - 501-05Methods of Test for Exterior Walls
 - 503-08Field Testing of Metal Storefronts, Curtain walls and Sloped Glazing Systems
 - 2605-98High Performance Organic Coatings on Architectural Extrusions and Panels
 - 1503-09Thermal Transmission and Condensation Resistance of Windows, Doors and Glazed Wall Sections
- C. American National Standards Institute (ANSI):
- Z97.1-09Glazing Materials Used in Buildings, Safety Performance Specifications and Methods of Test
- D. American Society of Civil Engineers (ASCE):
- ASCE 7-10Minimum Design Loads for Buildings and Other Structures
- E. American Society for Testing and Materials (ASTM):
- A36/A36M-08Structural Steel
 - A123-09Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products

A193-10	Alloy-Steel and Stainless Steel Bolting Materials for High Temperature Service
A307-10	Carbon Steel Bolts and Studs, 60,000 PSI Tensile Strength
B209-10	Aluminum and Aluminum Alloy Sheet and Plate
B211-03	Aluminum and Aluminum Alloy Bar, Rod, Wire
B221/B221M-08	Aluminum and Aluminum Alloy Extruded Bars, Rods, Wire, Shapes and Tubes
B316/B316M-10	Aluminum and Aluminum Alloy Rivet and Cold- Heading, Wire, and Rods
C578-10	Rigid Cellular Polystyrene Thermal Insulation
C612-10	Mineral Fiber Block and Board Thermal Insulation
C920-11	Elastomeric Joint Sealants
C794-10	Standard Test Method for Adhesion-In-Peel of Elastomeric Joint Sealants.
C1363-05	Thermal Performance of Building Materials and Envelope Assemblies by Means of a Hot Box Apparatus
D1037-06	Evaluating the Properties of Wood-Base Fibers and Particle Panel Materials
E84-10	Surface Burning Characteristics of Building Materials
E90-09	Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements
E283-04	Determining Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors under Specified Pressure Difference Across this Specification
E330-02(R2010)	Structural Performance of Exterior Windows, Curtain Walls, and Doors by Uniform Static Air Pressure Difference
E331-00(R2009)	Water Penetration of Exterior Windows, Curtain Walls, and Doors By Uniform Static Air Pressure Difference
E413-10	Classification for Rating Sound Insulation
E783-02(R2010)	Test Method for Field Measurement of Air Leakage Through Installed Exterior Windows and Doors.
E1105-00(R2008)	Field Determination of Water Penetration of Installed Exterior Windows, Curtain Walls, and

Doors By Uniform or Cyclic Static Air Pressure
Differences

- F. American Welding Society, Inc. (AWS):
D1.2-08Structural Welding Code-Aluminum
- G. Consumer Product Safety Commission (CPSC):
16 CFR 1201Architectural Glazing Standards and Related
Material
- H. Federal Specifications (FS):
TT-P-645B-90Primer, Paint, Zinc-Molybdate, Alkyd Type
- I. Glass Association of North America (GANA):
2010 EditionGANA Glazing Manual
2008 EditionGANA Sealant Manual
2009 EditionGANA Laminated Glazing Reference Manual
2008 EditionTempered Glass Engineering Standard Manual
- J. Military Specifications (MIL):
MIL-C-18480(Rev. B) Coating Compound, Bituminous Solvent,
Coal Tar Base
- K. National Association of Architectural Metal Manufacturers (NAAMM):
500 Series (2006)Metal Finishes Manual.
- L. Steel Structures Painting Council (SSPC)
Paint 25-97 (2004)Red Iron Oxide Raw Linseed Oil and Alkyd Primer
(Without Lead and Chromate Pigments)

1.8 WARRANTY

- A. Submit manufacturer's written warranty for materials, installation and weathertightness, and subject to terms of "Warranty of Construction", FAR clause 52.246-21, except that warranty period shall be extended to five (5) years from date of final acceptance of project by Government.

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION

- A. Design Requirements:
 - 1. Curtain Wall System: Tubular aluminum sections with thermal break condition self supporting framing, factory prefinished, vision glass, and spandrel infill; related flashings, anchorage and attachment devices.
 - 2. System Assembly: Site assembled.
 - 3. No curtain wall framing member shall deflect, in a direction normal to plane of wall, more than 1/175 of its clear span or 20 mm (3/4 inch), whichever is less, when designed in accordance with requirements of TIR A11 and tested in accordance with ASTM E330,

except that when a gypsum wallboard surface will be affected, deflection shall not exceed $1/360$ of span. No framing member shall have a permanent deformation in excess of 0.2 percent of its clear span when tested in accordance with ASTM E330 for a minimum test period of 10 seconds at 1.5 times design wind pressures indicated as part of structural drawing wind load requirements. No glass breakage, damage to fasteners, hardware or accessories shall be permitted due to deformation stated above.

- a. Provide system complete with framing, mullions, trim, fasteners, anchors, accessories, concealed auxiliary members, and attachment devices for securing wall to structure as specified or indicated. Unless noted otherwise, comply with MCWM-1.
 - b. Curtain wall system components shall be furnished by one manufacturer or fabricator; however, all components need not be products of same manufacturer.
 - c. Fully coordinate system accessories directly incorporated, and adjacent to contiguous related work and insure materials compatibility, deflection limitations, thermal movements, and clearances and tolerances as indicated or specified.
 - d. Provide system with adequate allowances for expansion and contraction of components and fastenings to prevent buckling damage, joint seal failure, glass breakage, undue stress on fastenings or other detrimental effects. For design purposes, base provisions for thermal movement on assumed ambient temperature range of from -18 degrees C to 49 degrees C (0 degrees F to 120 degrees F).
 - e. Provide wall system to accommodate tolerances in building frame and other contiguous work as indicated or specified.
- B. Manufacturer's Professional Engineer Qualifications: A professional engineer who is legally qualified to practice in jurisdiction where Project is located and who is experienced in providing engineering services of kind indicated. Engineering services are defined as those performed for installations of curtain walls that are similar to those indicated for this Project in material, design, and extent.
- C. Performance Requirements:
1. System shall meet or exceed all performance requirements specified.
 2. Curtain wall components shall have been tested in accordance with requirements below and shall meet performance requirements specified:
 3. System Design: Design and size components to withstand dead loads and live loads caused by positive and negative wind loads acting normal

- to plane of wall as calculated in accordance with ASCE 7-Minimum Design Loads for Buildings and Other Structures.
4. Seismic Loads: Design and size components to withstand seismic loads and sway displacement as calculated in accordance with applicable code.
 5. Water Penetration:
 - a. No water penetration shall occur when wall is tested in accordance with ASTM E331 at a differential static test pressure of 20 percent of inward acting design wind pressure as indicated on structural drawings, but not less than 479 Pa (10 psf).
 - b. Make provision in wall construction for adequate drainage to outside of water leakage or condensation that occurs within outer face of wall. Leave drainage and weep openings in members and wall open during test.
 6. Air Infiltration: Test glazed aluminum curtain wall system according to AAMA 503, which requires testing according to ASTM E783
 - a. Static-Air-Differential: 75 Pa (1.57 lbf/sq. ft.) minimum.
 - b. Air Leakage: 0.03 L/s per sq. m (0.06 cfm/sq ft) of surface maximum.
 7. Deflections Test: ASTM E330, Procedure B:
 - a. No member shall deflect in a direction parallel to plane of wall, when carrying its full design load, more than an amount which will reduce edge cover or glass bite below 75 percent of design dimension. No member after deflection under full design load, shall have a clearance between itself and top of panel, glass, sash, or other part immediately below it less than 3 mm (1/8 inch); clearance between member and an operable window or door shall be minimum 1.5 mm (1/16 inch).

2.2 MATERIALS

- A. Extruded Aluminum Framing Members: ASTM B221M; 6063-T5 extruded aluminum for non-structural components or 6063-T6 extruded aluminum for structural members; temper and alloy as recommended by manufacturer.
- B. Sheet Aluminum: ASTM B209M; 6065-T5 temper and alloy as recommended by manufacturer.
 1. Formed flashing and closures: Minimum 1.58 mm (0.062 inch) thick aluminum, in finish as selected.
 2. Extruded sill members: Minimum 1.58 mm (0.062 inch) thick aluminum, in finish as selected.
- C. Steel Sections: ASTM A36M.

D. Primer: TS TT-P-645; red, for shop application and field touch-up.

E. Fasteners:

1. For Exterior Cap Retainers: ASTM A193 B8 300 series, stainless steel screws.
2. For Framework Connections: ASTM B211M 2024-T4 aluminum, ASTM A193 B8 300 series, stainless steel, and ASTM B316 aluminum rivets, as required by connection.
3. For Anchoring Glazed Aluminum Curtain Wall to Support Structure: ASTM A307 zinc plated steel fasteners.

F. Shims: Metal or plastic.

G. Joint Sealants and Accessories:

1. In accordance with requirements specified in Section 07 92 00, JOINT SEALANTS.
2. Structural Flush Glazed Joints: High performance silicone sealant applied in accordance with manufacturer's recommendations.
3. Non-structural Flush Glazed Joints and Weather Seal Joints: Silicone sealants applied in accordance with manufacturer's recommendations.
4. Structural silicone sealant performance requirements: ASTM C920.
 - a. Hardness: Type A, 30 durometer.
 - b. Ultimate Tensile Strength: 1172 kPa (170 psi).
 - c. Tensile at 150% Elongation: 55 kPa (80 psi).
 - d. Joint Movement Capability after 14 Day Cure: +/- 50%.
 - e. Peel Strength aluminum, after 21 Day Cure: 599 g/mm (34 pounds per inch).
5. Structural silicone shall not be used to support dead weight of vertical glass or panels.
6. Comply with recommendations of sealant manufacturer for specific sealant selections.
7. Provide only sealants that have been tested per ASTM C794 to exhibit adequate adhesion to samples of glass and metal equivalent to those required for project.
8. Exposed metal to metal joints: Silicone sealant selected from manufacturer's standard colors.

H. Glazing Materials:

1. As specified under Section 08 80 00, GLAZING.
2. Glazing Gaskets:
 - a. Exterior: Continuous EPDM gaskets at each glass and spandrel panel.
 - b. Interior: Continuous, closed cell PVC foam sealant tape, sealed at corners.

3. Glass Sizes and Clearances:

- a. Accommodate up to 25 mm (1 inch) glazing.
- b. Sizes indicated are nominal. Verify actual sizes required by measuring frames. Coordinate dimensions for glass and glass holding members to meet applicable minimum clearances as recommended by glass manufacturer. Do not nip glass to remove flares or to reduce oversized dimensions. All cutting shall occur in factory.

4. Glass Setting Materials:

- a. Provide head bead and drive wedge required for glass installation to suit curtain wall system in accordance with manufacture's recommendations.

I. Firestopping: Refer to Section 07 84 00, FIRESTOPPING for requirements.

J. Custom fabricate, Z-shaped, aluminum window fin: Captured by the pressure plate in the glazing pocket. Coordinate installation with the Vapor Control Barriers specified in Section 07 27 26.

2.3 FABRICATION

- A. Curtain wall components shall be of materials and thickness indicated or specified. Details indicated are representative of required design and profiles. Maintain sightlines indicated on drawings. Unless specifically indicated or specified otherwise, methods of fabrication and assembly shall be at discretion of curtain wall manufacturer. Perform fitting and assembling of components in shop to maximum extent practicable. Anchorage devices shall permit adjustment in three directions. There shall be no exposed fasteners.
- B. Joints: Joints exceeding +1.5 mm (+1/16") shall be mechanically fastened.
- C. Ventilation and Drainage: Direct water leakage to exterior by means of concealed drainage system and weeps. Flashings and other materials used internally shall be nonstaining, noncorrosive, and nonbleeding.
- D. Protection and Treatment of Metals:
 1. Remove from metal surfaces lubricants used in fabrication and clean off other extraneous material before leaving shop.
 2. Provide protection against galvanic action wherever dissimilar metals are in contact, except in case of aluminum in permanent contact with galvanized steel, zinc, stainless steel, or relatively small areas of white bronze. Paint contact surfaces with one coat bituminous paint conforming to MIL-C-18480 or apply appropriate caulking material or

- nonabsorptive, noncorrosive, and nonstaining tape or gasket between contact surfaces.
- E. Metal sills and Closures: Fabricate accessories, spandrel panels, trim closures of sizes and shapes indicated from similar materials and finish as specified for wall system.
 - F. Concealed Interior Mullion Reinforcing: ASTM A36M steel shapes as required for strength and mullion size limitations, hot dip galvanized after fabrication in accordance with ASTM A123.

2.4 PROTECTION

- A. Provide protection for aluminum against galvanic action, wherever dissimilar materials are in contact, by painting contact surfaces of dissimilar material with a heavy coat of bituminous paint (complete coverage), or by separating contact surfaces with a preformed neoprene tape having pressure sensitive adhesive coating on one side.

2.5 METAL FINISHES

- A. In accordance with NAAMM AMP500 series.
- B. Anodized Aluminum:
 - 1. AA-C22A41 Chemically etched medium matte, with clear anodic coating, Class 1 Architectural, 0.7-mil thick.
- C. Apply one coat of bituminous paint to concealed aluminum surfaces in contact with cementitious or dissimilar materials.

PART 3 - EXECUTION

3.1 EXAMINATION

- A. Prior to installation of glazed curtain wall system, arrange for representative(s) of manufacturer to examine structure and substrate to determine that they are properly prepared, and ready to receive glazed curtain wall work included herein.
- B. Verifying Conditions and Adjacent Surfaces: After establishment of lines and grades and prior to system installation examine supporting structural elements. Verify governing dimensions, including floor elevations, floor to floor heights, minimum clearances between curtain wall and structural frames, and other permissible dimensional tolerances in building frame.

3.2 PREPARATION

- A. Take field dimensions and examine condition of substrates, supports, and other conditions under which work of this section is to be performed to verify that work may properly commence. Do not proceed with installation until unsatisfactory conditions have been corrected.

- B. Contact between aluminum and dissimilar metals shall receive a protective coating of asphaltic paint for prevention of electrolytic action and corrosion.

3.3 INSTALLATION

- A. Installation and erection of glazed curtain wall system and all components shall be in accordance with written directions of curtain wall manufacturer. Match profiles, sizes, and spacing indicated on approved shop drawings.
- B. Bench Marks and Reference Points: Establish and permanently mark bench marks for elevations and building line offsets for alignment at convenient points on each floor level. Should any error or discrepancy be discovered in location of marks, stop erection work in that area until discrepancies have been corrected.
- C. Ensure that drainage system operates properly in accord with AAMA 501 procedures.
- D. Do not proceed with structural silicone work when metal temperature is below 0 degrees C (32 degrees F).
- E. Isolate between aluminum and dissimilar metals with protective coating or plastic strip to prevent electrolytic corrosion.
- F. Install glazed aluminum curtain wall system so as to maintain a virtually flat face cap, with no visible bowing.
- G. Install entire system so that fasteners are not visible.
- H. Tolerances:
 - 1. Maximum variation from plane or location shown on approved shop drawings: 3 mm per 3600 mm (1/8 inch per 12 feet) of length up to not more than 13 mm (1/2 inch) in any total length.
 - 2. Maximum offset from true alignment between two identical members abutting end to end in line: 0.8 mm (1/32 inch).
 - 3. Sealant Space Between Curtain Wall Mullion and Adjacent Construction: Maximum of 19 mm (3/4 inch) and minimum of 6 mm (1/4 inch).
- I. Joint Sealants:
 - 1. Joint Sealants: Shall be in accordance with requirements of Section 07 92 00, JOINT SEALANTS.
 - 2. Surfaces to be primed and sealed shall be clean, dry to touch, free from frost, moisture, grease, oil, wax, lacquer, paint, or other foreign matter. Enclose joints on three sides. Clean out grooves to proper depth. Joint dimensions shall conform to approved detail drawings with a tolerance of plus 3 mm (1/8 inch). Do not apply compound unless ambient temperature is between 5 and 35 degrees C (40

and 90 degrees F). Clean out loose particles and mortar just before sealing. Remove protective coatings or coverings from surfaces in contact with sealants before applying sealants or tapes. Solvents used to remove coatings shall be of type that leave no residue on metals.

3. Match approved sample. Force compound into grooves with sufficient pressure to fill grooves solidly. Sealing compound shall be uniformly smooth and free of wrinkles and, unless indicated otherwise, shall be tooled and left sufficiently convex to result in a flush joint when dry. Do not trim edges of sealing material after joints are tooled. Mix only amount of multi-component sealant which can be installed within four hours, but at no time shall this amount exceed 19 liters (5 gallons).
4. Apply primer to masonry, concrete, wood, and other surfaces as recommended by sealant manufacturer. Do not apply primer to surfaces which will be exposed after caulking is completed.
5. Tightly pack backing in bottom of joints which are over 13 mm (1/2 inch) in depth with specified backing material to depth indicated or specified. Roll backing material of hose or rod stock into joints to prevent lengthwise stretching.
6. Install bond preventive material at back or bottom of joint cavities in which no backstop material is required, covering full width and length of joint cavities.
7. Remove compound smears from surfaces of materials adjacent to sealed joints as work progresses. Use masking tape on each side of joint where texture of adjacent material will be difficult to clean. Remove masking tape immediately after filling joint. Scrape off fresh compound from adjacent surfaces immediately and rub clean with approved solvent. Upon completion of caulking and sealing, remove remaining smears, stains, and other soiling, and leave work in clean neat condition.

J. Glass:

1. Refer to Section 08 80 00, GLAZING, and drawing for glass types. Install in accordance with manufacturer's recommendations as modified herein.
2. Before installing glass, inspect sash and frames to receive glass for defects such as dimensional variations, glass clearances, open joints, or other conditions that will prevent satisfactory glass installation. Do not proceed with installation until defects have been corrected.

3. Clean sealing surfaces at perimeter of glass and sealing surfaces of rebates and stop beads before applying glazing compound, sealing compound, glazing tape, or gaskets. Use only approved solvents and cleaning agents recommended by compound or gasket manufacturer. All sashes shall be designed for outside glazing. Provide continuous snap in glazing beads to suit glass as specified.
4. Insulating and tempered glass, and glass of other types that exceed 100 united inches in size: Provide void space at head and jamb to allow glass to expand or move without exuding sealant. Perimeter frames and ventilator sections shall have glazing rebates providing an unobstructed glazing surface 19 mm (3/4 inch) in height. Glazing rebate surfaces must be sloped to shed water.
5. Provide adequate means to weep incidental water and condensation away from sealed edges of insulated glass units and out of wall system. Weeping of lock-strip gaskets should be in accordance with recommendation of glass manufacturer.

K. Metal Copings:

1. Refer to Section 07 60 00, FLASHING AND SHEET METAL for requirements of metal copings when they are not a part of glazed curtain wall system work.
2. Coordinate curtain wall installation with metal coping detail on contract drawings. Provide watertight seal to meet criteria set forth in this section regarding air and water penetration.

3.4 CLEANING

- A. Install curtain wall frame and associated metal to avoid soiling or smudging finish.
- B. Clean metal surfaces promptly after installation, exercising care to avoid damage to coatings.
- C. Remove excess glazing and sealant compounds, dirt, and other substances.
- D. Follow recommendations of manufacturer in selection of cleaning agents. Do not use cleaning agents containing ammonia or other compounds that might damage finished metal surfaces.
- E. Replace cracked, broken, and defective glass with new glass at no additional cost to Government. Just prior to final acceptance of curtain wall system clean glass surfaces on both sides, remove labels, paint spots, compounds, and other defacements, and clean metal fixed panels. Remove and replace components that cannot be cleaned successfully.

3.5 FIELD QUALITY CONTROL

- A. Testing Agency: Engage an AAMA accredited commercial qualified independent testing and inspecting agency to perform field quality-control tests specified, and to prepare test reports: Submit information regarding testing laboratory's facilities and qualifications of technical personnel to Contracting Officer for approval.
- B. Conduct field check test for water leakage on designated wall areas after erection to comply with MCWM-1. Conduct test on two wall areas, two bays wide by two stories high where directed. Conduct test and take necessary remedial action as directed by Contracting Officer.
- C. Test Specimen:
 - 1. Test specimen shall include curtain wall assembly and construction. Test chamber shall be affixed to exterior side of test specimen and test shall be conducted using positive static air pressure.
 - 2. Test specimens shall be selected by Contracting Officer after curtain wall system has been installed in accordance with contract drawings and specification.
- D. Sealant Adhesion Tests: Test installed sealant, in presence of sealant manufacturer's field representative, in a minimum of two areas and as follows:
 - 1. Test structural silicone sealant according to field adhesion test method described in AAMA CW 13, "Structural Sealant Glazing Systems (A Design Guide)."
 - 2. Test weatherseal sealant as recommended in writing by sealant manufacturer.
- E. Air Infiltration: Test glazed aluminum curtain wall system according to AAMA 503, which requires testing according to ASTM E783.
 - 1. Field air leakage testing is not required for continuous curtain wall systems.
 - 2. Static-Air-Pressure Differential: 75 Pa (1.57 lbf/sq. ft.) minimum.
 - 3. Air Leakage: 0.03 L/s per sq. m (0.06 cfm/sq. ft.) of surface maximum.
- F. Water Penetration: Test glazed aluminum curtain wall system for compliance with requirements according to AAMA 503, which requires testing according to ASTM E1105.
 - 1. Uniform Static-Air-Pressure Difference: 20 percent of positive design wind load, but not less than 479 Pa (10 psf). No uncontrolled water shall be present.
- G. Retesting:

1. Should system fail field test, system may be modified or repaired, and retested.
2. Should system fail second field test, system may be additionally modified or repaired, and retested.
3. All modifications and repairs made to tested areas shall be recorded, and same modifications and repairs made to all system and adjacent construction on project.
4. Should second test fail, Contracting Officer may require testing of additional areas of the curtain wall.

H. Rejection:

1. Failure of any of specimens to meet test requirements of third test shall be cause for rejection of wall system and adjacent construction on project.

3.6 PROTECTION

- A. After installation, protect windows, and other exposed surfaces from disfiguration, contamination, contact with harmful materials, and from other construction hazards that will interfere with their operation, or damage their appearance or finish. Protection methods shall be in accordance with recommendations of product manufacturers or of respective trade association. Remove paper or tape factory applied protection immediately after installation. Clean surfaces of mortar, plaster, paint, smears of sealants, and other foreign matter to present neat appearance and prevent fouling of operation. In addition, wash with a stiff fiber brush, soap and water, and thoroughly rinse. Where surfaces become stained or discolored, clean or restore finish in accordance with recommendations of product manufacturer or respective trade association.

- - - END - - -

**SECTION 08 71 00
DOOR HARDWARE**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Door hardware and related items necessary for complete installation and operation of doors.

1.2 RELATED WORK

- A. Caulking: Section 07 92 00 JOINT SEALANTS.
- B. Application of Hardware: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, Section 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS and Section 08 71 13, AUTOMATIC DOOR OPERATORS.
- C. Painting: Section 09 91 00, PAINTING.
- D. Electrical: Division 26, ELECTRICAL.
- E. Fire Detection: Section 28 31 00, FIRE DETECTION AND ALARM.

1.3 GENERAL

- A. All hardware shall comply with UFAS, (Uniform Federal Accessible Standards) unless specified otherwise.
- B. Hardware for Labeled Fire Doors and Exit Doors: Conform to requirements of NFPA 80 for labeled fire doors and to NFPA 101 for exit doors, as well as to other requirements specified. Provide hardware listed by UL, except where heavier materials, large size, or better grades are specified herein under paragraph HARDWARE SETS. In lieu of UL labeling and listing, test reports from a nationally recognized testing agency may be submitted showing that hardware has been tested in accordance with UL test methods and that it conforms to NFPA requirements.
- C. Hardware for application on metal and wood doors and frames shall be made to standard templates. Furnish templates to the fabricator of these items in sufficient time so as not to delay the construction.
- D. The following items shall be of the same manufacturer, if possible, except as otherwise specified:
 - 1. Mortise locksets.
 - 2. Hinges for hollow metal and wood doors.
 - 3. Surface applied overhead door closers.
 - 4. Exit devices.
 - 5. Floor closers.

1.4 WARRANTY

A. Automatic door operators shall be subject to the terms of FAR Clause 52.24-21, except that the Warranty period shall be two years in lieu of one year for all items except as noted below:

1. Locks, latchsets, and panic hardware: 5 years.
2. Door closers and continuous hinges: 10 years.

1.5 MAINTENANCE MANUALS

A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on all door hardware.

1.6 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.

B. Hardware Schedule: Prepare and submit hardware schedule in the following form:

Hardware Item	Quantity	Size	Reference Publication Type No.	Finish	Mfr. Name and Catalog No.	Key Control Symbols	UL Mark (if fire rated and listed)	ANSI/BHMA Finish Designation

C. Samples and Manufacturers' Literature:

1. Samples: All hardware items (proposed for the project) that have not been previously approved by Builders Hardware Manufacturers Association shall be submitted for approval. Tag and mark all items with manufacturer's name, catalog number and project number.
2. Samples are not required for hardware listed in the specifications by manufacturer's catalog number, if the contractor proposes to use the manufacturer's product specified.

D. Certificate of Compliance and Test Reports: Submit certificates that hardware conforms to the requirements specified herein. Certificates shall be accompanied by copies of reports as referenced. The testing shall have been conducted either in the manufacturer's plant and certified by an independent testing laboratory or conducted in an

independent laboratory, within four years of submittal of reports for approval.

1.7 DELIVERY AND MARKING

Deliver items of hardware to job site in their original containers, complete with necessary appurtenances including screws, keys, and instructions. Tag one of each different item of hardware and deliver to COTR for reference purposes. Tag shall identify items by Project Specification number and manufacturer's catalog number. These items shall remain on file in COTR's office until all other similar items have been installed in project, at which time the COTR will deliver items on file to Contractor for installation in predetermined locations on the project.

1.8 INSTRUCTIONS

- A. Hardware Sets: Hardware requirements for each door are included in this section. Each number designates a set of hardware items applicable to a door type.
- B. Manufacturers' Catalog Number References: Where manufacturers' products are specified herein, products of other manufacturers which are considered equivalent to those specified may be used. Some manufacturers whose products are specified are identified as follows:

Adams-Rite	Adams Rite Mfg. Co.	Pomona, CA
Best	Best Access Systems	Indianapolis, IN
Don-Jo	Don-Jo Manufacturing	Sterling, MA
G.E. Security	GE Security, Inc.	Bradentown, FL
Markar	Markar Architectural Products	Pomona, CA
Pemko	Pemko Manufacturing Co.	Ventura, CA
Rixson	Rixson	Franklin Park, IL
Rockwood	Rockwood Manufacturing Co.	Rockwood, PA
Securitron	Securitron Magnalock Corp.	Sparks, NV
Southern Folger	Southern Folger Detention Equipment Co.	San Antonio, TX
Stanley	The Stanley Works	New Britain, CT
Tice	Tice Industries	Portland, OR
Trimco	Triangle Brass Mfg. Co.	Los Angeles, CA
Zero	Zero Weather Stripping Co.	New York, NY

- C. Keying: All cylinders shall be keyed into existing Key System. Provide removable core cylinders that are removable only with a special key or tool without disassembly of knob or lockset. Cylinders shall be 6 pin type. Keying information shall be furnished at a later date by the COTR.

1.7 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. In text, hardware items are referred to by series, types, etc., listed in such specifications and standards, except as otherwise specified.
- B. American Society for Testing and Materials (ASTM):
- F883-04.....Padlocks
- E2180-07.....Standard Test Method for Determining the
Activity of Incorporated Antimicrobial Agent(s)
In Polymeric or Hydrophobic Materials
- C. American National Standards Institute/Builders Hardware Manufacturers Association (ANSI/BHMA):
- A156.1-06.....Butts and Hinges
- A156.2-03.....Bored and Pre-assembled Locks and Latches
- A156.3-08.....Exit Devices, Coordinators, and Auto Flush
Bolts
- A156.4-08.....Door Controls (Closers)
- A156.5-01.....Auxiliary Locks and Associated Products
- A156.6-05.....Architectural Door Trim
- A156.8-05.....Door Controls-Overhead Stops and Holders
- A156.12-05Interconnected Locks and Latches
- A156.13-05.....Mortise Locks and Latches Series 1000
- A156.14-07Sliding and Folding Door Hardware
- A156.15-06.....Release Devices-Closer Holder, Electromagnetic
and Electromechanical
- A156.16-08.....Auxiliary Hardware
- A156.17-04Self-Closing Hinges and Pivots
- A156.18-06.....Materials and Finishes
- A156.20-06Strap and Tee Hinges, and Hasps
- A156.21-09.....Thresholds
- A156.22-05.....Door Gasketing and Edge Seal Systems
- A156.23-04.....Electromagnetic Locks

- A156.24-03.....Delayed Egress Locking Systems
- A156.25-07Electrified Locking Devices
- A156.26-06.....Continuous Hinges
- A156.28-07Master Keying Systems
- A156.29-07Exit Locks and Alarms
- A156.30-03High Security Cylinders
- A156.31-07Electric Strikes and Frame Mounted Actuators
- A250.8-03.....Standard Steel Doors and Frames
- D. National Fire Protection Association (NFPA):
 - 80-10.....Fire Doors and Fire Windows
 - 101-09.....Life Safety Code
- E. Underwriters Laboratories, Inc. (UL):
 - Building Materials Directory (2008)

PART 2 - PRODUCTS

2.1 BUTT HINGES

- A. ANSI A156.1. The following types of butt hinges shall be used for the types of doors listed, except where otherwise specified:
 - 1. Interior Doors: Type 8112 for doors 900 mm (3 feet) wide or less and Type A8111 for doors over 900 mm (3 feet) wide.
 - 2. Automatic doors hung on butts, provide Type A2111 for aluminum doors, and Type A8111 for other doors.
 - 3. Any door installed in structural steel frames: Type A2412, A8412, A2411 or A8411 as applicable, except where otherwise specified. Such hinges shall be of same quality and weight as other hinges listed above for applicable door sizes.
 - 4. Labeled Wood Fire Doors: Type 8411 or Type 8412; these hinges shall be thru bolted to door with hex nuts and bolts.
- B. See Articles "MISCELLANEOUS HARDWARE" and "HARDWARE SETS" for pivots and hinges other than butts specified above and continuous hinges specified below.

2.2 DOOR CLOSING DEVICES

- A. Closing devices shall be products of one manufacturer for each type specified.

2.3 OVERHEAD CLOSERS

- A. Conform to ANSI A156.4, Grade 1.
- B. Closers shall conform to the following:

1. The closer shall have 50 percent adjustable closing force over minimum value for that closer and have adjustable hydraulic back check effective between 60 degrees and 85 degrees of door opening.
2. Where specified, closer shall have hold-open feature.
3. Size Requirements: Size closers in accordance with manufacturer's recommendations or provide multi-size closers, sizes 1 through 6.
4. Material of closer shall be forged or cast aluminum.
5. Arm and brackets for closers shall be steel, malleable iron or high strength ductile cast iron.
6. Closers shall have full size cover.
7. Closers shall have adjustable hydraulic back-check and separate valves for closing and latching speed.
8. Closers shall have "delay action" feature.

2.4 DOOR STOPS

- A. Conform to ANSI A156.16.
- B. Provide door stops wherever an opened door or any item of hardware thereon would strike a wall, column, equipment or other parts of building construction. For concrete, masonry or quarry tile construction, use lead expansion shields for mounting door stops.
- C. Where cylindrical locks with turn pieces or pushbuttons occur, equip wall bumpers Type L02251 (rubber pads having concave face) to receive turn piece or button.
- D. Substitute floor stops Type L02141 or L02161 as appropriate, when wall bumpers would not provide an effective door stop, unless specified otherwise.
- E. Omit stops where floor mounted door holders are required and where automatic operated doors occur.
- F. Provide appropriate roller bumper for each set of doors (except where closet doors occur) where two doors would interfere with each other in swinging.
- G. Provide door stops on doors where combination closer magnetic holders are specified.

2.5 OVERHEAD DOOR STOPS AND HOLDERS

- A. Conform to ANSI Standard A156.8. Overhead holders shall be of sizes recommended by holder manufacturer for each width of door. Set overhead holders for 110 degree opening, unless limited by building construction or equipment. Provide Grade 1 overhead concealed slide type: stop-only

at rated doors and security doors, hold-open type with exposed hold-open on/off control at all other doors requiring overhead door stops.

2.6 LOCKS AND LATCHES

- A. Conform to ANSI A156.2. Locks and latches for doors 45 mm (1-3/4 inch) thick or over shall have beveled fronts. Lock cylinders shall have not less than six pins. Cylinders for all locksets shall be removable core type. Cylinders shall be furnished with construction removable cores and construction master keys. Cylinder shall be removable by special key or tool. Construct all cores so that they will be interchangeable into the core housings of all mortise locks, rim locks, cylindrical locks, and any other type lock included in the Great Grand Master Key System. Disassembly of lever or lockset shall not be required to remove core from lockset. All locksets or latches on double doors with fire label shall have latch bolt with 19 mm (3/4 inch) throw. Provide temporary keying device or construction core of allow opening and closing during construction and prior to the installation of final cores.
- B. In addition to above requirements, locks and latches shall comply with following requirements:
 1. Mortise Lock and Latch Sets: Conform to ANSI/BHMA A156.13. Mortise locksets shall be series 1000, minimum Grade 2. All locksets and latchsets shall have lever handles similar to Falcon S-lever Design. Lever handle shall be fabricated from wrought stainless steel. No substitute lever design or material shall be accepted. All locks and latchsets shall be furnished with curved lip strike and wrought box. Lock function F02 shall be furnished with key plates similar to Russwin's No. A70. Furnish armored fronts for all mortise locks.
 2. Cylindrical Lock and Latch Sets: levers shall meet ADA (Americans with Disabilities Act) requirements. Cylindrical locksets shall be series 4000 Grade I. Knobs for series 4000 lock and latch sets shall have 57 mm (2-1/4 inch) diameters. Where two turn pieces are specified for lock F76, turn piece on inside knob shall lock and unlock inside knob, and turn piece on outside knob shall unlock outside knob when inside knob is in the locked position. (This function is intended to allow emergency entry into these rooms without an emergency key or any special tool.)
 3. Auxiliary locks shall be as specified under hardware sets and conform to ANSI A156.5.

2.7 ELECTROMAGNETIC LOCKS

- A. ANSI/BHMA A156.23; electrically powered, of strength and configuration indicated; with electromagnet attached to frame and armature plate attached to door. Listed under Category E in BHMA's "Certified Product Directory."
1. Type: Full exterior or full interior, as required by application indicated.
 2. Strength Ranking: 1500 lbf (6672 N).
 3. Inductive Kickback Peak Voltage: Not more than 53 V.
 4. Residual Magnetism: Not more than 4 lbf (18 N) to separate door from magnet.

2.8 ELECTRIC STRIKES

- A. ANSI/ BHMA A156.31 Grade 1.
- B. General: use fail-secure electric strikes at fire-rated doors.

2.9 KEYS

- A. Stamp all keys with change number and key set symbol. Furnish keys in quantities as follows:

Locks/Keys	Quantity
Cylinder locks	2 keys each
Cylinder lock change key blanks	100 each different key way
Master-keyed sets	6 keys each
Grand Master sets	6 keys each
Great Grand Master set	5 keys
Control key	1 key

2.10 ARMOR PLATES AND COMBINATION KICK-MOP PLATES

- A. Conform to ANSI Standard A156.6.
- B. Provide protective plates as specified below:
1. Kick-mop plates and armor plates, stainless steel, Type J100 series.
 2. Provide kick-mop plates for both sides of each new door, except where noted as not required. Kick-mop plates shall be 200 mm (8 inches) high. On push side of doors where jamb stop extends to floor, make combination kick-mop plates 38 mm (1-1/2 inches) less than width of door, except pairs of metal doors which shall have plates 25 mm (1 inch) less than width of each door. Extend all other

combination kick-mop plates to within 6 mm (1/4 inch) of each edge of doors. Kick mop plates shall butt astragals.

3. Kick-mop plates are not required on following door sides:
 - a) Armor plate side of doors;
 - b) Exterior side of exterior doors;
 - c) Closet side of closet doors;
 - d) Both sides of aluminum entrance doors.
4. Armor plates for doors are listed under Article "Hardware Sets". Armor plates shall be 875 mm (35 inches) high and 38 mm (1-1/2 inches) less than width of doors, except on pairs of metal doors. Plates on pairs of metal doors shall be 25 mm (1 inch) less than width of each door. Where top of intermediate rail of door is less than 875 mm (35 inches) from door bottom, extend armor plates to within 13 mm (1/2 inch) of top rail. On doors equipped with panic devices, extend armor plates to within 13 mm (1/2 inch) of panic bolt cross bar.
5. Where louver or grille occurs in lower portion of doors, substitute stretcher plate and kick-mop plate in place of armor plate. Size of stretcher plate and kick-mop plate shall be 200 mm (8 inches) high.

2.11 EXIT DEVICES

- A. Conform to ANSI Standard A156.3. Exit devices shall be Grade 1; type and function are specified in 3.3 Hardware Sets. Provide flush with finished floor strikes for vertical rod exit devices in interior of building. Trim shall have lever handles similar to locksets, unless otherwise specified.
- B. Exit devices for fire doors shall comply with Underwriters Laboratories, Inc., requirements for Fire Exit Hardware. Submit proof of compliance.

2.12 FLUSH BOLTS (LEVER EXTENSION)

- A. Conform to ANSI A156.16. Flush bolts shall be Type L24081 unless otherwise specified. Furnish proper dustproof strikes conforming to ANSI A156.16, for flush bolts required on lower part of doors.
- B. Lever extension manual flush bolts shall only be used at non-fire-rated pairs for rooms only accessed by maintenance personnel.
- C. Face plates for cylindrical strikes shall be rectangular and not less than 25 mm by 63 mm (1 inch by 2-1/2 inches).
- D. Friction-fit cylindrical dustproof strikes with circular face plate may be used only where metal thresholds occur.

- E. Provide extension rods for top bolt where door height exceeds 2184 mm (7 feet 2 inches).

2.13 AUTOMATIC DOOR BOTTOM SEAL AND RUBBER GASKET FOR SOUND CONTROL DOORS

- A. Conform to ANSI A156.22. Provide mortise or under-door type, except where not practical. For mortise automatic door bottoms, provide type specific for door construction (wood or metal).

2.14 MISCELLANEOUS HARDWARE

- A. Silencers: Conform to ANSI A156.16. Provide door silencers Type L03011, of light gray color, on each steel door frame, except lead-lined frames and frames for sound-resistant, lightproof and electromagnetically shielded doors. Furnish 3 silencers for single doors and 2 silencers for each pair of doors, except double-acting doors.

2.15 FINISHES

- A. Exposed surfaces of hardware shall have ANSI A156.18, finishes as specified below. Finishes on all hinges, pivots, closers, thresholds, etc., shall be as specified below under "Miscellaneous Finishes." For field painting (final coat) of ferrous hardware, see Section 09 91 00, PAINTING.
- B. 626 or 630: All surfaces on interior of buildings, except where other finishes are specified.
- C. Miscellaneous Finishes:
1. Hinges --interior doors: 652.
 2. Door Closers: Factory applied 689 aluminum powder coated finish.
 3. Pivots: Match door trim.
 4. Other primed steel hardware: 652.
- D. Hardware Finishes for Existing Buildings: Standard finishes shall match finishes of hardware in (similar) existing spaces except where otherwise specified.
- E. Color of Plastic Items: See SCHEDULE FOR FINISHES. Where colors other than chocolate brown or black are specified, color of core material may be different than color of face.

2.16 BASE METALS

Apply specified U.S. Standard finishes on different base metals as following:

Finish	Base Metal
652	Steel
626	Brass or bronze

630	Stainless steel
-----	-----------------

PART 3 - EXECUTION**3.1 HARDWARE HEIGHTS**

- A. Locate hardware on doors at heights specified below, unless otherwise noted.
- B. Hardware Heights from Finished Floor:
 - 1. Exit devices centerline of strike (where applicable) 1024 mm (40-5/16 inches).
 - 2. Locksets and latch sets centerline of strike 1024 mm (40-5/16 inches).
 - 3. Deadlocks centerline of strike 1200 mm (48 inches).
 - 4. Hospital arm pull 1170 mm (46 inches) to centerline of bottom supporting bracket.
 - 5. Centerline of door pulls to be 1000 mm (40 inches).
 - 6. Push plates and push-pull shall be 1250 mm (50 inches) to top of plate.
 - 7. Push-pull latch to be 1000 mm (40-5/16 inches) to centerline of strike.
 - 8. Centerline of deadlock strike to be 840 mm (33 inches) when used with push-pull latch.
 - 9. Locate other hardware at standard commercial heights. Locate push and pull plates to prevent conflict with other hardware.

3.2 INSTALLATION

- A. Closer devices, including those with hold-open features, shall be equipped and mounted to provide maximum door opening permitted by building construction or equipment. Closers shall be mounted regular arm. Where closers are mounted on doors they shall be mounted with sex nuts and bolts; foot shall be fastened to frame with machine screws.
- B. Substitute parallel arm or top jamb mounting for regular arm mounting where the following conditions occur:
 - 1. Where door swing, in full open position, would be limited to less than 90 degrees due to partition construction and closer location.
 - 2. Where door to room opens outward into corridor, except security bedroom, bathroom and anteroom doors which shall have closer installed parallel arm on exterior side of doors.

C. Hinge Size Requirements:

Door Thickness	Door Width	Hinge Height
45 mm (1-3/4 inch)	900 mm (3 feet) and less	113 mm (4-1/2 inches)
45 mm (1-3/4 inch)	Over 900 mm (3 feet) but not more than 1200 mm (4 feet)	125 mm (5 inches)
35 mm (1-3/8 inch) (hollow core wood doors)	Not over 1200 mm (4 feet)	113 mm (4-1/2 inches)

D. Hinge leaves shall be sufficiently wide to allow doors to swing clear of door frame trim.

E. Where new hinges are specified for new doors in existing frames or existing doors in new frames, sizes of new hinges shall match sizes of existing hinges; or, contractor may reuse existing hinges provided hinges are restored to satisfactory operating condition as approved by COTR. Existing hinges shall not be reused on door openings having new doors and new frames. Coordinate preparation for hinge cut-outs and screw-hole locations on doors and frames.

F. Hinges Required Per Door:

Doors 1500 mm (5 ft) or less in height	2 butts
Doors over 1500 mm (5 ft) high and not over 2280 mm (7 ft 6 in) high	3 butts
Doors over 2280 mm (7 feet 6 inches) high	4 butts
Dutch type doors	4 butts
Doors with spring hinges 1370 mm (4 feet 6 inches) high or less	2 butts
Doors with spring hinges over 1370 mm (4 feet 6 inches)	3 butts

G. Fastenings: Suitable size and type and shall harmonize with hardware as to material and finish. Provide machine screws and lead expansion shields to secure hardware to concrete, ceramic or quarry floor tile, or solid masonry. Fiber or rawl plugs and adhesives are not permitted. All fastenings exposed to weather shall be of nonferrous metal.

H. After locks have been installed; show in presence of COTR that keys operate their respective locks in accordance with keying requirements. (All keys, Master Key level and above shall be sent Registered Mail to the Medical Center Director along with the bitting list. Also a copy of

the invoice shall be sent to the COTR for his records.) Installation of locks which do not meet specified keying requirements shall be considered sufficient justification for rejection and replacement of all locks installed on project.

3.3 FINAL INSPECTION

A. Installer to provide letter to VA Resident/Project Engineer that upon completion, installer has visited the Project and has accomplished the following:

1. Re-adjust hardware.
2. Evaluate maintenance procedures and recommend changes or additions, and instruct VA personnel.
3. Identify items that have deteriorated or failed.
4. Submit written report identifying problems.

3.4 DEMONSTRATION

A. Demonstrate efficacy of mechanical hardware and electrical, and electronic hardware systems, including adjustment and maintenance procedures, to satisfaction of Resident/Project Engineer and VA Locksmith.

3.5 HARDWARE SETS

A. Manufacturer's Abbreviations:

1. MR - Markar
2. RO - Rockwood
3. YA - Yale
4. NO - Norton
5. PE - Pemko

Hardware Schedule

Set: 1.0

Doors: BG301

1 Threshold	2005AT	PE
1 Gasketing (R0E154)	S88D (Head & Jambs)	PE
2 Sweep	3452APK	PE

Notes: Existing doors, frames and hardware to be reused. Field verify specified products will work with existing doors.

Set: 2.0

Doors: BG401A, BG401B

2	Continuous Hinge (A156.26)	FM-300 MB x LAR	630	MR
2	Fire Exit Device SVR Passage	7110F CR628F	626	YA
2	Electromechanical Closer	P7705PTO	600 x 689	NO
2	Mop Plate (J102)	K1050 6" x 1" LDW 4BE CSK	US32D	RO
2	Kick Plate (J102)	K1050 10" x 1" LDW 4BE CSK	US32D	RO
2	Door Stop	442	US26D	RO
1	Gasketing (R0E154)	S88D (Head & Jambs)		PE
1	Astragal (R3E834)	S771C x Door Height		PE

Set: 3.0

Doors: 1G401A, 1G401B

2	Continuous Hinge (A156.26)	FM-300 MB x LAR	630	MR
2	Fire Rated SVR Exit Device	7110F EO	626	YA
2	Electromechanical Closer	P7705PTO DE	689	NO
2	Mop Plate (J102)	K1050 6" x 1" LDW 4BE CSK	US32D	RO
2	Kick Plate (J102)	K1050 10" x 1" LDW 4BE CSK	US32D	RO
2	Door Stop	442	US26D	RO
1	Gasketing (R0E154)	S88D (Head & Jambs)		PE
1	Astragal (R3E834)	S771C x Door Height		PE

Notes: Double egress

- - - E N D - - -

SECTION 08 71 13
AUTOMATIC DOOR OPERATORS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies equipment, controls and accessories for automatic operation of swing and sliding doors.

1.2 RELATED WORK

- A. Aluminum frames entrance work; Section 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS.
- B. Door hardware; Section 08 71 00, DOOR HARDWARE.
- C. Glass and glazing of doors and frames; Section 08 80 00, GLAZING.
- D. Electric general wiring, connections and equipment requirements; Division 26, ELECTRICAL.

1.3 QUALITY ASSURANCE

- A. Automatic door operators, controls and other equipment shall be products of a manufacturer regularly engaged in manufacturing such equipment for a minimum of three years.
- B. One type of automatic door equipment shall be used throughout the building.
- C. Equipment installer shall have specialized experience and shall be approved by the manufacturer.

1.4 WARRANTY

- A. Automatic door operators shall be subject to the terms of the "Warranty of Construction", FAR clause 52.246-21, except that the Warranty period shall be two years in lieu of one year.

1.5 MAINTENANCE MANUALS

- A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on automatic door operators.

1.6 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's literature and data describing operators, power units, controls, door hardware and safety devices.
- C. Shop Drawings:
 - 1. Showing location of controls and safety devices in relationship to each automatically operated door.

2. Showing layout, profiles, product components, including anchorage, accessories, as applicable.
 3. Submit templates, wiring diagrams, fabrication details and other information to coordinate the proper installation of the automatic door operators.
- D. Submit in writing to COTR that items listed in Article 1.3 are in compliance.

1.7 DESIGN CRITERIA

- A. As a minimum automatic door equipment shall comply with the requirements of BHMA 156.10. Except as otherwise noted on drawings, provide operators which will move the doors from the fully closed to fully opened position in five seconds maximum time interval, when speed adjustment is at maximum setting.
- B. Equipment: Conforming to UL 325. Provide key operated power disconnect wall switch for each door installation.
- C. Electrical Wiring, Connections and Equipment: Provide all motor, starter, controls, associated devices, and interconnecting wiring required for the installation. Equipment and wiring shall be as specified in Division 26, ELECTRICAL.

1.8 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Builders Hardware Manufacturers Association, Inc. (BHMA):
A156.10-05Power Operated Pedestrian Doors (BHMA 1601)
- C. National Fire Protection Association (NFPA):
101-09Life Safety Code
- D. Underwriters Laboratory (UL):
325-10Door, Drapery, Gate, Louver, and Window
Operators and Systems

1.9 DELIVERY AND STORAGE

- A. Delivery shall be in factory's original, unopened, undamaged container with identification labels attached.

PART 2 - PRODUCTS

2.1 SWING DOOR OPERATORS

- A. General: Swing door operators shall be of institutional type, door panel size 600 mm to 1250 mm (2'-0" to 5'-0") width, weight not to exceed 300 kg (600 pounds), electric operated for overhead mounting

within the header or transom. Furnish metal mounting supports, brackets and other accessories necessary for the installation of operators at the head of the door frames. The motor on automatic door operator shall be provided with an interlock so that the motor will not operate when doors are electrically locked from opening.

- B. Operators shall have checking mechanism providing cushioning action at last part of door travel, in both opening and closing cycle. Operators shall be capable of recycling doors instantaneously to full open position from any point in the closing cycle when control switch is activated. Operators shall, when automatic power is interrupted or shut-off, permit doors to easily open manually without damage to automatic operator system.
- C. Operator, enclosed in housing, shall open door by energizing motor and shall stop by electrically reducing voltage and stalling motor against mechanical stop. Door shall close by means of spring energy, and close force shall be controlled by gear system and motor being used as dynamic break without power, or controlled by hydraulic closer in electro-hydraulic operators. System shall operate as manual door control in event of power failure. Opening and closing speeds shall be adjustable:
 - 1. Operator Housing: Housing shall be a minimum of 112 mm (4-1/2 inches) wide by 140 mm (5.5 inches) high aluminum extrusions with enclosed end caps for application to 100 mm (4 inches) and larger frame systems. All structural sections shall have a minimum thickness of 3.2 mm (0.125 inch) and be fabricated of a minimum of 6063-T5 aluminum alloy.
 - 2. Power Operator: Completely assembled and sealed unit which shall include gear drive transmission, mechanical spring and bearings, all located in aluminum case and filled with special lubricant for extreme temperature conditions. Complete unit shall be rubber mounted with provisions for easy maintenance and replacement, without removing door from pivots or frame.
 - 3. Connecting hardware shall have drive arm attached to door with a pin linkage rotating in a self-lubricating bearing. Door shall not pivot on shaft of operator.
 - 4. Electrical Control: Operator shall have a self contained electrical control unit, including necessary transformers, relays, rectifiers, and other electronic components for proper operation and switching

of power operator. All connecting harnesses shall have interlocking plugs.

2.2 MICROPROCESSOR CONTROLS

- A. The system shall include a multi-function microprocessor control providing adjustable hold open time (1-30 seconds), LED indications for sensor input signals and operator status and power assist close options. Control shall be capable of receiving activation signals from any device with normally open dry contact output. All activation modes shall provide fully adjustable opening speed:
 - 1. With push-to-operate function enabled, the control shall provide a means of initiating a self-start activation circuit by slightly pushing the door open at any point in the door swing.
 - 2. Power assist shall provide a two second impulse in the close direction to overcome restrictions with locking devices of pressure differentials, allowing the unit to operate in standard time delay mode, and permitting the door to close from the full open position after the hold time is satisfied.
- B. The door shall be held open by low voltage applied to the continuous duty motor. The control shall include an adjustable safety circuit that monitors door operation and stops the opening direction of the door if an obstruction is sensed. The motor shall include a recycle feature that reopens the door if an obstruction is sensed at any point during the closing cycle. The control shall include a standard three position key switch with functions for ON, OFF, and HOLD OPEN, mounted on operator enclosure, door frame, or wall, as indicated in the architectural drawings.

2.3 POWER UNITS

- A. Each power unit shall be self-contained, electric operated and independent of the door operator. Capacity and size of power circuits shall be in accordance with automatic door operator manufacturer's specifications and Division 26 - ELECTRICAL.

2.4 DOOR CONTROLS

- A. Opening and closing actions of doors shall be actuated by controls and safety devices specified, and conform to ANSI 156.10. Controls shall cause doors to open instantly when control device is actuated; hold doors in open positions; then, cause doors to close, unless safety device or reactivated control interrupts operation.
- B. Manual Controls:

1. Push Plate Wall Switch: Recess type, stainless steel push plate minimum 100 mm by 100 mm (four-inch by four-inch), with 13 mm (1/2-inch) high letters "To Operate Door--Push" engraved on face of plate.

2.5 SAFETY DEVICES

- A. General: Area over which doors swing or slide shall be a safety section and anyone standing in path of door's movement shall be protected by a safety device.
- B. At sliding doors, provide two photoelectric beams mounted at heights of 600 mm (24 inches) and 1200 mm (48 inches) in the door frame on sliding doors. Provide overhead safety presence sensors at door head on each side of the opening. Beams shall parallel door openings to prevent doors from closing when anyone is in the center of the door or doors. When beams are activated, doors shall recycle to full open position. Actuation shall include a motion detector mounted on each side of the door for detection of traffic in each direction.
- C. Each swing door shall have installed on the pull side a presence sensor to detect any person standing in the door swing path and prevent the door from opening.
- D. Time delay switches shall be adjustable between 3 to 60 seconds and shall control closing cycle of doors.
- E. Decals with sign "In" or "Do Not Enter" shall be installed on both faces of each door where shown.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Coordinate installation of equipment with other related work. Manual controls and power disconnect switches shall be recessed or semi-flush mounted in partitions. Secure operator components to adjacent construction with suitable fastenings. Conceal conduits, piping, and electric equipment, in finish work.
- B. Install power units in locations shown. Where units are to be mounted on walls, provide metal supports or shelves for the units. All equipment, including time delay switches, shall be accessible for maintenance and adjustment.
- C. Operators shall be adjusted and must function properly for the type of traffic (pedestrians, carts, stretchers and wheelchairs) expected to pass through doors. Each door leaf of pairs of doors shall open and

close in synchronization. On pairs of doors, operators shall allow either door to be opened manually without the other door opening.

- D. Install controls at positions shown and make them convenient for particular traffic expected to pass through openings. Maximum height of push plate wall switches from finished floors shall be 40 inches unless otherwise approved by the COTR.

3.2 INSTRUCTIONS

- A. Following the installation and final adjustments of the door operators, the installer shall fully instruct VA personnel for 2 hours on the operating, servicing and safety requirements for the swing and sliding automatic door operators.
- B. Coordinate instruction to VA personnel with COTR.

- - - E N D - - -

SECTION 08 80 00
GLAZING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies glass, related glazing materials and accessories. Glazing products specified apply to factory or field glazed items.

1.2 RELATED WORK

- A. Factory glazed by manufacturer in following units:
1. Section 08 44 13, GLAZED ALUMINUM CURTAIN WALLS.

1.3 LABELS

A. Temporary labels:

1. Provide temporary label on each light of glass identifying manufacturer or brand and glass type, quality and nominal thickness.
2. Label in accordance with NFRC (National Fenestration Rating Council) label requirements.
3. Temporary labels shall remain intact until glass is approved by Contracting Officer's Technical Representative (COTR).

B. Permanent labels:

1. Locate in corner for each pane.
2. Label in accordance with ANSI Z97.1 and SGCC (Safety Glass Certification Council) label requirements.
 - a. Tempered glass.
3. Fire-Protection-Rated Glazing Labeling: Permanently mark fire-protection-rated glazing with certification label of a testing agency acceptable to Government. Label shall indicate manufacturer's name, test standard, whether glazing is for use in fire doors or other openings, whether or not glazing passes hose-stream test, whether or not glazing has a temperature rise rating of 450 deg F (250 deg C), and the fire-resistance rating in minutes.

1.4 PERFORMANCE REQUIREMENTS

A. Building Enclosure Vapor Retarder and Air Barrier:

1. Utilize the inner pane of multiple pane sealed units for the continuity of the air barrier and vapor retarder seal.
2. Maintain a continuous air barrier and vapor retarder throughout the glazed assembly from glass pane to heel bead of glazing sealant.

B. Glass Thickness:

1. Select thickness of exterior glass to withstand dead loads and wind loads acting normal to plane of glass at design pressures calculated in accordance with ASCE 7 code.
2. Test in accordance with ASTM E 1300.
3. Thicknesses listed are minimum. Coordinate thicknesses with framing system manufacturers.

1.5 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Certificates:
 1. Certificate on shading coefficient.
 2. Certificate on "R" value when value is specified.
- C. Warranty: Submit written guaranty, conforming to General Condition requirements, and to "Warranty of Construction" Article in this Section.
- D. Manufacturer's Literature and Data:
 1. Glass, each kind required.
 2. Insulating glass units.
 3. Glazing cushion.
 4. Sealing compound.
- E. Samples:
 1. Size: 150 mm by 150 mm (6 inches by 6 inches).
- F. Preconstruction Adhesion and Compatibility Test Report: Submit glazing sealant manufacturer's test report indicating glazing sealants were tested for adhesion to glass and glazing channel substrates and for compatibility with glass and other glazing materials.

1.6 DELIVERY, STORAGE AND HANDLING

- A. Delivery: Schedule delivery to coincide with glazing schedules so minimum handling of crates is required. Do not open crates except as required for inspection for shipping damage.
- B. Storage: Store cases according to printed instructions on case, in areas least subject to traffic or falling objects. Keep storage area clean and dry.
- C. Handling: Unpack cases following printed instructions on case. Stack individual windows on edge leaned slightly against upright supports with separators between each.
- D. Protect laminated security glazing units against face and edge damage during entire sequence of fabrication, handling, and delivery to

installation location. Provide protective covering on exposed faces of glazing plastics, and mark inside as "INTERIOR FACE" or "PROTECTED FACE":

1. Treat security glazing as fragile merchandise, and packaged and shipped in export wood cases with width end in upright position and blocked together in a mass. Storage and handling shall comply with Manufacturer's directions and as required to prevent edge damage or other damage to glazing resulting from effects of moisture, condensation, temperature changes, direct exposure to sun, other environmental conditions, and contact with chemical solvents.
2. Protect sealed-air-space insulating glazing units from exposure to abnormal pressure changes, as could result from substantial changes in altitude during delivery by air freight. Provide temporary breather tubes which do not nullify applicable warranties on hermetic seals.
3. Temporary protections: The glass front and polycarbonate back of glazing shall be temporarily protected with compatible, peelable, heat-resistant film which will be peeled for inspections and re-applied and finally removed after doors and windows are installed at destination. Since many adhesives will attack polycarbonate, the film used on exposed polycarbonate surfaces shall be approved and applied by manufacturer.
4. Edge protection: To cushion and protect glass clad, polycarbonate, and Noviflex edges from contamination or foreign matter, the four edges shall be sealed the depth of glazing with continuous standard-thickness Santoprene tape. Alternatively, continuous channel shaped extrusion of Santoprene shall be used, with flanges extending into face sides of glazing.
5. Protect "Constant Temperature" units including every unit where glass sheet is directly laminated to or directly sealed with metal-tube type spacer bar to polycarbonate sheet, from exposures to ambient temperatures outside the range of 16 to 24 C, during the fabricating, handling, shipping, storing, installation, and subsequent protection of glazing.

1.7 PROJECT CONDITIONS

- A. Field Measurements: Field measure openings before ordering tempered glass products. Be responsible for proper fit of field measured products.

1.8 WARRANTY

A. Warranty: Conform to terms of "Warranty of Construction", FAR clause 52.246-21, except extend warranty period for the following:

1. Insulating glass units to remain sealed for 10 years.

1.9 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.

B. American National Standards Institute (ANSI):

Z97.1-04Safety Glazing Material Used in Building -
Safety Performance Specifications and Methods
of Test.

C. American Society for Testing and Materials (ASTM):

C1363-05Thermal Performance of Building Assemblies, by
Means of A Hot Box Apparatus

C542-05Lock-Strip Gaskets.

C716-06Installing Lock-Strip Gaskets and Infill
Glazing Materials.

C794-06Adhesion-in-Peel of Elastomeric Joint Sealants.

C864-05Dense Elastomeric Compression Seal Gaskets,
Setting Blocks, and Spacers.

C920-08Elastomeric Joint Sealants.

C964-07Standard Guide for Lock-Strip Gasket Glazing.

C1036-06Flat Glass.

C1048-04Heat-Treated Flat Glass-Kind HS, Kind FT Coated
and Uncoated Glass.

C1172-09Laminated Architectural Flat Glass.

C1376-10Pyrolytic and Vacuum Deposition Coatings on
Flat Glass.

D635-06Rate of Burning and/or Extent and Time of
Burning of Self-Supporting Plastic in a
Horizontal Position.

D4802-02Poly (Methyl Methacrylate) Acrylic Plastic
Sheet.

E84-09Surface Burning Characteristics of Building
Materials.

E1300-09Determining Load Resistance of Glass in
Buildings.

E2190-08Insulating Glass Unit

D. Code of Federal Regulations (CFR):

16 CFR 1201 - Safety Standard for Architectural Glazing Materials;
1977, with 1984 Revision.

E. National Fenestration Rating Council (NFRC)

F. Safety Glazing Certification Council (SGCC)2009:

Certified Products Directory (Issued Semi-Annually).

G. Glass Association of North America (GANA):

Glazing Manual (Latest Edition)

Sealant Manual (2008)

H. American Society of Civil Engineers (ASCE):

ASCE 7-10Wind Load Provisions

PART 2 - PRODUCT

2.1 GLASS

A. Use thickness stated unless specified otherwise in assemblies.

B. Clear Glass:

1. ASTM C1036, Type I, Class 1, Quality q3.

2. Thickness, 6 mm (1/4 inch).

2.2 HEAT-TREATED GLASS

A. Clear Heat Strengthened Glass:

1. ASTM C1048, Kind HS, Condition A, Type I, Class 1, Quality q3.

2. Thickness, 6 mm (1/4 inch).

B. Clear Tempered Glass:

1. ASTM C1048, Kind FT, Condition A, Type I, Class 1, Quality q3.

2. Thickness, 6 mm (1/4 inch).

2.3 COATED GLASS

A. Low-E Tempered Glass:

1. ASTM C1048, Kind FT, Condition C, Type I, Class 1, Quality q3 with
low emissivity pyrolytic coating having an E of 0.15.

2. Apply coating to second surface of insulating glass units.

3. Thickness, as indicated.

B. Ceramic Coated Spandrel Glass:

1. ASTM C1048, Kind HS, Condition B, Type I, Class 1, Quality q3 with
ceramic coating applied over and fused into glass surface.

2. Apply coating to second surface.

4. Thickness, as indicated.

2.4 INSULATING GLASS UNITS

- A. Provide factory fabricated, hermetically sealed glass unit consisting of two panes of glass separated by a dehydrated air space and comply with ASTM E2190.
- B. Assemble units using glass types specified:
- C. Sealed Edge Units (SEU):
 - 1. Conform to ASTM E774, Class C performance requirements.
 - 2. Air Space not less than 13 mm (1/2 inch) wide.
 - 3. R value not less than 1.65.
- D. SEU Coated Glass:
 - 1. Exterior pane of Low-E coating on second surface, fully tempered safety glass, 6 mm (1/4 inch) thick.
 - 2. Interior pane of clear heat strengthened glass, 6 mm (1/4 inch) thick, except provide fully tempered safety glass, 6 mm (1/4 inch), as required by code.
- E. SEU Spandrel Glass:
 - 1. Exterior pane of ceramic coated spandrel glass, 6 mm (1/4 inch) thick.
 - 2. Interior pane of clear heat strengthened glass, 6 mm (1/4 inch) thick.

2.5 FIRE RESISTANT GLASS WITHOUT WIRE MESH

- A. Fire resistant glass or glass assembly classified by UL in Building Materials Directory or other approved testing laboratory bearing permanent mark of classification.
- B. Monolithic Ceramic Glazing: Clear, ceramic flat glass; 3/16-inch (5-mm) nominal thickness.
- C. Fire-Protection-Rated Tempered Glass: Fire-protection-rated tempered glass, complying with testing requirements in 16 CFR 1201 for Category II materials.

2.6 GLAZING ACCESSORIES

- A. As required to supplement the accessories provided with the items to be glazed and to provide a complete installation. Ferrous metal accessories exposed in the finished work shall have a finish that will not corrode or stain while in service.
- B. Setting Blocks: ASTM C864:
 - 1. Channel shape; having 6 mm (1/4 inch) internal depth.
 - 2. Shore a hardness of 80 to 90 Durometer.

3. Block lengths: 50 mm (two inches) except 100 to 150 mm (four to six inches) for insulating glass.
 4. Block width: Approximately 1.6 mm (1/16 inch) less than the full width of the rabbet.
 5. Block thickness: Minimum 4.8 mm (3/16 inch). Thickness sized for rabbet depth as required.
- C. Spacers: ASTM C864:
1. Channel shape having a 6 mm (1/4 inch) internal depth.
 2. Flanges not less 2.4 mm (3/32 inch) thick and web 3 mm (1/8 inch) thick.
 3. Lengths: One to 25 to 76 mm (one to three inches).
 4. Shore a hardness of 40 to 50 Durometer.
- D. Sealing Tapes:
1. Semi-solid polymeric based material exhibiting pressure-sensitive adhesion and withstanding exposure to sunlight, moisture, heat, cold, and aging.
 2. Shape, size and degree of softness and strength suitable for use in glazing application to prevent water infiltration.
- E. Glazing Gaskets: ASTM C864:
1. Firm dense wedge shape for locking in sash.
 2. Soft, closed cell with locking key for sash key.
 3. Flanges may terminate above the glazing-beads or terminate flush with top of beads.
- F. Lock-Strip Glazing Gaskets: ASTM C542, shape, size, and mounting as indicated.
- G. Glazing Sealants: ASTM C920, silicone neutral cure:
1. Type S.
 2. Class 25
 3. Grade NS.
 4. Shore A hardness of 25 to 30 Durometer.
- H. Structural Sealant: ASTM C920, silicone acetoxo cure:
1. Type S.
 2. Class 25.
 3. Grade NS.
 4. Shore a hardness of 25 to 30 Durometer.
- I. Neoprene, EPDM, or Vinyl Glazing Gasket: ASTM C864.
1. Channel shape; flanges may terminate above the glazing channel or flush with the top of the channel.

2. Designed for dry glazing.

J. Color:

1. Color of glazing compounds, gaskets, and sealants used for aluminum color frames shall match color of the finished aluminum and be nonstaining.
2. Color of other glazing compounds, gaskets, and sealants which will be exposed in the finished work and unpainted shall be black, gray, or neutral color.

K. Smoke Removal Unit Targets: Adhesive targets affixed to glass to identify glass units intended for removal for smoke control. Comply with requirements of local Fire Department.

PART 3 - EXECUTION

3.1 EXAMINATION

A. Verification of Conditions:

1. Examine openings for glass and glazing units; determine they are proper size; plumb; square; and level before installation is started.
2. Verify that glazing openings conform with details, dimensions and tolerances indicated on manufacturer's approved shop drawings.

B. Advise Contractor of conditions which may adversely affect glass and glazing unit installation, prior to commencement of installation: Do not proceed with installation until unsatisfactory conditions have been corrected.

C. Verify that wash down of adjacent masonry is completed prior to erection of glass and glazing units to prevent damage to glass and glazing units by cleaning materials.

3.2 PREPARATION

- A. For sealant glazing, prepare glazing surfaces in accordance with GANA-02 Sealant Manual.
- B. Determine glazing unit size and edge clearances by measuring the actual unit to receive the glazing.
- C. Shop fabricate and cut glass with smooth, straight edges of full size required by openings to provide GANA recommended edge clearances.
- D. Verify that components used are compatible.
- E. Clean and dry glazing surfaces.
- F. Prime surfaces scheduled to receive sealants, as determined by preconstruction sealant-substrate testing.

3.3 INSTALLATION - GENERAL

- A. Install in accordance with GANA-01 Glazing Manual and GANA-02 Sealant Manual unless specified otherwise.
- B. Glaze in accordance with recommendations of glazing and framing manufacturers, and as required to meet the Performance Test Requirements specified in other applicable sections of specifications.
- C. Set glazing without bending, twisting, or forcing of units.
- D. Do not allow glass to rest on or contact any framing member.
- E. Glaze doors and operable sash, in a securely fixed or closed and locked position, until sealant, glazing compound, or putty has thoroughly set.
- F. Tempered Glass: Install with roller distortions in horizontal position unless otherwise directed.
- G. Insulating Glass Units:
 - 1. Glaze in compliance with glass manufacturer's written instructions.
 - 2. When glazing gaskets are used, they shall be of sufficient size and depth to cover glass seal or metal channel frame completely.
 - 3. Do not use putty or glazing compounds.
 - 4. Do not grind, nip, cut, or otherwise alter edges and corners of fused glass units after shipping from factory.
 - 5. Install with tape or gunnable sealant in wood sash.
- H. Fire Resistant Glass:
 - 1. Other fire resistant glass: Glaze in accordance with UL design requirements.

3.4 INSTALLATION - DRY METHOD (TAPE AND GASKET SPLINE GLAZING)

- A. Cut glazing tape to length; install on glazing pane. Seal corners by butting and sealing junctions with butyl sealant.
- B. Place setting blocks at 1/4 points with edge block no more than 150 mm (6 inches) from corners.
- C. Rest glazing on setting blocks and push against fixed stop with sufficient pressure to attain full contact.
- D. Install removable stops without displacing glazing spline. Exert pressure for full continuous contact.
- E. Do not exceed edge pressures stipulated by glass manufacturers for installing glass lites.
- F. Trim protruding tape edge.

3.5 INSTALLATION - WET/DRY METHOD (PREFORMED TAPE AND SEALANT)

- A. Cut glazing tape to length and set against permanent stops, 5 mm (3/16 inch) below sight line. Seal corners by butting tape and dabbing with butyl sealant.
- B. Apply heel bead of butyl sealant along intersection of permanent stop with frame ensuring full perimeter seal between glass and frame to complete the continuity of the air and vapor seal.
- C. Place setting blocks at 1/4 points with edge block no more than 150 mm (6 inches) from corners.
- D. Rest glazing on setting blocks and push against tape and heel bead of sealant with sufficient pressure to achieve full contact at perimeter of pane or glass unit.
- E. Install removable stops, with spacer strips inserted between glazing and applied stops, 6 mm (1/4 inch) below sight line. Place glazing tape on glazing pane or unit with tape flush with sight line.
- F. Fill gap between glazing and stop with glazing sealant to depth equal to bite of frame on glazing, but not more than 9 mm (3/8 inch) below sight line.
- G. Apply cap bead of sealant along void between the stop and the glazing, to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

3.6 INSTALLATION - WET METHOD (SEALANT AND SEALANT)

- A. Place setting blocks at 1/4 points and install glazing pane or unit.
- B. Install removable stops with glazing centered in space by inserting spacer shims both sides at 600 mm (24 inch) intervals, 6 mm (1/4 inch) below sight line.
- C. Fill gaps between glazing and stops with _____ type sealant to depth of bite on glazing, but not more than 9 mm (3/8 inch) below sight line to ensure full contact with glazing and continue the air and vapor seal.
- D. Apply sealant to uniform line, flush with sight line. Tool or wipe sealant surface smooth.

3.7 INSTALLATION - EXTERIOR BUTT GLAZED METHOD (SEALANT ONLY)

- A. Temporarily brace glass in position for duration of glazing process. Mask edges of glass at adjoining glass edges and between glass edges and framing members.
- B. Temporarily secure a small diameter non-adhering foamed rod on back side of joint.

- C. Apply sealant to open side of joint in continuous operation; thoroughly fill the joint without displacing the foam rod. Tool the sealant surface smooth to concave profile.
- D. Permit sealant to cure then remove foam backer rod. Apply sealant to opposite side, tool smooth to concave profile.
- E. Remove masking tape.

3.8 REPLACEMENT AND CLEANING

- A. Clean new glass surfaces removing temporary labels, paint spots, and defacement after approval by Resident Engineer.
- B. Replace cracked, broken, and imperfect glass, or glass which has been installed improperly.
- C. Leave glass, putty, and other setting material in clean, whole, and acceptable condition.

3.9 PROTECTION

- A. Protect finished surfaces from damage during erection, and after completion of work. Strippable plastic coatings on colored anodized finish are not acceptable.

3.10 GLAZING SCHEDULE

- A. GL-1: Insulating Low-e Coated Glass Unit, Vision
- B. GL-2: Insulating Spandrel Glass Unit
- C. GL-3: Clear Tempered Glass at Interior Doors and Sidelites
- D. GL-4: Fire Resistant Glass without Wire Mesh

- - - E N D - - -

SECTION 08 90 00
LOUVERS AND VENTS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies fixed and operable wall louvers, and rooftop equipment screens.

1.2 RELATED WORK

- A. Section 05 12 00, STRUCTURAL METAL FRAMING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
1. Each type, showing material, finish, size of members, method of assembly, and installation and anchorage details.
- C. Manufacturer's Literature and Data:
1. Each type of louver and screen.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. The Master Painters Institute (MPI):
- Approved Product List - September 2011
- C. American Society for Testing and Materials (ASTM):
- A167-99(R2009)Stainless and Heat-Resisting Chromium - Nickel Steel Plate, Sheet, and Strip
- A1008/A1008M-10Steel, Sheet, Carbon, Cold Rolled, Structural, and High Strength Low-Alloy with Improved Formability
- B209/B209M-03(R2007) ...Aluminum and Aluminum Alloy, Sheet and Plate
- B221-08Aluminum and Aluminum Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
- B221M-07Aluminum and Aluminum Alloy Extruded Bars, Rods, Wire Shapes, and Tubes
- D. National Association of Architectural Metal Manufacturers (NAAMM):
- AMP 500-06Metal Finishes Manual
- E. National Fire Protection Association (NFPA):
- 90A-09Installation of Air Conditioning and Ventilating Systems
- F. American Architectural Manufacturers Association (AAMA):

2605-11High Performance Organic Coatings on
Architectural Extrusions and Panels

G. Air Movement and Control Association, Inc. (AMCA):

500-L-07Testing Louvers

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Aluminum, Extruded: ASTM B221/B221M.
- B. Stainless Steel: ASTM A167, Type 302B.
- C. Carbon Steel: ASTM A1008/A1008M.
- D. Aluminum, Plate and Sheet: ASTM B209/B209M.
- E. Fasteners: Fasteners for securing louvers to adjoining construction, except as otherwise specified or shown, shall be toggle or expansion bolts, of size and type as required for each specific type of installation and service condition.
 - 1. Where type, size, or spacing of fasteners is not shown or specified, submit shop drawings showing proposed fasteners, and method of installation.
 - 2. Fasteners for louvers, louver frames, and wire guards shall be of stainless steel or aluminum.
- F. Inorganic Zinc Primer: MPI No. 19.

2.2 EXTERIOR WALL LOUVERS

- A. General:
 - 1. Provide fixed type louvers of size and design shown.
 - 2. Heads, sills and jamb sections shall have formed caulking slots or be designed to retain caulking. Head sections shall have exterior drip lip, and sill sections an integral water stop.
 - 3. Furnish louvers with sill extension or separate sill as shown.
 - 4. Frame shall be mechanically fastened or welded construction with welds dressed smooth and flush.
- B. Performance Characteristics:
 - 1. Louvers shall bear AMCA certified rating seals for air performance and water penetration ratings.
- C. Aluminum Louvers:
 - 1. General: Frames, blades, sills and mullions (sliding interlocking type); 2 mm (0.081-inch) thick extruded aluminum. Blades shall be drainable type and have reinforcing bosses.
 - 2. Louvers, fixed: Make frame sizes 13 mm (1/2-inch) smaller than openings. Single louvers frames shall not exceed 1700 mm (66 inches)

wide. When openings exceed 1700 mm (66 inches), provide twin louvers separated by mullion members.

2.3 CLOSURE ANGLES AND CLOSURE PLATES

- A. Fabricate from 2 mm (0.074-inch) thick stainless steel or aluminum.
- B. Provide continuous closure angles and closure plates on inside head, jambs and sill of exterior wall louvers.
- C. Secure angles and plates to louver frames with screws, and to masonry or concrete with fasteners as specified.

2.4 WIRE GUARDS

- A. Provide wire guards on outside of all exterior louvers, except on exhaust air louvers.
- B. Fabricate frames from 2 mm (0.081-inch) thick extruded or sheet aluminum designed to retain wire mesh.
- C. Wire mesh shall be woven from not less than 1.6 mm (0.063-inch) diameter aluminum wire in 13 mm (1/2-inch) square mesh.
- D. Miter corners and join by concealed corner clips or locks extending about 57 mm (2-1/4 inches) into rails and stiles. Equip wire guards over four feet in height with a mid-rail constructed as specified for frame components.
- E. Fasten frames to outside of louvers with aluminum or stainless steel devices designed to allow removal and replacement without damage to the wire guard or the louver.

2.5 FINISH

- A. In accordance with NAAMM Metal Finishes Manual: AMP 500-505
- B. Aluminum Louvers:
 - 1. Organic Finish: AAMA 2605 (Fluorocarbon coating).

2.6 PROTECTION

- A. Provide protection for aluminum against galvanic action wherever dissimilar materials are in contact, by painting the contact surfaces of the dissimilar material with a heavy coat of bituminous paint (complete coverage), or by separating the contact surfaces with a performed synthetic rubber tape having pressure sensitive adhesive coating on one side.
- B. Isolate the aluminum from plaster, concrete and masonry by coating aluminum with zinc-chromate primer.
- C. Protect finished surfaces from damage during fabrication, erection, and after completion of the work. Strippable plastic coating on organic finish is not approved.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Set work accurately, in alignment and where shown. Items shall be plumb, level, free of rack and twist, and set parallel or perpendicular as required to line and plane of surface.
- B. Furnish setting drawings and instructions for installation of anchors and for the positioning of items having anchors to be built into masonry construction. Provide temporary bracing for such items until masonry is set.
- C. Provide anchoring devices and fasteners as shown and as necessary for securing louvers to building construction as specified. Power actuated drive pins may be used, except for removal items and where members would be deformed or substrate damaged by their use.
- D. Generally, set wall louvers in masonry walls during progress of the work. If wall louvers not delivered to job in time for installation in prepared openings, make provision for later installation. Set in cast-in-place concrete in prepared openings.

3.2 CLEANING AND ADJUSTING

- A. After installation, all exposed prefinished and plated items and all items fabricated from stainless steel and aluminum shall be cleaned as recommended by the manufacturer and protected from damage until completion of the project.
- B. All movable parts, including hardware, shall be cleaned and adjusted to operate as designed without binding or deformation of the members, so as to be centered in the opening of frame, and where applicable, to have all contact surfaces fit tight and even without forcing or warping the components

- - - E N D - - -

SECTION 09 22 16
NON-STRUCTURAL METAL FRAMING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies steel studs wall systems, shaft wall systems, ceiling or soffit suspended or furred framing, wall furring, fasteners, and accessories for the screw attachment of gypsum board.

1.2 RELATED WORK

- A. Load bearing framing: Section 05 40 00, COLD-FORMED METAL FRAMING.

1.3 TERMINOLOGY

- A. Description of terms shall be in accordance with ASTM C754, ASTM C11, ASTM C841 and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by beams, trusses, or bar joists. In interstitial spaces with walk-on floors the underside of the walk-on floor is the underside of structure overhead.
- C. Thickness of steel specified is the minimum bare (uncoated) steel thickness.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Studs, runners and accessories.
 - 2. Hanger inserts.
 - 3. Channels (Rolled steel).
 - 4. Furring channels.
 - 5. Screws, clips and other fasteners.
- C. Shop Drawings:
 - 1. Typical ceiling suspension system.
 - 2. Typical metal stud and furring construction system including details around openings and corner details.
 - 3. Typical shaft wall assembly
 - 4. Typical fire rated assembly and column fireproofing showing details of construction same as that used in fire rating test.
- D. Test Results: Fire rating test designation, each fire rating required for each assembly.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

- A. In accordance with the requirements of ASTM C754.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society For Testing And Materials (ASTM)
- A123-09Zinc (Hot-dip Galvanized) Coatings on Iron and Steel Products
 - A653/A653M-09Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy Coated (Galvannealed) by the Hot-Dip Process
 - A641-09Zinc-Coated (Galvanized) Carbon Steel Wire
 - C11-10Terminology Relating to Gypsum and Related Building Materials and Systems
 - C635-07Manufacture, Performance, and Testing of Metal Suspension System for Acoustical Tile and Lay-in Panel Ceilings
 - C636-06Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels
 - C645-09Non-Structural Steel Framing Members
 - C754-09Installation of Steel Framing Members to Receive Screw-Attached Gypsum Panel Products
 - C841-03(R2008)Installation of Interior Lathing and Furring
 - C954-07Steel Drill Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Steel Studs from 0.033 in. (0.84 mm) to 0.112 in. (2.84 mm) in Thickness
 - C1002-07Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
 - E580-09Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Moderate Seismic Restraint.

PART 2 - PRODUCTS

2.1 PROTECTIVE COATING

- A. Galvanize steel studs, runners (track), rigid (hat section) furring channels, "Z" shaped furring channels, and resilient furring channels, with coating designation of G-60 minimum, per ASTM 123.

2.2 STEEL STUDS AND RUNNERS (TRACK)

- A. ASTM C645, modified for thickness specified and sizes as shown.

1. Use ASTM A525 steel, 0.8 mm (0.0329-inch) thick bare metal (33 mil) minimum.
2. Runners same thickness as studs.
- B. Provide not less than two cutouts in web of each stud, approximately 300 mm (12 inches) from each end, and intermediate cutouts on approximately 600 mm (24-inch) centers.
- C. Doubled studs for openings and studs for supporting concrete backer-board.
- D. Studs 3600 mm (12 feet) or less in length shall be in one piece.
- E. Shaft Wall Framing:
 1. Conform to rated wall construction.
 2. C-H Studs.
 3. E Studs.
 4. J Runners.
 5. Steel Jamb-Strut.

2.3 FURRING CHANNELS

- A. Rigid furring channels (hat shape): ASTM C645.
- B. Resilient furring channels:
 1. Not less than 0.45 mm (0.0179-inch) thick bare metal.
 2. Semi-hat shape, only one flange for anchorage with channel web leg slotted on anchorage side, channel web leg on other side stiffens fastener surface but shall not contact anchorage surface other channel leg is attached to.
- C. "Z" Furring Channels:
 1. Not less than 0.45 mm (0.0179-inch)-thick bare metal, with 32 mm (1-1/4 inch) and 19 mm (3/4-inch) flanges.
 2. Web furring depth to suit thickness of insulation with slotted perforations.
- D. Rolled Steel Channels: ASTM C754, cold rolled; or, ASTM C841, cold rolled.

2.4 FASTENERS, CLIPS, AND OTHER METAL ACCESSORIES

- A. ASTM C754, except as otherwise specified.
- B. For fire rated construction: Type and size same as used in fire rating test.
- C. Fasteners for steel studs thicker than 0.84 mm (0.033-inch) thick. Use ASTM C954 steel drill screws of size and type recommended by the manufacturer of the material being fastened.

- D. Clips: ASTM C841 (paragraph 6.11), manufacturer's standard items. Clips used in lieu of tie wire shall have holding power equivalent to that provided by the tie wire for the specific application.
- E. Concrete ceiling hanger inserts (anchorage for hanger wire and hanger straps): Steel, zinc-coated (galvanized), manufacturers standard items, designed to support twice the hanger loads imposed and the type of hanger used.
- F. Tie Wire and Hanger Wire:
 - 1. ASTM A641, soft temper, Class 1 coating.
 - 2. Gage (diameter) as specified in ASTM C754 or ASTM C841.
- G. Attachments for Wall Furring:
 - 1. Manufacturers standard items fabricated from zinc-coated (galvanized) steel sheet.
 - 2. For concrete or masonry walls: Metal slots with adjustable inserts or adjustable wall furring brackets. Spacers may be fabricated from 1 mm (0.0396-inch) thick galvanized steel with corrugated edges.
- H. Power Actuated Fasteners: Type and size as recommended by the manufacturer of the material being fastened.

PART 3 - EXECUTION

3.1 INSTALLATION CRITERIA

- A. Where fire rated construction is required for walls, partitions, columns, beams and floor-ceiling assemblies, the construction shall be same as that used in fire rating test.
- B. Construction requirements for fire rated assemblies and materials shall be as shown and specified, the provisions of the Scope paragraph (1.2) of ASTM C754 and ASTM C841 regarding details of construction shall not apply.

3.2 INSTALLING STUDS

- A. Install studs in accordance with ASTM C754, except as otherwise shown or specified.
- B. Space studs not more than 610 mm (24 inches) on center.
- C. Cut studs 6 mm to 9 mm (1/4 to 3/8-inch) less than floor to underside of structure overhead when extended to underside of structure overhead.
- D. Where studs are shown to terminate above suspended ceilings, provide bracing as shown or extend studs to underside of structure overhead.
- E. Extend studs to underside of structure overhead for fire, rated partitions, smoke partitions, shafts, and sound rated partitions.
- F. Openings:

1. Frame jambs of openings in stud partitions and furring with two studs placed back to back or as shown.
2. Fasten back to back studs together with 9 mm (3/8-inch) long Type S pan head screws at not less than 600 mm (two feet) on center, staggered along webs.
3. Studs fastened flange to flange shall have splice plates on both sides approximately 50 X 75 mm (2 by 3 inches) screwed to each stud with two screws in each stud. Locate splice plates at 600 mm (24 inches) on center between runner tracks.

G. Fastening Studs:

1. Fasten studs located adjacent to partition intersections, corners and studs at jambs of openings to flange of runner tracks with two screws through each end of each stud and flange of runner.
2. Do not fasten studs to top runner track when studs extend to underside of structure overhead.

H. Chase Wall Partitions:

1. Locate cross braces for chase wall partitions to permit the installation of pipes, conduits, carriers and similar items.
2. Use studs or runners as cross bracing not less than 63 mm (2-1/2 inches wide).

I. Form building seismic or expansion joints with double studs back to back spaced 75 mm (three inches) apart plus the width of the seismic or expansion joint.

J. Form control joint, with double studs spaced 13 mm (1/2-inch) apart.

3.3 INSTALLING WALL FURRING FOR FINISH APPLIED TO ONE SIDE ONLY

A. In accordance with ASTM C754, or ASTM C841 except as otherwise specified or shown.

B. Wall furring-Stud System:

1. Framed with 63 mm (2-1/2 inch) or narrower studs, 600 mm (24 inches) on center.
2. Brace as specified in ASTM C754 for Wall Furring-Stud System or brace with sections or runners or studs placed horizontally at not less than three foot vertical intervals on side without finish.
3. Securely fasten braces to each stud with two Type S pan head screws at each bearing.

C. Direct attachment to masonry or concrete; rigid channels or "Z" channels:

1. Install rigid (hat section) furring channels at 600 mm (24 inches) on center, horizontally or vertically.

2. Install "Z" furring channels vertically spaced not more than 600 mm (24 inches) on center.
 3. At corners where rigid furring channels are positioned horizontally, provide mitered joints in furring channels.
 4. Ends of spliced furring channels shall be nested not less than 200 mm (8 inches).
 5. Fasten furring channels to walls with power-actuated drive pins or hardened steel concrete nails. Where channels are spliced, provide two fasteners in each flange.
 6. Locate furring channels at interior and exterior corners in accordance with wall finish material manufacturers printed erection instructions. Locate "Z" channels within 100 mm (4 inches) of corner.
- D. Installing Wall Furring-Bracket System: Space furring channels not more than 400 mm (16 inches) on center.

3.4 INSTALLING SUPPORTS REQUIRED BY OTHER TRADES

- A. Provide for attachment and support of electrical outlets, plumbing, laboratory or heating fixtures, recessed type plumbing fixture accessories, access panel frames, wall bumpers, wood seats, toilet stall partitions, dressing booth partitions, urinal screens, chalkboards, tackboards, wall-hung casework, handrail brackets, recessed fire extinguisher cabinets and other items like auto door buttons and auto door operators supported by stud construction.
- B. Provide additional studs where required. Install metal backing plates, or special metal shapes as required, securely fastened to metal studs.

3.5 INSTALLING SHAFT WALL SYSTEM

- A. Conform to UL Design No. U438 for two-hour fire rating. Provide one hour fire rating Shaft wall as indicated on Drawings.
- B. Position J runners at floor and ceiling with the short leg toward finish side of wall. Securely attach runners to structural supports with power driven fasteners at both ends and 600 mm (24 inches) on center.
- C. After liner panels have been erected, cut C-H studs and E studs, from 9 mm (3/8-inch) to not more than 13 mm (1/2-inch) less than floor-to-ceiling height. Install C-H studs between liner panels with liner panels inserted in the groove.
- D. Install full-length steel E studs over shaft wall line at intersections, corners, hinged door jambs, columns, and both sides of closure panels.
- E. Suitably frame all openings to maintain structural support for wall:
 1. Provide necessary liner fillers and shims to conform to label frame requirements.

2. Frame openings cut within a liner panel with E studs around perimeter.
3. Frame openings with vertical E studs at jambs, horizontal J runner at head and sill.

3.6 INSTALLING FURRED AND SUSPENDED CEILINGS OR SOFFITS

- A. Install furred and suspended ceilings or soffits in accordance with ASTM C754 or ASTM C841 except as otherwise specified or shown for screw attached gypsum board ceilings.
 1. Space framing at 600 mm (24-inch) centers for gypsum board anchorage.
- B. New exposed concrete slabs:
 1. Use metal inserts required for attachment and support of hangers or hanger wires with tied wire loops for embedding in concrete.
 2. Furnish for installation under Division 3, CONCRETE.
 3. Suspended ceilings under concrete rib construction shall have runner channels at right angles to ribs and be supported from ribs with hangers at ends and at 1200 mm (48-inch) maximum intervals along channels. Stagger hangers at alternate channels.
- C. Concrete slabs on steel decking composite construction:
 1. Use pull down tabs when available.
 2. Use power activated fasteners when direct attachment to structural framing can not be accomplished.
- D. Where bar joists or beams are more than 1200 mm (48 inches) apart, provide intermediate hangers so that spacing between supports does not exceed 1200 mm (48 inches). Use clips, bolts, or wire ties for direct attachment to steel framing.
- E. Existing concrete construction exposed or concrete on steel decking:
 1. Use power actuated fasteners either eye pin, threaded studs or drive pins for type of hanger attachment required.
 2. Install fasteners at approximate mid height of concrete beams or joists. Do not install in bottom of beams or joists.
- F. Steel decking without concrete topping:
 1. Do not fasten to steel decking 0.76 mm (0.0299-inch) or thinner.
 2. Toggle bolt to decking 0.9 mm (0.0359-inch) or thicker only where anchorage to steel framing is not possible.
- G. Installing suspended ceiling system for gypsum board (ASTM C635 Option):
 1. Install only for ceilings to receive screw attached gypsum board.
 2. Install in accordance with ASTM C636.
 - a. Install main runners spaced 1200 mm (48 inches) on center.

- b. Install 1200 mm (four foot) tees not over 600 mm (24 inches) on center; locate for edge support of gypsum board.
- c. Install wall track channel at perimeter.

3.7 TOLERANCES

- A. Fastening surface for application of subsequent materials shall not vary more than 3 mm (1/8-inch) from the layout line.
- B. Plumb and align vertical members within 3 mm (1/8-inch.)
- C. Level or align ceilings within 3 mm (1/8-inch.)

- - - E N D - - -

SECTION 09 29 00
GYPSUM BOARD

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies furnishing, installation and finishing of gypsum board for partitions, walls, and ceilings.

1.2 RELATED WORK

- A. Installation of steel framing members for walls, partitions, furring, soffits, and ceilings: Section 05 40 00, COLD-FORMED METAL FRAMING, and Section 09 22 16, NON-STRUCTURAL METAL FRAMING.
- B. Acoustical Sealants: Section 07 92 00, JOINT SEALANTS.

1.3 TERMINOLOGY

- A. Definitions and description of terms shall be in accordance with ASTM C11, C840, and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by the trusses or bar joists.
- C. "Yoked": Gypsum board cut out for opening with no joint at the opening (along door jamb or above the door).

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
1. Cornerbead and edge trim.
 2. Finishing materials.
 3. Laminating adhesive.
 4. Gypsum board, each type.
- C. Shop Drawings:
1. Typical gypsum board installation, showing corner details, edge trim details and the like.
 2. Typical shaft wall assembly.
 3. Typical fire rated assembly and column fireproofing, indicating details of construction same as that used in fire rating test.
- D. Samples:
1. Cornerbead.
 2. Edge trim.
 3. Control joints.
- E. Test Results:

1. Fire rating test, each fire rating required for each assembly.

1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE

- A. In accordance with the requirements of ASTM C840.

1.6 ENVIRONMENTAL CONDITIONS

- A. In accordance with the requirements of ASTM C840.

1.7 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing And Materials (ASTM):
 - C11-08Terminology Relating to Gypsum and Related Building Materials and Systems
 - C475-02Joint Compound and Joint Tape for Finishing Gypsum Board
 - C840-08Application and Finishing of Gypsum Board
 - C919-08Sealants in Acoustical Applications
 - C954-07Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Stud from 0.033 in. (0.84mm) to 0.112 in. (2.84mm) in thickness
 - C1002-07Steel Self-Piercing Tapping Screws for the Application of Gypsum Panel Products or Metal Plaster Bases to Wood Studs or Steel Studs
 - C1047-05Accessories for Gypsum Wallboard and Gypsum Veneer Base
 - C1177-06Glass Mat Gypsum Substrate for Use as Sheathing
 - C1658-06Glass Mat Gypsum Panels
 - C1396-06Gypsum Board
 - E84-08Surface Burning Characteristics of Building Materials
- C. Underwriters Laboratories Inc. (UL):
 - Latest EditionFire Resistance Directory
- D. Inchcape Testing Services (ITS):
 - Latest EditionsCertification Listings

PART 2 - PRODUCTS

2.1 GYPSUM BOARD

- A. Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick unless shown otherwise.

- B. Ceiling Gypsum Board: ASTM C1396, sag resistant, thickness as detailed on Drawings.
- C. Coreboard or Shaft Wall Liner Panels.
 - 1. ASTM C1396, Type X.
 - 2. ASTM C1658: Glass Mat Gypsum Panels,
 - 3. Coreboard for shaft walls 300, 400, 600 mm (12, 16, or 24 inches) wide by required lengths 25 mm (one inch) thick with paper faces treated to resist moisture.
- D. Gypsum cores shall contain a minimum of 95 percent post industrial recycled gypsum content. Paper facings shall contain 100 percent post-consumer recycled paper content.

2.2 ACCESSORIES

- A. Metal Trim: ASTM C1047, except form of 0.39 mm (0.015 inch) thick zinc coated steel sheet or rigid PVC plastic.
 - 1. Flanges not less than 22 mm (7/8 inch) wide with punchouts or deformations as required to provide compound bond.
 - 2. Include for cornerbeads and control joints; shape as applicable to locations.
- B. Reveals:
 - 1. Material: Extruded aluminum sections, 1.27mm (0.050 inch) nominal wall thickness; profile and dimensions as indicated on Drawings.
 - 2. Finish: Manufacturer's standard finish as applicable for field finishing.

2.3 FASTENERS

- A. ASTM C1002 and ASTM C840, except as otherwise specified.
- B. ASTM C954, for steel studs thicker than 0.04 mm (0.33 inch).
- C. Select screws of size and type recommended by the manufacturer of the material being fastened.
- D. For fire rated construction, type and size same as used in fire rating test.
- E. Clips: Zinc-coated (galvanized) steel; gypsum board manufacturer's standard items.

2.4 ACOUSTICAL INSULATION

- A. Fiberglass Insulation Batts: ASTM C665, Type 1, unfaced, non-combustible, maximum flame spread of 10, smoke development of 10, when tested in accordance with ASTM E84.
- B. Thickness as shown; of widths and lengths to fit tight against framing.

2.5 FINISHING MATERIALS AND LAMINATING ADHESIVE

- A. General: ASTM C475 and ASTM C840. Free of antifreeze, vinyl adhesives, preservatives, biocides and other VOC. Adhesive shall contain a maximum VOC content of 50 g/l.
- B. Joint Tape for Gypsum Board: Paper.
- C. Joint Compound:
 - 1. Prefilling: At open joints, rounded or beveled panel edges, and damaged surface areas, use setting-type taping compound.
 - 2. Embedding and First Coat: For embedding tape and first coat on joints, fasteners, and trim flanges, use setting-type taping compound.
 - 3. Fill Coat: For second coat, use setting-type, sandable topping compound.
 - 4. Finish Coat: For third coat, use setting-type, sandable topping compound.

PART 3 - EXECUTION

3.1 GYPSUM BOARD HEIGHTS

- A. Extend all layers of gypsum board from floor to underside of structure overhead on following partitions and furring:
 - 1. Two sides of partitions:
 - a. Fire rated partitions.
 - b. Smoke partitions.
 - c. Sound rated partitions.
 - d. Full height partitions shown (FHP).
 - 2. One side of partitions or furring:
 - a. Inside of exterior wall furring or stud construction.
 - b. Room side of room without suspended ceilings.
 - c. Furring for pipes and duct shafts, except where fire rated shaft wall construction is shown.
 - 3. Extend all layers of gypsum board construction used for fireproofing of columns from floor to underside of structure overhead, unless shown otherwise.
- B. In locations other than those specified, extend gypsum board from floor to heights as follows:
 - 1. Not less than 100 mm (4 inches) above suspended acoustical ceilings.
 - 2. At ceiling of suspended gypsum board ceilings.
 - 3. At existing ceilings.

3.2 INSTALLING GYPSUM BOARD

- A. Coordinate installation of gypsum board with other trades and related work.
- B. Install gypsum board in accordance with ASTM C840, except as otherwise specified.
- C. Use gypsum boards in maximum practical lengths to minimize number of end joints.
- D. Bring gypsum board into contact, but do not force into place.
- E. Ceilings:
 - 1. For single-ply construction, use perpendicular application.
 - 2. For two-ply assemblies:
 - a. Use perpendicular application.
 - b. Apply face ply of gypsum board so that joints of face ply do not occur at joints of base ply with joints over framing members.
- F. Walls (Except Shaft Walls):
 - 1. When gypsum board is installed parallel to framing members, space fasteners 300 mm (12 inches) on center in field of the board, and 200 mm (8 inches) on center along edges.
 - 2. When gypsum board is installed perpendicular to framing members, space fasteners 300 mm (12 inches) on center in field and along edges.
 - 3. Stagger screws on abutting edges or ends.
 - 4. For single-ply construction, apply gypsum board with long dimension either parallel or perpendicular to framing members as required to minimize number of joints except gypsum board shall be applied vertically over "Z" furring channels.
 - 5. For two-ply gypsum board assemblies, apply base ply of gypsum board to assure minimum number of joints in face layer. Apply face ply of wallboard to base ply so that joints of face ply do not occur at joints of base ply with joints over framing members.
 - 6. No offset in exposed face of walls and partitions will be permitted because of single-ply and two-ply or three-ply application requirements.
 - 7. Control Joints ASTM C840 and as follows:
 - a. Locate at both side jambs of openings if gypsum board is not "yoked". Use one system throughout.
 - b. Not required for wall lengths less than 9000 mm (30 feet).
 - c. Extend control joints the full height of the wall or length of soffit/ceiling membrane.

G. Fire and Smoke Partitions:

1. Cut gypsum board for a space approximately 3 mm to 6 mm (1/8 to 1/4 inch) wide around partition perimeter.
2. Coordinate for application of caulking or sealants to space prior to taping and finishing.

H. Electrical and Telecommunications Boxes:

1. Seal annular spaces between electrical and telecommunications receptacle boxes and gypsum board partitions.

I. Accessories:

1. Set accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified.
2. Install in one piece, without the limits of the longest commercially available lengths.
3. Corner Beads:
 - a. Install at all vertical and horizontal external corners and where shown.
 - b. Use screws only. Do not use crimping tool.
4. Edge Trim (Casings Beads):
 - a. At both sides of expansion and control joints unless shown otherwise.
 - b. Where gypsum board terminates against dissimilar materials and at perimeter of openings, except where covered by flanges, casings or permanently built-in equipment.
 - c. Where gypsum board surfaces of non-load bearing assemblies abut load bearing members.
 - d. Where shown.

3.3 CAVITY SHAFT WALL

- A. Coordinate assembly with Section 09 22 16, NON-STRUCTURAL METAL FRAMING, for erection of framing and gypsum board.
- B. Conform to UL Design No. U438 or FM WALL CONSTRUCTION 12-2/HR (Nonbearing for two-hour fire rating. Conform to FM WALL CONSTRUCTION 25-1/HR (Non-loadbearing) for one-hour fire rating where shown.
- C. Cut coreboard (liner) panels 25 mm (one inch) less than floor-to-ceiling height, and erect vertically between J-runners on shaft side.
 1. Where shaft walls exceed 4300 mm (14 feet) in height, position panel end joints within upper and lower third points of wall.
 2. Stagger joints top and bottom in adjacent panels.

D. Gypsum Board:

1. Two hour wall:

- a. Erect base layer (backing board) vertically on finish side of wall with end joints staggered. Fasten base layer panels to studs with 25 mm (one inch) long screws, spaced 600 mm (24 inches) on center.
- b. Use laminating adhesive between plies in accordance with UL or FM if required by fire test.
- c. Apply face layer of gypsum board required by fire test vertically over base layer with joints staggered and attach with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.

2. One hour wall with one layer on finish side of wall: Apply face layer of gypsum board vertically. Attach to studs with screws of sufficient length to secure to framing, spaced 300 mm (12 inches) on center in field and along edges.

3. Where coreboard is covered with face layer of gypsum board, stagger joints of face layer from those in the coreboard base.

E. Treat joints, corners, and fasteners in face layer as specified for finishing of gypsum board.

3.4 FINISHING OF GYPSUM BOARD

A. Finish joints, edges, corners, and fastener heads in accordance with ASTM C840. Use Level 4 finish for all finished areas open to public view.

B. Before proceeding with installation of finishing materials, assure the following:

1. Gypsum board is fastened and held close to framing or furring.
2. Fastening heads in gypsum board are slightly below surface in dimple formed by driving tool.

C. Finish joints, fasteners, and all openings, including openings around penetrations, on that part of the gypsum board extending above suspended ceilings to seal surface of non decorated fire rated gypsum board construction. After the installation of hanger rods, hanger wires, supports, equipment, conduits, piping and similar work, seal remaining openings and maintain the integrity of the fire rated construction. Sanding is not required of non decorated surfaces.

3.5 REPAIRS

A. After taping and finishing has been completed, and before decoration, repair all damaged and defective work, including nondecorated surfaces.

- B. Patch holes or openings 13 mm (1/2 inch) or less in diameter, or equivalent size, with a setting type finishing compound or patching plaster.
- C. Repair holes or openings over 13 mm (1/2 inch) diameter, or equivalent size, with 16 mm (5/8 inch) thick gypsum board secured in such a manner as to provide solid substrate equivalent to undamaged surface.
- D. Tape and refinish scratched, abraded or damaged finish surfaces including cracks and joints in non decorated surface to provide fire protection equivalent to the fire rated construction

- - - E N D - - -

**SECTION 09 51 00
ACOUSTICAL CEILINGS**

PART 1- GENERAL

1.1 DESCRIPTION

- A. Metal ceiling suspension system for acoustical ceilings.
- B. Acoustical units.

1.2 RELATED WORK

- A. Color, pattern, and location of each type of acoustical unit:
Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES.
- B. Access doors in adhesive applied tile: Section 08 31 13, ACCESS DOORS
AND FRAMES.

1.3 SUBMITTAL

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA,
AND SAMPLES.
- B. Samples:
 - 1. Acoustical units, each type, with label indicating conformance to
specification requirements.
 - 2. Colored markers for units providing access.
- C. Manufacturer's Literature and Data:
 - 1. Ceiling suspension system, each type, showing complete details of
installation.
 - 2. Acoustical units, each type
- D. Manufacturer's Certificates: Acoustical units, each type, in accordance
with specification requirements.

1.4 DEFINITIONS

- A. Standard definitions as defined in ASTM C634.
- B. Terminology as defined in ASTM E1264.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent
referenced. Publications are referenced in the text by basic
designation only.
- B. American Society for Testing and Materials (ASTM):
 - A641/A641M-03.....Zinc-coated (Galvanized) Carbon Steel Wire
 - A653/A653M-07.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-
Iron Alloy-coated (Galvannealed) by the Hot-Dip
Process

C423-07.....	Sound Absorption and Sound Absorption Coefficients by the Reverberation Room Method
C634-02 (E2007).....	Standard Terminology Relating to Environmental Acoustics
C635-04.....	Metal Suspension Systems for Acoustical Tile and Lay-in Panel Ceilings
C636-06.....	Installation of Metal Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels
E84-07.....	Surface Burning Characteristics of Building Materials
E119-07.....	Fire Tests of Building Construction and Materials
E413-04.....	Classification for Rating Sound Insulation.
E580-06.....	Application of Ceiling Suspension Systems for Acoustical Tile and Lay-in Panels in Areas Requiring Seismic Restraint
E1264-(R2005).....	Classification for Acoustical Ceiling Products

1.6 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
1. Acoustical Ceiling Panels: Full-size panels equal to 2 percent of quantity installed.
 2. Suspension-System Components: Quantity of each exposed component equal to 2 percent of quantity installed.
 3. Hold-Down Clips: Equal to 2 percent of quantity installed.
 4. Impact Clips: Equal to 2 percent of quantity installed.

PART 2- PRODUCTS

2.1 METAL SUSPENSION SYSTEM

- A. ASTM C635, heavy-duty system, except as otherwise specified.
1. Ceiling suspension system members may be fabricated from either of the following unless specified otherwise.
 - a. Galvanized cold-rolled steel, bonderized.
 - b. Extruded aluminum.
 - c. Fire resistant plastic (glass fiber) having a flame spread and smoke developed rating of not more than 25 when tested in accordance with ASTM E84.

2. Use same construction for cross runners as main runners. Use of lighter-duty sections for cross runners is not acceptable.

B. Exposed grid suspension system for support of lay-in panels:

1. Exposed grid width not less than 22 mm (7/8 inch) with not less than 8 mm (5/16 inch) panel bearing surface.
2. Fabricate wall molding and other special molding from the same material with same exposed width and finish as the exposed grid members.
3. On exposed metal surfaces apply baked-on enamel flat texture finish in color to match adjacent acoustical units unless specified otherwise in Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES.

2.2 PERIMETER SEAL

- A. Vinyl, polyethylene or polyurethane open cell sponge material having density of 1.3 plus or minus 10 percent, compression set less than 10 percent with pressure sensitive adhesive coating on one side.
- B. Thickness as required to fill voids between back of wall molding and finish wall.
- C. Not less than 9 mm (3/8 inch) wide strip.

2.3 WIRE

- A. ASTM A641.
- B. For wire hangers: Minimum diameter 2.68 mm (0.1055 inch).
- C. For bracing wires: Minimum diameter 3.43 mm (0.1350 inch).

2.4 ANCHORS AND INSERTS

- A. Use anchors or inserts to support twice the loads imposed by hangers attached thereto.
- B. Hanger Inserts:
 1. Fabricate inserts from steel, zinc-coated (galvanized after fabrication).
 2. Nailing type option for wood forms:
 - a. Upper portion designed for anchorage in concrete and positioning lower portion below surface of concrete approximately 25 mm (one inch).
 - b. Lower portion provided with not less than 8 mm (5/16 inch) hole to permit attachment of hangers.
 3. Flush ceiling insert type:

- a. Designed to provide a shell covered opening over a wire loop to permit attachment of hangers and keep concrete out of insert recess.
 - b. Insert opening inside shell approximately 16 mm (5/8 inch) wide by 9 mm (3/8 inch) high over top of wire.
 - c. Wire 5 mm (3/16 inch) diameter with length to provide positive hooked anchorage in concrete.
- C. Clips:
- 1. Galvanized steel.
 - 2. Designed to clamp to steel beam or bar joists, or secure framing member together.
 - 3. Designed to rigidly secure framing members together.
 - 4. Designed to sustain twice the loads imposed by hangers or items supported.
- D. Tile Splines: ASTM C635.

2.5 CARRYING CHANNELS FOR SECONDARY FRAMING

- A. Fabricate from cold-rolled or hot-rolled steel, black asphaltic paint finish, free of rust.
- B. Weighing not less than the following, per 300 m (per thousand linear feet):

Size mm	Size Inches	Cold-rolled		Hot-rolled	
		Kg	Pound	Kg	Pound
38	1 1/2	215.4	475	508	1120
50	2	267.6	590	571.5	1260

2.6 ADHESIVE

- A. ASTM D1779, having flame spread index of 25 or less when tested in accordance with ASTM E84.
- B. Developing minimum strength of 7 kg/m² (one psi) of contact surface 48 hours after installation in temperature of 21 °C (70 °F).

2.7 ACOUSTICAL UNITS

- A. General:
 - 1. Ceiling Tile shall meet minimum 37% bio-based content in accordance with USDA Bio-Preferred Product requirements.
 - 2. ASTM E1264, weighing 3.6 kg/m² (3/4 psf) minimum for mineral fiber panels or tile.
 - 3. Class A Flame Spread: ASTM 84
 - 4. Minimum NRC (Noise Reduction Coefficient): 0.55 unless specified otherwise: ASTM C423.

5. Minimum CAC (Ceiling Attenuation Class): 40-44 range unless specified otherwise: ASTM E413.
6. Lay-in panels: Sizes as shown, with edges as specified on Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES.
- B. Type III Units - Mineral base with water-based painted finish less than 10 g/l VOC, Form 2 - Water felted, minimum 16 mm (5/8 inch) thick. Mineral base to contain minimum 65 percent recycled content.
- C. Type IV Units - Mineral base with membrane-faced overlay, Form 2 - Water felted, minimum 16 mm (5/8 inch) thick. Apply over the paint coat on the face of the unit a poly (vinyl) chloride overspray having a flame spread index of 25 or less when tested in accordance with ASTM E84.

2.8 ACCESS IDENTIFICATION

- A. Markers:
 1. Use colored markers with pressure sensitive adhesive on one side.
 2. Make colored markers of paper or plastic, 6 to 9 mm (1/4 to 3/8 inch) in diameter.
- B. Use markers of the same diameter throughout building.
- C. Color Code: Use following color markers for service identification:

Color.....	Service
Red.....	Sprinkler System: Valves and Controls
Green.....	Domestic Water: Valves and Controls
Yellow.....	Chilled Water and Heating Water
Orange.....	Ductwork: Fire Dampers
Blue.....	Ductwork: Dampers and Controls
Black.....	Gas: Laboratory, Medical, Air and Vacuum

PART 3 EXECUTION

3.1 CEILING TREATMENT

- A. Treatment of ceilings shall include sides and soffits of ceiling beams, furred work 600 mm (24 inches) wide and over, and vertical surfaces at changes in ceiling heights unless otherwise shown. Install acoustic tiles after wet finishes have been installed and solvents have cured.
- B. Lay out acoustical units symmetrically about center lines of each room or space unless shown otherwise on reflected ceiling plan.
- C. Moldings:
 1. Install metal wall molding at perimeter of room, column, or edge at vertical surfaces.

2. Install special shaped molding at changes in ceiling heights and at other breaks in ceiling construction to support acoustical units and to conceal their edges.

D. Perimeter Seal:

1. Install perimeter seal between vertical leg of wall molding and finish wall, partition, and other vertical surfaces.
2. Install perimeter seal to finish flush with exposed faces of horizontal legs of wall molding.

3.2 CEILING SUSPENSION SYSTEM INSTALLATION

A. General:

1. Install metal suspension system for acoustical tile and lay-in panels in accordance with ASTM C636, except as specified otherwise.
2. Use direct or indirect hung suspension system or combination thereof as defined in ASTM C635.
3. Support a maximum area of 1.48 m² (16 sf) of ceiling per hanger.
4. Prevent deflection in excess of 1/360 of span of cross runner and main runner.
5. Provide extra hangers, minimum of one hanger at each corner of each item of mechanical, electrical and miscellaneous equipment supported by ceiling suspension system not having separate support or hangers.
6. Provide not less than 100 mm (4 inch) clearance from the exposed face of the acoustical units to the underside of ducts, pipe, conduit, secondary suspension channels, concrete beams or joists; and steel beam or bar joist unless furred system is shown,
7. Use main runners not less than 1200 mm (48 inches) in length.
8. Install hanger wires vertically. Angled wires are not acceptable except for seismic restraint bracing wires.

B. Anchorage to Structure:

1. Concrete:

- a. Install hanger inserts and wire loops required for support of hanger and bracing wire in concrete forms before concrete is placed. Install hanger wires with looped ends through steel deck if steel deck does not have attachment device.
- b. Use eye pins or threaded studs with screw-on eyes in existing or already placed concrete structures to support hanger and bracing wire. Install in sides of concrete beams or joists at mid height.

2. Steel:

- a. When steel framing does not permit installation of hanger wires at spacing required, install carrying channels for attachment of hanger wires.
 - (1) Size and space carrying channels to insure that the maximum deflection specified will not be exceeded.
 - (2) Attach hangers to steel carrying channels, spaced four feet on center, unless area supported or deflection exceeds the amount specified.
 - b. Attach carrying channels to the bottom flange of steel beams spaced not 1200 mm (4 feet) on center before fire proofing is installed. Weld or use steel clips to attach to beam to develop full strength of carrying channel.
 - c. Attach hangers to bottom chord of bar joists or to carrying channels installed between the bar joists when hanger spacing prevents anchorage to joist. Rest carrying channels on top of the bottom chord of the bar joists, and securely wire tie or clip to joist.
- B. Direct Hung Suspension System:
- 1. As illustrated in ASTM C635.
 - 2. Support main runners by hanger wires attached directly to the structure overhead.
 - 3. Maximum spacing of hangers, 1200 mm (4 feet) on centers unless interference occurs by mechanical systems. Use indirect hung suspension system where not possible to maintain hanger spacing.
- C. Indirect Hung Suspension System:
- 1. As illustrated in ASTM C635.
 - 2. Space carrying channels for indirect hung suspension system not more than 1200 mm (4 feet) on center. Space hangers for carrying channels not more than 2400 mm (8 feet) on center or for carrying channels less than 1200 mm (4 feet) on center so as to insure that specified requirements are not exceeded.
 - 3. Support main runners by specially designed clips attached to carrying channels.

3.3 ACOUSTICAL UNIT INSTALLATION

- A. Cut acoustic units for perimeter borders and penetrations to fit tight against penetration for joint not concealed by molding.
- B. Install lay-in acoustic panels in exposed grid with not less than 6 mm (1/4 inch) bearing at edges on supports.
 - 1. Install tile to lay level and in full contact with exposed grid.

2. Replace cracked, broken, stained, dirty, or tile not cut for minimum bearing.

C. Markers:

1. Install markers of color code specified to identify the various concealed piping, mechanical, and plumbing systems.
2. Attach colored markers to exposed grid on opposite sides of the units providing access.
3. Attach marker on exposed ceiling surface of upward access acoustical unit.

3.4 CLEAN-UP AND COMPLETION

- A. Replace damaged, discolored, dirty, cracked and broken acoustical units.
- B. Leave finished work free from defects.

- - - E N D - - -

**SECTION 09 65 13
RESILIENT BASE AND ACCESSORIES**

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the installation of vinyl or rubber base and resilient stair treads with sheet rubber flooring on landings.

1.2 RELATED WORK

- A. Color and texture: Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES.
- B. Integral base with sheet flooring: Section 09 65 16, RESILIENT SHEET FLOORING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Description of each product.
 - 2. Base and stair material manufacturer's recommendations for adhesives.
 - 3. Application and installation instructions.
- C. Samples:
 - 1. Base: 150 mm (6 inches) long, each type and color.
 - 2. Adhesive: Literature indicating each type.

1.4 DELIVERY

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Materials from containers which have been distorted, damaged or opened prior to installation will be rejected.

1.5 STORAGE

- A. Store materials in weather tight and dry storage facility.
- B. Protect material from damage by handling and construction operations before, during, and after installation.

1.6 APPLICABLE PUBLICATIONS

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM): F1861-08 Resilient Wall Base

- C. Federal Specifications (Fed. Spec.): RR-T-650E Treads, Metallic and Non-Metallic, Nonskid

1.7 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
1. Furnish not less than 10 linear feet (3 linear m) for every 500 linear feet (150 linear m) or fraction thereof, of each type, color, pattern, and size of resilient product installed.

PART 2 - PRODUCTS

2.1 GENERAL

Use only products by the same manufacturer and from the same production run.

2.2 RESILIENT BASE

- A. ASTM F1861, 3 mm (1/8 inch) thick, 100 mm (4 inches) high, Thermoplastics, Group 2-layered. Style B-cove.
- B. Use only one type of base throughout.

2.3 ADHESIVES

- A. Use products recommended by the material manufacturer for the conditions of use.
- B. Use low-VOC adhesive during installation. Water based adhesive with low VOC is preferred over solvent based adhesive.

PART 3 - EXECUTION

3.1 PROJECT CONDITIONS

- A. Maintain temperature of materials above 21° C (70 °F), for 48 hours before installation.
- B. Maintain temperature of rooms where work occurs, between 21° C and 27° C (70°F and 80°F) for at least 48 hours, before, during, and after installation.
- C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.

3.2 INSTALLATION REQUIREMENTS

- A. The respective manufacturer's instructions for application and installation will be considered for use when approved by the Resident Engineer.
- B. Submit proposed installation deviation from this specification to the Resident Engineer indicating the differences in the method of installation.

- C. The Resident Engineer reserves the right to have test portions of material installation removed to check for non-uniform adhesion and spotty adhesive coverage.

3.3 PREPARATION

- A. Examine surfaces on which material is to be installed.
- B. Fill cracks, pits, and dents with leveling compound.
- C. Level to 3 mm (1/8 inch) maximum variations.
- D. Do not use adhesive for leveling or filling.
- E. Grind, sand, or cut away protrusions; grind high spots.
- F. Clean substrate area of oil, grease, dust, paint, and deleterious substances.
- G. Substrate area dry and cured. Perform manufacturer's recommended bond and moisture test.

3.4 BASE INSTALLATION

- A. Location:
 - 1. Unless otherwise specified or shown, where base is scheduled, install base over toe space of base of casework, lockers, laboratory, pharmacy furniture island cabinets and where other equipment occurs.
 - 2. Extend base scheduled for room into adjacent closet, alcoves, and around columns.
- B. Application:
 - 1. Apply adhesive uniformly with no bare spots.
 - 2. Set base with joints aligned and butted to touch for entire height.
 - 3. Before starting installation, layout base material to provide the minimum number of joints with no strip less than 600 mm (24 inches) length.
 - a. Short pieces to save material will not be permitted.
 - b. Locate joints as remote from corners as the material lengths or the wall configuration will permit.
- C. Form corners and end stops as follows:
 - 1. Score back of outside corner.
 - 2. Score face of inside corner and notch cove.
- D. Roll base for complete adhesion.

3.5 CLEANING AND PROTECTION

- A. Clean all exposed surfaces of base and adjoining areas of adhesive spatter before it sets.
- B. Clean and polish materials in the following order:

1. After two weeks, scrub resilient base with a minimum amount of water and a mild detergent. Leave surfaces clean and free of detergent residue. Polish resilient base to a gloss finish.
- D. When construction traffic is anticipated, cover tread materials with reinforced kraft paper and plywood or hardboard properly secured and maintained until removal is directed by the Resident Engineer.
- E. Where protective materials are removed and immediately prior to acceptance, replace damaged materials and re-clean resilient materials. Damaged materials are defined as having cuts, gouges, scrapes or tears and not fully adhered.

- - - E N D - - -

**SECTION 09 65 16
RESILIENT SHEET FLOORING**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This Section specifies the installation of sheet flooring with backing.
- B. Installation of sheet flooring including following:
 - 1. Heat welded seams.

1.2 RELATED WORK

- A. Concrete floors: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- B. Color, pattern and texture: Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES.

1.3 QUALITY CONTROL-QUALIFICATIONS:

- A. The Contracting Officer shall approve products or service of proposed manufacturer, suppliers, and installers, and the Contractor shall submit certification that:
 - 1. Heat welded seaming is manufacturer's prescribed method of installation.
 - 2. Installer is approved by manufacturer of materials and has technical qualifications, experience, trained personnel, and facilities to install specified items.
 - 3. Manufacturer's product submitted has been in satisfactory operation, on three installations similar and equivalent in size to this project for three years. Submit list of installations.
- B. The floor covering manufacturer shall certify that products supplied for installation comply with local regulations controlling use of volatile organic compounds (VOC's).

1.4 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, submit following:
- B. Manufacturer's Literature and Data:
 - 1. Description of resilient material and accessories to be provided.
 - 2. Resilient material manufacturer's recommendations for adhesives, weld rods, sealants, and underlayment.
 - 3. Application and installation instructions.
- C. Samples:
 - 1. Sheet material, 38 mm by 300 mm (1-1/2 inch by 12 inch), of each color and pattern with a welded seam using proposed welding rod 300 mm (12 inches) square for each type, pattern and color.

2. Shop Drawings and Certificates: Layout of joints showing patterns where joints are expressed, and type and location of obscure type joints. Indicate orientation of directional patterns.
3. Certificates: Quality Control Certificate Submittals and lists specified in paragraph, QUALIFICATIONS.
4. Edge strips: 150 mm (6 inches) long each type.
5. Adhesive, underlayment and primer: Pint container, each type.

1.5 PROJECT CONDITIONS

- A. Maintain temperature of floor materials and room, where work occurs, above 18 ° C (65 °F) and below 38 °C (100 °F) for 48 hours before, during and for 48 hours after installation. After above period, room temperature shall not fall below 13 °C (55 °F).
- B. Construction in or near areas to receive flooring work shall be complete, dry and cured. Do not install resilient flooring over slabs until they have been cured and are sufficiently dry to achieve a bond with adhesive. Follow flooring manufacturer's recommendations for bond and moisture testing.
- C. Building shall be permanently enclosed. Schedule construction so that floor receives no construction traffic when completed.

1.6 DELIVERY, STORAGE AND HANDLING

- A. Deliver materials to site in original sealed packages or containers; labeled for identification with manufacturer's name and brand.
- B. Deliver sheet flooring full width roll, completely enclosed in factory wrap, clearly marked with the manufacturer's number, type and color, production run number and manufacture date.
- C. Store materials in weathertight and dry storage facility. Protect from damage due to handling, weather, and construction operations before, during and after installation. Store sheet flooring on end with ambient temperatures maintained as recommended by manufacturer.
- D. Store sheet flooring on end.
- E. Move resilient sheet floor coverings and installation accessories into spaces where they will be installed at least 48 hours in advance of installation.

1.7 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society For Testing Materials (ASTM):
E648-09.....Critical Radiant Flux of Floor-Covering Systems
Using a Radiant Energy Source.

E662-09.....Specific Optical Density of Smoke Generated by
Solid Materials.

F710-08.....Practice for Preparing Concrete Floors and Other
Monolithic Floors to Receive Resilient Flooring.

F1869-04.....Moisture Vapor Emission Rate of Concrete
Subfloor using Anhydrous Calcium Chloride

F2170-09.....Determining Relative Humidity in Concrete Floor
Slabs using In-situ Probes

C. Resilient Floor Covering Institute (RFCI):

Recommended Work Practices for Removal of Resilient Floor Coverings.

1.8 SCHEDULING

Interior finish work such as plastering, drywall finishing, concrete, ceiling work, and painting work shall be complete and dry before installation. Mechanical, electrical, and other work above ceiling line shall be completed. Heating, ventilating, and air conditioning systems shall be installed and operating in order to maintain temperature and humidity requirements.

1.9 WARRANTY:

Submit written warranty, in accordance with FAR clause 52.246-21, Warranty of Construction requirements except that warranty period shall be extended to include two (2) years.

PART 2 - PRODUCT

2.1 WELDING ROD:

Product of floor covering manufacturer in color shall match field color of sheet vinyl covering.

2.2 APPLICATION MATERIALS AND ACCESSORIES

A. Floor and Base Adhesive: Type recommended by sheet flooring material manufacturer for conditions of use.

B. Mastic Underlayment (for concrete floors): Provide products with latex or polyvinyl acetate resins in mix. Condition to be corrected shall determine type of underlayment selected for use.

2.3 SHEET FLOORING

A. ASTM F1303, Type II, Grade 1, except for backing requirements. Foam backed sheet flooring is not acceptable.

B. Minimum nominal thickness 2 mm (0.08 inch); 1800 mm (6 ft) minimum width.

C. Critical Radiant Flux: 0.45 watts per sq.cm or more, Class I, per ASTM E648.

D. Smoke density: less than 450 per ASTM E662.

E. Color and pattern of sheet flooring of the same production run.

2.4 ADHESIVES

Water resistant type recommended by the sheet flooring manufacturer for the conditions of use. VOC not to exceed 50g/L

2.5 LEVELING COMPOUND (FOR CONCRETE FLOORS)

Provide cementitious products with latex or polyvinyl acetate resins in the mix.

2.6 PRIMER (FOR CONCRETE SUBFLOORS)

As recommended by the adhesive or sheet flooring manufacturer.

2.7 EDGE STRIPS

- A. Extruded aluminum, mill finish, mechanically cleaned.
- B. 28 mm (1-1/8 inch) wide, 6 mm (1/4 inch) thick, bevel one edge to 3 mm (1/8 inch) thick.
- C. Drill and counter sink edge strips for flat head screws. Space holes near ends and approximately 225 mm (9 inches) on center in between.

2.8 SEALANT

- A. As specified in Section 07 92 00, JOINT SEALANTS.
- B. Compatible with sheet flooring.

PART 3 - EXECUTION

3.1 PROJECT CONDITIONS

- A. Maintain temperature of sheet flooring above 36 °C (65 °F), for 48 hours before installation.
- B. Maintain temperature of rooms where sheet flooring work occurs above 36 °C (65 °F), for 48 hours, before installation and during installation.
- C. After installation, maintain temperature at or above 36 °C (65 °F.)
- D. Building is permanently enclosed.
- E. Wet construction in or near areas to receive sheet flooring is complete, dry and cured.

3.2 SUBFLOOR PREPARATION

- A. Concrete Subfloors: Verify that concrete slabs comply with ASTM F710.
 - 1. Installer shall examine surfaces on which resilient sheet flooring is to be installed, and shall advise Contractor, in writing, of areas which are unacceptable for installation of flooring material. Installer shall advise Contractor which methods are to be used to correct conditions that will impair proper installation. Installation shall not proceed until unsatisfactory conditions have been corrected.

2. Slab substrates dry, free of curing compounds, sealers, hardeners, and other materials which would interfere with bonding of adhesive. Determine adhesion and dryness characteristics by performing bond and moisture tests recommended by Resilient Floor Covering Institute recommendations in manual RFCI-MRP.
- B. Broom or vacuum clean substrates to be covered by resilient sheet floor coverings immediately before installation. Following cleaning, examine substrates to determine if there is visually any evidence of moisture, alkaline salts, carbonation, or dust.
- C. Primer: If recommended by flooring manufacturer, prior to application of adhesive, apply concrete slab primer in accordance with manufacturer's directions.
- D. Correct conditions which will impair proper installation, including trowel marks, pits, dents, protrusions, cracks or joints.
- E. Fill cracks, joints, depressions, and other irregularities in concrete with leveling compound.
 1. Do not use adhesive for filling or leveling purposes.
 2. Do not use leveling compound to correct imperfections which can be corrected by spot grinding.
 3. Trowel to smooth surface free of trowel marks, pits, dents, protrusions, cracks or joint lines.
- F. Clean floor of oil, paint, dust and deleterious substances. Leave floor dry and cured free of residue from existing curing or cleaning agents.
- G. Moisture Testing: Perform moisture and pH test as recommended by the flooring and adhesive manufacturers. Perform test locations starting on the deepest part of the concrete structure. Proceed with installation only after concrete substrates meet or exceed the manufacturer's requirements. In the absence of specific guidance from the flooring or adhesive manufacturer the following requirements are to be met:
 1. Perform moisture vapor emission tests in accordance with ASTM F1869. Proceed with installation only after substrates have a maximum moisture-vapor-emission rate of 1.36 kg of water/92.9 sq. m (3lb of water/1000 sq. ft.) in 24 hours.
 2. Perform concrete internal relative humidity testing using situ probes in accordance with ASTM F2170. Proceed with installation only after concrete reaches maximum 75 percent relative humidity level measurement.

3.3 INSTALLATION OF FLOORING

- A. Install work in strict compliance with manufacturer's instructions and approved layout drawings.

- B. Maintain uniformity of resilient sheet floor covering direction and avoid cross seams.
- C. Arrange for a minimum number of seams and place them in inconspicuous and low traffic areas, but in no case less than 150 mm (6 inches) away from parallel joints in flooring substrates.
- D. Match edges of resilient floor coverings for color shading and pattern at seams.
- E. Where resilient sheet flooring abuts other flooring material floors shall finish level.
- F. Extend resilient sheet floor coverings into toe spaces, door reveals, closets, and similar openings.
- G. Inform the Resident Engineer of conflicts between this section and the manufacturer's instructions or recommendations for auxiliary materials, or installation methods, before proceeding.
- H. Install sheet in full coverage adhesives.
 - 1. Air pockets or loose edges will not be accepted.
 - 2. Trim sheet materials to touch in the length of intersection at pipes and vertical projections; seal joints at pipe with waterproof cement or sealant.
- I. Keep joints to a minimum; avoid small filler pieces or strips.
- J. Follow manufacturer's recommendations for seams at butt joints. Do not leave any open joints that would be readily visible from a standing position.
- K. Follow manufacturer's recommendations regarding pattern match, if applicable.
- L. Installation of Edge Strips:
 - 1. Locate edge strips under center lines of doors unless otherwise indicated.
 - 2. Set aluminum strips in adhesive, anchor with lead anchors and stainless steel Phillips screws.

3.4 WELDING

- A. Heat weld all joints of flooring and base using equipment and procedures recommended by flooring manufacturer.
- B. Welding shall consist of routing joint, inserting a welding rod into routed space, and terminally fusing into a homogeneous joint.
- C. Upon completion of welding, surface across joint shall finish flush, free from voids, and recessed or raised areas.
- D. Fusion of Material: Joint shall be fused a minimum of 65 percent through thickness of material, and after welding shall meet specified characteristics for flooring.

3.6 CLEANING

- A. Clean small adhesive marks during application of sheet flooring and base before adhesive sets, excessive adhesive smearing will not be accepted.
- B. Remove visible adhesive and other surface blemishes using methods and cleaner recommended by floor covering manufacturers.
- C. Clean and polish materials per flooring manufacturer's written recommendations.
- D. Vacuum floor thoroughly.
- E. Do not wash floor until after period recommended by floor covering manufacturer and then prepare in accordance with manufacturer's recommendations.
- F. Upon completion, Resident Engineer shall inspect floor and base to ascertain that work was done in accordance with manufacturer's printed instructions.
- G. Perform initial maintenance according to flooring manufacturer's written recommendations.

3.7 PROTECTION:

- A. Protect installed flooring as recommended by flooring manufacturer against damage from rolling loads, other trades, or placement of fixtures and furnishings.
- B. Keep traffic off sheet flooring for 24 hours after installation.
- C. Where construction traffic is anticipated, cover sheet flooring with reinforced kraft paper properly secured and maintained until removal is authorized by the Resident Engineer.
- D. Where protective materials are removed and immediately prior to acceptance, repair any damage, re-clean sheet flooring, lightly re-apply polish and buff floor.

- - - E N D - - -

SECTION 09 67 23.30
RESIN (EPOXY RESIN COMPOSITION) MORTAR FLOORING (RES-3)

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies a seamless resinous (epoxy resin composition) and aliphatic poly urethane sealer, flooring systems with integral cove base.

1.2 RELATED WORK

- A. Concrete and Moisture Vapor Barrier: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- B. Color and location of each type of resinous (epoxy resin composition) flooring: Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES.
- C. Floor Drains: Division 22, PLUMBING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Description of each product to be provided.
 - 2. Application and installation instructions.
 - 3. Maintenance Instructions: Submit manufacturer's written instructions for recommended maintenance practices.
- C. Qualification Data: For Installer.
- D. Sustainable Submittal:
 - 1. Product data for products having recycled content, submit documentation indicating percentages by weight of postconsumer and pre consumer recycled content.
 - a. Include statements indicating costs for each product having recycled content, and low emitting materials.
 - 2. Product data for Environmental Quality Credit EQ 4.2 low emitting materials, include printed statement of VOC content indicating compliance with environmental requirements.
 - 3. Product data for Material Resource Credit MR 4.1, 12%-35% post-consumer recycled glass content.
- E. Samples:
 - 1. Each color and texture specified in Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES.
 - 2. Samples for verification: For each (color and texture) resinous flooring system required, 6 inches (152 mm) square, applied to a rigid backing by installer for this project.

3. Sample showing construction from substrate to finish surface in thickness specified and color and texture of finished surfaces. Finished flooring must match the approved samples in color and texture.
- F. Shop Drawings: Include plans, sections, component details, and attachment to other trades. Indicate layout of the following:
1. Patterns.
 2. Edge configuration.
- G. Certifications and Approvals:
1. Manufacturer's certification of material and substrate compliance with specification.
 2. Manufacturer's approval of installer.
 3. Contractor's certificate of compliance with Quality Assurance requirements.
- H. Warranty: As specified in this section.

1.4 QUALITY ASSURANCE

- A. Manufacture Certificate: Manufacture shall certify that a particular resinous flooring system has been in use for a minimum of (5) five years.
- B. Installer Qualifications: Engage an experienced installer (applicator) who is experienced in applying resinous flooring systems similar in material, design, and extent to those indicated for this project for a minimum period of (5) five years, whose work has resulted in applications with a record of successful in-service performance, and who is acceptable to resinous flooring manufacturer.
1. Engage an installer who is certified in writing by resinous flooring manufacturer as qualified to apply resinous flooring systems indicated.
 2. Contractor shall have completed at least (5) five projects of similar size and complexity. Include list of at least (5) five projects. List must include owner (purchaser); address of installation, contact information at installation project site; and date of installation.
 3. Installer's Personnel: Employ persons trained for application of specified product.
- C. Source Limitations:
1. Obtain primary resinous flooring materials including primers, resins, hardening agents, grouting coats and finish or sealing coats from a single manufacturer.

2. Provide secondary materials, including patching and fill material, joint sealant, and repair material of type and from source recommended by manufacturer of primary materials.
- D. Pre-Installation Conference:
1. Convene a meeting not less than thirty days prior to starting work.
 2. Attendance:
 - a. Contractor
 - b. VA Resident Engineer
 - c. Manufacturer and Installer's Representative
 3. Review the following:
 - a. Environmental requirements
 - 1) Air and surface temperature
 - 2) Relative humidity
 - 3) Ventilation
 - 4) Dust and contaminants
 - b. Protection of surfaces not scheduled to be coated
 - c. Inspect and discuss condition of substrate and other preparatory work performed
 - d. Review and verify availability of material; installer's personnel, equipment needed
 - e. Design, pattern and edge conditions.
 - f. Performance of the coating with chemicals anticipated in the area receiving the resinous (epoxy resin composition) flooring system
 - g. Application and repair
 - h. Field quality control
 - i. Cleaning
 - j. Protection of coating systems
 - k. One-year inspection and maintenance
 - l. Coordination with other work
- E. Manufacturer's Field Services: Manufacturer's representative shall provide technical assistance and guidance for surface preparation and application of resinous flooring systems.
- F. Contractor Job Site Log: Contractor shall document daily; the work accomplished environmental conditions and any other condition event significant to the long term performance of the resinous flooring systems installation. The Contractor shall maintain these records for one year after Substantial Completion.

1.5 MATERIAL PACKAGING DELIVERY AND STORAGE

- A. Deliver materials to the site in original sealed packages or containers, clearly marked with the manufacturer's name or brand, type and color, production run number and date of manufacture.
- B. Protect materials from damage and contamination in storage or delivery, including moisture, heat, cold, direct sunlight, etc.
- C. Maintain temperature of storage area between 60 and 80 degrees F (15 and 26 degrees C).
- D. Keep containers sealed until ready for use.
- E. Do not use materials beyond manufacturer's shelf life limits.
- F. Package materials in factory pre-weighed and in single, easy to manage batches sized for ease of handling and mixing proportions from entire package or packages. No On site weighing or volumetric measurements are allowed

1.6 PROJECT CONDITIONS

- A. Environmental Limitations: Comply with resinous flooring manufacturer's written instructions for substrate temperature, ambient temperature, moisture, ventilation, and other conditions affecting resinous flooring applications.
 - 1. Maintain material and substrate temperature between 65 and 85 degrees F (18 and 30 degrees C) during resinous flooring application and for not less than 24 hours after application.
- B. Lighting: Provide permanent lighting or, if permanent lighting is not in place, simulate permanent lighting conditions during resinous flooring application.
- C. Close spaces to traffic during resinous flooring application and for not less than 24 hours after application, unless manufacturer recommends a longer period.
- D. Concrete substrate shall be properly cured for a minimum of 30 days. A vapor barrier must be present for concrete subfloors on or below grade. Otherwise, an osmotic pressure resistant grout must be installed prior to the resinous flooring.

1.7 WARRANTY

- A. Work subject to the terms of the Article "Warranty of Construction" FAR clause 52.246-21.
- B. Warranty: Manufacture shall furnish a single, written warranty covering the full assembly for both material and workmanship for a extended period of (3) full years from date of installation, or provide a joint and several warranty signed on a single document by manufacturer and applicator jointly and severally warranting the materials and

workmanship for a period of (3) full years from date of installation. A sample warranty letter must be included with bid package or bid may be disqualified.

1.8 APPLICABLE PUBLICATIONS

- A. The publication listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
- B221-08.....Standard Specification for Aluminum and
Aluminum-Alloy, Extruded Bars, Rods, Wire,
Profiles and Tubes.
 - C307-03 (2008).....Standard Test Method for Tensile Strength of
Chemical-Resistant Mortar, Grouts, and
Monolithic Surfacing
 - C413-01(2006).....Standard Test Method for Absorption of Chemical-
Resistant Mortars, Grouts, Monolithic Surfacing
and Polymer Concretes
 - C531-00(R2005).....Standard Test Method for Linear Shrinkage and
Coefficient of Thermal Expansion of Chemical-
Resistant Mortars, Grouts, Monolithic Surfacing
and Polymer Concretes
 - C579-01(2006).....Standard Test Method for Compressive Strength of
Chemical-Resistant Mortars, Grouts, Monolithic
Surfacing, and Polymer Concretes
 - C580-02(2008).....Standard Test Method for Flexural Strength and
Modulus of Elasticity of Chemical-Resistant
Mortars, Grouts, Monolithic Surfacing, and
Polymer Concretes
 - C811-98(2008).....Standard Practice for Surface Preparation of
Concrete for Application of Chemical-Resistant
Resin Monolithic Surfacing
 - D1308-02(2007).....Standard Test Method for Effect of Household
Chemicals on Clear and Pigmented Organic
Finishes
 - D2240-05.....Standard Test Method for Rubber Property –
Durometer Hardness
 - D4060-07.....Standard Test Method for Abrasion Resistance of
Organic Coatings by the Taber Abraser

- D4226-09.....Standard Test Methods for Impact Resistance of
Rigid Poly (Vinyl Chloride) (PVC) Building
Products
- D7234-05.....Standard Test Method for Pull-Off Adhesion
Strength of Coatings on Concrete Using Portable
Pull-Off Adhesion Testers
- F1869-09.....Standard Test Method for Measuring Moisture
Vapor Emission Rate of Concrete Subfloor Using
Anhydrous Calcium Chloride
- F2170-09.....Standard Test Methods for Determining Relative
Humidity in Concrete Floor Slabs Using Situ
Probes
- C. National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Finishes for Aluminum

PART 2 - PRODUCTS

2.1 SYSTEM DESCRIPTION FOR RESINOUS FLOORING

- A. System Descriptions:
1. Monolithic, multi-component epoxy chemistry, steel trowel applied resinous flooring mortar system, nominal 3/16"/5mm thick system comprised of a penetrating primer, multi component 100% solids epoxy mortar, grout coat sealer and clear VOC compliant, aliphatic polyurethane non-reflective finish.
 2. Decorative quartz broadcast systems will not be accepted. Steel trowel finish mortars only
- B. Products: Subject to compliance with applicable fire, health, environmental, and safety requirements for storage, handling, installation, and clean up.
- C. System Components: Verify specific requirements as systems vary by manufacturer. Verify mortar base product, build up layers of broadcast systems will not be accepted. Verify compatibility with substrate. Use manufacturer's standard components, compatible with each other and as follows:
1. Primer (Bond) Coat: Verify inclusion of primer in manufacturer's system.
 - a. Resin: Epoxy.
 - b. Formulation Description: 100% solids.
 - c. Application Method: Apply by Squeegee and finish roller.
 2. Mortar (Base) Coat: Verify mortar composition.
 - a. Resin: Epoxy.

- b. Formulation Description: 100% solids, UV stable.
- c. Application Method: Screed and steel finish trowel.
 - 1) Thickness of coat: Verify thickness as systems vary by manufacturer; approximately from 3/16 to 1/4 inch (4.76 to 6.35 mm).
- d. Aggregate: Pigmented color quartz silica, and a minimum or 12% recycled glass aggregates integral component to mortar.
- 3. Grout Coat: Verify inclusion of base coat in manufacturer's system.
 - a. Resin: Epoxy.
 - b. Formulation Description: 100 percent solids, UV stable.
 - c. Application Method: Flat squeegee and roller applied.
 - d. Number of coats: (2) two, wet on wet application.
- 4. Top (Seal) Coat: Verify inclusion of water based aliphatic polyurethane sealer coat as systems vary by manufacturer.
 - a. Resin: multi-component water based aliphatic polyurethane.
 - b. Formulation Description: High UV stability, stain and mar resistant. LEED compliant low V.O.C.
 - c. Application Method: Finish roller, dip into coating and back roll.
 - 1) Number of coats: (1) one
 - d. Aggregates: Optional if needed verify inclusion of slip-retardant aggregates in sealer coat.
- D. System Characteristics:
 - 1. Color and Pattern: As indicated in Construction Documents, sheet AE-601, SCHEDULE OF FINISHES.
 - 2. Integral cove base: 1 inch (25.4 mm) radius epoxy mortar cove keyed into concrete substrate. Verify cove base installation with manufacturer's system.
 - 3. Overall System Thickness: Verify thickness as systems vary by manufacturer; between 3/16 inch (4.76 mm) and 1/4 inch (6.35 mm)
 - 4. Finish: Standard anti-slip resistant to meet or exceed 0.06 dry; 0.08 wet.
- E. Physical Properties:
 - 1. Physical Properties of flooring system when tested as follows:

Property	Test	Value
Compressive Strength	ASTM C579	7,500 psi after 7 days
Volatile Organic Compound Limits (V.O.C.)	EPA & LEED	Below 100 g/l
Tensile Strength	ASTM C307	1,750 psi
Flexural Modulus of Elasticity	ASTM C580	2,800 psi
Water Absorption	ASTM C413	0.1%
Slip Resistance Index	ASTM F1679	0.81 dry and 0.56 wet. Minimal levels
Impact Resistance	ASTM D4226	> 160 in. lbs
Abrasion Resistance	ASTM D4060 Cs-17 wheel, 1000 cycles	0.06 gm maximum weight loss
Thermal Coefficient of Linear Expansion	ASTM C531	1.3×10^{-5} mm/ °C mm
Hardness Shore D	ASTM D2240	85 to 90
Bond Strength	ASTM D7234	>300 psi 100% concrete failure
Chemical Resistance of the following:	ASTM D1380	No Effect
Betadyne stain resistance		
Acetic acid	5 percent	
Ammonium hydroxide	10 percent	
Citric Acid	50 percent	
Fatty acid Motor Oil, 20W		
Hydrochloric acid		
Salt water	10 percent	
Sodium Hydroxide	10 percent	
Sulfuric acid	10 percent	
Trisodium phosphate	10 percent	
	5 percent	
Urine		
Feces		
Hydrogen peroxide	28 percent	
Distilled Water		
Sodium Hypochloride	5.28 percent	

2.2 BASE CAP STRIP

- A. Aluminum, Extruded: ASTM B221, Alloy 6063-T6.
- B. Shape for 5 mm (3/16 inch) depth of base material, "J" configuration.
- C. Finish:
 - 1. Finish exposed surfaces in accordance with NAAMM Metal Finishes Manual.
 - 2. Aluminum: NAAMM Amp 500:
 - a. Clear anodic coating, AA-C22A41 chemically etched medium matte, with Architectural Class 1, 0.7 mils or thicker.

- b. Colored anodic coating, AA-C22A42, chemically etched medium matte with Architectural Class 1, 0.7 mils or thicker.

2.3 SUPPLEMENTAL MATERIALS

- A. Joint Sealant: Type recommended or produced by resinous flooring manufacturer for type of service or joint conditioned indicated.
- B. Waterproof Membrane: Type recommended or produced by manufacturer of resinous floor coatings for type of service and conditions as specified
- C. Provide a chemical resistant epoxy novolac top coat capable of resisting sustained temperatures up to 120°C (250°F).
- D. Crack Isolation Membrane: Type recommended or produced by manufacturer of resinous flooring for conditions as specified.
- E. Patching and Fill Material: Resinous product of or approved by resinous coating manufacturer for application indicated. Resinous based materials only. Cementitious or single component product are not expectable.

PART 3 - EXECUTION

3.1 INSPECTION

- A. Examine the areas and conditions where monolithic resinous flooring system with integral base is to be installed with the VA Resident Engineer.
- B. Moisture Vapor Emission Testing: Perform moisture vapor transmission testing in accordance with ASTM F1869 to determine the MVER of the substrate prior to commencement of the work. See section 3.4, 3.

3.2 PROJECT CONDITIONS

- A. Maintain temperature of rooms (air and surface) where work occurs, between 70 and 90 degrees F (21 and 32 degrees C) for at least 48 hours, before, during, and 24 hours after installation. Maintain temperature at least 70 degrees F (21 degrees C) during cure period.
- B. Maintain relative humidity less than 75 percent.
- C. Do not install materials until building is permanently enclosed and wet construction is complete, dry, and cured.
- D. Maintain proper ventilation of the area during application and curing time period.
 - 1. Comply with infection control measures of the VA Medical Center.

3.3 INSTALLATION REQUIREMENTS

- A. The manufacturer's instructions for application and installation shall be reviewed with the VA Resident Engineer for the seamless resinous flooring system with integral cove base.
- B. Substrate shall be approved by manufacture technical representative.

3.4 PREPARATION

- A. General: Prepare and clean substrates according to resinous flooring manufacturer's written instructions for substrate indicated. Provide clean, dry, and neutral Ph substrate for resinous flooring application.
- B. Concrete Substrates: Provide sound concrete surfaces free of laitance, glaze, efflorescence, curing compounds, form-release agents, dust, dirt, grease, oil, and other contaminants incompatible with resinous flooring.
 - 1. Prepare concrete substrates as follows:
 - a. Shot-blast surfaces with an apparatus that abrades the concrete surface, contains the dispensed shot within the apparatus, and recirculates the shot by vacuum pickup.
 - b. Comply with ASTM C 811 requirements, unless manufacturer's written instructions are more stringent.
 - 2. Repair damaged and deteriorated concrete according to resinous flooring manufacturer's written recommendations.
 - 3. Verify that concrete substrates are dry.
 - a. Perform anhydrous calcium chloride test, ASTM F 1869. Proceed with application only after substrates have maximum moisture-vapor-emission rate of 5 lb of water/1000 sq. ft. (1.36 kg of water/92.9 sq. m) in 24 hours.
 - b. MVT threshold for monolithic resinous Non - climatic flooring shall not exceed 5 lbs/1000 square feet (0.0001437 kPa) in a 24 hour period. MVT threshold for monolithic resinous climatic flooring shall not exceed 6 lbs/1000 square feet (0.0002155 kPa) over a 24 hour period.
 - c. When MVT emission exceeds this limit, apply manufacturer's recommended vapor control primer or other corrective measures as recommended by manufacturer prior to application of flooring or membrane systems.
 - d. Perform in situ probe test, ASTM F2170. Proceed with application only after substrates do not exceed a maximum potential equilibrium relative humidity of 75-80 percent.
 - e. Provide a written report showing test placement and results.
 - 4. Verify that concrete substrates have neutral Ph and that resinous flooring will adhere to them. Perform tests recommended by manufacturer. Proceed with application only after substrates pass testing.
- C. Resinous Materials: Mix components and prepare materials according to resinous flooring manufacturer's written instructions.

- D. Use patching and fill material to fill holes and depressions in substrates according to manufacturer's written instructions.
- E. Treat control joints and other nonmoving substrate cracks to prevent cracks from reflecting through resinous flooring according to manufacturer's written recommendations. Allowances should be included for flooring manufacturer recommended joint fill material, and concrete crack treatment.
- F. Prepare wall to receive integral cove base:
 - 1. Verify wall material is acceptable for resinous flooring application, if not, install material (e.g. cement board) to receive base.
 - 2. Fill voids in wall surface to receive base, install undercoats (e.g. water proofing membrane, and/or crack isolation membrane) as recommended by resinous flooring manufacturer.
 - 3. Install base prior to flooring if required by resinous flooring manufacturer.
 - 4. Grind, cut or sand protrusions to receive base application.

3.5 APPLICATION

- A. **General:** Apply components of resinous flooring system according to manufacturer's written instructions to produce a uniform, monolithic wearing surface of thickness indicated.
 - 1. Coordinate application of components to provide optimum adhesion of resinous flooring system to substrate, and optimum inter-coat adhesion.
 - 2. Cure resinous flooring components according to manufacturer's written instructions. Prevent contamination during application and curing processes.
 - 3. At substrate expansion and isolation joints, provide joint in resinous flooring to comply with resinous flooring manufacturer's written recommendations.
 - a. Apply joint sealant to comply with manufacturer's written recommendations.
- B. Apply Primer: over prepared substrate at manufacturer's recommended spreading rate.
- C. Apply cove base: Trowel to wall surfaces at a 1 inch radius, before applying flooring. Apply according to manufacturer's written instructions and details including those for taping, mixing, priming, and troweling, sanding, and top coating of cove base. Round internal and external corners.
- D. Trowel mortar base: Mix mortar material according to manufacturer's recommended procedures. Uniformly spread mortar over substrate using a

specially designed screed box adjusted to manufacturer's recommended height. Metal trowel hand or plastic blade power trowel, single mortar coat in thickness indicated for flooring system, Pre fill or grout to fill substrate voids. When cured, scrape or lightly stone mortar base to remove left unbounded material.

- E. Grout coat: Mix and roller apply the grout coats with strict adherence to manufacturer's installation procedures and coverage rates. (2) Two grout coatings to insure uniform coverage with wet on wet application.
- F. Topcoat: Mix and roller apply the topcoat(s) with strict adherence to manufacturer's installation procedures and coverage rates.

3.6 TOLERANCE

- A. From line of plane: Maximum 1/8 inch (3.18 mm) in total distance of flooring and base.
- B. From radius of cove: Maximum of 1/8 inch (3.18 mm) plus or 1/16-inch (1.59 mm) minus.

3.7 CURING, PROTECTION AND CLEANING

- A. Cure resinous flooring materials in compliance with manufacturer's directions, taking care to prevent contamination during stages of application and prior to completion of curing process.
- B. Close area of application for a minimum of 24 hours.
- C. Protect resinous flooring materials from damage and wear during construction operation.
 - 1. Cover flooring with kraft type paper.
 - 2. Optional 6 mm (1/4 inch) thick hardboard, plywood, or particle board where area is in foot or vehicle traffic pattern, rolling or fixed scaffolding and overhead work occurs.
- D. Remove temporary covering and clean resinous flooring just prior to final inspection. Use cleaning materials and procedures recommended by resinous flooring manufacturer.

- - - E N D - - -

**SECTION 09 91 00
PAINTING**

PART 1-GENERAL

1.1 DESCRIPTION

- A. Section specifies field painting.
- B. Section specifies prime coats which may be applied in shop under other sections.
- C. Painting includes shellacs, stains, varnishes, coatings specified, and striping or markers and identity markings.

1.2 RELATED WORK

- A. Shop prime painting of steel and ferrous metals: Division 05 - METALS, Division 08 - OPENINGS, Division 10 - SPECIALTIES, Division 11 - EQUIPMENT, Division 12 - FURNISHINGS, Division 13 - SPECIAL CONSTRUCTION, Division 14 - CONVEYING EQUIPMENT, Division 21 - FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 - HEATING, VENTILATION AND AIR-CONDITIONING, Division 26 - ELECTRICAL, Division 27 - COMMUNICATIONS, and Division 28 - ELECTRONIC SAFETY AND SECURITY sections.
- B. Contractor option: Prefinished flush doors with transparent finishes: Section 08 14 00, WOOD DOORS.
- C. Type of Finish, Color, and Gloss Level of Finish Coat: Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES.
- D. Glazed wall surfacing or tile like coatings: Section 09 96 59, HIGH-BUILD GLAZED COATINGS.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
Before work is started, or sample panels are prepared, submit manufacturer's literature, the current Master Painters Institute (MPI) "Approved Product List" indicating brand label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use subsequent MPI "Approved Product List", however, only one list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI "Approved Product List" where applicable is acceptable.

C. Sample Panels:

1. After painters' materials have been approved and before work is started submit sample panels showing each type of finish and color specified.
2. Panels to show color: Composition board, 100 by 250 by 3 mm (4 inch by 10 inch by 1/8 inch).
3. Panel to show transparent finishes: Wood of same species and grain pattern as wood approved for use, 100 by 250 by 3 mm (4 inch by 10 inch face by 1/4 inch) thick minimum, and where both flat and edge grain will be exposed, 250 mm (10 inches) long by sufficient size, 50 by 50 mm (2 by 2 inch) minimum or actual wood member to show complete finish.
4. Attach labels to panel stating the following:
 - a. Federal Specification Number or manufacturers name and product number of paints used.
 - b. Specification code number specified in Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES.
 - c. Product type and color.
 - d. Name of project.
5. Strips showing not less than 50 mm (2 inch) wide strips of undercoats and 100 mm (4 inch) wide strip of finish coat.

D. Sample of identity markers if used.**E. Manufacturers' Certificates indicating compliance with specified requirements:**

1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified
2. Intumescent clear coating or fire retardant paint.

1.4 DELIVERY AND STORAGE**A. Deliver materials to site in manufacturer's sealed container marked to show following:**

1. Name of manufacturer.
2. Product type.
3. Batch number.
4. Instructions for use.
5. Safety precautions.

B. In addition to manufacturer's label, provide a label legibly printed as following:

1. Federal Specification Number, where applicable, and name of material.
2. Surface upon which material is to be applied.
3. If paint or other coating, state coat types; prime, body or finish.

- C. Maintain space for storage, and handling of painting materials and equipment in a neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.
- D. Store materials at site at least 24 hours before using, at a temperature between 18 and 30 degrees C (65 and 85 degrees F).

1.5 MOCK-UP PANEL

- A. Before starting application of water paint mixtures, apply paint as specified to an area, not to exceed 9 m² (100 ft²), selected by Resident Engineer.
- B. Finish and texture approved by Resident Engineer will be used as a standard of quality for remainder of work.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. American Conference of Governmental Industrial Hygienists (ACGIH):
ACGIH TLV-BKLT-2008.....Threshold Limit Values (TLV) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs)
ACGIH TLV-DOC-2008.....Documentation of Threshold Limit Values and Biological Exposure Indices, (Seventh Edition)
- C. American National Standards Institute (ANSI):
A13.1-07.....Scheme for the Identification of Piping Systems
- D. American Society for Testing and Materials (ASTM):
D260-86.....Boiled Linseed Oil
- E. Commercial Item Description (CID):
A-A-1555.....Water Paint, Powder (Cementitious, White and Colors) (WPC) (cancelled)
A-A-3120.....Paint, For Swimming Pools (RF) (cancelled)
- F. Federal Specifications (Fed Spec):
TT-P-1411A.....Paint, Copolymer-Resin, Cementitious (For Waterproofing Concrete and Masonry Walls) (CEP)
- G. Master Painters Institute (MPI):
No. 1-07.....Aluminum Paint (AP)
No. 36-07.....Knot Sealer
No. 43-07.....Interior Satin Latex, MPI Gloss Level 4
No. 44-07.....Interior Low Sheen Latex, MPI Gloss Level 2
No. 45-07.....Interior Primer Sealer
No. 46-07.....Interior Enamel Undercoat
No. 47-07.....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5 (AK)

- No. 48-07.....Interior Alkyd, Gloss, MPI Gloss Level 6 (AK)
- No. 49-07.....Interior Alkyd, Flat, MPI Gloss Level 1 (AK)
- No. 50-07.....Interior Latex Primer Sealer
- No. 51-07.....Interior Alkyd, Eggshell, MPI Gloss Level 3
- No. 52-07.....Interior Latex, MPI Gloss Level 3 (LE)
- No. 53-07.....Interior Latex, Flat, MPI Gloss Level 1 (LE)
- No. 54-07.....Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)
- No. 71-07.....Polyurethane, Moisture Cured, Clear, Flat (PV)
- No. 74-07.....Interior Alkyd Varnish, Semi-Gloss
- No. 77-07.....Epoxy Cold Cured, Gloss (EC)
- No. 90-07.....Interior Wood Stain, Semi-Transparent (WS)
- No. 91-07.....Wood Filler Paste
- No. 94-07.....Exterior Alkyd, Semi-Gloss (EO)
- No. 101-07.....Epoxy Anti-Corrosive Metal Primer
- No. 108-07.....High Build Epoxy Coating, Low Gloss (EC)
- No. 114-07.....Interior Latex, Gloss (LE) and (LG)
- No. 119-07.....Exterior Latex, High Gloss (acrylic) (AE)
- No. 135-07.....Non-Cementitious Galvanized Primer
- H. Steel Structures Painting Council (SSPC):
 - SSPC SP 1-04 (R2004)....Solvent Cleaning
 - SSPC SP 2-04 (R2004)....Hand Tool Cleaning
 - SSPC SP 3-04 (R2004)....Power Tool Cleaning

1.7 MAINTENANCE MATERIAL SUBMITTALS

- A. Furnish extra materials from the same product run that match products installed and that are packaged with protective covering for storage and identified with labels describing contents.
 - 1. Paint: 5 percent, but not less than 1 gal. (3.8 L) of each material and color applied.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Cementitious Paint (CEP): TT-P-1411A [Paint, Copolymer-Resin, Cementitious (CEP)], Type 1 for exterior use, Type II for interior use.
- B. Wood Sealer: MPI 31 (gloss) or MPI 71 (flat) thinned with thinner recommended by manufacturer at rate of about one part of thinner to four parts of varnish.
- C. Plastic Tape:

1. Pigmented vinyl plastic film in colors as specified in Section 09 06 00, SCHEDULE FOR FINISHES or specified.
 2. Pressure sensitive adhesive back.
 3. Widths as shown.
- D. Identity markers options:
1. Pressure sensitive vinyl markers.
 2. Snap-on coil plastic markers.
- E. Knot Sealer: MPI 36.
- F. Interior Satin Latex: MPI 43.
- G. Interior Low Sheen Latex: MPI 44.
- H. Interior Primer Sealer: MPI 45.
- I. Interior Enamel Undercoat: MPI 47.
- J. Interior Alkyd, Semi-Gloss (AK): MPI 47.
- K. Interior Alkyd, Gloss (AK): MPI 49.
- L. Interior Latex Primer Sealer: MPI 50.
- M. Interior Alkyd, Eggshell: MPI 51
- N. Interior Latex, MPI Gloss Level 3 (LE): MPI 52.
- O. Interior Latex, Flat, MPI Gloss Level 1 (LE): MPI 53.
- P. Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE): MPI 54.
- Q. Interior Wood Stain, Semi-Transparent (WS): MPI 90.
- R. Wood Filler Paste: MPI 91.
- S. Interior latex, Gloss (LE) and (LG): MPI 114.

2.2 PAINT PROPERTIES

- A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.
- B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.

2.3 REGULATORY REQUIREMENTS/QUALITY ASSURANCE

- A. Paint materials shall conform to the restrictions of the local Environmental and Toxic Control jurisdiction.
1. Volatile Organic Compounds (VOC): VOC content of paint materials shall not exceed 10g/l for interior latex paints/primers and 50g/l for exterior latex paints and primers.
 2. Lead-Base Paint:
 - a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.

- b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.
 - c. For lead-paint removal, see Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
- 3. Asbestos: Materials shall not contain asbestos.
 - 4. Chromate, Cadmium, Mercury, and Silica: Materials shall not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
 - 5. Human Carcinogens: Materials shall not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
 - 6. Use high performance acrylic paints in place of alkyd paints, where possible.
 - 7. VOC content for solvent-based paints shall not exceed 250g/l and shall not be formulated with more than one percent aromatic hydro carbons by weight.

PART 3 - EXECUTION

3.1 JOB CONDITIONS

- A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.
 - 1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
 - 2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each days work.
- B. Atmospheric and Surface Conditions:
 - 1. Do not apply coating when air or substrate conditions are:
 - a. Less than 3 degrees C (5 degrees F) above dew point.
 - b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the Contracting Officer and the product manufacturer. Under no circumstances shall application conditions exceed manufacturer recommendations.
 - 2. Maintain interior temperatures until paint dries hard.
 - 3. Do no exterior painting when it is windy and dusty.
 - 4. Do not paint in direct sunlight or on surfaces that the sun will soon warm.
 - 5. Apply only on clean, dry and frost free surfaces except as follows:

- a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces where allowed by manufacturer's printed instructions.
 - b. Dampened with a fine mist of water on hot dry days concrete and masonry surfaces to which water thinned acrylic and cementitious paints are applied to prevent excessive suction and to cool surface.
6. Varnishing:
- a. Apply in clean areas and in still air.
 - b. Before varnishing vacuum and dust area.
 - c. Immediately before varnishing wipe down surfaces with a tack rag.

3.2 SURFACE PREPARATION

- A. Method of surface preparation is optional, provided results of finish painting produce solid even color and texture specified with no overlays.
- B. General:
1. Remove prefinished items not to be painted such as lighting fixtures, escutcheon plates, hardware, trim, and similar items for reinstallation after paint is dried.
 2. Remove items for reinstallation and complete painting of such items and adjacent areas when item or adjacent surface is not accessible or finish is different.
 3. See other sections of specifications for specified surface conditions and prime coat.
 4. Clean surfaces for painting with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry.
- C. Wood:
1. Sand to a smooth even surface and then dust off.
 2. Sand surfaces showing raised grain smooth between each coat.
 3. Wipe surface with a tack rag prior to applying finish.
 4. Surface painted with an opaque finish:
 - a. Coat knots, sap and pitch streaks with MPI 36 (Knot Sealer) before applying paint.
 - b. Apply two coats of MPI 36 (Knot Sealer) over large knots.
 5. After application of prime or first coat of stain, fill cracks, nail and screw holes, depressions and similar defects with wood filler paste. Sand the surface to make smooth and finish flush with adjacent surface.

6. Before applying finish coat, reapply wood filler paste if required, and sand surface to remove surface blemishes. Finish flush with adjacent surfaces.
7. Fill open grained wood such as oak, walnut, ash and mahogany with MPI 91 (Wood Filler Paste), colored to match wood color.
 - a. Thin filler in accordance with manufacturer's instructions for application.
 - b. Remove excess filler, wipe as clean as possible, dry, and sand as specified.

D. Ferrous Metals:

1. Remove oil, grease, soil, drawing and cutting compounds, flux and other detrimental foreign matter in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Remove loose mill scale, rust, and paint, by hand or power tool cleaning, as defined in SSPC-SP 2 (Hand Tool Cleaning) and SSPC-SP 3 (Power Tool Cleaning). Exception: where high temperature aluminum paint is used, prepare surface in accordance with paint manufacturer's instructions.
3. Fill dents, holes and similar voids and depressions in flat exposed surfaces of hollow steel doors and frames, access panels, roll-up steel doors and similar items specified to have semi-gloss or gloss finish with TT-F-322D (Filler, Two-Component Type, For Dents, Small Holes and Blow-Holes). Finish flush with adjacent surfaces.
 - a. This includes flat head countersunk screws used for permanent anchors.
 - b. Do not fill screws of item intended for removal such as glazing beads.
4. Spot prime abraded and damaged areas in shop prime coat which expose bare metal with same type of paint used for prime coat. Feather edge of spot prime to produce smooth finish coat.
5. Spot prime abraded and damaged areas which expose bare metal of factory finished items with paint as recommended by manufacturer of item.

E. Zinc-Coated (Galvanized) Metal, Aluminum, Copper and Copper Alloys
Surfaces Specified Painted:

1. Clean surfaces to remove grease, oil and other deterrents to paint adhesion in accordance with SSPC-SP 1 (Solvent Cleaning).
2. Spot coat abraded and damaged areas of zinc-coating which expose base metal on hot-dip zinc-coated items with MPI 18 (Organic Zinc Rich Coating). Prime or spot prime with MPI 134 (Waterborne Galvanized

Primer) or MPI 135 (Non- Cementitious Galvanized Primer) depending on finish coat compatibility.

F. Masonry, Concrete, Cement Board, Cement Plaster and Stucco:

1. Clean and remove dust, dirt, oil, grease efflorescence, form release agents, laitance, and other deterrents to paint adhesion.
2. Use emulsion type cleaning agents to remove oil, grease, paint and similar products. Use of solvents, acid, or steam is not permitted.
3. Remove loose mortar in masonry work.
4. Replace mortar and fill open joints, holes, cracks and depressions with new mortar specified in Section 04 05 13, MASONRY MORTARING Section 04 05 16, MASONRY GROUTING. Do not fill weep holes. Finish to match adjacent surfaces.
5. Neutralize Concrete floors to be painted by washing with a solution of 1.4 Kg (3 pounds) of zinc sulfate crystals to 3.8 L (1 gallon) of water, allow to dry three days and brush thoroughly free of crystals.
6. Repair broken and spalled concrete edges with concrete patching compound to match adjacent surfaces as specified in CONCRETE Sections. Remove projections to level of adjacent surface by grinding or similar methods.

G. Gypsum Plaster and Gypsum Board:

1. Remove efflorescence, loose and chalking plaster or finishing materials.
2. Remove dust, dirt, and other deterrents to paint adhesion.
3. Fill holes, cracks, and other depressions with CID-A-A-1272A [Plaster, Gypsum (Spackling Compound) finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for plaster or gypsum board.

3.3 PAINT PREPARATION

- A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
- B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.
- C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.
- D. Mix two component and two part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.

- E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

3.4 APPLICATION

- A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.
- B. Unless otherwise specified, apply paint in three coats; prime, body, and finish. When two coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.
- C. Apply each coat evenly and cover substrate completely.
- D. Allow not less than 48 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by Resident Engineer.
- E. Finish surfaces to show solid even color, free from runs, lumps, brushmarks, laps, holidays, or other defects.
- F. Apply by brush, roller or spray, except as otherwise specified.
- G. Do not spray paint in existing occupied spaces unless approved by Resident Engineer, except in spaces sealed from existing occupied spaces.
 - 1. Apply painting materials specifically required by manufacturer to be applied by spraying.
 - 2. In areas, where paint is applied by spray, mask or enclose with polyethylene, or similar air tight material with edges and seams continuously sealed including items specified in WORK NOT PAINTED, motors, controls, telephone, and electrical equipment, fronts of sterilizes and other recessed equipment and similar prefinished items.
- I. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items except overhead roll-up doors and shutters.

3.5 PRIME PAINTING

- A. After surface preparation prime surfaces before application of body and finish coats, except as otherwise specified.
- B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.
- C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.
- D. Prime rebates for stop and face glazing of wood, and for face glazing of steel.
- E. Wood and Wood Particleboard:
 - 1. Use same kind of primer specified for exposed face surface.

- a. Interior wood except for transparent finish: MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat), thinned if recommended by manufacturer.
 - b. Transparent finishes as specified under Transparent Finishes on Wood except Floors.
2. Apply two coats of primer MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat) to surfaces of wood doors, including top and bottom edges, which are cut for fitting or for other reason.
 3. Apply one coat of primer MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat) as soon as delivered to site to surfaces of unfinished woodwork, except concealed surfaces of shop fabricated or assembled millwork and surfaces specified to have varnish, stain or natural finish.
 4. Apply MPI 67 (Interior Latex Fire Retardant, Top-Coat (ULC Approved) (FR) to wood for fire retardant finish.
- F. Metals except boilers, incinerator stacks, and engine exhaust pipes:
1. Zinc-coated steel and iron: MPI 134 (Waterborne Galvanized Primer) MPI 135 (Non-Cementitious Galvanized Primer).
 2. Aluminum scheduled to be painted: MPI 95 (Fast Drying Metal Primer).
 3. Machinery not factory finished: MPI 9 (Exterior Alkyd Enamel (EO)).
 4. Metal over 94 degrees C. (200 degrees F), Boilers, Incinerator Stacks, and Engine Exhaust Pipes: MPI 22 (High Heat Resistant Coating (HR)).
- G. Gypsum Board and Hardboard:
1. Surfaces scheduled to have MPI 53 (Interior Latex, Flat), MPI Gloss Level 1 (LE)), MPI 52 (Interior Latex, MPI Gloss Level 3 (LE)), MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)), MPI 114 (Interior Latex, Gloss (LE) and (LG)) finish: Use MPI 53 (Interior Latex, MPI Gloss Level 3 (LE)), MPI 52 (Interior Latex, MPI Gloss Level 3 (LE), MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)), MPI 114 (Interior Latex, Gloss (LE) and (LG)) respectively.
 2. Primer: MPI 50 (Interior Latex Primer Sealer)

3.6 INTERIOR FINISHES

- A. Apply following finish coats over prime coats in spaces or on surfaces specified in Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES.
- B. Metal Work:
1. Apply to exposed surfaces.
 2. Omit body and finish coats on surfaces concealed after installation except electrical conduit containing conductors over 600 volts.
 3. Ferrous Metal, Galvanized Metal, and Other Metals Scheduled:

- a. Apply two coats of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) unless specified otherwise.
 - b. Two coats of MPI 51 (Interior Alkyd, Eggshell (AK)).
 - c. One coat of MPI 46 (Interior Enamel Undercoat) plus one coat of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) on exposed interior surfaces of alkyd-amine enamel prime finished windows.
 - g. Ferrous Metal over 94 degrees K (200 degrees F): Boilers, Incinerator Stacks, and Engine Exhaust Pipes: One coat MPI 22 (High Heat Resistant Coating (HR)).
- C. Gypsum Board:
1. One coat of MPI 45 (Interior Primer Sealer)
 2. One coat of MPI 45 (Interior Primer Sealer) plus one coat of MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)) or MPI 114 (Interior Latex, Gloss (LE) and (LG)).
 3. One coat of MPI 45 (Interior Primer Sealer) plus one coat of MPI 48 (Interior Alkyd Gloss (AK)).
- E. Masonry and Concrete Walls:
1. Over MPI 4 (Interior/Exterior Latex Block Filler) on CMU surfaces.
 2. Two coats of MPI 53 (Interior Latex, Flat, MPI Gloss Level 1 (LE)), MPI 52 (Interior Latex, MPI Gloss Level 3 (LE)), MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)), MPI 114 (Interior Latex, Gloss (LE) and (LG)).
- F. Wood:
1. Sanding:
 - a. Use 220-grit sandpaper.
 - b. Sand sealers and varnish between coats.
 - c. Sand enough to scarify surface to assure good adhesion of subsequent coats, to level roughly applied sealer and varnish, and to knock off "whiskers" of any raised grain as well as dust particles.
 2. Sealers:
 - a. Apply sealers specified except sealer may be omitted where pigmented, penetrating, or wiping stains containing resins are used.
 - b. Allow manufacturer's recommended drying time before sanding, but not less than 24 hours or 36 hours in damp or muggy weather.
 - c. Sand as specified.
 3. Transparent Finishes on Wood Except Floors.
 - a. Natural Finish:
 - 1) One coat of sealer as written in 2.1 E.
 - 2) Two coats of MPI 71 (Polyurethane, Moisture Cured, Clear Flat (PV) MPI 31 (Polyurethane, Moisture Cured, Clear Gloss (PV)).

b. Stain Finish:

- 1) One coat of MPI 90 (Interior Wood Stain, Semi-Transparent (WS)).
- 2) Use wood stain of type and color required to achieve finish specified. Do not use varnish type stains.
- 3) One coat of sealer as written in 2.1 E.
- 4) Two coats of MPI 71 (Polyurethane, Moisture Cured, Clear Flat (PV), MPI 31 (Polyurethane Moisture Cured, Clear Gloss (PV))).

c. Varnish Finish:

- 1) One coat of sealer as written in 2.1 E.
- 2) Two coats of MPI 71 (Polyurethane, Moisture Cured, Clear Flat (PV) MPI 31 (Polyurethane Moisture Cured, Clear Gloss (PV))).

G. Miscellaneous:

1. Apply where specified in Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES.
2. MPI 1 (Aluminum Paint): Two coats of aluminum paint.

3.8 REFINISHING EXISTING PAINTED SURFACES

- A. Clean, patch and repair existing surfaces as specified under surface preparation.
- B. Remove and reinstall items as specified under surface preparation.
- C. Remove existing finishes or apply separation coats to prevent non compatible coatings from having contact.
- D. Patched or Replaced Areas in Surfaces and Components: Apply spot prime and body coats as specified for new work to repaired areas or replaced components.
- E. Except where scheduled for complete painting apply finish coat over plane surface to nearest break in plane, such as corner, reveal, or frame.
- F. In existing rooms and areas where alterations occur, clean existing stained and natural finished wood retouch abraded surfaces and then give entire surface one coat of MPI 31 (Polyurethane, Moisture Cured, Clear Gloss).
- G. Refinish areas as specified for new work to match adjoining work unless specified or scheduled otherwise.
- H. Coat knots and pitch streaks showing through old finish with MPI 36 (Knot Sealer) before refinishing.
- I. Sand or dull glossy surfaces prior to painting.
- J. Sand existing coatings to a feather edge so that transition between new and existing finish will not show in finished work.

3.9 PAINT COLOR

- A. Color and gloss of finish coats is specified in Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES.

- B. For additional requirements regarding color see Articles, REFINISHING EXISTING PAINTED SURFACE and MECHANICAL AND ELECTRICAL FIELD PAINTING SCHEDULE.
- C. Coat Colors:
 - 1. Color of priming coat: Lighter than body coat.
 - 2. Color of body coat: Lighter than finish coat.
 - 3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.
- D. Painting, Caulking, Closures, and Fillers Adjacent to Casework:
 - 1. Paint to match color of casework where casework has a paint finish.
 - 2. Paint to match color of wall where casework is stainless steel, plastic laminate, or varnished wood.

3.10 MECHANICAL AND ELECTRICAL WORK FIELD PAINTING SCHEDULE

- A. Field painting of mechanical and electrical consists of cleaning, touching-up abraded shop prime coats, and applying prime, body and finish coats to materials and equipment if not factory finished in space scheduled to be finished.
- B. In spaces not scheduled to be finish painted in Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES paint as specified under paragraph H, colors.
- C. Paint various systems specified in Division 02 - EXISTING CONDITIONS, Division 21 - FIRE SUPPRESSION, Division 22 - PLUMBING, Division 23 - HEATING, VENTILATION AND AIR-CONDITIONING, Division 26 - ELECTRICAL, Division 27 - COMMUNICATIONS, and Division 28 - ELECTRONIC SAFETY AND SECURITY.
- D. Paint after tests have been completed.
- E. Omit prime coat from factory prime-coated items.
- F. Finish painting of mechanical and electrical equipment is not required when located in interstitial spaces, above suspended ceilings, in concealed areas such as pipe and electric closets, pipe basements, pipe tunnels, trenches, attics, roof spaces, shafts and furred spaces except on electrical conduit containing feeders 600 volts or more.
- G. Omit field painting of items specified in paragraph, Building and Structural WORK NOT PAINTED.
- H. Color:
 - 1. Paint items having no color specified in Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES to match surrounding surfaces.
 - 2. Paint colors as specified in Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES except for following:

- a. WhiteExterior unfinished surfaces of enameled plumbing fixtures. Insulation coverings on breeching and uptake inside boiler house, drums and drum-heads, oil heaters, condensate tanks and condensate piping.
 - b. Gray:Heating, ventilating, air conditioning and refrigeration equipment (except as required to match surrounding surfaces), and water and sewage treatment equipment and sewage ejection equipment.
 - c. Aluminum Color: Ferrous metal on outside of boilers and in connection with boiler settings including supporting doors and door frames and fuel oil burning equipment, and steam generation system (bare piping, fittings, hangers, supports, valves, traps and miscellaneous iron work in contact with pipe).
 - d. Federal Safety Red: Exposed fire protection piping hydrants, post indicators, electrical conducts containing fire alarm control wiring, and fire alarm equipment.
 - e. Federal Safety Orange: .Entire lengths of electrical conduits containing feeders 600 volts or more.
 - f. Color to match brickwork sheet metal covering on breeching outside of exterior wall of boiler house.
- I. Apply paint systems on properly prepared and primed surface as follows:
- 1. Interior Locations:
 - a. Apply two coats of MPI 47 (Interior Alkyd, Semi-Gloss (AK)) to following items:
 - 1) Metal under 94 degrees C (200 degrees F) of items such as bare piping, fittings, hangers and supports.
 - 2) Equipment and systems such as hinged covers and frames for control cabinets and boxes, cast-iron radiators, electric conduits and panel boards.
 - 3) Heating, ventilating, air conditioning, plumbing equipment, and machinery having shop prime coat and not factory finished.
 - b. Apply one coat of MPI 50 (Interior Latex Primer Sealer) and one coat of MPI 53 (Interior Latex, Flat, MPI Gloss Level 1 (LE)), MPI 44 (Interior Low Sheen Latex) on finish of insulation on boiler breeching and uptakes inside boiler house, drums, drumheads, oil heaters, feed water heaters, tanks and piping.
 - 2. Other exposed locations:
 - a. Metal surfaces, except aluminum, of cooling towers exposed to view, including connected pipes, rails, and ladders: Two coats of MPI 1 (Aluminum Paint (AP)).

- b. Cloth jackets of insulation of ducts and pipes in connection with plumbing, air conditioning, ventilating refrigeration and heating systems: One coat of MPI 50 (Interior Latex Primer Sealer) and one coat of MPI 11 (Exterior Latex Semi-Gloss (AE)).

3.11 BUILDING AND STRUCTURAL WORK FIELD PAINTING

- A. Painting and finishing of interior and exterior work except as specified under paragraph 3.11 B.
 - 1. Painting and finishing of new and existing work including colors and gloss of finish selected is specified in Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES.
 - 2. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.
 - 3. Painting of ferrous metal and galvanized metal.
 - 4. Painting of wood with fire retardant paint exposed in attics, when used as mechanical equipment space.
 - 5. Identity painting and safety painting.
- B. Building and Structural Work not Painted:
 - 1. Prefinished items:
 - a. Casework, doors, elevator entrances and cabs, metal panels, wall covering, and similar items specified factory finished under other sections.
 - b. Factory finished equipment and pre-engineered metal building components such as metal roof and wall panels.
 - 2. Finished surfaces:
 - a. Hardware except ferrous metal.
 - b. Anodized aluminum, stainless steel, chromium plating, copper, and brass, except as otherwise specified.
 - c. Signs, fixtures, and other similar items integrally finished.
 - 3. Concealed surfaces:
 - a. Inside dumbwaiter, elevator and duct shafts, interstitial spaces, pipe basements, crawl spaces, pipe tunnels, above ceilings, attics, except as otherwise specified.
 - b. Inside walls or other spaces behind access doors or panels.
 - c. Surfaces concealed behind permanently installed casework and equipment.
 - 4. Moving and operating parts:
 - a. Shafts, chains, gears, mechanical and electrical operators, linkages, and sprinkler heads, and sensing devices.
 - b. Tracks for overhead or coiling doors, shutters, and grilles.
 - 5. Labels:

- a. Code required label, such as Underwriters Laboratories Inc., Inchcape Testing Services, Inc., or Factory Mutual Research Corporation.
 - b. Identification plates, instruction plates, performance rating, and nomenclature.
6. Galvanized metal:
 - a. Exterior chain link fence and gates, corrugated metal areaways, and gratings.
 7. Metal safety treads and nosings.
 8. Gaskets.
 9. Concrete curbs, gutters, pavements, retaining walls, exterior exposed foundations walls and interior walls in pipe basements.
 10. Face brick.
 11. Structural steel encased in concrete, masonry, or other enclosure.
 12. Structural steel to receive sprayed-on fire proofing.

3.12 IDENTITY PAINTING SCHEDULE

- A. Identify designated service in accordance with ANSI A13.1, unless specified otherwise, on exposed piping, piping above removable ceilings, piping in accessible pipe spaces, interstitial spaces, and piping behind access panels.
 1. Legend may be identified using 2.1 G options or by stencil applications.
 2. Apply legends adjacent to changes in direction, on branches, where pipes pass through walls or floors, adjacent to operating accessories such as valves, regulators, strainers and cleanouts a minimum of 12 000 mm (40 feet) apart on straight runs of piping. Identification next to plumbing fixtures is not required.
 3. Locate Legends clearly visible from operating position.
 4. Use arrow to indicate direction of flow.
 5. Identify pipe contents with sufficient additional details such as temperature, pressure, and contents to identify possible hazard. Insert working pressure shown on drawings where asterisk appears for High, Medium, and Low Pressure designations as follows:
 - a. High Pressure - 414 kPa (60 psig) and above.
 - b. Medium Pressure - 104 to 413 kPa (15 to 59 psig).
 - c. Low Pressure - 103 kPa (14 psig) and below.
 - d. Add Fuel oil grade numbers.
 6. Legend name in full or in abbreviated form as follows:

PIPING	COLOR OF EXPOSED PIPING	COLOR OF BACKGROUND	COLOR OF LETTERS	LEGEND BBREVIATIONS
Blow-off		Yellow	Black	Blow-off
Boiler Feedwater		Yellow	Black	Blr Feed
A/C Condenser Water Supply		Green	White	A/C Cond Wtr Sup
A/C Condenser Water Return		Green	White	A/C Cond Wtr Ret
Chilled Water Supply		Green	White	Ch. Wtr Sup
Chilled Water Return		Green	White	Ch. Wtr Ret
Shop Compressed Air		Yellow	Black	Shop Air
Air-Instrument Controls		Green	White	Air-Inst Cont
Drain Line		Green	White	Drain
Emergency Shower		Green	White	Emg Shower
High Pressure Steam		Yellow	Black	H.P. _____*
High Pressure Condensate Return		Yellow	Black	H.P. Ret _____*
Medium Pressure Steam		Yellow	Black	M. P. Stm _____*
Medium Pressure Condensate Return		Yellow	Black	M.P. Ret _____*
Low Pressure Steam		Yellow	Black	L.P. Stm _____*
Low Pressure Condensate Return		Yellow	Black	L.P. Ret _____*
High Temperature Water Supply		Yellow	Black	H. Temp Wtr Sup
High Temperature Water Return		Yellow	Black	H. Temp Wtr Ret
Hot Water Heating Supply		Yellow	Black	H. W. Htg Sup
Hot Water Heating Return		Yellow	Black	H. W. Htg Ret
Gravity Condensate Return		Yellow	Black	Gravity Cond Ret
Pumped Condensate Return		Yellow	Black	Pumped Cond Ret
Vacuum Condensate Return		Yellow	Black	Vac Cond Ret
Fuel Oil - Grade		Green	White	Fuel Oil-Grade ____*
Boiler Water Sampling		Yellow	Black	Sample
Chemical Feed		Yellow	Black	Chem Feed
Continuous Blow-Down		Yellow	Black	Cont. B D
Pumped Condensate		Black		Pump Cond
Pump Recirculating		Yellow	Black	Pump-Recirc.
Vent Line		Yellow	Black	Vent
Alkali		Yellow	Black	Alk
Bleach		Yellow	Black	Bleach
Detergent		Yellow	Black	Det

Liquid Supply		Yellow	Black	Liq Sup
Reuse Water		Yellow	Black	Reuse Wtr
Cold Water (Domestic)	White	Green	White	C.W. Dom
Hot Water (Domestic)				
Supply	White	Yellow	Black	H.W. Dom
Return	White	Yellow	Black	H.W. Dom Ret
Tempered Water	White	Yellow	Black	Temp. Wtr
Ice Water				
Supply	White	Green	White	Ice Wtr
Return	White	Green	White	Ice Wtr Ret
Reagent Grade Water		Green	White	RG
Reverse Osmosis		Green	White	RO
Sanitary Waste		Green	White	San Waste
Sanitary Vent		Green	White	San Vent
Storm Drainage		Green	White	St Drain
Pump Drainage		Green	White	Pump Disch
Chemical Resistant Pipe				
Waste		Yellow	Black	Acid Waste
Vent		Yellow	Black	Acid Vent
Atmospheric Vent		Green	White	ATV
Silver Recovery		Green	White	Silver Rec
Oral Evacuation		Green	White	Oral Evac
Fuel Gas		Yellow	Black	Gas
Fire Protection Water				
Sprinkler		Red	White	Auto Spr
Standpipe		Red	White	Stand
Sprinkler		Red	White	Drain

Hot Water Supply Domestic/Solar Water H.W. Sup Dom/SW
Hot Water Return Domestic/Solar Water H.W. Ret Dom/SW

7. Electrical Conduits containing feeders over 600 volts, paint legends using 50 mm (2 inch) high black numbers and letters, showing the voltage class rating. Provide legends where conduits pass through walls and floors and at maximum 6100 mm (20 foot) intervals in between. Use labels with yellow background with black border and words Danger High Voltage Class, // 5000 // 15000 // 25000 //.

B. Fire and Smoke Partitions:

1. Identify partitions above ceilings on both sides of partitions except within shafts in letters not less than 64 mm (2 1/2 inches) high.
 2. Stenciled message: "SMOKE BARRIER" or, "FIRE BARRIER" as applicable.
 3. Locate not more than 6100 mm (20 feet) on center on corridor sides of partitions, and with a least one message per room on room side of partition.
 4. Use semigloss paint of color that contrasts with color of substrate.
- C. Identify columns in pipe basements and interstitial space:
1. Apply stenciled number and letters to correspond with grid numbering and lettering shown.
 2. Paint numbers and letters 100 mm (4 inches) high, locate 450 mm (18 inches) below overhead structural slab.
 3. Apply on four sides of interior columns and on inside face only of exterior wall columns.
 4. Color:
 - a. Use black on concrete columns.
 - b. Use white or contrasting color on steel columns.

3.14 PROTECTION CLEAN UP, AND TOUCH-UP

- A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.
- B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.
- C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

APPENDIX

Coordinate the following abbreviations used in Section 09 91 00, PAINTING, with other Sections, especially Section 09 06 00, SCHEDULE FOR FINISHES and other COATING SECTIONS listed. Use the same abbreviation and terms consistently.

Paint or coating Abbreviation

Acrylic Emulsion AE (MPI 10 - flat/MPI 11 - semigloss/MPI 119 - gloss)

Alkyd Flat Ak (MPI 49)

Alkyd Gloss Enamel G (MPI 48)

Alkyd Semigloss Enamel SG (MPI 47)

Aluminum Paint AP (MPI 1)

Cementitious Paint CEP (TT-P-1411)

Exterior Latex EL??(MPI 10 / 11 / 119)??

Exterior Oil EO (MPI 9 - gloss/MPI 8 - flat/MPI 94 - semigloss)
Epoxy Coating EC (MPI 77 - walls, floors/MPI 108 - CMU, concrete)
Fire Retardant Paint FR (MPI 67)
Fire Retardant Coating (Clear) FC (MPI 66, intumescent type)
Floor Enamel FE (MPI 27 - gloss/MPI 59 - eggshell)
Heat Resistant Paint HR (MPI 22)
Latex Emulsion LE (MPI 53, flat/MPI 52, eggshell/MPI 54, semigloss/MPI
114, gloss Level 6)
Latex Flat LF (MPI 138)
Latex Gloss LG (MPI 114)
Latex Semigloss SG (MPI 141)
Latex Low Luster LL (MPI 139)
Plastic Floor Coating PL
Polyurethane Varnish PV (MPI 31 - gloss/MPI 71 - flat)
Rubber Paint RF (CID-A-A-3120 - Paint for Swimming Pools (RF)).
Water Paint, Cement WPC (CID-A-A-1555 - Water Paint, Powder).
Wood Stain WS (MPI 90)

Verify abbreviations used in the following coating sections:

Section 09 96 59, HIGH-BUILD GLAZED COATINGS GC
Section 09 94 19, MULTICOLOR INTERIOR FINISHING MC

- - - E N D - - -

**SECTION 10 26 00
WALL AND DOOR PROTECTION**

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies handrail/wall guard combinations, corner guards and high impact wall covering.

1.2 RELATED WORK

- A. Structural steel corner guards: Section 05 50 00, METAL FABRICATIONS.
- B. Armor plates and kick plates not specified in this section: Section 08 71 00, DOOR HARDWARE.
- C. Color and texture of aluminum and resilient material: Construction Documents, sheet AE-601, SCHEDULE FOR FINISHES.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings: Show design and installation details.
- C. Manufacturer's Literature and Data:
 - 1. Handrail/Wall Guard Combinations.
 - 2. Corner Guards.
 - 3. High Impact Wall covering
- D. Test Report: Showing that resilient material complies with specified fire and safety code requirements.

1.4 DELIVERY AND STORAGE

- A. Deliver materials to the site in original sealed packages or containers marked with the name and brand, or trademark of the manufacturer.
- B. Protect from damage from handling and construction operations before, during and after installation.
- C. Store in a dry environment of approximately 21° C (70 degrees F) for at least 48 hours prior to installation.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
 - B221-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Shapes, and Tubes
 - D256-06.....Impact Resistance of Plastics

D635-06.....Rate of Burning and/or Extent and Time of
Burning of Self-Supporting Plastics in a
Horizontal Position

E84-09.....Surface Burning Characteristics of Building
Materials

C. The National Association of Architectural Metal Manufacturers (NAAMM):
AMP 500-06.....Metal Finishes Manual

D. National Fire Protection Association (NFPA):
80-10.....Standard for Fire Doors and Windows

E. Society of American Automotive Engineers (SAE):
J 1545-05.....Instrumental Color Difference Measurement for
Exterior Finishes.

F. Underwriters Laboratories Inc. (UL):
Annual Issue.....Building Materials Directory

1.6 MAINTENANCE MATERIAL SUBMITTALS

A. Furnish extra materials that match products installed and that are
packaged with protective covering for storage and identified with labels
describing contents.

1. Wall Guard and Handrail Covers: Full-size plastic covers of maximum
length equal to 2 percent of each type, color, and texture of units
installed, but no fewer than two, 8-foot- (2.4-m-) long units.

2. Corner-Guards Covers: Full-size plastic covers of maximum length
equal to 2 percent of each type, color, and texture of units
installed, but no fewer than two, 4-foot- (1.2-m-) long units.

PART 2 - PRODUCTS

2.1 MATERIALS

A. Stainless Steel: ASTM A167, Type 302B.

B. Aluminum Extruded: ASTM B221, Alloy 6063, Temper T5 or T6.

C. Resilient Material:

1. Extruded and injection molded acrylic vinyl or extruded polyvinyl
chloride meeting following requirements:

a. Minimum impact resistance of 1197 ps (25 ft lbs per sq.ft) when
tested in accordance with ASTM D256 (Izod impact, ft.lbs. per inch
notch).

- b. Class 1 fire rating when tested in accordance with ASTM E84, having a maximum flame spread of 25 and a smoke developed rating of 450 or less.
- c. Rated self extinguishing when tested in accordance with ASTM D635.
- d. Material shall be labeled and tested by Underwriters Laboratories or other approved independent testing laboratory.
- e. Integral color with all colored components matched in accordance with SAE J 1545 to within plus or minus 1.0 on the CIE-LCH scales.
- f. Same finish on exposed surfaces.

2.2 CORNER GUARDS

- A. Resilient, Shock-Absorbing Corner Guards: Surface mounted type of 30 mm (1-1/4 inch radius) formed to profile shown.
 - 1. Snap-on corner guard formed from resilient material, minimum 2 mm (0.078-inch) thick, free floating on a continuous 1.6 mm (0.063-inch) thick extruded aluminum retainer. Provide appropriate mounting hardware, cushions and base plates as required.
 - 2. Provide factory fabricated end closure caps at top and bottom of surface mounted corner guards.

2.3 WALL GUARDS AND HANDRAILS

- A. Resilient Wall Guards and Handrails:
 - 1. Handrail/Wall Guard Combination: Snap-on covers of resilient material, minimum 2 mm (0.078-inch) thick, shall be free-floated on a continuous, extruded aluminum retainer, minimum 1.8 mm (0.072-inch) thick, anchored to wall at maximum 760 mm (30 inches) on center.
 - 2. Provide handrails and wall guards (crash rails) with prefabricated and closure caps, inside and outside corners, concealed splices, cushions, mounting hardware and other accessories as required. End caps and corners shall be field adjustable to assure close alignment with handrails and wall guards (crash rails). Screw or bolt closure caps to aluminum retainer.

2.4 HIGH IMPACT WALL COVERING

- A. Fabricate from vinyl acrylic or polyvinyl chloride resilient material minimum 6mm (0.06 inch) thick designed specially for interior use.
- B. Coordinate with door protection material and supplier for proper fit, installation and color.
- C. Provide adhesive as recommended by the wall covering manufacturer.

2.6 FASTENERS AND ANCHORS

- A. Provide fasteners and anchors as required for each specific type of installation.
- B. Where type, size, spacing or method of fastening is not shown or specified, submit shop drawings showing proposed installation details.

2.7 FINISH

- A. In accordance with NAAMM AMP 500 series.
- B. Aluminum:
 - 1. Exposed aluminum: Chemically etched medium matte, with clear anodic coating, Class II Architectural, 0.4 mil thick.
 - 2. Concealed aluminum: Mill finish as fabricated, uniform in color and free from surface blemishes.
- C. Stainless Steel: NAAMM finish Number 4.
- D. Resilient Material: Embossed texture and color in accordance with SAE J 1545 and as specified on Construction Documents sheet AE-601, SCHEDULE FOR FINISHES.

PART 3 - INSTALLATION**3.1 RESILIENT CORNER GUARDS**

Install corner guards on walls in accordance with manufacturer's instructions.

3.2 RESILIENT HANDRAIL WALL GUARD COMBINATIONS

Secure guards to walls with mounting cushions, brackets and fasteners in accordance with manufacturer's details and instructions.

3.3 HIGH IMPACT WALL COVERING

- A. Surfaces to receive protection shall be clean, smooth and free of obstructions.
- C. Apply with adhesive in controlled environment according to manufacturer's recommendations.

- - - E N D - - -

SECTION 10 44 13
FIRE EXTINGUISHER CABINETS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section covers recessed fire extinguisher cabinets.

1.2 RELATED WORK

- A. Field Painting: Section 09 91 00, PAINTING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data: Fire extinguisher cabinet including installation instruction and rough opening required.

1.4 APPLICATION PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Testing and Materials (ASTM):
D4802-10Poly (Methyl Methacrylate) Acrylic Plastic Sheet

PART 2 - PRODUCTS

2.1 FIRE EXTINGUISHER CABINET

- A. Recessed type with flat trim of size and design shown.

2.2 FABRICATION

- A. Form body of cabinet from 0.9 mm (0.0359 inch) thick sheet steel.
- B. Fabricate door and trim from 1.2 mm (0.0478 inch) thick sheet steel with all face joints fully welded and ground smooth.
1. Glaze doors with 6 mm (1/4 inch) thick ASTM D4802, clear acrylic sheet, Category B-1, Finish 1.
 2. Design doors to open 180 degrees.
 3. Provide continuous hinge, pull handle, and adjustable roller catch.

2.3 FINISH

- A. Finish interior of cabinet body with baked-on semigloss white enamel.
- B. Finish door, frame with manufacturer's standard baked-on prime coat suitable for field painting.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install fire extinguisher cabinets in prepared openings and secure in accordance with manufacturer's instructions.

- B. Install cabinet so that bottom of cabinet is 975 mm (39 inches) above finished floor.

- - - E N D - - -

**SECTION 21 05 11
COMMON WORK RESULTS FOR FIRE SUPPRESSION**

PART 1 - GENERAL

1.1 DESCRIPTION

A. The requirements of this Section apply to all sections of Division 21.

B. Definitions:

1. Exposed: Piping and equipment exposed to view in finished rooms.
2. Option or optional: Contractor's choice of an alternate material or method.

1.2 QUALITY ASSURANCE

A. Products Criteria:

1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 3 years. See other specification sections for any exceptions.
2. Equipment Service: Products shall be supported by a service organization which maintains a complete inventory of repair parts and is located reasonably close to the site.
3. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be products of one manufacturer.
4. Assembled Units: Manufacturers of equipment assemblies, which use components made by others, assume complete responsibility for the final assembled product.
5. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
6. Asbestos products or equipment or materials containing asbestos shall not be used.

B. Manufacturer's Recommendations: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the Resident Engineer prior to installation. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material.

C. Warranty: Conform to terms of "Warranty of Construction", FAR clause 52.246-21.

D. Supports for sprinkler piping shall be in conformance with NFPA 13.

E. Supports for standpipe shall be in conformance with NFPA 14.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data: Submit under the pertinent section rather than under this section.
 - 1. Equipment and materials identification.
 - 2. Fire-stopping materials.
 - 3. Hangers, inserts, supports and bracing. Provide load calculations for variable spring and constant support hangers.
 - 4. Wall, floor, and ceiling plates.
- C. Coordination Drawings: In accordance with "SUBCONTRACTS AND WORK COORDINATION" VAAR 852.236-80A. Provide detailed layout drawings of all piping systems. In addition provide details of the following.
 - 1. Hangers, inserts, supports, and bracing.
 - 2. Pipe sleeves.
 - 3. Equipment penetrations of floors, walls, ceilings, or roofs.
- D. Maintenance Data and Operating Instructions:
 - 1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.
 - 2. Provide a listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment. Include in the listing belts for equipment.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - A36/A36M-2001.....Carbon Structural Steel
 - A575-96.....Steel Bars, Carbon, Merchant Quality, M-Grades R (2002)
 - E84-2003.....Standard Test Method for Burning Characteristics of Building Materials
 - E119-2000.....Standard Test Method for Fire Tests of Building Construction and Materials
- C. National Fire Protection Association (NFPA):
 - 90A.....Installation of Air Conditioning and Ventilating Systems
 - 101.....Life Safety Code

PART 2 - PRODUCTS**2.1 LIFTING ATTACHMENTS**

Provide equipment with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

2.2 EQUIPMENT AND MATERIALS IDENTIFICATION

- A. Use symbols, nomenclature and equipment numbers specified, shown on the drawings and shown in the maintenance manuals. Identification for piping is specified in Section 09 91 00, PAINTING.
- B. Interior (Indoor) Equipment: Engraved nameplates, with letters not less than 3/16-inch high of brass with black-filled letters, or rigid black plastic with white letters specified in Section 09 91 00, PAINTING permanently fastened to the equipment. Identify unit components such as coils, filters, fans, etc.
- C. Exterior (Outdoor) Equipment: Brass nameplates, with engraved black filled letters, not less than 3/16-inch high riveted or bolted to the equipment.
- D. Control Items: Label all temperature and humidity sensors, controllers and control dampers. Identify and label each item as they appear on the control diagrams.
- E. Valve Tags and Lists:
 - 1. Valve tags: Engraved black filled numbers and letters not less than 1/2-inch high for number designation, and not less than 1/4-inch for service designation on 19 gage 1-1/2 inches round brass disc, attached with brass "S" hook or brass chain.
 - 2. Valve lists: Typed or printed plastic coated card(s), sized 8-1/2 inches by 11 inches showing tag number, valve function and area of control, for each service or system. Punch sheets for a 3-ring notebook.
 - 3. Provide detailed plan for each floor of the building indicating the location and valve number for each valve. Identify location of each valve with a color coded thumb tack in ceiling.

2.3 FIRESTOPPING

Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke and gases where penetrations occur for piping.

2.4 GALVANIZED REPAIR COMPOUND

Mil. Spec. DOD-P-21035B, paint form.

2.5 PIPE PENETRATIONS

- A. Install sleeves during construction for other than blocked out floor openings for risers in mechanical bays.
- B. To prevent accidental liquid spills from passing to a lower level, provide the following:
 - 1. For sleeves: Extend sleeve one inch above finished floor and provide sealant for watertight joint.
 - 2. For blocked out floor openings: Provide 1-1/2 inch angle set in silicone adhesive around opening.
 - 3. For drilled penetrations: Provide 1-1/2 inch angle ring or square set in silicone adhesive around penetration.
- C. Penetrations are not allowed through beams or ribs, but may be installed in concrete beam flanges. Any deviation from this requirement must receive prior approval of Resident Engineer.
- D. Sheet Metal, Plastic, or Moisture-resistant Fiber Sleeves: Provide for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.
- E. Cast Iron or Zinc Coated Pipe Sleeves: Provide for pipe passing through exterior walls below grade. Make space between sleeve and pipe watertight with a modular or link rubber seal. Seal shall be applied at both ends of sleeve.
- F. Galvanized Steel or an alternate Black Iron Pipe with asphalt coating Sleeves: Provide for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. Provide sleeve for pipe passing through floor of mechanical rooms, laundry work rooms, and animal rooms above basement. Except in mechanical rooms, connect sleeve with floor plate.
- G. Brass Pipe Sleeves: Provide for pipe passing through quarry tile, terrazzo or ceramic tile floors. Connect sleeve with floor plate.
- H. Sleeves are not required for wall hydrants for fire department connections or in drywall construction.
- I. Sleeve Clearance: Sleeve through floors, walls, partitions, and beam flanges shall be one inch greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation. Interior openings shall be caulked tight with fire stopping material and sealant to prevent the spread of fire, smoke, and gases.
- J. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS.

2.6 TOOLS AND LUBRICANTS

- A. Furnish, and turn over to the Resident Engineer, special tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.
- B. Grease Guns with Attachments for Applicable Fittings: One for each type of grease required for each motor or other equipment.
- C. Tool Containers: Hardwood or metal, permanently identified for intended service and mounted, or located, where directed by the Resident Engineer.
- D. Lubricants: A minimum of one quart of oil, and one pound of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application.

2.7 WALL, FLOOR AND CEILING PLATES

- A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.
- B. Thickness: Not less than 3/32-inch for floor plates. For wall and ceiling plates, not less than 0.025-inch for up to 3-inch pipe, 0.035-inch for larger pipe.
- C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Use also where insulation ends on exposed water supply pipe drop from overhead. Provide a watertight joint in spaces where brass or steel pipe sleeves are specified.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Coordinate location of piping, sleeves, inserts, hangers, and equipment. Locate piping, sleeves, inserts, hangers, and equipment clear of windows, doors, openings, light outlets, and other services and utilities. Follow manufacturer's published recommendations for installation methods not otherwise specified.
- B. Protection and Cleaning:
 - 1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the Resident Engineer. Damaged or defective items in the opinion of the Resident Engineer, shall be replaced.

2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Tightly cover and protect equipment against dirt, water chemical, or mechanical injury. At completion of all work thoroughly exposed materials and equipment.
- C. Concrete and Grout: Use concrete and shrink compensating grout 3000 psi minimum, specified in Section 03 30 00, CAST-IN-PLACE CONCRETE.
- D. Install gages, valves, and other devices with due regard for ease in reading or operating and maintaining said devices. Locate and position gages to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.
- E. Work in Existing Building:
1. Perform as specified in Article, OPERATIONS AND STORAGE AREAS, Article, ALTERATIONS, and Article, RESTORATION of the Section 01 00 00, GENERAL REQUIREMENTS for relocation of existing equipment, alterations and restoration of existing building(s).
 2. As specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, OPERATIONS AND STORAGE AREAS, make alterations to existing service piping at times that will least interfere with normal operation of the facility.
 3. Cut required openings through existing masonry and reinforced concrete using diamond core drills. Use of pneumatic hammer type drills, impact type electric drills, and hand or manual hammer type drills, will be permitted only with approval of the Resident Engineer. Locate openings that will least effect structural slabs, columns, ribs or beams. Refer to the Resident Engineer for determination of proper design for openings through structural sections and opening layouts approval, prior to cutting or drilling into structure. After Resident Engineer's approval, carefully cut opening through construction no larger than absolutely necessary for the required installation.
- F. Switchgear Drip Protection: Every effort shall be made to eliminate the installation of pipe above electrical and telephone switchgear. If this is not possible, encase pipe in a second pipe with a minimum of joints.
- G. Inaccessible Equipment:
1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance,

equipment shall be removed and reinstalled or remedial action performed as directed at no additional cost to the Government.

2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as motors, fans, pumps, belt guards, transformers, high voltage lines, piping, and ductwork.

3.3 LUBRICATION

Field check and lubricate equipment requiring lubrication prior to initial operation.

3.4 STARTUP AND TEMPORARY OPERATION

Start up equipment as described in equipment specifications. Verify that vibration is within specified tolerance prior to extended operation. Temporary use of equipment is specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.

3.5 OPERATING AND PERFORMANCE TESTS

- A. Prior to the final inspection, perform required tests as specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TESTS and submit the test reports and records to the Resident Engineer.
- B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs or replacements, and repeat tests at no additional cost to the Government.
- C. When completion of certain work or system occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then make performance tests for heating systems and for cooling systems respectively during first actual seasonal use of respective systems following completion of work.

3.6 INSTRUCTIONS TO VA PERSONNEL

Provide in accordance with Article, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.

- - - E N D - - -

SECTION 21 13 13
WET-PIPE SPRINKLER SYSTEMS

PART 1 - GENERAL

1.1 SCOPE OF WORK

- A. Design, installation and testing shall be in accordance with NFPA 13 except for specified exceptions.
- B. The design and installation of a hydraulically calculated automatic wet system complete and ready for operation, for all project areas, except for areas indicated to have automatic dry pipe sprinkler system.
- C. The design and installation of a hydraulically calculated automatic dry pipe system complete and ready for operation for the exterior storage bays.
- D. Modification of the existing sprinkler system as indicated on the drawings and as further required by these specifications.

1.2 QUALITY ASSURANCE

- A. Installer Reliability: The installer shall possess a valid State of Ohio fire sprinkler contractor's license. The installer shall have been actively and successfully engaged in the installation of commercial automatic sprinkler systems for the past ten years.
- B. Materials and Equipment: All equipment and devices shall be of a make and type listed by UL and approved by FM, or other nationally recognized testing laboratory for the specific purpose for which it is used. All materials, devices, and equipment shall be approved by the VA.
- C. Submittals: Submit as one package in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Prepare detailed working drawings that are signed by a NICET Level III or Level IV Sprinkler Technician or stamped by a Registered Professional Engineer practicing in the field of Fire Protection Engineering. As Government review is for technical adequacy only, the installer remains responsible for correcting any conflicts with other trades and building construction that arise during installation. Partial submittals will not be accepted. Material submittals shall be approved prior to the purchase or delivery to the job site. Suitably bind submittals in notebooks or binders and provide index referencing the appropriate specification section. Submittals shall include, but not be limited to, the following:
 - 1. Qualifications:
 - a. Provide a copy of the installing contractors fire sprinkler and state contractors license.
 - b. Provide a copy of the NICET certification for the NICET Level III or Level IV Sprinkler Technician who prepared and signed the

detailed working drawings unless the drawings are stamped by a Registered Professional Engineer practicing in the field of Fire Protection Engineering.

2. Drawings: Submit detailed 1:100 (1/8 inch) scale (minimum) working drawings conforming to NFPA 13. Include a site plan showing the piping to the water supply test location.
3. Manufacturers Data Sheets:
 - a. For backflow preventers, provide flow test curves from UL, FM, or the Foundation for Hydraulic Research and Cross-Connection Control to verify pressure loss calculations.
 - b. Provide for materials and equipment proposed for use on the system. Include listing information and installation instructions in data sheets. Where data sheet describes items in addition to that item being submitted, clearly identify proposed item on the sheet.
4. Calculation Sheets: Submit hydraulic calculation sheets in tabular form conforming to the requirements and recommendations of NFPA 13.
5. Final Document Submittals: Provide as-built drawings, testing and maintenance instructions in accordance with the requirements in Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Submittals shall include, but not be limited to, the following:
 - a. One complete set of reproducible as-built drawings showing the installed system with the specific interconnections between the waterflow switch or pressure switch and the fire alarm equipment.
 - b. Complete, simple, understandable, step-by-step, testing instructions giving recommended and required testing frequency of all equipment, methods for testing all equipment, and a complete trouble shooting manual. Provide maintenance instructions on replacing any components of the system including internal parts, periodic cleaning and adjustment of the equipment and components with information as to the address and telephone number of both the manufacturer and the local supplier of each item.
 - c. Material and Testing Certificate: Upon completion of the sprinkler system installation or any partial section of the system, including testing and flushing, provide a copy of a completed Material and Testing Certificate as indicated in NFPA 13.
 - d. Certificates shall document all parts of the installation.
 - e. Instruction Manual: Provide one copy of the instruction manual covering the system in a flexible protective cover and mount in an accessible location adjacent to the riser.

- D. Design Basis Information: Provide design, materials, equipment, installation, inspection, and testing of the automatic sprinkler system in accordance with the requirements of NFPA 13. Recommendations in appendices shall be treated as requirements.
1. Perform hydraulic calculations in accordance with NFPA 13 utilizing the Area/Density method. Do not restrict design area reductions permitted for using quick response sprinklers throughout by the required use of standard response sprinklers in the areas identified in this section.
 2. Sprinkler Protection: To determining spacing and sizing, apply the following coverage classifications:
 - a. Light Hazard Occupancies: Patient care, treatment, and customary access areas.
 - b. Ordinary Hazard Group 1 Occupancies: Laboratories, Mechanical Equipment Rooms, Transformer Rooms, Electrical Switchgear Rooms, Electric Closets, Elevator Shafts, Elevator Machine Rooms.
 - c. Ordinary Hazard Group 2 Occupancies: Storage rooms, trash rooms, clean and soiled linen rooms, storage areas, building management storage.
 - d. Request clarification from the Government for any hazard classification not identified.
 3. Hydraulic Calculations: Calculated demand including hose stream requirements shall fall no less than 10 percent below the available water supply curve.
 4. Zoning:
 - a. For each sprinkler zone provide a control valve, flow switch and a test and drain assembly with pressure gauge.
 - b. Sprinkler zones shall conform to any smoke barrier zones shown on the drawings.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. National Fire Protection Association (NFPA): Use Latest Editions
 - 13-.....Installation of Sprinkler Systems
 - 101-.....Safety to Life from Fire in Buildings and Structures (Life Safety Code)
 - 170-.....Fire Safety Symbols
- C. Underwriters Laboratories, Inc. (UL): Use Latest Edition
Fire Protection Equipment Directory

- D. Factory Mutual Engineering Corporation (FM): Use Latest Editions Approval Guide
- E. Uniform Building Code - 1997
- F. Foundation for Cross-Connection Control and Hydraulic Research-2005

PART 2 PRODUCTS

2.1 PIPING & FITTINGS

- A. Sprinkler systems in accordance with NFPA 13.

2.2 VALVES

- A. Valves in accordance with NFPA 13.
- B. Do not use quarter turn ball valves for 2 inch or larger drain valves.
- C. The wet system control valve shall be a listed indicating type valve. Control valve shall be UL Listed and FM Approved for fire protection installations. System control valve shall be rated for normal system pressure but in no case less than 175 PSI. (No Substitutions Allowed).
- D. Automatic Ball Drips: Cast brass 3/4 inch in-line automatic ball drip with both ends threaded with iron pipe threads.
- E. Dry Pipe Valve: Flanged, iron body. Provide basic trimmings for alarm test bypass, water flow alarm, high and low pressure switches, gages, drain connections, drip funnel, accelerator and necessary pipe, fittings and accessories required to provide a complete installation.

2.3 SPRINKLERS

- A. All sprinklers except "institutional" type sprinklers shall be FM approved. Provide quick response sprinklers in all areas, except where specifically prohibited by their listing or approval.
 - 1. Cold storage rooms: Standard response dry pendant sprinklers.
 - 2. Elevator shafts and elevator machine rooms: Standard response sprinklers.
- B. Temperature Ratings: In accordance with NFPA 13, except as follows:
 - Sprinklers in elevator shafts, elevator pits, and elevator machine rooms: Intermediate temperature rated.

2.4 SPRINKLER CABINET

Provide sprinkler cabinet with the required number of sprinkler heads of all ratings and types installed, and a sprinkler wrench for each system. Locate adjacent to the riser. Sprinkler heads shall be installed in center of tile or center to center.

2.5 IDENTIFICATION SIGNS/HYDRAULIC PLACARDS

Plastic, steel or aluminum signs with white lettering on a red background with holes for easy attachment. Enter pertinent data for each system on the hydraulic placard.

2.6 SWITCHES:

- A. Contain in a weatherproof die cast/red baked enamel, oil resistant, aluminum housing with tamper resistant screws, 1/2 inch conduit entrance and necessary facilities for attachment to the valves. Provide two SPDT switches rated at 2.5 amps at 24 VDC.
- B. Water flow Alarm Switches: Mechanical, non-coded, non-accumulative retard and adjustable from 0 to 60 seconds minimum. Set flow switches at an initial setting between 20 and 30 seconds.
- C. Pressure Switches: Activation by any flow of water equal to or in excess of the discharge from one sprinkler. Water Flow Indicating Pressure Switch will activate an alarm by way of an alarm pressure switch. The alarm pressure switch shall be compatible with system devices. The alarm pressure enclosure shall be UL Listed and Factory Mutual Approved for the application in which it is used. The alarm pressure switch shall have the ability to be wired for Class A or Class B service.
- D. Valve Supervisory Switches for Ball and Butterfly Valves: May be integral with the valve.

2.7 GAUGES

Provide gauges as required by NFPA 13.

2.8 PIPE HANGERS AND SUPPORTS

Supports, hangers, etc., of an approved pattern placement to conform to NFPA 13. System piping shall be substantially supported to the building structure. The installation of hangers and supports shall adhere to the requirements set forth in NFPA 13, Standard for Installation of Sprinkler Systems. Materials used in the installation or construction of hangers and supports shall be listed and approved for such application. Hangers or supports not specifically listed for service shall be designed and bear the seal of a professional engineer.

2.9 WALL, FLOOR AND CEILING PLATES

Provide chrome plated steel escutcheon plates for exposed piping passing through walls, floors or ceilings.

PART 3 - EXECUTION**3.1 INSTALLATION**

- A. Installation shall be accomplished by the licensed contractor. Provide a qualified technician, experienced in the installation and operation of the type of system being installed, to supervise the installation and testing of the system.
- B. Installation of Piping: Accurately cut pipe to measurements established by the installer and work into place without springing or forcing. In

any situation where bending of the pipe is required, use a standard pipe-bending template. Install concealed piping in spaces that have finished ceilings. Where ceiling mounted equipment exists, such as in operating and radiology rooms, install sprinklers so as not to obstruct the movement or operation of the equipment. Sidewall heads may need to be utilized. Locate piping in stairways as near to the ceiling as possible to prevent tampering by unauthorized personnel, and to provide a minimum headroom clearance of 7'-6". To prevent an obstruction to egress, provide piping clearances in accordance with NFPA 101.

- C. Welding: Conform to the requirements and recommendations of NFPA 13.
- D. Drains: Pipe drains to discharge at safe points outside of the building or to sight cones attached to drains of adequate size to readily carry the full flow from each drain under maximum pressure. Do not provide a direct drain connection to sewer system or discharge into sinks. Install drips and drains where necessary and required by NFPA 13.
- E. Supervisory Switches: Provide supervisory switches for sprinkler control valves.
- F. Waterflow Alarm Switches: Install waterflow switch and adjacent valves in easily accessible locations.
- G. Inspector's Test Connection: Install and supply in conformance with NFPA 13, locate in a secured area, and discharge to the exterior of the building.
- H. Affix cutout disks, which are created by cutting holes in the walls of pipe for flow switches and non-threaded pipe connections to the respective waterflow switch or pipe connection near to the pipe from where they were cut.
- I. Sleeves: Provide for pipes passing through masonry or concrete. Provide space between the pipe and the sleeve in accordance with NFPA 13. Seal this space with a UL Listed through penetration fire stop material in accordance with Section 07 84 00, FIRESTOPPING. Where core drilling is used in lieu of sleeves, also seal space. Seal penetrations of walls, floors and ceilings of other types of construction, in accordance with Section 07 84 00, FIRESTOPPING.
- J. Provide pressure gauge at each water flow alarm switch location and at each main drain connection.
- K. Firestopping shall comply with Section 07 84 00, FIRESTOPPING.
- L. Securely attach identification signs to control valves, drain valves, and test valves. Locate hydraulic placard information signs at each sectional control valve where there is a zone water flow switch.

- M. Repairs: Repair damage to the building or equipment resulting from the installation of the sprinkler system by the installer at no additional expense to the Government.
- N. Interruption of Service: There shall be no interruption of the existing sprinkler protection, water, electric, or fire alarm services without prior permission of the Contracting Officer. Contractor shall develop an interim fire protection program where interruptions involve in occupied spaces. Request in writing at least one week prior to the planned interruption.

3.2 INSPECTION AND TEST

- A. Preliminary Testing: Flush newly installed systems prior to performing hydrostatic tests in order to remove any debris which may have been left as well as ensuring piping is unobstructed. Hydrostatically test system, including the fire department connections, as specified in NFPA 13, in the presence of the Contracting Officers Technical Representative (COTR) or his designated representative. Test and flush underground water line prior to performing these hydrostatic tests.
- B. Final Inspection and Testing: Subject system to tests in accordance with NFPA 13, and when all necessary corrections have been accomplished, advise COTR/Resident Engineer to schedule a final inspection and test. Connection to the fire alarm system shall have been in service for at least ten days prior to the final inspection, with adjustments made to prevent false alarms. Furnish all instruments, labor and materials required for the tests and provide the services of the installation foreman or other competent representative of the installer to perform the tests. Correct deficiencies and retest system as necessary, prior to the final acceptance. Include the operation of all features of the systems under normal operations in test.

3.3 INSTRUCTIONS

Furnish the services of a competent instructor for not less than two hours for instructing personnel in the operation and maintenance of the system, on the dates requested by the COTR/Resident Engineer.

- - - E N D - - -

**SECTION 22 05 11
COMMON WORK RESULTS FOR PLUMBING**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. The requirements of this Section shall apply to all sections of Division 22.
- B. Definitions:
 - 1. Exposed: Piping and equipment exposed to view in finished rooms.
 - 2. Option or optional: Contractor's choice of an alternate material or method.

1.2 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Section 07 84 00, FIRESTOPPING.
- D. Section 07 60 00, FLASHING AND SHEET METAL: Flashing for Wall and Roof Penetrations.
- E. Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.
- F. Section 23 09 23, DIRECT DIGITAL CONTROLS FOR HVAC.

1.3 QUALITY ASSURANCE

- A. Products Criteria:
 - 1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 3 years. However, digital electronics devices, software and systems such as controls, instruments, computer work station, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least three years.
 - 2. Equipment Service: There shall be permanent service organizations, authorized and trained by manufacturers of the equipment supplied, located within 160 km (100 miles) of the project. These organizations shall come to the site and provide acceptable service to restore operations within four hours of receipt of notification by phone, e-mail or fax in event of an emergency, such as the shut-down of equipment; or within 24 hours in a non-emergency. Names, mail and e-mail addresses and phone numbers of service organizations providing service under these conditions for (as applicable to the

- project): pumps, critical instrumentation, computer workstation and programming shall be submitted for project record and inserted into the operations and maintenance manual.
3. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
 4. The products and execution of work specified in Division 22 shall conform to the referenced codes and standards as required by the specifications. Local codes and amendments enforced by the local code official shall be enforced, if required by local authorities such as the natural gas supplier. If the local codes are more stringent, then the local code shall apply. Any conflicts shall be brought to the attention of the Resident Engineer (RE)/Contracting Officers Technical Representative (COTR).
 5. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be products of one manufacturer.
 6. Assembled Units: Manufacturers of equipment assemblies, which use components made by others, assume complete responsibility for the final assembled product.
 7. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
 8. Asbestos products or equipment or materials containing asbestos shall not be used.
- B. Welding: Before any welding is performed, contractor shall submit a certificate certifying that welders comply with the following requirements:
1. Qualify welding processes and operators for piping according to ASME "Boiler and Pressure Vessel Code", Section IX, "Welding and Brazing Qualifications".
 2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
 3. Certify that each welder has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.

4. All welds shall be stamped according to the provisions of the American Welding Society.
- C. Manufacturer's Recommendations: Where installation procedures or any part thereof are required to be in accordance with the recommendations of the manufacturer of the material being installed, printed copies of these recommendations shall be furnished to the Resident Engineer prior to installation. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations can be cause for rejection of the material.
- D. Execution (Installation, Construction) Quality:
 1. All items shall be applied and installed in accordance with manufacturer's written instructions. Conflicts between the manufacturer's instructions and the contract drawings and specifications shall be referred to the RE/COTR for resolution. Written hard copies or computer files of manufacturer's installation instructions shall be provided to the RE/COTR at least two weeks prior to commencing installation of any item.
 2. Complete layout drawings shall be required by Paragraph, SUBMITTALS. Construction work shall not start on any system until the layout drawings have been approved.
- E. Guaranty: Warranty of Construction, FAR clause 52.246-21.
- F. Plumbing Systems: IPC, International Plumbing Code.

1.4 SUBMITTALS

- A. Submittals shall be submitted in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Information and material submitted under this section shall be marked "SUBMITTED UNDER SECTION 22 05 11, COMMON WORK RESULTS FOR PLUMBING", with applicable paragraph identification.
- C. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements.
- D. If equipment is submitted which differs in arrangement from that shown, provide drawings that show the rearrangement of all associated systems. Approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.
- E. Prior to submitting shop drawings for approval, contractor shall certify in writing that manufacturers of all major items of equipment

have each reviewed drawings and specifications, and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.

- F. Upon request by Government, lists of previous installations for selected items of equipment shall be provided. Contact persons who will serve as references, with telephone numbers and e-mail addresses shall be submitted with the references.
- G. Manufacturer's Literature and Data: Manufacturer's literature shall be submitted under the pertinent section rather than under this section.
 - 1. Electric motor data and variable speed drive data shall be submitted with the driven equipment.
 - 2. Equipment and materials identification.
 - 3. Fire stopping materials.
 - 4. Hangers, inserts, supports and bracing. Provide load calculations for variable spring and constant support hangers.
 - 5. Wall, floor, and ceiling plates.
- H. Coordination Drawings: Complete consolidated and coordinated layout drawings shall be submitted for all new systems, and for existing systems that are in the same areas. The drawings shall include plan views, elevations and sections of all systems and shall be on a scale of not less than 1:32 (3/8-inch equal to one foot). Clearly identify and dimension the proposed locations of the principal items of equipment. The drawings shall clearly show the proposed location and adequate clearance for all equipment, piping, pumps, valves and other items. All valves, trap primer valves, water hammer arrestors, strainers, and equipment requiring service shall be provided with an access door sized for the complete removal of plumbing device, component, or equipment. Equipment foundations shall not be installed until equipment or piping until layout drawings have been approved. Detailed layout drawings shall be provided for all piping systems. In addition, details of the following shall be provided.
 - 1. Mechanical equipment rooms.
 - 2. Interstitial space.
 - 3. Hangers, inserts, supports, and bracing.
 - 4. Pipe sleeves.
 - 5. Equipment penetrations of floors, walls, ceilings, or roofs.

1.5 DELIVERY, STORAGE AND HANDLING

- A. Protection of Equipment:

1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage.
2. Damaged equipment shall be replaced with an identical unit as determined and directed by the RE/COTR. Such replacement shall be at no additional cost to the Government.
3. Interiors of new equipment and piping systems shall be protected against entry of foreign matter. Both inside and outside shall be cleaned before painting or placing equipment in operation.
4. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.

B. Cleanliness of Piping and Equipment Systems:

1. Care shall be exercised in the storage and handling of equipment and piping material to be incorporated in the work. Debris arising from cutting, threading and welding of piping shall be removed.
2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.
3. The interior of all tanks shall be cleaned prior to delivery and beneficial use by the Government. All piping shall be tested in accordance with the specifications and the International Plumbing Code (IPC), latest edition. All filters, strainers, fixture faucets shall be flushed of debris prior to final acceptance.
4. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

1.6 APPLICABLE PUBLICATIONS

- A. The publications listed below shall form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Mechanical Engineers (ASME):
Boiler and Pressure Vessel Code (BPVC):
SEC IX-2007.....Boiler and Pressure Vessel Code; Section IX,
Welding and Brazing Qualifications.
- C. American Society for Testing and Materials (ASTM):
A36/A36M-2008.....Standard Specification for Carbon Structural
Steel

- A575-96 (R 2007).....Standard Specification for Steel Bars, Carbon,
Merchant Quality, M-Grades R (2002)
- E84-2005.....Standard Test Method for Surface Burning
Characteristics of Building Materials
- E119-2008a.....Standard Test Methods for Fire Tests of
Building Construction and Materials
- D. Manufacturers Standardization Society (MSS) of the Valve and Fittings
Industry, Inc:
 - SP-58-02.....Pipe Hangers and Supports-Materials, Design and
Manufacture
 - SP 69-2003 (R 2004).....Pipe Hangers and Supports-Selection and
Application
- E. National Electrical Manufacturers Association (NEMA):
 - MG1-2003, Rev. 1-2007...Motors and Generators
- C. International Code Council, (ICC):
 - IBC-06, (R 2007).....International Building Code
 - IPC-06, (R 2007).....International Plumbing Code

PART 2 - PRODUCTS

2.1 FACTORY-ASSEMBLED PRODUCTS

- A. STANDARDIZATION OF COMPONENTS SHALL BE MAXIMIZED TO REDUCE SPARE PART requirements.
- B. Manufacturers of equipment assemblies that include components made by others shall assume complete responsibility for final assembled unit.
 - 1. All components of an assembled unit need not be products of same manufacturer.
 - 2. Constituent parts that are alike shall be products of a single manufacturer.
 - 3. Components shall be compatible with each other and with the total assembly for intended service.
 - 4. Contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.
- C. Components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a name plate securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.
- D. Major items of equipment, which serve the same function, shall be the same make and model

2.2 COMPATIBILITY OF RELATED EQUIPMENT

- A. Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational system that conforms to contract requirements.

2.3 EQUIPMENT AND MATERIALS IDENTIFICATION

A. Valve Tags and Lists:

1. Plumbing: All valves shall be provided with valve tags and listed on a valve list (Fixture stops not included).
2. Valve tags: Engraved black filled numbers and letters not less than 13 mm (1/2-inch) high for number designation, and not less than 6.4 mm (1/4-inch) for service designation on 19 gage, 38 mm (1-1/2 inches) round brass disc, attached with brass "S" hook or brass chain.
3. Valve lists: Valve lists shall be created using a word processing program and printed on plastic coated cards. The plastic coated valve list card(s), sized 216 mm (8-1/2 inches) by 280 mm (11 inches) shall show valve tag number, valve function and area of control for each service or system. The valve list shall be in a punched 3-ring binder notebook. A copy of the valve list shall be mounted in picture frames for mounting to a wall.
4. A detailed plan for each floor of the building indicating the location and valve number for each valve shall be provided. Each valve location shall be identified with a color coded sticker or thumb tack in ceiling.

2.8 FIRE STOPPING

- A. Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke and gases where penetrations occur for piping. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION, for pipe insulation.

2.9 GALVANIZED REPAIR COMPOUND

- A. Mil. Spec. DOD-P-21035B, paint.

2.10 PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS

- A. In lieu of the paragraph which follows, suspended equipment support and restraints may be designed and installed in accordance with the International Building Code (IBC), latest edition, and SECTION 13 05 41, SEISMIC RESTRAINT REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS. Submittals based on the International Building Code (IBC), latest

edition, SECTION 13 05 41 requirements, or the following paragraphs of this Section shall be stamped and signed by a professional engineer registered in a state where the project is located. The Support system of suspended equipment over 227 kg (500 pounds) shall be submitted for approval of the Resident Engineer in all cases. See these specifications for lateral force design requirements.

- B. Type Numbers Specified: MSS SP-58. For selection and application refer to MSS SP-69. Refer to Section 05 50 00, METAL FABRICATIONS, for miscellaneous metal support materials and prime coat painting.
- C. For Attachment to Concrete Construction:
 - 1. Concrete insert: Type 18, MSS SP-58.
 - 2. Self-drilling expansion shields and machine bolt expansion anchors: Permitted in concrete not less than 102 mm (4 inches) thick when approved by the Resident Engineer for each job condition.
 - 3. Power-driven fasteners: Permitted in existing concrete or masonry not less than 102 mm (4 inches) thick when approved by the Resident Engineer for each job condition.
- D. For Attachment to Steel Construction: MSS SP-58.
 - 1. Welded attachment: Type 22.
 - 2. Beam clamps: Types 20, 21, 28 or 29. Type 23 C-clamp may be used for individual copper tubing up to 23 mm (7/8-inch) outside diameter.
- E. Attachment to Metal Pan or Deck: As required for materials specified in Section 05 31 00, STEEL DECKING.
- F. For Attachment to Wood Construction: Wood screws or lag bolts.
- G. Hanger Rods: Hot-rolled steel, ASTM A36 or A575 for allowable load listed in MSS SP-58. For piping, provide adjustment means for controlling level or slope. Types 13 or 15 turn-buckles shall provide 38 mm (1-1/2 inches) minimum of adjustment and incorporate locknuts. All-thread rods are acceptable.
- H. Multiple (Trapeze) Hangers: Galvanized, cold formed, lipped steel channel horizontal member, not less than 41 mm by 41 mm (1-5/8 inches by 1-5/8 inches), 2.7 mm (No. 12 gage), designed to accept special spring held, hardened steel nuts. Trapeze hangers are not permitted for steam supply and condensate piping.
 - 1. Allowable hanger load: Manufacturers rating less 91kg (200 pounds).
 - 2. Guide individual pipes on the horizontal member of every other trapeze hanger with 6 mm (1/4-inch) U-bolt fabricated from steel rod. Provide Type 40 insulation shield, secured by two 13 mm

(1/2-inch) galvanized steel bands, or insulated calcium silicate shield for insulated piping at each hanger.

- I. Pipe Hangers and Supports: (MSS SP-58), use hangers sized to encircle insulation on insulated piping. Refer to Section 23 07 11, HVAC, PLUMBING, and BOILER PLANT INSULATION for insulation thickness. To protect insulation, provide Type 39 saddles for roller type supports or insulated calcium silicate shields. Provide Type 40 insulation shield or insulated calcium silicate shield at all other types of supports and hangers including those for insulated piping.

1. General Types (MSS SP-58):

- a. Standard clevis hanger: Type 1; provide locknut.
- b. Riser clamps: Type 8.
- c. Wall brackets: Types 31, 32 or 33.
- d. Roller supports: Type 41, 43, 44 and 46.
- e. Saddle support: Type 36, 37 or 38.
- f. Turnbuckle: Types 13 or 15.
- g. U-bolt clamp: Type 24.
- h. Copper Tube:
 - 1) Hangers, clamps and other support material in contact with tubing shall be painted with copper colored epoxy paint, plastic coated or taped with isolation tape to prevent electrolysis.
 - 2) For vertical runs use epoxy painted or plastic coated riser clamps.
 - 3) For supporting tube to strut: Provide epoxy painted pipe straps for copper tube or plastic inserted vibration isolation clamps.
 - 4) Insulated Lines: Provide pre-insulated calcium silicate shields sized for copper tube.
- i. Supports for plastic or glass piping: As recommended by the pipe manufacturer with black rubber tape extending one inch beyond steel support or clamp.

2. Plumbing Piping (Other Than General Types):

- a. Horizontal piping: Type 1, 5, 7, 9, and 10.
- b. Chrome plated piping: Chrome plated supports.
- c. Hangers and supports in pipe chase: Prefabricated system ABS self-extinguishing material, not subject to electrolytic action,

to hold piping, prevent vibration and compensate for all static and operational conditions.

- d. Blocking, stays and bracing: Angle iron or preformed metal channel shapes, 1.3 mm (18 gage) minimum.

J. Pre-insulated Calcium Silicate Shields:

1. Provide 360 degree water resistant high density 965 kPa (140 psi) compressive strength calcium silicate shields encased in galvanized metal.
2. Pre-insulated calcium silicate shields to be installed at the point of support during erection.
3. Shield thickness shall match the pipe insulation.
4. The type of shield is selected by the temperature of the pipe, the load it must carry, and the type of support it will be used with.
 - a. Shields for supporting cold water shall have insulation that extends a minimum of one inch past the sheet metal.
 - b. The insulated calcium silicate shield shall support the maximum allowable water filled span as indicated in MSS-SP 69. To support the load, the shields shall have one or more of the following features: structural inserts 4138 kPa (600 psi) compressive strength, an extra bottom metal shield, or formed structural steel (ASTM A36) wear plates welded to the bottom sheet metal jacket.
5. Shields may be used on steel clevis hanger type supports, roller supports or flat surfaces.

2.11 PIPE PENETRATIONS

- A. Pipe penetration sleeves shall be installed for all pipe other than rectangular blocked out floor openings for risers in mechanical bays.
- B. Pipe penetration sleeve materials shall comply with all fire stopping requirements for each penetration.
- C. To prevent accidental liquid spills from passing to a lower level, provide the following:
 1. For sleeves: Extend sleeve 25 mm (1 inch) above finished floor and provide sealant for watertight joint.
 2. For blocked out floor openings: Provide 40 mm (1-1/2 inch) angle set in silicone adhesive around opening.
 3. For drilled penetrations: Provide 40 mm (1-1/2 inch) angle ring or square set in silicone adhesive around penetration.

- C. Penetrations are not allowed through beams or ribs, but may be installed in concrete beam flanges. Any deviation from these requirements must receive prior approval of Resident Engineer.
- D. Sheet metal, plastic, or moisture resistant fiber sleeves shall be provided for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.
- E. Cast iron or zinc coated pipe sleeves shall be provided for pipe passing through exterior walls below grade. The space between the sleeve and pipe shall be made watertight with a modular or link rubber seal. The link seal shall be applied at both ends of the sleeve.
- F. Galvanized steel or an alternate black iron pipe with asphalt coating sleeves shall be for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. A galvanized steel Sleeve shall be provided for pipe passing through floor of mechanical rooms, laundry work rooms, and animal rooms above basement. Except in mechanical rooms, sleeves shall be connected with a floor plate.
- G. Brass Pipe Sleeves shall be provided for pipe passing through quarry tile, terrazzo or ceramic tile floors. The sleeve shall be connected with a floor plate.
- H. Sleeve clearance through floors, walls, partitions, and beam flanges shall be 25 mm (1 inch) greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation plus 25 mm (1 inch) in diameter. Interior openings shall be caulked tight with fire stopping material and sealant to prevent the spread of fire, smoke, and gases.
- I. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS.

2.12 TOOLS AND LUBRICANTS

- A. Furnish, and turn over to the Resident Engineer, special tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.
- B. Grease Guns with Attachments for Applicable Fittings: One for each type of grease required for each motor or other equipment.
- C. Tool Containers: metal, permanently identified for intended service and mounted, or located, where directed by the Resident Engineer.
- D. Lubricants: A minimum of 0.95 L (1 quart) of oil, and 0.45 kg (1 pound) of grease, of equipment manufacturer's recommended grade and type, in

unopened containers and properly identified as to use for each different application.

2.13 WALL, FLOOR AND CEILING PLATES

- A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.
- B. Thickness: Not less than 2.4 mm (3/32-inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025-inch) for up to 80 mm (3 inch) pipe, 0.89 mm (0.035-inch) for larger pipe.
- C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Wall plates shall be used where insulation ends on exposed water supply pipe drop from overhead. A watertight joint shall be provided in spaces where brass or steel pipe sleeves are specified.

2.14 ASBESTOS

Materials containing asbestos are not permitted.

PART 3 - EXECUTION

3.1 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING

- A. Location of piping, sleeves, inserts, hangers, and equipment, access provisions shall be coordinated with the work of all trades. Piping, sleeves, inserts, hangers, and equipment shall be located clear of windows, doors, openings, light outlets, and other services and utilities. Equipment layout drawings shall be prepared to coordinate proper location and personnel access of all facilities. The drawings shall be submitted for review.

Manufacturer's published recommendations shall be followed for installation methods not otherwise specified.

- B. Operating Personnel Access and Observation Provisions: All equipment and systems shall be arranged to provide clear view and easy access, without use of portable ladders, for maintenance and operation of all devices including, but not limited to: all equipment items, valves, filters, strainers, transmitters, sensors, control devices. All gages and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Maintenance and operating space and access provisions that are shown on the drawings shall not be changed nor reduced.

- C. Structural systems necessary for pipe and equipment support shall be coordinated to permit proper installation.
- D. Location of pipe sleeves, trenches and chases shall be accurately coordinated with equipment and piping locations.
- E. Cutting Holes:
 - 1. Holes through concrete and masonry shall be cut by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill will not be allowed, except as permitted by RE/COTR where working area space is limited.
 - 2. Holes shall be located to avoid interference with structural members such as beams or grade beams. Holes shall be laid out in advance and drilling done only after approval by RE/COTR. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to RE/COTR for approval.
 - 3. Waterproof membrane shall not be penetrated. Pipe floor penetration block outs shall be provided outside the extents of the waterproof membrane.
- F. Interconnection of Instrumentation or Control Devices: Generally, electrical and pneumatic interconnections are not shown but must be provided.
- G. Minor Piping: Generally, small diameter pipe runs from drips and drains, water cooling, and other service are not shown but must be provided.
- H. Protection and Cleaning:
 - 1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the Resident Engineer. Damaged or defective items in the opinion of the Resident Engineer, shall be replaced.
 - 2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Pipe openings, equipment, and plumbing fixtures shall be tightly covered against dirt or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.
- I. Concrete and Grout: Concrete and shrink compensating grout 25 MPa (3000 psi) minimum, specified in Section 03 30 00, CAST-IN-PLACE CONCRETE.

shall be used for all pad or floor mounted equipment. Gages, thermometers, valves and other devices shall be installed with due regard for ease in reading or operating and maintaining said devices. Thermometers and gages shall be located and positioned to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.

- J. Interconnection of Controls and Instruments: Electrical interconnection is generally not shown but shall be provided. This includes interconnections of sensors, transmitters, transducers, control devices, control and instrumentation panels, instruments and computer workstations. Comply with NFPA-70.
- K. Many plumbing systems interface with the HVAC control system. See the HVAC control points list and section 23 09 23 DIRECT DIGITAL CONTROLS FOR HVAC
- L. Work in Existing Building:
 - 1. Perform as specified in Article, OPERATIONS AND STORAGE AREAS, Article, ALTERATIONS, and Article, RESTORATION of the Section 01 00 00, GENERAL REQUIREMENTS for relocation of existing equipment, alterations and restoration of existing building(s).
 - 2. As specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, OPERATIONS AND STORAGE AREAS, make alterations to existing service piping at times that will cause the least interfere with normal operation of the facility.
- M. Work in Animal Research Areas: Seal all pipe penetrations with silicone sealant to prevent entrance of insects.
- N. Work in bathrooms, restrooms, housekeeping closets: All pipe penetrations behind escutcheons shall be sealed with plumbers putty.
- O. Switchgear Drip Protection: Every effort shall be made to eliminate the installation of pipe above electrical and telephone switchgear. If this is not possible, encase pipe in a second pipe with a minimum of joints.
- P. Inaccessible Equipment:
 - 1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, equipment shall be removed and reinstalled or remedial action performed as directed at no additional cost to the Government.
 - 2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling

under or over obstacles such as electrical conduit, motors, fans, pumps, belt guards, transformers, high voltage lines, piping, and ductwork.

3.2 TEMPORARY PIPING AND EQUIPMENT

- A. Continuity of operation of existing facilities may require temporary installation or relocation of equipment and piping. Temporary equipment or pipe installation or relocation shall be provided to maintain continuity of operation of existing facilities.
- B. The Contractor shall provide all required facilities in accordance with the requirements of phased construction and maintenance of service. All piping and equipment shall be properly supported, sloped to drain, operate without excessive stress, and shall be insulated where injury can occur to personnel by contact with operating facilities. The requirements of Para. 3.1 shall apply.
- C. Temporary facilities and piping shall be completely removed and any openings in structures sealed. Necessary blind flanges and caps shall be provided to seal open piping remaining in service.

3.3 RIGGING

- A. Openings in building structures shall be planned to accommodate design scheme.
- B. Alternative methods of equipment delivery may be offered and will be considered by Government under specified restrictions of phasing and service requirements as well as structural integrity of the building.
- C. All openings in the building shall be closed when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.
- D. Contractor shall provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for rigging purposes and support of equipment on structures shall be Contractor's full responsibility.
- E. Contractor shall check all clearances, weight limitations and shall provide a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, shall be at Contractor's cost, time and responsibility.
- F. Rigging plan and methods shall be referred to RE/COTR for evaluation prior to actual work.

3.4 PIPE AND EQUIPMENT SUPPORTS

- A. Where hanger spacing does not correspond with joist or rib spacing, use structural steel channels secured directly to joist and rib structure that will correspond to the required hanger spacing, and then suspend the equipment and piping from the channels. Holes shall be drilled or burned in structural steel ONLY with the prior written approval of the Resident Engineer.
- B. The use of chain pipe supports, wire or strap hangers; wood for blocking, stays and bracing, or hangers suspended from piping above shall not be permitted. Rusty products shall be replaced.
- C. Hanger rods shall be used that are straight and vertical. Turnbuckles for vertical adjustments may be omitted where limited space prevents use. A minimum of 15 mm (1/2-inch) clearance between pipe or piping covering and adjacent work shall be provided.
- D. For horizontal and vertical plumbing pipe supports, refer to the International Plumbing Code (IPC), latest edition, and these specifications.
- E. Overhead Supports:
 - 1. The basic structural system of the building is designed to sustain the loads imposed by equipment and piping to be supported overhead.
 - 2. Provide steel structural members, in addition to those shown, of adequate capability to support the imposed loads, located in accordance with the final approved layout of equipment and piping.
 - 3. Tubing and capillary systems shall be supported in channel troughs.
- F. Floor Supports:
 - 1. Provide concrete bases, concrete anchor blocks and pedestals, and structural steel systems for support of equipment and piping. Concrete bases and structural systems shall be anchored and doweled to resist forces under operating and seismic conditions (if applicable) without excessive displacement or structural failure.
 - 2. Bases and supports shall not be located and installed until equipment mounted thereon has been approved. Bases shall be sized to match equipment mounted thereon plus 50 mm (2 inch) excess on all edges. Structural drawings shall be reviewed for additional requirements. Bases shall be neatly finished and smoothed, shall have chamfered edges at the top, and shall be suitable for painting.
 - 3. All equipment shall be shimmed, leveled, firmly anchored, and grouted with epoxy grout. Anchor bolts shall be placed in sleeves,

anchored to the bases. Fill the annular space between sleeves and bolts with a grout material to permit alignment and realignment.

3.5 LUBRICATION

- A. All equipment and devices requiring lubrication shall be lubricated prior to initial operation. All devices and equipment shall be field checked for proper lubrication.
- B. All devices and equipment shall be equipped with required lubrication fittings. A minimum of one liter (one quart) of oil and 0.5 kg (one pound) of grease of manufacturer's recommended grade and type for each different application shall be provided. All materials shall be delivered to RE/COTR in unopened containers that are properly identified as to application.
- C. A separate grease gun with attachments for applicable fittings shall be provided for each type of grease applied.
- D. All lubrication points shall be accessible without disassembling equipment, except to remove access plates.
- E. All lubrication points shall be extended to one side of the equipment.

3.6 PLUMBING SYSTEMS DEMOLITION

- A. Rigging access, other than indicated on the drawings, shall be provided after approval for structural integrity by the RE/COTR. Such access shall be provided without additional cost or time to the Government. Where work is in an operating plant, approved protection from dust and debris shall be provided at all times for the safety of plant personnel and maintenance of plant operation and environment of the plant.
- B. In an operating plant, cleanliness and safety shall be maintained. The plant shall be kept in an operating condition. Government personnel will be carrying on their normal duties of operating, cleaning and maintaining equipment and plant operation. Work shall be confined to the immediate area concerned; maintain cleanliness and wet down demolished materials to eliminate dust. Dust and debris shall not be permitted to accumulate in the area to the detriment of plant operation. All flame cutting shall be performed to maintain the fire safety integrity of this plant. Adequate fire extinguishing facilities shall be available at all times. All work shall be performed in accordance with recognized fire protection standards. Inspections will be made by personnel of the VA Medical Center, and the Contractor shall follow all directives of the RE or COTR with regard to rigging, safety, fire safety, and maintenance of operations.

- C. Unless specified otherwise, all piping, wiring, conduit, and other devices associated with the equipment not re-used in the new work shall be completely removed from Government property. This includes all concrete equipment pads, pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. All openings shall be sealed after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with plans and specifications where specifically covered. Structural integrity of the building system shall be maintained. Reference shall also be made to the drawings and specifications of the other disciplines in the project for additional facilities to be demolished or handled.
- D. All valves including gate, globe, ball, butterfly and check, all pressure gages and thermometers with wells shall remain Government property and shall be removed and delivered to RE/COTR and stored as directed. The Contractor shall remove all other material and equipment, devices and demolition debris under these plans and specifications. Such material shall be removed from Government property expeditiously and shall not be allowed to accumulate.

3.7 CLEANING AND PAINTING

- A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.
- B. In addition, the following special conditions apply:
1. Cleaning shall be thorough. Solvents, cleaning materials and methods recommended by the manufacturers shall be used for the specific tasks. All rust shall be removed prior to painting and from surfaces to remain unpainted. Scratches, scuffs, and abrasions shall be repaired prior to applying prime and finish coats.
 2. The following Material And Equipment shall NOT be painted::
 - a. Motors, controllers, control switches, and safety switches.
 - b. Control and interlock devices.
 - c. Regulators.
 - d. Pressure reducing valves.
 - e. Control valves and thermostatic elements.
 - f. Lubrication devices and grease fittings.
 - g. Copper, brass, aluminum, stainless steel and bronze surfaces.

- h. Valve stems and rotating shafts.
 - i. Pressure gages and thermometers.
 - j. Glass.
 - k. Name plates.
- 3. Control and instrument panels shall be cleaned and damaged surfaces repaired. Touch-up painting shall be made with matching paint obtained from manufacturer or computer matched.
 - 4. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats.
 - 5. The final result shall be a smooth, even-colored, even-textured factory finish on all items. The entire piece of equipment shall be repainted, if necessary, to achieve this.

3.8 IDENTIFICATION SIGNS

- A. Laminated plastic signs, with engraved lettering not less than 5 mm (3/16-inch) high, shall be provided that designates equipment function, for all equipment, switches, motor controllers, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols shall correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.
- B. Pipe Identification: Refer to Section 09 91 00, PAINTING.

3.9 STARTUP AND TEMPORARY OPERATION

- A. Start up of equipment shall be performed as described in the equipment specifications. Vibration within specified tolerance shall be verified prior to extended operation. Temporary use of equipment is specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.

3.10 OPERATING AND PERFORMANCE TESTS

- A. Prior to the final inspection, all required tests shall be performed as specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TESTS and submit the test reports and records to the Resident Engineer.
- B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs or replacements, and repeat tests at no additional cost to the Government.
- C. When completion of certain work or system occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then make performance tests such systems

respectively during first actual seasonal use of respective systems following completion of work.

3.11 OPERATION AND MAINTENANCE MANUALS

- A. Provide four bound copies. The Operations and maintenance manuals shall be delivered to RE/COTR not less than 30 days prior to completion of a phase or final inspection.
- B. All new and temporary equipment and all elements of each assembly shall be included.
- C. Data sheet on each device listing model, size, capacity, pressure, speed, horsepower, impeller size, and other information shall be included.
- D. Manufacturer's installation, maintenance, repair, and operation instructions for each device shall be included. Assembly drawings and parts lists shall also be included. A summary of operating precautions and reasons for precautions shall be included in the Operations and Maintenance Manual.
- E. Lubrication instructions, type and quantity of lubricant shall be included.
- F. Schematic diagrams and wiring diagrams of all control systems corrected to include all field modifications shall be included.
- G. Set points of all interlock devices shall be listed.
- H. Trouble-shooting guide for the control system troubleshooting guide shall be inserted into the Operations and Maintenance Manual.
- I. The combustion control system sequence of operation corrected with submittal review comments shall be inserted into the Operations and Maintenance Manual.
- J. Emergency procedures.

3.12 INSTRUCTIONS TO VA PERSONNEL

Instructions shall be provided in accordance with Article, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.

- - - E N D - - -

**SECTION 22 14 00
FACILITY STORM DRAINAGE**

PART 1 - GENERAL

1.1 DESCRIPTION

This section describes the requirements for storm drainage systems, including piping and all necessary accessories as designated in this section.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Penetrations in rated enclosures.
- B. Section 09 91 00, PAINTING: Preparation and finish painting and identification of piping systems.
- C. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING: Pipe Hangers and Supports, Materials Identification.
- D. Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION: Pipe Insulation.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Piping.
 - 2. Roof Drains.
 - 3. Cleanouts.
 - 4. All items listed in Part 2 - Products.
- C. Detailed shop drawing of clamping device and extensions when required in connection with the waterproofing membrane.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standards Institute (ANSI).
- C. American Society of Mechanical Engineers (ASME): (Copyrighted Society)
 - A112.21.2m-83.....Roof Drains
 - A13.1-07.....Scheme for Identification of Piping Systems
 - B16.3-06.....Malleable Iron Threaded Fittings, Classes 150 and 300. B16.9-07 Factory-Made Wrought Steel Butt welding Fittings

- B16.11-05.....Forged Steel Fittings, Socket-Welding and
Threaded B16.12-98 (R 2006) Cast Iron
Threaded Drainage Fittings
- B16.15-06).....Cast Bronze Threaded Fittings, Class 125 and
250
- B16.18-01 (R 2005).....Cast Copper Alloy Solder-Joint Pressure
Fittings
- B16.22-01 (R 2005).....Wrought Copper and Copper Alloy Solder Joint
Pressure Fittings
- D. American Society for Testing and Materials (ASTM):
- A47-99 (R 2004).....Standard Specification for Steel Sheet,
Aluminum Coated, by the Hot-Dip Process
- A53-07.....Standard Specification for Pipe, Steel, Black
And Hot-Dipped, Zinc-coated Welded and Seamless
- A74-06.....Standard Specification for Cast Iron Soil Pipe
and Fittings
- A183-03).....Standard Specification for Carbon Steel Track
Bolts and Nuts
- A312-03.....Standard Specification for Seamless and Welded
Austenitic Stainless Steel Pipe
- A536-84(R 2004).....Standard Specification for Ductile Iron
Castings
- A733-03.....Standard Specification for Welded and Seamless
Carbon Steel and Austenitic Stainless Steel
Pipe Nipples
- B32-04.....Standard Specification for Solder Metal
- B61-08.....Standard Specification for Steam or Bronze
Castings
- B62-02.....Standard Specification for Composition Bronze
or Ounce Metal Castings
- B75-02.....Standard Specification for Seamless Copper Tube
- B88-03.....Standard Specification for Seamless Copper
Water Tube
- B306-02.....Standard Specification for Copper Drainage Tube
(DWV)
- B584-08.....Standard Specification for Copper Alloy Sand
Castings for General Applications

- B687-99.....Standard Specification for Brass, Copper, and
Chromium-Plated Pipe Nipples
- C564-06a.....Standard Specification for Rubber Gaskets for
Cast Iron Soil Pipe and Fittings
- D2000-08.....Standard Classification System for Rubber
Products in Automotive Applications
- D4101-07.....Standard Specification for Propylene Plastic
Injection and Extrusion Materials
- D2447-03.....Standard Specification for Polyethylene (PE)
Plastic Pipe, Schedule 40 and 80, Based on
Outside Diameter
- D2564-04e1.....Standard Specification for Solvent Cements for
Poly (Vinyl Chloride) (PVC) Plastic Pipe and
Fittings
- D2665-07.....Standard Specification for Poly (Vinyl
Chloride) (PVC) Plastic Drain, Waste, and Vent
Pipe and Fittings
- E. American Welding Society (AWS):
- A5.8-04.....Specification for Filler Metals for Brazing and
Braze Welding
- F. International Code Council (ICC):
- IPC-06.....International Plumbing Code
- G. Cast Iron Soil Pipe Institute (CISPI):
- 301-05.....Hubless Cast Iron Soil and Fittings for
Sanitary and Storm Drain, Waste, and Vent
Piping Applications
- 310-04.....Couplings for Use in Connection with Hubless
Cast Iron Soil and Fittings for Sanitary and
Storm Drain, Waste, and Vent Piping
Applications
- H. Manufacturers Standardization Society of the Valve and Fittings
Industry, Inc. (MSS):
- SP-72-99.....Standard for Ball Valves with Flanged or Butt
Welding For General Purpose
- SP-110-96.....Ball Valve Threaded, Socket Welding, Solder
Joint, Grooved and Flared Ends

PART 2 - PRODUCTS**2.1 STORM WATER DRAIN PIPING****A. Cast Iron Storm Pipe and Fittings:**

1. Cast iron storm pipe and fittings shall be used for the following applications:
 - a. Pipe buried in or in contact with earth.
 - b. Extension of pipe to a distance of approximately 1500 mm (5 feet) outside of building walls.
 - c. Interior storm piping above grade.
 - d. All mechanical equipment rooms or other areas containing mechanical air handling equipment.
2. The cast iron storm Pipe shall be bell and spigot, or hubless (plain end or no-hub) as required by selected jointing method.
3. The material for all pipe and fittings shall be cast iron soil pipe and fittings and shall conform to the requirements of CISPI Standard 301, ASTM A-888, or ASTM A-74.
4. Joints for hubless pipe and fittings shall conform to the manufacturer's installation instructions. Couplings for hubless joints shall conform to CISPI 310. Joints for hub and spigot pipe shall be installed with compression gaskets conforming to the requirements of ASTM Standard C-564 or be installed with leak and oakum.

B. Copper Tube, (DWV): May be used for piping above ground.

1. The copper DWV tube shall be drainage type, drawn temper conforming to ASTM B306.
2. The Copper drainage fittings shall be cast copper or wrought copper conforming to ASME B16.23 or ASME 16.29.
3. The joints shall be lead free, using a water flushable flux, and conforming to ASTM B32.

C. Polyvinyl Chloride (PVC)

1. Polyvinyl chloride storm sewer pipe and fittings are permitted for single story structures except for mechanical equipment rooms and other areas containing air handling equipment or hot water generation equipment.
2. Polyvinyl chloride storm sewer pipe and fittings shall be schedule 40 solid core sewer piping conforming to ASTM D1785 and D 2665, Sewer and Drain Series, with ends for solvent cemented joints.

3. Polyvinyl chloride joints shall be solvent welded socket type using solvent cement conforming to ASTM D2564.

D. Roof drain piping in locations where the outdoor conditions are subject to freezing shall be insulated.

2.2 SPECIALTY PIPE FITTINGS

A. Transition pipe couplings shall join piping with small differences in outside diameters or be of different materials. End connections shall be of the same size and compatible with the pipes being joined. The transition coupling shall be elastomeric, sleeve type reducing or transition pattern and include shear erring and corrosion resistant metal tension band and tightening mechanism on each end. The transition coupling sleeve coupling shall be of the following material:

1. For cast iron soil pipes, the sleeve material shall be rubber conforming to ASTM C564.
2. For PVC soil pipes, the sleeve material shall be elastomeric seal or PVC, conforming to ASTM F 477 or ASTM D5926.
3. For dissimilar pipes, the sleeve material shall be PVC conforming to ASTM D5926, or other material compatible with the pipe materials being joined.

B. The dielectric fittings shall conform to ASSE 1079 with a pressure rating of 860 kPa (125 psig) at a minimum temperature of 82°C (180°F). The end connection shall be solder joint copper alloy and threaded ferrous.

C. Dielectric flange insulating kits shall be of non conducting materials for field assembly of companion flanges with a pressure rating of 1035 kPa (150 psig). The gasket shall be neoprene or phenolic. The bolt sleeves shall be phenolic or polyethylene. The washers shall be phenolic with steel backing washers.

D. The dielectric nipples shall be electroplated steel nipple comply with ASTM F 1545 with a pressure ratings of 2070 kPa (300 psig) at 107°C (225°F). The end connection shall be male threaded. The lining shall be inert and noncorrosive propylene.

2.3 CLEANOUTS

A. Cleanouts shall be the same size as the pipe, up to 100 mm (4 inches); not less than 100 mm (4 inches) for larger pipe. Cleanouts shall be easily accessible and shall be gastight and watertight. A minimum clearance of 600 mm (24 inches) shall be provided for clearing a clogged storm sewer line.

- B. Floor cleanouts shall be gray iron housing with clamping device and round, secured, scoriated, gray iron cover conforming to ASME A112.36.2M. A gray iron ferrule with hubless, socket, inside calk or spigot connection and counter sunk, taper-thread, brass or bronze closure plug shall be included. The frame and cover material and finish shall be nickel-bronze copper alloy with a square shape. The cleanout shall be vertically adjustable for a minimum of 50 mm (2 inches). When a waterproof membrane is used in the floor system, clamping collars shall be provided on the cleanouts. Cleanouts shall consist of wye fittings and eighth bends with brass or bronze screw plugs. Cleanouts in the resilient tile floors, quarry tile and ceramic tile floors shall be provided with square top covers recessed for tile insertion. In the carpeted areas, carpet cleanout markers shall be provided. Two way cleanouts where shall be provided where indicated on the drawings and at each building exit. The loading classification for cleanouts in sidewalk areas or subject to vehicular traffic shall be heavy duty.
- C. Cleanouts shall be provided at or near the base of the vertical stacks with the cleanout plug located approximately 600 mm (24 inches) above the floor. The cleanouts shall be extended to the wall access cover. Cleanout shall consist of sanitary tees. Nickel bronze square frame and stainless steel cover with minimum opening of 150 mm by 150 mm (6 inch by 6 inch) shall be provided at each wall cleanout.
- D. In horizontal runs above grade, cleanouts shall consist of cast brass tapered screw plug in fitting or caulked/no hub cast iron ferrule. Plain end (no-hub) piping in interstitial space or above ceiling may use plain end (no-hub) blind plug and clamp.

2.4 ROOF DRAINS AND CONNECTIONS

- A. Roof Drains: Roof Drains (RD) shall be cast iron with clamping device for making watertight connection. Free openings through strainer shall be twice area of drain outlet. For roof drains not installed in connection with a waterproof membrane, a soft copper membrane shall be provided 300 mm (12 inches) in diameter greater than outside diameter of drain collar. An integral gravel stop shall be provided for drains installed on roofs having built up roofing covered with gravel or slag. Integral no-hub, soil pipe gasket or threaded outlet connection shall be provided.

1. Flat Roofs: The roof drain shall have a beehive or dome shaped strainer with integral flange not less than 300 mm (12 inches) in diameter. For an insulated roof, a roof drain with an adjustable drainage collar shall be provided, which can be raised or lowered to meet required insulation heights, sump receiver and deck clamp. The Bottom section shall serve as roof drain during construction before insulation is installed.
2. Protective Roof Membrane Insulation Assembly: The roof drain shall have a perforated stainless steel extension filter, non puncturing clamp ring, large sump with extra wide roof flange and deck clamp.
 - a. Non pedestrian Roofs: The roof drain shall have large polypropylene or aluminum locking dome.
 - b. Pedestrian Roof: The roof drain shall have a bronze promenade top 350 mm (14 inches) square, set in square secured frame support collar.
3. Roof Drains, Overflow: Roof Drains identified as overflow drains shall have a 50 mm (2 inch) water dam integral to the drain body.
4. Roof drains in areas subject to freezing shall have heat tape and shall be insulated.
- B. Expansion Joints: Expansions joints shall be heavy cast iron with cast brass or copper expansion sleeve having smooth bearing surface working freely against a packing ring held in place and under pressure of a bolted gland ring, forming a water and air tight flexible joint. Asbestos packing is prohibited.
- C. Interior Downspouts: An expansion joint shall be provided, specified above, at top of run on straight, vertical runs of downspout piping 12 m (40 feet) long or more.
- D. Downspout Nozzle: The downspout nozzle fitting shall be of brass, unfinished, with internal pipe thread for connection to downspout.

2.5 WATERPROOFING

- A. A sleeve flashing device shall be provided at points where pipes pass through membrane waterproofed floors or walls. The sleeve flashing device shall be manufactured, cast iron fitting with clamping device that forms a sleeve for the pipe floor penetration of the floor membrane. A galvanized steel pipe extension shall be included in the top of the fitting that will extend 50 mm (2 inches) above finished floor and galvanized steel pipe extension in the bottom of the fitting

that will extend through the floor slab. A waterproofed caulked joint shall be provided at the top hub.

B. Walls: See detail shown on drawings.

PART 3 - EXECUTION

3.1 PIPE INSTALLATION

- A. The pipe installation shall comply with the requirements of the International code and these specifications.
- B. Branch piping shall be installed from the piping system and connect to all drains and outlets.
- C. Pipe shall be round and straight. Cutting shall be done with proper tools. Pipe shall be reamed to full size after cutting.
- D. All pipe runs shall be laid out to avoid interference with other work.
- E. The piping shall be installed above accessible ceilings to allow for ceiling panel removal.
- F. Unless otherwise stated on the documents, minimum horizontal slope shall be one inch for every 1.22 m (4 feet) of pipe length.
- G. The piping shall be installed free of sags and bends.
- H. Seismic restraint shall be installed where required by code.
- I. Changes in direction for storm drainage piping shall be made using appropriate branches, bends and long sweep bends. Sanitary tees and short sweep $\frac{1}{4}$ bends may be used on vertical stacks if change in direction of flow is from horizontal to vertical. Long turn double wye branch and $\frac{1}{8}$ bend fittings shall be used if two fixtures are installed back to back or side by side with common drain pipe. Do not change direction of flow more than 90 degrees. Proper size of standard increaser and reducers shall be used if pipes of different sizes are connected. Reducing size of drainage piping in direction of flow is prohibited.
- J. Buried storm drainage piping shall be laid beginning at the low point of each system. Piping shall be installed true to grades and alignment indicated with unbroken continuity of invert. Hub ends shall be placed upstream. Required gaskets shall be installed according to manufacturer's written instruction for use of lubricants, cements, and other installation requirements.
- K. Cast iron piping shall be installed according to CISPI's "Cast Iron Soil Pipe and Fittings Handbook," Chapter IV, "Installation of Cast Iron Soil Pipe and Fittings"

L. Aboveground copper tubing shall be installed according to CDA's "Copper Tube Handbook".

M. Aboveground PVC piping shall be installed according to ASTM D2665.

Underground PVC piping shall be installed according to ASTM D2321.

3.2 JOINT CONSTRUCTION

A. Hub and spigot, cast iron piping with gasket joints shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for compression joints.

B. Hub and spigot, cast iron piping with calked joints shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for lead and oakum calked joints.

C. Hubless, cast iron piping shall be joined in accordance with CISPI's "Cast Iron Soil Pipe and Fittings Handbook" for hubless piping coupling joints.

D. For threaded joints, thread pipe with tapered pipe threads according to ASME B1.20.1. The threads shall be cut full and clean using sharp disc cutters. Threaded pipe ends shall be reamed to remove burrs and restored to full pipe inside diameter. Pipe fittings and valves shall be joined as follows:

1. Apply appropriate tape or thread compound to external pipe threads unless dry seal threading is required by the pipe service

2. Pipe sections with damaged threads shall be replaced with new sections of pipe.

E. Copper tube and fittings with soldered joints shall be joined according to ASTM B828. A water flushable, lead free flux conforming to ASTM B813 and a lead free alloy solder conforming to ASTM B32 shall be used.

F. for PVC piping, solvent cement joints shall be used for joints. All surfaces shall be cleaned and dry prior to applying the primer and solvent cement. Installation practices shall comply with ASTM F402. The joint shall conform to ASTM D2855 and ASTM D2665 appendixes.

3.3 SPECIALTY PIPE FITTINGS

A. Transition coupling shall be installed at pipe joints with small differences in pipe outside diameters.

B. Dielectric fittings shall be installed at connections of dissimilar metal piping and tubing.

3.4 PIPE HANGERS, SUPPORTS AND ACCESSORIES:

- A. All piping shall be supported according to the International plumbing code, Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, and these specifications.
- B. Hangers, supports, rods, inserts and accessories used for Pipe supports shall be shop coated with zinc Chromate primer paint. Electroplated copper hanger rods, hangers and accessories may be used with copper tubing.
- C. Horizontal piping and tubing shall be supported within 300 mm (12 inches) of each fitting or coupling.
- D. Horizontal cast iron piping shall be supported with the following maximum horizontal spacing and minimum hanger rod diameters:
 - 1. NPS 1-1/2 to NPS 2 (DN 40 to DN 50): 1500 mm (60 inches) with 10 mm (3/8 inch) rod.
 - 2. NPS 3 (DN 80): 1500 mm (60 inches) with 13 mm (1/2 inch) rod.
 - 3. NPS 4 to NPS 5 (DN 100 to DN 125): 1500 mm (60 inches) with 16 mm (5/8 inch) rod.
 - 4. NPS 6 to NPS 8 (DN 150 to DN 200): 1500 mm (60 inches) with 19 mm (3/4 inch) rod.
 - 5. NPS 10 to NPS 12 (DN 250 to DN 300): 1500 mm (60 inches) with 22 mm (7/8 inch) rod.
- E. The maximum support spacing for horizontal plastic shall be 1.22 m (4 feet).
- F. Vertical piping and tubing shall be supported at the base, at each floor, and at intervals no greater than 4.57 m (15 feet).
- G. In addition to the requirements in Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, floor, Wall and Ceiling Plates shall have the following characteristics:
 - 1. Solid or split unplated cast iron.
 - 2. All plates shall be provided with set screws.
 - 3. Height adjustable clevis type pipe hangers.
 - 4. Adjustable Floor Rests and Base Flanges shall be steel.
 - 5. Hanger Rods shall be low carbon steel, fully threaded or Threaded at each end with two removable nuts at each end for positioning rod and hanger and locking each in place.
 - 6. Riser Clamps shall be malleable iron or steel.
 - 7. Roller shall be cast iron.

8. Hangers and supports utilized with insulated pipe and tubing shall have 180 degree (min.) metal protection shield Centered on and welded to the hanger and support. The shield shall be 4 inches in length and be 16 gage steel. The shield shall be sized for the insulation.
- H. Miscellaneous Materials shall be provided as specified, required, directed or as noted on the drawings for proper installation of hangers, supports and accessories. If the vertical distance exceeds 6 m (20 feet) for cast iron pipe additional support shall be provided in the center of that span. All necessary auxiliary steel shall be provided to provide that support.
- I. Cast escutcheon with set screw shall be installed at each wall, floor and ceiling penetration in exposed finished locations and within cabinets and millwork.
- J. Penetrations:
1. Fire Stopping: Where pipes pass through fire partitions, fire walls, smoke partitions, or floors, a fire stop shall be installed that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING. Clearances between raceways and openings shall be completely filled and sealed with the fire stopping materials.
 2. Water proofing: At floor penetrations, Clearances around the pipe shall be completely sealed and made watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS.
- K. Piping shall conform to the following:
1. Storm Water Drain and Vent Drain to main stacks:

Pipe Size	Minimum Pitch
80 mm (3 inches) and smaller	2%
100 mm (4 inches) (4 inches) and larger	1%

3.5 TESTS

- A. Storm sewer system shall be tested either in its entirety or in sections.

B. Storm Water Drain tests shall be conducted before trenches are backfilled or fixtures are connected. A water test or air test shall be conducted, as directed.

1. If entire system is tested with water, tightly close all openings in pipes except the highest opening, and fill system with water to point of overflow. If system is tested in sections, tightly plug each opening except highest opening of section under test, fill each section with water and test with at least a 3 m (10 foot) head of water. In testing successive sections, test at least upper 3 m (10 feet) of next preceding section so that each joint or pipe except upper most 3 m (10 feet) of system has been submitted to a test of at least a 3 m (10 foot) head of water. Water shall be kept in the system, or in portion under test, for at least 15 minutes before inspection starts. System shall then be tight at all joints.
2. For an air test, an air pressure of 35 kPa (5 psi) gage shall be maintained for at least 15 minutes without leakage. A force pump and mercury column gage shall be used for the test.
3. Final Tests: Either one of the following tests may be used.
 - a. Smoke Test: After fixtures are permanently connected and traps are filled with water, fill entire drainage and vent systems with smoke under pressure of 1.3 kPa (1 inch of water) with a smoke machine. Chemical smoke is prohibited.
 - b. Peppermint Test: Introduce .06 liters (2 ounces) of peppermint into each line or stack.

- - - E N D - - -

**SECTION 22 40 00
PLUMBING FIXTURES**

PART 1 - GENERAL

1.1 DESCRIPTION

Plumbing fixtures, associated trim and fittings necessary to make a complete installation from wall or floor connections to rough piping, and certain accessories.

1.2 RELATED WORK

- A. Sealing between fixtures and other finish surfaces: Section 07 92 00, JOINT SEALANTS.
- B. Flush panel access doors: Section 08 31 13, ACCESS DOORS AND FRAMES.
- C. Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submit plumbing fixture information in an assembled brochure, showing cuts and full detailed description of each fixture.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American National Standard Institute (ANSI):
The American Society of Mechanical Engineers (ASME):
A112.6.1M-02(R2008).....Floor Affixed Supports for Off-the-Floor
Plumbing Fixtures for Public Use
A112.19.1M-08Enameled Cast Iron Plumbing Fixtures
A112.19.2M-03.....Vitreous China Plumbing Fixtures
A112.19.3-2001(R2008)...Stainless Steel Plumbing Fixtures (Designed for
Residential Use)
- C. American Society for Testing and Materials (ASTM):
A276-2010Stainless and Heat-Resisting Steel Bars and
Shapes
WW-P-541-E/GENPlumbing Fixtures with Amendment 1
- D. National Association of Architectural Metal Manufacturers (NAAMM): NAAMM
AMP 500-505
Metal Finishes Manual (1988)
- E. American Society of Sanitary Engineers (ASSE):
1016-05.....Performance Requirements for Individual
Thermostatic, Pressure Balancing and Combination

Pressure Balancing and Thermostatic Control

Valves for Individual Fixture Fittings

F. National Sanitation Foundation (NSF)/American National Standards

Institute (ANSI):

61-2009Drinking Water System Components-Health Effects

G. American with Disabilities Act (A.D.A) Section 4-19.4 Exposed Pipes and Surfaces

H. Environmental Protection Agency EPA PL 93-523 1974; A 1999) Safe Drinking Water Act.

I. International Building Code, ICC IPBC 2009.

PART 2 - PRODUCTS**2.1 STAINLESS STEEL**

A. Corrosion-resistant Steel (CRS):

1. Plate, Sheet and Strip: CRS flat products shall conform to chemical composition requirements of any 300 series steel specified in ASTM A276.

2. Finish: Exposed surfaces shall have standard polish (ground and polished) equal to NAAMM finish Number 4.

B. Die-cast zinc alloy products are prohibited.

2.2 STOPS

A. Provide lock-shield loose key or screw driver pattern angle stops, straight stops or stops integral with faucet, with each compression type faucet whether specifically called for or not, including sinks in wood and metal casework, laboratory furniture and pharmacy furniture. Locate stops centrally above or below fixture in accessible location.

B. Furnish keys for lock shield stops to Resident Engineer.

C. Supply from stops not integral with faucet shall be chrome plated copper flexible tubing or flexible stainless steel with inner core of non-toxic polymer.

D. Supply pipe from wall to valve stop shall be rigid threaded IPS copper alloy pipe, i.e. red brass pipe nipple, chrome plated where exposed.

E. Psychiatric Area: Provide stainless steel drain guard for all lavatories not installed in casework.

2.3 ESCUTCHEONS

Heavy type, chrome plated, with set screws. Provide for piping serving plumbing fixtures and at each wall, ceiling and floor penetrations in exposed finished locations and within cabinets and millwork.

2.4 LAMINAR FLOW CONTROL DEVICE

A. Smooth, bright stainless steel or satin finish, chrome plated metal laminar flow device shall provide non-aeration, clear, coherent laminar

flow that will not splash in basin. Device shall also have a flow control restrictor and have vandal resistant housing.

B. Flow Control Restrictor:

1. Capable of restricting flow from 95 ml/s to 110 ml/s (1.5 gpm to 1.7 gpm) for lavatories; 125 ml/s to 140 ml/s (2.0 gpm to 2.2 gpm) for sinks P-505 through P-520, P-524 and P-528; and 170 ml/s to 190 ml/s (2.75 gpm to 3.0 gpm) for dietary food preparation and rinse sinks or as specified.
2. Compensates for pressure fluctuation maintaining flow rate specified above within 10 percent between 170 kPa and 550 kPa (25 psi and 80 psi).
3. Operates by expansion and contraction, eliminates mineral/sediment build-up with self-cleaning action, and is capable of easy manual cleaning.

2.5 HYDRANT, HOSE BIBB AND MISCELLANEOUS DEVICES

- A. (P-801) Wall Hydrant: Cast bronze non-freeze hydrant with detachable T-handle. Brass operating rod within casing of bronze pipe of sufficient length to extend through wall and place valve inside building. Brass valve with coupling and union elbow having metal-to-metal seat. Valve rod and seat washer removable through face of hydrant; 19 mm (3/4 inch) hose thread on spout; 19 mm (3/4 inch) pipe thread on inlet. Finish may be rough; exposed surfaces shall be chrome plated. Set not less than 457 mm (18 inches) nor more than 914 mm (36 inches) above grade. On porches and platforms, set approximately 762 mm (30 inches) above finished floor. Provide integral vacuum breaker which automatically drains when shut off.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Fixture Setting: Opening between fixture and floor and wall finish shall be sealed as specified under Section 07 92 00, JOINT SEALANTS.
- B. Supports and Fastening: Secure all fixtures, equipment and trimmings to partitions, walls and related finish surfaces. Exposed heads of bolts and nuts in finished rooms shall be hexagonal, polished chrome plated brass with rounded tops.
- C. Through Bolts: For free standing marble and metal stud partitions refer to Section 10 21 13, TOILET COMPARTMENTS.
- D. Toggle Bolts: For hollow masonry units, finished or unfinished.
- E. Expansion Bolts: For brick or concrete or other solid masonry. Shall be 6 mm (1/4 inch) diameter bolts, and to extend at least 76 mm (3 inches) into masonry and be fitted with loose tubing or sleeves extending into

masonry. Wood plugs, fiber plugs, lead or other soft metal shields are prohibited.

F. Power Set Fasteners: May be used for concrete walls, shall be 6 mm (1/4 inch) threaded studs, and shall extend at least 32 mm (1 1/4 inches) into wall.

G. Tightly cover and protect fixtures and equipment against dirt, water and chemical or mechanical injury.

3.2 CLEANING

At completion of all work, fixtures, exposed materials and equipment shall be thoroughly cleaned.

3.3 WATERLESS URINAL

Manufacturer shall provide an operating manual and onsite training for the proper care and maintenance of the urinals.

3.4 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 22 08 00 - COMMISSIONING OF PLUMBING SYSTEMS for all inspection, startup, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 22 08 00 - COMMISSIONING OF PLUMBING SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - - E N D - - -

**SECTION 23 05 11
COMMON WORK RESULTS FOR HVAC**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. The requirements of this Section apply to all sections of Division 23.
- B. Definitions:
 - 1. Exposed: Piping, ductwork, and equipment exposed to view in finished rooms.
 - 2. Option or optional: Contractor's choice of an alternate material or method.
 - 3. RE: Resident Engineer
 - 4. COTR: Contracting Officer's Technical Representative.

1.2 QUALITY ASSURANCE

- A. Mechanical, electrical and associated systems shall be safe, reliable, efficient, durable, easily and safely operable and maintainable, easily and safely accessible, and in compliance with applicable codes as specified. The systems shall be comprised of high quality institutional-class and industrial-class products of manufacturers that are experienced specialists in the required product lines. All construction firms and personnel shall be experienced and qualified specialists in industrial and institutional HVAC
- B. Flow Rate Tolerance for HVAC Equipment: Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.
- C. Equipment Vibration Tolerance:
 - 1. Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT. Equipment shall be factory-balanced to this tolerance and re-balanced on site, as necessary.
 - 2. After HVAC air balance work is completed and permanent drive sheaves are in place, perform field mechanical balancing and adjustments required to meet the specified vibration tolerance.
- D. Products Criteria:
 - 1. Standard Products: Material and equipment shall be the standard products of a manufacturer regularly engaged in the manufacture of the products for at least 3 years (or longer as specified elsewhere). The design, model and size of each item shall have been in satisfactory and efficient operation on at least three installations for approximately three years. However, digital electronics devices, software and systems such as controls, instruments, computer work station, shall be the current generation of technology and basic design that has a proven satisfactory service record of at least

- three years. See other specification sections for any exceptions and/or additional requirements.
2. All items furnished shall be free from defects that would adversely affect the performance, maintainability and appearance of individual components and overall assembly.
 3. Conform to codes and standards as required by the specifications. Conform to local codes, if required by local authorities such as the natural gas supplier, if the local codes are more stringent than those specified. Refer any conflicts to the Resident Engineer.
 4. Multiple Units: When two or more units of materials or equipment of the same type or class are required, these units shall be products of one manufacturer.
 5. Assembled Units: Manufacturers of equipment assemblies, which use components made by others, assume complete responsibility for the final assembled product.
 6. Nameplates: Nameplate bearing manufacturer's name or identifiable trademark shall be securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped or otherwise permanently marked on each item of equipment.
 7. Asbestos products or equipment or materials containing asbestos shall not be used.
- E. Equipment Service Organizations:
1. HVAC: Products and systems shall be supported by service organizations that maintain a complete inventory of repair parts and are located within 50 miles to the site.
- F. HVAC Mechanical Systems Welding: Before any welding is performed, contractor shall submit a certificate certifying that welders comply with the following requirements:
1. Qualify welding processes and operators for piping according to ASME "Boiler and Pressure Vessel Code", Section IX, "Welding and Brazing Qualifications".
 2. Comply with provisions of ASME B31 series "Code for Pressure Piping".
 3. Certify that each welder has passed American Welding Society (AWS) qualification tests for the welding processes involved, and that certification is current.
- G. Execution (Installation, Construction) Quality:
1. Apply and install all items in accordance with manufacturer's written instructions. Refer conflicts between the manufacturer's instructions and the contract drawings and specifications to the Resident Engineer for resolution. Provide written hard copies or computer files of

manufacturer's installation instructions to the Resident Engineer at least two weeks prior to commencing installation of any item. Installation of the item will not be allowed to proceed until the recommendations are received. Failure to furnish these recommendations is a cause for rejection of the material.

2. Provide complete layout drawings required by Paragraph, SUBMITTALS. Do not commence construction work on any system until the layout drawings have been approved.

H. Upon request by Government, provide lists of previous installations for selected items of equipment. Include contact persons who will serve as references, with telephone numbers and e-mail addresses.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, and with requirements in the individual specification sections.
- B. Contractor shall make all necessary field measurements and investigations to assure that the equipment and assemblies will meet contract requirements.
- C. If equipment is submitted which differs in arrangement from that shown, provide drawings that show the rearrangement of all associated systems. Approval will be given only if all features of the equipment and associated systems, including accessibility, are equivalent to that required by the contract.
- D. Prior to submitting shop drawings for approval, contractor shall certify in writing that manufacturers of all major items of equipment have each reviewed drawings and specifications, and have jointly coordinated and properly integrated their equipment and controls to provide a complete and efficient installation.
- E. Submittals and shop drawings for interdependent items, containing applicable descriptive information, shall be furnished together and complete in a group. Coordinate and properly integrate materials and equipment in each group to provide a completely compatible and efficient.
- F. Layout Drawings:
 1. Submit complete consolidated and coordinated layout drawings for all new systems, and for existing systems that are in the same areas.
 2. The drawings shall include plan views, elevations and sections of all systems and shall be on a scale of not less than 1:32 (3/8-inch equal to one foot). Clearly identify and dimension the proposed locations of the principal items of equipment. The drawings shall clearly show

- locations and adequate clearance for all equipment, piping, valves, control panels and other items. Show the access means for all items requiring access for operations and maintenance. Provide detailed layout drawings of all piping and duct systems.
3. Do not install equipment foundations, equipment or piping until layout drawings have been approved.
 4. In addition, for HVAC systems, provide details of the following:
 - a. Mechanical equipment rooms.
 - b. Hangers, inserts, supports, and bracing.
 - c. Pipe sleeves.
 - d. Duct or equipment penetrations of floors, walls, ceilings, or roofs.
- G. Manufacturer's Literature and Data: Submit under the pertinent section rather than under this section.
1. Submit belt drive with the driven equipment. Submit selection data for specific drives when requested by the Resident Engineer.
 2. Submit electric motor data and variable speed drive data with the driven equipment.
 3. Equipment and materials identification.
 4. Fire-stopping materials.
 5. Hangers, inserts, supports and bracing. Provide load calculations for variable spring and constant support hangers.
 6. Wall, floor, and ceiling plates.
- H. HVAC Maintenance Data and Operating Instructions:
1. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Article, INSTRUCTIONS, for systems and equipment.
 2. Provide a listing of recommended replacement parts for keeping in stock supply, including sources of supply, for equipment. Include in the listing belts for equipment: Belt manufacturer, model number, size and style, and distinguished whether of multiple belt sets.
- I. Provide copies of approved HVAC equipment submittals to the Testing, Adjusting and Balancing Subcontractor.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Air Conditioning, Heating and Refrigeration Institute (AHRI):
430-2009.....Central Station Air-Handling Units

- C. American National Standard Institute (ANSI):
B31.1-2007.....Power Piping
- D. Rubber Manufacturers Association (ANSI/RMA):
IP-20-2007.....Specifications for Drives Using Classical
V-Belts and Sheaves
IP-21-2009.....Specifications for Drives Using Double-V
(Hexagonal) Belts
IP-22-2007.....Specifications for Drives Using Narrow V-Belts
and Sheaves
- E. Air Movement and Control Association (AMCA):
410-96.....Recommended Safety Practices for Air Moving
Devices
- F. American Society of Mechanical Engineers (ASME):
Boiler and Pressure Vessel Code (BPVC):
Section I-2007.....Power Boilers
Section IX-2007.....Welding and Brazing Qualifications
Code for Pressure Piping:
B31.1-2007.....Power Piping
- G. American Society for Testing and Materials (ASTM):
A36/A36M-08.....Standard Specification for Carbon Structural
Steel
A575-96(2007).....Standard Specification for Steel Bars, Carbon,
Merchant Quality, M-Grades
E84-10.....Standard Test Method for Surface Burning
Characteristics of Building Materials
E119-09c.....Standard Test Methods for Fire Tests of Building
Construction and Materials
- H. Manufacturers Standardization Society (MSS) of the Valve and Fittings
Industry, Inc:
SP-58-2009.....Pipe Hangers and Supports-Materials, Design and
Manufacture, Selection, Application, and
Installation
SP 69-2003.....Pipe Hangers and Supports-Selection and
Application
SP 127-2001.....Bracing for Piping Systems, Seismic - Wind -
Dynamic, Design, Selection, Application
- I. National Electrical Manufacturers Association (NEMA):
MG-1-2009.....Motors and Generators

J. National Fire Protection Association (NFPA):

- 31-06.....Standard for Installation of Oil-Burning
Equipment
- 54-09.....National Fuel Gas Code
- 70-08.....National Electrical Code
- 85-07.....Boiler and Combustion Systems Hazards Code
- 90A-09.....Standard for the Installation of Air
Conditioning and Ventilating Systems
- 101-09.....Life Safety Code

1.5 DELIVERY, STORAGE AND HANDLING

A. Protection of Equipment:

1. Equipment and material placed on the job site shall remain in the custody of the Contractor until phased acceptance, whether or not the Government has reimbursed the Contractor for the equipment and material. The Contractor is solely responsible for the protection of such equipment and material against any damage.
2. Place damaged equipment in first class, new operating condition; or, replace same as determined and directed by the Resident Engineer. Such repair or replacement shall be at no additional cost to the Government.
3. Protect interiors of new equipment and piping systems against entry of foreign matter. Clean both inside and outside before painting or placing equipment in operation.
4. Existing equipment and piping being worked on by the Contractor shall be under the custody and responsibility of the Contractor and shall be protected as required for new work.

B. Cleanliness of Piping and Equipment Systems:

1. Exercise care in storage and handling of equipment and piping material to be incorporated in the work. Remove debris arising from cutting, threading and welding of piping.
2. Piping systems shall be flushed, blown or pigged as necessary to deliver clean systems.
3. Clean interior of all tanks prior to delivery for beneficial use by the Government.
4. Boilers shall be left clean following final internal inspection by Government insurance representative or inspector.
5. Contractor shall be fully responsible for all costs, damage, and delay arising from failure to provide clean systems.

1.6 JOB CONDITIONS - WORK IN EXISTING BUILDING

- A. Building Operation: Government employees will be continuously operating and managing all facilities, including temporary facilities, that serve the medical center.
- B. Maintenance of Service: Schedule all work to permit continuous service as required by the medical center.
- C. Phasing of Work: Comply with all requirements shown on drawings or specified.
- D. Building Working Environment: Maintain the architectural and structural integrity of the building and the working environment at all times. Maintain the interior of building at 18 degrees C (65 degrees F) minimum. Limit the opening of doors, windows or other access openings to brief periods as necessary for rigging purposes. No storm water or ground water leakage permitted. Provide daily clean-up of construction and demolition debris on all floor surfaces and on all equipment being operated by VA.
- E. Acceptance of Work for Government Operation: As new facilities are made available for operation and these facilities are of beneficial use to the Government, inspections will be made and tests will be performed. Based on the inspections, a list of contract deficiencies will be issued to the Contractor. After correction of deficiencies as necessary for beneficial use, the Contracting Officer will process necessary acceptance and the equipment will then be under the control and operation of Government personnel.

PART 2 - PRODUCTS**2.1 FACTORY-ASSEMBLED PRODUCTS**

- A. Provide maximum standardization of components to reduce spare part requirements.
- B. Manufacturers of equipment assemblies that include components made by others shall assume complete responsibility for final assembled unit.
 - 1. All components of an assembled unit need not be products of same manufacturer.
 - 2. Constituent parts that are alike shall be products of a single manufacturer.
 - 3. Components shall be compatible with each other and with the total assembly for intended service.
 - 4. Contractor shall guarantee performance of assemblies of components, and shall repair or replace elements of the assemblies as required to deliver specified performance of the complete assembly.

- C. Components of equipment shall bear manufacturer's name and trademark, model number, serial number and performance data on a name plate securely affixed in a conspicuous place, or cast integral with, stamped or otherwise permanently marked upon the components of the equipment.
- D. Major items of equipment, which serve the same function, must be the same make and model. Exceptions will be permitted if performance requirements cannot be met.

2.2 COMPATIBILITY OF RELATED EQUIPMENT

Equipment and materials installed shall be compatible in all respects with other items being furnished and with existing items so that the result will be a complete and fully operational plant that conforms to contract requirements.

2.3 BELT DRIVES

- A. Type: ANSI/RMA standard V-belts with proper motor pulley and driven sheave. Belts shall be constructed of reinforced cord and rubber.
- B. Dimensions, rating and selection standards: ANSI/RMA IP-20 and IP-21.
- C. Minimum Horsepower Rating: Motor horsepower plus recommended ANSI/RMA service factor (not less than 20 percent) in addition to the ANSI/RMA allowances for pitch diameter, center distance, and arc of contact.
- D. Maximum Speed: 25 m/s (5000 feet per minute).
- E. Adjustment Provisions: For alignment and ANSI/RMA standard allowances for installation and take-up.
- F. Drives may utilize a single V-Belt (any cross section) when it is the manufacturer's standard.
- G. Multiple Belts: Matched to ANSI/RMA specified limits by measurement on a belt measuring fixture. Seal matched sets together to prevent mixing or partial loss of sets. Replacement, when necessary, shall be an entire set of new matched belts.
- H. Sheaves and Pulleys:
 - 1. Material: Pressed steel, or close grained cast iron.
 - 2. Bore: Fixed or bushing type for securing to shaft with keys.
 - 3. Balanced: Statically and dynamically.
 - 4. Groove spacing for driving and driven pulleys shall be the same.
- I. Drive Types, Based on ARI 435:
 - 1. Provide adjustable-pitch drive as follows:
 - a. Fan speeds up to 1800 RPM: 7.5 kW (10 horsepower) and smaller.
 - b. Fan speeds over 1800 RPM: 2.2 kW (3 horsepower) and smaller.
 - 2. Provide fixed-pitch drives for drives larger than those listed above.
 - 3. The final fan speeds required to just meet the system CFM and pressure requirements, without throttling, shall be determined by

adjustment of a temporary adjustable-pitch motor sheave or by fan law calculation if a fixed-pitch drive is used initially.

2.4 LIFTING ATTACHMENTS

Provide equipment with suitable lifting attachments to enable equipment to be lifted in its normal position. Lifting attachments shall withstand any handling conditions that might be encountered, without bending or distortion of shape, such as rapid lowering and braking of load.

2.5 ELECTRIC MOTORS

- A. All material and equipment furnished and installation methods shall conform to the requirements of Section 23 05 12, GENERAL MOTOR REQUIREMENTS FOR HVAC AND STEAM GENERATION EQUIPMENT; Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS; and, Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems. Provide special energy efficient premium efficiency type motors as scheduled.

2.6 VARIABLE SPEED MOTOR CONTROLLERS

- A. Refer to Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS for specifications.
- B. The combination of controller and motor shall be provided by the manufacturer of the driven equipment, such as pumps and fans, and shall be rated for 100 percent output performance. Multiple units of the same class of equipment, i.e. air handlers, fans, pumps, shall be product of a single manufacturer.
- C. Motors shall be premium efficiency type and be approved by the motor controller manufacturer. The controller-motor combination shall be guaranteed to provide full motor nameplate horsepower in variable frequency operation. Both driving and driven motor/fan sheaves shall be fixed pitch.
- D. Controller shall not add any current or voltage transients to the input AC power distribution system, DDC controls, sensitive medical equipment, etc., nor shall be affected from other devices on the AC power system.
- E. Controller shall be provided with the following operating features and accessories:
 - 1. Suitable for variable torque load.
 - 2. Provide thermal magnetic circuit breaker or fused switch with external operator and incoming line fuses. Unit shall be rated for minimum 25,000 AIC. Provide AC input filters on incoming power line. Provide output line reactors on line between drive and motor where the distance between the breaker and motor exceeds 50 feet.

2.7 EQUIPMENT AND MATERIALS IDENTIFICATION

- A. Use symbols, nomenclature and equipment numbers specified, shown on the drawings and shown in the maintenance manuals. Identification for piping is specified in Section 09 91 00, PAINTING.
- B. Interior (Indoor) Equipment: Engraved nameplates, with letters not less than 48 mm (3/16-inch) high of brass with black-filled letters, or rigid black plastic with white letters specified in Section 09 91 00, PAINTING permanently fastened to the equipment. Identify unit components such as coils, filters, fans, etc.
- C. Exterior (Outdoor) Equipment: Brass nameplates, with engraved black filled letters, not less than 48 mm (3/16-inch) high riveted or bolted to the equipment.
- D. Control Items: Label all temperature and humidity sensors, controllers and control dampers. Identify and label each item as they appear on the control diagrams.
- E. Valve Tags and Lists:
 - 1. HVAC and Boiler Plant: Provide for all valves.
 - 2. Valve tags: Engraved black filled numbers and letters not less than 13 mm (1/2-inch) high for number designation, and not less than 6.4 mm(1/4-inch) for service designation on 19 gage 38 mm (1-1/2 inches) round brass disc, attached with brass "S" hook or brass chain.
 - 3. Valve lists: Typed or printed plastic coated card(s), sized 216 mm(8-1/2 inches) by 280 mm (11 inches) showing tag number, valve function and area of control, for each service or system. Punch sheets for a 3-ring notebook.
 - 4. Provide detailed plan for each floor of the building indicating the location and valve number for each valve. Identify location of each valve with a color coded thumb tack in ceiling.

2.8 FIRESTOPPING

Section 07 84 00, FIRESTOPPING specifies an effective barrier against the spread of fire, smoke and gases where penetrations occur for piping and ductwork. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION, for firestop pipe and duct insulation.

2.9 GALVANIZED REPAIR COMPOUND

Mil. Spec. DOD-P-21035B, paint form.

2.10 HVAC PIPE AND EQUIPMENT SUPPORTS AND RESTRAINTS

- A. Vibration Isolators: Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
- B. Supports for Roof Mounted Items:

1. Equipment: Equipment rails shall be galvanized steel, minimum 1.3 mm (18 gauge), with integral baseplate, continuous welded corner seams, factory installed 50 mm by 100 mm (2 by 4) treated wood nailer, 1.3 mm (18 gauge) galvanized steel counter flashing cap with screws, built-in cant strip, (except for gypsum or tectum deck), minimum height 280 mm (11 inches). For surface insulated roof deck, provide raised cant strip to start at the upper surface of the insulation.
 2. Pipe/duct pedestals: Provide a galvanized Unistrut channel welded to U-shaped mounting brackets which are secured to side of rail with galvanized lag bolts.
- C. Pipe Supports: Comply with MSS SP-58. Type Numbers specified refer to this standard. For selection and application comply with MSS SP-69. Refer to Section 05 50 00, METAL FABRICATIONS, for miscellaneous metal support materials and prime coat painting requirements.
- D. Attachment to Concrete Building Construction:
1. Concrete insert: MSS SP-58, Type 18.
 2. Self-drilling expansion shields and machine bolt expansion anchors: Permitted in concrete not less than 102 mm (four inches) thick when approved by the Resident Engineer for each job condition.
 3. Power-driven fasteners: Permitted in existing concrete or masonry not less than 102 mm (four inches) thick when approved by the Resident Engineer for each job condition.
- E. Attachment to Steel Building Construction:
1. Welded attachment: MSS SP-58, Type 22.
 2. Beam clamps: MSS SP-58, Types 20, 21, 28 or 29. Type 23 C-clamp may be used for individual copper tubing up to 23mm (7/8-inch) outside diameter.
- F. Attachment to Metal Pan or Deck: As required for materials specified in Section 05 31 00, STEEL DECKING.
- G. Attachment to existing structure: Support from existing floor/roof frame.
- H. Hanger Rods: Hot-rolled steel, ASTM A36 or A575 for allowable load listed in MSS SP-58. For piping, provide adjustment means for controlling level or slope. Types 13 or 15 turn-buckles shall provide 38 mm (1-1/2 inches) minimum of adjustment and incorporate locknuts. All-thread rods are acceptable.
- I. Hangers Supporting Multiple Pipes (Trapeze Hangers): Galvanized, cold formed, lipped steel channel horizontal member, not less than 41 mm by 41 mm (1-5/8 inches by 1-5/8 inches), 2.7 mm (No. 12 gage), designed to

accept special spring held, hardened steel nuts. Not permitted for steam supply and condensate piping.

1. Allowable hanger load: Manufacturers rating less 91kg (200 pounds).
2. Guide individual pipes on the horizontal member of every other trapeze hanger with 6 mm (1/4-inch) U-bolt fabricated from steel rod. Provide Type 40 insulation shield, secured by two 13mm (1/2-inch) galvanized steel bands, or preinsulated calcium silicate shield for insulated piping at each hanger.

J. Supports for Piping Systems:

1. Select hangers sized to encircle insulation on insulated piping. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION for insulation thickness. To protect insulation, provide Type 39 saddles for roller type supports or preinsulated calcium silicate shields. Provide Type 40 insulation shield or preinsulated calcium silicate shield at all other types of supports and hangers including those for preinsulated piping.
2. Piping Systems except High and Medium Pressure Steam (MSS SP-58):
 - a. Standard clevis hanger: Type 1; provide locknut.
 - b. Riser clamps: Type 8.
 - c. Wall brackets: Types 31, 32 or 33.
 - d. Roller supports: Type 41, 43, 44 and 46.
 - e. Saddle support: Type 36, 37 or 38.
 - f. Turnbuckle: Types 13 or 15. Preinsulate.
 - g. U-bolt clamp: Type 24.
 - h. Copper Tube:
 - 1) Hangers, clamps and other support material in contact with tubing shall be painted with copper colored epoxy paint, plastic coated or taped with non adhesive isolation tape to prevent electrolysis.
 - 2) For vertical runs use epoxy painted or plastic coated riser clamps.
 - 3) For supporting tube to strut: Provide epoxy painted pipe straps for copper tube or plastic inserted vibration isolation clamps.
 - 4) Insulated Lines: Provide pre-insulated calcium silicate shields sized for copper tube.
 - i. Supports for plastic or glass piping: As recommended by the pipe manufacturer with black rubber tape extending one inch beyond steel support or clamp.
3. High and Medium Pressure Steam (MSS SP-58):
 - a. Provide eye rod or Type 17 eye nut near the upper attachment.

- b. Piping 50 mm (2 inches) and larger: Type 43 roller hanger. For roller hangers requiring seismic bracing provide a Type 1 clevis hanger with Type 41 roller attached by flat side bars.

2.11 PIPE PENETRATIONS

- A. Install sleeves during construction for other than blocked out floor openings for risers in mechanical bays.
- B. To prevent accidental liquid spills from passing to a lower level, provide the following:
 - 1. For sleeves: Extend sleeve 25 mm (one inch) above finished floor and provide sealant for watertight joint.
 - 2. For blocked out floor openings: Provide 40 mm (1-1/2 inch) angle set in silicone adhesive around opening.
 - 3. For drilled penetrations: Provide 40 mm (1-1/2 inch) angle ring or square set in silicone adhesive around penetration.
- C. Penetrations are not allowed through beams or ribs, but may be installed in concrete beam flanges. Any deviation from these requirements must receive prior approval of Resident Engineer.
- D. Sheet Metal, Plastic, or Moisture-resistant Fiber Sleeves: Provide for pipe passing through floors, interior walls, and partitions, unless brass or steel pipe sleeves are specifically called for below.
- E. Cast Iron or Zinc Coated Pipe Sleeves: Provide for pipe passing through exterior walls below grade. Make space between sleeve and pipe watertight with a modular or link rubber seal. Seal shall be applied at both ends of sleeve.
- F. Galvanized Steel or an alternate Black Iron Pipe with asphalt coating Sleeves: Provide for pipe passing through concrete beam flanges, except where brass pipe sleeves are called for. Provide sleeve for pipe passing through floor of mechanical rooms, laundry work rooms, and animal rooms above basement. Except in mechanical rooms, connect sleeve with floor plate.
- G. Brass Pipe Sleeves: Provide for pipe passing through quarry tile, terrazzo or ceramic tile floors. Connect sleeve with floor plate.
- H. Sleeves are not required for wall hydrants for fire department connections or in drywall construction.
- I. Sleeve Clearance: Sleeve through floors, walls, partitions, and beam flanges shall be one inch greater in diameter than external diameter of pipe. Sleeve for pipe with insulation shall be large enough to accommodate the insulation. Interior openings shall be caulked tight with fire stopping material and sealant to prevent the spread of fire, smoke, and gases.

J. Sealant and Adhesives: Shall be as specified in Section 07 92 00, JOINT SEALANTS.

2.12 DUCT PENETRATIONS

- A. Provide curbs for roof mounted piping, ductwork and equipment. Curbs shall be 18 inches high with continuously welded seams, built-in cant strip, interior baffle with acoustic insulation, curb bottom, hinged curb adapter.
- B. Provide firestopping for openings through fire and smoke barriers, maintaining minimum required rating of floor, ceiling or wall assembly. See section 07 84 00, FIRESTOPPING.

2.13 SPECIAL TOOLS AND LUBRICANTS

- A. Furnish, and turn over to the Resident Engineer, tools not readily available commercially, that are required for disassembly or adjustment of equipment and machinery furnished.
- B. Grease Guns with Attachments for Applicable Fittings: One for each type of grease required for each motor or other equipment.
- C. Refrigerant Tools: Provide system charging/Evacuation equipment, gauges, fittings, and tools required for maintenance of furnished equipment.
- D. Tool Containers: Hardwood or metal, permanently identified for intended service and mounted, or located, where directed by the Resident Engineer.
- E. Lubricants: A minimum of 0.95 L (one quart) of oil, and 0.45 kg (one pound) of grease, of equipment manufacturer's recommended grade and type, in unopened containers and properly identified as to use for each different application.

2.14 WALL, FLOOR AND CEILING PLATES

- A. Material and Type: Chrome plated brass or chrome plated steel, one piece or split type with concealed hinge, with set screw for fastening to pipe, or sleeve. Use plates that fit tight around pipes, cover openings around pipes and cover the entire pipe sleeve projection.
- B. Thickness: Not less than 2.4 mm (3/32-inch) for floor plates. For wall and ceiling plates, not less than 0.64 mm (0.025-inch) for up to 80 mm (3-inch pipe), 0.89 mm (0.035-inch) for larger pipe.
- C. Locations: Use where pipe penetrates floors, walls and ceilings in exposed locations, in finished areas only. Provide a watertight joint in spaces where brass or steel pipe sleeves are specified.

2.15 ASBESTOS

Materials containing asbestos are not permitted.

PART 3 - EXECUTION**3.1 ARRANGEMENT AND INSTALLATION OF EQUIPMENT AND PIPING**

- A. Coordinate location of piping, sleeves, inserts, hangers, ductwork and equipment. Locate piping, sleeves, inserts, hangers, ductwork and equipment clear of windows, doors, openings, light outlets, and other services and utilities. Prepare equipment layout drawings to coordinate proper location and personnel access of all facilities. Submit the drawings for review as required by Part 1. Follow manufacturer's published recommendations for installation methods not otherwise specified.
- B. Operating Personnel Access and Observation Provisions: Select and arrange all equipment and systems to provide clear view and easy access, without use of portable ladders, for maintenance and operation of all devices including, but not limited to: all equipment items, valves, filters, strainers, transmitters, sensors, control devices. All gages and indicators shall be clearly visible by personnel standing on the floor or on permanent platforms. Do not reduce or change maintenance and operating space and access provisions that are shown on the drawings.
- C. Equipment and Piping Support: Coordinate structural systems necessary for pipe and equipment support with pipe and equipment locations to permit proper installation.
- D. Location of pipe sleeves, trenches and chases shall be accurately coordinated with equipment and piping locations.
- E. Cutting Holes:
 - 1. Cut holes through concrete and masonry by rotary core drill. Pneumatic hammer, impact electric, and hand or manual hammer type drill will not be allowed, except as permitted by Resident Engineer where working area space is limited.
 - 2. Locate holes to avoid interference with structural members such as beams or grade beams. Holes shall be laid out in advance and drilling done only after approval by Resident Engineer. If the Contractor considers it necessary to drill through structural members, this matter shall be referred to Resident Engineer for approval.
 - 3. Do not penetrate membrane waterproofing.
- F. Interconnection of Instrumentation or Control Devices: Generally, electrical and pneumatic interconnections are not shown but must be provided.
- G. Minor Piping: Generally, small diameter pipe runs from drips and drains, water cooling, and other service are not shown but must be provided.

H. Electrical and Pneumatic Interconnection of Controls and Instruments:

This generally not shown but must be provided. This includes interconnections of sensors, transmitters, transducers, control devices, control and instrumentation panels, instruments and computer workstations. Comply with NFPA-70.

I. Protection and Cleaning:

1. Equipment and materials shall be carefully handled, properly stored, and adequately protected to prevent damage before and during installation, in accordance with the manufacturer's recommendations and as approved by the Resident Engineer. Damaged or defective items in the opinion of the Resident Engineer, shall be replaced.
2. Protect all finished parts of equipment, such as shafts and bearings where accessible, from rust prior to operation by means of protective grease coating and wrapping. Close pipe openings with caps or plugs during installation. Tightly cover and protect fixtures and equipment against dirt, water chemical, or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.

J. Concrete and Grout: Use concrete and shrink compensating grout 25 MPa (3000 psi) minimum, specified in Section 03 30 00, CAST-IN-PLACE CONCRETE.

K. Install gages, thermometers, valves and other devices with due regard for ease in reading or operating and maintaining said devices. Locate and position thermometers and gages to be easily read by operator or staff standing on floor or walkway provided. Servicing shall not require dismantling adjacent equipment or pipe work.

L. Work in Existing Building:

1. Perform as specified in Article, OPERATIONS AND STORAGE AREAS, Article, ALTERATIONS, and Article, RESTORATION of the Section 01 00 00, GENERAL REQUIREMENTS for relocation of existing equipment, alterations and restoration of existing building(s).
2. As specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, OPERATIONS AND STORAGE AREAS, make alterations to existing service piping at times that will least interfere with normal operation of the facility.
3. Cut required openings through existing masonry and reinforced concrete using diamond core drills. Use of pneumatic hammer type drills, impact type electric drills, and hand or manual hammer type drills, will be permitted only with approval of the Resident Engineer. Locate openings that will least effect structural slabs, columns, ribs or beams. Refer to the Resident Engineer for

determination of proper design for openings through structural sections and opening layouts approval, prior to cutting or drilling into structure. After Resident Engineer's approval, carefully cut opening through construction no larger than absolutely necessary for the required installation.

- M. Work in Animal Research Areas: Seal all pipe and duct penetrations with silicone sealant to prevent entrance of insects.
- N. Switchgear/Electrical Equipment Drip Protection: Every effort shall be made to eliminate the installation of pipe above electrical and telephone switchgear. If this is not possible, encase pipe in a second pipe with a minimum of joints. Installation of piping, ductwork, leak protection apparatus or other installations foreign to the electrical installation shall be located in the space equal to the width and depth of the equipment and extending from to a height of 1.8 m (6 ft.) above the equipment of to ceiling structure, whichever is lower (NFPA 70).
- O. Inaccessible Equipment:
 - 1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, equipment shall be removed and reinstalled or remedial action performed as directed at no additional cost to the Government.
 - 2. The term "conveniently accessible" is defined as capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as motors, fans, pumps, belt guards, transformers, high voltage lines, piping, and ductwork.

3.2 TEMPORARY PIPING AND EQUIPMENT

- A. Continuity of operation of existing facilities will generally require temporary installation or relocation of equipment and piping.
- B. The Contractor shall provide all required facilities in accordance with the requirements of phased construction and maintenance of service. All piping and equipment shall be properly supported, sloped to drain, operate without excessive stress, and shall be insulated where injury can occur to personnel by contact with operating facilities. The requirements of Paragraph 3.1 apply.
- C. Temporary facilities and piping shall be completely removed and any openings in structures sealed. Provide necessary blind flanges and caps to seal open piping remaining in service.

3.3 RIGGING

- A. Design is based on application of available equipment. Openings in building structures are planned to accommodate design scheme.

- B. Alternative methods of equipment delivery may be offered by Contractor and will be considered by Government under specified restrictions of phasing and maintenance of service as well as structural integrity of the building.
- C. Close all openings in the building when not required for rigging operations to maintain proper environment in the facility for Government operation and maintenance of service.
- D. Contractor shall provide all facilities required to deliver specified equipment and place on foundations. Attachments to structures for rigging purposes and support of equipment on structures shall be Contractor's full responsibility. Upon request, the Government will check structure adequacy and advise Contractor of recommended restrictions.
- E. Contractor shall check all clearances, weight limitations and shall offer a rigging plan designed by a Registered Professional Engineer. All modifications to structures, including reinforcement thereof, shall be at Contractor's cost, time and responsibility.
- F. Rigging plan and methods shall be referred to Resident Engineer for evaluation prior to actual work.
- G. Restore building to original condition upon completion of rigging work.

3.4 PIPE AND EQUIPMENT SUPPORTS

- A. Where hanger spacing does not correspond with joist or rib spacing, use structural steel channels secured directly to joist and rib structure that will correspond to the required hanger spacing, and then suspend the equipment and piping from the channels. Drill or burn holes in structural steel only with the prior approval of the Resident Engineer.
- B. Use of chain, wire or strap hangers; wood for blocking, stays and bracing; or, hangers suspended from piping above will not be permitted. Replace or thoroughly clean rusty products and paint with zinc primer.
- C. Use hanger rods that are straight and vertical. Turnbuckles for vertical adjustments may be omitted where limited space prevents use. Provide a minimum of 15 mm (1/2-inch) clearance between pipe or piping covering and adjacent work.
- D. HVAC Horizontal Pipe Support Spacing: Refer to MSS SP-69. Provide additional supports at valves, strainers, in-line pumps and other heavy components. Provide a support within one foot of each elbow.
- E. HVAC Vertical Pipe Supports:
 - 1. Up to 150 mm (6-inch pipe), 9 m (30 feet) long, bolt riser clamps to the pipe below couplings, or welded to the pipe and rests supports securely on the building structure.

2. Vertical pipe larger than the foregoing, support on base elbows or tees, or substantial pipe legs extending to the building structure.

F. Overhead Supports:

1. The basic structural system of the building is designed to sustain the loads imposed by equipment and piping to be supported overhead.
2. Provide steel structural members, in addition to those shown, of adequate capability to support the imposed loads, located in accordance with the final approved layout of equipment and piping.
3. Tubing and capillary systems shall be supported in channel troughs.

G. Floor Supports:

1. Provide concrete bases, concrete anchor blocks and pedestals, and structural steel systems for support of equipment and piping. Anchor and dowel concrete bases and structural systems to resist forces under operating and seismic conditions (if applicable) without excessive displacement or structural failure.
2. Do not locate or install bases and supports until equipment mounted thereon has been approved. Size bases to match equipment mounted thereon plus 50 mm (2 inch) excess on all edges. Boiler foundations shall have horizontal dimensions that exceed boiler base frame dimensions by at least 150 mm (6 inches) on all sides. Refer to structural drawings. Bases shall be neatly finished and smoothed, shall have chamfered edges at the top, and shall be suitable for painting.
3. All equipment shall be shimmed, leveled, firmly anchored, and grouted with epoxy grout. Anchor bolts shall be placed in sleeves, anchored to the bases. Fill the annular space between sleeves and bolts with a granular material to permit alignment and realignment.

3.5 MECHANICAL DEMOLITION

- A. Rigging access, other than indicated on the drawings, shall be provided by the Contractor after approval for structural integrity by the Resident Engineer. Such access shall be provided without additional cost or time to the Government. Where work is in an operating plant, provide approved protection from dust and debris at all times for the safety of plant personnel and maintenance of plant operation and environment of the plant.
- B. In an operating facility, maintain the operation, cleanliness and safety. Government personnel will be carrying on their normal duties of operating, cleaning and maintaining equipment and plant operation. Confine the work to the immediate area concerned; maintain cleanliness and wet down demolished materials to eliminate dust. Do not permit

debris to accumulate in the area to the detriment of plant operation. Perform all flame cutting to maintain the fire safety integrity of this plant. Adequate fire extinguishing facilities shall be available at all times. Perform all work in accordance with recognized fire protection standards. Inspection will be made by personnel of the VA Medical Center, and Contractor shall follow all directives of the RE or COTR with regard to rigging, safety, fire safety, and maintenance of operations.

- C. Completely remove all piping, wiring, conduit, and other devices associated with the equipment not to be re-used in the new work. This includes all pipe, valves, fittings, insulation, and all hangers including the top connection and any fastenings to building structural systems. Seal all openings, after removal of equipment, pipes, ducts, and other penetrations in roof, walls, floors, in an approved manner and in accordance with plans and specifications where specifically covered. Structural integrity of the building system shall be maintained. Reference shall also be made to the drawings and specifications of the other disciplines in the project for additional facilities to be demolished or handled.
- D. All valves including gate, globe, ball, butterfly and check, all pressure gages and thermometers with wells shall remain Government property and shall be removed and delivered to Resident Engineer and stored as directed. The Contractor shall remove all other material and equipment, devices and demolition debris under these plans and specifications. Such material shall be removed from Government property expeditiously and shall not be allowed to accumulate.

3.6 CLEANING AND PAINTING

- A. Prior to final inspection and acceptance of the plant and facilities for beneficial use by the Government, the plant facilities, equipment and systems shall be thoroughly cleaned and painted. Refer to Section 09 91 00, PAINTING.
- B. In addition, the following special conditions apply:
 - 1. Cleaning shall be thorough. Use solvents, cleaning materials and methods recommended by the manufacturers for the specific tasks. Remove all rust prior to painting and from surfaces to remain unpainted. Repair scratches, scuffs, and abrasions prior to applying prime and finish coats.
 - 2. Material And Equipment Not To Be Painted Includes:
 - a. Motors, controllers, control switches, and safety switches.
 - b. Control and interlock devices.

- c. Regulators.
 - d. Pressure reducing valves.
 - e. Control valves and thermostatic elements.
 - f. Lubrication devices and grease fittings.
 - g. Copper, brass, aluminum, stainless steel and bronze surfaces.
 - h. Valve stems and rotating shafts.
 - i. Pressure gauges and thermometers.
 - j. Glass.
 - k. Name plates.
- 3. Control and instrument panels shall be cleaned, damaged surfaces repaired, and shall be touched-up with matching paint obtained from panel manufacturer.
 - 4. Pumps, motors, steel and cast iron bases, and coupling guards shall be cleaned, and shall be touched-up with the same color as utilized by the pump manufacturer
 - 5. Temporary Facilities: Apply paint to surfaces that do not have existing finish coats.
 - 6. Paint shall withstand the following temperatures without peeling or discoloration:
 - a. Condensate and feedwater -- 38 degrees C (100 degrees F) on insulation jacket surface and 120 degrees C (250 degrees F) on metal pipe surface.
 - 7. Final result shall be smooth, even-colored, even-textured factory finish on all items. Completely repaint the entire piece of equipment if necessary to achieve this.

3.7 IDENTIFICATION SIGNS

- A. Provide laminated plastic signs, with engraved lettering not less than 5 mm (3/16-inch) high, designating functions, for all equipment, switches, motor controllers, relays, meters, control devices, including automatic control valves. Nomenclature and identification symbols shall correspond to that used in maintenance manual, and in diagrams specified elsewhere. Attach by chain, adhesive, or screws.
- B. Factory Built Equipment: Metal plate, securely attached, with name and address of manufacturer, serial number, model number, size, performance.
- C. Pipe Identification: Refer to Section 09 91 00, PAINTING.

3.8 MOTOR AND DRIVE ALIGNMENT

- A. Belt Drive: Set driving and driven shafts parallel and align so that the corresponding grooves are in the same plane.

- B. Direct-connect Drive: Securely mount motor in accurate alignment so that shafts are free from both angular and parallel misalignment when both motor and driven machine are operating at normal temperatures.

3.9 LUBRICATION

- A. Lubricate all devices requiring lubrication prior to initial operation. Field-check all devices for proper lubrication.
- B. Equip all devices with required lubrication fittings or devices. Provide a minimum of one liter (one quart) of oil and 0.5 kg (one pound) of grease of manufacturer's recommended grade and type for each different application; also provide 12 grease sticks for lubricated plug valves. Deliver all materials to Resident Engineer in unopened containers that are properly identified as to application.
- C. Provide a separate grease gun with attachments for applicable fittings for each type of grease applied.
- D. All lubrication points shall be accessible without disassembling equipment, except to remove access plates.

3.10 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 05 93 - TESTING, ADJUSTING, AND BALANCING FOR HVAC for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specifications will be tested as part of a larger system. Refer to Section 23 05 93 - TESTING, ADJUSTING, AND BALANCING FOR HVAC and related sections for contractor responsibilities for system commissioning.

3.11 STARTUP AND TEMPORARY OPERATION

Start up equipment as described in equipment specifications. Verify that vibration is within specified tolerance prior to extended operation. Temporary use of equipment is specified in Section 01 00 00, GENERAL REQUIREMENTS, Article, TEMPORARY USE OF MECHANICAL AND ELECTRICAL EQUIPMENT.

3.12 OPERATING AND PERFORMANCE TESTS

- A. Prior to the final inspection, perform required tests as specified in Section 01 00 00, GENERAL REQUIREMENTS and submit the test reports and records to the Resident Engineer.
- B. Should evidence of malfunction in any tested system, or piece of equipment or component part thereof, occur during or as a result of tests, make proper corrections, repairs or replacements, and repeat tests at no additional cost to the Government.

C. When completion of certain work or system occurs at a time when final control settings and adjustments cannot be properly made to make performance tests, then make performance tests for heating systems and for cooling systems respectively during first actual seasonal use of respective systems following completion of work.

3.13 INSTRUCTIONS TO VA PERSONNEL

Provide in accordance with Article, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS, and Section 23 05 93 - TESTING, ADJUSTING, AND BALANCING FOR HVAC.

- - - E N D - - -

SECTION 23 05 12
GENERAL MOTOR REQUIREMENTS FOR HVAC EQUIPMENT

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies the furnishing, installation and connection of motors for HVAC equipment.

1.2 SUBMITTALS:

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Shop Drawings:
 - 1. Provide documentation to demonstrate compliance with drawings and specifications.
 - 2. Include electrical ratings, efficiency, bearing data, power factor, frame size, dimensions, mounting details, materials, horsepower, voltage, phase, speed (RPM), enclosure, starting characteristics, torque characteristics, code letter, full load and locked rotor current, service factor, and lubrication method.
- C. Manuals:
 - 1. Submit simultaneously with the shop drawings, companion copies of complete installation, maintenance and operating manuals, including technical data sheets and application data.
- D. Certification: Two weeks prior to final inspection, unless otherwise noted, submit four copies of the following certification to the Resident Engineer:
 - 1. Certification that the motors have been applied, installed, adjusted, lubricated, and tested according to manufacturer published recommendations.
- E. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.

1.3 APPLICABLE PUBLICATIONS:

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. National Electrical Manufacturers Association (NEMA):
MG 1-2006 Rev. 1 2009 ..Motors and Generators

MG 2-2001 Rev. 1 2007...Safety Standard for Construction and Guide for
Selection, Installation and Use of Electric
Motors and Generators

- C. National Fire Protection Association (NFPA):
70-2008.....National Electrical Code (NEC)
- D. Institute of Electrical and Electronics Engineers (IEEE):
112-04.....Standard Test Procedure for Polyphase Induction
Motors and Generators
- E. American Society of Heating, Refrigerating and Air-Conditioning
Engineers (ASHRAE):
90.1-2007.....Energy Standard for Buildings Except Low-Rise
Residential Buildings

PART 2 - PRODUCTS

2.1 MOTORS:

- A. For alternating current, fractional and integral horsepower motors, NEMA Publications MG 1 and MG 2 shall apply.
- B. All material and equipment furnished and installation methods shall conform to the requirements of Section 26 29 11, LOW-VOLTAGE MOTOR STARTERS; and Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW). Provide all electrical wiring, conduit, and devices necessary for the proper connection, protection and operation of the systems. Provide premium efficiency type motors as scheduled. Unless otherwise specified for a particular application, use electric motors with the following requirements.
- C. Single-phase Motors: Motors for centrifugal fans and pumps may be split phase or permanent split capacitor (PSC) type. Provide capacitor-start type for hard starting applications.
- D. Poly-phase Motors: NEMA Design B, Squirrel cage, induction type.
 - 1. Two Speed Motors: Each two-speed motor shall have two separate windings. Provide a time- delay (20 seconds minimum) relay for switching from high to low speed.
- E. Voltage ratings shall be as follows:
 - 1. Single phase:
 - a. Motors connected to 120-volt systems: 115 volts.
 - b. Motors connected to 208-volt systems: 200 volts.
 - c. Motors connected to 240 volt or 480 volt systems: 230/460 volts, dual connection.
 - 2. Three phase:
 - a. Motors connected to 208-volt systems: 200 volts.

- b. Motors, less than 74.6 kW (100 HP), connected to 240 volt or 480 volt systems: 208-230/460 volts, dual connection.
- F. Number of phases shall be as follows:
 - 1. Motors, less than 373 W (1/2 HP): Single phase.
 - 2. Motors, 373 W (1/2 HP) and larger: 3 phase.
 - 3. Exceptions:
 - a. Hermetically sealed motors.
 - b. Motors for equipment assemblies, less than 746 W (one HP), may be single phase provided the manufacturer of the proposed assemblies cannot supply the assemblies with three phase motors.
- G. Motors shall be designed for operating the connected loads continuously in a 40°C (104°F) environment, where the motors are installed, without exceeding the NEMA standard temperature rises for the motor insulation. If the motors exceed 40°C (104°F), the motors shall be rated for the actual ambient temperatures.
- H. Motor designs, as indicated by the NEMA code letters, shall be coordinated with the connected loads to assure adequate starting and running torque.
- I. Motor Enclosures:
 - 1. Shall be the NEMA types as specified and/or shown on the drawings.
 - 2. Where the types of motor enclosures are not shown on the drawings, they shall be the NEMA types, which are most suitable for the environmental conditions where the motors are being installed. Enclosure requirements for certain conditions are as follows:
 - a. Motors located outdoors, indoors in wet or high humidity locations, or in unfiltered airstreams shall be totally enclosed type.
 - b. Where motors are located in an NEC 511 classified area, provide TEFC explosion proof motor enclosures.
 - c. Where motors are located in a corrosive environment, provide TEFC enclosures with corrosion resistant finish.
 - 3. Enclosures shall be primed and finish coated at the factory with manufacturer's prime coat and standard finish.
- J. Special Requirements:
 - 1. Where motor power requirements of equipment furnished deviate from power shown on plans, provide electrical service designed under the requirements of NFPA 70 without additional time or cost to the Government.

2. Assemblies of motors, starters, controls and interlocks on factory assembled and wired devices shall be in accordance with the requirements of this specification.
3. Wire and cable materials specified in the electrical division of the specifications shall be modified as follows:
 - a. Wiring material located where temperatures can exceed 71 degrees C (160 degrees F) shall be stranded copper with Teflon FEP insulation with jacket. This includes wiring on the boilers.
 - b. Other wiring at boilers and to control panels shall be NFPA 70 designation THWN.
 - c. Provide shielded conductors or wiring in separate conduits for all instrumentation and control systems where recommended by manufacturer of equipment.
4. Select motor sizes so that the motors do not operate into the service factor at maximum required loads on the driven equipment. Motors on pumps shall be sized for non-overloading at all points on the pump performance curves.
5. Motors utilized with variable frequency drives shall be rated "inverter-duty" per NEMA Standard, MG1, Part 31.4.4.2. Provide motor shaft grounding apparatus that will protect bearings from damage from stray currents.
- K. Additional requirements for specific motors, as indicated in the other sections listed in Article 1.2, shall also apply.
- L. Energy-Efficient Motors (Motor Efficiencies): All permanently wired polyphase motors of 746 Watts (1 HP) or more shall meet the minimum full-load efficiencies as indicated in the following table. Motors of 746 Watts or more with open, drip-proof or totally enclosed fan-cooled enclosures shall be NEMA premium efficiency type, unless otherwise indicated. Motors provided as an integral part of motor driven equipment are excluded from this requirement if a minimum seasonal or overall efficiency requirement is indicated for that equipment by the provisions of another section. Motors not specified as "premium efficiency" shall comply with the Energy Policy Act of 2005 (EPACT).

Minimum Premium Efficiencies Open Drip-Proof				Minimum Premium Efficiencies Totally Enclosed Fan-Cooled			
Rating kW (HP)	1200 RPM	1800 RPM	3600 RPM	Rating kW (HP)	1200 RPM	1800 RPM	3600 RPM
0.746 (1)	82.5%	85.5%	77.0%	0.746 (1)	82.5%	85.5%	77.0%

1.12 (1.5)	86.5%	86.5%	84.0%	1.12 (1.5)	87.5%	86.5%	84.0%
1.49 (2)	87.5%	86.5%	85.5%	1.49 (2)	88.5%	86.5%	85.5%
2.24 (3)	88.5%	89.5%	85.5%	2.24 (3)	89.5%	89.5%	86.5%
3.73 (5)	89.5%	89.5%	86.5%	3.73 (5)	89.5%	89.5%	88.5%
5.60 (7.5)	90.2%	91.0%	88.5%	5.60 (7.5)	91.0%	91.7%	89.5%
7.46 (10)	91.7%	91.7%	89.5%	7.46 (10)	91.0%	91.7%	90.2%
11.2 (15)	91.7%	93.0%	90.2%	11.2 (15)	91.7%	92.4%	91.0%
14.9 (20)	92.4%	93.0%	91.0%	14.9 (20)	91.7%	93.0%	91.0%
18.7 (25)	93.0%	93.6%	91.7%	18.7 (25)	93.0%	93.6%	91.7%
22.4 (30)	93.6%	94.1%	91.7%	22.4 (30)	93.0%	93.6%	91.7%
29.8 (40)	94.1%	94.1%	92.4%	29.8 (40)	94.1%	94.1%	92.4%
37.3 (50)	94.1%	94.5%	93.0%	37.3 (50)	94.1%	94.5%	93.0%
44.8 (60)	94.5%	95.0%	93.6%	44.8 (60)	94.5%	95.0%	93.6%
56.9 (75)	94.5%	95.0%	93.6%	56.9 (75)	94.5%	95.4%	93.6%
74.6 (100)	95.0%	95.4%	93.6%	74.6 (100)	95.0%	95.4%	94.1%
93.3 (125)	95.0%	95.4%	94.1%	93.3 (125)	95.0%	95.4%	95.0%
112 (150)	95.4%	95.8%	94.1%	112 (150)	95.8%	95.8%	95.0%
149.2 (200)	95.4%	95.8%	95.0%	149.2 (200)	95.8%	96.2%	95.4%

M. Minimum Power Factor at Full Load and Rated Voltage: 90 percent at 1200 RPM, 1800 RPM and 3600 RPM.

PART 3 - EXECUTION

3.1 INSTALLATION:

Install motors in accordance with manufacturer's recommendations, the NEC, NEMA, as shown on the drawings and/or as required by other sections of these specifications.

3.2 FIELD TESTS

- A. Perform an electric insulation resistance Test using a megohmmeter on all motors after installation, before start-up. All shall test free from grounds.
- B. Perform Load test in accordance with ANSI/IEEE 112, Test Method B, to determine freedom from electrical or mechanical defects and compliance with performance data.
- C. Insulation Resistance: Not less than one-half meg-ohm between stator conductors and frame, to be determined at the time of final inspection.

3.3 STARTUP AND TESTING

- A. The Commissioning Agent will observe startup and contractor testing of selected equipment. Coordinate the startup and contractor testing schedules with Resident Engineer and Commissioning Agent. Provide a minimum of 7 days prior notice.

3.4 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

3.5 DEMONSTRATION AND TRAINING

- A. Provide services of manufacturer's technical representative for four hours to instruct VA personnel in operation and maintenance of units.
- B. Submit training plans and instructor qualifications in accordance with the requirements of Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS.

- - - E N D - - -

SECTION 23 05 41
NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT

PART 1 - GENERAL**1.1 DESCRIPTION**

Noise criteria, vibration tolerance and vibration isolation for HVAC and plumbing work.

1.2 QUALITY ASSURANCE

A. Refer to article, QUALITY ASSURANCE in specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC EQUIPMENT.

B. Noise Criteria:

1. Noise levels in all 8 octave bands due to equipment and duct systems shall not exceed following NC levels:

TYPE OF ROOM	NC LEVEL
Corridors(Public)	40

2. For equipment which has no sound power ratings scheduled on the plans, the contractor shall select equipment such that the foregoing noise criteria, local ordinance noise levels, and OSHA requirements are not exceeded. Selection procedure shall be in accordance with ASHRAE Fundamentals Handbook, Chapter 7, Sound and Vibration.
3. An allowance, not to exceed 5db, may be added to the measured value to compensate for the variation of the room attenuating effect between room test condition prior to occupancy and design condition after occupancy which may include the addition of sound absorbing material, such as, furniture. This allowance may not be taken after occupancy. The room attenuating effect is defined as the difference between sound power level emitted to room and sound pressure level in room.
4. In absence of specified measurement requirements, measure equipment noise levels three feet from equipment and at an elevation of maximum noise generation.

1.3 SUBMITTALS

A. Submit in accordance with specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.

B. Manufacturer's Literature and Data:

1. Vibration isolators:
 - a. Floor mountings

- b. Hangers
 - c. Snubbers
 - d. Thrust restraints
- 2. Bases.
- 3. Acoustical enclosures.
- C. Isolator manufacturer shall furnish with submittal load calculations for selection of isolators, including supplemental bases, based on lowest operating speed of equipment supported.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc. (ASHRAE):
 - 2009Fundamentals Handbook, Chapter 7, Sound and Vibration
- C. American Society for Testing and Materials (ASTM):
 - A123/A123M-09.....Standard Specification for Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products
 - A307-07b.....Standard Specification for Carbon Steel Bolts and Studs, 60,000 PSI Tensile Strength
 - D2240-05(2010).....Standard Test Method for Rubber Property - Durometer Hardness
- D. Manufacturers Standardization (MSS):
 - SP-58-2009.....Pipe Hangers and Supports-Materials, Design and Manufacture
- E. Occupational Safety and Health Administration (OSHA):
 - 29 CFR 1910.95.....Occupational Noise Exposure
- F. American Society of Civil Engineers (ASCE):
 - ASCE 7-10Minimum Design Loads for Buildings and Other Structures.
- G. American National Standards Institute / Sheet Metal and Air Conditioning Contractor's National Association (ANSI/SMACNA):
 - 001-2008.....Seismic Restraint Manual: Guidelines for Mechanical Systems, 3rd Edition.
- H. International Code Council (ICC):
 - 2009 IBC.....International Building Code.
- I. Department of Veterans Affairs (VA):

H-18-8 2010.....Seismic Design Requirements.

PART 2 - PRODUCTS

2.1 GENERAL REQUIREMENTS

- A. Type of isolator, base, and minimum static deflection shall be as required for each specific equipment application as recommended by isolator or equipment manufacturer but subject to minimum requirements indicated herein and in the schedule on the drawings.
- B. Elastometric Isolators shall comply with ASTM D2240 and be oil resistant neoprene with a maximum stiffness of 60 durometer and have a straight-line deflection curve.
- C. Exposure to weather: Isolator housings to be either hot dipped galvanized or powder coated to ASTM B117 salt spray testing standards. Springs to be powder coated or electro galvanized. All hardware to be electro galvanized. In addition provide limit stops to resist wind velocity. Velocity pressure established by wind shall be calculated in accordance with section 1609 of the International Building Code. A minimum wind velocity of 75 mph shall be employed.
- D. Uniform Loading: Select and locate isolators to produce uniform loading and deflection even when equipment weight is not evenly distributed.
- E. Color code isolators by type and size for easy identification of capacity.

2.2 SEISMIC RESTRAINT REQUIREMENTS FOR EQUIPMENTS

- A. Bolt pad mounted equipment, without vibration isolators, to the floor or other support using ASTM A307 standard bolting material.
- B. Floor mounted equipment, with vibration Isolators: Type SS. Where Type N isolators are used provide channel frame base horizontal restraints bolted to the floor, or other support, on all sides of the equipment. Size and material required for the base shall be as recommended by the isolator manufacturer.
- C. On all sides of suspended equipment, provide bracing for rigid supports and provide restraints for resiliently supported equipment.

2.3 VIBRATION ISOLATORS

- A. Floor Mountings:
 - 1. Spring Isolators (Type S): Shall be free-standing, laterally stable and include acoustical friction pads and leveling bolts. Isolators shall have a minimum ratio of spring diameter-to-operating spring height of 1.0 and an additional travel to solid equal to 50 percent of rated deflection.

2. Pads (Type D): Pads shall be natural rubber or neoprene waffle, neoprene and steel waffle, or reinforced duck and neoprene. Size pads for a maximum load of 345 kPa (50 pounds per square inch).
- B. Hangers: Shall be combination neoprene and springs unless otherwise noted and shall allow for expansion of pipe.
1. Combination Neoprene and Spring (Type H): Vibration hanger shall contain a spring and double deflection neoprene element in series. Spring shall have a diameter not less than 0.8 of compressed operating spring height. Spring shall have a minimum additional travel of 50 percent between design height and solid height. Spring shall permit a 15 degree angular misalignment without rubbing on hanger box.
 2. Spring Position Hanger (Type HP): Similar to combination neoprene and spring hanger except hanger shall hold piping at a fixed elevation during installation and include a secondary adjustment feature to transfer load to spring while maintaining same position.
 3. Neoprene (Type HN): Vibration hanger shall contain a double deflection type neoprene isolation element. Hanger rod shall be separated from contact with hanger bracket by a neoprene grommet.
 4. Spring (Type HS): Vibration hanger shall contain a coiled steel spring in series with a neoprene grommet. Spring shall have a diameter not less than 0.8 of compressed operating spring height. Spring shall have a minimum additional travel of 50 percent between design height and solid height. Spring shall permit a 15 degree angular misalignment without rubbing on hanger box.
 5. Hanger supports for piping 50 mm (2 inches) and larger shall have a pointer and scale deflection indicator.
 6. Hangers used in seismic applications shall be provided with a neoprene and steel rebound washer installed $\frac{1}{4}$ ' clear of bottom of hanger housing in operation to prevent spring from excessive upward travel
- C. Thrust Restraints (Type THR): Restraints shall provide a spring element contained in a steel frame with neoprene pads at each end attachment. Restraints shall have factory preset thrust and be field adjustable to allow a maximum movement of 6 mm (1/4 inch) when the fan starts and stops. Restraint assemblies shall include rods, angle brackets and other hardware for field installation.

2.4 BASES

- A. Rails (Type R): Design rails with isolator brackets to reduce mounting height of equipment and cradle machines having legs or bases that do not require a complete supplementary base. To assure adequate stiffness, height of members shall be a minimum of 1/12 of longest base dimension but not less than 100 mm (4 inches). Where rails are used with neoprene mounts for small fans or close coupled pumps, extend rails to compensate overhang of housing.
- B. Curb Mounted Isolation Base (Type CB): Fabricate from aluminum to fit on top of standard curb with overlap to allow water run-off and have wind and water seals which shall not interfere with spring action. Provide resilient snubbers with 6 mm (1/4 inch) clearance for wind resistance. Top and bottom bearing surfaces shall have sponge type weather seals. Integral spring isolators shall comply with Spring Isolator (Type S) requirements.

2.5 SOUND ATTENUATING UNITS

Refer to specification Section 23 31 00, HVAC DUCTS and CASINGS.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Vibration Isolation:
1. No metal-to-metal contact will be permitted between fixed and floating parts.
 2. Connections to Equipment: Allow for deflections equal to or greater than equipment deflections. Electrical, drain, piping connections, and other items made to rotating or reciprocating equipment (pumps, compressors, etc.) which rests on vibration isolators, shall be isolated from building structure for first three hangers or supports with a deflection equal to that used on the corresponding equipment.
 3. Common Foundation: Mount each electric motor on same foundation as driven machine. Hold driving motor and driven machine in positive rigid alignment with provision for adjusting motor alignment and belt tension. Bases shall be level throughout length and width. Provide shims to facilitate pipe connections, leveling, and bolting.
 4. Provide heat shields where elastomers are subject to temperatures over 38 degrees C (100 degrees F).
 5. Extend bases for pipe elbow supports at discharge and suction connections at pumps. Pipe elbow supports shall not short circuit pump vibration to structure.

- B. Inspection and Adjustments: Check for vibration and noise transmission through connections, piping, ductwork, foundations, and walls. Adjust, repair, or replace isolators as required to reduce vibration and noise transmissions to specified levels.

3.2 ADJUSTING

- A. Adjust vibration isolators after piping systems are filled and equipment is at operating weight.
- B. Adjust limit stops on restrained spring isolators to mount equipment at normal operating height. After equipment installation is complete, adjust limit stops so they are out of contact during normal operation.
- C. Attach thrust limits at centerline of thrust and adjust to a maximum of 1/4inch (6-mm) movement during start and stop.
- D. Adjust active height of spring isolators.
- E. Adjust snubbers according to manufacturer's recommendations.
- F. Adjust seismic restraints to permit free movement of equipment within normal mode of operation.
- G. Torque anchor bolts according to equipment manufacturer's recommendations to resist seismic forces.

3.3 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - - E N D - - -

SELECTION GUIDE FOR VIBRATION ISOLATORS

EQUIPMENT	ON GRADE			20FT FLOOR SPAN			30FT FLOOR SPAN			40FT FLOOR SPAN			50FT FLOOR SPAN		
	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL	BASE TYPE	ISOL TYPE	MIN DEFL
AIR HANDLING UNIT PACKAGES															
FLOOR MOUNTED:															
UP THRU 5 HP	---	D	---	---	S	1.0	---	S	1.0	---	S	1.0	---	S	1.0
7-1/2 HP & OVER:															
UP TO 500 RPM	---	D	---	R	S, THR	1.5	R	S, THR	2.5	R	S, THR	2.5	R	S, THR	2.5
501 RPM & OVER	---	D	---	---	S, THR	0.8	---	S, THR	0.8	R	S, THR	1.5	R	S, THR	2.0
CONDENSING UNITS															
ALL	---	SS	0.25	---	SS	0.75	---	SS	1.5	CB	SS	1.5	---	---	NA

NOTES:

1. For suspended floors lighter than 100 mm (4 inch) thick concrete, select deflection requirements from next higher span.

SECTION 23 05 93
TESTING, ADJUSTING, AND BALANCING FOR HVAC

PART 1 - GENERAL

1.1 DESCRIPTION

A. Testing, adjusting, and balancing (TAB) of heating, ventilating and air conditioning (HVAC) systems. TAB includes the following:

1. Planning systematic TAB procedures.
2. Design Review Report.
3. Systems Inspection report.
4. Duct Air Leakage test report.
5. Systems Readiness Report.
6. Balancing air and water distribution systems; adjustment of total system to provide design performance; and testing performance of equipment and automatic controls.
7. Vibration and sound measurements.
8. Recording and reporting results.

B. Definitions:

1. Basic TAB used in this Section: Chapter 37, "Testing, Adjusting and Balancing" of 2007 ASHRAE Handbook, "HVAC Applications".
2. TAB: Testing, Adjusting and Balancing; the process of checking and adjusting HVAC systems to meet design objectives.
3. AABC: Associated Air Balance Council.
4. NEBB: National Environmental Balancing Bureau.
5. Hydronic Systems: Includes glycol-water systems.
6. Air Systems: Includes all outside air, supply air, return air, exhaust air and relief air systems.
7. Flow rate tolerance: The allowable percentage variation, minus to plus, of actual flowrate from values (design) in the contract documents.

1.2 QUALITY ASSURANCE

A. Refer to Articles, Quality Assurance and Submittals, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

B. Qualifications:

1. TAB Agency: The TAB agency shall be a subcontractor of the General Contractor and shall report to and be paid by the General Contractor.
2. The TAB agency shall be either a certified member of AABC or certified by the NEBB to perform TAB service for HVAC, water

balancing and vibrations and sound testing of equipment. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the agency loses subject certification during this period, the General Contractor shall immediately notify the Resident Engineer and submit another TAB firm for approval. Any agency that has been the subject of disciplinary action by either the AABC or the NEBB within the five years preceding Contract Award shall not be eligible to perform any work related to the TAB. All work performed in this Section and in other related Sections by the TAB agency shall be considered invalid if the TAB agency loses its certification prior to Contract completion, and the successor agency's review shows unsatisfactory work performed by the predecessor agency.

3. TAB Specialist: The TAB specialist shall be either a member of AABC or an experienced technician of the Agency certified by NEBB. The certification shall be maintained for the entire duration of duties specified herein. If, for any reason, the Specialist loses subject certification during this period, the General Contractor shall immediately notify the Resident Engineer and submit another TAB Specialist for approval. Any individual that has been the subject of disciplinary action by either the AABC or the NEBB within the five years preceding Contract Award shall not be eligible to perform any duties related to the HVAC systems, including TAB. All work specified in this Section and in other related Sections performed by the TAB specialist shall be considered invalid if the TAB Specialist loses its certification prior to Contract completion and must be performed by an approved successor.
4. TAB Specialist shall be identified by the General Contractor within 60 days after the notice to proceed. The TAB specialist will be coordinating, scheduling and reporting all TAB work and related activities and will provide necessary information as required by the Resident Engineer. The responsibilities would specifically include:
 - a. Shall directly supervise all TAB work.
 - b. Shall sign the TAB reports that bear the seal of the TAB standard. The reports shall be accompanied by report forms and schematic drawings required by the TAB standard, AABC or NEBB.
 - c. Would follow all TAB work through its satisfactory completion.

- d. Shall provide final markings of settings of all HVAC adjustment devices.
 - e. Permanently mark location of duct test ports.
5. All TAB technicians performing actual TAB work shall be experienced and must have done satisfactory work on a minimum of 3 projects comparable in size and complexity to this project. Qualifications must be certified by the TAB agency in writing. The lead technician shall be certified by AABC or NEBB
- C. Test Equipment Criteria: The instrumentation shall meet the accuracy/calibration requirements established by AABC National Standards or by NEBB Procedural Standards for Testing, Adjusting and Balancing of Environmental Systems and instrument manufacturer. Provide calibration history of the instruments to be used for test and balance purpose.
- D. Tab Criteria:
- 1. One or more of the applicable AABC, NEBB or SMACNA publications, supplemented by ASHRAE Handbook "HVAC Applications" Chapter 36, and requirements stated herein shall be the basis for planning, procedures, and reports.
 - 2. Flow rate tolerance: Following tolerances are allowed. For tolerances not mentioned herein follow ASHRAE Handbook "HVAC Applications", Chapter 36, as a guideline. Air Filter resistance during tests, artificially imposed if necessary, shall be at least 100 percent of manufacturer recommended change over pressure drop values for pre-filters and after-filters.
 - a. Air handling unit and all other fans, cubic meters/min (cubic feet per minute): Minus 0 percent to plus 10 percent.
 - b. Minimum outside air: 0 percent to plus 10 percent.
 - c. Individual room air outlets and inlets, and air flow rates not mentioned above: Minus 5 percent to plus 10 percent except if the air to a space is 100 CFM or less the tolerance would be minus 5 to plus 5 percent.
 - 3. Systems shall be adjusted for energy efficient operation as described in PART 3.
 - 4. Typical TAB procedures and results shall be demonstrated to the Resident Engineer for one air distribution system (including all fans, three terminal units, three rooms randomly selected by the

Resident Engineer) and one hydronic system (pumps and three coils) as follows:

- a. When field TAB work begins.
- b. During each partial final inspection and the final inspection for the project if requested by VA.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Submit names and qualifications of TAB agency and TAB specialists within 60 days after the notice to proceed. Submit information on three recently completed projects and a list of proposed test equipment.
- C. For use by the Resident Engineer staff, submit one complete set of applicable AABC or NEBB publications that will be the basis of TAB work.
- D. Submit Following for Review and Approval:
 1. Design Review Report within 90 days after the system layout on air and water side is completed by the Contractor.
 2. Systems inspection report on equipment and installation for conformance with design.
 3. Duct Air Leakage Test Report.
 4. Systems Readiness Report.
 5. Intermediate and Final TAB reports covering flow balance and adjustments, performance tests, vibration tests and sound tests.
 6. Include in final reports uncorrected installation deficiencies noted during TAB and applicable explanatory comments on test results that differ from design requirements.
- E. Prior to request for Final or Partial Final inspection, submit completed Test and Balance report for the area.

1.4 APPLICABLE PUBLICATIONS

- A. The following publications form a part of this specification to the extent indicated by the reference thereto. In text the publications are referenced to by the acronym of the organization.
- B. American Society of Heating, Refrigerating and Air Conditioning Engineers, Inc. (ASHRAE):
2007HVAC Applications ASHRAE Handbook, Chapter 37,
Testing, Adjusting, and Balancing and Chapter
47, Sound and Vibration Control

C. Associated Air Balance Council (AABC):

2002.....AABC National Standards for Total System
Balance

D. National Environmental Balancing Bureau (NEBB):

7th Edition 2005Procedural Standards for Testing, Adjusting,
Balancing of Environmental Systems

2nd Edition 2006Procedural Standards for the Measurement of
Sound and Vibration

3rd Edition 2009Procedural Standards for Whole Building Systems
Commissioning of New Construction

E. Sheet Metal and Air Conditioning Contractors National Association
(SMACNA):

3rd Edition 2002HVAC SYSTEMS Testing, Adjusting and Balancing

PART 2 - PRODUCTS

2.1 PLUGS

Provide plastic plugs to seal holes drilled in ductwork for test
purposes.

2.2 INSULATION REPAIR MATERIAL

See Section 23 07 11, HVAC and BOILER PLANT INSULATION Provide for
repair of insulation removed or damaged for TAB work.

PART 3 - EXECUTION

3.1 GENERAL

- A. Refer to TAB Criteria in Article, Quality Assurance.
- B. Obtain applicable contract documents and copies of approved submittals
for HVAC equipment and automatic control systems.

3.2 DESIGN REVIEW REPORT

The TAB Specialist shall review the Contract Plans and specifications
and advise the Resident Engineer of any design deficiencies that would
prevent the HVAC systems from effectively operating in accordance with
the sequence of operation specified or prevent the effective and
accurate TAB of the system. The TAB Specialist shall provide a report
individually listing each deficiency and the corresponding proposed
corrective action necessary for proper system operation.

3.3 SYSTEMS INSPECTION REPORT

- A. Inspect equipment and installation for conformance with design.
- B. The inspection and report is to be done after air distribution
equipment is on site and duct installation has begun, but well in
advance of performance testing and balancing work. The purpose of the

inspection is to identify and report deviations from design and ensure that systems will be ready for TAB at the appropriate time.

- C. Reports: Follow check list format developed by AABC, NEBB or SMACNA, supplemented by narrative comments, with emphasis on air handling units and fans. Check for conformance with submittals. Verify that diffuser and register sizes are correct. Check air terminal unit installation including their duct sizes and routing.

3.4 DUCT AIR LEAKAGE TEST REPORT

TAB Agency shall perform the leakage test as outlined in "Duct leakage Tests and Repairs" in Section 23 31 00, HVAC DUCTS and CASINGS for TAB agency's role and responsibilities in witnessing, recording and reporting of deficiencies.

3.5 SYSTEM READINESS REPORT

- A. Inspect each System to ensure that it is complete including installation and operation of controls. Submit report to RE in standard format and forms prepared and or approved by the Commissioning Agent.
- B. Verify that all items such as ductwork piping, ports, terminals, connectors, etc., that is required for TAB are installed. Provide a report to the Resident Engineer.

3.6 TAB REPORTS

- A. Submit an intermediate report for 50 percent of systems and equipment tested and balanced to establish satisfactory test results.
- B. The TAB contractor shall provide raw data immediately in writing to the Resident Engineer if there is a problem in achieving intended results before submitting a formal report.
- C. If over 20 percent of readings in the intermediate report fall outside the acceptable range, the TAB report shall be considered invalid and all contract TAB work shall be repeated and re-submitted for approval at no additional cost to the owner.
- D. Do not proceed with the remaining systems until intermediate report is approved by the Resident Engineer.

3.7 TAB PROCEDURES

- A. Tab shall be performed in accordance with the requirement of the Standard under which TAB agency is certified by either AABC or NEBB.
- B. General: During TAB all related system components shall be in full operation. Fan rotation, motor loads and equipment vibration shall be checked and corrected as necessary before proceeding with TAB. Set

controls and/or block off parts of distribution systems to simulate design operation of variable volume air or water systems for test and balance work.

- C. Allow 30 days time in construction schedule for TAB and submission of all reports for an organized and timely correction of deficiencies.
- D. Air Balance and Equipment Test: Include air handling units, fans, fan coil units, room diffusers/outlets/inlets.
 - 1. Artificially load air filters by partial blanking to produce air pressure drop of manufacturer's recommended pressure drop.
 - 2. Adjust fan speeds to provide design air flow. V-belt drives, including fixed pitch pulley requirements, are specified in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
 - 3. Test and balance systems in all specified modes of operation, including variable volume, economizer, and fire emergency modes. Verify that dampers and other controls function properly.
 - 4. Variable air volume (VAV) systems:
 - a. Coordinate TAB, including system volumetric controls, with Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
 - b. The mechanical equipment schedule drawing(s), specifies that maximum and minimum flow rates for air terminal units (ATU) be factory set. Check and readjust ATU flow rates if necessary. Balance air distribution from ATU on full cooling maximum scheduled cubic meters per minute (cubic feet per minute). Reset room thermostats and check ATU operation from maximum to minimum cooling, to the heating mode, and back to cooling. Record and report the heating coil leaving air temperature when the ATU is in the maximum heating mode. Record and report outdoor air flow rates under all operating conditions (The test shall demonstrate that the minimum outdoor air ventilation rate shall remain constant under all operating conditions).
 - c. Adjust operating pressure control setpoint to maintain the design flow to each space with the lowest setpoint.
 - 5. Record final measurements for air handling equipment performance data sheets.

3.8 VIBRATION TESTING

- A. Furnish instruments and perform vibration measurements as specified in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT. Field vibration balancing is specified in Section 23 05 11,

COMMON WORK RESULTS FOR HVAC. Provide measurements for all rotating HVAC equipment of 373 watts (1/2 horsepower) and larger, including fans and motors.

- B. Record initial measurements for each unit of equipment on test forms and submit a report to the Resident Engineer. Where vibration readings exceed the allowable tolerance Contractor shall be directed to correct the problem. The TAB agency shall verify that the corrections are done and submit a final report to the Resident Engineer.

3.9 SOUND TESTING

- A. Perform and record required sound measurements in accordance with Paragraph, QUALITY ASSURANCE in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.
1. Take readings in all the rooms.
- B. Take measurements with a calibrated sound level meter and octave band analyzer of the accuracy required by AABC or NEBB.
- C. Sound reference levels, formulas and coefficients shall be according to ASHRAE Handbook, "HVAC Applications", Chapter 46, SOUND AND VIBRATION CONTROL.
- D. Determine compliance with specifications as follows:
1. When sound pressure levels are specified, including the NC Criteria in Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT:
- Reduce the background noise as much as possible by shutting off unrelated audible equipment.
 - Measure octave band sound pressure levels with specified equipment "off."
 - Measure octave band sound pressure levels with specified equipment "on."
 - Use the DIFFERENCE in corresponding readings to determine the sound pressure due to equipment.

DIFFERENCE:	0	1	2	3	4	5 to 9	10 or More
FACTOR:	10	7	4	3	2	1	0

Sound pressure level due to equipment equals sound pressure level with equipment "on" minus FACTOR.

- e. Plot octave bands of sound pressure level due to equipment for typical rooms on a graph which also shows noise criteria (NC) curves.
- 2. When sound power levels are specified:
 - a. Perform steps 1.a. thru 1.d., as above.
 - b. For indoor equipment: Determine room attenuating effect, i.e., difference between sound power level and sound pressure level. Determined sound power level will be the sum of sound pressure level due to equipment plus the room attenuating effect.
 - c. For outdoor equipment: Use directivity factor and distance from noise source to determine distance factor, i.e., difference between sound power level and sound pressure level. Measured sound power level will be the sum of sound pressure level due to equipment plus the distance factor. Use // 10 meters (30 feet) // 13 meters (40 feet) // 16 meters (50 feet) // for sound level location.
- 3. Where sound pressure levels are specified in terms of dB(A) measure sound levels using the "A" scale of meter. Single value readings will be used instead of octave band analysis.
- E. Where measured sound levels exceed specified level, the installing contractor or equipment manufacturer shall take remedial action approved by the Resident Engineer and the necessary sound tests shall be repeated.
- F. Test readings for sound testing could go higher than 15 percent if determination is made by the Resident Engineer based on the recorded sound data.

3.10 MARKING OF SETTINGS

Following approval of Tab final Report, the setting of all HVAC adjustment devices including valves, splitters and dampers shall be permanently marked by the TAB Specialist so that adjustment can be restored if disturbed at any time. Style and colors used for markings shall be coordinated with the Resident Engineer.

3.11 IDENTIFICATION OF TEST PORTS

The TAB Specialist shall permanently and legibly identify the location points of duct test ports. If the ductwork has exterior insulation, the identification shall be made on the exterior side of the insulation. All penetrations through ductwork and ductwork insulation shall be sealed to prevent air leaks and maintain integrity of vapor barrier.

3.12 COMMISSIONING

- A. Provide commissioning documentation for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 08 00 - COMMISSIONING OF HVAC SYSTEMS and related sections for contractor responsibilities for system commissioning.

- - E N D - - -

**SECTION 23 07 11
HVAC AND PLUMBING INSULATION**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Field applied insulation for thermal efficiency and condensation control for
 - 1. HVAC piping, ductwork and equipment.
 - 2. Plumbing piping and equipment.
- B. Definitions
 - 1. ASJ: All service jacket, white finish facing or jacket.
 - 2. Air conditioned space: Space having air temperature and/or humidity controlled by mechanical equipment.
 - 3. Cold: Equipment, ductwork or piping handling media at design temperature of 60 degrees F or below.
 - 4. Concealed: Ductwork and piping above ceilings and in chases, interstitial space, and pipe spaces.
 - 5. Exposed: Piping, ductwork, and equipment exposed to view in finished areas including mechanical and electrical equipment rooms or exposed to outdoor weather. Attics and crawl spaces where air handling units are located are considered to be mechanical rooms. Shafts, chases, interstitial spaces, crawl spaces and pipe basements are not considered finished areas.
 - 6. FSK: Foil-scrim-kraft facing.
 - 7. Hot: HVAC Ductwork handling air at design temperature above 60 degrees F; HVAC and plumbing equipment or piping handling media above 105 degrees F; and piping media and equipment 90 to 450 degrees F.
 - 8. Density: Pcf - pounds per cubic foot.
 - 9. Runouts: Branch pipe connections up to one-inch nominal size to fan coil units or reheat coils for terminal units.
 - 10. Thermal conductance: Heat flow rate through materials.
 - a. Flat surface: BTU per hour per square foot.
 - b. Pipe or Cylinder: BTU per hour per linear foot.
 - 11. Thermal Conductivity (k): BTU per inch thickness, per hour, per square foot, per degree F temperature difference.
 - 12. HPS: High pressure steam (60 psig and above).
 - 13. HPR: High pressure steam condensate return.
 - 14. MPS: Medium pressure steam (16 psig thru 59 psig).
 - 15. MPR: Medium pressure steam condensate return.

16. LPS: Low pressure steam (15 psig and below).
17. LPR: Low pressure steam condensate gravity return.
18. PC: Pumped condensate.
19. HWH: Hot water heating supply.
20. HWHR: Hot water heating return.
21. GH: Hot glycol-water heating supply.
22. GHR: Hot glycol-water heating return.
23. CPD: Condensate pump discharge.
24. R: Pump recirculation.
25. CW: Cold water.
26. SW: Soft water.
27. HW: Hot water.
28. CH: Chilled water supply.
29. CHR: Chilled water return.
30. PVDC: Polyvinylidene chloride vapor retarder jacketing, white.

1.2 QUALITY ASSURANCE

A. Refer to article QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

B. Criteria:

1. Comply with NFPA 90A, particularly paragraphs 4.3.3.1 through 4.3.3.6, 4.3.10.2.6, and 5.4.6.4, parts of which are quoted as follows:

4.3.3.1 Pipe insulation and coverings, duct coverings, duct linings, vapor retarder facings, adhesives, fasteners, tapes, and supplementary materials added to air ducts, plenums, panels, and duct silencers used in duct systems, unless otherwise provided for in 4.3.3.1.2 or 4.3.3.1.3, shall have, in the form in which they are used, a maximum flame spread index of 25 without evidence of continued progressive combustion and a maximum smoke developed index of 50 when tested in accordance with NFPA 255, *Standard Method of Test of Surface Burning Characteristics of Building Materials*.

4.3.3.1.1 Where these products are to be applied with adhesives, they shall be tested with such adhesives applied, or the adhesives used shall have a maximum flame spread index of 25 and a maximum smoke developed index of 50 when in the final dry state. (See 4.2.4.2.)

4.3.3.1.2 The flame spread and smoke developed index requirements of 4.3.3.1.1 shall not apply to air duct weatherproof coverings where they are located entirely outside of a building, do not penetrate a wall or roof, and do not create an exposure hazard.

4.3.3.1.3 Smoke detectors required by 6.4.4 shall not be required to meet flame spread index or smoke developed index requirements.

4.3.3.2 Closure systems for use with rigid and flexible air ducts tested in accordance with UL 181, Standard for Safety Factory-Made Air Ducts and Air Connectors, shall have been tested, listed, and used in accordance with the conditions of their listings, in accordance with one of the following:

(1) UL 181A, Standard for Safety Closure Systems for Use with Rigid Air Ducts and Air Connectors

(2) UL 181B, Standard for Safety Closure Systems for Use with Flexible Air Ducts and Air Connectors

4.3.3.3 Air duct, panel, and plenum coverings and linings, and pipe insulation and coverings shall not flame, glow, smolder, or smoke when tested in accordance with a similar test for pipe covering, ASTM C 411, Standard Test Method for Hot-Surface Performance of High-Temperature Thermal Insulation, at the temperature to which they are exposed in service.

4.3.3.3.1 In no case shall the test temperature be below 121°C (250°F).

4.3.3.4 Air duct coverings shall not extend through walls or floors that are required to be fire stopped or required to have a fire resistance rating, unless such coverings meet the requirements of 5.4.6.4.

4.3.3.5* Air duct linings shall be interrupted at fire dampers to prevent interference with the operation of devices.

4.3.3.6 Air duct coverings shall not be installed so as to conceal or prevent the use of any service opening.

4.3.10.2.6 Materials exposed to the airflow shall be noncombustible or limited combustible and have a maximum smoke developed index of 50 or comply with the following.

4.3.10.2.6.1 Electrical wires and cables and optical fiber cables shall be listed as noncombustible or limited combustible and have a maximum smoke developed index of 50 or shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with NFPA 262, Standard Method of Test for Flame Travel and Smoke of Wires and Cables for Use in Air-Handling Spaces.

4.3.10.2.6.2 Pneumatic tubing for control systems shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with UL 1820, Standard for Safety Fire Test of Pneumatic Tubing for Flame and Smoke Characteristics.

4.3.10.2.6.3 Nonferrous fire sprinkler piping shall be listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with UL 1887, Standard for Safety Fire Test of Plastic Sprinkler Pipe for Visible Flame and Smoke Characteristics.

4.3.10.2.6.4 Optical-fiber and communication raceways shall be listed as having a maximum peak optical density of 0.5 or less,

an average optical density of 0.15 or less, and a maximum flame spread distance of 1.5 m (5 ft) or less when tested in accordance with UL 2024, Standard for Safety Optical-Fiber Cable Raceway.

4.3.10.2.6.5 Loudspeakers and recessed lighting fixtures, including their assemblies and accessories, shall be permitted in the ceiling cavity plenum where listed as having a maximum peak optical density of 0.5 or less, an average optical density of 0.15 or less, and a peak heat release rate of 100 kW or less when tested in accordance with UL 2043, Standard for Safety Fire Test for Heat and Visible Smoke Release for Discrete Products and Their Accessories Installed in Air-Handling Spaces.

4.3.10.2.6.6 Supplementary materials for air distribution systems shall be permitted when complying with the provisions of 4.3.3.

4.3.10.2.6.7 Smoke detectors shall not be required to meet the provisions of this section.

5.4.6.4 Where air ducts pass through walls, floors, or partitions that are required to have a fire resistance rating and where fire dampers are not required, the opening in the construction around the air duct shall be as follows:

(1) Not exceeding a 25.4 mm (1 in.) average clearance on all sides

(2) Filled solid with an approved material capable of preventing the passage of flame and hot gases sufficient to ignite cotton waste when subjected to the time-temperature fire conditions required for fire barrier penetration as specified in NFPA 251, *Standard Methods of Tests of Fire Endurance of Building Construction and Materials*

2. Test methods: ASTM E84, UL 723, or NFPA 255.

3. Specified k factors are at 24 degrees C (75 degrees F) mean temperature unless stated otherwise. Where optional thermal insulation material is used, select thickness to provide thermal conductance no greater than that for the specified material. For pipe, use insulation manufacturer's published heat flow tables. For domestic hot water supply and return, run out insulation and condensation control insulation, no thickness adjustment need be made.

4. All materials shall be compatible and suitable for service temperature, and shall not contribute to corrosion or otherwise attack surface to which applied in either the wet or dry state.

C. Every package or standard container of insulation or accessories delivered to the job site for use must have a manufacturer's stamp or label giving the name of the manufacturer and description of the material.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Shop Drawings:
 - 1. All information, clearly presented, shall be included to determine compliance with drawings and specifications and ASTM, federal and military specifications.
 - a. Insulation materials: Specify each type used and state surface burning characteristics.
 - b. Insulation facings and jackets: Each type used. Make it clear that white finish will be furnished for exposed ductwork, casings and equipment.
 - c. Insulation accessory materials: Each type used.
 - d. Manufacturer's installation and fitting fabrication instructions for flexible unicellular insulation.
 - e. Make reference to applicable specification paragraph numbers for coordination.
- C. Samples:
 - 1. Each type of insulation: Minimum size 4 inches square for board/block/blanket; 6 inches long, full diameter for round types.
 - 2. Each type of facing and jacket: Minimum size 4 inches square.
 - 3. Each accessory material: Minimum 4 ounce liquid container or 4 ounce dry weight for adhesives / cement / mastic.

1.4 STORAGE AND HANDLING OF MATERIAL

Store materials in clean and dry environment, pipe covering jackets shall be clean and unmarred. Place adhesives in original containers. Maintain ambient temperatures and conditions as required by printed instructions of manufacturers of adhesives, mastics and finishing cements.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. Federal Specifications (Fed. Spec.):
 - L-P-535E (2)-91.....Plastic Sheet (Sheeting): Plastic Strip; Poly (Vinyl Chloride) and Poly (Vinyl Chloride - Vinyl Acetate), Rigid.
- C. Military Specifications (Mil. Spec.):

MIL-A-3316C (2)-90.....Adhesives, Fire-Resistant, Thermal Insulation

MIL-A-24179A (1)-87.....Adhesive, Flexible Unicellular-Plastic
Thermal Insulation

MIL-C-19565C (1)-88.....Coating Compounds, Thermal Insulation, Fire-and
Water-Resistant, Vapor-Barrier

MIL-C-20079H-87.....Cloth, Glass; Tape, Textile Glass; and Thread,
Glass and Wire-Reinforced Glass

D. American Society for Testing and Materials (ASTM):

A167-99.....Standard Specification for Stainless and
Heat-Resisting Chromium-Nickel Steel Plate,
Sheet, and Strip

B209-04.....Standard Specification for Aluminum and
Aluminum-Alloy Sheet and Plate

C411-97.....Standard test method for Hot-Surface
Performance of High-Temperature Thermal
Insulation

C449-00.....Standard Specification for Mineral Fiber
Hydraulic-Setting Thermal Insulating and
Finishing Cement

C533-04.....Standard Specification for Calcium Silicate
Block and Pipe Thermal Insulation

C534-05.....Standard Specification for Preformed Flexible
Elastomeric Cellular Thermal Insulation in
Sheet and Tubular Form

C547-06.....Standard Specification for Mineral Fiber pipe
Insulation

C552-03.....Standard Specification for Cellular Glass
Thermal Insulation

C553-02.....Standard Specification for Mineral Fiber
Blanket Thermal Insulation for Commercial and
Industrial Applications

C585-90.....Standard Practice for Inner and Outer Diameters
of Rigid Thermal Insulation for Nominal Sizes
of Pipe and Tubing (NPS System) R (1998)

C612-04.....Standard Specification for Mineral Fiber Block
and Board Thermal Insulation

C1126-04.....Standard Specification for Faced or Unfaced
Rigid Cellular Phenolic Thermal Insulation

- C1136-06.....Standard Specification for Flexible, Low
Permeance Vapor Retarders for Thermal
Insulation
- D1668-97a (2006).....Standard Specification for Glass Fabrics (Woven
and Treated) for Roofing and Waterproofing
- E84-06.....Standard Test Method for Surface Burning
Characteristics of Building
Materials
- E119-05a.....Standard Test Method for Fire Tests of Building
Construction and Materials
- E136-04.....Standard Test Methods for Behavior of Materials
in a Vertical Tube Furnace at 750 degrees C
(1380 F)
- E. National Fire Protection Association (NFPA):
- 90A-02.....Installation of Air Conditioning and
Ventilating Systems
- 96-04.....Standards for Ventilation Control and Fire
Protection of Commercial Cooking Operations
- 101-06.....Life Safety Code
- 251-06.....Standard methods of Tests of Fire Endurance of
Building Construction Materials
- 255-06.....Standard Method of tests of Surface Burning
Characteristics of Building Materials
- F. Underwriters Laboratories, Inc (UL):
- 723.....UL Standard for Safety Test for Surface Burning
Characteristics of Building Materials with
Revision of 08/03
- G. Manufacturer's Standardization Society of the Valve and Fitting
Industry (MSS):
- SP58-2002.....Pipe Hangers and Supports Materials, Design,
and Manufacture

PART 2 - PRODUCTS

2.1 MINERAL FIBER

- A. ASTM C612 (Board, Block), Class 1 or 2, $k = 0.26$, external insulation
for temperatures up to 400 degrees F.
- B. ASTM C553 (Blanket, Flexible) Type I, Class B-5, Density 2 pcf, $k =$
0.27, for use at temperatures up to 400 degrees F

- C. ASTM C547 (Pipe Fitting Insulation and Preformed Pipe Insulation), Class 1, $k = 0.26$ for use at temperatures 450 degrees F.

2.2 INSULATION FACINGS AND JACKETS

- A. Vapor Retarder, higher strength with low water permeance ≤ 0.02 or less perm rating, Beach puncture 50 units for insulation facing on exposed ductwork, casings and equipment, and for pipe insulation jackets. Facings and jackets shall be all service type (ASJ) or PVDC Vapor Retarder jacketing.
- B. ASJ jacket shall be white kraft bonded to 1 mil thick aluminum foil, fiberglass reinforced, with pressure sensitive adhesive closure. Comply with ASTM C1136. Beach puncture 5 units, Suitable for painting without sizing. Jackets shall have minimum 1-1/2 inch lap on longitudinal joints and minimum 4 inch butt strip on end joints. Butt strip material shall be same as the jacket. Lap and butt strips shall be self-sealing type with factory-applied pressure sensitive adhesive.
- C. Vapor Retarder medium strength with low water vapor permeance of 0.02 or less perm rating), Beach puncture 25 units: Foil-Scrim-Kraft (FSK) or PVDC vapor retarder jacketing type for concealed ductwork and equipment.
- D. Glass Cloth Jackets: Presized, minimum 7.8 ounces per square yard, 300 psig bursting strength with integral vapor retarder where required or specified. Weather proof if utilized for outside service.
- E. Factory composite materials may be used provided that they have been tested and certified by the manufacturer.
- F. Pipe fitting insulation covering (jackets): Fitting covering shall be premolded to match shape of fitting and shall be polyvinyl chloride (PVC) conforming to Fed Spec L-P-335, composition A, Type II Grade GU, and Type III, minimum thickness 0.03 inches. Provide color matching vapor retarder pressure sensitive tape.
- G. Aluminum Jacket-Piping systems and circular breeching and stacks: ASTM B209, 3003 alloy, H-14 temper, 0.023 inch minimum thickness with locking longitudinal joints. Jackets for elbows, tees and other fittings shall be factory-fabricated to match shape of fitting and of 0.024 inch minimum thickness aluminum. Fittings shall be of same construction as straight run jackets but need not be of the same alloy. Factory-fabricated stainless steel bands shall be installed on all circumferential joints. Bands shall be 0.75 inch wide on 18 inch centers. System shall be weatherproof if utilized for outside service.

- H. Aluminum jacket-Rectangular breeching: ASTM B209, 3003 alloy, H-14 temper, 0.020 inches thick with 1-1/4 inch corrugations or 0.032 inches thick with no corrugations. System shall be weatherproof if used for outside service.

2.3 PIPE COVERING PROTECTION SADDLES

- A. Cold pipe support: Premolded pipe insulation 180 degrees (half-shells) on bottom half of pipe at supports. Material shall be cellular glass or high density Polyisocyanurate insulation of the same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 3.0 pcf.

Nominal Pipe Size and Accessories Material (Insert Blocks)	
Nominal Pipe Size inches	Insert Blocks inches
Up through 6	6 long
8, 10, 12	9 long

- B. Warm or hot pipe supports: Premolded pipe insulation (180 degree half-shells) on bottom half of pipe at supports. Material shall be high density Polyisocyanurate (for temperatures up to 300 degrees F), cellular glass or calcium silicate. Insulation at supports shall have same thickness as adjacent insulation. Density of Polyisocyanurate insulation shall be a minimum of 3.0 pcf.

2.4 ADHESIVE, MASTIC, CEMENT

- A. Mil. Spec. MIL-A-3316, Class 1: Jacket and lap adhesive and protective finish coating for insulation.
- B. Mil. Spec. MIL-A-3316, Class 2: Adhesive for laps and for adhering insulation to metal surfaces.
- C. Mil. Spec. MIL-A-24179, Type II Class 1: Adhesive for installing flexible unicellular insulation and for laps and general use.
- D. Mil. Spec. MIL-C-19565, Type I: Protective finish for outdoor use.
- E. Mil. Spec. MIL-C-19565, Type I or Type II: Vapor barrier compound for indoor use.
- F. ASTM C449: Mineral fiber hydraulic-setting thermal insulating and finishing cement.
- G. Other: Insulation manufacturers' published recommendations.

2.5 MECHANICAL FASTENERS

- A. Pins, anchors: Welded pins, or metal or nylon anchors with tin-coated or fiber washer, or clips. Pin diameter shall be as recommended by the insulation manufacturer.

- B. Staples: Outward clinching monel or stainless steel.
- C. Wire: 18 gage soft annealed galvanized or 14 gage copper clad steel or nickel copper alloy.
- D. Bands: 3/4 inch nominal width, brass, galvanized steel, aluminum or stainless steel.

2.6 REINFORCEMENT AND FINISHES

- A. Glass fabric, open weave: ASTM D1668, Type III (resin treated) and Type I (asphalt treated).
- B. Glass fiber fitting tape: Mil. Spec MIL-C-20079, Type II, Class 1.
- C. Tape for Flexible Elastomeric Cellular Insulation: As recommended by the insulation manufacturer.
- D. Hexagonal wire netting: one inch mesh, 22 gage galvanized steel.
- E. Corner beads: 2 inch by 2 inch, 26 gage galvanized steel; or, 1 inch by 1 inch, 28 gage aluminum angle adhered to 2 inch by 2 inch Kraft paper.
- F. PVC fitting cover: Fed. Spec L-P-535, Composition A, 11-86 Type II, Grade GU, with Form B Mineral Fiber insert, for media temperature 40 degrees F to 250 degrees F. Below 40 degrees F and above 250 degrees F. Provide double layer insert. Provide color matching vapor barrier pressure sensitive tape.

2.7 FIRESTOPPING MATERIAL

Other than pipe and duct insulation, refer to Section 07 84 00
FIRESTOPPING.

2.8 FLAME AND SMOKE

Unless shown otherwise all assembled systems shall meet flame spread 25 and smoke developed 50 rating as developed under ASTM, NFPA and UL standards and specifications. See paragraph 1.3 "Quality Assurance".

PART 3 - EXECUTION

3.1 GENERAL REQUIREMENTS

- A. Required pressure tests of duct and piping joints and connections shall be completed and the work approved by the Resident Engineer for application of insulation. Surface shall be clean and dry with all foreign materials, such as dirt, oil, loose scale and rust removed.
- B. Except for specific exceptions, insulate entire specified equipment, piping (pipe, fittings, valves, accessories), and duct systems. Insulate each pipe and duct individually. Do not use scrap pieces of insulation where a full length section will fit.
- C. Insulation materials shall be installed in a first class manner with smooth and even surfaces, with jackets and facings drawn tight and

smoothly cemented down at all laps. Insulation shall be continuous through all sleeves and openings, except at fire dampers and duct heaters (NFPA 90A). Vapor retarders shall be continuous and uninterrupted throughout systems with operating temperature 60 degrees F and below. Lap and seal vapor barrier over ends and exposed edges of insulation. Anchors, supports and other metal projections through insulation on cold surfaces shall be insulated and vapor sealed for a minimum length of 6 inches.

- D. Install vapor stops at all insulation terminations on either side of valves, pumps and equipment and particularly in straight lengths of pipe insulation.
- E. Construct insulation on parts of equipment such as chilled water pumps and heads of chillers, convertors and heat exchangers that must be opened periodically for maintenance or repair, so insulation can be removed and replaced without damage. Install insulation with bolted 20 gage galvanized steel or aluminum covers as complete units, or in sections, with all necessary supports, and split to coincide with flange/split of the equipment.
- F. Insulation on hot piping and equipment shall be terminated square at items not to be insulated, access openings and nameplates. Cover all exposed raw insulation with white sealer or jacket material.
- G. Protect all insulations outside of buildings with aluminum jacket using lock joint or other approved system for a continuous weather tight system. Access doors and other items requiring maintenance or access shall be removable and sealable.
- H. HVAC work not to be insulated:
 - 1. Internally insulated ductwork and air handling units.
 - 2. Relief air ducts (Economizer cycle exhaust air).
 - 3. Exhaust air ducts and plenums, and ventilation exhaust air shafts.
 - 4. Equipment: Expansion tanks, flash tanks, hot water pumps,.
 - 5. In hot piping: Unions, flexible connectors, control valves, PRVs, safety valves and discharge vent piping, vacuum breakers, thermostatic vent valves, steam traps 3/4 inch and smaller, exposed piping through floor for convectors and radiators. Insulate piping to within approximately 3 inches of uninsulated items.
- I. Plumbing work not to be insulated:
 - 1. Piping and valves of fire protection system.
 - 2. Chromium plated brass piping.

3. Water piping in contact with earth.
 4. Piping in pipe basement serving wall hydrants.
 5. Small horizontal cold water branch runs in partitions to individual fixtures may be without insulation for maximum distance of 3 feet.
 6. Distilled water piping.
- J. Apply insulation materials subject to the manufacturer's recommended temperature limits. Apply adhesives, mastic and coatings at the manufacturer's recommended minimum coverage.
- K. Elbows, flanges and other fittings shall be insulated with the same material as is used on the pipe straights. The elbow/ fitting insulation shall be field-fabricated, mitered or factory prefabricated to the necessary size and shape to fit on the elbow/ fitting. Use of polyurethane spray-foam to fill a PVC elbow jacket is prohibited on cold applications.
- L. Firestop Pipe and Duct insulation:
1. Provide firestopping insulation at fire and smoke barriers through penetrations. Fire stopping insulation shall be UL listed as defines in Section 07 84 00, FIRESTOPPING.
 2. Pipe and duct penetrations requiring fire stop insulation including, but not limited to the following:
 - a. Pipe risers through floors
 - b. Pipe or duct chase walls and floors
 - c. Smoke partitions
 - d. Fire partitions
- M. Provide metal jackets over insulation as follows:
1. All piping and ducts exposed to outdoor weather.
 2. Piping exposed in building, within 6 feet of the floor, that connects to sterilizers, kitchen and laundry equipment. Jackets may be applied with pop rivets. Provide aluminum angle ring escutcheons at wall, ceiling or floor penetrations.
 3. A 2 inch overlap is required at longitudinal and circumferential joints.

3.2 INSULATION INSTALLATION

A. Mineral Fiber Board:

1. Faced board: Apply board on pins spaced not more than 12 inches on center each way, and not less than 3 inches from each edge of board. In addition to pins, apply insulation bonding adhesive to entire underside of horizontal metal surfaces. Butt insulation edges

- tightly and seal all joints with laps and butt strips. After applying speed clips cut pins off flush and apply vapor seal patches over clips.
2. Exposed, unlined ductwork and equipment in unfinished areas, mechanical and electrical equipment rooms and attics, and duct work exposed to outdoor weather:
 - a. 2 inch thick insulation faced with ASJ (white all service jacket): Supply air duct and afterfilter housing.
 - b. 1-1/2 inch thick insulation faced with ASJ: Return air duct, mixed air plenums and prefilter housing.
 - c. Outside air intake ducts: one inch thick insulation faced with ASJ.
- B. Flexible Mineral Fiber Blanket:
1. Adhere insulation to metal with 4 inch wide strips of insulation bonding adhesive at 8 inches on center all around duct. Additionally secure insulation to bottom of ducts exceeding 24 inches in width with pins welded or adhered on 18 inch centers. Secure washers on pins. Butt insulation edges and seal joints with laps and butt strips. Staples may be used to assist in securing insulation. Seal all vapor retarder penetrations with mastic. Sagging duct insulation will not be acceptable. Install firestop duct insulation where required.
 2. Supply air ductwork to be insulated includes main and branch ducts from AHU discharge to room supply outlets, and the bodies of ceiling outlets to prevent condensation. Insulate sound attenuator units, coil casings and damper frames. To prevent condensation insulate trapeze type supports and angle iron hangers for flat oval ducts that are in direct contact with metal duct.
 3. Concealed supply air ductwork.
 - a. Above ceilings at a roof level: 2 inch thick insulation faced with FSK.
 - b. Above ceilings for other than roof level: 1-1/2 inch thick insulation faced with FSK.
 4. Concealed return air duct above ceilings at a roof level, unconditioned areas, and in chases with external wall or containing steam piping; 1-1/2 inch thick, insulation faced with FSK. Concealed return air ductwork in other locations need not be insulated.

5. Return air duct in interstitial spaces: 1-1/2 inch thick insulation faced with FSK.
6. Concealed outside air duct: 1-1/2 inch thick insulation faced with FSK.

C. Molded Mineral Fiber Pipe and Tubing Covering:

1. Fit insulation to pipe or duct, aligning longitudinal joints. Seal longitudinal joint laps and circumferential butt strips by rubbing hard with a nylon sealing tool to assure a positive seal. Staples may be used to assist in securing insulation. Seal all vapor retarder penetrations on cold piping with a generous application of vapor barrier mastic. Provide inserts and install with metal insulation shields at outside pipe supports. Install freeze protection insulation over heating cable.
2. Contractor's options for fitting, flange and valve insulation:
 - a. Insulating and finishing cement for sizes less than 4 inches operating at surface temperature of 61 degrees F or more.
 - b. Factory premolded, one piece PVC covers with mineral fiber, (Form B), inserts. Provide two insert layers for pipe temperatures below 40 degrees F, or above 250 degrees F. Secure first layer of insulation with twine. Seal seam edges with vapor barrier mastic and secure with fitting tape.
 - c. Factory molded, ASTM C547 or field mitered sections, joined with adhesive or wired in place. For hot piping finish with a smoothing coat of finishing cement. For cold fittings, 60 degrees F or less, vapor seal with a layer of glass fitting tape imbedded between two 1/16 inch coats of vapor barrier mastic.
 - d. Fitting tape shall extend over the adjacent pipe insulation and overlap on itself at least 2 inches.
3. Nominal thickness in millimeters and inches specified in table below, for piping above ground:

Nominal Thickness of Molded Mineral Fiber Insulation				
Nominal Pipe Size, inches:	1 & below	1-1/4- 3	4-6	8 and above
a. 251-350 F (HPS, MPS,)	2.0	2.5	3.5	3.5

Nominal Thickness of Molded Mineral Fiber Insulation				
Nominal Pipe Size, inches:	1 & below	1-1/4- 3	4-6	8 and above
b. HPR, MPR 212-250 degrees F (Vent piping from PRV safety valves, condensate receivers, and flash tanks)	1.0	2.0	2.0	2.0
c. 100-211 degrees F (LPR, PC, HWH, HWHR, GH, GHR)	1.0	1.5	2.0	2.0
Runouts to reheat coils	0.5	-	-	-
d. Domestic hot water supply and return	0.5	0.75	1.0	1.5

- - - E N D - - -

SECTION 23 09 23
DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Provide (a) direct-digital control system(s) as indicated on the project documents, point list, interoperability tables, drawings and as described in these specifications. Include a complete and working direct-digital control system. Include all engineering, programming, controls and installation materials, installation labor, commissioning and start-up, training, final project documentation and warranty.
1. The direct-digital control system(s) shall consist of high-speed, peer-to-peer network of DDC controllers, a control system server, and an Engineering Control Center. Provide a remote user using a standard web browser to access the control system graphics and change adjustable setpoints with the proper password.
 2. The direct-digital control system(s) shall be native BACnet. All new workstations, controllers, devices and components shall be listed by BACnet Testing Laboratories. All new workstations, controller, devices and components shall be accessible using a Web browser interface and shall communicate exclusively using the ASHRAE Standard 135 BACnet communications protocol without the use of gateways, unless otherwise allowed by this Section of the technical specifications, specifically shown on the design drawings and specifically requested otherwise by the VA.
 - a. If used, gateways shall support the ASHRAE Standard 135 BACnet communications protocol.
 - b. If used, gateways shall provide all object properties and read/write services shown on VA-approved interoperability schedules.
 3. The work administered by this Section of the technical specifications shall include all labor, materials, special tools, equipment, enclosures, power supplies, software, software licenses, Project specific software configurations and database entries, interfaces, wiring, tubing, installation, labeling, engineering, calibration, documentation, submittals, testing, verification, training services, permits and licenses, transportation, shipping, handling, administration, supervision, management, insurance,

Warranty, specified services and items required for complete and fully functional Controls Systems.

4. The control systems shall be designed such that each mechanical system shall operate under stand-alone mode. The contractor administered by this Section of the technical specifications shall provide controllers for each mechanical system. In the event of a network communication failure, or the loss of any other controller, the control system shall continue to operate independently. Failure of the ECC shall have no effect on the field controllers, including those involved with global strategies.
 5. The control system shall accommodate 1 Engineering Control Center(s) and the control system shall accommodate 5 web-based Users simultaneously, and the access to the system should be limited only by operator password.
- B. Some products are furnished but not installed by the contractor administered by this Section of the technical specifications. The contractor administered by this Section of the technical specifications shall formally coordinate in writing and receive from other contractors formal acknowledgements in writing prior to submission the installation of the products. These products include the following:
1. Control valves.
 2. Flow switches.
 3. Flow meters.
 4. Sensor wells and sockets in piping.
 5. Terminal unit controllers.
- C. Some products are installed but not furnished by the contractor administered by this Section of the technical specifications. The contractor administered by this Section of the technical specifications shall formally coordinate in writing and receive from other contractors formal acknowledgements in writing prior to submission the procurement of the products. These products include the following:
1. Factory-furnished accessory thermostats and sensors furnished with unitary equipment.
- D. Some products are not provided by, but are nevertheless integrated with the work executed by, the contractor administered by this Section of the technical specifications. The contractor administered by this Section of the technical specifications shall formally coordinate in writing and receive from other contractors formal acknowledgements in

writing prior to submission the particulars of the products. These products include the following:

1. Fire alarm systems. If zoned fire alarm is required by the project-specific requirements, this interface shall require multiple relays, which are provided and installed by the fire alarm system contractor, to be monitored.
2. Unitary HVAC equipment (rooftop air conditioning units, split systems) controls. These include:
 - a. Discharge temperature control.
 - b. Economizer control.
 - c. Setpoint reset.
 - d. Time of day indexing.
 - e. Status alarm.
3. Variable frequency drives. These controls, if not native BACnet, will require a BACnet Gateway.

E. Responsibility Table:

Work/Item/System	Furnish	Install	Low Voltage Wiring	Line Power
Control system low voltage and communication wiring	23 09 23	23 09 23	23 09 23	N/A
LAN conduits and raceway	23 09 23	23 09 23	N/A	N/A
Automatic dampers (not furnished with equipment)	23 09 23	23	N/A	N/A
Automatic damper actuators	23 09 23	23 09 23	23 09 23	23 09 23
Manual valves	23	23	N/A	N/A
Automatic valves	23 09 23	23	23 09 23	23 09 23
Pipe insertion devices and taps, flow and pressure stations.	23	23	N/A	N/A
Thermowells	23 09 23	23	N/A	N/A
Current Switches	23 09 23	23 09 23	23 09 23	N/A
Control Relays	23 09 23	23 09 23	23 09 23	N/A
Power distribution system monitoring interfaces	23 09 23	23 09 23	23 09 23	26
All control system nodes, equipment, housings, enclosures and panels.	23 09 23	23 09 23	23 09 23	26
Smoke detectors	28 31 00	28 31 00	28 31 00	28 31 00

Work/Item/System	Furnish	Install	Low Voltage Wiring	Line Power
Fire/Smoke Dampers	23	23	28 31 00	28 31 00
Smoke Dampers	23	23	28 31 00	28 31 00
Fire Dampers	23	23	N/A	N/A
VFDs	23 09 23	26	23 09 23	26
Refrigerant monitors	23	23 09 23	23 09 23	26
Fire Alarm shutdown relay interlock wiring	28	28	28	26
Control system monitoring of fire alarm smoke control relay	28	28	23 09 23	28
Fire-fighter's smoke control station (FSCS)	28	28	28	28
Fan Coil Unit controls (not furnished with equipment)	23 09 23	23 09 23	23 09 23	26
Packaged RTU space-mounted controls (not furnished with equipment)	23 09 23	23 09 23	23 09 23	26
Packaged RTU unit-mounted controls (not furnished with equipment)	23 09 23	23 09 23	23 09 23	26
Starters, HOA switches	23	23	N/A	26

- a. The combined system shall operate and function as one complete system including one database of control point objects and global control logic capabilities. Facility operators shall have complete operations and control capability over all systems, new and existing including; monitoring, trending, graphing, scheduling, alarm management, global point sharing, global strategy deployment, graphical operations interface and custom reporting as specified.
- b. The performance requirement for the combined system: the combined system shall operate and function as one complete system including one database of control point objects and global control logic capabilities. Facility operators shall have complete operations and control capability over all systems, new and existing including; monitoring, trending, graphing, scheduling, alarm management, global point sharing, global

strategy deployment, graphical operations interface and custom reporting as specified.

F. Unitary standalone systems including Unit Heaters, Cabinet Unit Heaters, Fan Coil Units, Base Board Heaters, thermal comfort ventilation fans, and similar units for control of room environment conditions may be equipped with integral controls furnished and installed by the equipment manufacturer or field mounted. Refer to equipment specifications and as indicated in project documents. Application of standalone unitary controls is limited to at least those systems wherein remote monitoring, alarm and start-up are not necessary. Examples of such systems include:

1. Light-switch-operated toilet exhaust
2. Vestibule heater
3. Exterior stair heater
4. Attic heating and ventilation
5. Mechanical or electrical room heating and ventilation.

1.2 DEFINITION

- A. Algorithm: A logical procedure for solving a recurrent mathematical problem; A prescribed set of well-defined rules or processes for the solution of a problem in a finite number of steps.
- B. ARCNET: ANSI/ATA 878.1 - Attached Resource Computer Network. ARCNET is a deterministic LAN technology; meaning it's possible to determine the maximum delay before a device is able to transmit a message.
- C. Analog: A continuously varying signal value (e.g., temperature, current, velocity etc).
- D. BACnet: A Data Communication Protocol for Building Automation and Control Networks , ANSI/ASHRAE Standard 135. This communications protocol allows diverse building automation devices to communicate data over and services over a network.
- E. BACnet/IP: Annex J of Standard 135. It defines and allows for using a reserved UDP socket to transmit BACnet messages over IP networks. A BACnet/IP network is a collection of one or more IP sub-networks that share the same BACnet network number.
- F. BACnet Internetwork: Two or more BACnet networks connected with routers. The two networks may sue different LAN technologies.
- G. BACnet Network: One or more BACnet segments that have the same network address and are interconnected by bridges at the physical and data link layers.

- H. BACnet Segment: One or more physical segments of BACnet devices on a BACnet network, connected at the physical layer by repeaters.
- I. BACnet Broadcast Management Device (BBMD): A communications device which broadcasts BACnet messages to all BACnet/IP devices and other BBMDs connected to the same BACnet/IP network.
- J. BACnet Interoperability Building Blocks (BIBBs): BACnet Interoperability Building Blocks (BIBBs) are collections of one or more BACnet services. These are prescribed in terms of an "A" and a "B" device. Both of these devices are nodes on a BACnet internetwork.
- K. BACnet Testing Laboratories (BTL). The organization responsible for testing products for compliance with the BACnet standard, operated under the direction of BACnet International.
- L. Baud: It is a signal change in a communication link. One signal change can represent one or more bits of information depending on type of transmission scheme. Simple peripheral communication is normally one bit per Baud. (e.g., Baud rate = 78,000 Baud/sec is 78,000 bits/sec, if one signal change = 1 bit).
- M. Binary: A two-state system where a high signal level represents an "ON" condition and an "OFF" condition is represented by a low signal level.
- N. BMP or bmp: Suffix, computerized image file, used after the period in a DOS-based computer file to show that the file is an image stored as a series of pixels.
- O. Bus Topology: A network topology that physically interconnects workstations and network devices in parallel on a network segment.
- P. Control Unit (CU): Generic term for any controlling unit, stand-alone, microprocessor based, digital controller residing on secondary LAN or Primary LAN, used for local controls or global controls
- Q. Deadband: A temperature range over which no heating or cooling is supplied, i.e., 22-25 degrees C (72-78 degrees F), as opposed to a single point change over or overlap).
- R. Device: a control system component that contains a BACnet Device Object and uses BACnet to communicate with other devices.
- S. Device Object: Every BACnet device requires one Device Object, whose properties represent the network visible properties of that device. Every Device Object requires a unique Object Identifier number on the BACnet internetwork. This number is often referred to as the device instance.

- T. Device Profile: A specific group of services describing BACnet capabilities of a device, as defined in ASHRAE Standard 135-2008, Annex L. Standard device profiles include BACnet Operator Workstations (B-OWS), BACnet Building Controllers (B-BC), BACnet Advanced Application Controllers (B-AAC), BACnet Application Specific Controllers (B-ASC), BACnet Smart Actuator (B-SA), and BACnet Smart Sensor (B-SS). Each device used in new construction is required to have a PICS statement listing which service and BIBBs are supported by the device.
- U. Diagnostic Program: A software test program, which is used to detect and report system or peripheral malfunctions and failures. Generally, this system is performed at the initial startup of the system.
- V. Direct Digital Control (DDC): Microprocessor based control including Analog/Digital conversion and program logic. A control loop or subsystem in which digital and analog information is received and processed by a microprocessor, and digital control signals are generated based on control algorithms and transmitted to field devices in order to achieve a set of predefined conditions.
- W. Distributed Control System: A system in which the processing of system data is decentralized and control decisions can and are made at the subsystem level. System operational programs and information are provided to the remote subsystems and status is reported back to the Engineering Control Center. Upon the loss of communication with the Engineering Control center, the subsystems shall be capable of operating in a stand-alone mode using the last best available data.
- X. Download: The electronic transfer of programs and data files from a central computer or operation workstation with secondary memory devices to remote computers in a network (distributed) system.
- Y. DXF: An AutoCAD 2-D graphics file format. Many CAD systems import and export the DXF format for graphics interchange.
- Z. Electrical Control: A control circuit that operates on line or low voltage and uses a mechanical means, such as a temperature sensitive bimetal or bellows, to perform control functions, such as actuating a switch or positioning a potentiometer.
- AA. Electronic Control: A control circuit that operates on low voltage and uses a solid-state components to amplify input signals and perform control functions, such as operating a relay or providing an output signal to position an actuator.

- BB. Engineering Control Center (ECC): The centralized control point for the intelligent control network. The ECC comprises of personal computer and connected devices to form a single workstation.
- CC. Ethernet: A trademark for a system for exchanging messages between computers on a local area network using coaxial, fiber optic, or twisted-pair cables.
- DD. Firmware: Firmware is software programmed into read only memory (ROM) chips. Software may not be changed without physically altering the chip.
- EE. Gateway: Communication hardware connecting two or more different protocols. It translates one protocol into equivalent concepts for the other protocol. In BACnet applications, a gateway has BACnet on one side and non-BACnet (usually proprietary) protocols on the other side.
- FF. GIF: Abbreviation of Graphic interchange format.
- GG. Graphic Program (GP): Program used to produce images of air handler systems, fans, chillers, pumps, and building spaces. These images can be animated and/or color-coded to indicate operation of the equipment.
- HH. Graphic Sequence of Operation: It is a graphical representation of the sequence of operation, showing all inputs and output logical blocks.
- II. I/O Unit: The section of a digital control system through which information is received and transmitted. I/O refers to analog input (AI, digital input (DI), analog output (AO) and digital output (DO). Analog signals are continuous and represent temperature, pressure, flow rate etc, whereas digital signals convert electronic signals to digital pulses (values), represent motor status, filter status, on-off equipment etc.
- JJ. I/P: a method for conveying and routing packets of information over LAN paths. User Datagram Protocol (UDP) conveys information to "sockets" without confirmation of receipt. Transmission Control Protocol (TCP) establishes "sessions", which have end-to-end confirmation and guaranteed sequence of delivery.
- KK. JPEG: A standardized image compression mechanism stands for Joint Photographic Experts Group, the original name of the committee that wrote the standard.
- LL. Local Area Network (LAN): A communication bus that interconnects operator workstation and digital controllers for peer-to-peer communications, sharing resources and exchanging information.

- MM. Network Repeater: A device that receives data packet from one network and rebroadcasts to another network. No routing information is added to the protocol.
- NN. MS/TP: Master-slave/token-passing (ISO/IEC 8802, Part 3). It is not an acceptable LAN option for VA health-care facilities. It uses twisted-pair wiring for relatively low speed and low cost communication.
- OO. Native BACnet Device: A device that uses BACnet as its primary method of communication with other BACnet devices without intermediary gateways. A system that uses native BACnet devices at all levels is a native BACnet system.
- PP. Network Number: A site-specific number assigned to each network segment to identify for routing. This network number must be unique throughout the BACnet internetwork.
- QQ. Object: The concept of organizing BACnet information into standard components with various associated properties. Examples include analog input objects and binary output objects.
- RR. Object Identifier: An object property used to identify the object, including object type and instance. Object Identifiers must be unique within a device.
- SS. Object Properties: Attributes of an object. Examples include present value and high limit properties of an analog input object. Properties are defined in ASHRAE 135; some are optional and some are required. Objects are controlled by reading from and writing to object properties.
- TT. Operating system (OS): Software, which controls the execution of computer application programs.
- UU. PCX: File type for an image file. When photographs are scanned onto a personal computer they can be saved as PCX files and viewed or changed by a special application program as Photo Shop.
- VV. Peripheral: Different components that make the control system function as one unit. Peripherals include monitor, printer, and I/O unit.
- WW. Peer-to-Peer: A networking architecture that treats all network stations as equal partners- any device can initiate and respond to communication with other devices.
- XX. PICS: Protocol Implementation Conformance Statement, describing the BACnet capabilities of a device. All BACnet devices have published PICS.

YY. PID: Proportional, integral, and derivative control, used to control modulating equipment to maintain a setpoint.

ZZ. Repeater: A network component that connects two or more physical segments at the physical layer.

AAA. Router: a component that joins together two or more networks using different LAN technologies. Examples include joining a BACnet Ethernet LAN to a BACnet MS/TP LAN.

BBB. Sensors: devices measuring state points or flows, which are then transmitted back to the DDC system.

CCC. Thermostats : devices measuring temperatures, which are used in control of standalone or unitary systems and equipment not attached to the DDC system.

1.4 QUALITY ASSURANCE

A. Criteria:

1. Single Source Responsibility of subcontractor: The Contractor shall obtain hardware and software supplied under this Section and delegate the responsibility to a single source controls installation subcontractor. The controls subcontractor shall be responsible for the complete design, installation, and commissioning of the system. The controls subcontractor shall be in the business of design, installation and service of such building automation control systems similar in size and complexity.
2. Equipment and Materials: Equipment and materials shall be cataloged products of manufacturers regularly engaged in production and installation of HVAC control systems. Products shall be manufacturer's latest standard design and have been tested and proven in actual use.
3. The controls subcontractor shall provide a list of no less than five similar projects which have building control systems as specified in this Section. These projects must be on-line and functional such that the Department of Veterans Affairs (VA) representative would observe the control systems in full operation.
4. The controls subcontractor shall have in-place facility within 50 miles with technical staff, spare parts inventory for the next five (5) years, and necessary test and diagnostic equipment to support the control systems.
5. The controls subcontractor shall have minimum of three years experience in design and installation of building automation systems

similar in performance to those specified in this Section. Provide evidence of experience by submitting resumes of the project manager, the local branch manager, project engineer, the application engineering staff, and the electronic technicians who would be involved with the supervision, the engineering, and the installation of the control systems. Training and experience of these personnel shall not be less than three years. Failure to disclose this information will be a ground for disqualification of the supplier.

6. Provide a competent and experienced Project Manager employed by the Controls Contractor. The Project Manager shall be supported as necessary by other Contractor employees in order to provide professional engineering, technical and management service for the work. The Project Manager shall attend scheduled Project Meetings as required and shall be empowered to make technical, scheduling and related decisions on behalf of the Controls Contractor.

B. Codes and Standards:

1. All work shall conform to the applicable Codes and Standards.
2. Electronic equipment shall conform to the requirements of FCC Regulation, Part 15, Governing Radio Frequency Electromagnetic Interference, and be so labeled.

1.5 PERFORMANCE

A. The system shall conform to the following:

1. Graphic Display: The system shall display up to four (4) graphics on a single screen with a minimum of twenty (20) dynamic points per graphic. All current data shall be displayed within ten (10) seconds of the request.
2. Graphic Refresh: The system shall update all dynamic points with current data within eight (8) seconds. Data refresh shall be automatic, without operator intervention.
3. Object Command: The maximum time between the command of a binary object by the operator and the reaction by the device shall be two(2) seconds. Analog objects shall start to adjust within two (2) seconds.
4. Object Scan: All changes of state and change of analog values shall be transmitted over the high-speed network such that any data used or displayed at a controller or work-station will be current, within the prior six (6) seconds.

5. Alarm Response Time: The maximum time from when an object goes into alarm to when it is annunciated at the workstation shall not exceed (10) seconds.
6. Program Execution Frequency: Custom and standard applications shall be capable of running as often as once every (5) seconds. The Contractor shall be responsible for selecting execution times consistent with the mechanical process under control.
7. Multiple Alarm Annunciations: All workstations on the network shall receive alarms within five (5) seconds of each other.
8. Performance: Programmable Controllers shall be able to execute DDC PID control loops at a selectable frequency from at least once every one (1) second. The controller shall scan and update the process value and output generated by this calculation at this same frequency.
9. Reporting Accuracy: Listed below are minimum acceptable reporting end-to-end accuracies for all values reported by the specified system:

Measured Variable	Reported Accuracy
Space temperature	$\pm 0.5^{\circ}\text{C}$ ($\pm 1^{\circ}\text{F}$)
Ducted air temperature	$\pm 0.5^{\circ}\text{C}$ [$\pm 1^{\circ}\text{F}$]
Outdoor air temperature	$\pm 1.0^{\circ}\text{C}$ [$\pm 2^{\circ}\text{F}$]
Air flow (terminal)	$\pm 10\%$ of reading
Air pressure (ducts)	± 25 Pa [± 0.1 "w.c.]
Air pressure (space)	± 0.3 Pa [± 0.001 "w.c.]
Electrical Power	$\pm 0.5\%$ of reading

Note 1: for both absolute and differential pressure

10. Control stability and accuracy: Control sequences shall maintain measured variable at setpoint within the following tolerances:

Controlled Variable	Control Accuracy	Range of Medium
Air Pressure	± 3 Pa (± 0.01 in. w.g.)	-25 to 25 Pa (-0.1 to 0.1 in. w.g.)
Airflow	$\pm 10\%$ of full scale	
Space Temperature	$\pm 1.0^{\circ}\text{C}$ ($\pm 2.0^{\circ}\text{F}$)	
Duct Temperature	$\pm 1.5^{\circ}\text{C}$ ($\pm 3^{\circ}\text{F}$)	
Humidity	$\pm 5\%$ RH	
Fluid Pressure	± 10 kPa (± 1.5 psi)	0-1 MPa (1-150 psi)

11. Extent of direct digital control: control design shall allow for at least the points indicated on the points lists on the drawings.

1.6 WARRANTY

- A. Labor and materials for control systems shall be warranted for a period as specified under Warranty in FAR clause 52.246-21.
- B. Control system failures during the warranty period shall be adjusted, repaired, or replaced at no cost or reduction in service to the owner. The system includes all computer equipment, transmission equipment, and all sensors and control devices.
- C. The on-line support service shall allow the Controls supplier to dial out over telephone lines to or connect via (through password-limited access) VPN through the internet monitor and control the facility's building automation system. This remote connection to the facility shall be within two (2) hours of the time that the problem is reported. This coverage shall be extended to include normal business hours, after business hours, weekend and holidays. If the problem cannot be resolved with on-line support services, the Controls supplier shall dispatch the qualified personnel to the job site to resolve the problem within 24 hours after the problem is reported.
- D. Controls and Instrumentation subcontractor shall be responsible for temporary operations and maintenance of the control systems during the construction period until final commissioning, training of facility operators and acceptance of the project by VA.

1.7 SUBMITTALS

- A. Submit shop drawings in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's literature and data for all components including the following:

1. A wiring diagram for each type of input device and output device including DDC controllers, modems, repeaters, etc. Diagram shall show how the device is wired and powered, showing typical connections at the digital controllers and each power supply, as well as the device itself. Show for all field connected devices, including but not limited to, control relays, motor starters, electric or electronic actuators, and temperature pressure, flow and humidity sensors and transmitters.
2. A diagram of each terminal strip, including digital controller terminal strips, terminal strip location, termination numbers and the associated point names.
3. Control dampers and control valves schedule, including the size and pressure drop.
4. Control air-supply components, and computations for sizing compressors, receivers and main air-piping, if pneumatic controls are furnished.
5. Catalog cut sheets of all equipment used. This includes, but is not limited to software (by manufacturer and by third parties), DDC controllers, panels, peripherals, airflow measuring stations and associated components, and auxiliary control devices such as sensors, actuators, and control dampers. When manufacturer's cut sheets apply to a product series rather than a specific product, the data specifically applicable to the project shall be highlighted. Each submitted piece of literature and drawings should clearly reference the specification and/or drawings that it supposed to represent.
6. Sequence of operations for each HVAC system and the associated control diagrams. Equipment and control labels shall correspond to those shown on the drawings.
7. Color prints of proposed graphics with a list of points for display.
8. Furnish a BACnet Protocol Implementation Conformance Statement (PICS) for each BACnet-compliant device.
9. Schematic wiring diagrams for all control, communication and power wiring. Provide a schematic drawing of the central system installation. Label all cables and ports with computer manufacturers' model numbers and functions. Show all interface wiring to the control system.

10. An instrumentation list for each controlled system. Each element of the controlled system shall be listed in table format. The table shall show element name, type of device, manufacturer, model number, and product data sheet number.
 11. Riser diagrams of wiring between central control unit and all control panels.
 12. Scaled plan drawings showing routing of LAN and locations of control panels, controllers, routers, gateways, ECC, and larger controlled devices.
 13. Construction details for all installed conduit, cabling, raceway, cabinets, and similar. Construction details of all penetrations and their protection.
 14. Quantities of submitted items may be reviewed but are the responsibility of the contractor administered by this Section of the technical specifications.
- C. Product Certificates: Compliance with Article, QUALITY ASSURANCE.
- D. Licenses: Provide licenses for all software residing on and used by the Controls Systems and transfer these licenses to the Owner prior to completion.
- E. As Built Control Drawings:
1. Furnish three (3) copies of as-built drawings for each control system. The documents shall be submitted for approval prior to final completion.
 2. Furnish one (1) stick set of applicable control system prints for each mechanical system for wall mounting. The documents shall be submitted for approval prior to final completion.
 3. Furnish one (1) CD-ROM in CAD DWG and/or .DXF format for the drawings noted in subparagraphs above.
- F. Operation and Maintenance (O/M) Manuals):
1. Submit in accordance with Article, INSTRUCTIONS, in Specification Section 01 00 00, GENERAL REQUIREMENTS.
 2. Include the following documentation:
 - a. General description and specifications for all components, including logging on/off, alarm handling, producing trend reports, overriding computer control, and changing set points and other variables.

- b. Detailed illustrations of all the control systems specified for ease of maintenance and repair/replacement procedures, and complete calibration procedures.
 - c. One copy of the final version of all software provided including operating systems, programming language, operator workstation software, and graphics software.
 - d. Complete troubleshooting procedures and guidelines for all systems.
 - e. Complete operating instructions for all systems.
 - f. Recommended preventive maintenance procedures for all system components including a schedule of tasks for inspection, cleaning and calibration. Provide a list of recommended spare parts needed to minimize downtime.
 - g. Training Manuals: Submit the course outline and training material to the Owner for approval three (3) weeks prior to the training to VA facility personnel. These persons will be responsible for maintaining and the operation of the control systems, including programming. The Owner reserves the right to modify any or all of the course outline and training material.
 - h. Licenses, guaranty, and other pertaining documents for all equipment and systems.
- G. Submit Performance Report to Resident Engineer prior to final inspection.

1.8 INSTRUCTIONS

- A. Instructions to VA operations personnel: Perform in accordance with Article, INSTRUCTIONS, in Specification Section 01 00 00, GENERAL REQUIREMENTS, and as noted below.
- 1. First Phase: Formal instructions to the VA facilities personnel for a total of 16 hours, given in multiple training sessions (each no longer than four hours in length), conducted sometime between the completed installation and prior to the performance test period of the control system, at a time mutually agreeable to the Contractor and the VA.
 - 2. Second Phase: This phase of training shall comprise of on the job training during start-up, checkout period, and performance test period. VA facilities personnel will work with the Contractor's installation and test personnel on a daily basis during start-up and checkout period. During the performance test period, controls

- subcontractor will provide 8 hours of instructions, given in multiple training sessions (each no longer than four hours in length), to the VA facilities personnel.
3. The O/M Manuals shall contain approved submittals as outlined in Article 1.7, SUBMITTALS. The Controls subcontractor will review the manual contents with VA facilities personnel during second phase of training.
 4. Training shall be given by direct employees of the controls system subcontractor.

1.9 PROJECT CONDITIONS (ENVIRONMENTAL CONDITIONS OF OPERATION)

- A. The ECC and peripheral devices and system support equipment shall be designed to operate in ambient condition of 20 to 35°C (65 to 90°F) at a relative humidity of 20 to 80% non-condensing.
- B. The CUs used outdoors shall be mounted in NEMA 4 waterproof enclosures, and shall be rated for operation at -40 to 65°C (-40 to 150°F).
- C. All electronic equipment shall operate properly with power fluctuations of plus 10 percent to minus 15 percent of nominal supply voltage.
- D. Sensors and controlling devices shall be designed to operate in the environment, which they are sensing or controlling.

1.10 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Heating, Refrigerating, and Air-Conditioning Engineers (ASHRAE):
Standard 135-10.....BACNET Building Automation and Control Networks
- C. American Society of Mechanical Engineers (ASME):
B16.18-01.....Cast Copper Alloy Solder Joint Pressure Fittings.
B16.22-01.....Wrought Copper and Copper Alloy Solder Joint Pressure Fittings.
- D. American Society of Testing Materials (ASTM):
B32-08.....Standard Specification for Solder Metal
B88-09.....Standard Specifications for Seamless Copper Water Tube
B88M-09.....Standard Specification for Seamless Copper Water Tube (Metric)
B280-08.....Standard Specification for Seamless Copper Tube for Air-Conditioning and Refrigeration Field Service

D2737-03.....Standard Specification for Polyethylene (PE)
Plastic Tubing

E. Federal Communication Commission (FCC):

Rules and Regulations Title 47 Chapter 1-2001 Part 15: Radio Frequency
Devices.

F. Institute of Electrical and Electronic Engineers (IEEE):

802.3-11.....Information Technology-Telecommunications and
Information Exchange between Systems-Local and
Metropolitan Area Networks- Specific
Requirements-Part 3: Carrier Sense Multiple
Access with Collision Detection (CSMA/CD)
Access method and Physical Layer Specifications

G. National Fire Protection Association (NFPA):

70-11.....National Electric Code
90A-09.....Standard for Installation of Air-Conditioning
and Ventilation Systems

H. Underwriter Laboratories Inc (UL):

94-10.....Tests for Flammability of Plastic Materials for
Parts and Devices and Appliances
294-10.....Access Control System Units
486A/486B-10.....Wire Connectors
555S-11.....Standard for Smoke Dampers
916-10.....Energy Management Equipment
1076-10.....Proprietary Burglar Alarm Units and Systems

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Use new products that the manufacturer is currently manufacturing and that have been installed in a minimum of 25 installations. Spare parts shall be available for at least five years after completion of this contract.

2.2 CONTROLS SYSTEM ARCHITECTURE

A. General

1. The Controls Systems shall consist of multiple Nodes and associated equipment connected by industry standard digital and communication network arrangements.
2. The ECC, building controllers and principal communications network equipment shall be standard products of recognized major manufacturers available through normal PC and computer vendor channels - not "Clones" assembled by a third-party subcontractor.
3. The networks shall, at minimum, comprise, as necessary, the following:
 - a. A fixed ECC and a portable operator's terminal.

- b. Network computer processing, data storage and BACnet-compliant communication equipment including Servers and digital data processors.
 - c. BACnet-compliant routers, bridges, switches, hubs, modems, gateways, interfaces and similar communication equipment.
 - d. Active processing BACnet-compliant building controllers connected to other BACnet-compliant controllers together with their power supplies and associated equipment.
 - e. Addressable elements, sensors, transducers and end devices.
 - f. Third-party equipment interfaces and gateways as described and required by the Contract Documents.
 - g. Other components required for a complete and working Control Systems as specified.
- B. The Specifications for the individual elements and component subsystems shall be minimum requirements and shall be augmented as necessary by the Contractor to achieve both compliance with all applicable codes, standards and to meet all requirements of the Contract Documents.
- C. Network Architecture
- 1. The Controls communication network shall utilize BACnet communications protocol operating over a standard Ethernet LAN and operate at a minimum speed of 100 Mb/sec.
 - 2. The networks shall utilize only copper and optical fiber communication media as appropriate and shall comply with applicable codes, ordinances and regulations. They may also utilize digital wireless technologies as appropriate to the application and if approved by the VA.
 - 3. All necessary telephone lines, ISDN lines and internet Service Provider services and connections will be provided by the VA.
- D. Third Party Interfaces:
- 1. The contractor administered by this Section of the technical specifications shall include necessary hardware, equipment, software and programming to allow data communications between the controls systems and building systems supplied by other trades.
 - 2. Other manufacturers and contractors supplying other associated systems and equipment shall provide their necessary hardware, software and start-up at their cost and shall cooperate fully with the contractor administered by this Section of the technical

specifications in a timely manner and at their cost to ensure complete functional integration.

E. Servers:

1. Provide data storage server(s) to archive historical data including trends, alarm and event histories and transaction logs.
2. Equip these server(s) with the same software tool set that is located in the BACnet building controllers for system configuration and custom logic definition and color graphic configuration.
3. Access to all information on the data storage server(s) shall be through the same browser functionality used to access individual nodes. When logged onto a server the operator will be able to also interact with any other controller on the control system as required for the functional operation of the controls systems. The contractor administered by this Section of the technical specifications shall provide all necessary digital processor programmable data storage server(s).
4. These server(s) shall be utilized for controls systems application configuration, for archiving, reporting and trending of data, for operator transaction archiving and reporting, for network information management, for alarm annunciation, for operator interface tasks, for controls application management and similar. These server(s) shall utilize IT industry standard data base platforms which utilize a database declarative language designed for managing data in relational database management systems (RDBMS) such as SQL.

2.3 COMMUNICATION

- A. Control products, communication media, connectors, repeaters, hubs, and routers shall comprise a BACnet internetwork. Controller and operator interface communication shall conform to ANSI/ASHRAE Standard 135-2008, BACnet.
1. The Data link / physical layer protocol (for communication) acceptable to the VA throughout its facilities is Ethernet (ISO 8802-3) and BACnet/IP.
- B. Each controller shall have a communication port for connection to an operator interface.
- C. Project drawings indicate remote buildings or sites to be connected by a nominal 56,000 baud modem over voice-grade telephone lines. In each remote location a modem and field device connection shall allow

communication with each controller on the internetwork as specified in Paragraph D.

- D. Internetwork operator interface and value passing shall be transparent to internetwork architecture.
 - 1. An operator interface connected to a controller shall allow the operator to interface with each internetwork controller as if directly connected. Controller information such as data, status, reports, system software, and custom programs shall be viewable and editable from each internetwork controller.
 - 2. Inputs, outputs, and control variables used to integrate control strategies across multiple controllers shall be readable by each controller on the internetwork. Program and test all cross-controller links required to execute specified control system operation. An authorized operator shall be able to edit cross-controller links by typing a standard object address.
- E. System shall be expandable to at least twice the required input and output objects with additional controllers, associated devices, and wiring. Expansion shall not require operator interface hardware additions or software revisions.
- F. ECCs and Controllers with real-time clocks shall use the BACnet Time Synchronization service. The system shall automatically synchronize system clocks daily from an operator-designated device via the internetwork. The system shall automatically adjust for daylight savings and standard time as applicable.

2.4 NETWORK AND DEVICE NAMING CONVENTION

A. Network Numbers

- 1. BACnet network numbers shall be based on a "facility code, network" concept. The "facility code" is the VAMC's or VA campus' assigned numeric value assigned to a specific facility or building. The "network" typically corresponds to a "floor" or other logical configuration within the building. BACnet allows 65535 network numbers per BACnet internet work.
- 2. The network numbers are thus formed as follows: "Net #" = "FFFNN" where:
 - a. FFF = Facility code (see below)
 - b. NN = 00-99 This allows up to 100 networks per facility or building

B. Device Instances

1. BACnet allows 4194305 unique device instances per BACnet internet work. Using Agency's unique device instances are formed as follows:
 "Dev #" = "FFFNDD" where
 - a. FFF and N are as above and
 - b. DD = 00-99, this allows up to 100 devices per network.
2. Note Special cases, where the network architecture of limiting device numbering to DD causes excessive subnet works. The device number can be expanded to DDD and the network number N can become a single digit. In NO case shall the network number N and the device number D exceed 4 digits.
3. Facility code assignments:
4. 000-400 Building/facility number
5. Note that some facilities have a facility code with an alphabetic suffix to denote wings, related structures, etc. The suffix will be ignored. Network numbers for facility codes above 400 will be assigned in the range 000-399.

C. Device Names

1. Name the control devices based on facility name, location within a facility, the system or systems that the device monitors and/or controls, or the area served. The intent of the device naming is to be easily recognized. Names can be up to 254 characters in length, without embedded spaces. Provide the shortest descriptive, but unambiguous, name. For example, in building #123 prefix the number with a "B" followed by the building number, if there is only one chilled water pump "CHWP-1", a valid name would be "B123.CHWP.1.STARTSTOP". If there are two pumps designated "CHWP-1", one in a basement mechanical room (Room 0001) and one in a penthouse mechanical room (Room PH01), the names could be "B123.R0001.CHWP.1.STARTSTOP" or "B123.RPH01.CHWP.1.STARTSTOP". In the case of unitary controllers, for example a VAV box controller, a name might be "B123.R101.VAV". These names should be used for the value of the "Object_Name" property of the BACnet Device objects of the controllers involved so that the BACnet name and the EMCS name are the same.

2.5 BACNET DEVICES

- A. All BACnet Devices - controllers, gateways, routers, actuators and sensors shall conform to BACnet Device Profiles and shall be BACnet Testing Laboratories (BTL) -Listed as conforming to those Device

Profiles. Protocol Implementation Conformance Statements (PICSs), describing the BACnet capabilities of the Devices shall be published and available of the Devices through links in the BTL website.

1. BACnet Building Controllers, historically referred to as NACs, shall conform to the BACnet B-BC Device Profile, and shall be BTL-Listed as conforming to the B-BC Device Profile. The Device's PICS shall be submitted.
2. BACnet Advanced Application Controllers shall conform to the BACnet B-AAC Device Profile, and shall be BTL-Listed as conforming to the B-AAC Device Profile. The Device's PICS shall be submitted.
3. BACnet Application Specific Controllers shall conform to the BACnet B-ASC Device Profile, and shall be BTL-Listed as conforming to the B-ASC Device Profile. The Device's PICS shall be submitted.
4. BACnet Smart Actuators shall conform to the BACnet B-SA Device Profile, and shall be BTL-Listed as conforming to the B-SA Device Profile. The Device's PICS shall be submitted.
5. BACnet Smart Sensors shall conform to the BACnet B-SS Device Profile, and shall be BTL-Listed as conforming to the B-SS Device Profile. The Device's PICS shall be submitted.
6. BACnet routers and gateways shall conform to the BACnet B-OTH Device Profile, and shall be BTL-Listed as conforming to the B-OTH Device Profile. The Device's PICS shall be submitted.

2.6 CONTROLLERS

A. General. Provide an adequate number of BTL-Listed B-BC building controllers and an adequate number of BTL-Listed B-AAC advanced application controllers to achieve the performance specified in the Part 1 Article on "System Performance." Each of these controllers shall meet the following requirements.

1. The controller shall have sufficient memory to support its operating system, database, and programming requirements.
2. The building controller shall share data with the ECC and the other networked building controllers. The advanced application controller shall share data with its building controller and the other networked advanced application controllers.
3. The operating system of the controller shall manage the input and output communication signals to allow distributed controllers to share real and virtual object information and allow for central monitoring and alarms.

4. Controllers that perform scheduling shall have a real-time clock.
 5. The controller shall continually check the status of its processor and memory circuits. If an abnormal operation is detected, the controller shall:
 - a. assume a predetermined failure mode, and
 - b. generate an alarm notification.
 6. The controller shall communicate with other BACnet devices on the internetwork using the BACnet Read (Execute and Initiate) and Write (Execute and Initiate) Property services.
 7. Communication.
 - a. Each controller shall reside on a BACnet network using the ISO 8802-3 (Ethernet) Data Link/Physical layer protocol for its communications. Each building controller also shall perform BACnet routing if connected to a network of custom application and application specific controllers.
 - b. The controller shall provide a service communication port using BACnet Data Link/Physical layer protocol for connection to a portable operator's terminal.
 8. Keypad. A local keypad and display shall be provided for each controller. The keypad shall be provided for interrogating and editing data. Provide a system security password shall be available to prevent unauthorized use of the keypad and display.
 9. Serviceability. Provide diagnostic LEDs for power, communication, and processor. All wiring connections shall be made to field-removable, modular terminal strips or to a termination card connected by a ribbon cable.
 10. Memory. The controller shall maintain all BIOS and programming information in the event of a power loss for at least 72 hours.
 11. The controller shall be able to operate at 90% to 110% of nominal voltage rating and shall perform an orderly shutdown below 80% nominal voltage. Controller operation shall be protected against electrical noise of 5 to 120 Hz and from keyed radios up to 5 W at 1 m (3 ft).
- B. Provide BTL-Listed B-ASC application specific controllers for each piece of equipment for which they are constructed. Application specific controllers shall communicate with other BACnet devices on the internetwork using the BACnet Read (Execute) Property service.

1. Each B-ASC shall be capable of stand-alone operation and shall continue to provide control functions without being connected to the network.
 2. Each B-ASC will contain sufficient I/O capacity to control the target system.
 3. Communication.
 - a. Each controller shall reside on a BACnet network using the ISO 8802-3 (Ethernet) Data Link/Physical layer protocol for its communications. Each building controller also shall perform BACnet routing if connected to a network of custom application and application specific controllers.
 - b. Each controller shall have a BACnet Data Link/Physical layer compatible connection for a laptop computer or a portable operator's tool. This connection shall be extended to a space temperature sensor port where shown.
 4. Serviceability. Provide diagnostic LEDs for power, communication, and processor. All wiring connections shall be made to field-removable, modular terminal strips or to a termination card connected by a ribbon cable.
 5. Memory. The application specific controller shall use nonvolatile memory and maintain all BIOS and programming information in the event of a power loss.
 6. Immunity to power and noise. Controllers shall be able to operate at 90% to 110% of nominal voltage rating and shall perform an orderly shutdown below 80%. Operation shall be protected against electrical noise of 5-120 Hz and from keyed radios up to 5 W at 1 m (3 ft).
 7. Transformer. Power supply for the ASC must be rated at a minimum of 125% of ASC power consumption and shall be of the fused or current limiting type.
- C. Direct Digital Controller Software
1. The software programs specified in this section shall be commercially available, concurrent, multi-tasking operating system and support the use of software application that operates under DOS or Microsoft Windows.
 2. All points shall be identified by up to 30-character point name and 16-character point descriptor. The same names shall be used at the ECC.

3. All control functions shall execute within the stand-alone control units via DDC algorithms. The VA shall be able to customize control strategies and sequences of operations defining the appropriate control loop algorithms and choosing the optimum loop parameters.
4. All controllers shall be capable of being programmed to utilize stored default values for assured fail-safe operation of critical processes. Default values shall be invoked upon sensor failure or, if the primary value is normally provided by the central or another CU, or by loss of bus communication. Individual application software packages shall be structured to assume a fail-safe condition upon loss of input sensors. Loss of an input sensor shall result in output of a sensor-failed message at the ECC. Each ACU and RCU shall have capability for local readouts of all functions. The UCUs shall be read remotely.
5. All DDC control loops shall be able to utilize any of the following control modes:
 - a. Two position (on-off, slow-fast) control.
 - b. Proportional control.
 - c. Proportional plus integral (PI) control.
 - d. Proportional plus integral plus derivative (PID) control. All PID programs shall automatically invoke integral wind up prevention routines whenever the controlled unit is off, under manual control of an automation system or time initiated program.
 - e. Automatic tuning of control loops.
6. System Security: Operator access shall be secured using individual password and operator's name. Passwords shall restrict the operator to the level of object, applications, and system functions assigned to him. A minimum of six (6) levels of security for operator access shall be provided.
7. Application Software: The controllers shall provide the following programs as a minimum for the purpose of optimizing energy consumption while maintaining comfortable environment for occupants. All application software shall reside and run in the system digital controllers. Editing of the application shall occur at the ECC or via a portable operator's terminal, when it is necessary, to access directly the programmable unit.
 - a. Economizer: An economizer program shall be provided for VAV systems. This program shall control the position of air handler

relief, return, and outdoors dampers. If the outdoor air dry bulb temperature falls below changeover set point the energy control center will modulate the dampers to provide 100 percent outdoor air. The operator shall be able to override the economizer cycle and return to minimum outdoor air operation at any time.

- b. Night Setback/Morning Warm up Control: The system shall provide the ability to automatically adjust set points for this mode of operation.
- c. Optimum Start/Stop (OSS): Optimum start/stop program shall automatically be coordinated with event scheduling. The OSS program shall start HVAC equipment at the latest possible time that will allow the equipment to achieve the desired zone condition by the time of occupancy, and it shall also shut down HVAC equipment at the earliest possible time before the end of the occupancy period and still maintain desired comfort conditions. The OSS program shall consider both outside weather conditions and inside zone conditions. The program shall automatically assign longer lead times for weekend and holiday shutdowns. The program shall poll all zones served by the associated AHU and shall select the warmest and coolest zones. These shall be used in the start time calculation. It shall be possible to assign occupancy start times on a per air handler unit basis. The program shall meet the local code requirements for minimum outdoor air while the building is occupied. Modification of assigned occupancy start/stop times shall be possible via the ECC.
- d. Event Scheduling: Provide a comprehensive menu driven program to automatically start and stop designated points or a group of points according to a stored time. This program shall provide the capability to individually command a point or group of points. When points are assigned to one common load group it shall be possible to assign variable time advances/delays between each successive start or stop within that group. Scheduling shall be calendar based and advance schedules may be defined up to one year in advance. Advance schedule shall override the day-to-day schedule. The operator shall be able to define the following information:

- 1) Time, day.
 - 2) Commands such as on, off, auto.
 - 3) Time delays between successive commands.
 - 4) Manual overriding of each schedule.
 - 5) Allow operator intervention.
- f. Alarm Reporting: The operator shall be able to determine the action to be taken in the event of an alarm. Alarms shall be routed to the ECC based on time and events. An alarm shall be able to start programs, login the event, print and display the messages. The system shall allow the operator to prioritize the alarms to minimize nuisance reporting and to speed operator's response to critical alarms. A minimum of six (6) priority levels of alarms shall be provided for each point.
- g. Remote Communications: The system shall have the ability to dial out in the event of an alarm to the ECC and alpha-numeric pagers. The alarm message shall include the name of the calling location, the device that generated the alarm, and the alarm message itself. The operator shall be able to remotely access and operate the system using dial up communications. Remote access shall allow the operator to function the same as local access.
- h. Maintenance Management (PM): The program shall monitor equipment status and generate maintenance messages based upon the operators defined equipment run time, starts, and/or calendar date limits. A preventative maintenance alarm shall be printed indicating maintenance requirements based on pre-defined run time. Each preventive message shall include point description, limit criteria and preventative maintenance instruction assigned to that limit. A minimum of 480-character PM shall be provided for each component of units such as air handling units.

2.10 SENSORS (AIR, WATER AND STEAM)

- A. Sensors' measurements shall be read back to the DDC system, and shall be visible by the ECC.
- B. Temperature and Humidity Sensors shall be electronic, vibration and corrosion resistant for wall, immersion, and/or duct mounting. Provide all remote sensors as required for the systems.
1. Temperature Sensors: thermistor type for terminal units and Resistance Temperature Device (RTD) with an integral transmitter type for all other sensors.

- a. Duct sensors shall be rigid or averaging type as shown on drawings. Averaging sensor shall be a minimum of 1 linear ft of sensing element for each sq ft of cooling coil face area.
- b. Immersion sensors shall be provided with a separable well made of stainless steel, bronze or monel material. Pressure rating of well is to be consistent with the system pressure in which it is to be installed.
- c. Space sensors shall be equipped with in-space User set-point adjustment, override switch, numerical temperature display on sensor cover, and communication port. Match room thermostats. Provide a tooled-access cover.
 - 1) Public space sensor: setpoint adjustment shall be only through the ECC or through the DDC system's diagnostic device/laptop. Do not provide in-space User set-point adjustment. Provide an opaque keyed-entry cover if needed to restrict in-space User set-point adjustment.
- d. Outdoor air temperature sensors shall have watertight inlet fittings and be shielded from direct sunlight.
- f. Wire: Twisted, shielded-pair cable.
- g. Output Signal: 4-20 ma.
- 2. Humidity Sensors: Bulk polymer sensing element type.
 - a. Duct and room sensors shall have a sensing range of 20 to 80 percent with accuracy of ± 2 to ± 5 percent RH, including hysteresis, linearity, and repeatability.
 - b. Outdoor humidity sensors shall be furnished with element guard and mounting plate and have a sensing range of 0 to 100 percent RH.
 - c. 4-20 ma continuous output signal.
- C. Static Pressure Sensors: Non-directional, temperature compensated.
 - 1. 4-20 ma output signal.
 - 2. 0 to 5 inches wg for duct static pressure range.
 - 3. 0 to 0.25 inch wg for Building static pressure range.
- D. Current Switches: Current operated switches shall be self powered, solid state with adjustable trip current as well as status, power, and relay command status LED indication. The switches shall be selected to match the current of the application and output requirements of the DDC systems.

2.12 CONTROL CABLES

A. General:

1. Ground cable shields, drain conductors, and equipment to eliminate shock hazard and to minimize ground loops, common-mode returns, noise pickup, cross talk, and other impairments. Comply with Sections 27 05 26 and 26 05 26.
2. Cable conductors to provide protection against induction in circuits. Crosstalk attenuation within the System shall be in excess of -80 dB throughout the frequency ranges specified.
3. Minimize the radiation of RF noise generated by the System equipment so as not to interfere with any audio, video, data, computer main distribution frame (MDF), telephone customer service unit (CSU), and electronic private branch exchange (EPBX) equipment the System may service.
4. The as-installed drawings shall identify each cable as labeled, used cable, and bad cable pairs.
5. Label system's cables on each end. Test and certify cables in writing to the VA before conducting proof-of-performance testing. Minimum cable test requirements are for impedance compliance, inductance, capacitance, signal level compliance, opens, shorts, cross talk, noise, and distortion, and split pairs on all cables in the frequency ranges used. Make available all cable installation and test records at demonstration to the VA. All changes (used pair, failed pair, etc.) shall be posted in these records as the change occurs.
6. Power wiring shall not be run in conduit with communications trunk wiring or signal or control wiring operating at 100 volts or less.

B. Analogue control cabling shall be not less than No. 18 AWG solid, with thermoplastic insulated conductors as specified in Section 26 05 21.

C. Copper digital communication cable between the ECC and the B-BC and B-AAC controllers shall be 100BASE-TX Ethernet, Category 5e or 6, not less than minimum 24 American Wire Gauge (AWG) solid, Shielded Twisted Pair (STP) or Unshielded Twisted Pair (UTP), with thermoplastic insulated conductors, enclosed in a thermoplastic outer jacket, as specified in Section 27 15 00.

1. Other types of media commonly used within IEEE Std 802.3 LANs (e.g., 10Base-T and 10Base-2) shall be used only in cases to interconnect with existing media.

- D. Optical digital communication fiber, if used, shall be Multimode or Singlemode fiber, 62.5/125 micron for multimode or 10/125 micron for singlemode micron with SC or ST connectors as specified in TIA-568-C.1. Terminations, patch panels, and other hardware shall be compatible with the specified fiber and shall be as specified in Section 27 15 00. Fiber-optic cable shall be suitable for use with the 100Base-FX or the 100Base-SX standard (as applicable) as defined in IEEE Std 802.3.

2.13 THERMOSTATS AND HUMIDISTATS

- A. Room thermostats controlling unitary standalone heating and cooling devices not connected to the DDC system shall have three modes of operation (heating - null or dead band - cooling). Thermostats for patient bedrooms shall have capability of being adjusted to eliminate null or dead band. Wall mounted thermostats shall have manufacturer's recommendation finish, setpoint range and temperature display and external adjustment:
1. Electronic Thermostats: Solid-state, microprocessor based, programmable to daily, weekend, and holiday schedules.
 - a. Public Space Thermostat: Public space thermostat shall have a thermistor sensor and shall not have a visible means of set point adjustment. Adjustment shall be via the digital controller to which it is connected.
 - b. Patient Room Thermostats: thermistor with in-space User set point adjustment and an on-casing room temperature numerical temperature display.
 - c. Psychiatric Patient Room Sensors: Electronic duct sensor as noted under Article 2.4.
 - d. Battery replacement without program loss.
- B. Strap-on thermostats shall be enclosed in a dirt-and-moisture proof housing with fixed temperature switching point and single pole, double throw switch.
- C. Freezestats shall have a minimum of 300 mm (one linear foot) of sensing element for each 0.093 square meter (one square foot) of coil area. A freezing condition at any increment of 300 mm (one foot) anywhere along the sensing element shall be sufficient to operate the thermostatic element. Freezestats shall be manually-reset.
- D. Room Humidistats: Provide fully proportioning humidistat with adjustable throttling range for accuracy of settings and conservation. The humidistat shall have set point scales shown in percent of relative

humidity located on the instrument. Systems showing moist/dry or high/low are not acceptable.

2.14 FINAL CONTROL ELEMENTS AND OPERATORS

- A. Fail Safe Operation: Control valves and dampers shall provide "fail safe" operation in either the normally open or normally closed position as required for freeze, moisture, and smoke or fire protection.
- B. Spring Ranges: Range as required for system sequencing and to provide tight shut-off.
- C. Smoke Dampers and Combination Fire/Smoke Dampers: Dampers and operators are specified in Section 23 31 00, HVAC DUCTS AND CASINGS. Control of these dampers is specified under this Section.

2.15 AIR FLOW CONTROL

- A. Airflow and static pressure shall be controlled via digital controllers with inputs from airflow control measuring stations and static pressure inputs as specified. Controller outputs shall be analog or pulse width modulating output signals. The controllers shall include the capability to control via simple proportional (P) control, proportional plus integral (PI), proportional plus integral plus derivative (PID), and on-off. The airflow control programs shall be factory-tested programs that are documented in the literature of the control manufacturer.
- B. Air Flow Measuring Station -- Electronic Thermal Type:
 - 1. Air Flow Sensor Probe:
 - a. Each air flow sensor shall contain two individual thermal sensing elements. One element shall determine the velocity of the air stream while the other element shall compensate for changes in temperature. Each thermal flow sensor and its associated control circuit and signal conditioning circuit shall be factory calibrated and be interchangeable to allow replacement of a sensor without recalibration of the entire flow station. The sensor in the array shall be located at the center of equal area segment of the duct and the number of sensors shall be adequate to accommodate the expected velocity profile and variation in flow and temperature. The airflow station shall be of the insertion type in which sensor support structures are inserted from the outside of the ducts to make up the complete electronic velocity array.

- b. Thermal flow sensor shall be constructed of hermetically sealed thermistors or nickel chromium or reference grade platinum wire, wound over an epoxy, stainless steel or ceramic mandrel and coated with a material suitable for the conditions to be encountered. Each dual sensor shall be mounted in an extruded aluminum alloy strut.
2. Air Flow Sensor Grid Array:
- a. Each sensor grid shall consist of a lattice network of temperature sensors and linear integral controllers (ICs) situated inside an aluminum casing suitable for mounting in a duct. Each sensor shall be mounted within a strut facing downstream of the airflow and located so that it is protected on the upstream side. All wiring shall be encased (out of the air stream) to protect against mechanical damage.
 - b. The casing shall be made of welded aluminum of sufficient strength to prevent structural bending and bowing. Steel or iron composite shall not be acceptable in the casing material.
 - c. Pressure drop through the flow station shall not exceed 4 Pascal (0.015" W.G.) at 1,000 meter per minute (3,000 FPM).
3. Electronics Panel:
- a. Electronics Panel shall consist of a surface mounted enclosure complete with solid-state microprocessor and software.
 - b. Electronics Panel shall be A/C powered 120 VAC and shall have the capability to transmit signals of 0-5 VDC, 0-10 VCD or 4-20 ma for use in control of the HVAC Systems. The electronic panel shall have the capability to accept user defined scaling parameters for all output signals.
 - c. Electronics Panel shall have the capability to digitally display airflow in CFM and temperature in degrees F. The displays shall be provided as an integral part of the electronics panel. The electronic panel shall have the capability to totalize the output flow in CFM for two or more systems, as required. A single output signal may be provided which will equal the sum of the systems totalized. Output signals shall be provided for temperature and airflow. Provide remote mounted air flow or temperature displays where indicated on the plans.
 - d. Electronics Panel shall have the following:
 - 1) Minimum of 12-bit A/D conversion.

- 2) Field adjustable digital primary output offset and gain.
 - 3) Airflow analog output scaling of 100 to 10,000 FPM.
 - 4) Temperature analog output scaling from -45°C to 70°C (-50°F to 160°F).
 - 5) Analog output resolution (full scale output) of 0.025%.
- e. All readings shall be in I.P. units.
4. Thermal flow sensors and its electronics shall be installed as per manufacturer's instructions. The probe sensor density shall be as follows:

Probe Sensor Density	
Area (sq.ft.)	Qty. Sensors
<=1	2
>1 to <4	4
4 to <8	6
8 to <12	8
12 to <16	12
>=16	16

- a. Complete installation shall not exhibit more than $\pm 2.0\%$ error in airflow measurement output for variations in the angle of flow of up to 10 percent in any direction from its calibrated orientation. Repeatability of readings shall be within $\pm 0.25\%$.
- D. Constant Volume Control Systems shall consist of an air flow measuring station along with such relays and auxiliary devices as required to produce a complete functional system. The transmitter shall receive its air flow signal and static pressure signal from the flow measuring station and shall have a span not exceeding three times the design flow rate. The CU shall receive the transmitter signal and shall provide an output to the fan volume control device to maintain a constant flow rate. The CU shall provide proportional plus integral (PI) (automatic reset) control mode and where required also inverse derivative mode. Overall system accuracy shall be plus or minus the equivalent of 2 Pascal (0.008 inch) velocity pressure as measured by the flow station.
- F. Airflow Synchronization:
1. Systems shall consist of an air flow measuring station for each supply and return duct, the CU and such relays, as required to provide a complete functional system that will maintain a constant flow rate difference between supply and return air to an accuracy of

- ±10%. In systems where there is no suitable location for a flow measuring station that will sense total supply or return flow, provide multiple flow stations with a differential pressure transmitter for each station. Signals from the multiple transmitters shall be added through the CU such that the resultant signal is a true representation of total flow.
2. The total flow signals from supply and return air shall be the input signals to the CU. This CU shall track the return air fan capacity in proportion to the supply air flow under all conditions.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General:

1. Examine project plans for control devices and equipment locations; and report any discrepancies, conflicts, or omissions to Resident Engineer for resolution before proceeding for installation.
2. Install equipment, piping, wiring /conduit parallel to or at right angles to building lines.
3. Install all equipment and piping in readily accessible locations. Do not run tubing and conduit concealed under insulation or inside ducts.
4. Mount control devices, tubing and conduit located on ducts and apparatus with external insulation on standoff support to avoid interference with insulation.
5. Provide sufficient slack and flexible connections to allow for vibration of piping and equipment.
6. Run tubing and wire connecting devices on or in control cabinets parallel with the sides of the cabinet neatly racked to permit tracing.
7. Install equipment level and plum.

A. Electrical Wiring Installation:

1. All wiring cabling shall be installed in conduits. Install conduits and wiring in accordance with Specification Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS. Conduits carrying control wiring and cabling shall be dedicated to the control wiring and cabling: these conduits shall not carry power wiring. Provide plastic end sleeves at all conduit terminations to protect wiring from burrs.

2. Install analog signal and communication cables in conduit and in accordance with Specification Section 26 05 21. Install digital communication cables in conduit and in accordance with Specification Section 27 15 00, Communications Horizontal Cabling.
 3. Install conduit and wiring between operator workstation(s), digital controllers, electrical panels, indicating devices, instrumentation, miscellaneous alarm points, thermostats, and relays as shown on the drawings or as required under this section.
 4. Install all electrical work required for a fully functional system and not shown on electrical plans or required by electrical specifications. Where low voltage (less than 50 volt) power is required, provide suitable Class B transformers.
 5. Install all system components in accordance with local Building Code and National Electric Code.
 - a. Splices: Splices in shielded and coaxial cables shall consist of terminations and the use of shielded cable couplers. Terminations shall be in accessible locations. Cables shall be harnessed with cable ties.
 - b. Equipment: Fit all equipment contained in cabinets or panels with service loops, each loop being at least 300 mm (12 inches) long. Equipment for fiber optics system shall be rack mounted, as applicable, in ventilated, self-supporting, code gauge steel enclosure. Cables shall be supported for minimum sag.
 - c. Cable Runs: Keep cable runs as short as possible. Allow extra length for connecting to the terminal board. Do not bend flexible coaxial cables in a radius less than ten times the cable outside diameter.
 - d. Use vinyl tape, sleeves, or grommets to protect cables from vibration at points where they pass around sharp corners, through walls, panel cabinets, etc.
 6. Conceal cables, except in mechanical rooms and areas where other conduits and piping are exposed.
 7. Permanently label or code each point of all field terminal strips to show the instrument or item served. Color-coded cable with cable diagrams may be used to accomplish cable identification.
 8. Grounding: ground electrical systems per manufacturer's written requirements for proper and safe operation.
- C. Install Sensors and Controls:

1. Temperature Sensors:

- a. Install all sensors and instrumentation according to manufacturer's written instructions. Temperature sensor locations shall be readily accessible, permitting quick replacement and servicing of them without special skills and tools.
- b. Calibrate sensors to accuracy specified, if not factory calibrated.
- c. Use of sensors shall be limited to its duty, e.g., duct sensor shall not be used in lieu of room sensor.
- d. Install room sensors permanently supported on wall frame. They shall be mounted at 1.5 meter (5.0 feet) above the finished floor.
- e. Mount sensors rigidly and adequately for the environment within which the sensor operates. Separate extended-bulb sensors form contact with metal casings and coils using insulated standoffs.
- f. Sensors used in mixing plenum, and hot and cold decks shall be of the averaging of type. Averaging sensors shall be installed in a serpentine manner horizontally across duct. Each bend shall be supported with a capillary clip.
- g. All pipe mounted temperature sensors shall be installed in wells.
- h. All wires attached to sensors shall be air sealed in their conduits or in the wall to stop air transmitted from other areas affecting sensor reading.
- i. Permanently mark terminal blocks for identification. Protect all circuits to avoid interruption of service due to short-circuiting or other conditions. Line-protect all wiring that comes from external sources to the site from lightning and static electricity.

2. Pressure Sensors:

- a. Install duct static pressure sensor tips facing directly downstream of airflow.
- b. Install high-pressure side of the differential switch between the pump discharge and the check valve.
- c. Install snubbers and isolation valves on steam pressure sensing devices.

3. Actuators:

- a. Mount and link damper and valve actuators according to manufacturer's written instructions.

- b. Check operation of damper/actuator combination to confirm that actuator modulates damper smoothly throughout stroke to both open and closed position.
 - c. Check operation of valve/actuator combination to confirm that actuator modulates valve smoothly in both open and closed position.
- 4. Flow Switches:
 - a. Install flow switch according to manufacturer's written instructions.
 - b. Mount flow switch a minimum of 5 pipe diameters up stream and 5 pipe diameters downstream or 600 mm (2 feet) whichever is greater, from fittings and other obstructions.
 - c. Assure correct flow direction and alignment.
 - d. Mount in horizontal piping-flow switch on top of the pipe.
- D. Installation of network:
 - 1. Ethernet:
 - a. The network shall employ Ethernet LAN architecture, as defined by IEEE 802.3. The Network Interface shall be fully Internet Protocol (IP) compliant allowing connection to currently installed IEEE 802.3, Compliant Ethernet Networks.
 - b. The network shall directly support connectivity to a variety of cabling types. As a minimum provide the following connectivity: 100 Base TX (Category 5e cabling) for the communications between the ECC and the B-BC and the B-AAC controllers.
 - 2. Third party interfaces: Contractor shall integrate real-time data from building systems by other trades and databases originating from other manufacturers as specified and required to make the system work as one system.
- E. Installation of digital controllers and programming:
 - 1. Provide a separate digital control panel for each major piece of equipment, such as air handling unit, chiller, pumping unit etc. Points used for control loop reset such as outdoor air, outdoor humidity, or space temperature could be located on any of the remote control units.
 - 2. Provide sufficient internal memory for the specified control sequences and trend logging. There shall be a minimum of 25 percent of available memory free for future use.

3. System point names shall be modular in design, permitting easy operator interface without the use of a written point index.
4. Provide software programming for the applications intended for the systems specified, and adhere to the strategy algorithms provided.
5. Provide graphics for each piece of equipment and floor plan in the building. This includes each chiller, cooling tower, air handling unit, fan, terminal unit, boiler, pumping unit etc. These graphics shall show all points dynamically as specified in the point list.

3.2 SYSTEM VALIDATION AND DEMONSTRATION

- A. As part of final system acceptance, a system demonstration is required (see below). Prior to start of this demonstration, the contractor is to perform a complete validation of all aspects of the controls and instrumentation system.
- B. Validation
 1. Prepare and submit for approval a validation test plan including test procedures for the performance verification tests. Test Plan shall address all specified functions of the ECC and all specified sequences of operation. Explain in detail actions and expected results used to demonstrate compliance with the requirements of this specification. Explain the method for simulating the necessary conditions of operation used to demonstrate performance of the system. Test plan shall include a test check list to be used by the Installer's agent to check and initial that each test has been successfully completed. Deliver test plan documentation for the performance verification tests to the owner's representative 30 days prior to start of performance verification tests. Provide draft copy of operation and maintenance manual with performance verification test.
 2. After approval of the validation test plan, installer shall carry out all tests and procedures therein. Installer shall completely check out, calibrate, and test all connected hardware and software to insure that system performs in accordance with approved specifications and sequences of operation submitted. Installer shall complete and submit Test Check List.
- C. Demonstration
 1. System operation and calibration to be demonstrated by the installer in the presence of the Architect or VA's representative on random samples of equipment as dictated by the Architect or VA's

- representative. Should random sampling indicate improper commissioning, the owner reserves the right to subsequently witness complete calibration of the system at no addition cost to the VA.
2. Demonstrate to authorities that all required safeties and life safety functions are fully functional and complete.
 3. Make accessible, personnel to provide necessary adjustments and corrections to systems as directed by balancing agency.
 4. The following witnessed demonstrations of field control equipment shall be included:
 - a. Observe HVAC systems in shut down condition. Check dampers and valves for normal position.
 - b. Test application software for its ability to communicate with digital controllers, operator workstation, and uploading and downloading of control programs.
 - c. Demonstrate the software ability to edit the control program off-line.
 - d. Demonstrate reporting of alarm conditions for each alarm and ensure that these alarms are received at the assigned location, including operator workstations.
 - e. Demonstrate ability of software program to function for the intended applications-trend reports, change in status etc.
 - f. Demonstrate via graphed trends to show the sequence of operation is executed in correct manner, and that the HVAC systems operate properly through the complete sequence of operation, e.g., seasonal change, occupied/unoccupied mode, and warm-up condition.
 - g. Demonstrate hardware interlocks and safeties functions, and that the control systems perform the correct sequence of operation after power loss and resumption of power loss.
 - h. Prepare and deliver to the VA graphed trends of all control loops to demonstrate that each control loop is stable and the set points are maintained.
 - i. Demonstrate that each control loop responds to set point adjustment and stabilizes within one (1) minute. Control loop trend data shall be instantaneous and the time between data points shall not be greater than one (1) minute.
 5. Witnessed demonstration of ECC functions shall consist of:
 - a. Running each specified report.

- b. Display and demonstrate each data entry to show site specific customizing capability. Demonstrate parameter changes.
- c. Step through penetration tree, display all graphics, demonstrate dynamic update, and direct access to graphics.
- d. Execute digital and analog commands in graphic mode.
- e. Demonstrate DDC loop precision and stability via trend logs of inputs and outputs (6 loops minimum).
- f. Demonstrate EMS performance via trend logs and command trace.
- g. Demonstrate scan, update, and alarm responsiveness.
- h. Demonstrate spreadsheet/curve plot software, and its integration with database.
- i. Demonstrate on-line user guide, and help function and mail facility.
- j. Demonstrate digital system configuration graphics with interactive upline and downline load, and demonstrate specified diagnostics.
- k. Demonstrate multitasking by showing dynamic curve plot, and graphic construction operating simultaneously via split screen.
- l. Demonstrate class programming with point options of beep duration, beep rate, alarm archiving, and color banding.

----- END -----

SECTION 23 11 23
FACILITY NATURAL-GAS PIPING

PART 1 - GENERAL

1.1 DESCRIPTION

Fuel gas systems, including piping, equipment and all necessary accessories as designated in this section. Fuel gas piping for central boiler plants is not included.

1.2 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Pipe & Fittings.
 - 2. Valves.
 - 3. Strainers.
 - 4. All items listed in Part 2 - Products.
- C. Detailed shop drawing of clamping device and extensions when required in connection with the waterproofing membrane.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Federal Specifications (Fed. Spec.):
 - A-A-59617.....Unions, Brass or Bronze Threaded, Pipe
Connections and Solder-Joint Tube Connections
- C. American National Standards Institute (ANSI):
 - American Society of Mechanical Engineers (ASME): (Copyrighted Society)
 - A13.1-(2007)Scheme for Identification of Piping Systems
 - B16.3-(2006).....Malleable Iron Threaded Fittings: Classes 150
and 300 ANSI/ASME
 - B16.9-2007.....Factory-Made Wrought Steel Buttwelding Fittings
ANSI/ASME
 - B16.11-2009.....Forged Steel Fittings, Socket-Welding and
Threaded ANSI/ASME
 - B16.15-2006.....Cast Copper Alloy Threaded Fittings: Classes
125 and 250 ANSI/ASME
 - B31.8-2010Gas Transmission and Distribution Piping
Systems ANSI/ASME

D. American Society for Testing and Materials (ASTM):

- A47-99(2009)Standard Specification for Ferritic Malleable
Iron Castings
- A53-10.....Standard Specification for Pipe, Steel, Black
And Hot-Dipped, Zinc-coated Welded and Seamless
- A183-09.....Standard Specification for Carbon Steel Track
Bolts and Nuts
- A536-09.....Standard Specification for Ductile Iron
Castings
- A733-03(2009)e1.....Standard Specification for Welded and Seamless
Carbon Steel and Austenitic Stainless Steel
Pipe Nipples
- B687-99(2005)e1.....Standard Specification for Brass, Copper, and
Chromium-Plated Pipe Nipples

E. National Fire Protection Association (NFPA):

- 54-2009National Fuel Gas Code

F. International Code Council

- IPC 2009International Plumbing Code
- IFGC 2009.....International Fuel Gas Code

G. International Association of Plumbing and Mechanical Officials (IAPMO):

- Uniform Plumbing Code - 2009
- IS6-06.....Installation Standard

H. Manufacturers Standardization Society of the Valve and Fittings

- Industry, Inc. (MSS):
- SP-72-2010Ball Valves with Flanged or Butt-Welding For
General Service
- SP-110-2010.....Ball Valve Threaded, Socket-Welding, Solder
Joint, Grooved and Flared Ends

PART 2 - PRODUCTS**2.1 FUEL GAS PIPING**

- A. Pipe: Black steel, ASTM A53, Schedule 40.
- B. Nipples: Steel, ASTM A733, Schedule 40.
- C. Fittings:
 - 1. Sizes 50 mm (2 inch) under ANSI B 16.3 threaded malleable iron.
 - 2. Over 50 mm (2 inch) and up to 100 mm (4 inch) ANSI B16.11 socket welded.
 - 3. Over 100 mm (4 inch) ANSI 16.9 butt welded.
- D. Joints: Provide welded or threaded joints.

2.2 EXPOSED FUEL GAS PIPING

- A. Finished Room: Use full iron pipe size chrome plated brass piping for exposed fuel gas piping connecting fixtures, casework, cabinets, equipment and reagent racks when not concealed by apron including those furnished by the Government or specified in other sections.
1. Pipe: Fed. Spec. WW-P-351, standard weight
 2. Fittings: ANSI B16.15 cast bronze threaded fittings with chrome finish, (125 and 250).
 3. Nipples: ASTM B 687, Chromium-plated.
 4. Unions: 50 mm (2 inches and smaller) Mss SP-72, SP-110, Brass or Bronze threaded with chrome finish. Unions 65 mm (2-1/2 inches) and larger shall be flange type with approved gaskets.
 5. Valves: Mss SP-72, SP-110, Brass or bronze with chrome finish.
- B. Unfinished Rooms, Mechanical Rooms and Kitchens: Chrome-plated brass piping is not required. Paint piping systems as specified in Section 09 91 00, PAINTING

2.3 VALVES

- A. Ball Valve: Bronze body, rated for 1025 kPa at 185°C (150 psi at 365°F), 1725 kPa at 121°C (250 psi at 250°F), reinforced TFE seat, stem seal and thrust washer; end entry, threaded ends, UL-listed for natural or LP gas shut off service when used on those services.
- B. Gas Vent Cocks: Type 701: Bronze body, tee handle, rated for 205 kPa at 38°C (30 psi at 100°F), ground plug, rated for tight shut-off on fuel gas service.

2.4 WATERPROOFING

- A. Provide at points where pipes pass through membrane waterproofed floors or walls in contact with earth.
- B. Floors: Provide cast iron stack sleeve with flashing device and a underdeck clamp. After stack is passed through sleeve, provide a waterproofed caulked joint at top hub.
- C. Walls: See detail shown on drawings.

2.5 STRAINERS

- A. Provide on high pressure side of pressure reducing valves, on inlet side of indicating and control instruments and equipment subject to sediment damage and where shown on drawings. Strainer element shall be removable without disconnection of piping.
- B. Gas Lines: "Y" type with removable mesh lined brass strainer sleeve.

C. Body: Smaller than 80 mm (3 inches), brass or bronze; 80 mm (3 inches) and larger, cast iron or semi-steel.

2.6 DIELECTRIC FITTINGS

Provide dielectric couplings or unions between ferrous and non-ferrous pipe.

2.7 GAS EQUIPMENT CONNECTORS

Flexible connectors with teflon core, interlocked galvanized steel protective casing, AGA certified design.

PART 3 - EXECUTION

3.1 INSTALLATION

A. General: Comply with the International Fuel Gas Code and the following:

1. Install branch piping for fuel gas and connect to all fixtures, valves, cocks, outlets, casework, cabinets and equipment, including those furnished by the Government or specified in other sections.
2. Pipe shall be round and straight. Cutting shall be done with proper tools. Pipe, shall be reamed to full size after cutting.
3. All pipe runs shall be laid out to avoid interference with other work.
4. Install valves with stem in horizontal position whenever possible. All valves shall be easily accessible.
5. Install union and shut-off valve on pressure piping at connections to equipment.
6. Pipe Hangers, Supports and Accessories:
 - a. All piping shall be supported per the International Fuel Gas Code, Chapter No. 4.
 - b. Shop Painting and Plating: Hangers, supports, rods, inserts and accessories used for Pipe supports shall be shop coated with red lead or zinc Chromate primer paint. Electroplated copper hanger rods, hangers and accessories may be used with copper tubing.
 - c. Floor, Wall and Ceiling Plates, Supports, Hangers:
 - 1) Solid or split unplated cast iron, chrome plated in finished areas.
 - 2) All plates shall be provided with set screws.
 - 3) Pipe Hangers: Height adjustable clevis type.
 - 4) Adjustable Floor Rests and Base Flanges: Steel.
 - 5) Concrete Inserts: "Universal" or continuous slotted type.

- 6) Hanger Rods: Mild, low carbon steel, fully threaded or Threaded at each end with two removable nuts at each end for positioning rod and hanger and locking each in place.
 - 7) Riser Clamps: Malleable iron or steel.
 - 8) Rollers: Cast iron.
 - 9) Self-drilling type expansion shields shall be "Phillips" type, with case hardened steel expander plugs.
 - 10) Miscellaneous Materials: As specified, required, directed or as noted on the drawings for proper installation of hangers, supports and accessories.
7. Install cast chrome plated escutcheon with set screw at each wall, floor and ceiling penetration in exposed finished locations and within cabinets and millwork.
 8. Penetrations:
 - a. Fire Stopping: Where pipes pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING. Completely fill and seal clearances between piping and openings with the fire stopping materials.
 - b. Waterproofing: At floor penetrations, completely seal clearances around the pipe and make watertight with sealant as specified in Section 07 92 00, JOINT SEALANTS.
- B. Piping shall conform to the following:
1. Fuel Gas:
 - a. Entire fuel gas piping installation shall be in accordance with requirements of NFPA 54.
 - b. Provide fuel gas piping with plugged drip pockets at low points.
 - c. Install automatic shutoff valve (earthquake valve) on discharge side of meter. Valve shall positively shut off supply of gas in case of pressure failure, remain shut off until manually reopened, and be provided with outside adjustment for reset.

3.2 CLEANING OF SYSTEM AFTER INSTALLATION

Clean all piping systems to remove all dirt, coatings and debris.

3.3 TESTS

- A. General: Test system either in its entirety or in sections after system is installed or cleaned.

- B. Test shall be made in accordance with Section 406 of the International Fuel Gas Code. The system shall be tested at a minimum of 1.5 times maximum working pressure, but not less than 3 psig (20 kPa) gage).

3.4 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 05 93 - TESTING, ADJUSTING, AND BALANCING FOR HVAC for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.

- - - E N D - - -

SECTION 23 23 00
REFRIGERANT PIPING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Field refrigerant piping for direct expansion HVAC systems.
- B. Refrigerant piping shall be sized, selected, and designed either by the equipment manufacturer or in strict accordance with the manufacturer's published instructions. The schematic piping diagram shall show all accessories such as, stop valves, level indicators, liquid receivers, oil separator, gauges, thermostatic expansion valves, solenoid valves, moisture separators and driers to make a complete installation.
- C. Definitions:
 - 1. Refrigerating system: Combination of interconnected refrigerant-containing parts constituting one closed refrigeration circuit in which a refrigerant is circulated for the purpose of extracting heat.
 - a. Low side means the parts of a refrigerating system subjected to evaporator pressure.
 - b. High side means the parts of a refrigerating system subjected to condenser pressure.
 - 2. Brazed joint: A gas-tight joint obtained by the joining of metal parts with alloys which melt at temperatures higher than 449 degrees C (840 degrees F) but less than the melting temperatures of the joined parts.

1.2 QUALITY ASSURANCE

- A. Refer to specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- B. Comply with ASHRAE Standard 15, Safety Code for Mechanical Refrigeration. The application of this Code is intended to assure the safe design, construction, installation, operation, and inspection of every refrigerating system employing a fluid which normally is vaporized and liquefied in its refrigerating cycle.
- C. Comply with ASME B31.5: Refrigerant Piping and Heat Transfer Components.
- D. Products shall comply with UL 207 "Refrigerant-Containing Components and Accessories, "Nonelectrical"; or UL 429 "Electrical Operated Valves."

1.3 SUBMITTALS

- A. Submit in accordance with specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Shop Drawings:

1. Complete information for components noted, including valves and refrigerant piping accessories, clearly presented, shall be included to determine compliance with drawings and specifications for components noted below:
 - a. Tubing and fittings
 - b. Valves
 - c. Strainers
 - d. Moisture-liquid indicators
 - e. Filter-driers
 - f. Flexible metal hose
 - g. Liquid-suction interchanges
 - h. Oil separators (when specified)
 - i. Gages
 - j. Pipe and equipment supports
 - k. Refrigerant and oil
 - l. Pipe/conduit roof penetration cover
 - m. Soldering and brazing materials
2. Layout of refrigerant piping and accessories, including flow capacities, valves locations, and oil traps slopes of horizontal runs, floor/wall penetrations, and equipment connection details.
- C. Certification: Copies of certificates for welding procedure, performance qualification record and list of welders' names and symbols.
- D. Design Manual: Furnish two copies of design manual of refrigerant valves and accessories.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Air Conditioning, Heating, and Refrigeration Institute (ARI/AHRI):
 - 495-1999 (R2002).....Standard for Refrigerant Liquid Receivers
 - 730-2005.....Flow Capacity Rating of Suction-Line Filters and Suction-Line Filter-Driers
 - 750-2007.....Thermostatic Refrigerant Expansion Valves
 - 760-2007.....Performance Rating of Solenoid Valves for Use with Volatile Refrigerants
- C. American Society of Heating Refrigerating and Air Conditioning Engineers (ASHRAE):
 - ANSI/ASHRAE 15-2007.....Safety Standard for Refrigeration Systems (ANSI)
 - ANSI/ASHRAE 17-2008.....Method of Testing Capacity of Thermostatic Refrigerant Expansion Valves (ANSI)

63.1-95 (RA 01).....Method of Testing Liquid Line Refrigerant Driers
(ANSI)

D. American National Standards Institute (ANSI):

ASME (ANSI)A13.1-2007...Scheme for Identification of Piping Systems
Z535.1-2006.....Safety Color Code

E. American Society of Mechanical Engineers (ASME):

ANSI/ASME B16.22-2001 (R2005)

Wrought Copper and Copper Alloy Solder-Joint Pressure Fittings (ANSI)

ANSI/ASME B16.24-2006 Cast Copper Alloy Pipe Flanges and Flanged
Fittings, Class 150, 300, 400, 600, 900, 1500 and 2500 (ANSI)

ANSI/ASME B31.5-2006....Refrigeration Piping and Heat Transfer
Components (ANSI)

ANSI/ASME B40.100-2005..Pressure Gauges and Gauge Attachments

ANSI/ASME B40.200-2008..Thermometers, Direct Reading and Remote Reading

F. American Society for Testing and Materials (ASTM)

A126-04.....Standard Specification for Gray Iron Castings
for Valves, Flanges, and Pipe FittingsB32-08

Standard Specification for Solder Metal

B88-03.....Standard Specification for Seamless Copper Water
Tube

B88M-05.....Standard Specification for Seamless Copper Water
Tube (Metric)

B280-08.....Standard Specification for Seamless Copper Tube
for Air Conditioning and Refrigeration Field
Service

G. American Welding Society, Inc. (AWS):

Brazing Handbook

A5.8/A5.8M-04.....Standard Specification for Filler Metals for
Brazing and Braze Welding

H. Federal Specifications (Fed. Spec.)

Fed. Spec. GG

I. Underwriters Laboratories (U.L.):

U.L.207-2009.....Standard for Refrigerant-Containing Components
and Accessories, Nonelectrical

U.L.429-99 (Rev.2006)...Standard for Electrically Operated Valves

PART 2 - PRODUCTS

2.1 PIPING AND FITTINGS

A. Refrigerant Piping: For piping up to 100 mm (4 inch) use Copper
refrigerant tube, ASTM B280, cleaned, dehydrated and sealed, marked ACR

on hard temper straight lengths. Coils shall be tagged ASTM B280 by the manufacturer. For piping over 100 mm (4 inch) use A53 Black SML steel.

B. Water and Drain Piping: Copper water tube, ASTM B88M, Type B or C (ASTM B88, Type M or L). Optional drain piping material: Schedule 80 flame retardant Polypropylene plastic.

C. Fittings, Valves and Accessories:

1. Copper fittings: Wrought copper fittings, ASME B16.22.

a. Brazed Joints, refrigerant tubing: Cadmium free, AWS A5.8/A5.8M, 45 percent silver brazing alloy, Class BAg-5.

b. Solder Joints, water and drain: 95-5 tin-antimony, ASTM B32 (95TA).

2. Steel fittings: ASTM wrought steel fittings.

a. Refrigerant piping - Welded Joints.

3. Flanges and flanged fittings: ASME B16.24.

4. Refrigeration Valves:

a. Stop Valves: Brass or bronze alloy, packless, or packed type with gas tight cap, frost proof, back seating.

b. Pressure Relief Valves: Comply with ASME Boiler and Pressure Vessel Code; UL listed. Forged brass with nonferrous, corrosion resistant internal working parts of high strength, cast iron bodies conforming to ASTM A126, Grade B. Set valves in accordance with ASHRAE Standard 15.

c. Solenoid Valves: Comply with ARI 760 and UL 429, UL-listed, two-position, direct acting or pilot-operated, moisture and vapor-proof type of corrosion resisting materials, designed for intended service, and solder-end connections. Fitted with suitable NEMA 250 enclosure of type required by location and normally // open // closed // holding coil.

d. Thermostatic Expansion Valves: Comply with ARI 750. Brass body with stainless-steel or non-corrosive non ferrous internal parts, diaphragm and spring-loaded (direct-operated) type with sensing bulb and distributor having side connection for hot-gas bypass and external equalizer. Size and operating characteristics as recommended by manufacturer of evaporator and factory set for superheat requirements. Solder-end connections. Testing and rating in accordance with ASHRAE Standard 17.

e. Check Valves: Brass or bronze alloy with swing or lift type, with tight closing resilient seals for silent operation; designed for low pressure drop, and with solder-end connections. Direction of flow shall be legibly and permanently indicated on the valve body.

5. Strainers: Designed to permit removing screen without removing strainer from piping system, and provided with screens 80 to 100 mesh in liquid lines DN 25 (NPS 1) and smaller, 60 mesh in liquid lines larger than DN 25 (NPS 1), and 40 mesh in suction lines. Provide strainers in liquid line serving each thermostatic expansion valve, and in suction line serving each refrigerant compressor not equipped with integral strainer.
6. Refrigerant Moisture/Liquid Indicators: Double-ported type having heavy sight glasses sealed into forged bronze body and incorporating means of indicating refrigerant charge and moisture indication. Provide screwed brass seal caps.
7. Refrigerant Filter-Dryers: UL listed, angle or in-line type, as shown on drawings. Conform to ARI Standard 730 and ASHRAE Standard 63.1. Heavy gage steel shell protected with corrosion-resistant paint; perforated baffle plates to prevent desiccant bypass. Size as recommended by manufacturer for service and capacity of system with connection not less than the line size in which installed. Filter driers with replaceable filters shall be furnished with one spare element of each type and size.
8. Flexible Metal Hose: Seamless bronze corrugated hose, covered with bronze wire braid, with standard copper tube ends. Provide in suction and discharge piping of each compressor.
9. Water Piping Valves and Accessories: Refer to specification Section 23 21 13, HYDRONIC PIPING.
10. Oil Separators: Provide for condensing units, as shown. All welded steel construction with capacity to eliminate a minimum of 95 percent of the oil from the hot gas flowing through it. Provide manufacturer's published ratings for minimum and maximum refrigeration tonnage corresponding to this oil separating efficiency. Separator shall be equipped with a float valve to prevent return of the hot gas to crankcase, and shall have isolating stop valves so it can be opened and serviced without pumping out any other part of the system. ASME construction or UL listed.

2.2 GAGES

- A. Temperature Gages: Comply with ASME B40.200. Industrial-duty type and in required temperature range for service in which installed. Gages shall have Celsius scale in 1-degree (Fahrenheit scale in 2-degree) graduations and with black number on a white face. The pointer shall be adjustable. Rigid stem type temperature gages shall be provided in thermal wells located within 1525 mm (5 feet) of the finished floor.

Universal adjustable angle type or remote element type temperature gages shall be provided in thermal wells located 1525 to 2135 mm (5 to 7 feet) above the finished floor. Remote element type temperature gages shall be provided in thermal wells located 2135 mm (7 feet) above the finished floor.

- B. Vacuum and Pressure Gages: Comply with ASME B40.100 and provide with throttling type needle valve or a pulsation dampener and shut-off valve. Gage shall be a minimum of 90 mm (3-1/2 inches) in diameter with a range from 0 kPa (0 psig) to approximately 1.5 times the maximum system working pressure. Each gage range shall be selected so that at normal operating pressure, the needle is within the middle-third of the range.
1. Suction: 101 kPa (30 inches Hg) vacuum to 1723 kPa (gage) (250 psig).
 2. Discharge: 0 to 3445 kPa (gage) (0 to 500 psig).

2.3 THERMOMETERS AND WELLS

- A. Refer to specification Section 23 21 13, HYDRONIC PIPING.

2.4 PIPE SUPPORTS

- A. Refer to specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

2.5 REFRIGERANTS AND OIL

- A. Provide EPA approved refrigerant and oil for proper system operation.

2.6 PIPE/CONDUIT ROOF PENETRATION COVER

- A. Prefabricated Roof Curb: Galvanized steel or extruded aluminum 300 mm (12 inches) overall height, continuous welded corner seams, treated wood nailer, 38 mm (1-1/2 inch) thick, 48 kg/cu.m (3 lb/cu.ft.) density rigid mineral fiberboard insulation with metal liner, built-in cant strip (except for gypsum or tectum decks). For surface insulated roof deck, provide raised cant strip (recessed mounting flange) to start at the upper surface of the insulation. Curbs shall be constructed for pitched roof or ridge mounting as required to keep top of curb level.
- B. Penetration Cover: Galvanized sheet metal with flanged removable top. Provide 38 mm (1-1/2 inch) thick mineral fiber board insulation.
- C. Flashing Sleeves: Provide sheet metal sleeves for conduit and pipe penetrations of the penetration cover. Seal watertight penetrations.

2.7 PIPE INSULATION FOR DX HVAC SYSTEMS

- Refer to specification Section 23 07 11, HVAC and PLUMBING INSULATION.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install refrigerant piping and refrigerant containing parts in accordance with ASHRAE Standard 15 and ASME B31.5

1. Install piping as short as possible, with a minimum number of joints, elbow and fittings.
2. Install piping with adequate clearance between pipe and adjacent walls and hangers to allow for service and inspection. Space piping, including insulation, to provide 25 mm (1 inch) minimum clearance between adjacent piping or other surface. Use pipe sleeves through walls, floors, and ceilings, sized to permit installation of pipes with full thickness insulation.
3. Locate and orient valves to permit proper operation and access for maintenance of packing, seat and disc. Generally locate valve stems in overhead piping in horizontal position. Provide a union adjacent to one end of all threaded end valves. Control valves usually require reducers to connect to pipe sizes shown on the drawing.
4. Use copper tubing in protective conduit when installed below ground.
5. Install hangers and supports per ASME B31.5 and the refrigerant piping manufacturer's recommendations.

B. Joint Construction:

1. Brazed Joints: Comply with AWS "Brazing Handbook" and with filler materials complying with AWS A5.8/A5.8M.
 - a. Use Type BcuP, copper-phosphorus alloy for joining copper socket fittings with copper tubing.
 - b. Use Type BAg, cadmium-free silver alloy for joining copper with bronze or steel.
 - c. Swab fittings and valves with manufacturer's recommended cleaning fluid to remove oil and other compounds prior to installation.
 - d. Pass nitrogen gas through the pipe or tubing to prevent oxidation as each joint is brazed. Cap the system with a reusable plug after each brazing operation to retain the nitrogen and prevent entrance of air and moisture.

C. Protect refrigerant system during construction against entrance of foreign matter, dirt and moisture; have open ends of piping and connections to compressors, condensers, evaporators and other equipment tightly capped until assembly.

D. Pipe relief valve discharge to outdoors for systems containing more than 45 kg (100 lbs) of refrigerant.

E. Firestopping: Fill openings around uninsulated piping penetrating floors or fire walls, with firestop material. For firestopping insulated piping refer to Section 23 07 11, HVAC, PLUMBING, and BOILER PLANT INSULATION.

- F. Seismic Bracing: Refer to specification Section 13 05 41, SEISMIC RESTRAINTS REQUIREMENTS FOR NON-STRUCTURAL COMPONENTS, for bracing of piping in seismic areas.

3.2 PIPE AND TUBING INSULATION

- A. Refer to specification Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- B. Apply two coats of weather-resistant finish as recommended by the manufacturer to insulation exposed to outdoor weather.

3.3 SIGNS AND IDENTIFICATION

- A. Each refrigerating system erected on the premises shall be provided with an easily legible permanent sign securely attached and easily accessible, indicating thereon the name and address of the installer, the kind and total number of pounds of refrigerant required in the system for normal operations, and the field test pressure applied.
- B. Systems containing more than 50 kg (110 lb) of refrigerant shall be provided with durable signs, in accordance with ANSI A13.1 and ANSI Z535.1, having letters not less than 13 mm (1/2 inch) in height designating:
1. Valves and switches for controlling refrigerant flow, the ventilation and the refrigerant compressor(s).
 2. Signs on all exposed high pressure and low pressure piping installed outside the machinery room, with name of the refrigerant and the letters "HP" or "LP."

3.4 FIELD QUALITY CONTROL

Prior to initial operation examine and inspect piping system for conformance to plans and specifications and ASME B31.5. Correct equipment, material, or work rejected because of defects or nonconformance with plans and specifications, and ANSI codes for pressure piping.

- A. After completion of piping installation and prior to initial operation, conduct test on piping system according to ASME B31.5. Furnish materials and equipment required for tests. Perform tests in the presence of Resident Engineer. If the test fails, correct defects and perform the test again until it is satisfactorily done and all joints are proved tight.
1. Every refrigerant-containing parts of the system that is erected on the premises, except compressors, condensers, evaporators, safety devices, pressure gages, control mechanisms and systems that are factory tested, shall be tested and proved tight after complete installation, and before operation.

2. The high and low side of each system shall be tested and proved tight at not less than the lower of the design pressure or the setting of the pressure-relief device protecting the high or low side of the system, respectively, except systems erected on the premises using non-toxic and non-flammable Group A1 refrigerants with copper tubing not exceeding DN 18 (NPS 5/8). This may be tested by means of the refrigerant charged into the system at the saturated vapor pressure of the refrigerant at 20 degrees C (68 degrees F) minimum.

B. Test Medium: A suitable dry gas such as nitrogen or shall be used for pressure testing. The means used to build up test pressure shall have either a pressure-limiting device or pressure-reducing device with a pressure-relief device and a gage on the outlet side. The pressure relief device shall be set above the test pressure but low enough to prevent permanent deformation of the system components.

3.5 SYSTEM TEST AND CHARGING

A. System Test and Charging: As recommended by the equipment manufacturer or as follows:

1. Connect a drum of refrigerant to charging connection and introduce enough refrigerant into system to raise the pressure to 70 kPa (10 psi) gage. Close valves and disconnect refrigerant drum. Test system for leaks with halide test torch or other approved method suitable for the test gas used. Repair all leaking joints and retest.
2. Connect a drum of dry nitrogen to charging valve and bring test pressure to design pressure for low side and for high side. Test entire system again for leaks.
3. Evacuate the entire refrigerant system by the triplicate evacuation method with a vacuum pump equipped with an electronic gage reading in mPa (microns). Pull the system down to 665 mPa (500 microns) 665 mPa (2245.6 inches of mercury at 60 degrees F) and hold for four hours then break the vacuum with dry nitrogen (or refrigerant). Repeat the evacuation two more times breaking the third vacuum with the refrigeration to be charged and charge with the proper volume of refrigerant.

- - - E N D - - -

**SECTION 23 31 00
HVAC DUCTS AND CASINGS**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Ductwork and accessories for HVAC including the following:
 - 1. Supply air, return air, outside air, exhaust, make-up air, and relief systems.
- B. Definitions:
 - 1. SMACNA Standards as used in this specification means the HVAC Duct Construction Standards, Metal and Flexible.
 - 2. Seal or Sealing: Use of liquid or mastic sealant, with or without compatible tape overlay, or gasketing of flanged joints, to keep air leakage at duct joints, seams and connections to an acceptable minimum.
 - 3. Duct Pressure Classification: SMACNA HVAC Duct Construction Standards, Metal and Flexible.
 - 4. Exposed Duct: Exposed to view in a finished room, exposed to weather.

1.2 QUALITY ASSURANCE

- A. Refer to article, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.
- B. Fire Safety Code: Comply with NFPA 90A.
- C. Duct System Construction and Installation: Referenced SMACNA Standards are the minimum acceptable quality.
- D. Duct Sealing, Air Leakage Criteria, and Air Leakage Tests: Ducts shall be sealed as per duct sealing requirements of SMACNA HVAC Air Duct Leakage Test Manual for duct pressure classes shown on the drawings.
- E. Duct accessories exposed to the air stream, such as dampers of all types (except smoke dampers) and access openings, shall be of the same material as the duct or provide at least the same level of corrosion resistance.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Rectangular ducts:
 - a. Schedules of duct systems, materials and selected SMACNA construction alternatives for joints, sealing, gage and reinforcement.
 - b. Duct liner.

- c. Sealants and gaskets.
- d. Access doors.
- 2. Round and flat oval duct construction details:
 - a. Manufacturer's details for duct fittings.
 - b. Duct liner.
 - c. Sealants and gaskets.
 - d. Access sections.
 - e. Installation instructions.
- 3. Volume dampers, back draft dampers.
- 4. Upper hanger attachments.
- 5. Fire dampers, fire doors, and smoke dampers with installation instructions.
- 6. Sound attenuators, including pressure drop and acoustic performance.
- 7. Flexible ducts and clamps, with manufacturer's installation instructions.
- 8. Flexible connections.
- 9. Instrument test fittings.
- 10 Details and design analysis of alternate or optional duct systems.
- 11 COMMON WORK RESULTS FOR HVAC and STEAM GENERATION.

C. Coordination Drawings: Refer to article, SUBMITTALS, in Section 23 05

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Civil Engineers (ASCE):
 - ASCE7-05.....Minimum Design Loads for Buildings and Other Structures
- C. American Society for Testing and Materials (ASTM):
 - A167-99(2009).....Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
 - A653-09.....Standard Specification for Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy coated (Galvannealed) by the Hot-Dip process
 - A1011-09a.....Standard Specification for Steel, Sheet and Strip, Hot rolled, Carbon, structural, High-Strength Low-Alloy, High Strength Low-Alloy with Improved Formability, and Ultra-High Strength
 - B209-07.....Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate

- C1071-05e1.....Standard Specification for Fibrous Glass Duct Lining Insulation (Thermal and Sound Absorbing Material)
- E84-09a.....Standard Test Method for Surface Burning Characteristics of Building Materials
- D. National Fire Protection Association (NFPA):
- 90A-09.....Standard for the Installation of Air Conditioning and Ventilating Systems
- 96-08.....Standard for Ventilation Control and Fire Protection of Commercial Cooking Operations
- E. Sheet Metal and Air Conditioning Contractors National Association (SMACNA):
- 2nd Edition - 2005.....HVAC Duct Construction Standards, Metal and Flexible
- 1st Edition - 1985.....HVAC Air Duct Leakage Test Manual
- 6th Edition - 2003.....Fibrous Glass Duct Construction Standards
- F. Underwriters Laboratories, Inc. (UL):
- 181-08.....Factory-Made Air Ducts and Air Connectors
- 555-06Standard for Fire Dampers
- 555S-06Standard for Smoke Dampers

PART 2 - PRODUCTS

2.1 DUCT MATERIALS AND SEALANTS

- A. General: Except for systems specified otherwise, construct ducts, casings, and accessories of galvanized sheet steel, ASTM A653, coating G90; or, aluminum sheet, ASTM B209, alloy 1100, 3003 or 5052.
- B. Specified Corrosion Resistant Systems: Stainless steel sheet, ASTM A167, Class 302 or 304, Condition A (annealed) Finish No. 4 for exposed ducts and Finish No. 2B for concealed duct or ducts located in mechanical rooms.
- C. Joint Sealing: Refer to SMACNA HVAC Duct Construction Standards, paragraph S1.9.
1. Sealant: Elastomeric compound, gun or brush grade, maximum 25 flame spread and 50 smoke developed (dry state) compounded specifically for sealing ductwork as recommended by the manufacturer. Generally provide liquid sealant, with or without compatible tape, for low clearance slip joints and heavy, permanently elastic, mastic type where clearances are larger. Oil base caulking and glazing compounds are not acceptable because they do not retain elasticity and bond.

2. Tape: Use only tape specifically designated by the sealant manufacturer and apply only over wet sealant. Pressure sensitive tape shall not be used on bare metal or on dry sealant.

3. Gaskets in Flanged Joints: Soft neoprene.

D. Approved factory made joints may be used.

2.2 DUCT CONSTRUCTION AND INSTALLATION

A. Regardless of the pressure classifications outlined in the SMACNA Standards, fabricate and seal the ductwork in accordance with the following pressure classifications:

B. Duct Pressure Classification:

0 to 50 mm (2 inch)

> 50 mm to 75 mm (2 inch to 3 inch)

> 75 mm to 100 mm (3 inch to 4 inch)

Show pressure classifications on the floor plans.

C. Seal Class: All ductwork shall receive Class A Seal

D. Round and Flat Oval Ducts: Furnish duct and fittings made by the same manufacturer to insure good fit of slip joints. When submitted and approved in advance, round and flat oval duct, with size converted on the basis of equal pressure drop, may be furnished in lieu of rectangular duct design shown on the drawings.

1. Elbows: Diameters 80 through 200 mm (3 through 8 inches) shall be two sections die stamped, all others shall be gored construction, maximum 18 degree angle, with all seams continuously welded or standing seam. Coat galvanized areas of fittings damaged by welding with corrosion resistant aluminum paint or galvanized repair compound.

2. Provide bell mouth, conical tees or taps, laterals, reducers, and other low loss fittings as shown in SMACNA HVAC Duct Construction Standards.

3. Ribbed Duct Option: Lighter gage round/oval duct and fittings may be furnished provided certified tests indicating that the rigidity and performance is equivalent to SMACNA standard gage ducts are submitted.

a. Ducts: Manufacturer's published standard gage, G90 coating, spiral lock seam construction with an intermediate standing rib.

b. Fittings: May be manufacturer's standard as shown in published catalogs, fabricated by spot welding and bonding with neoprene base cement or machine formed seam in lieu of continuous welded seams.

4. Provide flat side reinforcement of oval ducts as recommended by the manufacturer and SMACNA HVAC Duct Construction Standard S3.13.

Because of high pressure loss, do not use internal tie-rod reinforcement unless approved by the Resident Engineer.

- E. Volume Dampers: Single blade or opposed blade, multi-louver type as detailed in SMACNA Standards. Refer to SMACNA Detail Figure 2-12 for Single Blade and Figure 2.13 for Multi-blade Volume Dampers.
- F. Duct Hangers and Supports: Refer to SMACNA Standards Section IV. Avoid use of trapeze hangers for round duct.

2.3 DUCT ACCESS DOORS, PANELS AND SECTIONS

- A. Provide access doors, sized and located for maintenance work, upstream, in the following locations:
 - 1. Each fire damper (for link service), smoke damper and automatic control damper.
 - 2. Each duct mounted smoke detector.
- B. Openings shall be as large as feasible in small ducts, 300 mm by 300 mm (12 inch by 12 inch) minimum where possible. Access sections in insulated ducts shall be double-wall, insulated. Transparent shatterproof covers are preferred for uninsulated ducts.
 - 1. For rectangular ducts: Refer to SMACNA HVAC Duct Construction Standards (Figure 2-12).
 - 2. For round and flat oval duct: Refer to SMACNA HVAC duct Construction Standards (Figure 2-11).

2.4 FIRE DAMPERS

- A. Galvanized steel, interlocking blade type, UL listing and label, 1-1/2 hour rating, 70 degrees C (160 degrees F) fusible line, 100 percent free opening with no part of the blade stack or damper frame in the air stream.
- B. Fire dampers in wet air exhaust shall be of stainless steel construction, all others may be galvanized steel.
- C. Minimum requirements for fire dampers:
 - 1. The damper frame may be of design and length as to function as the mounting sleeve, thus eliminating the need for a separate sleeve, as allowed by UL 555. Otherwise provide sleeves and mounting angles, minimum 1.9 mm (14 gage), required to provide installation equivalent to the damper manufacturer's UL test installation.
 - 2. Submit manufacturer's installation instructions conforming to UL rating test.

2.5 SMOKE DAMPERS

- A. Maximum air velocity, through free area of open damper, and pressure loss: Low pressure and medium pressure duct (supply, return, exhaust,

outside air): 450 m/min (1500 fpm). Maximum static pressure loss: 32 Pa (0.13 inch W.G.).

B. Maximum air leakage, closed damper: 0.32 cubic meters /min/square meter (4.0 CFM per square foot) at 750 Pa (3 inch W.G.) differential pressure.

C. Minimum requirements for dampers:

1. Shall comply with requirements of Table 6-1 of UL 555S, except for the Fire Endurance and Hose Stream Test.
2. Frame: Galvanized steel channel with side, top and bottom stops or seals.
3. Blades: Galvanized steel, parallel type preferably, 300 mm (12 inch) maximum width, edges sealed with neoprene, rubber or felt, if required to meet minimum leakage. Airfoil (streamlined) type for minimum noise generation and pressure drop are preferred for duct mounted dampers.
4. Shafts: Galvanized steel.
5. Bearings: Nylon, bronze sleeve or ball type.
6. Hardware: Zinc plated.
7. Operation: Automatic open/close. No smoke damper that requires manual reset or link replacement after actuation is acceptable. See drawings for required control operation.

D. Motor operator (actuator): Provide pneumatic or electric as required by the automatic control system, externally mounted on stand-offs to allow complete insulation coverage.

2.6 COMBINATION FIRE AND SMOKE DAMPERS

Combination fire and smoke dampers: Multi-blade type units meeting all requirements of both fire dampers and smoke dampers shall be used where shown and may be used at the Contractor's option where applicable.

2.7 FIRE DOORS

Galvanized steel, interlocking blade type, UL listing and label, 71 degrees C (160 degrees F) fusible link, 3 hour rating and approved for openings in Class A fire walls with rating up to 4 hours, 100 percent free opening with no part of the blade stack or damper frame in the air stream.

2.8 FLEXIBLE DUCT CONNECTIONS

Where duct connections are made to fans, air terminal units, and air handling units, install a non-combustible flexible connection of 822 g (29 ounce) neoprene coated fiberglass fabric approximately 150 mm (6 inches) wide. For connections exposed to sun and weather provide hypalon coating in lieu of neoprene. Burning characteristics shall conform to NFPA 90A. Securely fasten flexible connections to round ducts with

stainless steel or zinc-coated iron draw bands with worm gear fastener. For rectangular connections, crimp fabric to sheet metal and fasten sheet metal to ducts by screws 50 mm (2 inches) on center. Fabric shall not be stressed other than by air pressure. Allow at least 25 mm (one inch) slack to insure that no vibration is transmitted.

2.9 PREFABRICATED ROOF CURBS

Galvanized steel or extruded aluminum 300 mm (12 inches) above finish roof service, continuous welded corner seams, treated wood nailer, 40 mm (1-1/2 inch) thick, 48 kg/cubic meter (3 pound/cubic feet) density rigid mineral fiberboard insulation with metal liner, built-in cant strip (except for gypsum or tectum decks). For surface insulated roof deck, provide raised cant strip (recessed mounting flange) to start at the upper surface of the insulation. Curbs shall be constructed for pitched roof or ridge mounting as required to keep top of curb level.

2.10 FIRESTOPPING MATERIAL

Refer to Section 07 84 00, FIRESTOPPING.

2.11 DUCT MOUNTED TEMPERATURE SENSOR (AIR)

Refer to Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.

2.12 INSTRUMENT TEST FITTINGS

- A. Manufactured type with a minimum 50 mm (two inch) length for insulated duct, and a minimum 25 mm (one inch) length for duct not insulated. Test hole shall have a flat gasket for rectangular ducts and a concave gasket for round ducts at the base, and a screw cap to prevent air leakage.
- B. Provide instrument test holes at each duct or casing mounted temperature sensor or transmitter, and at entering and leaving side of each heating coil, cooling coil, and heat recovery unit.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Comply with provisions of Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION, particularly regarding coordination with other trades and work in existing buildings.
- B. Fabricate and install ductwork and accessories in accordance with referenced SMACNA Standards:
 - 1. Drawings show the general layout of ductwork and accessories but do not show all required fittings and offsets that may be necessary to connect ducts to equipment, boxes, diffusers, grilles, etc., and to coordinate with other trades. Fabricate ductwork based on field measurements. Provide all necessary fittings and offsets at no additional cost to the government. Coordinate with other trades for

- space available and relative location of HVAC equipment and accessories on ceiling grid. Duct sizes on the drawings are inside dimensions which shall be altered by Contractor to other dimensions with the same air handling characteristics where necessary to avoid interferences and clearance difficulties.
2. Provide duct transitions, offsets and connections to dampers, coils, and other equipment in accordance with SMACNA Standards, Section II. Provide streamliner, when an obstruction cannot be avoided and must be taken in by a duct. Repair galvanized areas with galvanizing repair compound.
 3. Provide bolted construction and tie-rod reinforcement in accordance with SMACNA Standards.
 4. Construct casings, eliminators, and pipe penetrations in accordance with SMACNA Standards, Chapter 6. Design casing access doors to swing against air pressure so that pressure helps to maintain a tight seal.
- C. Install duct hangers and supports in accordance with SMACNA Standards, Chapter 4.
- D. Install fire dampers, smoke dampers and combination fire/smoke dampers in accordance with the manufacturer's instructions to conform to the installation used for the rating test. Install fire dampers, smoke dampers and combination fire/smoke dampers at locations indicated and where ducts penetrate fire rated and/or smoke rated walls, shafts and where required by the Resident Engineer. Install with required perimeter mounting angles, sleeves, breakaway duct connections, corrosion resistant springs, bearings, bushings and hinges per UL and NFPA. Demonstrate re-setting of fire dampers and operation of smoke dampers to the Resident Engineer.
- E. Seal openings around duct penetrations of floors and fire rated partitions with fire stop material as required by NFPA 90A.
- F. Flexible duct installation: Refer to SMACNA Standards, Chapter 3. Ducts shall be continuous, single pieces not over 1.5 m (5 feet) long (NFPA 90A), as straight and short as feasible, adequately supported. Centerline radius of bends shall be not less than two duct diameters. Make connections with clamps as recommended by SMACNA. Clamp per SMACNA with one clamp on the core duct and one on the insulation jacket. Flexible ducts shall not penetrate floors, or any chase or partition designated as a fire or smoke barrier, including corridor partitions fire rated one hour or two hour. Support ducts SMACNA Standards.

- G. Where diffusers, registers and grilles cannot be installed to avoid seeing inside the duct, paint the inside of the duct with flat black paint to reduce visibility.
- H. Control Damper Installation:
 - 1. Provide necessary blank-off plates required to install dampers that are smaller than duct size. Provide necessary transitions required to install dampers larger than duct size.
 - 2. Assemble multiple sections dampers with required interconnecting linkage and extend required number of shafts through duct for external mounting of damper motors.
 - 3. Provide necessary sheet metal baffle plates to eliminate stratification and provide air volumes specified. Locate baffles by experimentation, and affix and seal permanently in place, only after stratification problem has been eliminated.
 - 4. Install all damper control/adjustment devices on stand-offs to allow complete coverage of insulation.
- I. Air Flow Measuring Devices (AFMD): Install units with minimum straight run distances, upstream and downstream as recommended by the manufacturer.
- J. Low Pressure Duct Liner: Install in accordance with SMACNA, Duct Liner Application Standard.
- K. Protection and Cleaning: Adequately protect equipment and materials against physical damage. Place equipment in first class operating condition, or return to source of supply for repair or replacement, as determined by Resident Engineer. Protect equipment and ducts during construction against entry of foreign matter to the inside and clean both inside and outside before operation and painting. When new ducts are connected to existing ductwork, clean both new and existing ductwork by mopping and vacuum cleaning inside and outside before operation.

3.2 DUCT LEAKAGE TESTS AND REPAIR

- A. Ductwork leakage testing shall be performed by the Testing and Balancing Contractor directly contracted by the General Contractor and independent of the Sheet Metal Contractor.
- B. Ductwork leakage testing shall be performed for the entire air distribution system (including all supply, return, exhaust and relief ductwork), section by section, including fans, coils and filter sections.
- C. Test procedure, apparatus and report shall conform to SMACNA Leakage Test manual. The maximum leakage rate allowed is 4 percent of the design air flow rate.

- D. All ductwork shall be leak tested first before enclosed in a shaft or covered in other inaccessible areas.
- E. All tests shall be performed in the presence of the Resident Engineer and the Test and Balance agency. The Test and Balance agency shall measure and record duct leakage and report to the Resident Engineer and identify leakage source with excessive leakage.
- F. If any portion of the duct system tested fails to meet the permissible leakage level, the Contractor shall rectify sealing of ductwork to bring it into compliance and shall retest it until acceptable leakage is demonstrated to the Resident Engineer.
- G. All tests and necessary repairs shall be completed prior to insulation or concealment of ductwork.
- H. Make sure all openings used for testing flow and temperatures by TAB Contractor are sealed properly.

3.4 TESTING, ADJUSTING AND BALANCING (TAB)

Refer to Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC.

3.5 OPERATING AND PERFORMANCE TESTS

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC and STEAM GENERATION

- - - E N D - - -

**SECTION 23 37 00
AIR OUTLETS AND INLETS**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Roof Curbs
- B. Air Outlets and Inlets: Diffusers, Registers, and Grilles.

1.2 QUALITY ASSURANCE

- A. Refer to article, QUALITY ASSURANCE, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.
- B. Fire Safety Code: Comply with NFPA 90A.

1.3 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES.
- B. Manufacturer's Literature and Data:
 - 1. Air intake/exhaust hoods.
 - 2. Diffusers, registers, grilles and accessories.
- C. Coordination Drawings: Refer to article, SUBMITTALS, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. Air Diffusion Council Test Code:
 - 1062 GRD-84.....Certification, Rating, and Test Manual 4th Edition
- C. American Society of Civil Engineers (ASCE):
 - ASCE7-05.....Minimum Design Loads for Buildings and Other Structures
- D. American Society for Testing and Materials (ASTM):
 - A167-99 (2004).....Standard Specification for Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet and Strip
 - B209-07.....Standard Specification for Aluminum and Aluminum-Alloy Sheet and Plate
- E. National Fire Protection Association (NFPA):
 - 90A-09.....Standard for the Installation of Air Conditioning and Ventilating Systems

F. Underwriters Laboratories, Inc. (UL):

181-08.....UL Standard for Safety Factory-Made Air Ducts
and Connectors

PART 2 - PRODUCTS

2.1 EQUIPMENT SUPPORTS

Refer to Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING, and
Section 23 05 11, COMMON WORK RESULTS FOR HVAC.

2.2 AIR OUTLETS AND INLETS

A. Materials:

1. Steel or aluminum. Provide manufacturer's standard gasket.
2. Exposed Fastenings: The same material as the respective inlet or outlet. Fasteners for aluminum may be stainless steel.
3. Contractor shall review all ceiling drawings and details and provide all ceiling mounted devices with appropriate dimensions and trim for the specific locations.

B. Performance Test Data: In accordance with Air Diffusion Council Code 1062GRD. Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT for NC criteria.

C. Air Supply Outlets:

1. Ceiling Diffusers: Suitable for surface mounting, exposed T-bar or special tile ceilings, off-white finish, square or round neck connection as shown on the drawings. Provide plaster frame for units in plaster ceilings.
 - a. Square, louver, fully adjustable pattern: Round neck, surface mounting unless shown otherwise on the drawings. Provide equalizing or control grid and volume control damper.
 - b. Louver face type: Square or rectangular, removable core for 1, 2, 3, or 4 way directional pattern. Provide equalizing or control grid and opposed blade damper.
 - c. Perforated face type: Manual adjustment for one-, two-, three-, or four-way horizontal air distribution pattern without change of air volume or pressure. Provide equalizing or control grid and opposed blade over overlapping blade damper. Perforated face diffusers for VAV systems shall have the pattern controller on the inner face, rather than in the neck and designed to discharge air horizontally at the ceiling maintaining a Coanda effect.
 - d. Slot diffuser/plenum:
 - 1) Diffuser: Frame and support bars shall be constructed of heavy gauge extruded aluminum. Form slots or use adjustable pattern

- controllers, to provide stable, horizontal air flow pattern over a wide range of operating conditions.
- 2) Galvanized steel boot lined with 13 mm (1/2 inch) thick fiberglass conforming to NFPA 90A and complying with UL 181 for erosion. The internal lining shall be factory-fabricated, anti-microbial, and non-friable.
 - 3) Provide inlet connection diameter equal to duct diameter shown on drawings or provide transition coupling if necessary. Inlet duct and plenum size shall be as recommended by the manufacturer.
 - 4) Maximum pressure drop at design flow rate: 37 Pa (0.15 inch W.G.)
2. Linear Bar Grilles and Diffusers: Extruded aluminum, manufacturer's standard finish, and positive holding concealed fasteners.
 - a. Margin Frame: Flat, 20 mm (3/4 inch) wide.
 - b. Bars: Minimum 5 mm (3/16 inch) wide by 20 mm (3/4 inch) deep, zero deflection unless otherwise shown. Bar spacing shall be a minimum of 3 mm (1/8 inch) on center. Reinforce bars on 450 mm (18 inch) center for sidewall units and on 150 mm (6 inch) center for units installed in floor or sills.
 - c. Provide opposed blade damper and equalizing or control grid where shown.
 3. Supply Registers: Double deflection type with horizontal face bars and opposed blade damper with removable key operator.
 - a. Margin: Flat, 30 mm (1-1/4 inches) wide.
 - b. Bar spacing: 20 mm (3/4 inch) maximum.
 - c. Finish: Off white baked enamel for ceiling mounted units. Wall units shall have a prime coat for field painting, or shall be extruded with manufacturer's standard finish.
 5. Supply Grilles: Same as registers but without the opposed blade damper.
- D. Return and Exhaust Registers and Grilles: Provide opposed blade damper without removable key operator for registers.
1. Finish: Off-white baked enamel for ceiling mounted units. Wall units shall have a prime coat for field painting, or shall be extruded aluminum with manufacturer's standard aluminum finish.
 2. Standard Type: Fixed horizontal face bars set at 30 to 45 degrees, approximately 30 mm (1-1/4 inch) margin.
 3. Perforated Face Type: To match supply units.

4. Grid Core Type: 13 mm by 13 mm (1/2 inch by 1/2 inch) core with 30 mm (1-1/4 inch) margin.
5. Linear Type: To match supply units.
6. Door Grilles: Are furnished with the doors.
7. Egg Crate Grilles: Aluminum or Painted Steel 1/2 by 1/2 by 1/2 inch grid providing 90% free area.
 - a. Heavy extruded aluminum frame shall have countersunk screw mounting. Unless otherwise indicated, register blades and frame shall have factory applied white finish.
 - b. Grille shall be suitable for duct or surface mounting as indicated on drawings. All necessary appurtenances shall be provided to allow for mounting.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Comply with provisions of Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION, particularly regarding coordination with other trades and work in existing buildings.
- B. Protection and Cleaning: Protect equipment and materials against physical damage. Place equipment in first class operating condition, or return to source of supply for repair or replacement, as determined by Resident Engineer. Protect equipment during construction against entry of foreign matter to the inside and clean both inside and outside before operation and painting.

3.2 TESTING, ADJUSTING AND BALANCING (TAB)

Refer to Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC.

3.3 OPERATING AND PERFORMANCE TESTS

Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION

- - - E N D - - -

SECTION 23 74 13
PACKAGED, OUTDOOR, CENTRAL-STATION AIR-HANDLING UNITS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Roof top air handling units including integral components specified herein.
- B. Definitions: Roof Top Air Handling Unit(Roof Top Units, RTU): A factory fabricated assembly consisting of fan, coils, filters, and other necessary equipment to perform one or more of the following functions of circulating, cleaning, heating, cooling, humidifying, dehumidifying, and mixing of air. Design capacities of units shall be as scheduled on the drawings.

1.2 QUALITY ASSURANCE

- A. Refer to Article, Quality Assurance, in Section 23 05 11, COMMON WORK RESULTS FOR HVAC.
- B. Air Handling Units Certification
 - 1. Air Handling Units with Housed Centrifugal Fans: The air handling units shall be certified in accordance with AHRI 430 and tested/rated in accordance with AHRI 260.
 - 2. Air Handling Units with Plenum Fans:
 - a. Air Handling Units with a single Plenum Fan shall be certified in accordance with AHRI 430 and tested/rated in accordance with AHRI 260.
 - b. Air handling Units with Multiple Fans in an Array shall be tested and rated in accordance with AHRI 430 and AHRI 260.
- C. Heating, Cooling, and Air Handling Capacity and Performance Standards: AHRI 430, AHRI 410, ASHRAE 51, and AMCA 210.
- D. Performance Criteria:
 - 1. The fan BHP shall include all system effects for all fans and v-belt drive losses for housed centrifugal fans.
 - 2. The fan motor shall be selected within the rated nameplate capacity, without relying upon NEMA Standard Service Factor.
 - 3. Select the fan operating point as follows:
 - a. Forward Curve and Axial Flow Fans: Right hand side of peak pressure point.
 - b. Air Foil, Backward Inclined, or Tubular Fans Including Plenum Fans: At or near the peak static efficiency but at an appropriate distance from the stall line.
 - 4. Operating Limits: AMCA 99 and Manufacturer's Recommendations.

- E. Units shall be factory-fabricated, assembled, and tested by a manufacturer, in business of manufacturing similar air-handling units for at least five (5) years.

1.3 SUBMITTALS:

- A. The contractor shall, in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish a complete submission for all roof top units covered in the project. The submission shall include all information listed below. Partial and incomplete submissions shall be rejected without reviews.
- B. Manufacturer's Literature and Data:
1. Submittals for RTUs shall include fans, drives, motors, coils, mixing box with outside/return air dampers, filter housings, and all other related accessories. The contractor shall provide custom drawings showing total air handling unit assembly including dimensions, operating weight, access sections, flexible connections, door swings, controls penetrations, electrical disconnect, lights, duplex receptacles, switches, wiring, utility connection points, unit support system, vibration isolators, drain pan, pressure drops through each component (filter, coil etc) and rigging points.
 2. Submittal drawings of section or component only, will not be acceptable. Contractor shall also submit performance data including performance test results, charts, curves or certified computer selection data; data sheets; fabrication and insulation details; if the unit cannot be shipped in one piece, the contractor shall indicate the number of pieces that each unit will have to be broken into to meet shipping and job site rigging requirements. This data shall be submitted in hard copies and in electronic version compatible to AutoCAD version used by the VA at the time of submission.
 3. Submit sound power levels in each octave band for fan and at entrance and discharge of RTUs at scheduled conditions. Include sound attenuator capacities and itemized internal component attenuation. Internal lining of supply air ductwork with sound absorbing material is not permitted. In absence of sound power ratings refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT.
 4. Provide fan curves showing Liters/Second (cubic feet per minute), static pressure, efficiency, and horsepower for design point of operation and at maximum design Liters/Second (cubic feet per minute) and 110 percent of design static pressure.

5. Submit total fan static pressure, external static pressure, for RTU including total, inlet and discharge pressures, and itemized specified internal losses and unspecified internal losses. Refer to air handling unit schedule on drawings.
- C. Maintenance and operating manuals in accordance with Section 01 00 00, GENERAL REQUIREMENTS. Include instructions for lubrication, filter replacement, motor and drive replacement, spare part lists, and wiring diagrams.
- D. Submit written test procedures two weeks prior to factory testing. Submit written results of factory tests for approval prior to shipping.
- E. Completed System Readiness Checklists provided by the Commissioning Agent and completed by the contractor, signed by a qualified technician and dated on the date of completion, in accordance with the requirements of Section 23 08 00 COMMISSIONING OF HVAC SYSTEMS.
- F. Submit shipping information that clearly indicates how the units will be shipped in compliance with the descriptions below.
 1. Units shall be shipped in one (1) piece where possible and in shrink wrapping to protect the unit from dirt, moisture and/or road salt.
 2. If not shipped in one (1) piece, provide manufacturer approved shipping splits where required for installation or to meet shipping and/or job site rigging requirements in modular sections. Indicate clearly that the shipping splits shown in the submittals have been verified to accommodate the construction constraints for rigging as required to complete installation and removal of any section for replacement through available access without adversely affecting other sections.
 3. If shipping splits are provided, each component shall be individually shrink wrapped to protect the unit and all necessary hardware (e.g. bolts, gaskets etc.) will be included to assemble unit on site (see section 2.1.A4).
 4. Lifting lugs will be provided to facilitate rigging on shipping splits and joining of segments. If the unit cannot be shipped in one piece, the contractor shall indicate the number of pieces that each unit will have to be broken into to meet shipping and job site rigging requirements.

1.4 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.

- B. Air-Conditioning, Heating, and Refrigeration Institute (AHRI):
260-01.....Sound Rating of Ducted Air Moving and
Conditioning Equipment
410-01.....Standard for Forced-Circulation Air-Heating and
Air-Cooling Coils
430-09.....Standard for Central Station Air Handling Units
AHRI-DCAACP.....Directory of Certified Applied Air Conditioning
Products
- C. Air Moving and Conditioning Association (AMCA):
210-07.....Laboratory Methods of Testing Fans for Rating
- D. Anti-Friction Bearing Manufacturer's Association, Inc. (AFBMA):
9-90 (R2008).....Load Ratings and Fatigue life for Ball Bearings
- E. American Society of Heating, Refrigerating and Air Conditioning
Engineers (ASHRAE):
51-2007.....Laboratory Methods of Testing Fans for Rating
- F. American Society for Testing and Materials (ASTM):
A653/653M-02.....Steel Sheet, Zinc-Coated (Galvanized) or Zinc-
Iron Alloy-Coated (Galvannealed) by the Hot-Dip
Process
B117-07a.....Salt Spray (Fog) Testing
C1071-05e1.....Standard Specification for Fibrous Glass Duct
Lining Insulation (Thermal and Sound Absorbing
Material)
D1654-08.....Standard Method for Evaluation of Painted or
Coated Specimens Subjected to Corrosive
Environments
D1735-08.....Water Resistance of Coatings Using Water Fog
Apparatus
D3359-08.....Standard Test Methods for Measuring Adhesion by
Tape Test
E84-10.....Standard Test Method for Surface Burning
Characteristics of Building Materials
- G. Anti-Friction Bearing Manufacturer's Association, Inc. (AFBMA):
9-90.....Load Ratings and Fatigue life for Ball Bearings
- H. Military Specifications (Mil. Spec.):
DOD-P-21035A-2003.....Paint, High Zinc Dust Content, Galvanizing
Repair
- I. National Fire Protection Association (NFPA):
NFPA 90A.....Standard for Installation of Air Conditioning
and Ventilating Systems, 2009

J. Energy Policy Act of 2005 (P.L.109-58)

PART 2 - PRODUCTS

2.1 ROOF TOP AIR HANDLING UNITS

A. General:

1. Roof top units (RTU) shall be fabricated from insulated, solid double-wall galvanized steel without any perforations in draw-through configuration. Casing is specified in paragraph 2.1.C. Galvanizing shall be hot dipped conforming to ASTM A525 and shall provide a minimum of 0.275 kg of zinc per square meter (0.90 oz. of zinc per square foot) (G90). Aluminum constructed units may be provided subject to VA approval and documentation that structural rigidity is equal or greater than the galvanized steel specified.
2. The contractor and the RTU manufacturer shall be responsible for insuring that the unit will not exceed the allocated space shown on the drawings, including required clearances for service and future overhaul or removal of unit components. All structural, piping, wiring, and ductwork alterations of units, which are dimensionally different than those specified, shall be the responsibility of the contractor at no additional cost to the government.
3. RTUs shall be fully assembled by the manufacturer in the factory in accordance with the arrangement shown on the drawings. The unit shall be assembled into the largest sections possible subject to shipping and rigging restrictions. The correct fit of all components and casing sections shall be verified in the factory for all units prior to shipment. All units shall be fully assembled, tested and then split to accommodate shipment and job site rigging. On units not shipped fully assembled, the manufacturer shall tag each section and include air flow direction to facilitate assembly at the job site. Lifting lugs or shipping skids shall be provided for each section to allow for field rigging and final placement of unit.
4. The RTU manufacturer shall provide the necessary gasketing, caulking, and all screws, nuts, and bolts required for assembly. The manufacturer shall provide a local representative at the job site to supervise the assembly and to assure the units are assembled to meet manufacturer's recommendations and requirements noted on the drawings. Provide documentation that this representative has provided this service on similar jobs to the Contracting Officer. If a local representative cannot be provided, the manufacturer shall provide a factory representative.

5. Gaskets: All door and casing and panel gaskets and gaskets between air handling unit components, if joined in the field, shall be high quality which seal air tight and retain their structural integrity and sealing capability after repeated assembly and disassembly of bolted panels and opening and closing of hinged components. Bolted sections may use a more permanent gasketing method provided they are not disassembled.
6. Structural Rigidity: Provide structural reinforcement when required by span or loading so that the deflection of the assembled structure shall not exceed 1/200 of the span based on a differential static pressure of 1991 Pa (8 inches water gage) or higher.
7. Corrosion Protection:
 - a. Coil Treatment: Epoxy Immersion Coating-Electrically Deposited:

The multi-stage corrosion-resistant coating application comprises of cleaning (heated alkaline immersion bath) and reverse-osmosis immersion rinse prior to the start of the coating process. The coating thickness shall be maintained between 0.6-mil and 1.2-mil. Before the coils are subjected to high-temperature oven cure, they are treated to permeate immersion rinse and spray. Where the coils are subject to UV exposure, UV protection spray treatment comprising of UV-resistant urethane mastic topcoat shall be applied. Provide complete coating process traceability for each coil and minimum five years of limited warranty. The coating process shall such that uniform coating thickness is maintained at the fin edges. The quality control shall be maintained by ensuring compliance to the applicable ASTM Standards for the following:

 - 1) Salt Spray Resistance (Minimum 6,000 Hours)
 - 2) Humidity Resistance (Minimum 1,000 Hours)
 - 3) Water Immersion (Minimum 260 Hours)
 - 4) Cross-Hatch Adhesion (Minimum 4B-5B Rating)
 - 5) Impact Resistance (Up to 160 Inch/Pound)
 - b. Casing Surfaces (Exterior and Interior): All exposed and accessible exterior and interior metal surfaces shall be protected with a water-reducible acrylic with stainless steel pigment spray-applied over the manufacturer's standard finish. The spray coating thickness shall be 2-4 mils and provide minimum salt-spray resistance of 1,000 hours (ASTM B117) and 500 hours UV resistance (ASTM D4587).

B. Base:

1. Provide a heavy duty steel base for supporting all major RTU components. Bases shall be constructed of wide-flange steel I-beams, channels, or minimum 125 mm (5 inch) high 3.5 mm (10 Gauge) steel base rails. Welded or bolted cross members shall be provided as required for lateral stability.
2. RTUs shall be completely self supporting for installation on roof curb.
3. The RTU bases not constructed of galvanized material shall be cleaned, primed with a rust inhibiting primer, and finished with rust inhibiting exterior enamel.

C. Casing (including wall, floor and roof):

1. General: RTU casing shall be entirely double wall insulated panels, integral of or attached to a structural frame. Construction shall be such that removal of any panel shall not affect the structural integrity of the unit. Casing finished shall meet salt-spray test as specified in paragraph 2.1.C.10. All casing and panel sections shall be tightly butted and gasketed. No gaps of double wall construction will be allowed where panels bolt to air handling unit structural member. Structural members, not covered by the double wall panels, shall have equivalent insulated double wall construction.
2. Double wall galvanized steel panels, minimum 51 mm (2 inches) thick, constructed of minimum 1.3 mm (18 gauge) outer skin and 1.0 mm (20 gauge) solid or perforated inner skin to limit wall, roof and floor deflection to not exceed an $L/240$ ratio when the unit casing is pressurized to $(\pm 1245 \text{ Pa } (\pm 5 \text{ in. w.g.}))$. Deflection shall be measured at the midpoint of the panel height. Total housing leakage shall not exceed 1% of rated cfm when the unit casing is pressurized to $\pm 5 \text{ in. w.g. } (\pm 1245 \text{ Pa})$. The outer (skin) and inner panels shall be solid.
3. Blank-Off: Provide blank-offs as required to prevent air bypass between the AHU sections, around coils, and filters.
4. Insulation: Insulation shall be injected CFC free foam encased in double-wall casing between exterior and interior panels such that no insulation can erode to the air stream. Insulation shall be 50 mm (2 inch) thick, and 48 kg/m^3 (3.0 lb/ft^3) density with a total thermal resistance (R-value) of approximately 2.3 m.K/W ($13.0 \text{ hr-ft}^2 \text{ } ^\circ\text{F/BTU}$). Units with less than 50 mm (2 inch) of insulation in any part of the walls, floor, roof or drain pan shall not be acceptable. The insulation shall comply with NFPA 90-A for the flame and smoke generation requirements. Also, refer to specification Section 23 07 11, HVAC and BOILER PLANT INSULATION.

Table 2.1.C.4

Outer Panel	0.8 mm (22 Gage) Minimum
Inner Panel	0.8 mm (22 Gage) Minimum
Insulation	Foam
Thickness	50 mm (2 inch) Minimum
Density	48 kg/m ³ (3.0 lb/ft ³) Minimum
Total R Value	2.3 m ² .K/W (13.0 ft ² .°F.hr/Btu) Minimum

5. The thickness of insulation, mode of application, and thermal breaks shall be such that there is no visible condensation on the exterior panels of the AHU.
6. Casing panels shall be secured to the support structure with stainless steel or zinc-chromate plated screws and gaskets installed around the panel perimeter. Panels shall be completely removable to allow removal of fan, coils, and other internal components for future maintenance, repair, or modifications. Welded exterior panels are not acceptable.
7. Access Doors: Provide in each access section and where shown on drawings. Show single-sided and double-sided access doors with door swings on the floor plans. Doors shall be a minimum of 50 mm (2 inches) thick with same double wall construction as the unit casing. Doors shall be a minimum of 600 mm (24 inches) wide, unless shown of different size on drawings, and shall be the full casing height up to a maximum of 1850 mm (6 feet). Doors shall be gasketed, hinged, and latched to provide an airtight seal. The access doors for fan section, mixing box, coil section shall include a minimum 150 mm x 150 mm (6 inch x 6 inch) double thickness, with air space between glass panes tightly sealed, reinforced glass or Plexiglas window in a gasketed frame.
 - a. Hinges: Manufacturers standard, designed for door size, weight and pressure classifications. Hinges shall hold door completely rigid with minimum 45 kg (100 pound) weight hung on latch side of door.
 - b. Latches: Non-corrosive alloy construction, with operating levers for positive cam action, operable from either inside or outside. Doors that do not open against unit operating pressure shall allow the door to ajar and then require approximately 0.785 radian (45 degrees) further movement of the handle for complete opening.

Latch shall be capable of restraining explosive opening of door with a force not less than 1991 Pa (8 inches water gage).

- c. Gaskets: Neoprene, continuous around door, positioned for direct compression with no sliding action between the door and gasket. Secure with high quality mastic to eliminate possibility of gasket slipping or coming loose.
- 8. Provide sealed sleeves, metal or plastic escutcheons or grommets for penetrations through casing for power and temperature control wiring and pneumatic tubing. Coordinate with electrical and temperature control subcontractors for number and location of penetrations. Coordinate lights, switches, and duplex receptacles and disconnect switch location and mounting. All penetrations and equipment mounting may be provided in the factory or in the field. All field penetrations shall be performed neatly by drilling or saw cutting. No cutting by torches will be allowed. Neatly seal all openings airtight.
- 9. Roof of the unit shall be sloped to have a minimum pitch of 1/4 inch per foot. The roof shall overhang the side panels by a minimum of three inches to prevent precipitation drainage from streaming down the unit side panels.
- 10. Casing finished shall meet ASTM B117, 500-hour salt spray test, using 20 percent sodium chloride solution. Immediately after completion of the test, the coating shall show no sign of blistering, wrinkling, or cracking, no loss of adhesion, and the specimen shall show no sign of rust creepage beyond 1/8-inch on either side of scratch mark.
- D. Unit floor shall be level without offset space or gap and designed to support a minimum of 488 kg/square meter (100 pounds per square foot) distributed load without permanent deformation or crushing of internal insulation. Provide adequate structural base members beneath floor in service access sections to support typical service foot traffic and to prevent damage to unit floor or internal insulation. Unit floors in casing sections, which may contain water or condensate, shall be watertight with drain pan.
- E. Condensate Drain Pan: Drain pan shall be designed to extend entire length of cooling coils including headers and return bends. Depth of drain pan shall be at least 43 mm (1.7 inches) and shall handle all condensate without overflowing. Drain pan shall be double wall construction, Type 304 stainless steel and have a minimum of 50 mm (2 inch) insulation, and shall be sloped to drain. Drain pan shall be continuous metal or welded watertight. No mastic sealing of joints

exposed to water will be permitted. Drain pan shall be placed on top of casing floor or integrated into casing floor assembly. Drain pan shall be pitched in all directions to drain line.

1. An intermediate condensate drip pan shall be provided on stacked cooling coils and shall be constructed of type 304 stainless steel with copper downspouts factory piped to main condensate pan. Use of intermediate condensate drain channel on upper casing of lower coil is permissible provided it is readily cleanable. Design of intermediate condensate drain shall prevent upper coil condensate from flowing across face of lower coil.
2. Drain pan shall be piped to the exterior of the unit. Drain pan shall be readily cleanable.
3. Installation, including frame, shall be designed and sealed to prevent blow-by.

F. Housed Centrifugal Fan Sections:

1. Fans shall be minimum Class II construction, double width, double inlet centrifugal, air foil or backward inclined or forward curved type as indicated on drawings, factory balanced and rated in accordance with AMCA 210 or ASHRAE 51. Provide self-aligning, pillow block, regreasable ball-type bearings selected for a B(10) life of not less than 40,000 hours and an L(50) average fatigue life of 200,000 hours per AFBMA Standard 9. Extend bearing grease lines to motor and drive side of fan section. Fan shall be located in airstream to assure proper air flow.
2. Provide internally vibration isolated fan, motor and drive, mounted on a common integral bolted or welded structural steel base with adjustable motor slide rail with locking device. Provide vibration isolators and flexible duct connections at fan discharge to completely isolate fan assembly. Refer to Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT, for additional requirements. Allowable vibration tolerances for fan shall not exceed a self-excited vibration maximum velocity of 0.005 m/s (0.20 inch per second) RMS, filter in, when measured with a vibration meter on bearing caps of machine in vertical, horizontal and axial directions or measured at equipment mounting feet if bearings are concealed. After field installation, compliance to this requirement shall be demonstrated with field test in accordance with Section 23 05 41, NOISE AND VIBRATION CONTROL FOR HVAC PIPING AND EQUIPMENT and Section 23 05 93, TESTING, ADJUSTING, AND BALANCING FOR HVAC. Following fan assembly, the complete fan assembly balance shall be

tested using an electronic balance analyzer with a tunable filter and stroboscope. Vibration measurements shall be taken on each motor bearing housing in the vertical, horizontal, and axial planes (5 total measurements, 2 each motor bearing and 1 axial).

G. Fan Motor, Drive, and Mounting Assembly (Housed Centrifugal Fans):

1. Fan Motor and Drive: Motors shall be premium energy efficient type, as mandated by the Energy Policy Act of 2005, with efficiencies as shown in the Specifications Section 23 05 12 (General Motor Requirements For HVAC and Steam Equipment), on drawings and suitable for use in variable frequency drive applications on AHUs where this type of drive is indicated. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC, for additional motor and drive specifications.
2. Fan drive and belts shall be factory mounted with final alignment and belt adjustment to be made by the Contractor after installation. Drive and belts shall be as specified in Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION. Provide additional drive(s) if required during balancing, to achieve desired airflow.

H. Plenum Fans - Single and/or Multiple Fans in an Array

1. General: Fans shall be Class II (minimum) construction with single inlet, aluminum wheel and stamped air-foil aluminum bladed. The fan wheel shall be mounted on the directly-driven motor shaft in AMCA Arrangement 4. Fans shall be dynamically balanced and internally isolated to minimize the vibrations. Provide a steel inlet cone for each wheel to match with the fan inlet. Locate fan in the air stream to assure proper flow. The fan performance shall be rated in accordance with AMCA 210 or ASHRAE 51.
2. Allowable vibration tolerances for fan shall not exceed a self-excited vibration maximum velocity of 0.005 m/s (0.20 inch per second) RMS, filter in, when measured with a vibration meter on bearing caps of machine in vertical, horizontal and axial directions. After field installation, compliance to this requirement shall be demonstrated with field test in accordance with Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT and Section 23 05 93, TESTING, ADJUSTING, and BALANCING FOR HVAC. The fan wheel shall meet or exceed guidelines in AMCA 801-92 for dynamic balancing requirements. The complete fan assembly balance shall be tested using an electronic balance analyzer with a tunable filter and stroboscope. Vibration measurements shall be taken on each motor bearing housing in the vertical, horizontal, and axial planes (5 total measurements, 2 each motor bearing and 1 axial).

3. The plenum fans shall be driven by variable speed drives with at least one back-up drive as shown in the design documents. Use of a drive with bypass is not permitted.
4. Multiple fans shall be installed in a pre-engineered structural frame to facilitate fan stacking. All fans shall modulate in unison, above or below the synchronous speed within the limits specified by the manufacturer, by a common control sequence. Staging of the fans is not permitted. Redundancy requirement shall be met by all operating fans in an array and without the provision of an idle standby fan.
5. Fan Accessories
 - a. Fan Isolation: Provide an actuator-controlled damper to isolate the fan not in operation due to failure.
 - b. Fan Airflow Measurement: Provide an airflow measuring device integral to the fan to measure air volume within +/- 5 percent accuracy. The probing device shall not be placed in the airflow path to stay clear of turbulence and avoid loss of performance.
6. Fan Motor, Drive and Mounting Assembly: Fan Motors shall be premium energy efficient type, as mandated by the Energy Policy Act of 2005, with efficiencies as shown in the Specifications Section 23 05 12 (General Motor Requirements For HVAC and Steam Equipment), on drawings and suitable for use in variable frequency drive applications. Refer to Section 23 05 11, COMMON WORK RESULTS FOR HVAC AND STEAM GENERATION, for additional motor and drive specifications.
- J. Mixing Boxes: Mixing box shall consist of casing and outdoor air and return air dampers in opposed blade arrangement with damper linkage for automatic operation. Coordinate damper operator with Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC. Dampers shall be of ultra-low leak design with metal compressible bronze jamb seals and extruded vinyl edge seals on all blades. Blades shall rotate on stainless steel sleeve bearings or bronze bushings. Leakage rate shall not exceed 1.6 cubic meters/min/square meter (5 cfm per square foot) at 250 Pa (1 inch water gage) and 2.8 cubic meters/min/square meter (9 cfm per square foot) at 995 Pa (4 inches water gage) Electronic damper operators shall be furnished and mounted in an accessible and easily serviceable location by the air handling unit manufacturer at the factory. Damper operators shall be of same manufacturer as controls furnished under Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- L. Filter Section: Refer to Section 23 40 00, HVAC AIR CLEANING DEVICES, for filter requirements.

1. Filters including one complete set for temporary use at site shall be provided independent of the RTU. The RTU manufacturer shall install filter housings and racks in filter section compatible with filters furnished. The RTU manufacturer shall be responsible for furnishing temporary filters (pre-filters and after-filters, as shown on drawings) required for RTU testing.
 2. Factory-fabricated filter section shall be of the same construction and finish as the RTU casing including filter racks and hinged double wall access doors. Filter housings shall be constructed in accordance with side service or holding frame housing requirements in Section 23 40 00, HVAC AIR CLEANING DEVICES.
- M. Diffuser Section: Furnish a diffuser segment with perforated diffuser plate immediately downstream of supply fan to assure uniform distribution of leaving air across the face of the downstream after-filters to create uniform velocity profiles across the entire opening. Bolt or weld diffuser plate to a sturdy steel support frame so that it remains rigid. Manufacturer shall include any diffuser section pressure loss in excess of diffuser plate and this value shall be included in unspecified internal losses when selecting fan.
- N. Coils: Coils shall be mounted on hot dipped galvanized steel supports to assure proper anchoring of coil and future maintenance. Coils shall be face or side removable for future replacement thru the access doors or removable panels. Each coil shall be removable without disturbing adjacent coil. Cooling coils shall be designed and installed to insure no condensate carry over. Provide factory installed extended supply, return, drain, and vent piping connections. Refer to Drawings for additional coil requirements.
1. Water Coils, Including Glycol-Water.
 2. Integral Face and Bypass Steam Coils: Provide integral vertical face and bypass dampers. Electric damper operators shall be furnished and mounted by the RTU manufacturer at the factory. Damper operators shall be of same manufacturer as controls furnished under Section 23 09 23, DIRECT-DIGITAL CONTROL SYSTEM FOR HVAC.
- O. Discharge Section: Provide aerodynamically designed framed discharge openings or spun bellmouth fittings to minimize pressure loss.
- P. Electrical and Lighting: Wiring and equipment specifications shall conform to Division 26, ELECTRICAL.
1. Vapor-proof lights using cast aluminum base style with glass globe and cast aluminum guard shall be installed in access sections for fan, mixing box, // humidifier // and any section over 300mm (12

inch) wide. A switch shall control the lights in each compartment with pilot light mounted outside the respective compartment access door. Wiring between switches and lights shall be factory installed. All wiring shall run in neatly installed electrical conduits and terminate in a junction box for field connection to the building system. Provide single point 115 volt - one phase connection at junction box.

2. Install compatible 100 watt bulb in each light fixture.
3. Provide a convenience duplex // weatherproof // receptacle next to the light switch.
4. Disconnect switch and power wiring: Provide factory or field mounted disconnect switch. Coordinate with Division 26, ELECTRICAL.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install roof top unit in conformance with ARI 435.
- B. Assemble roof top unit components following manufacturer's instructions for handling, testing and operation. Repair damaged galvanized areas with paint in accordance with Military Spec. DOD-P-21035A. Repair painted units by touch up of all scratches with finish paint material. Vacuum the interior of air-handling units clean prior to operation.
- C. Leakage and test requirements for roof top units shall be the same as specified for ductwork in Specification Section 23 31 00, HVAC DUCTS AND CASINGS except leakage shall not exceed Leakage Class (C_L) 12 listed in SMACNA HVAC Air Duct Leakage Test Manual when tested at 1.5 times the design static pressure. Repair casing air leaks that can be heard or felt during normal operation and to meet test requirements.
- D. Perform field mechanical (vibration) balancing in accordance with Section 23 05 41, NOISE and VIBRATION CONTROL FOR HVAC PIPING and EQUIPMENT.
- E. Seal and/or fill all openings between the casing and RTU components and utility connections to prevent air leakage or bypass.

3.2 STARTUP SERVICES

- A. The air handling unit shall not be operated for any purpose, temporary or permanent, until ductwork is clean, filters are in place, bearings are lubricated and fan has been test run under observation.
- B. After the air handling unit is installed and tested, provide startup and operating instructions to VA personnel.
- C. An authorized factory representative should start up, test and certify the final installation and application specific calibration of control components. Items to be verified include fan performance over entire

operating range, noise and vibration testing, verification of proper alignment, overall inspection of the installation, Owner/Operator training, etc.

3.3 COMMISSIONING

- A. Provide commissioning documentation in accordance with the requirements of Section 23 05 93 - TESTING, ADJUSTING, AND BALANCING FOR HVAC for all inspection, start up, and contractor testing required above and required by the System Readiness Checklist provided by the Commissioning Agent.
- B. Components provided under this section of the specification will be tested as part of a larger system. Refer to Section 23 05 93 - TESTING, ADJUSTING, AND BALANCING FOR HVAC and related sections for contractor responsibilities for system commissioning.

- - - E N D - - -

SECTION 26 05 11
REQUIREMENTS FOR ELECTRICAL INSTALLATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section applies to all sections of Division 26.
- B. Furnish and install electrical wiring, systems, equipment and accessories in accordance with the specifications and drawings. Capacities and ratings of motors, transformers, cable, switchboards, switchgear, panelboards, motor control centers, generators, automatic transfer switches, and other items and arrangements for the specified items are shown on drawings.
- C. Wiring ampacities specified or shown on the drawings are based on copper conductors, with the conduit and raceways accordingly sized. Aluminum conductors are prohibited.

1.2 MINIMUM REQUIREMENTS

- A. References to the International Building Code (IBC), National Electrical Code (NEC), Underwriters Laboratories, Inc. (UL) and National Fire Protection Association (NFPA) are minimum installation requirement standards.
- B. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

1.3 TEST STANDARDS

- A. All materials and equipment shall be listed, labeled or certified by a nationally recognized testing laboratory to meet Underwriters Laboratories, Inc., standards where test standards have been established. Equipment and materials which are not covered by UL Standards will be accepted provided equipment and material is listed, labeled, certified or otherwise determined to meet safety requirements of a nationally recognized testing laboratory. Equipment of a class which no nationally recognized testing laboratory accepts, certifies, lists, labels, or determines to be safe, will be considered if inspected or tested in accordance with national industrial standards, such as NEMA, or ANSI. Evidence of compliance shall include certified test reports and definitive shop drawings.
- B. Definitions:
 - 1. Listed; Equipment, materials, or services included in a list published by an organization that is acceptable to the authority having jurisdiction and concerned with evaluation of products or

- services, that maintains periodic inspection of production or listed equipment or materials or periodic evaluation of services, and whose listing states that the equipment, material, or services either meets appropriate designated standards or has been tested and found suitable for a specified purpose.
2. Labeled; Equipment or materials to which has been attached a label, symbol, or other identifying mark of an organization that is acceptable to the authority having jurisdiction and concerned with product evaluation, that maintains periodic inspection of production of labeled equipment or materials, and by whose labeling the manufacturer indicates compliance with appropriate standards or performance in a specified manner.
 3. Certified; equipment or product which:
 - a. Has been tested and found by a nationally recognized testing laboratory to meet nationally recognized standards or to be safe for use in a specified manner.
 - b. Production of equipment or product is periodically inspected by a nationally recognized testing laboratory.
 - c. Bears a label, tag, or other record of certification.
 4. Nationally recognized testing laboratory; laboratory which is approved, in accordance with OSHA regulations, by the Secretary of Labor.

1.4 QUALIFICATIONS (PRODUCTS AND SERVICES)

- A. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.
- B. Product Qualification:
 1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
 2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.
- C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.5 APPLICABLE PUBLICATIONS

Applicable publications listed in all Sections of Division are the latest issue, unless otherwise noted.

1.6 MANUFACTURED PRODUCTS

- A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.
- B. When more than one unit of the same class or type of equipment is required, such units shall be the product of a single manufacturer.
- C. Equipment Assemblies and Components:
 - 1. Components of an assembled unit need not be products of the same manufacturer.
 - 2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
 - 3. Components shall be compatible with each other and with the total assembly for the intended service.
 - 4. Constituent parts which are similar shall be the product of a single manufacturer.
- D. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.
- E. When Factory Testing Is Specified:
 - 1. The Government shall have the option of witnessing factory tests. The contractor shall notify the VA through the COTR a minimum of 15 working days prior to the manufacturers making the factory tests.
 - 2. Four copies of certified test reports containing all test data shall be furnished to the COTR prior to final inspection and not more than 90 days after completion of the tests.
 - 3. When equipment fails to meet factory test and re-inspection is required, the contractor shall be liable for all additional expenses, including expenses of the Government.

1.7 EQUIPMENT REQUIREMENTS

Where variations from the contract requirements are requested in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods. Refer to "CHANGES" FAR clause 52.243.

1.8 EQUIPMENT PROTECTION

- A. Equipment and materials shall be protected during shipment and storage against physical damage, vermin, dirt, corrosive substances, fumes, moisture, cold and rain.
 - 1. Store equipment indoors in clean dry space with uniform temperature to prevent condensation. Equipment shall include but not be limited to switchgear, switchboards, panelboards, transformers, motor control centers, motor controllers, uninterruptible power systems, enclosures, controllers, circuit protective devices, cables, wire, light fixtures, electronic equipment, and accessories.
 - 2. During installation, equipment shall be protected against entry of foreign matter; and be vacuum-cleaned both inside and outside before testing and operating. Compressed air shall not be used to clean equipment. Remove loose packing and flammable materials from inside equipment.
 - 3. Damaged equipment shall be, as determined by the COTR, placed in first class operating condition or be returned to the source of supply for repair or replacement.
 - 4. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.
 - 5. Damaged paint on equipment and materials shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

1.9 WORK PERFORMANCE

- A. All electrical work must comply with the requirements of NFPA 70 (NEC), NFPA 70B, NFPA 70E, OSHA Part 1910 subpart J, OSHA Part 1910 subpart S and OSHA Part 1910 subpart K in addition to other references required by contract.
- B. Job site safety and worker safety is the responsibility of the contractor.
- C. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished in this manner for the required work, the following requirements are mandatory:
 - 1. Electricians must use full protective equipment (i.e., certified and tested insulating material to cover exposed energized electrical components, certified and tested insulated tools, etc.) while working on energized systems in accordance with NFPA 70E.
 - 2. Electricians must wear personal protective equipment while working on energized systems in accordance with NFPA 70E.

3. Before initiating any work, a job specific work plan must be developed by the contractor with a peer review conducted and documented by the COTR and Medical Center staff. The work plan must include procedures to be used on and near the live electrical equipment, barriers to be installed, safety equipment to be used and exit pathways.
4. Work on energized circuits or equipment cannot begin until prior written approval is obtained from the COTR.
- D. For work on existing stations, arrange, phase and perform work to assure electrical service for other buildings at all times. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.
- E. New work shall be installed and connected to existing work neatly, safely and professionally. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.
- F. Coordinate location of equipment and conduit with other trades to minimize interferences.

1.10 EQUIPMENT INSTALLATION AND REQUIREMENTS

- A. Equipment location shall be as close as practical to locations shown on the drawings.
- B. Working spaces shall not be less than specified in the NEC for all voltages specified.
- C. Inaccessible Equipment:
 1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
 2. "Conveniently accessible" is defined as being capable of being reached quickly for operation, maintenance, or inspections without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

1.11 EQUIPMENT IDENTIFICATION

- A. In addition to the requirements of the NEC, install an identification sign which clearly indicates information required for use and maintenance of items such as switchboards and switchgear, panelboards, cabinets, motor controllers (starters), fused and unfused safety switches, automatic transfer switches, separately enclosed circuit breakers, individual breakers and controllers in switchboards,

switchgear and motor control assemblies, control devices and other significant equipment.

- B. Nameplates for Normal Power System equipment shall be laminated black phenolic resin with a white core with engraved lettering. Nameplates for Essential Electrical System (EES) equipment, as defined in the NEC, shall be laminated red phenolic resin with a white core with engraved lettering. Lettering shall be a minimum of 1/2 inch [12mm] high. Nameplates shall indicate equipment designation, rated bus amperage, voltage, number of phases, number of wires, and type of EES power branch as applicable. Secure nameplates with screws.
- C. Install adhesive arc flash warning labels on all equipment as required by NFPA 70E. Label shall indicate the arc hazard boundary (inches), working distance (inches), arc flash incident energy at the working distance (calories/cm²), required PPE category and description including the glove rating, voltage rating of the equipment, limited approach distance (inches), restricted approach distance (inches), prohibited approach distance (inches), equipment/bus name, date prepared, and manufacturer name and address.

1.12 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. The Government's approval shall be obtained for all equipment and material before delivery to the job site. Delivery, storage or installation of equipment or material which has not had prior approval will not be permitted at the job site.
- C. All submittals shall include adequate descriptive literature, catalog cuts, shop drawings and other data necessary for the Government to ascertain that the proposed equipment and materials comply with specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify equipment being submitted.
- D. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.
 - 1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
 - 2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
 - 3. Submit each section separately.

E. The submittals shall include the following:

1. Information that confirms compliance with contract requirements.
Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, pictures, nameplate data and test reports as required.
2. Elementary and interconnection wiring diagrams for communication and signal systems, control systems and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
3. Parts list which shall include those replacement parts recommended by the equipment manufacturer.

F. Manuals: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.

1. Maintenance and Operation Manuals: Submit as required for systems and equipment specified in the technical sections. Furnish four copies, bound in hardback binders, (manufacturer's standard binders) or an approved equivalent. Furnish one complete manual as specified in the technical section but in no case later than prior to performance of systems or equipment test, and furnish the remaining manuals prior to contract completion.
2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, equipment, building, name of Contractor, and contract number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the system or equipment.
3. Provide a "Table of Contents" and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
4. The manuals shall include:
 - a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
 - b. A control sequence describing start-up, operation, and shutdown.
 - c. Description of the function of each principal item of equipment.
 - d. Installation instructions.
 - e. Safety precautions for operation and maintenance.
 - f. Diagrams and illustrations.
 - g. Periodic maintenance and testing procedures and frequencies, including replacement parts numbers and replacement frequencies.
 - h. Performance data.

- i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare parts, and name of servicing organization.
 - j. List of factory approved or qualified permanent servicing organizations for equipment repair and periodic testing and maintenance, including addresses and factory certification qualifications.
- G. Approvals will be based on complete submission of manuals together with shop drawings.
- H. After approval and prior to installation, furnish the COTR with one sample of each of the following:
- 1. A 300 mm (12 inch) length of each type and size of wire and cable along with the tag from the coils of reels from which the samples were taken.
 - 2. Each type of conduit coupling, bushing and termination fitting.
 - 3. Conduit hangers, clamps and supports.
 - 4. Duct sealing compound.
 - 5. Each type of receptacle, toggle switch, occupancy sensor, outlet box, manual motor starter, device wall plate, engraved nameplate, wire and cable splicing and terminating material, and branch circuit single pole molded case circuit breaker.

1.13 SINGULAR NUMBER

Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

1.14 ACCEPTANCE CHECKS AND TESTS

The contractor shall furnish the instruments, materials and labor for field tests.

1.15 TRAINING

- A. Training shall be provided in accordance with Article 1.25, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.
- B. Training shall be provided for the particular equipment or system as required in each associated specification.
- C. A training schedule shall be developed and submitted by the contractor and approved by the COTR at least 30 days prior to the planned training.

- - - E N D - - -

SECTION 26 05 21**LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW)****PART 1 - GENERAL****1.1 DESCRIPTION**

This section specifies the furnishing, installation, and connection of the low voltage power and lighting wiring.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire-rated construction.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
- D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for cables and wiring.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 FACTORY TESTS

Low voltage cables shall be thoroughly tested at the factory per NEMA WC-70 to ensure that there are no electrical defects. Factory tests shall be certified.

1.5 SUBMITTALS

In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

- 1. Manufacturer's Literature and Data: Showing each cable type and rating.
- 2. Certifications: Two weeks prior to the final inspection, submit four copies of the following certifications to the //COTR:
 - a. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
 - b. Certification by the contractor that the materials have been properly installed, connected, and tested.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are reference in the text by designation only.

- B. American Society of Testing Material (ASTM):
D2301-04.....Standard Specification for Vinyl Chloride
Plastic Pressure-Sensitive Electrical Insulating
Tape
- C. National Fire Protection Association (NFPA):
70-08.....National Electrical Code (NEC)
- D. National Electrical Manufacturers Association (NEMA):
WC 70-09.....Power Cables Rated 2000 Volts or Less for the
Distribution of Electrical Energy
- E. Underwriters Laboratories, Inc. (UL):
44-05.....Thermoset-Insulated Wires and Cables
83-08.....Thermoplastic-Insulated Wires and Cables
467-071.....Electrical Grounding and Bonding Equipment
486A-486B-03.....Wire Connectors
486C-04.....Splicing Wire Connectors
486D-05.....Sealed Wire Connector Systems
486E-94.....Equipment Wiring Terminals for Use with Aluminum
and/or Copper Conductors
493-07.....Thermoplastic-Insulated Underground Feeder and
Branch Circuit Cable
514B-04.....Conduit, Tubing, and Cable Fittings
1479-03.....Fire Tests of Through-Penetration Fire Stops

PART 2 - PRODUCTS

2.1 CONDUCTORS AND CABLES

- A. Conductors and cables shall be in accordance with NEMA WC-70 and as specified herein.
- B. Single Conductor:
1. Shall be annealed copper.
 2. Shall be stranded for sizes No. 8 AWG and larger, solid for sizes No. 10 AWG and smaller.
 3. Shall be minimum size No. 12 AWG, except where smaller sizes are allowed herein.
- C. Insulation:
1. XHHW-2 or THHN-THWN shall be in accordance with NEMA WC-70, UL 44, and UL 83.
- D. Color Code:
1. Secondary service feeder and branch circuit conductors shall be color-coded as follows:

208/120 volt	Phase	480/277 volt
Black	A	Brown
Red	B	Orange
Blue	C	Yellow
White	Neutral	Gray *
* or white with colored (other than green) tracer.		

- a. Lighting circuit "switch legs" and 3-way switch "traveling wires" shall have color coding that is unique and distinct (e.g., pink and purple) from the color coding indicated above. The unique color codes shall be solid and in accordance with the NEC.
Coordinate color coding in the field with the COTR.
2. Use solid color insulation or solid color coating for No. 12 AWG and No. 10 AWG branch circuit phase, neutral, and ground conductors.
3. Conductors No. 8 AWG and larger shall be color-coded using one of the following methods:
 - a. Solid color insulation or solid color coating.
 - b. Stripes, bands, or hash marks of color specified above.
 - c. Color as specified using 0.75 in [19 mm] wide tape. Apply tape in half-overlapping turns for a minimum of 3 in [75 mm] for terminal points, and in junction boxes, pull-boxes, troughs, and manholes. Apply the last two laps of tape with no tension to prevent possible unwinding. Where cable markings are covered by tape, apply tags to cable, stating size and insulation type.
4. For modifications and additions to existing wiring systems, color coding shall conform to the existing wiring system.

2.2 SPLICES AND JOINTS

- A. In accordance with UL 486A, C, D, E, and NEC.
- B. Aboveground Circuits (No. 10 AWG and smaller):
 1. Connectors: Solderless, screw-on, reusable pressure cable type, rated 600 V, 220° F [105° C], with integral insulation, approved for copper and aluminum conductors.
 2. The integral insulator shall have a skirt to completely cover the stripped wires.
 3. The number, size, and combination of conductors, as listed on the manufacturer's packaging, shall be strictly followed.

C. Aboveground Circuits (No. 8 AWG and larger):

1. Connectors shall be indent, hex screw, or bolt clamp-type of high conductivity and corrosion-resistant material, listed for use with copper and aluminum conductors.
2. Field-installed compression connectors for cable sizes 250 kcmil and larger shall have not fewer than two clamping elements or compression indents per wire.
3. Insulate splices and joints with materials approved for the particular use, location, voltage, and temperature. Splice and joint insulation level shall be not less than the insulation level of the conductors being joined.
4. Plastic electrical insulating tape: Per ASTM D2304, flame-retardant, cold and weather resistant.

D. Underground Branch Circuits and Feeders:

1. Submersible connectors in accordance with UL 486D, rated 600 V, 190° F [90° C], with integral insulation.

2.3 CONTROL WIRING

- A. Unless otherwise specified elsewhere in these specifications, control wiring shall be as specified for power and lighting wiring, except that the minimum size shall be not less than No. 14 AWG.
- B. Control wiring shall be large enough such that the voltage drop under in-rush conditions does not adversely affect operation of the controls.

2.4 WIRE LUBRICATING COMPOUND

- A. Lubricating compound shall be suitable for the wire insulation and conduit, and shall not harden or become adhesive.

PART 3 - EXECUTION

3.1 GENERAL

- A. Install in accordance with the NEC, and as specified.
- B. Install all wiring in raceway systems.
- C. Splice cables and wires only in outlet boxes, junction boxes, pull-boxes, manholes, or handholes.
- D. Wires of different systems (e.g., 120 V, 277 V) shall not be installed in the same conduit or junction box system.
- E. Install cable supports for all vertical feeders in accordance with the NEC. Provide split wedge type which firmly clamps each individual cable and tightens due to cable weight.
- F. For panel boards, cabinets, wireways, switches, and equipment assemblies, neatly form, train, and tie the cables in individual circuits.

- G. Seal cable and wire entering a building from underground between the wire and conduit where the cable exits the conduit, with a non-hardening approved compound.
- H. Wire Pulling:
 - 1. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling of cables. Use lubricants approved for the cable.
 - 2. Use nonmetallic ropes for pulling feeders.
 - 3. Attach pulling lines for feeders by means of either woven basket grips or pulling eyes attached directly to the conductors, as approved by the COTR.
 - 4. All cables in a single conduit shall be pulled simultaneously.
 - 5. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.
- I. No more than three single-phase branch circuits shall be installed in any one conduit.

3.2 SPLICE INSTALLATION

- A. Splices and terminations shall be mechanically and electrically secure.
- B. Tighten electrical connectors and terminals according to manufacturer's published torque values.
- C. Where the Government determines that unsatisfactory splices or terminations have been installed, remove the devices and install approved devices at no additional cost to the Government.

3.3 FEEDER IDENTIFICATION

- A. In each interior pull-box and junction box, install metal tags on all circuit cables and wires to clearly designate their circuit identification and voltage. The tags shall be the embossed brass type, 1.5 in [40 mm] in diameter and 40 mils thick. Attach tags with plastic ties.
- B. In each manhole and handhole, provide tags of the embossed brass type, showing the circuit identification and voltage. The tags shall be the embossed brass type, 1.5 in [40 mm] in diameter and 40 mils thick. Attach tags with plastic ties.

3.4 EXISTING WIRING

Unless specifically indicated on the plans, existing wiring shall not be reused for a new installation.

3.5 CONTROL AND SIGNAL WIRING INSTALLATION

- A. Unless otherwise specified in other sections, install wiring and connect to equipment/devices to perform the required functions as shown and specified.

- B. Except where otherwise required, install a separate power supply circuit for each system so that malfunctions in any system will not affect other systems.
- C. Where separate power supply circuits are not shown, connect the systems to the nearest panel boards of suitable voltages, which are intended to supply such systems and have suitable spare circuit breakers or space for installation.

3.7 CONTROL AND SIGNAL SYSTEM WIRING IDENTIFICATION

- A. Install a permanent wire marker on each wire at each termination.
- B. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.
- C. Wire markers shall retain their markings after cleaning.
- D. In each manhole and handhole, install embossed brass tags to identify the system served and function.

3.8 ACCEPTANCE CHECKS AND TESTS

- A. Feeders and branch circuits shall have their insulation tested after installation and before connection to utilization devices, such as fixtures, motors, or appliances. Test each conductor with respect to adjacent conductors and to ground. Existing conductors to be reused shall also be tested.
- B. Applied voltage shall be 500VDC for 300-volt rated cable, and 1000VDC for 600-volt rated cable. Apply test for one minute or until reading is constant for 15 seconds, whichever is longer. Minimum insulation resistance values shall not be less than 25 megohms for 300-volt rated cable and 100 megohms for 600-volt rated cable.
- C. Perform phase rotation test on all three-phase circuits.
- D. The contractor shall furnish the instruments, materials, and labor for all tests.

- - - E N D - - -

SECTION 26 05 26
GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the general grounding and bonding requirements for electrical equipment and operations to provide a low impedance path for possible ground fault currents.
- B. "Grounding electrode system" refers to all electrodes required by NEC, as well as made, supplementary, and lightning protection system grounding electrodes.
- C. The terms "connect" and "bond" are used interchangeably in this specification and have the same meaning.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.
- B. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Low Voltage power and lighting wiring.
- D. Section 26 24 16, PANELBOARDS: Low voltage panelboards.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- B. Shop Drawings:
 - 1. Clearly present enough information to determine compliance with drawings and specifications.
 - 2. Include the location of system grounding electrode connections and the routing of aboveground and underground grounding electrode conductors.
- C. Test Reports: Provide certified test reports of ground resistance.
- D. Certifications: Two weeks prior to final inspection, submit four copies of the following to the COTR:
 - 1. Certification that the materials and installation are in accordance with the drawings and specifications.
 - 2. Certification by the contractor that the complete installation has been properly installed and tested.

1.5 APPLICABLE PUBLICATIONS

Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

- A. American Society for Testing and Materials (ASTM):
 - B1-07.....Standard Specification for Hard-Drawn Copper Wire
 - B3-07.....Standard Specification for Soft or Annealed Copper Wire
 - B8-04.....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft
- B. Institute of Electrical and Electronics Engineers, Inc. (IEEE):
 - 81-1983.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System
 - C2-07.....National Electrical Safety Code
- C. National Fire Protection Association (NFPA):
 - 70-08.....National Electrical Code (NEC)
 - 99-2005.....Health Care Facilities
- D. Underwriters Laboratories, Inc. (UL):
 - 44-05Thermoset-Insulated Wires and Cables
 - 83-08Thermoplastic-Insulated Wires and Cables
 - 467-07Grounding and Bonding Equipment
 - 486A-486B-03Wire Connectors

PART 2 - PRODUCTS**2.1 GROUNDING AND BONDING CONDUCTORS**

- A. Equipment grounding conductors shall be UL 44 or UL 83 insulated stranded copper, except that sizes No. 10 AWG [6 mm²] and smaller shall be solid copper. Insulation color shall be continuous green for all equipment grounding conductors, except that wire sizes No. 4 AWG [25 mm²] and larger shall be identified per NEC.
- B. Bonding conductors shall be ASTM B8 bare stranded copper, except that sizes No. 10 AWG [6 mm²] and smaller shall be ASTM B1 solid bare copper wire.
- C. Conductor sizes shall not be less than shown on the drawings, or not less than required by the NEC, whichever is greater.

2.2 GROUND CONNECTIONS

A. Above Grade:

1. Bonding Jumpers: Compression-type connectors, using zinc-plated fasteners and external tooth lockwashers.
2. Connection to Building Steel: Exothermic-welded type connectors.
3. Ground Busbars: Two-hole compression type lugs, using tin-plated copper or copper alloy bolts and nuts.
4. Rack and Cabinet Ground Bars: One-hole compression-type lugs, using zinc-plated or copper alloy fasteners.

2.6 EQUIPMENT RACK AND CABINET GROUND BARS

Provide solid copper ground bars designed for mounting on the framework of open or cabinet-enclosed equipment racks with minimum dimensions of 0.375 in [4 mm] thick x 0.75 in [19 mm] wide.

2.7 GROUND TERMINAL BLOCKS

At any equipment mounting location (e.g., backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted, provide screw lug-type terminal blocks.

2.8 GROUNDING BUS

Pre-drilled rectangular copper bar with stand-off insulators, minimum 0.25 in [6.3 mm] thick x 4 in [100 mm] high in cross-section, length as shown on drawings, with 0.281 in [7.1 mm] holes spaced 1.125 in [28 mm] apart.

PART 3 - EXECUTION

3.1 GENERAL

- A. Ground in accordance with the NEC, as shown on drawings, and as specified herein.

3.3 RACEWAY

A. Conduit Systems:

1. Ground all metallic conduit systems. All metallic conduit systems shall contain an equipment grounding conductor.
2. Non-metallic conduit systems, except non-metallic feeder conduits that carry a grounded conductor from exterior transformers to interior or building-mounted service entrance equipment, shall contain an equipment grounding conductor.
3. Conduit that only contains a grounding conductor, and is provided for its mechanical protection, shall be bonded to that conductor at the entrance and exit from the conduit.

4. Metallic conduits which terminate without mechanical connection to an electrical equipment housing by means of locknut and bushings or adapters, shall be provided with grounding bushings. Connect bushings with a bare grounding conductor to the equipment ground bus.
- B. Feeders and Branch Circuits: Install equipment grounding conductors with all feeders and power and lighting branch circuits.
- C. Boxes, Cabinets, Enclosures, and Panelboards:
 1. Bond the equipment grounding conductor to each pullbox, junction box, outlet box, device box, cabinets, and other enclosures through which the conductor passes (except for special grounding systems for intensive care units and other critical units shown).
 2. Provide lugs in each box and enclosure for equipment grounding conductor termination.
- D. Wireway Systems:
 1. Bond the metallic structures of wireway to provide 100% electrical continuity throughout the wireway system, by connecting a No. 6 AWG [16 mm²] bonding jumper at all intermediate metallic enclosures and across all section junctions.
 2. Install insulated No. 6 AWG [16 mm²] bonding jumpers between the wireway system, bonded as required above, and the closest building ground at each end and approximately every 50 ft [16 M].
 3. Use insulated No. 6 AWG [16 mm²] bonding jumpers to ground or bond metallic wireway at each end for all intermediate metallic enclosures and across all section junctions.
 4. Use insulated No. 6 AWG [16 mm²] bonding jumpers to ground cable tray to column-mounted building ground plates (pads) at each end and approximately every 49 ft [15 M].
- E. Receptacles shall not be grounded through their mounting screws. Ground receptacles with a jumper from the receptacle green ground terminal to the device box ground screw and a jumper to the branch circuit equipment grounding conductor.
- F. Ground lighting fixtures to the equipment grounding conductor of the wiring system when the green ground is provided; otherwise, ground the fixtures through the conduit systems. Fixtures connected with flexible conduit shall have a green ground wire included with the power wires from the fixture through the flexible conduit to the first outlet box.

- G. Fixed electrical appliances and equipment shall be provided with a ground lug for termination of the equipment grounding conductor.

3.4 CORROSION INHIBITORS

When making ground and ground bonding connections, apply a corrosion inhibitor to all contact surfaces. Use corrosion inhibitor appropriate for protecting a connection between the metals used.

3.5 CONDUCTIVE PIPING

- A. Bond all conductive piping systems, interior and exterior, to the grounding electrode system. Bonding connections shall be made as close as practical to the equipment ground bus.
- B. In operating rooms and at intensive care and coronary care type beds, bond the gases and suction piping at the outlets directly to the room or patient ground bus.

3.6 LIGHTNING PROTECTION SYSTEM

Bond the lightning protection system to the electrical grounding electrode system.

- - - E N D - - -

SECTION 26 05 33
RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the furnishing, installation, and connection of conduit, fittings, and boxes, to form complete, coordinated, grounded raceway systems. Raceways are required for all wiring unless shown or specified otherwise.
- B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

1.2 RELATED WORK

- A. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire rated construction.
- D. Section 07 92 00, JOINT SEALANTS: Sealing around conduit penetrations through the building envelope to prevent moisture migration into the building.
- B. Section 09 91 00, PAINTING: Identification and painting of conduit and other devices.
- C. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.
- D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:

- A. Manufacturer's Literature and Data: Showing each cable type and rating. The specific item proposed and its area of application shall be identified on the catalog cuts.
- B. Shop Drawings:
 - 1. Size and location of main feeders.
 - 2. Size and location of panels and pull-boxes.
 - 3. Layout of required conduit penetrations through structural elements.
- C. Certifications:

1. Two weeks prior to the final inspection, submit four copies of the following certifications to the COTRCOTR:
 - a. Certification by the manufacturer that the material conforms to the requirements of the drawings and specifications.
 - b. Certification by the contractor that the material has been properly installed.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. American National Standards Institute (ANSI):
 - C80.1-05.....Electrical Rigid Steel Conduit
 - C80.3-05.....Steel Electrical Metal Tubing
 - C80.6-05.....Electrical Intermediate Metal Conduit
- C. National Fire Protection Association (NFPA):
 - 70-08.....National Electrical Code (NEC)
- D. Underwriters Laboratories, Inc. (UL):
 - 1-05.....Flexible Metal Conduit
 - 5-04.....Surface Metal Raceway and Fittings
 - 6-07.....Electrical Rigid Metal Conduit - Steel
 - 50-95.....Enclosures for Electrical Equipment
 - 360-093.....Liquid-Tight Flexible Steel Conduit
 - 467-07.....Grounding and Bonding Equipment
 - 514A-04.....Metallic Outlet Boxes
 - 514B-04.....Conduit, Tubing, and Cable Fittings
 - 514C-96.....Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers
 - 651-05.....Schedule 40 and 80 Rigid PVC Conduit and Fittings
 - 651A-00.....Type EB and A Rigid PVC Conduit and HDPE Conduit
 - 797-07.....Electrical Metallic Tubing
 - 1242-06.....Electrical Intermediate Metal Conduit - Steel
- E. National Electrical Manufacturers Association (NEMA):
 - TC-2-03.....Electrical Polyvinyl Chloride (PVC) Tubing and Conduit
 - TC-3-04.....PVC Fittings for Use with Rigid PVC Conduit and Tubing
 - FB1-07.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

PART 2 - PRODUCTS**2.1 MATERIAL**

- A. Conduit Size: In accordance with the NEC, but not less than 0.5 in [13 mm] unless otherwise shown. Where permitted by the NEC, 0.5 in [13 mm] flexible conduit may be used for tap connections to recessed lighting fixtures.
- B. Conduit:
1. Rigid steel: Shall conform to UL 6 and ANSI C80.1.
 2. Rigid intermediate steel conduit (IMC): Shall conform to UL 1242 and ANSI C80.6.
 3. Electrical metallic tubing (EMT): Shall conform to UL 797 and ANSI C80.3. Maximum size not to exceed 4 in [105 mm] and shall be permitted only with cable rated 600 V or less.
 4. Flexible galvanized steel conduit: Shall conform to UL 1.
 5. Liquid-tight flexible metal conduit: Shall conform to UL 360.
 6. Direct burial plastic conduit: Shall conform to UL 651 and UL 651A, heavy wall PVC or high density polyethylene (PE).
 7. Surface metal raceway: Shall conform to UL 5.
- C. Conduit Fittings:
1. Rigid steel and IMC conduit fittings:
 - a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
 - b. Standard threaded couplings, locknuts, bushings, conduit bodies, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
 - c. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
 - d. Bushings: Metallic insulating type, consisting of an insulating insert, molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
 - e. Erickson (union-type) and set screw type couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case-hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
 - f. Sealing fittings: Threaded cast iron type. Use continuous drain-type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank

cover plates having the same finishes as that of other electrical plates in the room.

2. Electrical metallic tubing fittings:
 - a. Fittings and conduit bodies shall meet the requirements of UL 514B, ANSI C80.3, and NEMA FB1.
 - b. Only steel or malleable iron materials are acceptable.
 - c. Indent-type connectors or couplings are prohibited.
 - d. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.
 4. Flexible steel conduit fittings:
 - a. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
 - b. Clamp-type, with insulated throat.
 5. Liquid-tight flexible metal conduit fittings:
 - a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
 - b. Only steel or malleable iron materials are acceptable.
 - c. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.
 6. Direct burial plastic conduit fittings:

Fittings shall meet the requirements of UL 514C and NEMA TC3.
 7. Surface metal raceway fittings: As recommended by the raceway manufacturer. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, conduit entry fittings, accessories, and other fittings as required for complete system.
 8. Expansion and deflection couplings:
 - a. Conform to UL 467 and UL 514B.
 - b. Accommodate a 0.75 in [19 mm] deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.
 - c. Include internal flexible metal braid, sized to guarantee conduit ground continuity and a low-impedance path for fault currents, in accordance with UL 467 and the NEC tables for equipment grounding conductors.
 - d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat-resistant molded rubber material with stainless steel jacket clamps.
- D. Conduit Supports:
1. Parts and hardware: Zinc-coat or provide equivalent corrosion protection.

2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
 3. Multiple conduit (trapeze) hangers: Not less than 1.5 x 1.5 in [38 mm x 38 mm], 12-gauge steel, cold-formed, lipped channels; with not less than 0.375 in [9 mm] diameter steel hanger rods.
 4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.
- E. Outlet, Junction, and Pull Boxes:
1. UL-50 and UL-514A.
 2. Cast metal where required by the NEC or shown, and equipped with rustproof boxes.
 3. Sheet metal boxes: Galvanized steel, except where otherwise shown.
 4. Flush-mounted wall or ceiling boxes shall be installed with raised covers so that the front face of raised cover is flush with the wall. Surface-mounted wall or ceiling boxes shall be installed with surface-style flat or raised covers.

PART 3 - EXECUTION

3.1 PENETRATIONS

- A. Cutting or Holes:
1. Cut holes in advance where they should be placed in the structural elements, such as ribs or beams. Obtain the approval of the COTR prior to drilling through structural elements.
 2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammers, impact electric, hand, or manual hammer-type drills are not allowed, except where permitted by the COTRas required by limited working space.
- B. Firestop: Where conduits, wireways, and other electrical raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING.
- C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal clearances around the conduit and make watertight, as specified in Section 07 92 00, JOINT SEALANTS.

3.2 INSTALLATION, GENERAL

- A. In accordance with UL, NEC, as shown, and as specified herein.

- B. Essential (Emergency) raceway systems shall be entirely independent of other raceway systems, except where shown on drawings.
- C. Install conduit as follows:
1. In complete mechanically and electrically continuous runs before pulling in cables or wires.
 2. Unless otherwise indicated on the drawings or specified herein, installation of all conduits shall be concealed within finished walls, floors, and ceilings.
 3. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new undamaged material.
 4. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
 5. Cut square, ream, remove burrs, and draw up tight.
 6. Independently support conduit at 8 ft [2.4 M] on centers. Do not use other supports, i.e., suspended ceilings, suspended ceiling supporting members, lighting fixtures, conduits, mechanical piping, or mechanical ducts.
 7. Support within 12 in [300 mm] of changes of direction, and within 12 in [300 mm] of each enclosure to which connected.
 8. Close ends of empty conduit with plugs or caps at the rough-in stage until wires are pulled in, to prevent entry of debris.
 9. Conduit installations under fume and vent hoods are prohibited.
 10. Secure conduits to cabinets, junction boxes, pull-boxes, and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
 11. Conduit bodies shall only be used for changes in direction, and shall not contain splices.
- D. Conduit Bends:
1. Make bends with standard conduit bending machines.
 2. Conduit hickey may be used for slight offsets and for straightening stubbed out conduits.
 3. Bending of conduits with a pipe tee or vise is prohibited.
- E. Layout and Homeruns:
1. Install conduit with wiring, including homeruns, as shown on drawings.
 2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted approved by the COTR.

3.3 CONCEALED WORK INSTALLATION

A. In Concrete:

1. Conduit: Rigid steel.
2. Align and run conduit in direct lines.
3. Install conduit through concrete beams only:
 - a. Where shown on the structural drawings.
 - b. As approved by the COTR prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
4. Installation of conduit in concrete that is less than 3 in [75 mm] thick is prohibited.
 - a. Conduit outside diameter larger than one-third of the slab thickness is prohibited.
 - b. Space between conduits in slabs: Approximately six conduit diameters apart, and one conduit diameter at conduit crossings.
 - c. Install conduits approximately in the center of the slab so that there will be a minimum of 0.75 in [19 mm] of concrete around the conduits.
5. Make couplings and connections watertight. Use thread compounds that are UL approved conductive type to ensure low resistance ground continuity through the conduits. Tightening setscrews with pliers is prohibited.

B. Above Furred or Suspended Ceilings and in Walls:

1. Conduit for conductors above 600 V: Rigid steel. Mixing different types of conduits indiscriminately in the same system is prohibited.
2. Conduit for conductors 600 V and below: Rigid steel, IMC, or EMT. Mixing different types of conduits indiscriminately in the same system is prohibited.
3. Align and run conduit parallel or perpendicular to the building lines.
4. Connect recessed lighting fixtures to conduit runs with maximum 6 ft [1.8 M] of flexible metal conduit extending from a junction box to the fixture.
5. Tightening setscrews with pliers is prohibited.

3.4 EXPOSED WORK INSTALLATION

- A. Unless otherwise indicated on the drawings, exposed conduit is only permitted in mechanical and electrical rooms.
- B. Conduit for Conductors 600 V and Below: Rigid steel, IMC, or EMT. Mixing different types of conduits indiscriminately in the system is prohibited.

- C. Align and run conduit parallel or perpendicular to the building lines.
- D. Install horizontal runs close to the ceiling or beams and secure with conduit straps.
- D. Support horizontal or vertical runs at not over 8 ft [2.4 M] intervals.
- F. Surface metal raceways: Use only where shown.
- G. Painting:
 - 1. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
 - 2. Paint all conduits containing cables rated over 600 V safety orange. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color. In addition, paint legends, using 2 in [50 mm] high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 20 ft [6 M] intervals in between.

3.4 WET OR DAMP LOCATIONS

- A. Unless otherwise shown, use conduits of rigid steel or IMC.
- B. Provide sealing fittings to prevent passage of water vapor where conduits pass from warm to cold locations, i.e., refrigerated spaces, constant-temperature rooms, air-conditioned spaces, building exterior walls, roofs, or similar spaces.
- C. Unless otherwise shown, use rigid steel or IMC conduit within 5 ft [1.5 M] of the exterior and below concrete building slabs in contact with soil, gravel, or vapor barriers. Conduit shall be half-lapped with 10 mil PVC tape before installation. After installation, completely recoat or retape any damaged areas of coating.

3.5 MOTORS AND VIBRATING EQUIPMENT

- A. Use flexible metal conduit for connections to motors and other electrical equipment subject to movement, vibration, misalignment, cramped quarters, or noise transmission.
- B. Use liquid-tight flexible metal conduit for installation in exterior locations, moisture or humidity laden atmosphere, corrosive atmosphere, water or spray wash-down operations, inside airstream of HVAC units, and locations subject to seepage or dripping of oil, grease, or water. Provide a green equipment grounding conductor with flexible metal conduit.

3.6 EXPANSION JOINTS

- A. Conduits 3 in [75 mm] and larger that are secured to the building structure on opposite sides of a building expansion joint require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.

- B. Provide conduits smaller than 3 in [75 mm] with junction boxes on both sides of the expansion joint. Connect conduits to junction boxes with sufficient slack of flexible conduit to produce 5 in [125 mm] vertical drop midway between the ends. Flexible conduit shall have a bonding jumper installed. In lieu of this flexible conduit, expansion and deflection couplings as specified above for conduits 15 in [375 mm] and larger are acceptable.
- C. Install expansion and deflection couplings where shown.

3.7 CONDUIT SUPPORTS, INSTALLATION

- A. Safe working load shall not exceed one-quarter of proof test load of fastening devices.
- B. Use pipe straps or individual conduit hangers for supporting individual conduits.
- C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and 200 lbs [90 kg]. Attach each conduit with U-bolts or other approved fasteners.
- D. Support conduit independently of junction boxes, pull-boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.
- E. Fasteners and Supports in Solid Masonry and Concrete:
 - 1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
 - 2. Existing Construction:
 - a. Steel expansion anchors not less than 0.25 in [6 mm] bolt size and not less than 1.125 in [28 mm] embedment.
 - b. Power set fasteners not less than 0.25 in [6 mm] diameter with depth of penetration not less than 3 in [75 mm].
 - c. Use vibration and shock-resistant anchors and fasteners for attaching to concrete ceilings.
- E. Hollow Masonry: Toggle bolts.
- F. Bolts supported only by plaster or gypsum wallboard are not acceptable.
- G. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.
- H. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
- I. Chain, wire, or perforated strap shall not be used to support or fasten conduit.
- J. Spring steel type supports or fasteners are prohibited for all uses except horizontal and vertical supports/fasteners within walls.

- K. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

3.8 BOX INSTALLATION

- A. Boxes for Concealed Conduits:
1. Flush-mounted.
 2. Provide raised covers for boxes to suit the wall or ceiling, construction, and finish.
- B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling-in operations.
- C. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
- D. Outlet boxes mounted back-to-back in the same wall are prohibited. A minimum 24 in [600 mm] center-to-center lateral spacing shall be maintained between boxes.
- E. Minimum size of outlet boxes for ground fault interrupter (GFI) receptacles is 4 in [100 mm] square x 2.125 in [55 mm] deep, with device covers for the wall material and thickness involved.
- F. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example "SIG-FA JB No. 1."
- G. On all branch circuit junction box covers, identify the circuits with black marker.

3.9 POKE-THRU INSTALLATION

- A. Unit shall mount in 6" nominal cored hole (coordinate actual core diameter with insert prior to drilling hole).
- B. Installation shall be completed by pushing unit down into the cored hole. Prior to and during installation, refer to system layout and/or approval drawings. Installer shall comply with detailed manufacturer's instruction sheet included with each device. The unit shall contain a retainer for securing the device in the slab, as well as the necessary intumescent material to seal the cored hole under fire conditions.

- - - E N D - - -

**SECTION 26 09 23
LIGHTING CONTROLS**

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the furnishing, installation and connection of the lighting controls.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General requirements that are common to more than one section of Division 26.
- B. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.
- D. Section 26 27 26, WIRING DEVICES: Wiring devices used for control of the lighting systems.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Product Data: For each type of lighting control, submit the following information.
 - 1. Manufacturer's catalog data.
 - 2. Wiring schematic and connection diagram.
 - 3. Installation details.
- C. Manuals:
 - 1. Submit, simultaneously with the shop drawings companion copies of complete maintenance and operating manuals including technical data sheets, and information for ordering replacement parts.
 - 2. Two weeks prior to the final inspection, submit four copies of the final updated maintenance and operating manuals, including any changes, to the COTR.
- D. Certifications:
 - 1. Two weeks prior to final inspection, submit four copies of the following certifications to the COTR:
 - a. Certification by the Contractor that the equipment has been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. Green Seal (GS):
 - GC-12.....Occupancy Sensors
- C. Illuminating Engineering Society of North America (IESNA):
 - IESNA LM-48Guide for Calibration of Photoelectric Control Devices
- D. National Electrical Manufacturer's Association (NEMA)
 - C136.10.....American National Standard for Roadway Lighting Equipment-Locking-Type Photocontrol Devices and Mating Receptacles - Physical and Electrical Interchangeability and Testing
 - ICS-1.....Standard for Industrial Control and Systems General Requirements
 - ICS-2.....Standard for Industrial Control and Systems: Controllers, Contractors, and Overload Relays Rated Not More than 2000 Volts AC or 750 Volts DC: Part 8 - Disconnect Devices for Use in Industrial Control Equipment
 - ICS-6.....Standard for Industrial Controls and Systems Enclosures
- E. Underwriters Laboratories, Inc. (UL):
 - 20.....Standard for General-Use Snap Switches
 - 773.....Standard for Plug-In Locking Type Photocontrols for Use with Area Lighting
 - 773ANonindustrial Photoelectric Switches for Lighting Control
 - 98.....Enclosed and Dead-Front Switches
 - 917.....Clock Operated Switches

PART 2 - PRODUCTS**2.2 INDOOR OCCUPANCY SENSORS**

- A. Wall- or ceiling-mounting, solid-state units with a power supply and relay unit, suitable for the environmental conditions in which installed.
 - 1. Operation: Unless otherwise indicated, turn lights on when covered area is occupied and off when unoccupied; with a 1 to 15 minute adjustable time delay for turning lights off.

2. Sensor Output: Contacts rated to operate the connected relay.
Sensor shall be powered from the relay unit.
3. Relay Unit: Dry contacts rated for 20A ballast load at 120V and 277V, for 13A tungsten at 120V, and for 1 hp at 120V.
4. Mounting:
 - a. Sensor: Suitable for mounting in any position on a standard outlet box.
 - b. Time-Delay and Sensitivity Adjustments: Recessed and concealed behind hinged door.
5. Indicator: LED, to show when motion is being detected during testing and normal operation of the sensor.
6. Bypass Switch: Override the on function in case of sensor failure.
7. Manual/automatic selector switch.
8. Automatic Light-Level Sensor: Adjustable from 2 to 200 fc [21.5 to 2152 lx]; keep lighting off when selected lighting level is present.
9. Faceplate for Wall-Switch Replacement Type: Refer to wall plate material and color requirements for toggle switches, as specified in Section 26 27 26, WIRING DEVICES.
- B. Dual-technology Type: Ceiling mounting; combination PIR and ultrasonic detection methods, field-selectable.
 1. Sensitivity Adjustment: Separate for each sensing technology.
 2. Detector Sensitivity: Detect occurrences of 6-inch [150mm] minimum movement of any portion of a human body that presents a target of not less than 36 sq. in. [232 sq. cm], and detect a person of average size and weight moving not less than 12 inches [305 mm] in either a horizontal or a vertical manner at an approximate speed of 12 inches/s [305 mm/s].
 3. Detection Coverage: detectors shall be configured to control areas as shown on the Drawings. Provide additional detector(s) as required.

PART 3 - EXECUTION

3.1 INSTALLATION:

- A. Installation shall be in accordance with the NEC, manufacturer's instructions and as shown on the drawings or specified.
- B. Aim outdoor photocell switch according to manufacturer's recommendations. Set adjustable window slide for 1 footcandle photocell turn-on.
- C. Aiming for wall-mounted and ceiling-mounted motion sensor switches shall be per manufacturer's recommendations.
- D. Set occupancy sensor "on" duration to 5 minutes unless noted otherwise.

- E. Locate light level sensors as indicated and in accordance with the manufacturer's recommendations. Adjust sensor for the scheduled light level at the typical work plane for that area.
- F. Label time switches and contactors with a unique designation.

3.2 ACCEPTANCE CHECKS AND TESTS

- A. Perform in accordance with the manufacturer's recommendations.
- B. Upon completion of installation, conduct an operating test to show that equipment operates in accordance with requirements of this section.
- C. Test for full range of dimming ballast and dimming controls capability. Observe for visually detectable flicker over full dimming range.
- D. Test occupancy sensors for proper operation. Observe for light control over entire area being covered.
- E. Program lighting control panels per schedule on drawings.

3.3 FOLLOW-UP VERIFICATION

Upon completion of acceptance checks and tests, the Contractor shall show by demonstration in service that the lighting control devices are in good operating condition and properly performing the intended function.

- - - E N D - - -

**SECTION 26 24 16
PANELBOARDS**

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the furnishing, installation, and connection of panelboards.

1.2 RELATED WORK

- A. Section 09 91 00, PAINTING: Identification and painting of panelboards.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one Section of Division 26.
- C. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
- D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits and outlet boxes.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- B. Shop Drawings:
 - 1. Sufficient information, shall be clearly presented to determine compliance with drawings and specifications.
 - 2. Include electrical ratings, dimensions, mounting details, materials, wiring diagrams, accessories, and weights of equipment. Complete nameplate data, including manufacturer's name and catalog number.
- C. Manuals:
 - 1. When submitting the shop drawings, submit companion copies of complete maintenance and operating manuals, including technical data sheets and wiring diagrams.
 - 2. If changes have been made to the maintenance and operating manuals that were originally submitted, then submit four copies of updated maintenance and operating manuals to the COTR two weeks prior to final inspection.

D. Certification: Two weeks prior to final inspection, submit four copies of the following to the COTR:

1. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
2. Certification by the contractor that the materials have been properly installed, connected, and tested.

1.5 APPLICABLE PUBLICATIONS

A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.

B. National Electrical Manufacturers Association (NEMA):

PB-1-06.....Panelboards

250-08.....Enclosures for Electrical Equipment (1000V
Maximum)

C. National Fire Protection Association (NFPA):

70-2005National Electrical Code (NEC)

70E-2004.....Standard for Electrical Life Safety in the
Workplace

D. Underwriters Laboratories, Inc. (UL):

50-95.....Enclosures for Electrical Equipment

67-09.....Panelboards

489-09.....Molded Case Circuit Breakers and Circuit
Breaker Enclosures

PART 2 - PRODUCTS

2.1 MOLDED CASE CIRCUIT BREAKERS FOR PANELBOARDS

A. Circuit breakers shall be per UL 489, in accordance with the NEC, as shown on the drawings, and as specified.

B. Circuit breakers in panelboards shall be bolt-on type.

C. Molded case circuit breakers shall have minimum interrupting rating as required to withstand the available fault current, but not less than:

1. 120/208 V Panelboard: 10,000 A symmetrical.

2. 120/240 V Panelboard: 10,000 A symmetrical.

3. 277/480 V Panelboard: 14,000 A symmetrical.

D. Molded case circuit breakers shall have automatic, trip free, non-adjustable, inverse time, and instantaneous magnetic trips for 100 A frame or lower. Magnetic trip shall be adjustable from 3x to 10x for

breakers with 600 A frames and higher. Factory setting shall be HI, unless otherwise noted.

E. Breaker features shall be as follows:

1. A rugged, integral housing of molded insulating material.
2. Silver alloy contacts.
3. Arc quenchers and phase barriers for each pole.
4. Quick-make, quick-break, operating mechanisms.
5. A trip element for each pole, thermal magnetic type with long time delay and instantaneous characteristics, a common trip bar for all poles and a single operator.
6. Electrically and mechanically trip free.
7. An operating handle which indicates ON, TRIPPED, and OFF positions.
8. An overload on one pole of a multipole breaker shall automatically cause all the poles of the breaker to open.
9. Ground fault current interrupting breakers, shunt trip breakers, lighting control breakers (including accessories to switch line currents), or other accessory devices or functions shall be provided where indicated.
10. For circuit breakers being added to existing panelboards, coordinate the breaker type with existing panelboards. Modify the panel directory accordingly.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Installation shall be in accordance with the manufacturer's instructions, the NEC, as shown on the drawings, and as specified.
- B. Install a printed schedule of circuits in each panelboard after approval by the COTR. Schedules shall be printed on the panelboard directory cards, installed in the appropriate panelboards, and incorporate all applicable contract changes. Information shall indicate outlets, lights, devices, or other equipment controlled by each circuit, and the final room numbers served by each circuit.

3.2 ACCEPTANCE CHECKS AND TESTS

Perform in accordance with the manufacturer's recommendations. Include the following visual and mechanical inspections and electrical tests:

1. Visual and Mechanical Inspection

- a. Compare equipment nameplate data with specifications and approved shop drawings.
- b. Inspect physical, electrical, and mechanical condition.
- c. Verify appropriate anchorage and required area clearances.
- d. Verify that circuit breaker sizes and types correspond to approved shop drawings.
- e. To verify tightness of accessible bolted electrical connections, use the calibrated torque-wrench method or perform thermographic survey after energization.
- f. Clean panelboard.

3.3 FOLLOW-UP VERIFICATION

Upon completion of acceptance checks, settings, and tests, the contractor shall demonstrate that the panelboards are in good operating condition and properly performing the intended function.

- - - E N D - - -

SECTION 26 27 26
WIRING DEVICES

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the furnishing, installation and connection of wiring devices.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.
- B. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits and outlets boxes.
- C. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- D. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Shop Drawings:
 - 1. Sufficient information, clearly presented, shall be included to determine compliance with drawings and specifications.
 - 2. Include electrical ratings, dimensions, mounting details, construction materials, grade and termination information.
- C. Manuals: Two weeks prior to final inspection, deliver four copies of the following to the COTR: Technical data sheets and information for ordering replacement units.
- D. Certifications: Two weeks prior to final inspection, submit four copies of the following to the COTR: Certification by the Contractor that the devices comply with the drawings and specifications, and have been properly installed, aligned, and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent

referenced. Publications are referenced in the text by basic designation only.

- B. National Fire Protection Association (NFPA):
 - 70.....National Electrical Code (NEC)
- C. National Electrical Manufacturers Association (NEMA):
 - WD 1.....General Color Requirements for Wiring Devices
 - WD 6Wiring Devices - Dimensional Requirements
- D. Underwriter's Laboratories, Inc. (UL):
 - 5.....Surface Metal Raceways and Fittings
 - 20.....General-Use Snap Switches
 - 231.....Power Outlets
 - 467.....Grounding and Bonding Equipment
 - 498.....Attachment Plugs and Receptacles
 - 943.....Ground-Fault Circuit-Interrupters

PART 2 - PRODUCTS

2.1 RECEPTACLES

- A. General: All receptacles shall be listed by Underwriters Laboratories, Inc., and conform to NEMA WD 6.
 - 1. Mounting straps shall be plated steel, with break-off plaster ears and shall include a self-grounding feature. Terminal screws shall be brass, brass plated or a copper alloy metal.
 - 2. Receptacles shall have provisions for back wiring with separate metal clamp type terminals (four min.) and side wiring from four captively held binding screws.
- B. Duplex Receptacles: Hospital-grade, single phase, 20 ampere, 120 volts, 2-pole, 3-wire, and conform to the NEMA 5-20R configuration in NEMA WD 6. The duplex type shall have break-off feature for two-circuit operation. The ungrounded pole of each receptacle shall be provided with a separate terminal.
 - 1. Bodies shall be ivory in color.
 - 2. Switched duplex receptacles shall be wired so that only the top receptacle is switched. The remaining receptacle shall be unswitched.
 - 3. Duplex Receptacles on Emergency Circuit:
 - a. In rooms without emergency powered general lighting, the emergency receptacles shall be of the self-illuminated type.
 - 4. Ground Fault Interrupter Duplex Receptacles: Shall be an integral unit, hospital-grade, suitable for mounting in a standard outlet box.
 - a. Ground fault interrupter shall be consist of a differential current transformer, solid state sensing circuitry and a circuit interrupter switch. Device shall have nominal sensitivity to

ground leakage current of five milliamperes and shall function to interrupt the current supply for any value of ground leakage current above five milliamperes (+ or - 1 milliamp) on the load side of the device. Device shall have a minimum nominal tripping time of 1/30th of a second.

- b. Ground Fault Interrupter Duplex Receptacles (not hospital-grade) shall be the same as ground fault interrupter hospital-grade receptacles except for the "hospital-grade" listing.
5. Safety Type Duplex Receptacles:
- a. Bodies shall be gray in color.
 - 1) Shall permit current to flow only while a standard plug is in the proper position in the receptacle.
 - 2) Screws exposed while the wall plates are in place shall be the tamperproof type.
6. Duplex Receptacles (not hospital grade): Shall be the same as hospital grade duplex receptacles except for the "hospital grade" listing and as follows.
- a. Bodies shall be brown phenolic compound supported by a plated steel mounting strap having plaster ears.
- C. Receptacles; 20, 30 and 50 ampere, 250 volts: Shall be complete with appropriate cord grip plug. Devices shall meet UL 231.
- D. Weatherproof Receptacles: Shall consist of a duplex receptacle, mounted in box with a gasketed, weatherproof, cast metal cover plate and cap over each receptacle opening. The cap shall be permanently attached to the cover plate by a spring-hinged flap. The weatherproof integrity shall not be affected when heavy duty specification or hospital grade attachment plug caps are inserted. Cover plates on outlet boxes mounted flush in the wall shall be gasketed to the wall in a watertight manner.
- E. TVSS Receptacles. Shall comply with NEMA WD 1, NEMA WD 6, UL 498, and UL 1449, with integral TVSS in line to ground, line to neutral, and neutral to ground.
- 1. TVSS Components: Multiple metal-oxide varistors; with a nominal clamp-level rating of 400 volts and minimum single transient pulse energy dissipation of 240 J, according to IEEE C62.41.2 and IEEE C62.45.
 - 2. Active TVSS Indication: Visual and audible, with light visible in face of device to indicate device is "active" or "no longer in service."

2.2 WALL PLATES

- A. Wall plates for switches and receptacles shall be smooth nylon. Oversize plates are not acceptable.
- B. Color shall be ivory unless otherwise specified.
- C. Standard NEMA design, so that products of different manufacturers will be interchangeable. Dimensions for openings in wall plates shall be accordance with NEMA WD 6.
- D. For receptacles or switches mounted adjacent to each other, wall plates shall be common for each group of receptacles or switches.
- E. In psychiatric areas, wall plates shall be 302 stainless steel, have tamperproof screws and beveled edges.
- F. Wall plates for data, telephone or other communication outlets shall be as specified in the associated specification.
- G. Duplex Receptacles:
 - 1. Wall plates shall be red in color for devices on emergency circuits except where stainless steel wall plates are required.
 - 2. Bodies shall be red in color for devices on emergency circuits.
 - 3. Wall plates shall be engraved in 6 mm, (1/4 inch) white letters, with circuit number above device and panel identification below. For stainless steel wall plates, lettering shall be red for receptacles connected to emergency power.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Installation shall be in accordance with the NEC and as shown as on the drawings.
- B. Ground terminal of each receptacle shall be bonded to the outlet box with an approved green bonding jumper, and also connected to the green equipment grounding conductor.
- C. Outlet boxes for light and dimmer switches shall be mounted on the strike side of doors.
- D. Provide barriers in multigang outlet boxes to separate systems of different voltages, Normal Power and Emergency Power systems, and in compliance with the NEC.
- E. Coordinate with other work, including painting, electrical boxes and wiring installations, as necessary to interface installation of wiring devices with other work. Coordinate the electrical work with the work of other trades to ensure that wiring device flush outlets are positioned with box openings aligned with the face of the surrounding finish material. Pay special attention to installations in cabinet work, and in connection with laboratory equipment.

- F. Exact field locations of floors, walls, partitions, doors, windows, and equipment may vary from locations shown on the drawings. Prior to locating sleeves, boxes and chases for roughing-in of conduit and equipment, the Contractor shall coordinate exact field location of the above items with other trades. In addition, check for exact direction of door swings so that local switches are properly located on the strike side.
- I. Install convenience receptacles 18 inches [450mm] above floor, and 6 inches [152mm] above counter backsplash or workbenches. Install specific-use receptacles at heights shown on the drawings.
- J. Label device plates other than receptacle coverplates with a permanent adhesive label listing equipment identification, voltage, and panel and circuit feeding the wiring device. Apply label to the back of the cover plate.
- K. Test wiring devices for damaged conductors, high circuit resistance, poor connections, inadequate fault current path, defective devices, or similar problems using a portable receptacle tester. Correct circuit conditions, remove malfunctioning units and replace with new, and retest as specified above.
- L. Test GFCI devices for tripping values specified in UL 1436 and UL 943.

- - - E N D - - -

**SECTION 26 29 21
DISCONNECT SWITCHES**

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies the furnishing, installation, and connection of low voltage disconnect switches.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.
- B. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES 600 VOLTS AND BELOW: Cables and wiring.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground faults.
- D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for cables and wiring.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. Submit in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- B. Shop Drawings:
 - 1. Clearly present sufficient information to determine compliance with drawings and specifications.
 - 2. Include electrical ratings, dimensions, mounting details, materials, enclosure types, and fuse types and classes.
 - 3. Show the specific switch and fuse proposed for each specific piece of equipment or circuit.
- C. Manuals:
 - 1. Provide complete maintenance and operating manuals for disconnect switches, including technical data sheets, wiring diagrams, and information for ordering replacement parts. Deliver four copies to the COTR two weeks prior to final inspection.
 - 2. Terminals on wiring diagrams shall be identified to facilitate maintenance and operation.
 - 3. Wiring diagrams shall indicate internal wiring and any interlocking.

- D. Certifications: Two weeks prior to the final inspection, submit four copies of the following certifications to the COTR:
1. Certification by the manufacturer that the materials conform to the requirements of the drawings and specifications.
 2. Certification by the contractor that the materials have been properly installed, connected, and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. National Electrical Manufacturers Association (NEMA):
- FU 1-07.....Low Voltage Cartridge Fuses
 - KS 1-06.....Enclosed and Miscellaneous Distribution
Equipment Switches (600 Volts Maximum)
- C. National Fire Protection Association (NFPA):
- 70-08.....National Electrical Code (NEC)
- D. Underwriters Laboratories, Inc. (UL):
- 98-04.....Enclosed and Dead-Front Switches
 - 248-00.....Low Voltage Fuses
 - 977-94.....Fused Power-Circuit Devices

PART 2 - PRODUCTS

2.1 LOW VOLTAGE FUSIBLE SWITCHES RATED 600 AMPERES AND LESS

- A. In accordance with UL 98, NEMA KS1, and NEC.
- B. Shall have NEMA classification General Duty (GD) for 240 V switches and NEMA classification Heavy Duty (HD) for 480 V switches.
- C. Shall be HP rated.
- D. Shall have the following features:
1. Switch mechanism shall be the quick-make, quick-break type.
 2. Copper blades, visible in the OFF position.
 3. An arc chute for each pole.
 4. External operating handle shall indicate ON and OFF position and have lock-open padlocking provisions.
 5. Mechanical interlock shall permit opening of the door only when the switch is in the OFF position, defeatable to permit inspection.
 6. Fuse holders for the sizes and types of fuses specified.
 7. Solid neutral for each switch being installed in a circuit which includes a neutral conductor.
 8. Ground lugs for each ground conductor.
 9. Enclosures:
 - a. Shall be the NEMA types shown on the drawings for the switches.

b. Where the types of switch enclosures are not shown, they shall be the NEMA types most suitable for the ambient environmental conditions. Unless otherwise indicated on the plans, all outdoor switches shall be NEMA 3R.

c. Shall be finished with manufacturer's standard gray baked enamel paint over pretreated steel (for the type of enclosure required).

2.2 LOW VOLTAGE UNFUSED SWITCHES RATED 600 AMPERES AND LESS

Shall be the same as Low Voltage Fusible Switches Rated 600 Amperes and Less, but without provisions for fuses.

2.3 LOW VOLTAGE FUSIBLE SWITCHES RATED OVER 600 AMPERES TO 1200 AMPERES

Shall be the same as Low Voltage Fusible Switches Rated 600 Amperes and Less, except for the minimum duty rating which shall be NEMA classification Heavy Duty (HD). These switches shall also be HP rated.

2.4 LOW VOLTAGE CARTRIDGE FUSES

A. In accordance with NEMA FU1.

C. Feeders: Class RK1, time delay. Motor Branch Circuits: Class RK1, time delay.

E. Other Branch Circuits: Class RK1, time delay.

F. Control Circuits: Class CC, time delay.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Install disconnect switches in accordance with the NEC and as shown on the drawings.

B. Fusible disconnect switches shall be furnished complete with fuses. Arrange fuses such that rating information is readable without removing the fuse.

C. Provide disconnect switch with an engraved lamaroid nameplate listing equipment identification, voltage, and panel and circuit feeding the disconnect switch.

3.2 SPARE PARTS

Two weeks prior to the final inspection, furnish one complete set of spare fuses for each fusible disconnect switch installed on the project. Deliver the spare fuses to the /COTR.

- - - E N D - - -

**SECTION 26 51 00
INTERIOR LIGHTING**

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies the furnishing, installation and connection of the interior lighting systems.

1.2 RELATED WORK

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General requirements that are common to more than one section of Division 26.
- CB. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables and wiring.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.
- D. Section 26 27 26, WIRING DEVICES: Wiring devices used for control of the lighting systems.

1.3 QUALITY ASSURANCE

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

1.4 SUBMITTALS

- A. In accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, submit the following:
- B. Product Data: For each type of lighting fixture (luminaire) designated on the LIGHTING FIXTURE SCHEDULE, arranged in order of fixture designation, submit the following information.
 - 1. Material and construction details include information on housing, optics system and lens/diffuser.
 - 2. Physical dimensions and description.
 - 3. Wiring schematic and connection diagram.
 - 4. Installation details.
 - 5. Energy efficiency data.
 - 6. Photometric data based on laboratory tests complying with IESNA Lighting Measurements, testing and calculation guides.
 - 7. Lamp data including lumen output (initial and mean), color rendition index (CRI), rated life (hours) and color temperature (degrees Kelvin).
 - 8. Ballast data including ballast type, starting method, ambient temperature, ballast factor, sound rating, system watts and total harmonic distortion (THD).

C. Manuals:

1. Submit, simultaneously with the shop drawings companion copies of complete maintenance and operating manuals including technical data sheets, and information for ordering replacement parts.
2. Two weeks prior to the final inspection, submit four copies of the final updated maintenance and operating manuals, including any changes, to the COTR.

D. Certifications:

1. Two weeks prior to final inspection, submit four copies of the following certifications to the COTR:
 - a. Certification by the Contractor that the equipment has been properly installed, adjusted, and tested.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. Institute of Electrical and Electronic Engineers (IEEE):
C62.41-91.....Guide on the Surge Environment in Low Voltage
(1000V and less) AC Power Circuits
- C. National Fire Protection Association (NFPA):
70.....National Electrical Code (NEC)
101.....Life Safety Code
- D. National Electrical Manufacturer's Association (NEMA):
C82.1-97.....Ballasts for Fluorescent Lamps - Specifications
C82.2-02.....Method of Measurement of Fluorescent Lamp
Ballasts
C82.4-02.....Ballasts for High-Intensity-Discharge and Low-
Pressure Sodium Lamps
C82.11-02.....High Frequency Fluorescent Lamp Ballasts
- E. Underwriters Laboratories, Inc. (UL):
496-96.....Edison-Base Lampholders
542-99.....Lampholders, Starters, and Starter Holders for
Fluorescent Lamps
844-95.....Electric Lighting Fixtures for Use in Hazardous
(Classified) Locations
924-95.....Emergency Lighting and Power Equipment
935-01.....Fluorescent-Lamp Ballasts
1029-94.....High-Intensity-Discharge Lamp Ballasts
1029A-06.....Ignitors and Related Auxiliaries for HID Lamp
Ballasts

1598-00.....Luminaires
1574-04.....Standard for Track Lighting Systems
2108-04.....Standard for Low-Voltage Lighting Systems
8750-08.....Light Emitting Diode (LED) Light Sources for Use
in Lighting Products

F. Federal Communications Commission (FCC):

Code of Federal Regulations (CFR), Title 47, Part 18

PART 2 - PRODUCTS

2.1 LIGHTING FIXTURES (LUMINAIRES)

- A. Shall be in accordance with NFPA 70 and UL 1598, as shown on drawings, and as specified.
- B. Sheet Metal:
1. Shall be formed to prevent warping and sagging. Housing, trim and lens frame shall be true, straight (unless intentionally curved) and parallel to each other as designed.
 2. Wireways and fittings shall be free of burrs and sharp edges and shall accommodate internal and branch circuit wiring without damage to the wiring.
 3. When installed, any exposed fixture housing surface, trim frame, door frame and lens frame shall be free of light leaks; lens doors shall close in a light tight manner.
 4. Hinged door closure frames shall operate smoothly without binding when the fixture is in the installed position, latches shall function easily by finger action without the use of tools.
- C. Ballasts shall be serviceable while the fixture is in its normally installed position, and shall not be mounted to removable reflectors or wireway covers unless so specified.
- D. Lamp Sockets:
1. Fluorescent: Lampholder contacts shall be the biting edge type or phosphorous-bronze with silver flash contact surface type and shall conform to the applicable requirements of UL 542. Lamp holders for bi-pin lamps shall be of the telescoping compression type, or of the single slot entry type requiring a one-quarter turn of the lamp after insertion.
 2. High Intensity Discharge (H.I.D.): Shall have porcelain enclosures.
- E. Recessed fixtures mounted in an insulated ceiling shall be listed for use in insulated ceilings.
- F. Mechanical Safety: Lighting fixture closures (lens doors, trim frame, hinged housings, etc.) shall be retained in a secure manner by captive

screws, chains, captive hinges or fasteners such that they cannot be accidentally dislodged during normal operation or routine maintenance.

G. Metal Finishes:

1. The manufacturer shall apply standard finish (unless otherwise specified) over a corrosion resistant primer, after cleaning to free the metal surfaces of rust, grease, dirt and other deposits. Edges of pre-finished sheet metal exposed during forming, stamping or shearing processes shall be finished in a similar corrosion resistant manner to match the adjacent surface(s). Fixture finish shall be free of stains or evidence of rusting, blistering, or flaking, and shall be applied after fabrication.
2. Interior light reflecting finishes shall be white with not less than 85 percent reflectances, except where otherwise shown on the drawing.
3. Exterior finishes shall be as shown on the drawings.

H. Lighting fixtures shall have a specific means for grounding metallic wireways and housings to an equipment grounding conductor.

I. Light Transmitting Components for Fluorescent Fixtures:

1. Shall be 100 percent virgin acrylic.
2. Flat lens panels shall have not less than 1/8 inch [3.2mm] of average thickness. The average thickness shall be determined by adding the maximum thickness to the minimum unpenetrated thickness and dividing the sum by 2.
3. Unless otherwise specified, lenses, diffusers and louvers shall be retained firmly in a metal frame by clips or clamping ring in such a manner as to allow expansion and contraction of the lens without distortion or cracking.

J. Lighting fixtures in hazardous areas shall be suitable for installation in Class and Group areas as defined in NFPA 70, and shall comply with UL 844.

K. Compact fluorescent fixtures shall be manufactured specifically for compact fluorescent lamps with ballast integral to the fixture. Assemblies designed to retrofit incandescent fixtures are prohibited except when specifically indicated for renovation of existing fixtures (not the lamp). Fixtures shall be designed for lamps as specified.

2.2 BALLASTS

- A. Linear Fluorescent Lamp Ballasts: Multi-voltage (120 - 277V) electronic programmed-start or rapid-start type, complying with UL 935 and with ANSI C 82.11, designed for type and quantity of lamps indicated. Ballast shall be designed for full light output unless dimmer or bi-level control is indicated; including the following features:

1. Lamp end-of-life detection and shutdown circuit (T5 lamps only).
 2. Automatic lamp starting after lamp replacement.
 3. Sound Rating: Class A.
 4. Total Harmonic Distortion Rating: 10 percent or less.
 5. Transient Voltage Protection: IEEE C62.41.1 and IEEE C62.41.2, Category A or better.
 6. Operating Frequency: 20 kHz or higher.
 7. Lamp Current Crest Factor: 1.7 or less.
 8. Ballast Factor: 0.87 or higher unless otherwise indicated.
 9. Power Factor: 0.98 or higher.
 10. Interference: Comply with 47 CFT 18, Ch.1, Subpart C, for limitations on electromagnetic and radio-frequency interference for non-consumer equipment.
 11. To facilitate multi-level lamp switching, lamps within fixture shall be wired with the outermost lamp at both sides of the fixture on the same ballast, the next inward pair on another ballast and so on to the innermost lamp (or pair of lamps). Within a given room, each switch shall uniformly control the same corresponding lamp (or lamp pairs) in all fixture units that are being controlled.
 12. Where three-lamp fixtures are indicated, unless switching arrangements dictate otherwise, utilize a common two-lamp ballast to operate the center lamp in pairs of adjacent units that are mounted in a continuous row. The ballast fixture and slave-lamp fixture shall be factory wired with leads or plug devices to facilitate this circuiting. Individually mounted fixtures and the odd fixture in a row shall utilize a single-lamp ballast for operation of the center lamp.
 13. Dimming ballasts shall be as per above, except dimmable from 100% to 5% of rated lamp lumens.
- B. Compact Fluorescent Lamp Ballasts: Multi-voltage (120 - 277V), electronic-programmed rapid-start type, complying with UL 935 and with ANSI C 82.11, designed for type and quantity of lamps indicated. Ballast shall be designed for full light output unless dimmer or bi-level control is indicated; including the following features:
1. Lamp end-of-life detection and shutdown circuit.
 2. Automatic lamp starting after lamp replacement.
 3. Sound Rating: Class A.
 4. Total Harmonic Distortion Rating: 10 percent or less.
 5. Transient Voltage Protection: IEEE C62.41.1 and IEEE C62.41.2, Category A or better.

6. Operating Frequency: 20 kHz or higher.
 7. Lamp Current Crest Factor: 1.7 or less.
 8. Ballast Factor: 0.95 or higher unless otherwise indicated.
 9. Power Factor: 0.98 or higher.
 10. Interference: Comply with 47 CFR 18, Ch. 1, Subpart C, for limitations on electromagnetic and radio-frequency interference for non-consumer equipment.
 11. Dimming ballasts shall be as per above, except dimmable from 100% to 5% of rated lamp lumens.
- D. Ballasts for high intensity discharge fixtures: Multi-tap voltage (120-480v) electromagnetic ballast for high intensity discharge lamps. Comply with ANSI C82.4 and UL 1029. Include the following features unless otherwise indicated:
1. Ballast Circuit: Constant-wattage autotransformer or regulating high-power-factor type.
 2. Minimum Starting Temperature: Minus 22 deg F (Minus 30 deg C) for single-lamp ballasts.
 3. Rated Ambient Operating Temperature: 104 deg F (40 deg C).
 4. Open-circuit operation that will not reduce average life.
 5. Low-Noise Ballasts: Manufacturers' standard epoxy-encapsulated models designed to minimize audible fixture noise.
- E. Electronic ballast for high intensity discharge metal-halide lamps shall include the following features unless otherwise indicated:
1. Minimum Starting Temperature: Minus 20 deg F (Minus 29 deg C) for single-lamp ballasts.
 2. Rated Ambient Operating Temperature: 130 deg F (54 deg C).
 3. Lamp end-of-life detection and shutdown circuit.
 4. Sound Rating: Class A.
 5. Total Harmonic Distortion Rating: 20 percent or less.
 6. Transient Voltage Protection: IEEE C62.41.1 and IEEE C62.41.2, Category A or better.
 7. Lamp Current Crest Factor: 1.5 or less.
 8. Power Factor: 0.90 or higher.
 9. Interference: Comply with 47 CFR 18, Ch. 1, Subpart C, for limitations on electromagnetic and radio-frequency interference for non-consumer equipment.
 10. Protection: Class P thermal cut.

2.3 FLUORESCENT EMERGENCY BALLAST

- A. Self-contained, modular, battery-inverter unit, factory mounted within lighting fixture body and compatible with ballast. Comply with UL 924.
 - 1. Emergency Connection: Operate one fluorescent lamp(s) continuously at an output of 1100 lumens each. Connect unswitched circuit to battery-inverter unit and switched circuit to fixture ballast.
 - 2. Test Push Button and Indicator Light: Visible and accessible without opening fixture or entering ceiling space.
 - a. Push Button: Push-to-test type, in unit housing, simulates loss of normal power and demonstrates unit operability.
 - b. Indicator Light: LED indicates normal power on. Normal glow indicates trickle charge; bright glow indicates charging at end of discharge cycle.
 - 3. Battery: Sealed, maintenance-free, nickel-cadmium type.
 - 4. Charger: Fully automatic, solid-state, constant-current type with sealed power transfer relay.
 - 5. Integral Self-Test: Automatically initiates test of unit emergency operation at required intervals. Test failure is annunciated by an integral audible alarm and a flashing LED.

2.4 EMERGENCY LIGHTING UNIT

- A. Complete, self-contained unit with batteries, battery charger, one or more local or remote lamp heads with lamps, under-voltage relay, and test switch. Comply with UL 924.
 - 1. Enclosure: Shall be impact-resistant thermoplastic, which will protect components from dust, moisture, and oxidizing fumes from the battery. Enclosure shall be suitable for the environmental conditions in which installed.
 - 2. Lamp Heads: Horizontally and vertically adjustable, mounted on the face of the unit, except where otherwise indicated.
 - 3. Lamps: Shall be sealed-beam MR-16 halogen, rated not less than 12 watts at the specified DC voltage.
 - 4. Battery: Shall be maintenance-free nickel-cadmium. Minimum normal life shall be 10 years.
 - 5. Battery Charger: Dry-type full-wave rectifier with charging rates to maintain the battery in fully-charged condition during normal operation, and to automatically recharge the battery within 12 hours following a 1-1/2 hour continuous discharge.
 - 6. Integral Self-Test: Automatically initiates test of unit emergency operation at required intervals. Test failure is annunciated by an integral audible alarm and a flashing LED.

2.5 LAMPS

- A. Linear and U-shaped T5 and T8 Fluorescent Lamps:
 - 1. Rapid start fluorescent lamps shall comply with ANSI C78.1; and instant-start lamps shall comply with ANSI C78.3.
 - 2. Chromacity of fluorescent lamps shall comply with ANSI C78.376.
 - 3. Lamps shall be low-mercury energy saving type, have a color temperature between 3500° and 4100°K, a Color Rendering Index (CRI) of greater than 70, average rated life of 20,000 hours, and be suitable for use with dimming ballasts, unless otherwise indicated. Low mercury lamps shall have passed the EPA Toxicity Characteristic Leachate Procedure (TCLP) for mercury by using the lamp sample preparation procedure described in NEMA LL 1.
- B. Compact Fluorescent Lamps:
 - 1. T4, CRI 80 (minimum), color temperature 3500 K, and suitable for use with dimming ballasts, unless otherwise indicated.
- C. Long Twin-Tube Fluorescent Lamps:
 - 1. T5, CRI 80 (minimum), color temperature between 3500° and 4100°K, 20,000 hours average rated life.
- D. High Intensity Discharge Lamps:
 - 1. High-Pressure Sodium Lamps: ANSI C78.42, CRI 21 (minimum), color temperature 1900K, and average rated life of 24,000 hours, minimum.
 - 2. Pulse-Start, Metal-Halide Lamps: Minimum CRI 65, and color temperature 4000K.
 - 3. Ceramic, Pulse-Start, Metal-Halide Lamps: CRI 80 (minimum), and color temperature 4000K.
 - 4. Low-Pressure Sodium Lamps: ANSI 78.41, CRI 0, and color temperature 1800°K.

2.6 EXIT LIGHT FIXTURES

- A. Exit light fixtures shall meet applicable requirements of NFPA 101 and UL 924.
- B. Housing and Canopy:
 - 1. Shall be made of die-cast aluminum.
- C. Door frame shall be cast or extruded aluminum, and hinged with latch.
- D. Finish shall be satin or fine-grain brushed aluminum.
- E. There shall be no radioactive material used in the fixtures.
- F. Fixtures:
 - 1. Maximum fixture wattage shall be 1 watt or less.
 - 2. Inscription panels shall be cast or stamped aluminum a minimum of 0.090 inch [2.25mm] thick, stenciled with 6 inch [150mm] high

letters, baked with red color stable plastic or fiberglass. Lamps shall be luminous Light Emitting Diodes (LED) mounted in center of letters on red color stable plastic or fiberglass. The LED shall be rated minimum 25 years life.

3. Double-Faced Fixtures: Provide double-faced fixtures where required or as shown on drawings.
4. Directional Arrows: Provide directional arrows as part of the inscription panel where required or as shown on drawings. Directional arrows shall be the "chevron-type" of similar size and width as the letters and meet the requirements of NFPA 101.

G. Voltages: Refer to Lighting Fixture Schedule.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Installation shall be in accordance with the NEC, manufacturer's instructions and as shown on the drawings or specified.
- B. Align, mount and level the lighting fixtures uniformly.
- C. Fluorescent bed light fixtures shall be attached to the studs in the walls. Attachment to gypsum board only is not acceptable.
- D. Lighting Fixture Supports:
 1. Shall provide support for all of the fixtures. Supports may be anchored to channels of the ceiling construction, to the structural slab or to structural members within a partition, or above a suspended ceiling.
 2. Shall maintain the fixture positions after cleaning and relamping.
 3. Shall support the lighting fixtures without causing the ceiling or partition to deflect.
 4. Hardware for recessed fluorescent fixtures:
 - a. Where the suspended ceiling system is supported at the four corners of the fixture opening, hardware devices shall clamp the fixture to the ceiling system structural members, or plaster frame at not less than four points in such a manner as to resist spreading of the support members and safely lock the fixture into the ceiling system.
 - b. Where the suspended ceiling system is not supported at the four corners of the fixture opening, hardware devices shall independently support the fixture from the building structure at four points.
 5. Hardware for surface mounting fluorescent fixtures to suspended ceilings:

- a. In addition to being secured to any required outlet box, fixtures shall be bolted to a grid ceiling system at four points spaced near the corners of each fixture. The bolts shall be not less than 1/4 inch [6mm] secured to channel members attached to and spanning the tops of the ceiling structural grid members. Non-turning studs may be attached to the ceiling structural grid members or spanning channels by special clips designed for the purpose, provided they lock into place and require simple tools for removal.
- b. In addition to being secured to any required outlet box, fixtures shall be bolted to ceiling structural members at four points spaced near the corners of each fixture. Pre-positioned 1/4 inch [6mm] studs or threaded plaster inserts secured to ceiling structural members shall be used to bolt the fixtures to the ceiling. In lieu of the above, 1/4 inch [6mm] toggle bolts may be used on new or existing ceiling provided the plaster and lath can safely support the fixtures without sagging or cracking.//
- E. Furnish and install the specified lamps for all lighting fixtures installed and all existing lighting fixtures reinstalled under this project.
- F. Coordinate between the electrical and ceiling trades to ascertain that approved lighting fixtures are furnished in the proper sizes and installed with the proper devices (hangers, clips, trim frames, flanges), to match the ceiling system being installed.
- G. Bond lighting fixtures and metal accessories to the grounding system as specified in Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.
- H. Burn-in all lamps that require specific aging period to operate properly, prior to occupancy by Government. Burn-in period to be 40 hours minimum, unless a lesser period is specifically recommended by lamp manufacturer. Burn-in fluorescent and compact fluorescent lamps intended to be dimmed, for at least 100 hours at full voltage. Replace any lamps and ballasts which fail during burn-in.
- I. At completion of project, relamp/reballast fixtures which have failed lamps/ballasts. Clean fixtures, lenses, diffusers and louvers that have accumulated dust/dirt/fingerprints during construction. Replace damaged lenses, diffusers and louvers with new.
- J. Dispose of lamps per requirements of Section 01 74 19, CONSTRUCTION WASTE MANAGEMENT.

- - - E N D - - -

**SECTION 27 05 11
REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This Section, Requirements for Communications Installations, applies to all sections of Division 27.
- B. Furnish and install communications cabling, systems, equipment, and accessories in accordance with the specifications and drawings. Capacities and ratings of transformers, cable, and other items and arrangements for the specified items are shown on drawings.

1.2 MINIMUM REQUIREMENTS

- A. References to industry and trade association standards and codes are minimum installation requirement standards.
- B. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

1.3 QUALIFICATIONS (PRODUCTS AND SERVICES)

- A. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.
- B. Product Qualification:
 - 1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
 - 2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.
- C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.4 MANUFACTURED PRODUCTS

- A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.

- B. When more than one unit of the same class of equipment is required, such units shall be the product of a single manufacturer.
- C. Equipment Assemblies and Components:
 - 1. Components of an assembled unit need not be products of the same manufacturer.
 - 2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
 - 3. Components shall be compatible with each other and with the total assembly for the intended service.
 - 4. Constituent parts which are similar shall be the product of a single manufacturer.
- D. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.
- E. When Factory Testing Is Specified:
 - 1. The Government shall have the option of witnessing factory tests. The contractor shall notify the VA through the Resident Engineer a minimum of 15 working days prior to the manufacturers making the factory tests.
 - 2. Four copies of certified test reports containing all test data shall be furnished to the Resident Engineer prior to final inspection and not more than 90 days after completion of the tests.
 - 3. When equipment fails to meet factory test and re-inspection is required, the contractor shall be liable for all additional expenses, including expenses of the Government.

1.5 EQUIPMENT REQUIREMENTS

Where variations from the contract requirements are requested in accordance with Section 00 72 00, GENERAL CONDITIONS and Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

1.6 EQUIPMENT PROTECTION

- A. Equipment and materials shall be protected during shipment and storage against physical damage, dirt, moisture, cold and rain:
 - 1. During installation, enclosures, equipment, controls, controllers, circuit protective devices, and other like items, shall be protected against entry of foreign matter; and be vacuum cleaned both inside and outside before testing and operating and repainting if required.

2. Damaged equipment shall be, as determined by the Resident Engineer, placed in first class operating condition or be returned to the source of supply for repair or replacement.
3. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.
4. Damaged paint on equipment and materials shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

1.7 WORK PERFORMANCE

- A. Job site safety and worker safety is the responsibility of the contractor.
- B. For work on existing stations, arrange, phase and perform work to assure communications service for other buildings at all times. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.
- C. New work shall be installed and connected to existing work neatly and carefully. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.
- D. Coordinate location of equipment and pathways with other trades to minimize interferences.

1.8 EQUIPMENT INSTALLATION AND REQUIREMENTS

- A. Equipment location shall be as close as practical to locations shown on the drawings.
- B. Inaccessible Equipment:
 1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
 2. "Conveniently accessible" is defined as being capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

1.9 EQUIPMENT IDENTIFICATION

- A. Install an identification sign which clearly indicates information required for use and maintenance of equipment.
- B. Nameplates shall be laminated black phenolic resin with a white core with engraved lettering, a minimum of 6 mm (1/4 inch) high. Secure nameplates with screws. Nameplates that are furnished by manufacturer as

a standard catalog item, or where other method of identification is herein specified, are exceptions.

1.10 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. The Government's approval shall be obtained for all equipment and material before delivery to the job site. Delivery, storage, or installation of equipment or material which has not had prior approval will not be permitted at the job site.
- C. All submittals shall include adequate descriptive literature, catalog cuts, shop drawings, and other data necessary for the Government to ascertain that the proposed equipment and materials comply with specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify equipment being submitted.
- D. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.
 - 1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
 - 2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
 - 3. Submit each section separately.
- E. The submittals shall include the following:
 - 1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, pictures, nameplate data and test reports as required.
 - 2. Elementary and interconnection wiring diagrams for communication and signal systems, control system and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
 - 3. Parts list which shall include those replacement parts recommended by the equipment manufacturer, quantity of parts, current price and availability of each part.
- F. Manuals: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.
 - 1. Maintenance and Operation Manuals: Submit as required for systems and equipment specified in the technical sections. Furnish four copies, bound in hardback binders, (manufacturer's standard binders) or an approved equivalent. Furnish one complete manual as specified in the

- technical section but in no case later than prior to performance of systems or equipment test, and furnish the remaining manuals prior to contract completion.
2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, equipment, building, name of Contractor, and contract number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the system or equipment.
 3. Provide a "Table of Contents" and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
 4. The manuals shall include:
 - a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
 - b. A control sequence describing start-up, operation, and shutdown.
 - c. Description of the function of each principal item of equipment.
 - d. Installation and maintenance instructions.
 - e. Safety precautions.
 - f. Diagrams and illustrations.
 - g. Testing methods.
 - h. Performance data.
 - i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare parts, and name of servicing organization.
 - j. Appendix; list qualified permanent servicing organizations for support of the equipment, including addresses and certified qualifications.
- G. Approvals will be based on complete submission of manuals together with shop drawings.
- H. After approval and prior to installation, furnish the Resident Engineer with one sample of each of the following:
1. A 300 mm (12 inch) length of each type and size of wire and cable along with the tag from the coils of reels from which the samples were taken.
 2. Each type of conduit and pathway coupling, bushing and termination fitting.

3. Raceway and pathway hangers, clamps and supports.
 4. Duct sealing compound.
- I. In addition to the requirement of SUBMITTALS, the VA reserves the right to request the manufacturer to arrange for a VA representative to see typical active systems in operation, when there has been no prior experience with the manufacturer or the type of equipment being submitted.

1.11 SINGULAR NUMBER

Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

1.12 TRAINING

- A. Training shall be provided in accordance with Article, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.
- B. Training shall be provided for the particular equipment or system as required in each associated specification.
- C. A training schedule shall be developed and submitted by the contractor and approved by the Resident Engineer at least 30 days prior to the planned training.

- - - E N D - - -

SECTION 27 05 26
GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies general grounding and bonding requirements of telecommunication installations for equipment operations.
- B. "Grounding electrode system" refers to all electrodes required by NEC, as well as including made, supplementary, telecommunications system grounding electrodes.
- C. The terms "connect" and "bond" are used interchangeably in this specification and have the same meaning.

1.2 RELATED WORK

- A. Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 27.

1.3 SUBMITTALS

- A. Submit in accordance with Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.
- B. Shop Drawings:
 - 1. Sufficient information, clearly presented, shall be included to determine compliance with drawings and specifications.
 - 2. Include the location of system grounding electrode connections and the routing of aboveground and underground grounding electrode conductors.
- C. Test Reports: Provide certified test reports of ground resistance.
- D. Certifications: Two weeks prior to final inspection, submit four copies of the following to the Resident Engineer:
 - 1. Certification that the materials and installation is in accordance with the drawings and specifications.
 - 2. Certification, by the Contractor, that the complete installation has been properly installed and tested.

1.4 APPLICABLE PUBLICATIONS

Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.

- A. American Society for Testing and Materials (ASTM):

- B1-2001.....Standard Specification for Hard-Drawn Copper Wire
- B8-2004.....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft
- B. Institute of Electrical and Electronics Engineers, Inc. (IEEE):
 - 81-1983.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System
- C. National Fire Protection Association (NFPA):
 - 70-2005.....National Electrical Code (NEC)
- D. Telecommunications Industry Association, (TIA)
 - J-STO-607-A-2002.....Commercial Building Grounding (Earthing) and Bonding Requirements for Telecommunications
- E. Underwriters Laboratories, Inc. (UL):
 - 44-2005Thermoset-Insulated Wires and Cables
 - 83-2003Thermoplastic-Insulated Wires and Cables
 - 467-2004Grounding and Bonding Equipment
 - 486A-486B-2003Wire Connectors

PART 2 - PRODUCTS

2.1 GROUNDING AND BONDING CONDUCTORS

- A. Equipment grounding conductors shall be UL 83 insulated stranded copper, except that sizes 6 mm² (10 AWG) and smaller shall be solid copper. Insulation color shall be continuous green for all equipment grounding conductors, except that wire sizes 25 mm² (4 AWG) and larger shall be permitted to be identified per NEC.
- B. Bonding conductors shall be ASTM B8 bare stranded copper, except that sizes 6 mm² (10 AWG) and smaller shall be ASTM B1 solid bare copper wire.
- C. Isolated Power System: Type XHHW-2 insulation with a dielectric constant of 3.5 or less.
- D. Telecom System Grounding Riser Conductor: Telecommunications Grounding Riser shall be in accordance with J STO-607A. Use a minimum 50mm² (1/0 AWG) insulated stranded copper grounding conductor unless indicated otherwise.

2.2 GROUND RODS

- A. Copper clad steel, 19 mm (3/4-inch) diameter by 3000 mm (10 feet) long, conforming to UL 467.

- B. Quantity of rods shall be as required to obtain the specified ground resistance.

2.3 SPLICES AND TERMINATION COMPONENTS

Components shall meet or exceed UL 467 and be clearly marked with the manufacturer, catalog number, and permitted conductor size(s).

2.4 TELECOMMUNICATION SYSTEM GROUND BUSBARS

- A. Provide solid copper busbar, pre-drilled from two-hole lug connections with a minimum thickness of 6 mm (1/4 inch) for wall and backboard mounting using standard insulators sized as follows:

1. Room Signal Grounding: 300 mm x 100 mm (12 inches x 4 inch).
2. Master Signal Ground: 600 mm x 100 mm (24 inches x 4 inch).

2.5 GROUND CONNECTIONS

- A. Below Grade: Exothermic-welded type connectors.
- B. Above Grade:
 1. Bonding Jumpers: compression type connectors, using zinc-plated fasteners and external tooth lockwashers.
 2. Ground Busbars: Two-hole compression type lugs using tin-plated copper or copper alloy bolts and nuts.
 3. Rack and Cabinet Ground Bars: one-hole compression-type lugs using zinc-plated or copper alloy fasteners.
- A. Cable Shields: Make ground connections to multipair communications cables with metallic shields using shield bonding connectors with screw stud connection.

2.6 EQUIPMENT RACK AND CABINET GROUND BARS

Provide solid copper ground bars designed for mounting on the framework of open or cabinet-enclosed equipment racks with minimum dimensions of 4 mm thick by 19 mm wide (3/8 inch x 3/4 inch).

2.7 GROUND TERMINAL BLOCKS

At any equipment mounting location (e.g. backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted, provide screw lug-type terminal blocks.

2.8 SPLICE CASE GROUND ACCESSORIES

Splice case grounding and bonding accessories shall be supplied by the splice case manufacturer when available. Otherwise, use 16 mm² (6 AWG) insulated ground wire with shield bonding connectors.

PART 3 - EXECUTION**3.1 GENERAL**

- A. Ground in accordance with the NEC, as shown on drawings, and as hereinafter specified.
- B. System Grounding:
 - 1. Secondary service neutrals: Ground at the supply side of the secondary disconnecting means and at the related transformers.
 - 2. Separately derived systems (transformers downstream from the service entrance): Ground the secondary neutral.
 - 3. Isolation transformers and isolated power systems shall not be system grounded.
- C. Equipment Grounding: Metallic structures (including ductwork and building steel), enclosures, raceways, junction boxes, outlet boxes, cabinets, machine frames, and other conductive items in close proximity with electrical circuits shall be bonded and grounded.

3.2 INACCESSIBLE GROUNDING CONNECTIONS

Make grounding connections, which are buried or otherwise normally inaccessible (except connections for which periodic testing access is required) by exothermic weld.

3.3 SECONDARY EQUIPMENT AND CIRCUITS

- A. Main Bonding Jumper: Bond the secondary service neutral to the ground bus in the service equipment.
- B. Metallic Piping, Building Steel, and Supplemental Electrode(s):
 - 1. Provide a grounding electrode conductor sized per NEC between the service equipment ground bus and all metallic water and gas pipe systems, building steel, and supplemental or made electrodes. Jumper insulating joints in the metallic piping. All connections to electrodes shall be made with fittings that conform to UL 467.
 - 2. Provide a supplemental ground electrode and bond to the grounding electrode system.
- F. Conduit Systems:
 - 1. Ground all metallic conduit systems. All metallic conduit systems shall contain an equipment grounding conductor.
 - 2. Non-metallic conduit systems shall contain an equipment grounding conductor, except that non-metallic feeder conduits which carry a grounded conductor from exterior transformers to interior or building-mounted service entrance equipment need not contain an equipment grounding conductor.

3. Conduit containing only a grounding conductor, and which is provided for mechanical protection of the conductor, shall be bonded to that conductor at the entrance and exit from the conduit.
- G. Feeders and Branch Circuits: Install equipment grounding conductors with all feeders and power and lighting branch circuits.
- H. Boxes, Cabinets, Enclosures, and Panelboards:
 1. Bond the equipment grounding conductor to each pullbox, junction box, outlet box, device box, cabinets, and other enclosures through which the conductor passes (except for special grounding systems for intensive care units and other critical units shown).
 2. Provide lugs in each box and enclosure for equipment grounding conductor termination.
 3. Provide ground bars in panelboards, bolted to the housing, with sufficient lugs to terminate the equipment grounding conductors.
- J. Receptacles shall not be grounded through their mounting screws. Ground with a jumper from the receptacle green ground terminal to the device box ground screw and the branch circuit equipment grounding conductor.
- M. Raised Floors: Provide bonding of all raised floor components.

3.4 CORROSION INHIBITORS

When making ground and ground bonding connections, apply a corrosion inhibitor to all contact surfaces. Use corrosion inhibitor appropriate for protecting a connection between the metals used.

3.5 CONDUCTIVE PIPING

- A. Bond all conductive piping systems, interior and exterior, to the building to the grounding electrode system. Bonding connections shall be made as close as practical to the equipment ground bus.
- B. In operating rooms and at intensive care and coronary care type beds, bond the gases and suction piping, at the outlets, directly to the room or patient ground bus.

3.6 TELECOMMUNICATIONS SYSTEM

- A. Bond telecommunications system grounding equipment to the electrical grounding electrode system.
- B. Furnish and install all wire and hardware required to properly ground, bond and connect communications raceway, cable tray, metallic cable shields, and equipment to a ground source.
- C. Ground bonding jumpers shall be continuous with no splices. Use the shortest length of bonding jumper possible.

- D. Provide ground paths that are permanent and continuous with a resistance of 1 ohm or less from raceway, cable tray, and equipment connections to the building grounding electrode. The resistance across individual bonding connections shall be 10 milli ohms or less.
- E. Below-Grade Grounding Connections: When making exothermic welds, wire brush or file the point of contact to a bare metal surface. Use exothermic welding cartridges and molds in accordance with the manufacturer's recommendations. After welds have been made and cooled, brush slag from the weld area and thoroughly cleaned the joint area. Notify the Resident Engineer prior to backfilling any ground connections.
- F. Above-Grade Grounding Connections: When making bolted or screwed connections to attach bonding jumpers, remove paint to expose the entire contact surface by grinding where necessary; thoroughly clean all connector, plate and other contact surfaces; and apply an appropriate corrosion inhibitor to all surfaces before joining.
- G. Bonding Jumpers:
 - 1. Use insulated ground wire of the size and type shown on the Drawings or use a minimum of 16 mm² (6 AWG) insulated copper wire.
 - 2. Assemble bonding jumpers using insulated ground wire terminated with compression connectors.
 - 3. Use compression connectors of proper size for conductors specified. Use connector manufacturer's compression tool.
- H. Bonding Jumper Fasteners:
 - 1. Conduit: Fasten bonding jumpers using screw lugs on grounding bushings or conduit strut clamps, or the clamp pads on push-type conduit fasteners. When screw lug connection to a conduit strut clamp is not possible, fasten the plain end of a bonding jumper wire by slipping the plain end under the conduit strut clamp pad; tighten the clamp screw firmly. Where appropriate, use zinc-plated external tooth lockwashers.
 - 2. Wireway and Cable Tray: Fasten bonding jumpers using zinc-plated bolts, external tooth lockwashers, and nuts. Install protective cover, e.g., zinc-plated acorn nuts on any bolts extending into wireway or cable tray to prevent cable damage.

3. Ground Plates and Busbars: Fasten bonding jumpers using two-hole compression lugs. Use tin-plated copper or copper alloy bolts, external tooth lockwashers, and nuts.
4. Unistrut and Raised Floor Stringers: Fasten bonding jumpers using zinc-plated, self-drill screws and external tooth lockwashers.

3.7 COMMUNICATION ROOM GROUNDING

- A. Telecommunications Ground Busbars:
 1. Provide communications room telecommunications ground busbar hardware at 950 mm (18 inches) at locations indicated on the Drawings.
 2. Connect the telecommunications room ground busbars to other room grounding busbars as indicated on the Grounding Riser diagram.
- B. Telephone-Type Cable Rack Systems: aluminum pan installed on telephone-type cable rack serves as the primary ground conductor within the communications room. Make ground connections by installing the following bonding jumpers:
 1. Install a 16 mm² (6 AWG) bonding between the telecommunications ground busbar and the nearest access to the aluminum pan installed on the cable rack.
 2. Use 16 mm² (6 AWG) bonding jumpers across aluminum pan junctions.
- C. Self-Supporting and Cabinet-Mounted Equipment Rack Ground Bars:
 1. When ground bars are provided at the rear of lineup of bolted together equipment racks, bond the copper ground bars together using solid copper splice plates supplied by the ground bar manufacturer.
 2. Bond together nonadjacent ground bars on equipment racks and cabinets with 16 mm² (6 AWG) insulated copper wire bonding jumpers attached at each end with compression-type connectors and mounting bolts.
 3. Provide a 16 mm² (6 AWG) bonding jumper between the rack and/or cabinet ground busbar and the aluminum pan of an overhead cable tray or the raised floor stringer as appropriate.
- D. Backboards: Provide a screw lug-type terminal block or drilled and tapped copper strip near the top of backboards used for communications cross-connect systems. Connect backboard ground terminals to the aluminum pan in the telephone-type cable tray using an insulated 16 mm² (16 AWG) bonding jumper.
- E. Other Communication Room Ground Systems: Ground all metallic conduit, wireways, and other metallic equipment located away from equipment

racks or cabinets to the cable tray pan or the telecommunications ground busbar, whichever is closer, using insulated 16 mm² (6 AWG) ground wire bonding jumpers.

3.8 COMMUNICATIONS CABLE GROUNDING

A. Bond all metallic cable sheaths in multipair communications cables together at each splicing and/or terminating location to provide 100 percent metallic sheath continuity throughout the communications distribution system.

1. At terminal points, install a cable shield bonding connector provide a screw stud connection for ground wire. Use a bonding jumper to connect the cable shield connector to an appropriate ground source like the rack or cabinet ground bar.
2. Bond all metallic cable shields together within splice closures using cable shield bonding connectors or the splice case grounding and bonding accessories provided by the splice case manufacturer. When an external ground connection is provided as part of splice closure, connect to an approved ground source and all other metallic components and equipment at that location.

3.9 COMMUNICATIONS CABLE TRAY SYSTEMS:

A. Bond the metallic structures of one cable tray in each tray run following the same path to provide 100 percent electrical continuity throughout this cable tray systems as follows:

1. Splice plates provided by the cable tray manufacturer can be used for providing a ground bonding connection between cable tray sections when the resistance across a bolted connection is 10 milliohms or less. The Subcontractor shall verify this loss by testing across one splice plate connection in the presence of the Contractor.
2. Install a 16 mm² (6 AWG) bonding jumper across each cable tray splice or junction where splice plates cannot be used.
3. When cable tray terminations to cable rack, install 16 mm² (6 AWG) bonding jumper between cable tray and cable rack pan.

3.10 COMMUNICATIONS RACEWAY GROUNDING

A. Conduit: Use insulated 16 mm² (6 AWG) bonding jumpers to ground metallic conduit at each end and to bond at all intermediate metallic enclosures.

- B. Wireway: use insulated 16 mm² (6 AWG) bonding jumpers to ground or bond metallic wireway at each end at all intermediate metallic enclosures and across all section junctions.
- C. Cable Tray Systems: Use insulated 16 mm² (6 AWG) bonding jumpers to ground cable tray to column-mounted building ground plates (pads) at each end and approximately every 16 meters (50 feet).

3.11 GROUND RESISTANCE

- A. Grounding system resistance to ground shall not exceed 5 ohms. Make necessary modifications or additions to the grounding electrode system for compliance without additional cost to the Government. Final tests shall assure that this requirement is met.
- B. Resistance of the grounding electrode system shall be measured using a four-terminal fall-of-potential method as defined in IEEE 81. Ground resistance measurements shall be made before the electrical distribution system is energized and shall be made in normally dry conditions not less than 48 hours after the last rainfall. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together below grade. The combined resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes must still be provided.
- C. Services at power company interface points shall comply with the power company ground resistance requirements.
- D. Below-grade connections shall be visually inspected by the Resident Engineer prior to backfilling. The Contractor shall notify the Resident Engineer 24 hours before the connections are ready for inspection.

3.12 GROUND ROD INSTALLATION

- A. Drive each rod vertically in the earth, not less than 3000 mm (10 feet) in depth.
- B. Where permanently concealed ground connections are required, make the connections by the exothermic process to form solid metal joints. Make accessible ground connections with mechanical pressure type ground connectors.
- C. Where rock prevents the driving of vertical ground rods, install angled ground rods or grounding electrodes in horizontal trenches to achieve the specified resistance.

- - - E N D - - -

SECTION 27 05 33
RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the furnishing, installation, and connection of conduit, fittings, and boxes to form complete, coordinated, raceway systems. Raceways are required for all communications cabling unless shown or specified otherwise.
- B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

1.2 RELATED WORK

- A. Mounting board for communication closets: Section 06 10 00, ROUGH CARPENTRY.
- B. Sealing around penetrations to maintain the integrity of fire rated construction: Section 07 84 00, FIRESTOPPING.
- C. Fabrications for the deflection of water away from the building envelope at penetrations: Section 07 60 00, FLASHING AND SHEET METAL.
- D. Sealing around conduit penetrations through the building envelope to prevent moisture migration into the building: Section 07 92 00, JOINT SEALANTS.
- E. Identification and painting of conduit and other devices: Section 09 91 00, PAINTING.
- F. General electrical requirements and items that is common to more than one section of Division 27: Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.
- G. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents: Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

1.3 SUBMITTALS

In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

- A. Shop Drawings:
 - 1. Size and location of panels and pull boxes
 - 2. Layout of required conduit penetrations through structural elements.
 - 3. The specific item proposed and its area of application shall be identified on the catalog cuts.
- B. Certification: Prior to final inspection, deliver to the Resident Engineer four copies of the certification that the material is in

accordance with the drawings and specifications and has been properly installed.

1.4 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. National Fire Protection Association (NFPA):
- 70-05.....National Electrical Code (NEC)
- C. Underwriters Laboratories, Inc. (UL):
- 1-03.....Flexible Metal Conduit
- 5-01.....Surface Metal Raceway and Fittings
- 6-03.....Rigid Metal Conduit
- 50-03.....Enclosures for Electrical Equipment
- 360-03.....Liquid-Tight Flexible Steel Conduit
- 467-01.....Grounding and Bonding Equipment
- 514A-01.....Metallic Outlet Boxes
- 514B-02.....Fittings for Cable and Conduit
- 514C-05.....Nonmetallic Outlet Boxes, Flush-Device Boxes and
Covers
- 651-02.....Schedule 40 and 80 Rigid PVC Conduit
- 651A-03.....Type EB and A Rigid PVC Conduit and HDPE Conduit
- 797-03.....Electrical Metallic Tubing
- 1242-00.....Intermediate Metal Conduit
- D. National Electrical Manufacturers Association (NEMA):
- TC-3-04.....PVC Fittings for Use with Rigid PVC Conduit and
Tubing
- FB1-03.....Fittings, Cast Metal Boxes and Conduit Bodies
for Conduit, Electrical Metallic Tubing and
Cable

PART 2 - PRODUCTS

2.1 MATERIAL

- A. Conduit Size: In accordance with the NEC, but not less than 13 mm (1/2 inch) unless otherwise shown. Where permitted by the NEC, 13 mm (1/2 inch) flexible conduit may be used for tap connections to recessed lighting fixtures.
- B. Conduit:
1. Rigid galvanized steel: Shall Conform to UL 6, ANSI C80.1.
 2. Rigid aluminum: Shall Conform to UL 6A, ANSI C80.5.

3. Rigid intermediate steel conduit (IMC): Shall Conform to UL 1242, ANSI C80.6.
4. Electrical metallic tubing (EMT): Shall Conform to UL 797, ANSI C80.3. Maximum size not to exceed 105 mm (4 inch) and shall be permitted only with cable rated 600 volts or less.
5. Flexible galvanized steel conduit: Shall Conform to UL 1.
6. Liquid-tight flexible metal conduit: Shall Conform to UL 360.
7. Direct burial plastic conduit: Shall conform to UL 651 and UL 651A, heavy wall PVC or high density polyethylene (PE).
8. Surface metal raceway: Shall Conform to UL 5.

C. Conduit Fittings:

1. Rigid steel and IMC conduit fittings:
 - a. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
 - a. Standard threaded couplings, locknuts, bushings, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
 - b. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
 - c. Bushings: Metallic insulating type, consisting of an insulating insert molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
 - d. Erickson (union-type) and set screw type couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
 - e. Sealing fittings: Threaded cast iron type. Use continuous drain type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.
2. Rigid aluminum conduit fittings:
 - a. Standard threaded couplings, locknuts, bushings, and elbows: Malleable iron, steel or aluminum alloy materials; Zinc or cadmium plate iron or steel fittings. Aluminum fittings containing more than 0.4 percent copper are prohibited.

- b. Locknuts and bushings: As specified for rigid steel and IMC conduit.
- c. Set screw fittings: Not permitted for use with aluminum conduit.
- 3. Electrical metallic tubing fittings:
 - a. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
 - b. Only steel or malleable iron materials are acceptable.
 - c. Couplings and connectors: Concrete tight and rain tight, with connectors having insulated throats. Use gland and ring compression type couplings and connectors for conduit sizes 50 mm (2 inches) and smaller. Use set screw type couplings with four set screws each for conduit sizes over 50 mm (2 inches). Use set screws of case-hardened steel with hex head and cup point to firmly seat in wall of conduit for positive grounding.
 - d. Indent type connectors or couplings are prohibited.
 - e. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.
- 4. Flexible steel conduit fittings:
 - a. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
 - b. Clamp type, with insulated throat.
- 5. Liquid-tight flexible metal conduit fittings:
 - a. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
 - b. Only steel or malleable iron materials are acceptable.
 - c. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.
- 6. Direct burial plastic conduit fittings:
 - a. Fittings shall meet the requirements of UL 514C and NEMA TC3.
 - b. As recommended by the conduit manufacturer.
- 7. Surface metal raceway fittings: As recommended by the raceway manufacturer.
- 8. Expansion and deflection couplings:
 - a. Conform to UL 467 and UL 514B.
 - b. Accommodate, 19 mm (0.75 inch) deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.

- c. Include internal flexible metal braid sized to guarantee conduit ground continuity and fault currents in accordance with UL 467, and the NEC code tables for ground conductors.
 - d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat resistant molded rubber material with stainless steel jacket clamps.
- D. Conduit Supports:
- 1. Parts and hardware: Zinc-coat or provide equivalent corrosion protection.
 - 2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
 - 3. Multiple conduit (trapeze) hangers: Not less than 38 mm by 38 mm (1-1/2 by 1-1/2 inch), 12 gage steel, cold formed, lipped channels; with not less than 9 mm (3/8 inch) diameter steel hanger rods.
 - 4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.
- E. Outlet, Junction, and Pull Boxes:
- 1. UL-50 and UL-514A.
 - 2. Cast metal where required by the NEC or shown, and equipped with rustproof boxes.
 - 3. Sheet metal boxes: Galvanized steel, except where otherwise shown.
 - 4. Flush mounted wall or ceiling boxes shall be installed with raised covers so that front face of raised cover is flush with the wall. Surface mounted wall or ceiling boxes shall be installed with surface style flat or raised covers.
- F. Wireways: Equip with hinged covers, except where removable covers are shown.
- G. Warning Tape: Standard, 4-Mil polyethylene 76 mm (3 inch) wide tape detectable type, red with black letters, and imprinted with "CAUTION BURIED COMMUNICATIONS CABLE BELOW".

PART 3 - EXECUTION

3.1 PENETRATIONS

- A. Cutting or Holes:
- 1. Locate holes in advance where they are proposed in the structural sections such as ribs or beams. Obtain the approval of the Resident Engineer prior to drilling through structural sections.
 - 2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammer, impact electric, hand or manual hammer type drills are not allowed, except

where permitted by the Resident Engineer as required by limited working space.

- B. Fire Stop: Where conduits, wireways, and other communications raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING, with rock wool fiber or silicone foam sealant only. Completely fill and seal clearances between raceways and openings with the fire stop material.
- C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal clearances around the conduit and make watertight as specified in Section 07 92 00, JOINT SEALANTS.

3.2 INSTALLATION, GENERAL

- A. Install conduit as follows:
 - 1. In complete runs before pulling in cables or wires.
 - 2. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new undamaged material.
 - 3. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
 - 4. Cut square with a hacksaw, ream, remove burrs, and draw up tight.
 - 5. Mechanically continuous.
 - 6. Independently support conduit at 8'0" on center. Do not use other supports i.e., (suspended ceilings, suspended ceiling supporting members, lighting fixtures, conduits, mechanical piping, or mechanical ducts).
 - 7. Support within 300 mm (1 foot) of changes of direction, and within 300 mm (1 foot) of each enclosure to which connected.
 - 8. Close ends of empty conduit with plugs or caps at the rough-in stage to prevent entry of debris, until wires are pulled in.
 - 9. Conduit installations under fume and vent hoods are prohibited.
 - 10. Secure conduits to cabinets, junction boxes, pull boxes and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
 - 11. Flashing of penetrations of the roof membrane is specified in Section 07 60 00, FLASHING AND SHEET METAL.
 - 12. Do not use aluminum conduits in wet locations.

13. Unless otherwise indicated on the drawings or specified herein, all conduits shall be installed concealed within finished walls, floors and ceilings.

B. Conduit Bends:

1. Make bends with standard conduit bending machines.
2. Conduit hickey may be used for slight offsets, and for straightening stubbed out conduits.
3. Bending of conduits with a pipe tee or vise is prohibited.

C. Layout and Homeruns:

2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted approved by the Resident Engineer.

3.3 CONCEALED WORK INSTALLATION

A. In Concrete:

1. Conduit: Rigid steel, IMC or EMT. Do not install EMT in concrete slabs that are in contact with soil, gravel or vapor barriers.
2. Align and run conduit in direct lines.
3. Install conduit through concrete beams only when the following occurs:
 - a. Where shown on the structural drawings.
 - b. As approved by the Resident Engineer prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
4. Installation of conduit in concrete that is less than 75 mm (3 inches) thick is prohibited.
 - a. Conduit outside diameter larger than 1/3 of the slab thickness is prohibited.
 - b. Space between conduits in slabs: Approximately six conduit diameters apart, except one conduit diameter at conduit crossings.
 - c. Install conduits approximately in the center of the slab so that there will be a minimum of 19 mm (3/4 inch) of concrete around the conduits.
5. Make couplings and connections watertight. Use thread compounds that are UL approved conductive type to insure low resistance ground continuity through the conduits. Tightening set screws with pliers is prohibited.

B. Furred or Suspended Ceilings and in Walls:

1. Conduit for conductors above 600 volts:
 - a. Rigid steel or rigid aluminum.

- b. Aluminum conduit mixed indiscriminately with other types in the same system is prohibited.
- 2. Conduit for conductors 600 volts and below:
 - a. Rigid steel, IMC, rigid aluminum, or EMT. Different type conduits mixed indiscriminately in the same system is prohibited.
- 3. Align and run conduit parallel or perpendicular to the building lines.
- 4. Connect recessed lighting fixtures to conduit runs with maximum 1800 mm (six feet) of flexible metal conduit extending from a junction box to the fixture.
- 5. Tightening set screws with pliers is prohibited.

3.4 EXPOSED WORK INSTALLATION

- A. Unless otherwise indicated on the drawings, exposed conduit is only permitted in mechanical and electrical rooms.
- B. Conduit for conductors above 600 volts:
 - 1. Rigid steel or rigid aluminum.
 - 2. Aluminum conduit mixed indiscriminately with other types in the same system is prohibited.
- C. Conduit for Conductors 600 volts and below:
 - 1. Rigid steel, IMC, rigid aluminum, or EMT. Different type of conduits mixed indiscriminately in the system is prohibited.
- D. Align and run conduit parallel or perpendicular to the building lines.
- E. Install horizontal runs close to the ceiling or beams and secure with conduit straps.
- F. Support horizontal or vertical runs at not over 2400 mm (eight foot) intervals.
- G. Surface metal raceways: Use only where shown.
- H. Painting:
 - 1. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
 - 2. Paint all conduits containing cables rated over 600 volts safety orange. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (two inch) high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 6000 mm (20 foot) intervals in between.

3.5 EXPANSION JOINTS

- A. Conduits 75 mm (3 inches) and larger, that are secured to the building structure on opposite sides of a building expansion joint, require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.

- B. Provide conduits smaller than 75 mm (3 inches) with junction boxes on both sides of the expansion joint. Connect conduits to junction boxes with sufficient slack of flexible conduit to produce 125 mm (5 inch) vertical drop midway between the ends. Flexible conduit shall have a copper green ground bonding jumper installed. In lieu of this flexible conduit, expansion and deflection couplings as specified above for 375 mm (15 inches) and larger conduits are acceptable.
- C. Install expansion and deflection couplings where shown.

3.6 CONDUIT SUPPORTS, INSTALLATION

- A. Safe working load shall not exceed 1/4 of proof test load of fastening devices.
- B. Use pipe straps or individual conduit hangers for supporting individual conduits. Maximum distance between supports is 2.5 m (8 foot) on center.
- C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and 90 kg (200 pounds). Attach each conduit with U-bolts or other approved fasteners.
- D. Support conduit independently of junction boxes, pull boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.
- E. Fasteners and Supports in Solid Masonry and Concrete:
 - 1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
 - 2. Existing Construction:
 - a. Steel expansion anchors not less than 6 mm (1/4 inch) bolt size and not less than 28 mm (1-1/8 inch) embedment.
 - b. Power set fasteners not less than 6 mm (1/4 inch) diameter with depth of penetration not less than 75 mm (3 inches).
 - c. Use vibration and shock resistant anchors and fasteners for attaching to concrete ceilings.
- F. Hollow Masonry: Toggle bolts are permitted.
- G. Bolts supported only by plaster or gypsum wallboard are not acceptable.
- H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.
- I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
- J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.
- K. Spring steel type supports or fasteners are prohibited for all uses except: Horizontal and vertical supports/fasteners within walls.

- L. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

3.7 BOX INSTALLATION

- A. Boxes for Concealed Conduits:
 - 1. Flush mounted.
 - 2. Provide raised covers for boxes to suit the wall or ceiling, construction and finish.
- B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling in operations.
- C. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
- D. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example "SIG-FA JB No. 1".

3.11 COMMUNICATION SYSTEM CONDUIT

- A. Install the communication raceway system as shown on drawings.
- B. Minimum conduit size of 19 mm (3/4 inch), but not less than the size shown on the drawings.
- C. All conduit ends shall be equipped with insulated bushings.
- D. All 100 mm (four inch) conduits within buildings shall include pull boxes after every two 90 degree bends. Size boxes per the NEC.
- E. Vertical conduits/sleeves through closets floors shall terminate not less than 75 mm (3 inches) below the floor and not less than 75 mm (3 inches) below the ceiling of the floor below.
- F. Terminate conduit runs to/from a backboard in a closet or interstitial space at the top or bottom of the backboard. Conduits shall enter communication closets next to the wall and be flush with the backboard.
- G. Where drilling is necessary for vertical conduits, locate holes so as not to affect structural sections such as ribs or beams.
- H. All empty conduits located in communication closets or on backboards shall be sealed with a standard non-hardening duct seal compound to prevent the entrance of moisture and gases and to meet fire resistance requirements.
- I. Conduit runs shall contain no more than four quarter turns (90 degree bends) between pull boxes/backboards. Minimum radius of communication conduit bends shall be as follows (special long radius):

Sizes of Conduit Trade Size	Radius of Conduit Bends mm, Inches
3/4	150 (6)
1	230 (9)
1-1/4	350 (14)
1-1/2	430 (17)
2	525 (21)
2-1/2	635 (25)
3	775 (31)
3-1/2	900 (36)
4	1125 (45)

- J. Furnish and install 19 mm (3/4 inch) thick fire retardant plywood specified in Section 06 10 00, ROUGH CARPENTRY on the wall of communication closets where shown on drawings . Mount the plywood with the bottom edge 300 mm (one foot) above the finished floor.
- K. Furnish and pull wire in all empty conduits. (Sleeves through floor are exceptions) .

- - - E N D - - -

SECTION 27 51 16
PUBLIC ADDRESS AND MASS NOTIFICATION SYSTEMS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This document specifies the furnishing, installing, and testing of a complete and operating Public Address (PA) System (here-in-after referred to as "the System"), and associated equipment to be installed in the VA Medical Center here-in-after referred to as "the Facility". The system shall include, but not be limited to, headend and distribution cabinets, audio mixer, audio power amplifiers, uninterruptible power supplies (UPS), volume limiters or compressors, noise operated gain controller, telephone system paging adapter, microphone consoles, necessary combiners, traps and filters, cable and connectors, and necessary passive devices such as splitters, volume attenuators, wall, or ceiling speakers.
- B. The System shall be delivered free of engineering, manufacturing, installation, and operating defects. It shall be engineered and installed for ease of operation, maintenance, and testing.
- C. The total System shall be provided so that the installation, interfacing, integration, combining, and/or consolidation of equipment actually employed does not produce any undesirable aural effects such as signal distortions, noise pulses, glitches, audio hums, voltage or spike transients, etc.
- D. The System is defined as an Emergency Communication Life Safety System by the National Fire Protection Association (NFPA). However, its All Call Paging Function for Code One (Blue) Life Support and interconnection to the Facility's NFPA Identified Critical Care Telephone System elevates VA's classification of the System's Emergency Communication Rating To Critical Care. Therefore, its installation and operation shall adhere to all appropriate National, Government, and/or Life Safety and/or Support Codes, which ever are the more stringent for this Facility. Additionally, the original equipment manufacturer's (OEM) recommendations and guidelines shall be followed. The OEM and Contractor shall ensure that all management, sales, engineering, and installation personnel have read and understand the requirements of this specification before the System is designed, engineered, delivered, and provided.

- E. The Contracting Officer (CO) is the approving authority for all contractual and mechanical changes to the System. The Contractor is cautioned to obtain, in writing, approvals for system changes relating to the published contract specifications and drawings, from the CO or Contracting Officer's Technical Representative (COTR) before proceeding with any proposed changes.
- F. Equipment Standards and Testing:
1. All equipment and materials shall be listed, labeled or certified by UL or a nationally recognized testing laboratory where such standards have been established for the supplies, materials or equipment. Such listing and labeling shall warrant that the equipment has been tested in accordance with, and conforms to, the specified standards.
 2. The Contractor's technical submittal shall include certification documents supplied by the testing laboratory that indicates each piece of equipment furnished for this project conforms to UL standards, where such standards exist.

1.2 RELATED WORK

- A. Specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Specification Section 27 05 11, REQUIREMENTS FOR COMMUNICATIONS INSTALLATIONS.
- C. Specification Section 27 05 33, RACEWAYS AND BOXES FOR COMMUNICATIONS SYSTEMS.
- D. Specification Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW).
- E. Specification Section 26 27 26, WIRING DEVICES.
- F. Specification Section 27 05 26, GROUNDING AND BONDING FOR COMMUNICATIONS SYSTEMS.

1.3 APPLICABLE PUBLICATIONS

- A. The following publications form a part of this specification to the extent referenced. The publications are referenced in text by basic designation only. The issue in effect (including amendments, addenda, revisions, supplements, and errata) on the date the system's submittal is technically approved by VA, shall be enforced.
- B. National Fire Protection Association (NFPA):
- 70.....National Electrical Code (NEC), Article 517 and Chapter 7

- 72.....National Fire Alarm Code
- 76 Series.....Essential Electrical and Electricity Systems
for Patient and Health Care Facilities
- 77.....Recommended Practice on Static Electricity
- 99.....Standard for Health Care Facilities (Chapter 3-
4.22)
- 101.....Life Safety Code (Chapters 7.12 and/or 13)
- C. Underwriters Laboratories, Inc. (UL):
 - 65.....Standard for Wired Cabinets
 - 467.....Standard for Grounding and Bonding Equipment
 - 1449.....Standard for Transient Voltage Surge
Suppressors
- D. Electronic Industries/Telecommunications Industries Associations
(EIA/TIA):
 - 568.....Commercial Building Telecommunications Wiring
Standard
 - 569.....Commercial Building Telecommunications Pathways
and Spaces Standard
 - 606.....Administration Standard for the
Telecommunications Infrastructure of Commercial
Buildings
 - 607.....Grounding and Bonding Requirements for
Telecommunications Systems in Commercial
Buildings
 - RS160-51.....Sound Systems
 - RS-270.....Tools, Crimping, Solderless Wiring Devices
Recommended Procedures for User Certification
 - REC127-49.....Power Supplies
 - SE101-A-49.....Amplifier for Sound Equipment
 - SE103-49.....Speakers for Sound Equipment
- E. Electronic Industries Association (EIA): EIA ANSI/EIA-310-D Cabinets,
Racks, Panels and Associated Equipment.
- F. Institute of Electrical and Electronics Engineers (IEEE): IEEE C62.41
Surge Voltages in Low-Voltage AC Power Circuits.
- G. Joint Commission on Accreditation of Health Care Organization (JCAHCO):
Comprehensive Accreditation Manual for Hospitals.
- H. National Life Safety Codes
- I. United States Air Force

Technical Order

33K-1-100

Test Measurement and Diagnostic Equipment
(TMDE) Interval Reference Guide**1.4 QUALITY ASSURANCE**

- A. An authorized representative of the System OEM shall be responsible for the design, operation of the system, and its certification.
- B. The OEM shall have had experience with three or more installations of systems of comparable size and complexity with regards to type and design as specified herein. Each of these installations shall have performed satisfactorily for at least one year after final acceptance by the user. Include the names, locations and point of contact for these installations as a part of the submittal identified in Paragraph 1.5.B.C. The System Contractor shall submit verified documentation that they have been an authorized distributor and service organization for the OEM for a minimum of three years. The System Contractor shall be authorized by the OEM to certify and warranty the installed equipment. In addition, the OEM and System Contractor shall accept complete responsibility for the design, installation, certification, operation and physical support for the systems. This documentation, along with the System Contractor and OEM certifications must be provided in writing as part of the Contractor's technical submittal.
- D. The Contractor's Technicians assigned to install the System shall be factory trained, qualified and certified by the OEM for the make and model of the System to be provided. The Contractor shall provide verified documentation of current OEM certification(s) for the installer technician(s) as part of the submittal or to the COTR prior to commencing work on the system.

1.5 SUBMITTALS

- A. Provide submittals in accordance with Specification Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Documents: The submittal shall be separated into sections for each subsystem and shall contain the following:
 - 1. Title page to include:
 - a. VA Facility Name,
 - b. VA Project Name,
 - c. Contractor's name, address, and telephone (including FAX) numbers,
 - d. Date of Submittal

- e. VA Project Number
- 2. A list containing a minimum of three locations of installations of similar size and complexity as identified herein. These locations shall contain the following:
 - a. Installation Location and Name,
 - b. Owner's or User's name, address, and telephone (including FAX) numbers,
 - c. Date of Project Start and Date of Final Acceptance by Owner,
 - d. System Project Number, and
 - e. Brief (three paragraphs minimum) description of each system's function, operation, and installation.
- 3. Narrative Description of the System.
- 4.

The following is the minimum equipment required by the system:

QUANTITY	UNIT
1 ea.	Audio Monitoring Panel
1 ea.	Electrical Supervision/Trouble Panel
As required	Power Amplifiers
1 ea.	Master AC Power Distribution Panel
As required	Speakers, Wall
As required	Speakers, Ceiling
As required	Speakers, Horn
As required	Volume Control
As required	Audio Channel Selectors
1 ea.	Head end Equipment Cabinet
As required	Distribution System Cabinet
1 ea.	Installation Kit
As required	Audio, Control, Distribution Cables
As required	Connectors
As required	Volume Limiter/Compressor
As required	Noise Operated Gain Controller
As required	Telephone Paging Adapter
As-required	Audio Desk Microphone
As-required	Audio Paging Console

As-required	Audio Mixer
As-required	Separate List Containing Each Equipment Spare(s)

5. Headend and each central termination or interface distribution cabinet layout drawing, as they are to be installed.
6. Equipment technical literature detailing the electrical and technical characteristics of each item of equipment to be furnished.
7. Engineering drawings of the System, showing calculated signal levels at the headend input and output, each input and output distribution point, and signal level at each speaker.
8. List of test equipment per paragraph 1.5.C below.
9. Letter certifying that the Contractor understands the requirements of the SAMPLES paragraph 1.5.D.
10. Letter certifying that the Contractor understands the requirements of Section 3.2 concerning tests.

C. Test Equipment List:

1. The Contractor is responsible for furnishing all test equipment required to test the System in accordance with the parameters specified. Unless otherwise stated, the test equipment shall not be considered part of the System. The Contractor shall furnish test equipment of an accuracy better than the parameters to be tested.
2. The test equipment furnished by the Contractor shall have a calibration tag of an acceptable calibration service dated not more than 12 months prior to the test. As part of the submittal, a test equipment list shall be furnished that includes the make and model number of the following type of equipment as a minimum:
 - a. Spectrum Analyzer
 - b. Volt-Ohm Meter
 - c. Audio SPL (Sound Pressure Level) Meter
 - d. Sound Pressure Level Calibrator
 - e. Random Noise Generator
 - f. True RMS Voltmeter
 - g. Audio Amplifier with external speaker

D. Samples: A sample of each of the following items shall be furnished to the COTR for approval prior to installation. Returned samples may be included in the required equipment spare count.

1. Wall Outlet Box 100 mm x 100 mm x 63 mm with the following:

- a. Audio Volume Control installed
 - b. Audio Channel Selector Switch installed
 - c. Stainless Steel Cover with Volume Range and Channel Indicators installed
2. Ceiling Mounted Speaker with back box, grille and supporting grid installed.
 3. Wall Mounted Speaker with support plate installed.
 4. Horn Speaker with mount installed.
 5. UPS equipment and
 6. Electrical supervision panel.
 7. A 610mm (two foot) section of each cable to be used in the system with connectors installed and OEM cable sweep compliance and/or certification tags as specified in paragraph 2.3.F.
- E. Certifications:
1. Provide a written certification from the OEM indicating that the proposed supervisor of the installation and the proposed performer of the contract maintenance is an authorized representative of the OEM. Include the individual's exact name and address and OEM credentials in the certification.
 2. Provide a written certification from the OEM that the wiring and connection diagrams meet National Life Safety Guidelines, NFPA, NEC, UL, this specification, and JCAHCO requirements and instructions, requirements, recommendations, and guidance set forth by the OEM for the proper performance of the System as described herein. VA will not approve any submittal without this certification.
 3. After the System has been installed, pretested, and found to meet the requirements of this specification, the Contractor shall submit a letter to the COTR certifying that the System is ready for the formal proof of performance test to be accomplished in the presence of a Government representative. This certification shall be made in accordance with the test procedure paragraph 3.2.B. In the interim, the System shall be left operating to "cook in". A copy of the recorded system pretest measurements shall be submitted to the COTR with the certification.
- F. Equipment Manuals: Ten (10) working days prior to the scheduled acceptance test, the Contractor shall deliver four complete sets of commercial operation and maintenance manuals for each item of equipment furnished as part of the System to the COTR. The manuals shall detail

the theory of operation and shall include narrative descriptions, pictorial illustrations, block and schematic diagrams, and parts lists.

G. Record Wiring Diagrams:

1. Ten (10) working days prior to the scheduled acceptance test, the Contractor shall deliver four complete sets of record wiring diagrams of the System(s) to the COTR. The diagrams shall show all inputs and outputs of electronic and passive equipment correctly identified according to the markers installed on the interconnecting cables. The wiring diagrams shall show the signal levels of the aural carriers of each audio channel at the input and output of all electronic equipment, beginning and end of each distribution line, and the speakers.
3. The record wiring diagrams shall be in hard copy and two compact disk (CD) copies properly formatted to match the Facility's current version of Computer Aided Drafting (CAD) system as identified by the COTR.

H. Prior to the intermediate test, furnish a typewritten document (including illustrations) which, utilizing the test equipment and procedures specified herein, provides a detailed system testing plan for the System to meet this specification's performance standards indicated in Part 2.

I. Provide a copy to the COTR of an OEM developed training video tape presentation (reference paragraph 3.3.B) for evaluation and approval.

J. Provide a typewritten document which details the complete record program in memory for all associated station assignments.

PART 2 - PRODUCTS

2.1 EQUIPMENT AND MATERIALS

A. General:

1. All equipment to be supplied under this specification shall be new and the current model of a standard product of a OEM of record. An OEM of record shall be defined as a company whose main occupation is the manufacture for sale of the items of equipment supplied and which:
 - a. Maintains a stock of replacement parts for the item submitted.
 - b. Maintains engineering drawings, specifications, and operating manuals for the items submitted.

- c. Has published and distributed descriptive literature and equipment specifications on the items of equipment submitted at least 30 days prior to the Invitation for Bid.
2. Specifications of equipment as set forth in this document are minimum requirements, unless otherwise stated, and shall not be construed as limiting the overall quality, quantity or performance characteristics of items furnished in the System. When the Contractor furnishes an item of equipment for which there is a specification contained herein, the item of equipment shall meet or exceed the specification for that item of equipment.
3. The Contractor shall provide the COTR with written verification, that the type of wire/cable being provided is recommended and approved by the OEM. Cabling shall meet the interconnecting wiring requirements of UL 1069; and the requirements of NFPA 70 (NEC). The Contractor is responsible for providing the correct protection cable duct and/or conduit and wiring.
4. The Contractor is responsible for interfacing systems with the PA system. The Contractor shall utilize interfacing methods that are approved by the OEM and VA. At a minimum, an acceptable interfacing method requires not only a physical and mechanical connection; but also a matching of signal, voltage, and processing levels with regard to signal quality and impedance. The interface point must adhere to all standards described herein for the full separation of Critical Care and Life Safety systems. It is not acceptable to utilize the PA cable system for the control of RED signals and equipment.
5. The telephone equipment and PA speakers shall be the interface points for connection of the PA cabling from the telephone switch to the PA system telephone interface unit and systems to the PA speakers. The telephone interface unit and dual coil (or matching transformer) PA speakers, baffles, and back boxes with cover plates shall be furnished and installed by the Contractor. The Contractor shall provide and interface the RED system with the PA speaker in Day Rooms, Waiting Rooms, TV lounges, Multipurpose and/or Training Rooms, Auditoriums, Common and Reception Areas and as indicated elsewhere on the drawings. PA System signals shall not be interfaced to patient nurse call pillow speakers or nurse call systems.

6. Active component equipment shall consist of solid state components, be rated for continuous duty service, and have screw type audio connectors on barrier strips unless otherwise specified.
7. All passive distribution equipment shall meet or exceed -80 dB radiation shielding specifications and be provided with screw type audio connectors.
8. All trunk, branch, and interconnecting cables and unused equipment ports or taps shall be terminated with 600 Ohm terminating resistors designed for audio cable systems without adapters.
9. The System shall utilize microprocessor components for all signaling and programming circuits and functions. Program memory shall be non-volatile or protected from power outages for a minimum of five minutes.
10. The System shall provide continuous electrical supervision of each PA amplifier, interconnecting trunk and riser cables, and UPS to determine change of status and to assist in trouble shooting faults.
11. All distribution voltages, except for the primary AC power to the power supply circuits, shall not exceed 70.7 Audio Voltage Root Mean Squared (RMS) into a maximum of 600 Ohms balanced.
12. Color code all distribution wiring to conform to PA Industry standards, EIA/TIA, and/or this document, which ever is the more stringent. All equipment, cable duct and/or conduit, enclosures, wiring, terminals, and cables shall be clearly and permanently labeled according to and using the project record drawings, to facilitate installation and maintenance. Reference Specification Sections 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW).
13. Provide a backup battery or a UPS for the System to allow normal operation and function (as if there was no AC power failure) in the event of an AC power failure or during input power fluctuations for a minimum of 15 minutes. As an alternate solution, the telephone system UPS may be utilized to meet this requirement at the headend location, as long as this function is specifically approved by the Telephone Contractor and the COTR. The PA Contractor shall not make any attachments or connection to the telephone system until specifically directed to do so, in writing, by the COTR.
14. Plug-in connectors shall be provided to connect all equipment except speakers and distribution points. Distribution points and speakers

- shall utilize barrier terminal screw type connectors at a minimum. As an alternate, crimp type connectors installed with a ratchet type installation tool are an acceptable alternative, provided the cable dress, pairs, shielding, grounding, connections and labeling are the same as the barrier terminal strip connectors. Tape of any type, wire nuts, or solder type connections are unacceptable and will not be approved.
15. All equipment face-plates utilized in the System shall be stainless steel, anodized aluminum, or UL approved cycolac plastic that matches the décor for the areas. All faceplates shall be constructed of the same material throughout the facility with the exception of mechanical rooms or special areas as identified by the COTR.
 16. Noise filters and surge protectors shall be provided for each equipment control cabinet, headend cabinet, local, and remote amplifier locations to ensure protection from input primary AC power surges and to ensure noise glitches are not induced into low voltage data circuits.

B. System Requirements:

1. The System shall receive a minimum of three audio input channels, plus one spare input, and process them as adjacent channels to the designated outlet, control, and/or remote locations shown on the drawings. The System shall be configured to minimize cross talk, background processor noise, and other signal interference. The headend equipment shall be installed and interfaced according to the OEM headend schematic diagram for adjacent audio channel operation. Each audio input channel shall be processed as a single channel. Additionally, an audio monitoring panel shall be provided in the cabinet to test each converted audio distribution channel as described herein. The System shall continuously electronically or electrically supervise each audio power amplifier operation from the headend cabinet. A trouble panel shall be provided to check the supervisory signals, signal level, audio sound and level, and alert personnel to problems as described herein.
2. The System shall receive the specified audio input channel(s), and shall process and distribute the selected input as a single audio channel to the designated zones, sub-zones, and speaker locations shown on the drawings. Additionally, the System shall be a constant audio voltage, low volume system, with sufficient audio level to

- saturate the identified zones. The sound level and quality must be a low level faithful reproduction of the input source(s).
3. A System design where "looping" the distribution cables from zone to zone shall not be permitted. Each zone, sub-zone, floor, and/or ward distribution system shall be a "tap" design where each ceiling/wall speaker is fed from a multi-tap barrier strip (wiring blocks are acceptable) provided from lateral trunkline cable(s) located centrally on corridor(s). A system interface cabinet shall be provided in the associated signal closet for connection of lateral trunkline cable to vertical trunkline riser cable. Each vertical riser trunkline cable shall be connected to the headend output. Distribution (floor or riser) amplifiers shall be provided as required to satisfy the System's audio signal level requirements at each speaker.
 4. All system wiring shall be installed in metallic raceway unless otherwise noted. Terminal cabinets located in signal closets shall have the capability of being connected to vertical trunkline riser cables where shown on the drawings and recommended by the OEM and specifically approved, in writing, by the COTR.
 5. The Contractor shall provide the means to connect the Telephone System remote control system to the PA System Paging Control that satisfies all NFPA and Underwriters Laboratory, Inc. (UL) Critical Care and Life Safety Circuit and System separation guidelines. The Contractor is not allowed to make any connections to the Telephone System. The COTR shall arrange for the interconnection between the PA and telephone systems with the appropriate responsible parties.
 6. The Following Audio Channels are the minimum required:
 - a. Inputs: Telephone Paging Adapter.
 - b. Outputs and Distributed: All Call.
 - c. The system shall consist of:
 - 1) Audio zones: 1.
 - 2) Sub-zones: 0.
 - d. Each zone and sub-zone shall be accessible from designated hospital telephone(s) and microphone audio console(s). One console shall be located at the hospital switchboard. The following zones shall be provided, at a minimum:
 - 1) Zone One: ALL CALL - This Zone is the Code One (Blue) primary Facility wide paging media. It shall have priority over any

page in progress in any Zone and all Sub-zones. This page shall only originate from the microphone console and designated Facility telephone instruments. This page shall be heard in all speakers controlled by volume attenuators, even if the attenuator is in the "OFF" position. This Zone is to be a stand alone type without input from any additional Zone.

7. The System operation shall provide a first come / first served basis into any or all zones selected by an initial page originator; except, the ALL CALL page originated from the microphone console(s) or selected telephones, which shall have priority over ALL pages in progress or subsequently originated.
 8. The System shall be able to access individually each zone and sub-zone at the same time from designated telephone(s) and microphone(s).
 9. Headend Location: The headend equipment shall be provided, protected, and located in a cabinet located as shown on the drawings. The cabinet shall be provided so as to ensure optimum origination, reception, and control of all system signals. Each cabinet shall be provided with an internal 120 Volts Alternating Current (VAC) quad receptacle as indicated on the drawings. Each cabinet shall be provided with a minimum clearance of 610 mm from all obstructions.
 10. Interface Cabinet Location: Each cabinet shall be provided, protected, and located at the most central distribution system signal closet location to ensure optimum origination, reception, and control of all system signals. Each cabinet shall be provided with an internal active 120 VAC quad receptacle as indicated on the drawings. Each cabinet shall be installed to allow for working clearances as required per NEC Article 110, Section II, 600 Volts Nominal or Less, paragraph 110.26 and as recommended by the equipment manufacturer.
- C. System Performance:
1. Audio Input: The signal level of each audio input channel at each input point shall be a minimum of zero decibels measured (dBm), +0.10 dBm across 150 Ohms balanced.
 2. Audio Output: The audio signal level at each speaker shall be a minimum of +0.25 Watt (W) and a maximum of +5.0 W, 600 Ohms balanced impedance, on a 70.7 V audio distribution line Contractor to

- determine the proper audio signal level (top) based on speaker location and the ambient noise level in speaker coverage area.
3. The System shall meet the following minimum parameters at each speaker:
- a. Cross Modulation: -46 dB
 - b. Hum Modulation: -55 dB
 - c. Isolation (outlet-outlet): 24 dB
 - d. Impedance:
 - 1) Distribution: 600 Ohm, 70.7 Volt audio line
 - 2) Speaker: Selectable, as required
 - e. Audio Gain 10 dB minimum at mid-range measured with a sound pressure level meter (SPL)
 - f. Signal to noise (S/N) ratio 35 dB minimum
- D. Audio Level Processing: The head-end equipment shall consist of audio mixer(s), volume limiter(s) and/or compressor(s), and power amplifier(s) to process, adjust, equalize, isolate, filter, and amplify each audio channel for each zone or sub-zone in the system and distribute them into the System's distribution trunks. It is acceptable to use identified telephone system cable pairs designated for PA use or identified as spare telephone cable pairs by the Facility's Telephone System Contractor. The use of telephone cable to distribute pa signals carrying ac or dc voltage is not acceptable and will not be approved. Additionally, each remote location shall be provided with the equipment required to ensure the System designed audio channel capacity at each speaker identified on the contract drawings. The Contractor shall provide: a spare set of telephone paging modules as recommended by the OEM (as a minimum provide one spare module for each installed module); one spare audio power amplifier, one spare audio mixer, one spare audio volume limiter and/or compressor, and one spare audio automatic gain adjusting device.
- E. Microphone Paging Console: A console shall be provided in the Telephone Switchboard Room or Telephone Operator Room and at other location(s) shown on the drawings. The console shall contain visual enunciators for each zone. The visual enunciators shall display all the System zones currently being used.
- F. Speakers: Each speaker shall be wall or ceiling type equipped with a means of adjusting the speaker output level over the rated speaker range to an appropriate audio level. The Contractor shall interface the

RED system to each speaker aforementioned and as shown on the contract drawings to ensure there is a minimum of duplicated equipment in these locations.

- G. Audio Selector Switch: The Contractor shall provide audio selector switches that have the ability to select each audio signal from the zones or sub-zones and step attenuate them to reduced levels as described herein. One selector position shall be an "off" function that will completely attenuate all audio signals in nurses stations, training areas, multipurpose rooms, auditoriums, and as detailed on the contract drawings. The "off" function shall be bypassed to maximum volume when an "ALL CALL (OR CODE) PAGE" is processed by the system. The Contractor shall provide a switch containing these functions location wherever a RED speaker/system is interfaced with the PA speaker/system.

- H. Equipment Functional Characteristics:

FUNCTIONS	CHARACTERISTICS
Input Voltage	105 to 130 VAC
Power Line Frequency	60 Hertz (Hz) ± 2.0 Hz
Operating Temperature	0 to 50 degrees ($^{\circ}$) Centigrade (C)
Humidity	80 percent (%) minimum rating

2.2 HEADEND EQUIPMENT

- A. Equipment Cabinet:

1. The equipment cabinet shall be lockable, heavy gauge steel (16 GA minimum), iron phosphate treated prior to finishing, with baked on paint finish in a color selected by the COTR. It shall be floor or wall mounted with knock-out holes for cable entrance and conduit connection, provided with ventilation ports and quiet fan with non disposable air filter for equipment cooling. Two keys shall be provided for each lock and given to the COTR when the System is accepted.
2. A minimum of 381 mm of blank front rack space, for additional equipment, shall be provided. Blank panels shall be installed to cover any open or unused rack space. One blank 44 mm (1.75") high blank panel shall be installed between each item of equipment.

3. Blank panels shall be color matched to the cabinet, 3.2 mm (1/8") aluminum with vertical dimensions in increments of 44 mm (1.75") with mounting holes spaced to correspond to EIA/TIA 483 mm (19") dimensions. Single standard size blank panels shall be used to fill unused panel or rack spaces in lieu of numerous 44 mm (1.75") types.
4. AC power outlet strip(s):
 - a. A strip shall be provided with a grounded outlet for each item of equipment and a minimum of four spare AC power outlets. Each strip shall be permanently (cable ties are not acceptable) mounted inside and at the rear of each equipment cabinet. The strip shall be self-contained in a metal enclosure with a 2 meter (maximum length) connecting wire with three prong AC power plug. Extension or "pig tail" non-protected cords from the system cabinet or rack to each system wall outlet is not authorized and shall not be allowed and if discovered shall be grounds to declare the entire System unacceptable and terminate all acceptance testing.
 - b. Technical Characteristics:

Power capacity	20 Ampere (AMP), 120 VAC continuous duty
Wire gauge	Three conductor, No.12 American Wire Gauge (AWG) stranded copper

5. AC Power Line Surge Protector and Filter:
 - a. Each cabinet containing active electronic equipment shall be equipped with an AC Surge Protector and Filter. The Protector and Filter shall be housed in one single enclosure. The Protector and Filter shall provide instantaneous regulation of the AC input voltage and isolate and filter any noise present on the AC input line. It shall be cabinet mounted and the cabinet's AC power strip (two strips maximum) may be connected to it.
 - b. Technical Characteristics:

Input Voltage range	120 VAC \pm 15%
Power capacity	15 AMP, 120 VAC
Voltage output regulation	\pm 3.0%

Circuit breaker	15 AMP, may be self contained
Noise filtering	Greater than 45 dB
AC outlets	Four duplex grounded types, minimum
Response time	5.0 Nano (n) Seconds
Surge suppression	10,000 AMPS
Noise suppression:	
Common	-40 dB
Differential	-45 dB

6. Audio Monitor Panel:

- a. The panel shall be EIA/TIA standard for 483 mm (19") cabinet mounting. It shall be provided in the upper portion of the head-end equipment cabinet.
- b. Technical Characteristics:

Monitor speaker	Permanent magnet, 76 mm minimum diameter, with a monitor volume control
Audio meter	Easy to read Volume Unit (VU) or similar meter with illuminated scale and meter calibrating control.
Channel selector switch	Six position (Off, 1, 2, 3, 4, and Spare) which shall connect the monitor speaker and VU meter to the selected audio channel.

7. Trouble Annunciator Panel:

- a. A trouble annunciator panel shall be provided in the head-end cabinet, at the Telephone Operator's location, and at locations as designated on the contract drawings. The panel(s) shall be compatible with or generate electrical and/or electronic supervising signals to continuously monitor the operating condition for the System head-end audio power amplifier(s), remote power amplifier(s), and interconnecting trunks. The panels shall generate an audible and visual signal when the System's supervising system detects an amplifier or trunk-line is malfunctioning. Provide one spare panel.

b. Technical Characteristics:

Silence button or switch	Shall silence the audible signal. However, the visual signal will continue until the supervisory circuit indicates the fault is corrected.
Visual enunciators	Visually show the amplifier and/or trunk-line unit or supervisory circuit is in fault condition.

B. Microphone Paging Console:

1. A console shall be provided in the Telephone Switchboard Room or Telephone Operator, and at location(s) as shown on the drawings. The console shall contain visual enunciators for each zone which shall visually display the system zones in use by microphone(s) and designated telephone(s). Provide one spare console and microphone.
2. Technical Characteristics:
 - a. Microphone:

ON OFF switch	Required
Impedance matching device	Required, multiple tap type
Impedance	Low (150 Ohms minimum), balanced
Type	Omni-direction, dynamic type
Frequency range	60 - 10 kHz, minimum
Output audio signal level	-52.0 dB, minimum
Nominal weight	Three pounds, minimum

b. Console:

Switches or push-buttons	Required to select any single zone and/or all zones simultaneously. Additionally, a separate switch or push-button shall be provided for the ALL CALL function that immediately overrides all paging calls in every zone and sub-zone.
Mounting	Desk top or cabinet

Construction	Metal constructed as described for the head-end cabinet (may be customized designed by the Contractor if approved by the RE)
--------------	--

C. Telephone Paging Adapter:

1. The Contractor shall coordinate the installation of the paging adapter(s) designed for use with the Facility's telephone system with the Facility Telephone Contractor or local telephone company. The Contractor shall provide and install a paging adapter(s) for each zone and sub zone. The paging adapter(s) shall be accessible by dialing a telephone number provided by the Facility's Telephone Contractor. It shall be possible to monitor each audio input and output on the unit. The paging adapter shall be provided with an electrical supervision panel to provide both audio and visual trouble alarms. The adapter shall be provided as part of the headend equipment and shall be located in the Telephone Switch Room. The adapter shall provide Exclusive Paging Override of all routine paging calls in progress or being accessed to allow radio paging calls designated as Code One (Blue) functions.
2. The Telephone Paging Adapter may contain the Time Out Device identified in Paragraph 2.2.D. below. Provide one spare set of electronic cards and/or modules.
3. Technical Characteristics:

Frequency response	200 to 7.0 kHz, Minimum
Input impedance	600 Ohms, balanced or shall match the telephone company lines and VAMC telephone system.

- D. Time Out Device: A time out device shall be provided to prevent system "hang-up" due to an off-hook telephone. The device shall be able to be preset from 30 seconds to two minutes. Its function shall not interfere with or override the required all call operational capability.

E. Volume Limiter and/or Compressor:

1. Each unit shall provide a constant input to each audio power amplifier where used in the System. At a minimum, each operable and spare zone shall be equipped with a limiter/compressor installed in the headend cabinet. The unit shall compensate for the different

input volumes to provide a constant level regardless of which audio input source is used. Each audio input and output impedance shall match the telephone and microphone inputs, audio power amplifiers, and any associated equipment. It may be incorporated with the mixer identified in Paragraph 2.2.F. Provide one spare limiter and/or compressor.

2. Technical Characteristics:

Frequency response	45 - 15 kHz, \pm 1.0 dB minimum
Signal reduction ratio	10 to 1 and 5 to 1, selected
Total harmonic distortion	<1.0%
Output level	+14.0 dBm, minimum
Inputs	Two minimum, each shall be equipped with a variable front panel gain control and VU or dB meter for adjustment

F. Audio Mixer:

1. The mixer shall contain multiple input/preamplifiers providing automatic attenuation of unused or inactive inputs. Adjustable gain reduction shall be from zero to +20 Log NOM dB (0 - +6dB) at each output doubling of simultaneously active inputs. It may be incorporated with the limiter and/or compressor identified in Paragraph 2.2.E. Provide one spare mixer.

2. Technical Characteristics:

Frequency Range	20 Hz -20 kHz, minimum
Distortion	0.1%, at 1 kHz test tone
S/N	70 dB with the band pass, input volume minimum and main volume maximum

Inputs:	
Number	Four, minimum, electronically balanced
Impedance	150 - 600 Ohms balanced, selectable
Level	+15.0 dBmV, maximum

Outputs:	
Main:	
Impedance	600 and 150 Ohms, selectable, electronically balanced
Isolation	Transformer provided
Direct:	
Number	One per channel
Impedance	450 - 680 Ohms, balanced

Security cover	Required, must restrict access to all controls, but allows viewing of various lights or LEDs
Signal indicators	VU analog meter or LED for each input and output
Connectors	"XL" or "Phone Jack"

G. Audio Power Amplifier:

1. The amplifier(s) shall have a minimum of two input channels, each with bridge output circuitry and bridge or parallel single channel inputs. Each output shall be capable of providing a 70.7V constant voltage audio line. Each output channel shall be selectable between eight Ohms and 70.7V modes. The Amplifier circuit components and load shall be fully protected from input overdrive, mismatching, or shorted failure. Input controls shall be lockable and fixed. Provide one spare amplifier.
3. Technical Characteristics:

Frequency Response	45 to 15,000 Hz \pm 1.0 dB, minimum
Max Hum and Noise	80 dB Below Rated Output, minimum
Rated Output	minimum of 125% consumed by associated speakers, 35 Watts minimum required
Input for Rated Output	0.8 V for rated output
Total Harmonic Distortion (THD)	0.5 % maximum rated output.
Output Level	25 and 70.7V options on the power amplifier
Regulation	Required

Electrical supervision	Required for each amplifier to report fault indications that include: input AC power failure, PA amplifier output failure, and internal PA amplifier DC power supply failure
"On/OFF" switch with pilot light	Required
Master gain control	Required
Input level adjustment	Required, for each input
AC input circuit protection	Required, short circuit protected
Extra cooling	Required, internal variable speed fan

2.3 DISTRIBUTION EQUIPMENT

- A. Audio Power Amplifier: Refer to the Head End Amplifier characteristics in paragraph 2.2.G. for each amplifier used in the distribution system. Provide one spare amplifier in addition to the spare headend amplifier.
- B. Distribution System Cabinet: The cabinet shall have the same technical characteristics as the headend cabinet, and may be wall mounted.
- C. Noise Operated Gain Controller:
1. A controller shall be provided and installed in each Retail Sales Store and, and at other locations as indicated on the drawings at a minimum. It shall continuously sense each area's background noise level and automatically adjust the signal level output of the speakers associated in each location. Provide one spare controller.
 2. Technical Characteristics:

Frequency response	20 - 20 kHz, <u>±</u> 1.0 dB minimum
Level adjusting range	20 dB, minimum
Total harmonic distortion	<1.0%
Signal sensing control	Required, automatic

- D. Speakers:
1. Wall and/or Ceiling:
 - a. Each speaker shall be provided with a means of adjusting the output level over the rated speaker range to an appropriate audio level in the area in which it is installed. This adjustment may be accomplished through the use of taps on the matching

transformer. As a minimum, provide taps with ratings of 1/2, 1, 2, and 4 W. Provide speakers as shown on the drawings. All corridor speaker baffles shall be ceiling or wall mounted at a minimum of 10 meter intervals and shall match (or contrast with, at the direction of the RE) the color of the adjacent surfaces. Wall mounting is permissible in areas with concrete or plaster ceilings. Each ceiling speaker back box shall be flush type and attached by suitable metal bars and/or panels which shall span "T BAR" ceiling supports in lay-in ceilings. Each speaker assembly shall be equipped with a safety wire. Provide one spare speaker, baffle, back box, and supporting and/or safety mounting system for each 75 speakers or portion thereof.

b. Technical Characteristics:

Speakers	203 mm cone type, with a minimum 142 grams (5.0 ounce) ceramic or 113 grams (4.0 ounce) iron magnet (a dual voice coil/cone type with two separate line matching transformers shall be used in shared RED and PA System locations)
Frequency response	45 to 15,000 Hz, minimum
Power rating	10W minimum, RMS

2. Horn Speakers:

- a. Each horn speaker shall be provided with a means of adjusting the output level over the rated horn speaker range to an appropriate audio level in the area installed. Provide horn speakers in equipment rooms, mechanical room, supply warehouse areas, loading dock, entrance and exit areas, and at other areas as indicated on the drawings. This adjustment may be accomplished through the use of taps on the matching transformer. As a minimum, provide taps with ratings of 1/2, 1, 2, and 4 W. The speakers and mounting shall be self contained and wall mounted with flush back box at a minimum of 10 meter intervals and shall match (or contrast with, at the direction of the RE) the color of the adjacent surfaces. Provide one spare speaker, mount, and back box for each 20 speakers or portion thereof.

b. Technical Characteristics:

Speakers	100 mm cone type, with a minimum 142 grams (5.0 ounce) ceramic or 113 grams (4.0 ounce) iron magnet
Frequency response	45 to 15,000 Hz, minimum
Power rating	10W minimum, RMS

E. Program Selector Switch and Volume Attenuator:

1. Provide Program Selector Switches and Volume Attenuators as required by this specification or as shown on the drawings. Each unit shall be a standard OEM product. In areas where the RED and PA Systems use the same speaker (or one dual cone / dual line matching transformer speaker), the attenuator shall bypass the effect of volume attenuation when any PA "All-Call Page" is made. When the attenuator is bypassed, the speaker output shall automatically revert to a pre-set or maximum audio level. Provide one spare switch and attenuator unit, cover plate, appropriate knobs, and back box for every 20 units or portion thereof.
2. Technical Characteristics:

Components	Mounted on a common wall plate at the factory.
Wall cover plates	Satin stainless steel with an adjustable dial scale to indicate the amount of attenuation. Equip the scale to stop at the 360 degree point. Mark the wall plate with "PAD" Volume Control in the areas not shared with the RED System. Mark the wall plate with "RED and PA" Volume Control in the areas shared with the PA System.
Selector switches:	
Selection	Program channels for the respective speakers.
Positions	Channels 1, 2, 3, 4, Spare, and OFF.
Poles	Two for each channel.
Control knob	Required
Positive stop	Required for each position

Volume controls	Wire wound, continuous rotation type, constant impedance type with control knobs.
-----------------	---

F. Distribution System Cables: All System cables shall be certified 100% sweep tested by the Cable OEM with certification tags on each reel. The tags and a 2 foot sample shall be delivered to the COTR prior to installation. Unused partial rolls and/or reels of cable shall be given to the COTR as spare cable.

1. Microphone or Line Level:

- a. These audio cables shall be three conductor, shielded with stranded tinned copper conductors, polyethylene insulated, and FR2 rated jacket. The cable shall be able to handle the power and voltage used for the load impedance over the distance required by the system.

b. Technical Characteristics:

Wire size	20 AWG
Working Voltage	350 V
Shield coverage	100%, entire cable, as required by system design
No of Pairs	One with separate common, each color coded for phasing

2. Loudspeaker:

- a. Audio cable shall be two conductor with stranded copper conductors, non-PVC insulated and FR2 rated jacket. The cable shall be able to handle the power and voltage used for the load impedance over the distance(s) required, with not more than 5% power loss.

b. Technical Characteristics:

Wire size	16 AWG, minimum
Working Voltage	350 V
Shield	100%, as required, individual pairs or entire cable, with separate drain wire
Number of Pairs	Per system design, each pair

	color coded for phasing
--	-------------------------

3. Control:

- a. A multiple conductor connection cable shall be provided by the Contractor for each item of equipment and distribution point in the System. The cable shall be active and shall parallel the speaker cable distribution plant in each location the speaker cable follows. The cable shall be terminated on a multi-connection barrier or terminal strip at each connection point that originates from each signal closet, and terminating in each junction and/or outlet back box associated with the equipment under control. The Contractor shall provide a connection from the back box barrier strip to an RJ-45 minimum receptacle on the outlet cover plate.

b. Technical Characteristics:

Length	In 1K ft. reels
Cable	6 conductors minimum, stranded copper
Connector	Barrier strip, wiring blocks, wire wrap blocks, or as recommended by the OEM at each junction point and system outlet
Working Voltage	200 V
Wire Size	20 AWG, minimum
Shield	As recommended by the OEM

4. Class II, Low Voltage:

- a. A multiple conductor connection cable shall be provided by the Contractor for each speaker or interconnection wiring in the system. The conductors or cable shall be shielded according to the OEM's recommendations and instructions. The cable shall supply the audio power and voltage needed to operate the system equipment over the distance required.

b. Technical Characteristics:

Length	1 K ft. reels, as required
Cable	8 conductor minimum, stranded

	copper
Connector	Forked connector for each barrier strip screw type junction point
Working Voltage	200 V
Wire Size	20 AWG, minimum for interconnection - 16 AWG, minimum for distribution

G. Connectors:

1. Microphone:

- a. Input: Female configuration with 3 pins, "XLR" Type
- b. Output: Male configuration with 3 pins, "A3M" Type.

Provide a minimum of five connectors as spare connectors.

2. Line Level:

- a. Input: Female "XLR" type with 3 pins or 6.35 mm (1/4") phone receptacles provided with standard mounting plates.
- b. Output: Male "A3M" type with 3 pins or 6.35 mm (1/4") phone plug secured to the audio cable.

Provide a minimum of five connectors as spare connectors.

3. Solderless:

- a. The provided connector shall be of the Forked or Audio Spade lug type. They are required for AC power wiring; data, voice, speaker, and control cable. The connector shall be the crimp on insulated sleeve with fork type to fit the barrier or terminal strip screw terminal. The connector will be provided with the cable or wire OEM's approved crimping tool.

Provide a minimum of 100 connectors as spare connectors.

b. Technical Characteristics:

Screw Size	6 - 32
Wire Size	20 AWG

4. Barrier or Terminal Strips:

- a. Provide the respective strips as required for cabinet AC power wiring; and data, voice, speaker, and control cable. The strips shall accommodate the size and type of audio spade lugs used. Each cable or wire end shall have a forked connector or an audio spade lug which is connected to an individual screw terminal on

the barrier or terminal strip. The strips shall be secured to a cabinet, rail, panel, etc. as required. AC strip(s) shall have a clear plastic cover for protection from accidental contact with live AC Voltage.

b. Technical Characteristics:

Screw size	6 - 32
Wire size	20 AWG
Number of terminals	As Required
Protective cover	Required

Provide a minimum of 15 connectors as spare connectors.

5. Wire Wrap Strips: Wire wrap strips 1.65 mm (0.065" minimum wire wrap) are approved for voice and control wiring. Wire wrap strips shall be secured to the cabinet, rail, panel, backboard, etc., as required.

Provide a minimum of five strips as spare strips.

6. Blocks: SYSTIMAX SCS 110-type wiring blocks or equal, are approved for voice and control wiring. Wiring blocks shall be specifically designed for the size and type of wire used. Wiring blocks shall be secured to the cabinet, rail, panel, backboard, etc., as required.

Provide a minimum of five blocks as spare blocks.

- H. Cable Terminators: The audio terminator shall be a precision resistor type recommended by the OEM for this specific system design and equipment. If it is installed across barrier or terminal strip connections, each end of the resistor shall be provided with a forked type connector. If installed across wiring blocks or wire wrap terminals, each resistor end shall be provided with an OEM approved method of mounting. Soldered connections shall only be acceptable with written prior approval. Provide 10% of each type of terminator as spare. A minimum of one is required.

2.4 INSTALLATION KIT

The kit shall be provided that, at a minimum, includes all connectors and terminals, labeling systems, audio spade lugs, barrier strips, wiring blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, etc., required to accomplish a neat and secure installation. All wires shall terminate in a spade lug and barrier strip, wire wrap terminal or wiring block. Unfinished or

unlabeled wire connections will not be allowed. Turn over to the COTR all unused and partially opened installation kit boxes, coaxial cable reels, conduit, cable tray, and/or cable duct bundles, wire rolls, and physical installation hardware. This is an acceptable alternate to the individual spare equipment requirement as long as the minimum spare items are provided in this count. The following installation sub-kits are required as a minimum:

A. System Grounding:

1. The grounding kit shall include all cable and installation hardware required. All radio equipment shall be connected to earth ground via internal building wiring, according to the NEC.
2. This includes, but is not limited to:
 - a. Coaxial Cable Shields
 - b. Control Cable Shields
 - c. Data Cable Shields
 - d. Equipment Racks
 - e. Equipment Cabinets
 - f. Conduits
 - g. Cable Duct
 - h. Cable Trays
 - i. Power Panels
 - j. Connector Panels

B. Coaxial Cable: The coaxial cable kit shall include all coaxial connectors, cable tying straps, heat shrink tabbing, hangers, clamps, etc., required to accomplish a neat and secure installation.

C. Wire And Cable: The wire and cable kit shall include all connectors and terminals, audio spade lugs, barrier straps, wiring blocks, wire wrap strips, heat shrink tubing, tie wraps, solder, hangers, clamps, labels etc., required to accomplish a neat and orderly installation.

D. Conduit, Cable Duct, and Cable Tray: The kit shall include all conduit, duct, trays, junction boxes, back boxes, cover plates, feed through nipples, hangers, clamps, other hardware required to accomplish a neat and secure conduit, cable duct, and/or cable tray installation in accordance with the NEC and this specification.

E. Equipment Interface: The equipment interface kit shall include any item or quantity of equipment, cable, mounting hardware and materials needed to interface Systems and Subsystems according to the OEM requirements and this specification.

- F. Labels: The labeling kit shall include any item or quantity of labels, tools, stencils, and materials needed to completely and correctly label each subsystem according to the OEM requirements, as-installed drawings, and this specification.

PART 3 - EXECUTION

3.1 INSTALLATION

A. Product Delivery, Storage and Handling:

1. Delivery: Deliver materials to the job site in OEM's original unopened containers, clearly labeled with the OEM's name and equipment model and serial identification numbers.
2. Storage and Handling: Store and protect equipment in a manner which will preclude damage.
3. Do not install PA and/or shared telephone system cables and fire alarm systems cables in the same conduit, raceway, or cable trays. When PA and/or shared telephone system cables are installed in common signal pathways, do not mix "critical care" and "life safety" systems with other systems as specified in NEC-517 and NFPA Sections 99 and 101.
4. For VA Facilities, it is permissible to include non-powered PA and Telephone cables with nurse call cables provided each signal is directly controlled by its system and each cable is 100% shielded and bundled as described herein. The integrating of RED and PA systems shall take place ONLY at the speaker back box.
5. The Contractor shall provide suitable filters, traps, and pads for minimizing interference and for balancing the amplifiers and distribution system(s). Items used for balancing and minimizing interference shall be able to pass audio, data, and control signals in the speeds and frequency bands selected, in the directions specified, with low loss, and high isolation and with minimum delay of the system polling or subcarrier frequency(s).
6. Back up power supplies (e.g., batteries, UPS) shall be installed in the head-end and each distribution equipment cabinet or in a separate metal cabinet equipped with a hinged door and lock. Where the backup power supply is self contained in a housing, the unit shall be mounted adjacent to the respective cabinet. In all cases, backup power supplied must be permanently mounted. Each UPS and/or backup power supply shall be provided with full electrical supervision as described herein.

8. All passive equipment shall be connected according to the OEM's specifications to insure correct termination, isolation, impedance match and signal level balance at each speaker.
 9. Install speakers for each location specified herein and as identified on the contract drawings.
 10. All trunk, distribution, and interconnection lines shall be terminated in a suitable manner to facilitate future expansion of the system by adding headend equipment only.
 11. All vertical and horizontal lines shall be terminated so that subsequent expansion for additional audio channels shall require modifications of the System headend equipment only.
 12. Terminating resistors shall be used to terminate all unused branches, outlets, unused equipment ports of the System and shall be devices designed for the purpose of terminating audio cables carrying audio signals in PA systems.
- B. Conduit and Signal Ducts:
1. Conduit:
 - a. The Contractor shall employ the latest installation practices and materials. Conduit size shall be a minimum of 25 mm (1.0") in diameter. Conduit fill shall not exceed 40 percent.
 - b. All cables shall be installed in separate conduit and/or signal ducts (exception from the separate conduit requirement may be granted by the COTR, in writing, to allow the PA cables to be installed in telephone signal ducts and conduit, if requested. The mixing of nurse call and fire alarm cables and/or AC systems is not authorized and will not be approved. A
 - c. Cable runs shall be splice free between conduit junction and interface boxes and equipment locations.
 2. Signal Duct, Cable Duct, or Cable Tray:
 - a. The Contractor shall use existing signal duct, cable duct, and/or cable tray when identified and approved by the COTR.
 - b. Approved signal and/or cable duct shall be a minimum size of 100 mm x 100 mm inside diameter with removable tops or sides, as appropriate. Protective sleeves, guides, or barriers are required on all sharp corners, openings, anchors, bolts, or screw ends, junction, interface and connection points.
 - c. Approved cable tray shall be fully covered, mechanically and physically partitioned for multiple electronic circuits, and UL

certified and labeled for use with telecommunication circuits and/or systems. Width and height detentions shall be approved by the COTR.

- d. Do not pull wire or cable through any box, fitting, or enclosure where change of approved conduit, cable tray, or cable duct alignment or direction occurs. Ensure the proper bend radius is maintained for each wire or cable as specified by it's OEM.
 - e. Employ temporary guides, sheaves, rollers, and other necessary items to protect the wire or cable from excess tension or damaging bending during installation. Abrasion to wire or cable jackets is not acceptable and will not be allowed. Replace all cables whose jackets has been abraded. The discovery of any abraded and/or damaged cables during the proof of performance test shall be grounds for declaring the entire system unacceptable and the termination of the proof of performance test. Completely cover edges of wire or cable passing through holes in chassis, cabinets or racks, enclosures, pull or junction boxes, conduit, etc., with plastic or nylon grommetting.
 - f. All cable junctions and taps shall be accessible. Do not install junction blocks, multi distribution connections or other distribution equipment (active or passive) items inside signal ducts. Use a 150 mm x 150 mm x 100 mm minimum covered junction box attached to the signal duct fixed side for distribution system passive equipment installation. Ensure all equipment and connection assembly junctions are accessible.
- C. Distribution System Signal Wires and Cables:
- 1. Wires and cables shall be provided in the same manner and use like construction practices as Fire Protective Systems and other Emergency Systems that are identified and outlined in NFPA 101, Life Safety Code, Chapters 7, 12, and/or 13, NFPA 70, National Electrical Code, Chapter 7, Special Conditions. Wires and cables shall be able to withstand adverse environmental conditions without deterioration. Wires and cables shall enter each equipment enclosure, console, cabinet or rack such that all doors or access panels can be opened and closed without removal or disruption of the cables.
 - 2. Routing and Interconnection:
 - a. Wires or cables routed between consoles, cabinets, racks, and other equipment shall be installed in an approved conduit, signal

duct, cable duct, or cable tray that is secured to building structure.

- b. Wires and cables shall be insulated to prevent contact with signal or current carrying conductors and be 100% shielded. Wires or cables used in assembling consoles, panels, equipment cabinets and racks shall be formed into harnesses which are bundled and tied. Harnessed wires or cables shall be combed straight, formed, and dressed in either a vertical or horizontal relationship to equipment, controls, components or terminations.
- c. Harnesses with intertwined members are not acceptable. Each wire or cable that breaks out from a harness for connection or termination shall have been tied off at that harness or bundle point, and provided with a neatly formed service loop.
- d. Wires and cables shall be grouped according to service (i.e.: AC, grounds, signal, DC, control, etc.). DC, control and signal cables may be included with any group. Wires and cables shall be neatly formed and shall not change position in the group throughout the conduit run. Wires and cables in approved signal duct, conduit, cable ducts, or cable trays shall be neatly formed, bundled, and tied off in 600 mm to 900 mm lengths and shall not change position in the group throughout the run. Open wire-ways or open cable ladders are not authorized and will not be approved. Concealed splices are not allowed.
- e. Separate, organize, bundle, and route wires or cables to restrict channel crosstalk or feedback oscillation inside any enclosure. Looking at any enclosure from the rear (wall mounted enclosures, junction, pull or interface boxes from the front), locate AC power, DC, and speaker wires or cables on the left; coaxial, control, microphone, and line level audio and data wires or cables, on the right. This installation shall be accomplished with ties and/or fasteners that will not damage or distort the wires or cables. Limit spacing between tied off points to a maximum of 150 mm (6 inches).
- f. Distribution cables shall be installed and fastened without causing sharp bends or rubbing of the cables against sharp edges. Cables shall be fastened with hardware which will not damage or distort them.

- g. Cables shall be labeled with permanent markers at the terminals of the electronic and passive equipment and at each junction point in the System. The lettering on the cables shall correspond with the lettering on the record diagrams.
 - h. Completely test all cables after installation and replace any defective cables.
 - i. Provide system input and output polarity as recommended by the OEM. Ensure each color coded wire or cable is connected and terminated to maintain system polarity. Reflect all color codes, wire and cable terminations on the system's record drawings as required herein.
- D. Outlet Boxes, Back Boxes, and Faceplates:
- 1. Outlet Boxes: Signal, power, interface, connection, distribution, and junction boxes shall be provided as required by the system design, on-site inspection, and review of the contract drawings.
 - 2. Back Boxes: Back boxes shall be provided as directed by the OEM as required by the approved system design, on-site inspection, and review of the contract drawings.
 - 3. Face-plates (or Cover Plates): Face-plates shall be of a standard type, stainless steel, anodized aluminum, or UL approved cycloc plastic construction and provided by the Contractor for each identified system location. Connectors and jacks appearing on the faceplate shall be clearly and permanently marked.
- E. Connectors: Circuits, transmission lines and signal extensions shall have continuity, correct connection, and polarity. Polarity shall be maintained between all points in the System.
1. Wires:
- a. Wire ends shall be neatly formed and where insulation has been cut, heat shrink tubing shall be employed to secure the insulation on each wire. Tape of any type is not acceptable and will not be approved.
 - b. Audio spade lugs shall be installed on each wire (including spare or unused) end and connect to screw terminals of appropriate size barrier strips. AC barrier strips shall be provided with a protective cover to prevent accidental contact with wires carrying live AC current. Wiring blocks are approved for signal, not AC wires. Wire Nut or "Scotch Lock" connectors are not acceptable for signal wire installation.

2. Cables: Each connector shall be designed for the specific size cable being used and installed with the OEM's approved installation tool. Typical system cable connectors include; but, are not limited to: Audio spade lug, wiring block, wire-wrap, etc.
- F. AC Power: AC power wiring shall be run separately from signal cable.
- G. Grounding:
1. General:
 - a. The Contractor shall ground all installed equipment to eliminate all shock hazards and to minimize, to the maximum extent possible, all ground loops, common mode returns, noise pickup, crosstalk, etc. The number of ground connections shall be kept to a minimum. The total ground resistance shall be 0.1 Ohm or less.
 - b. Under no conditions shall the AC neutral, either in a power panel or in a receptacle outlet, be used for system control, sub-carrier or audio reference ground.
 - c. The use of conduit, signal duct, or cable trays as system or electrical ground is not acceptable and will not be permitted. These items may be used only for the dissipation of internally generated static charges [not to be confused with externally generated lightning] that may be applied or generated outside the mechanical and/or physical confines of the system to earth ground.
 2. Cabinet Bus: A common ground bus of at least #10 AWG solid copper wire shall extend throughout each equipment cabinet and be connected to the system ground. Provide a separate isolated ground connection from each equipment cabinet ground bus to the system ground. Do not tie equipment cabinet ground buses together.
 3. Equipment: Equipment shall be bonded to the cabinet ground bus with copper braid equivalent to at least #14 AWG. Self grounding equipment enclosures, racks, or cabinets that provide OEM certified functional ground connections through physical contact with installed equipment are acceptable alternates.
 4. Cable Shields: Cable shields shall be bonded to the cabinet ground bus with #14 AWG minimum stranded copper wire at only one end of the cable run. Cable shields shall be insulated from each other, faceplates, equipment racks, consoles, enclosures or cabinets; except, at the system common ground point. Coaxial and audio cables

shall have one ground connection at the source; in all cases, cable shield ground connections shall be kept to a minimum.

H. Equipment Assembly:

1. Cabinets:

- a. Each console or cabinet (here-in-after referred to as "enclosure") shall have OEM produced top, bottom and side panels; except, cabinets mounted sided by side, where only two outside panels shall be provided. Each enclosure shall be: floor or wall mounted with standard knockout holes for conduit connection or cable entrance; provide for ventilation of the equipment; have front and rear locking doors (except wall mounted cabinets that require only a front locking door); power outlet strip(s) and bulkhead connector panel(s).
- b. Rack mounted equipment shall be installed in the enclosure's equipment mounting racks. Equipment requiring frequent adjustment(s) or observation shall be mounted such that adjustment(s) can be conveniently made. Equipment shall be provided with sufficient slack cable to permit servicing by removal of the installed equipment from the front of the enclosure. Each cabinet shall be equipped with a quiet fan and nondisposable air filter.
- c. Enclosures shall be installed plumb and square. Each enclosure shall be permanently attached to the building structure and held firmly in place as approved by the COTR.
- d. Signal equipment, patch or bulkhead connector panels (i.e.: audio, data, control, etc.) shall be connected so that output from each source, device or system component shall enter the panel at the top row of jacks, beginning left to right as viewed from the front, which will be called "input". Each connection to a load, device or system component shall exit the panel at the bottom row of jacks, beginning left to right as viewed from the front, which will be called "output".

I. Labeling: Abbreviations may be used as long as they are symbol(s) or acronym(s) designated for the system or equipment by accepted industry standards and each abbreviation is used on the appropriate system and subsystem record drawings.

1. Cable and Wires (Hereinafter referred to as "Cable"): The Contractor shall install labels on all cables at each side of all connections.

- The labeling shall be permanent, with contrasting identification alpha or numeric, identifying each cable according to the system "as installed" drawings. Labels shall be installed adjacent to each mechanical connector, pull box or break in the cable run.
2. Equipment: Amplifying, control, switching, and routing equipment inputs and outputs shall be permanently labeled with contrasting plastic laminate or bake-lite material. System equipment shall be permanently labeled on the face of the unit corresponding to its source. Remote control equipment shall be labeled according to the unit or system being controlled. Equipment labels shall be permanently affixed to the equipment with metal screws, permanent mounting devices or cement.
 3. AC Power: The AC Power Panel Directory shall identify which equipment console, cabinet or enclosure each circuit breaker serves. Each equipment console, cabinet or enclosure shall be labeled to identify which AC power panel provides power to it. These labels shall be permanently affixed to the equipment with metal screws, permanent mounting devices or cement.
 4. Conduit, Cable Duct, and/or Cable Tray: The Contractor shall label all conduit, duct, and tray, including utilized Government Furnished Equipment (GFE), with permanent marking devices or spray painted stenciling a minimum every 3 meters (10 feet) identifying it as the System. Also, each enclosure shall be labeled according to this standard.

3.2 PROOF OF PERFORMANCE TESTS

1. Intermediate Testing:
 2. After completion of the installation of the headend, microphone console, telephone interface (this test may include equipment installation only pending operational interfacing with the Facility's telephone system), and two floors (maximum of three floors), and prior to any further work, this portion of the system must be pretested, inspected, and certified. Each item of installed equipment shall be checked to ensure appropriate UL and other authorized testing laboratory certification labels are affixed; NFPA, Life Safety, and JCAHCO guidelines are followed; and proper installation practices are followed. The intermediate test shall include a full operational test of the headend, microphone console, and speakers.

2. The inspection and test will be conducted by a factory certified representative and witnessed by a Government representative. The results of the inspection will be officially recorded by the Government representative and maintained on file by the COTR until completion of the entire project. The results will be compared to the Acceptance Test results. An identical inspection may be conducted between the 65 - 80 % point of the system construction phase, at the direction of the COTR.

B. Pretesting:

1. Upon completing installation of the System, the Contractor shall align, balance, and completely pretest the entire system under full operating conditions.

2. Pretesting Procedure:

- a. During the System pretest the Contractor shall verify (utilizing an approved spectrum analyzer and test equipment) that the system is fully operational and meets all the System performance requirements of this standard.
- b. The Contractor shall measure and record the aural carrier and signal distortion levels of each audio channel at each of the following points:
 - 1) Audio outputs from each audio source,
 - 2) Audio mixer inputs and outputs,
 - 3) Audio limiter/controller inputs and outputs,
 - 4) Audio power amplifier inputs and outputs,
 - 5) Headend output signal level and S/N for each audio channel specified,
 - 6) Noise operation amplifier inputs and outputs,
 - 7) Distribution amplifier inputs and outputs,
 - 8) First, middle, and last speaker of each leg,
 - 9) A random sampling of 25% of speakers,
 - 10) System supervision, and
 - 11) UPS operation.
3. A copy of the recorded system pretest measurements and written certification that the System is ready for the formal acceptance test shall be submitted to the COTR.

C. Acceptance Test:

1. After the System has been pretested and the Contractor has submitted the pretest results and the certification to the COTR, then the

- Contractor shall schedule an acceptance test date and give the COTR written notice 30 days prior to the date the acceptance test is expected to begin. The System shall be tested, in the presence of a Government Representative utilizing the approved test equipment to certify proof-of-performance and Life Safety compliance. The test shall verify that the total System meets all the requirements of this specification.
2. The notification of the acceptance test shall include the expected length of the test in hours, days.
 3. The acceptance test shall be performed on a "go-no-go" basis. Only those operator adjustments required to show proof of performance shall be allowed. The test shall demonstrate and verify that the installed System does comply with the operational and technical requirements of this specification under operating conditions. The System shall be rated as either acceptable or unacceptable at the conclusion of the test. Failure of any part of the system that precludes completion of system testing, and which cannot be repaired in four hours, shall be cause for terminating the acceptance test of the System. Repeated failures which result in a cumulative time of eight (8) hours to effect repairs shall cause the entire System to be declared unacceptable. Retesting of the entire System shall be rescheduled at the convenience of the Government.
- D. Acceptance Test Procedure:
1. Physical and Mechanical Inspection:
 - a. The Government Representative will physically tour all areas where the System and all sub-systems are completely and properly installed to ensure they are operationally ready for proof of performance testing. A system inventory including available spare parts will be taken at this time.
 - b. The System diagrams, record drawings, equipment manuals, CAD Disks, intermediate, and pretest measurements shall be formally inventoried and reviewed.
 - c. Failure of the System to meet the installation requirements of this specification shall be grounds for terminating all testing.
 2. Operational Test:
 - a. Headend Testing:

- 1) After the mechanical inspection, the headend output shall be checked to verify that it meets all performance requirements utilizing the spectrum analyzer or signal level meter.
 - 2) Following the Signal Level Test, a SPL and speaker shall be connected to the interface input and output test taps to ensure there are no visible signal distortions such as intermodulation, crossmodulation, signal beats, voice echoes, etc. on any audio channel. A special test shall be performed on the System's audio power amplifier supervising system and associated trouble indicating panel.
- b. Distribution System Testing:
- 1) Utilizing the spectrum analyzer or signal level meter, SPL and speaker (Nurse Call Pillow Speakers where applicable), the PA distribution system shall be checked at the first and last speaker in each leg to verify that the System meets all performance requirements. Also, speakers that are controlled by a wall mounted selector switch and volume control shall be functionally tested at the same time.
 - 2) Once these tests have been completed, each installed sub-system function shall be tested as a unified, functioning and fully operating system. The typical functions are: Microphone Console, Telephone Paging, any other System interface, Speaker Sound Level, Speaker Distortion Level, Battery Backup, and UPS operation.
 - 3) Individual Item Test: The COTR will select individual items of equipment for detailed proof of performance testing until 100% of the System has been tested and found to meet the contents of this specification. Each item shall meet or exceed the minimum requirements of this document.
3. Test Conclusion:
- a. At the conclusion of the Acceptance Test, the VA and the Contractor shall jointly agree to the results of the test, and reschedule testing of any deficiencies and shortages with the COTR. Any required retesting required to establish compliance with these specifications will be done at the Contractor's expense.
 - b. If the System is declared unacceptable without conditions, all rescheduled testing expenses will be born by the Contractor.

3.3 TRAINING

- A. Furnish the services of a factory-trained engineer or technician for four eight hour periods to instruct the Facility's maintenance personnel. Instruction shall include corrective and preventive maintenance of the PA equipment. Training shall be accomplished before the System can be accepted by VA. Additionally, all training schedules shall be at the convenience of the Facility's Chief Engineering Service.
- B. Furnish the services of a representative of the PA OEM, familiar with the functions and operation of the equipment, for two eight hour periods to train nursing personnel. Instructions shall be provided for staff personnel in each ward and telephone operator room, and as otherwise requested by the COTR, where new PA equipment is provided under this contract. When telephone operators and other personnel are involved, classes will be grouped. Periods of training shall be coordinated with the Chief of IRM or MAS Service for the Facility to ensure all shifts receive the required training. Each session shall include instructions utilizing a factory prepared and VA approved technical training outline and course plan.

3.4 GUARANTEE PERIOD OF SERVICE

- A. Contractor's Responsibility:
 - 1. The Contractor shall guarantee that all provided material and equipment will be free from defects, workmanship, and will remain so for a period of one year from date of final acceptance of the System by VA. The Contractor shall provide OEM's equipment warranty documents, to the COTR that certifies each item of equipment installed conforms to OEM published specifications.
 - 2. The Contractor's maintenance personnel shall have the ability to contact the Contractor and OEM for emergency maintenance and logistic assistance, remote diagnostic testing, and assistance in resolving technical problems at any time. This contact capability shall be provided by the Contractor and OEM at no additional cost to VA.
 - 3. All Contractor maintenance and supervisor personnel shall be fully qualified by the OEM and must provide copies of current and qualified OEM training certificates and OEM certification upon request.

4. Additionally, the Contractor shall accomplish the following minimum requirements during the one year guaranty period:
- B. Response Time During the One Year Guaranty Period;
1. The COTR or Facility Contracting Officer is the Contractor's reporting and contact official for PA call system trouble calls, during the guaranty period.
 2. A standard work week is considered 8:00 A.M. to 5:00 P.M., Monday through Friday exclusive of Federal Holidays.
 3. The Contractor shall respond and correct on-site trouble calls, during the standard work week to:
 - a. A routine trouble call within one working day of its report. A routine trouble is considered a trouble which causes a PA speaker to be inoperable.
 - b. An emergency trouble call within eight hours of its report. An emergency trouble is considered a trouble which causes a subsystem (ward), distribution point (or floor), or terminal cabinet to be inoperable at anytime.
 - c. A catastrophic trouble call within four hours of its report. A catastrophic trouble call is considered a headend, telephone interface, and/or microphone console failure.
 4. If a PA component failure cannot be corrected within four hours (exclusive of the standard work time limits), the Contractor shall be responsible for providing alternate PA equipment. The alternate equipment/system shall be operational within a maximum of four hours after the four hour trouble shooting time and restore the effected location operation to meet the System performance standards. If any sub-system or major system trouble cannot be corrected within one working day, the Contractor shall furnish and install compatible substitute equipment returning the System or subsystem to full operational capability, as described herein, until repairs are complete.
 5. Routine trouble calls in critical emergency health care facilities (i.e., cardiac arrest, intensive care units, etc.) shall also be deemed as an emergency trouble call. The COTR or Facility Contracting Officer shall notify the Contractor of this type of trouble call.
- C. Required On-Site Visits During the One Year Guaranty Period:

1. The Contractor shall visit, on-site, for a minimum of eight hours, once every 12 weeks, during the guaranty period, to perform system preventive maintenance, equipment cleaning, and operational adjustments to maintain the system according the descriptions identified in this document.
2. The Contractor shall arrange all Facility visits with the COTR or Facility Contracting Officer prior to performing the required maintenance visits.
3. Preventive maintenance shall be performed by the Contractor in accordance with the OEM's recommended practice and service intervals during non-busy time agreed to by the COTR or Facility Contracting Officer and Contractor.
4. The preventive maintenance schedule, functions, and reports shall be provided to and approved by the COTR or Facility Contracting Officer.
5. The Contractor shall provide the COTR or Facility Contracting Officer a type written report itemizing each deficiency found and the corrective action performed during each required visit or official reported trouble call. The Contractor shall provide the COTR with sample copies of these reports for review and approval at the beginning of the Acceptance Test. The following reports are the minimum required:
 - a. The Contractor shall provide a monthly summary all equipment and sub-systems serviced during this guarantee period to COTR or Facility Contracting Officer by the fifth working day after the end of each month. The report shall clearly and concisely describe the services rendered, parts replaced and repairs performed. The report shall prescribe anticipated future needs of the equipment and systems for preventive and predictive maintenance.
 - b. The Contractor shall maintain a separate log entry for each item of equipment and each sub-system of the System. The log shall list dates and times of all scheduled, routine, and emergency calls. Each emergency call shall be described with details of the nature and causes of emergency steps taken to rectify the situation and specific recommendations to avoid such conditions in the future.

6. The COTR or Facility Contracting Officer shall convey to the Facility Engineering Officer, copies of actual reports for evaluation.
 - a. The COTR or Facility Contracting Officer shall ensure copies of these reports are entered into the System's official acquisition documents.
 - b. The Facility Chief Engineer shall ensure copies of these reports are entered into the System's official technical as-installed documents.
- D. Work Not Included: Maintenance and repair service shall not include the performance of any work due to improper use; accidents; other vendor, contractor, or owner tampering or negligence, for which the Contractor is not directly responsible and does not control. The Contractor shall immediately notify the COTR or Facility Contracting Officer upon the discovery of these incidents, in writing. The COTR or Facility Contracting Officer will investigate all reported incidents and render official findings concerning any Contractors responsibility.

- - - END - - -

SECTION 28 05 11
REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This Section, Requirements for Electronic Safety and Security Installations, applies to all sections of Division 28.
- B. Furnish and install electronic safety and security cabling, systems, equipment and accessories in accordance with the specifications and drawings. Capacities and ratings of, cable and other items and arrangements for the specified items are shown on drawings.

1.2 MINIMUM REQUIREMENTS

- A. References to industry and trade association standards and codes are minimum installation requirement standards.
- B. Drawings and other specification sections shall govern in those instances where requirements are greater than those specified in the above standards.

1.3 QUALIFICATIONS (PRODUCTS AND SERVICES)

- A. Manufacturers Qualifications: The manufacturer shall regularly and presently produce, as one of the manufacturer's principal products, the equipment and material specified for this project, and shall have manufactured the item for at least three years.
- B. Product Qualification:
 - 1. Manufacturer's product shall have been in satisfactory operation, on three installations of similar size and type as this project, for approximately three years.
 - 2. The Government reserves the right to require the Contractor to submit a list of installations where the products have been in operation before approval.
- C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

1.4 MANUFACTURED PRODUCTS

- A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, for which replacement parts shall be available.
- B. When more than one unit of the same class of equipment is required, such units shall be the product of a single manufacturer.

C. Equipment Assemblies and Components:

1. Components of an assembled unit need not be products of the same manufacturer.
2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
3. Components shall be compatible with each other and with the total assembly for the intended service.
4. Constituent parts which are similar shall be the product of a single manufacturer.

D. Factory wiring shall be identified on the equipment being furnished and on all wiring diagrams.

E. When Factory Testing Is Specified:

1. The Government shall have the option of witnessing factory tests. The contractor shall notify the VA through the Resident Engineer a minimum of 15 working days prior to the manufacturers making the factory tests.
2. Four copies of certified test reports containing all test data shall be furnished to the Resident Engineer prior to final inspection and not more than 90 days after completion of the tests.
3. When equipment fails to meet factory test and re-inspection is required, the contractor shall be liable for all additional expenses, including expenses of the Government.

1.5 EQUIPMENT REQUIREMENTS

Where variations from the contract requirements are requested in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

1.6 EQUIPMENT PROTECTION

A. Equipment and materials shall be protected during shipment and storage against physical damage, dirt, moisture, cold and rain:

1. During installation, enclosures, equipment, controls, controllers, circuit protective devices, and other like items, shall be protected against entry of foreign matter; and be vacuum cleaned both inside and outside before testing and operating and repainting if required.

2. Damaged equipment shall be, as determined by the Resident Engineer, placed in first class operating condition or be returned to the source of supply for repair or replacement.
3. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.
4. Damaged paint on equipment and materials shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

1.7 WORK PERFORMANCE

- A. Job site safety and worker safety is the responsibility of the contractor.
- B. For work on existing stations, arrange, phase and perform work to assure electronic safety and security service for other buildings at all times. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.
- C. New work shall be installed and connected to existing work neatly and carefully. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.
- D. Coordinate location of equipment and conduit with other trades to minimize interferences.

1.8 EQUIPMENT INSTALLATION AND REQUIREMENTS

- A. Equipment location shall be as close as practical to locations shown on the drawings.
- B. Inaccessible Equipment:
 1. Where the Government determines that the Contractor has installed equipment not conveniently accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
 2. "Conveniently accessible" is defined as being capable of being reached without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.

1.9 EQUIPMENT IDENTIFICATION

- A. Install an identification sign which clearly indicates information required for use and maintenance of equipment.
- B. Nameplates shall be laminated black phenolic resin with a white core with engraved lettering, a minimum of 6 mm (1/4 inch) high. Secure nameplates with screws. Nameplates that are furnished by manufacturer as

a standard catalog item, or where other method of identification is herein specified, are exceptions.

1.10 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. The Government's approval shall be obtained for all equipment and material before delivery to the job site. Delivery, storage or installation of equipment or material which has not had prior approval will not be permitted at the job site.
- C. All submittals shall include adequate descriptive literature, catalog cuts, shop drawings and other data necessary for the Government to ascertain that the proposed equipment and materials comply with specification requirements. Catalog cuts submitted for approval shall be legible and clearly identify equipment being submitted.
- D. Submittals for individual systems and equipment assemblies which consist of more than one item or component shall be made for the system or assembly as a whole. Partial submittals will not be considered for approval.
 - 1. Mark the submittals, "SUBMITTED UNDER SECTION_____".
 - 2. Submittals shall be marked to show specification reference including the section and paragraph numbers.
 - 3. Submit each section separately.
- E. The submittals shall include the following:
 - 1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, pictures, nameplate data and test reports as required.
 - 2. Elementary and interconnection wiring diagrams for communication and signal systems, control system and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
 - 3. Parts list which shall include those replacement parts recommended by the equipment manufacturer, quantity of parts, current price and availability of each part.
- F. Manuals: Submit in accordance with Section 01 00 00, GENERAL REQUIREMENTS.
 - 1. Maintenance and Operation Manuals: Submit as required for systems and equipment specified in the technical sections. Furnish four copies, bound in hardback binders, (manufacturer's standard binders) or an approved equivalent. Furnish one complete manual as specified in the

technical section but in no case later than prior to performance of systems or equipment test, and furnish the remaining manuals prior to contract completion.

2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, equipment, building, name of Contractor, and contract number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the system or equipment.
3. Provide a "Table of Contents" and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
4. The manuals shall include:
 - a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
 - b. A control sequence describing start-up, operation, and shutdown.
 - c. Description of the function of each principal item of equipment.
 - d. Installation and maintenance instructions.
 - e. Safety precautions.
 - f. Diagrams and illustrations.
 - g. Testing methods.
 - h. Performance data.
 - i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare parts, and name of servicing organization.
 - j. Appendix; list qualified permanent servicing organizations for support of the equipment, including addresses and certified qualifications.
- G. Approvals will be based on complete submission of manuals together with shop drawings.
- H. After approval and prior to installation, furnish the Resident Engineer with one sample of each of the following:
 1. A 300 mm (12 inch) length of each type and size of wire and cable along with the tag from the coils of reels from which the samples were taken.
 2. Each type of conduit and pathway coupling, bushing and termination fitting.
 3. Conduit hangers, clamps and supports.

REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS

4. Duct sealing compound.

- I. In addition to the requirement of SUBMITTALS, the VA reserves the right to request the manufacturer to arrange for a VA representative to see typical active systems in operation, when there has been no prior experience with the manufacturer or the type of equipment being submitted.

1.11 SINGULAR NUMBER

Where any device or part of equipment is referred to in these specifications in the singular number (e.g., "the switch"), this reference shall be deemed to apply to as many such devices as are required to complete the installation as shown on the drawings.

1.12 TRAINING

- A. Training shall be provided in accordance with Article, INSTRUCTIONS, of Section 01 00 00, GENERAL REQUIREMENTS.
- B. Training shall be provided for the particular equipment or system as required in each associated specification.
- C. A training schedule shall be developed and submitted by the contractor and approved by the Resident Engineer at least 30 days prior to the planned training.

- - - E N D - - -

SECTION 28 05 33
RACEWAYS AND BOXES FOR ELECTRONIC SAFETY AND SECURITY

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the furnishing, installation, and connection of conduit, fittings, and boxes to form complete, coordinated, raceway systems. Raceways are required for all electronic safety and security cabling unless shown or specified otherwise.
- B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

1.2 RELATED WORK

- A. Bedding of conduits: Section 31 20 00, EARTH MOVING.
- B. Mounting board for communication closets: Section 06 10 00, ROUGH CARPENTRY.
- C. Sealing around penetrations to maintain the integrity of fire rated construction: Section 07 84 00, FIRESTOPPING.
- D. Fabrications for the deflection of water away from the building envelope at penetrations: Section 07 60 00, FLASHING AND SHEET METAL.
- E. Sealing around conduit penetrations through the building envelope to prevent moisture migration into the building: Section 07 92 00, JOINT SEALANTS.
- F. Identification and painting of conduit and other devices: Section 09 91 00, PAINTING.
- G. General electrical requirements and items that is common to more than one section of Division 28: Section 28 05 11, REQUIREMENTS FOR ELECTRONIC SAFETY AND SECURITY INSTALLATIONS.
- H. Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

1.3 SUBMITTALS

In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:

- A. Shop Drawings:
 - 1. Size and location of main feeders;
 - 2. Size and location of panels and pull boxes
 - 3. Layout of required conduit penetrations through structural elements.
 - 4. The specific item proposed and its area of application shall be identified on the catalog cuts.
- B. Certification: Prior to final inspection, deliver to the Resident Engineer four copies of the certification that the material is in

accordance with the drawings and specifications and has been properly installed.

1.4 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. National Fire Protection Association (NFPA):
 - 70-05.....National Electrical Code (NEC)
- C. Underwriters Laboratories, Inc. (UL):
 - 1-03.....Flexible Metal Conduit
 - 5-01.....Surface Metal Raceway and Fittings
 - 6-03.....Rigid Metal Conduit
 - 50-03.....Enclosures for Electrical Equipment
 - 360-03.....Liquid-Tight Flexible Steel Conduit
 - 467-01.....Grounding and Bonding Equipment
 - 514A-01.....Metallic Outlet Boxes
 - 514B-02.....Fittings for Cable and Conduit
 - 514C-05.....Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers
 - 651-02.....Schedule 40 and 80 Rigid PVC Conduit
 - 651A-03.....Type EB and A Rigid PVC Conduit and HDPE Conduit
 - 797-03.....Electrical Metallic Tubing
 - 1242-00.....Intermediate Metal Conduit
- D. National Electrical Manufacturers Association (NEMA):
 - TC-3-04.....PVC Fittings for Use with Rigid PVC Conduit and Tubing
 - FB1-03.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable

PART 2 - PRODUCTS

2.1 MATERIAL

- A. Conduit Size: In accordance with the NEC, but not less than 13 mm (1/2 inch) unless otherwise shown. Where permitted by the NEC, 13 mm (1/2 inch) flexible conduit may be used for tap connections to recessed lighting fixtures.
- B. Conduit:
 - 1. Rigid galvanized steel: Shall Conform to UL 6, ANSI C80.1.
 - 2. Rigid aluminum: Shall Conform to UL 6A, ANSI C80.5.

3. Rigid intermediate steel conduit (IMC): Shall Conform to UL 1242, ANSI C80.6.
4. Electrical metallic tubing (EMT): Shall Conform to UL 797, ANSI C80.3. Maximum size not to exceed 105 mm (4 inch) and shall be permitted only with cable rated 600 volts or less.
5. Flexible galvanized steel conduit: Shall Conform to UL 1.
6. Liquid-tight flexible metal conduit: Shall Conform to UL 360.
7. Direct burial plastic conduit: Shall conform to UL 651 and UL 651A, heavy wall PVC or high density polyethylene (PE).
8. Surface metal raceway: Shall Conform to UL 5.

C. Conduit Fittings:

1. Rigid steel and IMC conduit fittings:
 - a. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
 - a. Standard threaded couplings, locknuts, bushings, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
 - b. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
 - c. Bushings: Metallic insulating type, consisting of an insulating insert molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.
 - d. Erickson (union-type) and set screw type couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
 - e. Sealing fittings: Threaded cast iron type. Use continuous drain type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.
2. Rigid aluminum conduit fittings:
 - a. Standard threaded couplings, locknuts, bushings, and elbows: Malleable iron, steel or aluminum alloy materials; Zinc or cadmium plate iron or steel fittings. Aluminum fittings containing more than 0.4 percent copper are prohibited.

- b. Locknuts and bushings: As specified for rigid steel and IMC conduit.
- c. Set screw fittings: Not permitted for use with aluminum conduit.
- 3. Electrical metallic tubing fittings:
 - a. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
 - b. Only steel or malleable iron materials are acceptable.
 - c. Couplings and connectors: Concrete tight and rain tight, with connectors having insulated throats. Use gland and ring compression type couplings and connectors for conduit sizes 50 mm (2 inches) and smaller. Use set screw type couplings with four set screws each for conduit sizes over 50 mm (2 inches). Use set screws of case-hardened steel with hex head and cup point to firmly seat in wall of conduit for positive grounding.
 - d. Indent type connectors or couplings are prohibited.
 - e. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.
- 4. Flexible steel conduit fittings:
 - a. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
 - b. Clamp type, with insulated throat.
- 5. Liquid-tight flexible metal conduit fittings:
 - a. Fittings shall meet the requirements of UL 514B and ANSI/ NEMA FB1.
 - b. Only steel or malleable iron materials are acceptable.
 - c. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.
- 6. Direct burial plastic conduit fittings:
 - a. Fittings shall meet the requirements of UL 514C and NEMA TC3.
 - b. As recommended by the conduit manufacturer.
- 7. Surface metal raceway fittings: As recommended by the raceway manufacturer.
- 8. Expansion and deflection couplings:
 - a. Conform to UL 467 and UL 514B.
 - b. Accommodate, 19 mm (0.75 inch) deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.

- c. Include internal flexible metal braid sized to guarantee conduit ground continuity and fault currents in accordance with UL 467, and the NEC code tables for ground conductors.
 - d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat resistant molded rubber material with stainless steel jacket clamps.
- D. Conduit Supports:
- 1. Parts and hardware: Zinc-coat or provide equivalent corrosion protection.
 - 2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
 - 3. Multiple conduit (trapeze) hangers: Not less than 38 mm by 38 mm (1-1/2 by 1-1/2 inch), 12 gage steel, cold formed, lipped channels; with not less than 9 mm (3/8 inch) diameter steel hanger rods.
 - 4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.
- E. Outlet, Junction, and Pull Boxes:
- 1. UL-50 and UL-514A.
 - 2. Cast metal where required by the NEC or shown, and equipped with rustproof boxes.
 - 3. Sheet metal boxes: Galvanized steel, except where otherwise shown.
 - 4. Flush mounted wall or ceiling boxes shall be installed with raised covers so that front face of raised cover is flush with the wall. Surface mounted wall or ceiling boxes shall be installed with surface style flat or raised covers.
- F. Wireways: Equip with hinged covers, except where removable covers are shown.
- G. Warning Tape: Standard, 4-Mil polyethylene 76 mm (3 inch) wide tape detectable type, red with black letters, and imprinted with "CAUTION BURIED ELECTRONIC SAFETY AND SECURITY CABLE BELOW".

PART 3 - EXECUTION

3.1 PENETRATIONS

- A. Cutting or Holes:
- 1. Locate holes in advance where they are proposed in the structural sections such as ribs or beams. Obtain the approval of the Resident Engineer prior to drilling through structural sections.
 - 2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammer, impact

electric, hand or manual hammer type drills are not allowed, except where permitted by the Resident Engineer as required by limited working space.

- B. Fire Stop: Where conduits, wireways, and other electronic safety and security raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING, with rock wool fiber or silicone foam sealant only. Completely fill and seal clearances between raceways and openings with the fire stop material.
- C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal clearances around the conduit and make watertight as specified in Section 07 92 00, JOINT SEALANTS.

3.2 INSTALLATION, GENERAL

- A. Install conduit as follows:
 - 1. In complete runs before pulling in cables or wires.
 - 2. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new undamaged material.
 - 3. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
 - 4. Cut square with a hacksaw, ream, remove burrs, and draw up tight.
 - 5. Mechanically continuous.
 - 6. Independently support conduit at 8'0" on center. Do not use other supports i.e., (suspended ceilings, suspended ceiling supporting members, lighting fixtures, conduits, mechanical piping, or mechanical ducts).
 - 7. Support within 300 mm (1 foot) of changes of direction, and within 300 mm (1 foot) of each enclosure to which connected.
 - 8. Close ends of empty conduit with plugs or caps at the rough-in stage to prevent entry of debris, until wires are pulled in.
 - 9. Conduit installations under fume and vent hoods are prohibited.
 - 10. Secure conduits to cabinets, junction boxes, pull boxes and outlet boxes with bonding type locknuts. For rigid and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
 - 11. Flashing of penetrations of the roof membrane is specified in Section 07 60 00, FLASHING AND SHEET METAL.
 - 12. Do not use aluminum conduits in wet locations.

13. Unless otherwise indicated on the drawings or specified herein, all conduits shall be installed concealed within finished walls, floors and ceilings.

B. Conduit Bends:

1. Make bends with standard conduit bending machines.
2. Conduit hickey may be used for slight offsets, and for straightening stubbed out conduits.
3. Bending of conduits with a pipe tee or vise is prohibited.

C. Layout and Homeruns:

1. Install conduit with wiring, including homeruns, as shown.
2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted approved by the Resident Engineer.

D. Fire Alarm:

1. Fire alarm conduit shall be painted red (a red "top-coated" conduit from the conduit manufacturer may be used in lieu of painted conduit) in accordance with the requirements of Section 28 31 00, Fire Detection and Alarm.

3.3 CONCEALED WORK INSTALLATION

A. In Concrete:

1. Conduit: Rigid steel, IMC or EMT. Do not install EMT in concrete slabs that are in contact with soil, gravel or vapor barriers.
2. Align and run conduit in direct lines.
3. Install conduit through concrete beams only when the following occurs:
 - a. Where shown on the structural drawings.
 - b. As approved by the Resident Engineer prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
4. Installation of conduit in concrete that is less than 75 mm (3 inches) thick is prohibited.
 - a. Conduit outside diameter larger than 1/3 of the slab thickness is prohibited.
 - b. Space between conduits in slabs: Approximately six conduit diameters apart, except one conduit diameter at conduit crossings.
 - c. Install conduits approximately in the center of the slab so that there will be a minimum of 19 mm (3/4 inch) of concrete around the conduits.

5. Make couplings and connections watertight. Use thread compounds that are UL approved conductive type to insure low resistance ground continuity through the conduits. Tightening set screws with pliers is prohibited.

B. Furred or Suspended Ceilings and in Walls:

1. Conduit for conductors above 600 volts:
 - a. Rigid steel or rigid aluminum.
 - b. Aluminum conduit mixed indiscriminately with other types in the same system is prohibited.
2. Conduit for conductors 600 volts and below:
 - a. Rigid steel, IMC, rigid aluminum, or EMT. Different type conduits mixed indiscriminately in the same system is prohibited.
3. Align and run conduit parallel or perpendicular to the building lines.
4. Connect recessed lighting fixtures to conduit runs with maximum 1800 mm (six feet) of flexible metal conduit extending from a junction box to the fixture.
5. Tightening set screws with pliers is prohibited.

3.4 EXPOSED WORK INSTALLATION

- A. Unless otherwise indicated on the drawings, exposed conduit is only permitted in mechanical and electrical rooms.
- B. Conduit for conductors above 600 volts:
 1. Rigid steel or rigid aluminum.
 2. Aluminum conduit mixed indiscriminately with other types in the same system is prohibited.
- C. Conduit for Conductors 600 volts and below:
 1. Rigid steel, IMC, rigid aluminum, or EMT. Different type of conduits mixed indiscriminately in the system is prohibited.
- D. Align and run conduit parallel or perpendicular to the building lines.
- E. Install horizontal runs close to the ceiling or beams and secure with conduit straps.
- F. Support horizontal or vertical runs at not over 2400 mm (eight foot) intervals.
- G. Surface metal raceways: Use only where shown.
- H. Painting:
 1. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
 2. Paint all conduits containing cables rated over 600 volts safety orange. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (two

inch) high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 6000 mm (20 foot) intervals in between.

3.5 EXPANSION JOINTS

- A. Conduits 75 mm (3 inches) and larger, that are secured to the building structure on opposite sides of a building expansion joint, require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.
- B. Provide conduits smaller than 75 mm (3 inches) with junction boxes on both sides of the expansion joint. Connect conduits to junction boxes with sufficient slack of flexible conduit to produce 125 mm (5 inch) vertical drop midway between the ends. Flexible conduit shall have a copper green ground bonding jumper installed. In lieu of this flexible conduit, expansion and deflection couplings as specified above for 375 mm (15 inches) and larger conduits are acceptable.
- C. Install expansion and deflection couplings where shown.

3.6 CONDUIT SUPPORTS, INSTALLATION

- A. Safe working load shall not exceed 1/4 of proof test load of fastening devices.
- B. Use pipe straps or individual conduit hangers for supporting individual conduits. Maximum distance between supports is 2.5 m (8 foot) on center.
- C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and 90 kg (200 pounds). Attach each conduit with U-bolts or other approved fasteners.
- D. Support conduit independently of junction boxes, pull boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.
- E. Fasteners and Supports in Solid Masonry and Concrete:
 - 1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
 - 2. Existing Construction:
 - a. Steel expansion anchors not less than 6 mm (1/4 inch) bolt size and not less than 28 mm (1-1/8 inch) embedment.
 - b. Power set fasteners not less than 6 mm (1/4 inch) diameter with depth of penetration not less than 75 mm (3 inches).
 - c. Use vibration and shock resistant anchors and fasteners for attaching to concrete ceilings.
- F. Hollow Masonry: Toggle bolts are permitted.
- G. Bolts supported only by plaster or gypsum wallboard are not acceptable.

- H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.
- I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.
- J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.
- K. Spring steel type supports or fasteners are prohibited for all uses except: Horizontal and vertical supports/fasteners within walls.
- L. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

3.7 BOX INSTALLATION

- A. Boxes for Concealed Conduits:
 - 1. Flush mounted.
 - 2. Provide raised covers for boxes to suit the wall or ceiling, construction and finish.
- B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling in operations.
- C. Remove only knockouts as required and plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.
- D. Outlet boxes in the same wall mounted back-to-back are prohibited. A minimum 600 mm (24 inch), center-to-center lateral spacing shall be maintained between boxes.)
- E. Minimum size of outlet boxes for ground fault interrupter (GFI) receptacles is 100 mm (4 inches) square by 55 mm (2-1/8 inches) deep, with device covers for the wall material and thickness involved.
- F. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example "SIG-FA JB No. 1".
- G. On all Branch Circuit junction box covers, identify the circuits with black marker.

3.12 ELECTRONIC SAFETY AND SECURITY CONDUIT

- A. Install the electronic safety and security raceway system as shown on drawings.
- B. Minimum conduit size of 19 mm (3/4 inch), but not less than the size shown on the drawings.
- C. All conduit ends shall be equipped with insulated bushings.

- D. All 100 mm (four inch) conduits within buildings shall include pull boxes after every two 90 degree bends. Size boxes per the NEC.
- E. Vertical conduits/sleeves through closets floors shall terminate not less than 75 mm (3 inches) below the floor and not less than 75 mm (3 inches) below the ceiling of the floor below.
- F. Terminate conduit runs to/from a backboard in a closet or interstitial space at the top or bottom of the backboard. Conduits shall enter communication closets next to the wall and be flush with the backboard.
- G. Where drilling is necessary for vertical conduits, locate holes so as not to affect structural sections such as ribs or beams.
- H. All empty conduits located in communications closets or on backboards shall be sealed with a standard non-hardening duct seal compound to prevent the entrance of moisture and gases and to meet fire resistance requirements.
- I. Conduit runs shall contain no more than four quarter turns (90 degree bends) between pull boxes/backboards. Minimum radius of communication conduit bends shall be as follows (special long radius):

Sizes of Conduit Trade Size	Radius of Conduit Bends mm, Inches
$\frac{3}{4}$	150 (6)
1	230 (9)
1-1/4	350 (14)
1-1/2	430 (17)
2	525 (21)
2-1/2	635 (25)
3	775 (31)
3-1/2	900 (36)
4	1125 (45)

- J. Furnish and install 19 mm (3/4 inch) thick fire retardant plywood specified in on the wall of communication closets where shown on drawings . Mount the plywood with the bottom edge 300 mm (one foot) above the finished floor.
- K. Furnish and pull wire in all empty conduits. (Sleeves through floor are exceptions).

- - - E N D - - -

**SECTION 28 31 00
FIRE ALARM SYSTEMS**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specification includes the furnishing, installation, and connection of the fire alarm equipment to form a complete coordinated campus wide system ready for operation. It shall include, but not be limited to, alarm initiating devices, alarm notification appliances, control units, fire safety control devices, annunciators, power supplies, network connections and wiring as shown on the drawings and specified.
- B. Fire alarm systems shall comply with requirements of NFPA 72 unless variations to NFPA 72 are specifically identified within these contract documents by the following notation: "variation". The design, system layout, document submittal preparation, and supervision of installation and testing shall be provided by a technician that is certified NICET level III or a registered fire protection engineer. Persons holding a valid certification from the State of Ohio for fire alarm system design without NICET Level III or Level IV certification or Registration as a Professional Engineer in fire protection engineering are not considered qualified designers for this project. Similarly, a NICET certified technician shall be on site for the supervision and testing of the system. Factory engineers from the equipment manufacturer, thoroughly familiar and knowledgeable with all equipment utilized, shall provide additional technical support at the site as required by the Contracting Officer or his authorized representative. Installers shall have a minimum of two years experience installing fire alarm systems.
- C. Fire Alarm Signals:
 - 1. The new fire alarm devices installed under this project shall be connected to the nearest existing fire alarm control panels or termination panels
 - 2. The integrated fire alarm system shall automatically transmit alarm signals to a listed central station using a digital alarm communicator transmitter in accordance with NFPA 72.

1.2 SCOPE

- A. All existing fire alarm equipment, wiring, devices and sub-systems that are not shown to be reused shall be removed. All existing fire alarm conduit not reused shall be removed.

- B. New fire alarm devices shall be designed and installed in accordance with the specifications and drawings. Device location and wiring runs shown on the drawings are for reference only unless specifically dimensioned. Actual locations shall be in accordance with NFPA 72 and this specification.
- C. Existing fire alarm devices (bells, chimes, door holders, 120 VAC duct smoke detectors, valve tamper switches and waterflow/pressure switches, etc.) in the existing hospital shall not be altered. The existing equipment in these limited areas may be reused provided the equipment:
 - 1. Meets this specifications section.
 - 2. Is UL listed or FM approved.
 - 3. Is compatible with new equipment being installed.
 - 4. Is verified as operable through contractor testing and inspection.
 - 5. Is warranted as new by the contractor.
- D. Existing reused equipment shall be covered as new equipment under the Warranty specified herein.
- E. Basic Performance:
 - 1. Alarm and trouble signals from each building fire alarm control panel shall be digitally encoded by UL listed electronic devices onto a multiplexed communication system.
 - 2. Response time between alarm initiation (contact closure) and recording at the main fire alarm control unit (appearance on alphanumeric read out) shall not exceed five (5) seconds.
 - 3. Initiating device circuits (IDC) shall be wired Style B in accordance with NFPA 72.
 - 4. The Signaling line circuits (SLC) serving the detection and control functions in the remodeled area shall be wired Style 4 in accordance with NFPA 72. Each floor shall be wired using a dedicated SLC and shall be wired in a manner that isolates each smoke zone (Max. 22,500 sq. ft.) so that no more than one smoke zone can be lost due to a short circuit fault.
 - 5. Notification appliance circuits (NAC) shall be wired Style Y in accordance with NFPA 72.

1.3 RELATED WORK

- A. Section 01 00 00, GENERAL REQUIREMENTS: Restoration of existing surfaces.
- B. Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES: Procedures for submittals.
- C. Section 07 84 00, FIRESTOPPING: Fire proofing wall penetrations.

- D. Section 08 71 00, DOOR HARDWARE: Combination Closer-Holders.
- E. Section 09 91 00, PAINTING: Painting for equipment and existing surfaces.
- F. Section 21 13 13, WET PIPE SPRINKLERS SYSTEMS: Sprinkler systems.
- G. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements for items, which are common to other Division 16 sections.
- H. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL INSTALLATIONS: Conduits and boxes for cables/wiring.
- I. Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW): Cables/wiring.

1.4 SUBMITTALS

- A. General: Submit 4 copies and 1 reproducible in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES and Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
- B. Drawings:
 - 1. Prepare drawings using AutoCAD Release 14 software and include all contractors information. Layering shall be by VA criteria as provided by the Contracting Officer's Technical Representative (COTR). Bid drawing files on AutoCAD will be provided to the Contractor at the pre-construction meeting. The contractor shall be responsible for verifying all critical dimensions shown on the drawings provided by VA.
 - 2. Floor plans: Provide locations of all devices (with device number at each addressable device corresponding to control unit programming), appliances, panels, equipment, junction/terminal cabinets/boxes, risers, electrical power connections, individual circuits and raceway routing, system zoning; number, size, and type of raceways and conductors in each raceway; conduit fill calculations with cross section are percent fill for each type and size of conductor and raceway. Only those devices connected and incorporated into the final system shall be on these floor plans. Do not show any removed devices on the floor plans. Show all interfaces for all fire safety functions. Coordination with the reflected ceiling plans is the contractors responsibility.
 - 3. Riser diagrams: Provide, for the entire system, the number, size and type of riser raceways and conductors in each riser raceway and number of each type device per floor and zone. Show door holder interface, elevator control interface, HVAC shutdown interface, fire extinguishing system interface, and all other fire safety interfaces.

Show wiring Styles on the riser diagram for all circuits. Provide diagrams both on a per building and campus wide basis.

4. Detailed wiring diagrams: Provide for control panels, modules, power supplies, electrical power connections, auxiliary relays and annunciators showing termination identifications, size and type conductors, circuit boards, LED lamps, indicators, adjustable controls, switches, ribbon connectors, wiring harnesses, terminal strips and connectors, spare zones/circuits. Diagrams shall be drawn to a scale sufficient to show spatial relationships between components, enclosures and equipment configuration.
5. Two weeks prior to final inspection, the Contractor shall deliver to the COTR one (1) set of reproducible, as-built drawings, two blue-line copies and one (1) set of the as-built drawing computer files (using AutoCAD Release 14 or later). As-built drawings (floor plans) shall show all new and existing conduit used for the fire alarm system.

C. Manuals:

1. Submit simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals including technical data sheets for all items used in the system, power requirements, device wiring diagrams, dimensions, and information for ordering replacement parts.
 - a. Wiring diagrams shall have their terminals identified to facilitate installation, operation, expansion and maintenance.
 - b. Wiring diagrams shall indicate internal wiring for each item of equipment and the interconnections between the items of equipment.
 - c. Include complete listing of all software used and installation and operation instructions including the input/output matrix chart.
 - d. Provide a clear and concise description of operation that gives, in detail, the information required to properly operate, inspect, test and maintain the equipment and system. Provide all manufacturer's installation limitations including but not limited to circuit length limitations.
 - e. Complete listing of all digitized voice messages. The messages within the new Cares Tower shall be identical to those in the existing hospital. If changes are required to be made to the existing hospital voice messages, such reprogramming shall be included within this scope of work.

- f. Provide standby battery calculations under normal operating and alarm modes. Battery calculations shall include the magnets for holding the doors open for one minute.
 - g. Include information indicating who will provide emergency service and perform post contract maintenance.
 - h. Provide a replacement parts list with current prices. Include a list of recommended spare parts, tools, and instruments for testing and maintenance purposes.
 - i. A computerized preventive maintenance schedule for all equipment. The schedule shall be provided on disk in a computer format acceptable to the VAMC and shall describe the protocol for preventive maintenance of all equipment. The schedule shall include the required times for systematic examination, adjustment and cleaning of all equipment. A print out of the schedule shall also be provided in the manual. Provide the disk in a pocket within the manual.
 - j. Furnish manuals in 3 ring loose-leaf binder or manufacturer's standard binder.
 - k. A print out for all devices proposed on each signaling line circuit with space capacity indicated.
2. Two weeks prior to final inspection, deliver four copies of the final updated maintenance and operating manual to the COTR.
- a. The manual shall be updated to include any information necessitated by the maintenance and operating manual approval.
 - b. Complete "As installed" wiring and schematic diagrams shall be included that shows all items of equipment and their interconnecting wiring. Show all final terminal identifications.
 - c. Complete listing of all programming information, including all control events per device including an updated input/output matrix.
 - d. Certificate of Installation as required by NFPA 72 for each building. The certificate shall identify any variations from the National Fire Alarm Code.
 - e. Certificate from equipment manufacturer assuring compliance with all manufacturers installation requirements and satisfactory system operation.
- D. Certifications:
- 1. Together with the shop drawings submittal, submit the technician's NICET level III or Level IV fire alarm certification as well as certification from the control unit manufacturer that the proposed

performer of contract maintenance is an authorized representative of the major equipment manufacturer. Include in the certification the names and addresses of the proposed supervisor of installation and the proposed performer of contract maintenance. Also include the name the title of the manufacturer's representative who makes the certification.

2. Together with the shop drawing submittal, submit a certification from either the control unit manufacturer or the manufacturer of each component (e.g., smoke detector) that the components being furnished are compatible with the control unit.
3. Together with the shop drawing submittal, submit a certification from the major equipment manufacturer that the wiring and connection diagrams meet this specification, UL and NFPA 72 requirements.

1.5 WARRANTY

- A. All work performed and all material and equipment furnished under this contract shall be free from defects and shall remain so for a period of one (1) years from the date of acceptance of the entire installation by the Contracting Officer.

1.6 APPLICABLE PUBLICATION

- A. The publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. The publications are referenced in text by the basic designation only.
- B. National Fire Protection Association (NFPA):
- 70-2005.....National Electrical Code (NEC)
- 72-2002.....National Fire Alarm Code
- 90A-2002.....Installation of Air Conditioning and Ventilating
Systems
- 101-2003.....Life Safety Code
- C. Underwriters Laboratories, Inc, (UL):
- 2006.....Fire Protection Equipment Directory
- D. Factory Mutual Research Corp. (FM): Approval Guide, 2007 Edition
- E. American National Standards Institute (ANSI):
- S3.41-1996.....Audible Emergency Evacuation Signal
- F. International Code Council, International Building Code (IBC) 2003
Edition

PART 2 - PRODUCTS**2.1 EQUIPMENT AND MATERIALS, GENERAL**

- A. Existing fire alarm equipment protecting the existing hospital may be reused where devices need to be relocated and/or modified.
- B. Except as indicated in paragraph A above, all equipment and components shall be new and the manufacturer's current model. All equipment shall be tested and listed by Underwriters Laboratories, Inc. or Factory Mutual Research Corporation for use as part of a fire alarm system. The authorized representative of the manufacturer of the major equipment shall certify that the installation complies with all manufacturer's requirements and that satisfactory total system operation has been achieved.

2.2 CONDUIT, BOXES, AND WIRE

- A. Conduit shall be in accordance with Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL INSTALLATIONS and as follows:
 - 1. All new and reused conduit shall be installed in accordance with NFPA 70.
 - 2. Conduit fill shall not exceed 40 percent of interior cross sectional area.
 - 3. All new conduit shall be 19 mm (3/4 inch) minimum.
- B. Wire:
 - 1. For fire alarm components that need to be relocated, existing wiring shall be removed and new wiring installed in a conduit or raceway.
 - 2. Wiring shall be in accordance with NEC Article 760, Section 26 05 21, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES (600 VOLTS AND BELOW), and as recommended by the manufacturer of the fire alarm system. All wires shall be color-coded using the same scheme currently employed within the existing hospital. Number and size of conductors shall be as recommended by the fire alarm system manufacturer, but not less than 18 AWG for initiating device circuits and 14 AWG for notification device circuits.
 - 3. Addressable circuits and wiring used for the multiplex communication loop shall be twisted and shielded unless specifically excepted by the fire alarm equipment manufacturer in writing.
 - 4. Any fire alarm system wiring that extends outside of a building shall have additional power surge protection to protect equipment from physical damage and false signals due to lightning, voltage and current induced transients. Protection devices shall be shown on the submittal drawings and shall be UL listed or in accordance with written manufacturer's requirements.

5. All wire or cable used in underground conduits including those in concrete shall be listed for wet locations.

C. Terminal Boxes, Junction Boxes, and Cabinets:

1. Shall be galvanized steel in accordance UL requirements.
2. All new and reused boxes shall be sized and installed in accordance with NFPA 70.
3. New and existing covers shall be repainted red in accordance with Section 09 91 00, PAINTING and shall be identified with white markings as "FA" for junction boxes and as "FIRE ALARM SYSTEM" for cabinets and terminal boxes. Lettering shall be a minimum of 19 mm (3/4 inch) high.
4. Terminal boxes and cabinets shall have a volume 50 percent greater than required by the NFPA 70. Minimum sized wire shall be considered as 14 AWG for calculation purposes.
5. Terminal boxes and cabinets shall have identified pressure type terminal strips and shall be located at the base of each riser. Terminal strips shall be labeled as specified or as approved by the COTR.

D. Audio Amplifiers:

1. Audio Amplifiers shall provide a minimum of 50 Watts at either 25 or 70.7 VRMS output voltage levels.
2. Amplifiers shall be continuously supervised for operational status.
3. Amplifiers shall be configured for either single or dual channel application.
4. Each audio output circuit connection shall be configurable for Style X.
5. A minimum of 50% spare output capacity shall be available for each amplifier.

E. Tone Generator(s):

1. Tone Generator(s) shall be capable of providing a distinctive three-pulse temporal pattern firm alarm signal as well as a slow whoop.
2. Tone Generator(s) shall be continuously supervised for operational status.

2.3 ALARM NOTIFICATION APPLIANCES

A. Speakers:

1. Shall operate on either 26 VRMS or 70.7 VRMS with field selectable output taps from 0.5 to 2.0W and originally installed at the one-half watt tap. Speakers shall provide a minimum sound output of 80 dBA at ten feet with the one-half watt tap.
2. Frequency response shall be a minimum of 400 HZ to 4000 HZ.

3. 100 mm (4 inches) or 200 mm (8 inches) cone type speakers ceiling mounted with which colored baffles in areas with suspended ceilings and wall mounted in areas without ceilings.

B. Strobes:

1. Xenon flash tube minimum 15 candela with the minimum candela rating as indicated on the bid drawings with a flash rate of 1 HZ. Strobes shall be synchronized where required by the National Fire Alarm Code (NFPA 72).
2. Backplate shall be red with 13 mm (1/2 inch) permanent red letters. Lettering to read "Fire", be oriented on the wall or ceiling properly, and be visible from all viewing directions.
3. Each strobe circuit shall have a minimum of twenty (20) percent spare capacity.
4. Strobes may be combined with the audible notification appliances specified herein.

C. Fire Alarm Horns (For use in General Evacuation in areas where normal voice evacuation instructions cannot be heard such as Mechanical Rooms and Audiometric booths):

1. Shall be electric, utilizing solid state electronic technology operating on a nominal 24 VDC.
2. Shall be a minimum nominal rating of 80 dBA at ten feet.
3. Mount on removable adapter plates on conduit boxes.
4. Horns located outdoors shall be of weatherproof type with metal housing and protective grille.
5. Each horn circuit shall have a minimum of twenty (20) percent spare capacity.

2.4 ALARM INITIATING DEVICES

A. Manual Fire Alarm Stations:

1. Shall be non-breakglass, address reporting type.
2. Station front shall be constructed of a durable material such as cast or extruded metal or high impact plastic. Stations shall be semi-flush type.
3. Stations shall be of single action pull down type with suitable operating instructions provided on front in raised or depressed letters, and clearly labeled "FIRE".
4. Operating handles shall be constructed of a durable material. On operation, and lever shall lock in alarm position and remain so until reset. A key shall be required to gain front access for resetting, or conducting tests and drills.

5. Unless otherwise specified, all exposed parts shall be red in color and have a smooth, hard, durable finish.
6. Stations identified as key operated only (in Psychiatric care areas) shall have a single standardized lock and key separate from the control equipment.

B. Smoke Detectors:

1. Smoke detectors shall be UL listed for use with the fire alarm control unit being furnished.
2. Smoke detectors shall be addressable type complying with applicable UL Standards for system type detectors. Smoke detectors shall be installed in accordance with the manufacturer's recommendation and NFPA 72.
3. Detectors shall have an indication lamp to denote an alarm condition. Provide remote indicator lamps and identification plates where detectors are concealed from view. Locate the remote indicator lamps and identification plates flush mounted on walls so they can be observed from a normal standing position.
4. All spot type and duct type detectors installed shall be of the photoelectric type.
5. Photoelectric detectors shall be factory calibrated and readily field adjustable. The sensitivity of any photoelectric detector shall be factory set at 3.0 plus or minus 0.25 percent obscuration per foot.
6. Detectors shall provide a visual trouble indication if they drift out of sensitivity range or fail internal diagnostics. Detectors shall also provide visual indication of sensitivity level upon testing. Detectors, along with the fire alarm control units shall be UL listed for testing the sensitivity of the detectors.

C. Water Flow and Pressure Switches:

1. Wet pipe water flow switches and dry pipe alarm pressure switches for sprinkler systems shall be connected to the fire alarm system by way of an address reporting interface device.
2. All new water flow switches shall be of a single manufacturer and series and non-accumulative retard type. See Section 21 13 13, WET PIPE SPRINKLERS SYSTEMS for new switches added. Connect all switches shown on the approved shop drawings.
3. All new switches shall have an alarm transmission delay time that is conveniently adjustable from 0 to 60 seconds. Initial settings shall be 30-45 seconds. Timing shall be recorded and documented during testing.

2.5 SUPERVISORY DEVICES

A. Duct Smoke Detectors:

1. Duct smoke detectors shall be provided and connected by way of an address reporting interface device. Detectors shall be provided with an approved duct housing mounted exterior to the duct, and shall have perforated sampling tubes extending across the full width of the duct (wall to wall). Detector placement shall be such that there is uniform airflow in the cross section of the duct,
2. Interlocking with fans shall be provided in accordance with NFPA 90A and as specified hereinafter under Part 3.2, "TYPICAL OPERATION".
3. Provide remote indicate lamps, key test stations and identification nameplates (e.g. "DUCT SMOKE DETECTOR AHU-X") for all duct detectors. Locate key test stations in plain view on walls or ceilings so that they can be observed and operated from a normal standing position.

B. Sprinkler and Standpipe System Supervisory Switches:

1. Each sprinkler system water supply control valve, riser valve or zone control valve, and each standpipe system riser control valve shall be equipped with a supervisory switch. Standpipe hose valves, and test and drain valves shall not be equipped with supervisory switches.
2. Valve supervisory switches shall be connected to the fire alarm system by way of address reporting interface device. See Section 21 13 13, WET PIPE SPRINKLERS SYSTEMS for new switches to be added. Connect tamper switches for all control valves shown on the approved shop drawings.
3. The mechanism shall be contained in a weatherproof die-cast aluminum housing that shall provide a 19 mm (3/4 inch) tapped conduit entrance and incorporate the necessary facilities for attachment to the valves.
4. The entire installed assembly shall be tamper-proof and arranged to cause a switch operation if the housing cover is removed or if the unit is removed from its mounting.
5. Where dry-pipe sprinkler systems are installed, high and low air pressure switches shall be provided and monitored by way of an address reporting interface devices.
6. Fire pump running, power failure and phase reversal supervisory alarms shall be provided and monitored by way of address reporting interface devices for the fire pump located on the Basement level of the existing hospital.

2.6 ADDRESS REPORTING INTERFACE DEVICE

- A. Shall have unique addresses that reports directly to the building fire alarm panel.
- B. Shall be configurable to monitor normally open or normally closed devices for both alarm and trouble conditions.
- C. Shall have terminal designations clearly differentiating between the circuit to which they are reporting from and the device that they are monitoring.
- D. Shall be UL listed for fire alarm use and compatibility with the panel to which they are connected.
- E. Shall be mounted in weatherproof housings if mounted exterior to a building.

2.7 SMOKE BARRIER DOOR CONTROL

- A. Electromagnetic Door Holders:
 - 1. New Door Holders shall be standard wall mounted electromagnetic type. In locations where doors do not come in contact with the wall when in the full open position, an extension post shall be added to the door bracket.
 - 2. Operation shall be by 24 volt DC supplied from a battery located at the fire alarm control unit. Door holders shall be coordinated as to voltage, ampere drain, and voltage drop with the battery, battery charger, wiring and fire alarm system for operation as specified.
- B. A maximum of twelve door holders shall be provided for each circuit. Door holders shall be wired to allow releasing doors by smoke zone.
- C. Door holder control circuits shall be electrically supervised.
- D. Smoke detectors shall not be incorporated as an integral part of door holders.

2.8 UTILITY LOCKS AND KEYS:

- A. Provide spare and replacement parts as follows:
 - 1. Manual pull stations - 2
 - 2. Key operated manual pull stations - 2
 - 3. Heat detectors - 2 or each type
 - 4. Fire alarm strobes - 2
 - 5. Fire alarm bells - 2
 - 6. Fire alarm speakers - 2
 - 7. Smoke detectors - 5
 - 8. Duct smoke detectors with all appurtenances - 1
 - 9. Sprinkler system water flow switch - 1 of each size
 - 10. Sprinkler system water pressure switch - 1 of each type
 - 11. Sprinkler valve tamper switch - 1 of each type

- 12. Control equipment utility locksets - 2
- 13. Control equipment keys - 5
- 14. Key operated manual pull station keys - 10
- B. Keys for key-operated manual pull stations shall be provided 30 days prior to actual installation.
- C. Spare and replacement parts shall be in original packaging and submitted to the COTR.
- D. Furnish and install a storage cabinet of sufficient size and suitable for storing space equipment. Doors shall include a pad locking device. Padlock to be provided by the VA. Location of cabinet to be determined by the COTR.
- E. Provide to the VA, all hardware, software, programming tools, license and documentation necessary to permanently modify the fire alarm system on site. The minimum level of modification includes addition and deletion of devices, circuits, zones and changes to system description, system operation, and digitized evacuation and instructional messages.

2.9 ACCEPTABLE MANUFACTURERS

- A. In order to provide full network interoperability with the existing campus fire alarm system and to minimize the number and type of spare components needed to maintain and integrated fire alarm system, the fire alarm system and components shall be manufactured in accordance with equipment obtainable under the GSA Schedule "84 - TOTAL SOLUTIONS FOR LAW ENFORCEMENT, SECURITY, FACILITIES MANAGEMENT, FIRE, RESCUE, CLOTHING, MARINE CRAFT AND EMERGENCY/DISASTER RESPON" (sic) category 246-25, "Fire Alarm Systems." Equipment provided under this contract shall be fully compatible with the existing fire alarm. The contractor will be afforded the opportunity to purchase at GSA pre-competed pricing via a "transfer of purchase authority to a contractor for direct resale to the government." The Authority will be provided by the Contracting Officer for the Contractor's use in obtaining and providing equipment and services for this contract. Additional information can be obtained from JoAnne Offill, 816-574-2482, Joanne.offill@gsa.gov as indicated on the GSA website at <http://www.gsaelibrary.gsa.gov>.
- B. Acceptable Manufacturer:
 - 1. Notifier/American Fire Technologies, Inc; Contract #GS-07F-0638N.
 - 2. Notifier/Hiller Systems Incorporated; Contract #GS-07F-0402M.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Installation shall be in accordance with NFPA 70, 72, 90A, and 101 as shown on the drawings, and as recommended by the major equipment

manufacturer. Fire alarm wiring shall be installed in conduit. B.

All new conduits, junction boxes, conduit supports and hangers shall be concealed in finished areas and may be exposed in unfinished areas. All existing accessible fire alarm conduit not reused shall be removed.

- B. All new or reused exposed conduit shall be painted in accordance with Section 09 91 00, PAINTING to match surrounding finished areas and red in unfinished areas.
- C. Existing devices that are reused shall be properly mounted and installed. Where devices are installed on existing shallow backboxes, extension rings of the same material, color and texture of the new fire alarm devices shall be used. Mounting surfaces shall be cut and patched in accordance with Section 01 00 00, GENERAL REQUIREMENTS, Restoration, and be re-painted in accordance with Section 09 91 00, PAINTING as necessary to match existing.
- D. All fire detection and alarm system devices, control units and remote annunciators shall be flush mounted when located in finished areas and may be surface mounted when located in unfinished areas. Exact locations to be approved by the COTR.
- E. Speakers shall be ceiling mounted and fully recessed in areas with suspended ceilings. Speakers shall be wall mounted and recessed in finished areas without suspended ceilings. Speakers may be surface mounted in unfinished areas.
- F. Strobes shall be flush wall mounted 2,000 mm (80 inches) above the floor or 150 mm (6 inches) below ceiling, whichever is lower. Locate and mount to maintain a minimum 900 mm (36 inches) clearance from side obstructions.
- G. Manual pull stations shall be installed not less than 1050 mm (42 inches) or more than 1200 mm (48 inches) from finished floor to bottom of device and within 1500 mm (60 inches) of a stairway or an exit door.
- H. Where possible, locate water flow and pressure switches a minimum of 300 mm (12 inches) from a fitting that changes the direction of the flow and a minimum of 900 mm (36 inches) from a valve.
- I. Mount valve tamper switches so as not to interfere with the normal operation of the valve and adjust to operate within two revolutions toward the closed position of the valve control, or when the stem has moved no more than one-fifth of the distance from its normal position.
- J. Connect flow and tamper switches installed under Section 21 13 13, WET PIPE SPRINKLERS SYSTEMS.

3.2 TYPICAL OPERATION

- A. Activation of any manual pull station, water flow or pressure switch, heat detector, or smoke detector shall cause the following operations to occur:
 - 1. Operate the emergency voice communication system throughout the existing hospital and the new CARES Tower. For sprinkler protected buildings, flash strobes continuously only in the zone of alarm.
 - 2. Continuously sound a temporal patten general alarm and flash all strobes in the smoke zone in alarm until reset at the local fire alarm control unit.
 - 3. Release only the magnetic door holders on the floor from which alarm was initiated after the alert signal.
 - 4. Transmit a separate alarm signal, via the main fire alarm control unit to the fire department.
 - 5. Unlock the electrically locked exit doors within the zone of alarm.
- B. Heat detectors in elevator machine rooms shall, in addition to the above functions, disconnect all power to all elevators served by that machine room after a time delay. The time delay shall be programmed within the fire alarm system programming and be equal to the time it takes for the car to travel from the highest to the lowest level, plus 10 seconds.
- C. Smoke detectors in the primary elevator lobbies of the new CARES Tower shall, in addition to the above functions, return all elevators in the bank to the secondary floor.
- D. Smoke detectors in the remaining elevator lobbies or elevator machine rooms in addition to the above functions, shall return all elevators in the bank to the primary floor.
- E. Operation of a smoke detector at a corridor door used for automatic door closing shall also release only the magnetic door holders on that floor. Operation of a smoke detector at a shutter used for automatic closing shall so release only the shutters on that floor.
- F. Operation of duct smoke detectors shall cause a system supervisory condition and shut down the ventilation system and close the associated smoke dampers as appropriate.
- G. Operation of any sprinkler or standpipe system valve supervisory switch, high/low air pressure switch, or fire pump alarm switch shall cause a system supervisory condition.

3.3 TESTS

- A. Provide the service of a NICET Level III, competent, factory-trained engineer or technician authorized by the manufacturer of the fire alarm equipment to technically supervise and participate during all of the

adjustments and tests for the system. Persons having a certificate issued by the State of Ohio Fire Marshall's Office but not having a NICET Level III certification shall not be deemed qualified to technically supervise and participate during all of the adjustments and tests for the system. Make all adjustments and tests in the presence of the COTR.

- B. When the systems have been completed and prior to the scheduling of the final inspection, furnish testing equipment and perform the following tests in the presence of the COTR. When any defects are detected, make repairs or install replacement components, and repeat the tests until such time that the complete fire alarm systems meets all contract requirements. After the system has passed the initial test and been approved by the COTR, the contractor may request a final inspection.
1. Before energizing the cables and wires, check for correct connections and test for short circuits, ground faults, continuity, and insulation.
 2. Test the insulation on all installed cable and wiring by standard methods as recommended by the equipment manufacturer.
 3. Run water through all flow switches. Check time delay on water flow switches. Submit a report listing all water flow switch operations and their retard time in seconds.
 4. Open each alarm initiating and notification circuit to see if trouble signal actuates.
 5. Ground each alarm initiation and notification circuit and verify response of trouble signals.

3.4 FINAL INSPECTION AND ACCEPTANCE

- A. Prior to final acceptance a minimum 30 day "burn-in" period shall be provide. The purpose shall be to allow equipment to stabilize and potential installation and software problems and equipment malfunctions to be identified and corrected. During this diagnostic period, all system operations and malfunctions shall be recorded. Final acceptance will be made upon successful completion of the "burn-in" period and where the last 14 days is without a system or equipment malfunction.
- B. At the final inspection a factory trained representative of the manufacturer of the major equipment shall repeat the tests in Article 3.3 TESTS and those required by NFPA 72. In addition the representative shall demonstrate that the systems function properly in every respect. The demonstration shall be made in the presence of a VA representative.

3.5 INSTRUCTION

- A. Furnish the services of a competent instructor for instructing personnel in the programming requirements necessary for system expansion. Such programming shall include addition or deletion of devices, zones, indicating circuits and printer/display text.

PART 4 - SCHEDULE**4.1 LOCATION OF VOICE MESSAGES**

Upon receipt of an alarm signal from the building fire alarm system, the voice communication system shall automatically transmit a 3 second tone alert and a pre-recorded fire alarm message throughout the building.

- - - E N D - - -

**SECTION 31 20 00
EARTH MOVING**

PART 1 - GENERAL

1.1 DESCRIPTION OF WORK:

- A. This section specifies the requirements for furnishing all equipment, materials, labor, tools, and techniques for earthwork including, but not limited to, the following:
1. Site preparation.
 2. Excavation.
 3. Underpinning.
 4. Filling and backfilling.
 5. Grading.
 6. Soil Disposal.
 7. Clean Up.

1.2 DEFINITIONS:

- A. Unsuitable Materials:
1. Fills: Topsoil; frozen materials; construction materials and materials subject to decomposition; clods of clay and stones larger than 75 mm (3 inches); organic material, including silts, which are unstable; and inorganic materials, including silts, too wet to be stable and any material with a liquid limit and plasticity index exceeding 40 and 15 respectively. Unsatisfactory soils also include satisfactory soils not maintained within 2 percent of optimum moisture content at time of compaction, as defined by ASTM D 698 AASHTO T 99.
 2. Existing Subgrade (Except Footing Subgrade): Same materials as 1.2.A.1, that are not capable of direct support of slabs, pavement, and similar items with possible exception of improvement by compaction, proofrolling, or similar methods.
 3. Existing Subgrade (Footings Only): Same as paragraph 1, but no fill or backfill. If materials differ from reference borings and design requirements, excavate to acceptable strata subject to Resident Engineer's approval.
- B. Building Earthwork: Earthwork operations required in area enclosed by a line located 1500 mm (5 feet) outside of principal building perimeter. It also includes earthwork required for auxiliary structures and buildings.
- C. Trench Earthwork: Trenchwork required for utility lines.

- D. Site Earthwork: Earthwork operations required in area outside of a line located 1500 mm (5 feet) outside of principal building perimeter and within new construction area with exceptions noted above.
- E. Degree of compaction: Degree of compaction is expressed as a percentage of maximum density obtained by laboratory test procedure. This percentage of maximum density is obtained through use of data provided from results of field test procedures presented in ASTM D1556, ASTM D2167, and ASTM D2922.
- F. Fill: Satisfactory soil materials used to raise existing grades. In the Construction Documents, the term "fill" means fill or backfill as appropriate.
- G. Backfill: Soil materials or controlled low strength material used to fill an excavation.
- H. Unauthorized excavation: Removal of materials beyond indicated sub-grade elevations or indicated lines and dimensions without written authorization by the Resident Engineer. No payment will be made for unauthorized excavation or remedial work required to correct unauthorized excavation.
- I. Authorized additional excavation: Removal of additional material authorized by the Resident Engineer based on the determination by the Government's soils testing agency that unsuitable bearing materials are encountered at required sub-grade elevations. Removal of unsuitable material and its replacement as directed will be paid on basis of Conditions of the Contract relative to changes in work.
- J. Subgrade: The undisturbed earth or the compacted soil layer immediately below granular sub-base, drainage fill, or topsoil materials.
- K. Structure: Buildings, foundations, slabs, tanks, curbs, mechanical and electrical appurtenances, or other man-made stationary features constructed above or below the ground surface.
- L. Borrow: Satisfactory soil imported from off-site for use as fill or backfill.
- M. Drainage course: Layer supporting slab-on-grade used to minimize capillary flow of pore water.
- N. Bedding course: Layer placed over the excavated sub-grade in a trench before laying pipe. Bedding course shall extend up to the springline of the pipe.
- O. Sub-base Course: Layer placed between the sub-grade and base course for asphalt paving or layer placed between the sub-grade and a concrete pavement or walk.

- P. Utilities include on-site underground pipes, conduits, ducts, and cables as well as underground services within buildings.
- Q. Debris: Debris includes all materials located within the designated work area not covered in the other definitions and shall include but not be limited to items like vehicles, equipment, appliances, building materials or remains thereof, tires, any solid or liquid chemicals or products stored or found in containers or spilled on the ground.
- R. Contaminated soils: Soil that contains contaminants as defined and determined by the Resident Engineer or the Government's testing agency.

1.3 RELATED WORK:

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Safety requirements: FAR Clause 52.236-13, ACCIDENT PREVENTION.
- C. Protection of existing utilities, fire protection services, existing equipment, roads, and pavements: Section 01 00 00, GENERAL REQUIREMENTS.
- D. Subsurface Investigation: Section 01 00 00, GENERAL REQUIREMENTS, Article, PHYSICAL DATA.
- E. Erosion Control: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, and Section 32 90 00, PLANTING.
- F. Site preparation: Section 31 23 19, DEWATERING, and Section 02 41 00, DEMOLITION.
- G. Foundation system requirements: Section 31 63 26, DRILLED CAISSONS.
- H. Paving sub-grade requirements: Section 32 12 16, ASPHALT PAVING.

1.4 CLASSIFICATION OF EXCAVATION:

- A. Classified Excavation: Removal and disposal of all material except that material not defined as Rock.
- B. Rock Excavation:
 - 1. Trenches and Pits: Removal and disposal of solid, homogenous, interlocking crystalline material with firmly cemented, laminated, or foliated masses or conglomerate deposits that cannot be excavated with a late-model, track-mounted hydraulic excavator; equipped with a 1050 mm (42 inch) wide, short-tip-radius rock bucket; rated at not less than 103 kW (138 hp) flywheel power with bucket-curling force of not less than 125 kN (28,090 lbf) and stick-crowd force of not less than 84.5 kN (19,000 lbf); measured according to SAE J-1179. Trenches in excess of 3000 mm (10 feet) wide and pits in excess of 9000 mm (30 feet) in either length or width are classified as open excavation.
 - 2. Open Excavation: Removal and disposal of solid, homogenous, interlocking crystalline material firmly cemented, laminated, or foliated masses or conglomerate deposits that cannot be dislodged and

- excavated with a late-model, track-mounted loader; rated at not less than 157 kW (210 hp) flywheel power and developing a minimum of 216 kN (48,510 lbf) breakout force; measured according to SAE J-732.
3. Other types of materials classified as rock are unstratified masses, conglomerated deposits and boulders of rock material exceeding 0.76 m³ (1 cubic yard) for open excavation, or 0.57 m³ (3/4 cubic yard) for footing and trench excavation that cannot be removed by rock excavating equipment equivalent to the above in size and performance ratings, without systematic drilling, ram hammering, ripping, or blasting, when permitted.

1.5 MEASUREMENT AND PAYMENT FOR ROCK EXCAVATION:

- A. Measurement: Cross section and measure uncovered and separated materials, and compute quantities by Registered Professional Land Surveyor or Registered Civil Engineer, specified in Section 01 00 00, GENERAL REQUIREMENTS. Do not measure quantities beyond the following limits:
1. 600 mm (24 inches) from outside face of concrete work for which forms are required, except for footings.
 2. 300 mm (12 inches) from outside of perimeter of formed footings.
 3. 150 mm (6 inches) below bottom of pipe and not more than pipe diameter plus 600 mm (24 inches) in width for pipe trenches.
 4. From outside dimensions of concrete work for which no forms are required (trenches, conduits, and similar items not requiring forms).
- B. Payment for Differing Site Conditions: When rock excavation, as classified, is encountered, contract price and time will be adjusted in accordance with Articles, DIFFERING SITE CONDITIONS, CHANGES and CHANGES-SUPPLEMENT of the GENERAL CONDITIONS as applicable.

1.6 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Rock Excavation Report:
1. Certification of rock quantities excavated.
 2. Excavation method.
 3. Labor.
 4. Equipment.
 5. Land Surveyor's or Civil Engineer's name and official registration stamp.
 6. Plot plan showing elevation.
- C. Furnish to Resident Engineer:

1. Contactor shall furnish resumes with all personnel involved in the project including Project Manager, Superintendent, and on-site Engineer. Project Manager and Superintendent should have at least 3 years of experience on projects of similar size.
2. Soil samples.
 - a. Classification in accordance with ASTM D2487 for each on-site or borrow soil material proposed for fill, backfill, engineered fill, or structural fill.
 - b. Laboratory compaction curve in accordance with ASTM D 1557 AASHTO T 99 for each on site or borrow soil material proposed for fill, backfill, engineered fill, or structural fill.
 - c. Test reports for compliance with ASTM D 2940 requirements for subbase material.
 - d. Pre-excavation photographs and videotape in the vicinity of the existing structures to document existing site features, including surfaces finishes, cracks, or other structural blemishes that might be misconstrued as damage caused by earthwork operations.
 - e. The Contractor shall submit a scale plan daily that defines the location, limits, and depths of the area excavated.

1.7 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Association of State Highway and Transportation Officials (AASHTO):
 - T99-01 (2004).....Moisture-Density Relations of Soils Using a 2.5 kg (5.5 lb) Rammer and a 305 mm (12 inch) Drop
 - T180-01 (2004).....Moisture-Density Relations of Soils using a 4.54 kg (10 lb) Rammer and a 457 mm (18 inch) Drop
- C. American Society for Testing and Materials (ASTM):
 - D448-03a.....Standard Classification for Sizes of Aggregate for Road and Bridge Construction
 - D698-00ae1.....Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft. lbf/ft³ (600 kN m/m³))
 - D1556-00.....Standard Test Method for Density and Unit Weight of Soil in Place by the Sand-Cone Method
 - D1557-02e1.....Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft³ (2700 kN m/m³))

D2167-94 (2001).....Standard Test Method for Density and Unit Weight
of Soil in Place by the Rubber Balloon Method
D2487-06.....Standard Classification of Soil for Engineering
Purposes (Unified Soil Classification System)
D2922-05.....Standard Test Methods for Density of Soil and
Soil-Aggregate in Place by Nuclear Methods
(Shallow Depth)
D2940-03.....Standard Specifications for Graded Aggregate
Material for Bases or Subbases for Highways or
Airports

D. Society of Automotive Engineers (SAE):

J732-92.....Specification Definitions - Loaders
J1179-02.....Hydraulic Excavator and Backhoe Digging Forces

PART 2 - PRODUCTS

2.1 MATERIALS:

- A. General: Provide borrow soil material when sufficient satisfactory soil materials are not available from excavations.
- B. Fills: Material in compliance with ASTM D2487 Soil Classification Groups GW, GP, GM, SW, SP, SM, SC, and ML, or any combination of these groups; free of rock or gravel larger than 75 mm (3 inches) in any dimension, debris, waste, frozen materials, vegetation, and other deleterious matter. Material approved from on site or off site sources having a minimum dry density of 1760 kg/m³ (110 pcf), a maximum Plasticity Index of 15, and a maximum Liquid Limit of 40.
- C. Engineered Fill: Naturally or artificially graded mixture of compliance with ASTM D2487 Soil Classification Groups GW, GP, GM, SW, SP, SM, SC, and ML, or any combination of these groups, or as approved by the Engineer or material with at least 90 percent passing a 37.5-mm (1 1/2-inch) sieve and not more than 12 percent passing a 75-µm (No. 200) sieve, per ASTM D2940;.
- D. Bedding: Naturally or artificially graded mixture of natural or crushed gravel, crushed stone, and natural or crushed sand; ASTM D2940; except with 100 percent passing a 25 mm (1 inch) sieve and not more than 8 percent passing a 75-µm (No. 200) sieve.
- E. Drainage Fill: Washed, narrowly graded mixture of crushed stone, or crushed or uncrushed gravel; ASTM D448; coarse-aggregate grading Size 57; with 100 percent passing a 37.5 mm (1 1/2-inch) sieve and 0 to 5 percent passing a 2.36 mm (No. 8) sieve.
- F. Granular Fill:

1. Under concrete slab, crushed stone or gravel graded from 25 mm (1 inch) to 4.75 mm (No. 4), per ASTM D 2940.
2. Bedding for sanitary and storm sewer pipe, crushed stone or gravel graded from 13 mm (1/2 inch) to 4.75 mm (No 4), per ASTM D 2940.

PART 3 - EXECUTION

3.1 SITE PREPARATION:

- A. Clearing: Clear within limits of earthwork operations as shown. Work includes removal of trees, shrubs, fences, foundations, incidental structures, paving, debris, trash, and other obstructions. Remove materials from Medical Center.
- B. Grubbing: Remove stumps and roots 75 mm (3 inch) and larger diameter. Undisturbed sound stumps, roots up to 75 mm (3 inch) diameter, and nonperishable solid objects a minimum of 900 mm (3 feet) below subgrade or finished embankment may be left.
- C. Trees and Shrubs: Trees and shrubs, not shown for removal, may be removed from areas within 4500 mm (15 feet) of new construction and 2250 mm (7.5 feet) of utility lines when removal is approved in advance by Resident Engineer. Remove materials from Medical Center. Trees and shrubs, shown to be transplanted, shall be dug with a ball of earth and burlapped in accordance with latest issue of, "American Standard for Nursery Stock" of the American Association of Nurserymen, Inc. Transplant trees and shrubs to a permanent or temporary position within two hours after digging. Maintain trees and shrubs held in temporary locations by watering as necessary and feeding semiannually with liquid fertilizer with a minimum analysis of 5 percent nitrogen, 10 percent phosphorus, and 5 percent potash. Maintain plants moved to permanent positions as specified for plants in temporary locations until conclusion of contract. Immediately repair damage to existing trees and shrubs by trimming, cleaning and painting damaged areas, including roots, in accordance with standard industry horticultural practice for the geographic area and plant species. Do not store building materials closer to trees and shrubs, that are to remain, than farthest extension of their limbs.
- D. Stripping Topsoil: Strip topsoil from within limits of earthwork operations as specified. Topsoil shall be a fertile, friable, natural topsoil of loamy character and characteristic of locality. Topsoil shall be capable of growing healthy horticultural crops of grasses. Stockpile topsoil and protect as directed by Resident Engineer. Eliminate foreign materials, such as weeds, roots, stones, subsoil, frozen clods, and similar foreign materials larger than 0.014 m³ (1/2 cubic foot) in

volume, from soil as it is stockpiled. Retain topsoil on station. Remove foreign materials larger than 50 mm (2 inches) in any dimension from topsoil used in final grading. Topsoil work, such as stripping, stockpiling, and similar topsoil work shall not, under any circumstances, be carried out when soil is wet so that the composition of the soil will be destroyed.

- E. Concrete Slabs and Paving: Score deeply or saw cut to insure a neat, straight cut, sections of existing concrete slabs and paving to be removed where excavation or trenching occurs. Extend pavement section to be removed a minimum of 300 mm (12 inches) on each side of widest part of trench excavation and insure final score lines are approximately parallel unless otherwise indicated. Remove material from Medical Center Property.
- F. Lines and Grades: Registered Professional Land Surveyor or Registered Civil Engineer, specified in Section 01 00 00, GENERAL REQUIREMENTS, shall establish lines and grades.
 - 1. Grades shall conform to elevations indicated on plans within the tolerances herein specified. Generally grades shall be established to provide a smooth surface, free from irregular surface changes. Grading shall comply with compaction requirements and grade cross sections, lines, and elevations indicated. Where spot grades are indicated the grade shall be established based on interpolation of the elevations between the spot grades while maintaining appropriate transition at structures and paving and uninterrupted drainage flow into inlets.
 - 2. Locations of existing and proposed elevations indicated on plans, except spot elevations, are from a site survey that measured spot elevations and subsequently generated existing contours and spot elevations. Proposed spot elevations and contour lines have been developed utilizing the existing conditions survey and developed contour lines and may be approximate. Contractor is responsible to notify Resident Engineer of any differences between existing elevations shown on plans and those encountered on site by Surveyor/Engineer described above. Notify Resident Engineer of any differences between existing or constructed grades, as compared to those shown on the plans.
 - 3. Subsequent to establishment of lines and grades, Contractor will be responsible for any additional cut and/or fill required to ensure that site is graded to conform to elevations indicated on plans.
 - 4. Finish grading is specified in Section 32 90 00, PLANTING.

- G. Disposal: All materials removed from the property shall be disposed of at a legally approved site, for the specific materials, and all removals shall be in accordance with all applicable Federal, State and local regulations. No burning of materials is permitted onsite.

3.2 EXCAVATION:

- A. Shoring, Sheeting and Bracing: Shore, brace, or slope, its angle of repose or to an angle considered acceptable by the Resident Engineer, banks of excavations to protect workmen, banks, adjacent paving, structures, and utilities.
1. Design of the temporary support of excavation system is the responsibility of the Contractor.
 2. Construction of the support of excavation system shall not interfere with the permanent structure and may begin only after a review by the Resident Engineer.
 3. Extend shoring and bracing to a minimum of 1500 mm (5 feet) below the bottom of excavation. Shore excavations that are carried below elevations of adjacent existing foundations.
 4. If bearing material of any foundation is disturbed by excavating, improper shoring or removal of existing or temporary shoring, placing of backfill, and similar operations, the Contractor shall underpin the existing foundation, per Section 3.3 provide a concrete fill support as directed by Resident Engineer, at no additional cost to the Government. Do not remove shoring until permanent work in excavation has been inspected and approved by Resident Engineer.
- B. Excavation Drainage: Operate pumping equipment, and/or provide other materials, means and equipment as required to keep excavation free of water and subgrade dry, firm, and undisturbed until approval of permanent work has been received from Resident Engineer. Approval by the Resident Engineer is also required before placement of the permanent work on all subgrades.
- C. Subgrade Protection: Protect subgrades from softening, undermining, washout, or damage by rain or water accumulation. Reroute surface water runoff from excavated areas and not allow water to accumulate in excavations. Do not use excavated trenches as temporary drainage ditches. When subgrade for foundations has been disturbed by water, remove disturbed material to firm undisturbed material after water is brought under control. Replace disturbed subgrade in trenches with concrete or material approved by the Resident Engineer.

D. Proofrolling:

1. After rough grade has been established in cut areas and prior to placement of fill in fill areas under building and pavements, proofroll exposed subgrade with a fully loaded dump truck to check for pockets of soft material.
2. Proofrolling shall consist of at least two complete passes with one pass being in a direction perpendicular to preceding one. Remove any areas that deflect, rut, or pump excessively during proofrolling, or that fail to consolidate after successive passes to suitable soils and replaced with compacted fill. Maintain subgrade until succeeding operation has been accomplished.

E. Building Earthwork:

1. Excavation shall be accomplished as required by drawings and specifications.
2. Excavate foundation excavations to solid undisturbed subgrade.
3. Remove loose or soft materials to a solid bottom.
4. Fill excess cut under footings or foundations with 25 MPa (3000 psi) concrete poured separately from the footings.
5. Do not tamp earth for backfilling in footing bottoms, except as specified.
6. Slope grades to direct water away from excavations and to prevent ponding.

F. Trench Earthwork:

1. Utility trenches (except sanitary and storm sewer):
 - a. Excavate to a width as necessary for sheeting and bracing and proper performance of the work.
 - b. Grade bottom of trenches with bell holes scooped out to provide a uniform bearing.
 - c. Support piping on undisturbed earth unless a mechanical support is shown.
 - d. Length of open trench in advance of piping laying shall not be greater than is authorized by Resident Engineer.
2. Sanitary and storm sewer trenches:
 - a. Trench width below a point 150 mm (6 inches) above top of pipe shall be 600 mm (24 inches) maximum for pipe up to and including 300 mm (12 inches) diameter, and four-thirds diameter of pipe plus 200 mm (8 inches) for pipe larger than 300 mm (12 inches). Width of trench above that level shall be as necessary for sheeting and bracing and proper performance of the work.
 - b. Bed bottom quadrant of pipe on undisturbed soil or granular fill.

- 1) Undisturbed: Bell holes shall be no larger than necessary for jointing. Backfill up to a point 300 mm (12 inches) above top of pipe shall be clean earth placed and tamped by hand.
 - 2) Granular Fill: Depth of fill shall be a minimum of 75 mm (3 inches) plus one sixth of pipe diameter below pipe to 300 mm (12 inches) above top of pipe. Place and tamp fill material by hand.
 - c. Place and compact as specified remainder of backfill using acceptable excavated materials. Do not use unsuitable materials.
 - d. Use granular fill for bedding where rock or rocky materials are excavated.
- G. Site Earthwork: Earth excavation includes excavating pavements and obstructions visible on surface; underground structures, utilities, and other items indicated to be removed; together with soil, boulders, and other materials not classified as rock or unauthorized excavation. Excavation shall be accomplished as required by drawings and specifications. Excavate to indicated elevations and dimensions within a tolerance of plus or minus 25 mm (1 inch). Extend excavations a sufficient distance from structures for placing and removing concrete formwork, for installing services and other construction, complying with OSHA requirements, and for inspections. Remove subgrade materials that are determined by Resident Engineer as unsuitable, and replace with acceptable material. If there is a question as to whether material is unsuitable or not, the contractor shall obtain samples of the material, under the direction of the Resident Engineer, and the materials shall be examined by an independent testing laboratory for soil classification to determine whether it is unsuitable or not. When unsuitable material is encountered and removed, contract price and time will be adjusted in accordance with FAR Clauses, 52.236-2 "DIFFERING SITE CONDITIONS" and 52.243-4 "CHANGES" as applicable. Adjustments to be based on volume in cut section only.
1. Site Grading:
 - a. Provide a smooth transition between adjacent existing grades and new grades.
 - b. Cut out soft spots, fill low spots, and trim high spots to comply with required surface tolerances.
 - c. Slope grades to direct water away from buildings and to prevent ponds from forming where not designed. Finish subgrades to required elevations within the following tolerances:

- 1) Lawn or Unpaved Areas: Plus or minus 25 mm (1 inch).
- 2) Walks: Plus or minus 25 mm (1 inch).
- 3) Pavements: Plus or minus 13 mm (1 inch).
- d. Grading Inside Building Lines: Finish subgrade to a tolerance of 13 mm (1/2 inch) when tested with a 3000 mm (10 foot) straightedge.

3.3 UNDERPINNING:

- A. Design of the underpinning system is the responsibility of the Contractor and is subject to review and approval by the Resident Engineer. Underpinning of existing building foundations, as indicated on structural drawings, or where excavation undermines existing foundations, shall be accomplished in the following manner:
1. Make general excavation for new construction, where new foundations are to be below existing foundations, to elevation of new foundations (or sized stone subbase), maintaining a 45 degree sloped berm.
 2. For underpinning pits, underpin existing wall foundations by excavating 1200 mm (4 feet) wide pits to depth shown on drawings skipping 3 sections at any one time so as to maintain support for wall at all times.
 3. Underpin intervening sections one at a time; no adjacent sections shall be underpinned until concrete in adjacent sections shall have reached 20 MPa (2500 psi) strength and have been dry packed with non-shrink grout to obtain positive bearing. Sheet and brace underpinning pits if soil will not stand on a vertical cut during this operation, or as required for safety of workmen. Repack any voids behind sheeting to prevent sloughing which could cause settlement of existing foundations. Contractor performing this portion of work shall have been prequalified by Resident Engineer as having previously performed successfully this type of work or will demonstrate his capability for successfully performing this work. It shall be sole responsibility of the Contractor to guard against objectionable movement or settlement and to preserve integrity of existing structures.
 4. The tip elevation of the underpinning pits shall be a minimum of 900 mm (3 feet) below the adjacent excavation elevation.
 5. Subgrades at the tip of the underpinning pit shall be clean, dry, and free of debris and shall be observed by the Resident Engineer prior to concrete placement.

6. Concrete shall not be free fall greater than 3000 mm (10 feet) into the pit.

3.4 FILLING AND BACKFILLING:

- A. General: Do not fill or backfill until all debris, water, unsatisfactory soil materials, obstructions, and deleterious materials have been removed from excavation. For fill and backfill, use excavated materials and borrow meeting the criteria specified herein, as applicable. Borrow will be supplied at no additional cost to the Government. Do not use unsuitable excavated materials. Do not backfill until foundation walls have been completed above grade and adequately braced, waterproofing or dampproofing applied, foundation drainage, and pipes coming in contact with backfill have been installed and work inspected and approved by Resident Engineer.
- B. Placing: Place materials in horizontal layers not exceeding 200 mm (8 inches) in loose depth for material compacted by heavy compaction equipment, and not more than 100 mm (4 inches) in loose depth for material compacted by hand-operated tampers and then compacted. Place backfill and fill materials evenly on all sides of structures to required elevations, and uniformly along the full length of each structure. Place no material on surfaces that are muddy, frozen, or contain frost.
- C. Compaction: Compact with approved tamping rollers, sheepsfoot rollers, pneumatic tired rollers, steel wheeled rollers, vibrator compactors, or other approved equipment (hand or mechanized) well suited to soil being compacted. Do not operate mechanized vibratory compaction equipment within 3000 mm (10 feet) of new or existing building walls without prior approval of Resident Engineer. Moisten or aerate material as necessary to provide moisture content that will readily facilitate obtaining specified compaction with equipment used. Compact soil to not less than the following percentages of maximum dry density, according to ASTM D698 or ASTM D1557 as specified below:
 1. Fills, Embankments, and Backfill
 - a. Under proposed structures, building slabs, steps, and paved areas, scarify and recompact top 300 mm (12 inches) of existing subgrade and each layer of backfill or fill material in accordance with AASHTO T99/ASTM D698, 95 percent.
 - b. Curbs, curbs and gutters, ASTM D698, 95 percent.
 - c. Under Sidewalks, scarify and recompact top 150 mm (6 inches) below subgrade and compact each layer of backfill or fill material in accordance with AASHTO T99, ASTM D698, 95 percent.

- d. Landscaped areas, top 400 mm (16 inches), ASTM D698 85 percent.
- e. Landscaped areas, below 400 mm (16 inches) of finished grade, ASTM D698, 90 percent.
- 2. Natural Ground (Cut or Existing)
 - a. Under building slabs, steps and paved areas, top 150 mm (6 inches), ASTM D698, 95 percent.
 - b. Curbs, curbs and gutters, top 150 mm (6 inches), ASTM D698, 95 percent.
 - c. Under sidewalks, top 150 mm (6 inches), ASTM D698, 95 percent.

3.5 GRADING:

- A. General: Uniformly grade the areas within the limits of this section, including adjacent transition areas. Smooth the finished surface within specified tolerance. Provide uniform levels or slopes between points where elevations are indicated, or between such points and existing finished grades. Provide a smooth transition between abrupt changes in slope.
- B. Cut rough or sloping rock to level beds for foundations. In pipe spaces or other unfinished areas, fill low spots and level off with coarse sand or fine gravel.
- C. Slope backfill outside building away from building walls for a minimum distance of 1800 mm (6 feet).
- D. Finish grade earth floors in pipe basements as shown to a level, uniform slope and leave clean.
- E. Finished grade shall be at least 150 mm (6 inches) below bottom line of window or other building wall openings unless greater depth is shown.
- F. Place crushed stone or gravel fill under concrete slabs on grade, tamped, and leveled. Thickness of fill shall be 150 mm (6 inches) unless otherwise shown.
- G. Finish subgrade in a condition acceptable to Resident Engineer at least one day in advance of paving operations. Maintain finished subgrade in a smooth and compacted condition until succeeding operation has been accomplished. Scarify, compact, and grade subgrade prior to further construction when approved compacted subgrade is disturbed by Contractor's subsequent operations or adverse weather.
- H. Grading for Paved Areas: Provide final grades for both subgrade and base course to +/- 6 mm (0.25 inches) of indicated grades.

3.6 DISPOSAL OF UNSUITABLE AND EXCESS EXCAVATED MATERIAL:

- A. Disposal: Remove surplus satisfactory soil and waste material, including unsatisfactory soil, trash, and debris, and legally dispose of it off Medical Center property.

1. Remove waste material, including unsatisfactory soil, trash, and debris, and legally dispose of it off Medical Center property.
- C. Place excess excavated materials suitable for fill and/or backfill on site where directed.
- D. Remove from site and dispose of any excess excavated materials after all fill and backfill operations have been completed.
- E. Segregate all excavated contaminated soil designated by the Resident Engineer from all other excavated soils, and stockpile on site on two 0.15 mm (6 mil) polyethylene sheets with a polyethylene cover. A designated area shall be selected for this purpose. Dispose of excavated contaminated material in accordance with State and Local requirements.

3.7 CLEAN UP:

Upon completion of earthwork operations, clean areas within contract limits, remove tools, and equipment. Provide site clear, clean, free of debris, and suitable for subsequent construction operations. Remove all debris, rubbish, and excess material from Medical Center Property.

----- E N D -----

**SECTION 31 23 19
DEWATERING**

PART 1 - GENERAL

1.1 DESCRIPTION:

This section specifies performance of dewatering required to lower and control ground water table levels and hydrostatic pressures to permit excavation, backfill, and construction to be performed in the dry.

Control of surface water shall be considered as part of the work under this specification.

1.2 SUMMARY:

- A. The work to be completed by the Contractor includes, but is not necessarily limited to the following:
 - 1. Implementation of the Erosion and Sedimentation Control Plan.
 - 2. Dewater excavations, including seepage and precipitation.
- B. The Contractor shall be responsible for providing all materials, equipment, labor, and services necessary for care of water and erosion control. Excavation work shall not begin before the Erosion and Sedimentation Control Plan is in place.

1.3 REQUIREMENT:

- A. Dewatering system shall be of sufficient size and capacity necessary to lower and maintain ground water table to an elevation at least 300 mm (1 foot) below lowest foundation subgrade or bottom of pipe trench and to allow material to be excavated in a reasonably dry condition. Materials to be removed shall be sufficiently dry to permit excavation to grades shown and to stabilize excavation slopes where sheeting is not required. Operate dewatering system continuously until backfill work has been completed.
- B. Reduce hydrostatic head below any excavation to the extent that water level in the construction area is a minimum of 300 mm (1 foot) below prevailing excavation surface.
- C. Prevent loss of fines, seepage, boils, quick conditions or softening of foundation strata.
- D. Maintain stability of sides and bottom of excavation.
- E. Construction operations are performed in the dry.
- F. Control of surface and subsurface water is part of dewatering requirements. Maintain adequate control so that:
 - 1. The stability of excavated and constructed slopes are not adversely affected by saturated soil, including water entering prepared subbase

and subgrades where underlying materials are not free draining or are subject to swelling or freeze-thaw action.

2. Erosion is controlled.
3. Flooding of excavations or damage to structures does not occur.
4. Surface water drains away from excavations.
5. Excavations are protected from becoming wet from surface water, or insure excavations are dry before additional work is undertaken.

G. Permitting Requirements: The contractor shall comply with and obtain the required State and County permits where the work is performed.

1.4 RELATED WORK:

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Submittal requirements as specified in Section 01 33 23 SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- C. Protection of existing utilities, fire protection services, existing equipment, roads, and pavements: Section 01 00 00, GENERAL REQUIREMENTS.
- D. Subsurface Investigation: Section 01 00 00, GENERAL REQUIREMENTS, Article 1.11, PHYSICAL DATA.
- E. Excavation, backfilling, site grade and utilities: Section 31 20 00, EARTH MOVING.

1.5 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Drawings and Design Data:
 1. Submit drawings and data showing the method to be employed in dewatering excavated areas 30 days before commencement of excavation.
 2. Material shall include: location, depth and size of wellpoints, headers, sumps, ditches, size and location of discharge lines, capacities of pumps and standby units, and detailed description of dewatering methods to be employed to convey the water from site to adequate disposal.
 3. Include a written report outlining control procedures to be adopted if dewatering problem arises.
 4. Materials submitted shall be in a format acceptable for inclusion in required permit applications to any and all regulatory agencies for which permits for discharge water from the dewatering system are required due to the discharge reaching regulated bodies of water.
- C. Inspection Reports.
- D. All required permits.

PART 2 - PRODUCTS (NOT USED)**PART 3 - EXECUTION****3.1 INSTALLATION:**

- A. Install a dewatering system to lower and control ground surface water in order to permit excavation, construction of structure, and placement of backfill materials to be performed under dry conditions. Make the dewatering system adequate to pre-drain the water-bearing strata above and below the bottom of structure foundations, utilities and other excavations.
- B. In addition, reduce hydrostatic pressure head in water-bearing strata below structure foundations, utility lines, and other excavations, to extent that water levels in construction area are a minimum of 300 mm (1 foot) below prevailing excavation surface at all times.

3.2 OPERATION:

- A. Prior to any excavation below the ground water table, place system into operation to lower water table as required and operate it continuously 24 hours a day, 7 days a week until utilities and structures have been satisfactorily constructed, which includes the placement of backfill materials and dewatering is no longer required.
- B. Place an adequate weight of backfill material to prevent buoyancy prior to discontinuing operation of the system.

3.3 WATER DISPOSAL:

- A. Dispose of water removed from the excavations in such a manner as:
 - 1. Will not endanger portions of work under construction or completed.
 - 2. Will cause no inconvenience to Government or to others working near site.
 - 3. Will comply with the stipulations of required permits for disposal of water.
 - 4. Will Control Runoff: The Contractor shall be responsible for control of runoff in all work areas including but not limited to: excavations, access roads, parking areas, laydown, and staging areas. The Contractor shall provide, operate, and maintain all ditches, basins, sumps, culverts, site grading, and pumping facilities to divert, collect, and remove all water from the work areas. All water shall be removed from the immediate work areas and shall be disposed of in accordance with applicable permits.
- B. Excavation Dewatering:
 - 1. The Contractor shall be responsible for providing all facilities required to divert, collect, control, and remove water from all construction work areas and excavations.

2. Drainage features shall have sufficient capacity to avoid flooding of work areas.
 3. Drainage features shall be so arranged and altered as required to avoid degradation of the final excavated surface(s).
 4. The Contractor shall utilize all necessary erosion and sediment control measures as described herein to avoid construction related degradation of the natural water quality.
- C. Dewatering equipment shall be provided to remove and dispose of all surface and ground water entering excavations, trenches, or other parts of the work during construction. Each excavation shall be kept dry during subgrade preparation and continually thereafter until the structure to be built, or the pipe to be installed therein, is completed to the extent that no damage from hydrostatic pressure, flotation, or other cause will result.

3.4 STANDBY EQUIPMENT:

Provide complete standby equipment, installed and available for immediate operation, as may be required to adequately maintain dewatering on a continuous basis and in the event that all or any part of the system may become inadequate or fail.

3.5 CORRECTIVE ACTION:

If dewatering requirements are not satisfied due to inadequacy or failure of the dewatering system (loosening of the foundation strata, or instability of slopes, or damage to foundations or structures), perform work necessary for reinstatement of foundation soil and damaged structure resulting from such inadequacy or failure by Contractor, at no additional cost to Government.

3.6 DAMAGES:

Immediately repair damages to adjacent facilities caused by dewatering operations.

3.7 REMOVAL:

Insure compliance with all conditions of regulating permits and provide such information to the Resident Engineer. Obtain written approval from Resident Engineer before discontinuing operation of dewatering system.

----- E N D -----

**SECTION 31 63 26
DRILLED CAISSONS**

PART 1 - GENERAL

1.1 DESCRIPTION

This section specifies excavation and concrete required for construction of foundation caissons.

1.2 DEFINITIONS

Satisfactory Bearing Material: Clay (15,000 psf) and is assumed to occur at bottom of caisson elevations shown.

1.3 RELATED WORK

- A. Materials testing and inspection during construction: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Safety requirements and blasting operations: Section 00 72 00, GENERAL CONDITIONS, Article, ACCIDENT PREVENTION.
- C. Subsurface Investigation: Section 01 00 00, GENERAL REQUIREMENTS, Article, PHYSICAL DATA
- D. Earth excavation: Section 31 20 00, EARTH MOVING.
- E. Concrete, including materials and mixes: Section 03 30 00, CAST-IN-PLACE CONCRETE.

1.4 CONTRACT BASIS

- A. Contract price for caissons will be based upon total length for each type of caisson shown. Length of caissons will be measured from bottom elevation to top elevation of the caisson. The diameter of the caisson is defined as the minimum diameter of the shaft.
 - 1. Adjustment of contract price shall be based upon total length of each type of caisson placed and not on the length of individual caissons. When the total length of each type of completed caisson is greater or less than the length shown due to unsuitable soils or design modifications by the COTR, contract price adjustment will be made in accordance with FAR Clauses, 52.236-2 "DIFFERING SITE CONDITIONS", and 52.243-4 "CHANGES" as applicable.
 - 2. Contract price and time will be adjusted in accordance with FAR Clauses, 52.236-2 "DIFFERING SITE CONDITIONS", and 52.243-4 "CHANGES" as applicable, when artificial materials that are not shown are encountered.

1.5 CLASSIFICATION OF EXCAVATION**A. Soil/weathered rock:**

Soil or weathered rock that can be reasonably excavated with the rock auger, i.e. rock auger advancement greater than 150 mm (6 inches) per 15 minutes (see rock auger refusal, 1.5.C-2, below)

1.6 TOLERANCES

Install caissons with not more than the lesser of 1/24th of caisson shaft diameter or 75 mm (3 inches) from design center location.

Caissons shall not be out of plumb more than 25 mm (1 inch) in 3000 mm (10 feet) for the full depth.

1.7 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Before beginning work, submit a detailed location plan and description of the proposed method of caisson installation, all of which shall be subject to the review and approval of the COTR.

C. Shop Drawings shall comply with ACI 315 "Manual of Standard Practice for Detailing Reinforced Concrete Structures". Furnish shop drawings prepared by a Professional Engineer licensed in the State of the project for the detailing, fabricating, bending, and placing of concrete reinforcement.

D. Reports:

1. Caisson record: Data as specified.

2. Rock excavation: Data as specified.

3. Soil Testing Agency Reports shall be issued showing material type and allowable bearing capacity at bottom of shaft within 24 hours after testing observing each caisson.

4. Certified, "Caisson Field Record" for each caisson recording actual elevation of bottom, elevation of rock (if applicable), final centerline location of top, variation of shaft from plumb, bell dimension (if applicable), result of all tests and observations performed, material type and actual allowable bearing capacity of bottom, depth of socket into rock, levelness of bottom, seepage of water, still water level (if allowed to flood), elevation (top and bottom) of lining left in place, variation of shaft diameter (from those shown), and evidence of seams, voids or channels below bottom.

1.8 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
- A36/A36M-05.....Standard Specification for Carbon Structural Steel
 - A283/A283M-03.....Standard Specification for Low and Intermediate Tensile Strength Carbon Steel Plates
 - A615/A615M-06a.....Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement
 - A929/A929M-01.....Standard Specification for Steel Sheet, Metallic-Coated by the Hot-Dip Process for Corrugated Steel Pipe
 - A996/A996M-06a.....Standard Specification for Rail-Steel and Axle-Steel Deformed and Bars for Concrete Reinforcement
 - C33-03.....Standard Specification for Concrete Aggregates
 - C94/C94M-05.....Standard Specification for Ready-Mixed Concrete
 - C150-05.....Standard Specification for Portland Cement
 - C494/C494M-05a.....Standard Specification for Chemical Admixtures for Concrete
 - C618-05.....Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete
 - C989-05.....Standard Specification for Ground Granulated Blast-Furnace Slag for Use in Concrete and Mortars
 - C1017/C1017M-03.....Standard Specification for Chemical Admixtures for Use in Producing Flowing Concrete
- C..American Concrete Institute (ACI):
- 211.1-91 (2002).....Standard Practice for Selecting Proportions for Normal, Heavyweight and Mass Concrete
 - 301-05.....Specifications for Structural Concrete
 - 315-99.....Manual of Standard Practice for Detailing Reinforced Concrete Structures
- D..American Welding Society (AWS):
- D1.1 (2006).....Structural Welding Code - Steel

PART 2 - PRODUCTS**2.1 MATERIALS**

- A. Steel Reinforcement: ASTM A 615/A 615M, or 996, Grade 60, deformed.
- B. Portland Cement: ASTM C 150, Type I or II.
- C. Fly Ash/Slag:
 - 1. Fly Ash Admixture: ASTM C 618, Class C or F.
 - 2. Ground Granulated Blast-Furnace Slag: ASTM C 989, Grade 100 or 120.
- D. Normal-Weight Aggregate: ASTM C 33, uniformly graded, 19 mm (3/4-inch) maximum aggregate size.
- E. Water: Potable, complying with ASTM C 94/C 94M requirements.
- F. Admixtures: Certified by manufacturer to contain not more than 0.1 percent water-soluble chloride ions by mass of cementitious material and to be compatible with other admixtures and cementitious materials. Do not use admixtures containing calcium chloride.
 - 1. Water-Reducing Admixture: ASTM C 494, Type A.
 - 2. Water-Reducing and Retarding Admixture: ASTM C 494, Type D.
 - 3. High-Range, Water-Reducing Admixture: ASTM C 494, Type G.
 - 4. Plasticizing and Retarding Admixture: ASTM C 1017, Type II.
- G. Steel Casings: All casing shall meet ASTM A 283, Grade C; or ASTM A 36, carbon-steel plate, with joints full-penetration welded according to AWS D1.1, or ASTM A 929/A 929M, steel sheet, zinc coated corrugated steel. The Contractor shall design shells to withstand drilling forces and earth pressures and reinforce the bottom cutting edge as required for proper drilling and sealing of the shells into the rock. The cutting edge shall be capable of coring through at least 3000 mm (10 ft) of broken or solid rock. A minimum of 2% out of roundness of the diameter shall be considered in the design of the shell. All seams shall be welded and watertight.
- H. Concrete Mix: Prepare design mixes according to ACI 211.1 and ACI 301 for each type and strength of concrete determined by either laboratory trial mix or field test data bases. Use a qualified testing agency for preparing and reporting proposed mix designs for laboratory trial mix basis. Proportion mixes according to ACI 211.1 and ACI 301 to provide normal-weight concrete with the following properties:
 - 1. Compressive Strength (28 Days) (3000 psi).
 - 2. Minimum Slump: Capable of maintaining a slump of 125 mm (5 inches) plus or minus 25 mm (1 inch).
 - 3. Do not air entrain concrete for caissons.

4. Limit water-soluble, chloride-ion content in hardened concrete to 0.15//0.3 percent by weight of cement.
 5. Concrete-mix design adjustments may be considered if characteristics of materials, project conditions, weather, test results, or other circumstances warrant. Resubmission and approval of proposed changes to concrete-mix proportions is the responsibility of the Contractor.
- I. Concrete Mixing: Measure, batch, mix, and deliver concrete according to ASTM C 94/C 94M, and furnish batch ticket information. Do not add water to concrete mix after mixing, unless a procedure per ACI 301 is submitted to and approved by the COTR. Maintain concrete temperature less than 32 degree Celsius (90 degree Fahrenheit).

PART 3 - EXECUTION

3.1 GENERAL

- A. Size: Minimum sizes and types of caissons are shown. Proposal to use caissons of sizes and types different from those shown may be accepted if submitted in writing to COTR for approval and provided the following conditions are met:
1. Least dimension of caisson is equal to or greater than least dimension shown.
 2. Enlargement at base of caisson is in bell-form with dimensions equal to or greater than minimum shown.
 3. If volume of caisson as constructed is greater than that shown, bearing area at base is increased so that additional weight is distributed to bearing material at no more than 3000 psf.
 4. Entire caisson receives full lateral support from surrounding material.
- B. Changes: Requests for change in size or type of caisson from those shown shall be accompanied by calculations and other documentation necessary to show that proposed changes will meet load requirements. Do not proceed with changes before receiving written approval from COTR.
- C. Temporary Steel Casings: Install casings for protection of workers and inspection personnel, for prevention of cave-ins or displacement of earth walls, and for retention of ground water.
- D. Defective Casings: Do not install buckled, distorted or otherwise damaged casings. Replace casings damaged or disturbed during construction, casings that are not mud-tight or otherwise not in

accordance with drawings or specifications, at no additional cost to the Government.

- E. Survey: Registered Professional Land Surveyor or Registered Civil Engineer, specified in Section 01 00 00, GENERAL REQUIREMENTS, shall establish lines and levels and stake caisson locations.

3.2 EXCAVATION

- A. Excavation and construction methods shall result in minimum disturbance of surrounding material and full lateral support of caissons by surrounding material.
- B. Remove boulders and rock in caissons such as rock seams underlain with soil seams, sloping rock or rock otherwise unsatisfactory for bearing.
- C. If materials with satisfactory bearing strength occur at elevations higher or lower than those shown, place bottom of caissons at higher or lower elevations, subject to approval of COTR.
- D. Excavate caissons to dimensions and required bearing strata or elevations shown on contract drawings. Maintain sidewall stability during drilling. Excavate holes for closely spaced caissons, and those occurring in fragile strata, only after adjacent holes are filled with concrete and allowed to set. The excavation shall be accomplished by hand or machine excavation as required. Caisson drilling equipment shall have the minimum torque capacity and downward force capacity for the contract site conditions. Bottoms of caissons shall be cleaned of loose or soft materials and leveled. If bottoms are sloping rock, excavate to a level plane or step with maximum step height less than 1/4 the width or diameter of the bearing area. All material removed from the caisson holes shall be removed from the ground around the casing before concrete placement is started and shall be disposed of by the Contractor off site in areas submitted to and approved by the Engineer.
- E. Excavations for utilities, support of excavations, or other purposes shall be kept a minimum distance of two shaft diameters away from the outer edge of the caisson.

3.3 PLACING CONCRETE

- A. Before placing concrete, the tip of the caisson shall be observed and approved by a qualified testing agency registered and licensed in the state. The testing agency shall be retained by the Contractor and approved by the COTR. The shaft shall be inspected, cleared of mud, water, loose material and debris.

- B. Place concrete using a down pipe to direct flow of concrete. Except in presence of water, concrete may fall freely up to a maximum height of 9.14 meters (30 feet) provided the concrete does not hit the sides of the caisson. Use tremie pipe or pump if distance is greater than 9.14 meters (30 feet).
- C. Withdraw casings, as concrete is deposited, maintaining top surface of concrete constantly at least 1800 mm (6 feet) above lower end of casings. Place concrete to form a monolithic cylindrical shaft having full lateral support from surrounding undisturbed materials. Strike finished top surface of concrete to true plane at required elevation.
- D. Concrete placement in each caisson shall be one continuous operation. If placing operation has to be stopped, leave surface approximately level. If concrete has hardened, clean surface and slush with a 1 to 1 cement-sand grout before placing operation is resumed. Concrete pours shall not begin within one hour of darkness. In the event that this type of continuous sequential operation cannot be performed, the Contractor shall submit for approval by the COTR a method of securing the open excavation. The Contractor shall not leave excavations open overnight without receiving prior written approval from the COTR.
- E. When water is present, control water level to within 50 mm (2 inches) of bottom of the caisson by pumping. If impossible or impractical to control water, secure written permission from COTR to place concrete through water by means of a watertight tremie.
 - 1. When placing concrete under water, discharge end of tremie shall be submerged in fresh concrete and shaft of tremie maintained full of concrete to point above water level.
 - 2. Increase cement content of concrete required to be placed in water by one sack per cubic yard of concrete.

3.4 CAISSON RECORD

- A. For each caisson placed and before superstructure framing is placed, submit to COTR for approval a certified report recording following information prepared by Registered Professional Land Surveyor or Registered Civil Engineer.
- B. Caisson number, length, and bearing material.
- C. Location.
- D. Concrete and steel reinforcement properties.
- E. Plumbness.
- F. Dates:

1. Excavation completed.
2. Concrete placed.

G. Diameters:

1. Top of shaft.
2. Bottom of shaft.
3. Bell.

H. Elevations:

1. Top of ground.
2. Top of concrete.
3. Top of rock.
4. Bottom of caisson.

3.5 CLEAN UP:

- A. All debris from excavation of objectionable material, removal of obstructions, and any material not to remain as part of the construction are to be removed and disposed of by the Contractor in a legal manner at no additional cost to the Owner.
- B. The site shall be cleaned at frequent intervals and no material shall be stored on the site in a manner, which would obstruct the easy access of equipment and personnel.

- - - E N D - - -

**SECTION 32 05 23
CEMENT AND CONCRETE FOR EXTERIOR IMPROVEMENTS**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section shall cover site work concrete constructed upon the prepared subgrade and in conformance with the lines, grades, thickness, and cross sections shown. Construction shall include the following:
Curbs, Pedestrian Pavement: Walks, grade slabs, wheelchair curb ramps, erraces, steps. Vehicular Pavement: Service courts, driveways.
Equipment Pads: transformers.

1.2 RELATED WORK

- A. Laboratory and Field Testing Requirements: Section 01 45 29, TESTING LABORATORY SERVICES.
B. Subgrade Preparation: Section 31 20 00, EARTH MOVING.
C. Concrete Materials, Quality, Mixing, Design and Other Requirements: Section 03 30 00, CAST-IN-PLACE-CONCRETE.
D. Metal Components of Steps (Nosing and Railing): Section 05 50 00, METAL FABRICATIONS.

1.3 DESIGN REQUIREMENTS

Design all elements with the latest published version of applicable codes.

1.4 WEATHER LIMITATIONS

Placement of concrete shall be as specified under Article 3.8, COLD WEATHER and Article 3.7, HOT WEATHER of Section 03 30 00, CAST-IN-PLACE CONCRETE.

1.5 SELECT SUBBASE MATERIAL JOB-MIX

The Contractor shall retain and reimburse a testing laboratory to design a select subbase material mixture and submit a job-mix formula to the COTR, in writing, for approval. The formula shall include the source of materials, gradation, plasticity index, liquid limit, and laboratory compaction curves indicating maximum density at optimum moisture.

1.6 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:
B. Manufacturers' Certificates and Data certifying that the following materials conform to the requirements specified.
1. Expansion joint filler
2. Hot poured sealing compound

3. Reinforcement
 4. Curing materials
 5. Colored admixture materials
 6. Release agent materials
 7. Stamp and texturing tools shop drawing
 8. Sealer materials
- C. Data and Test Reports: Select subbase material.
1. Job-mix formula.
 2. Source, gradation, liquid limit, plasticity index, percentage of wear, and other tests as specified and in referenced publications.

1.7 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. Refer to the latest edition of all referenced Standards and codes.
- B. American Association of State Highway and Transportation Officials (AASHTO):
- M31.....Deformed and Plain Billet Steel Bars for
Concrete Reinforcement (ASTM A615/A615M-96A)
- M55M/55M.....Welded Steel Wire Fabric for Concrete
Reinforcement (ASTM A185)
- M147.....Materials for Aggregate and Soil-Aggregate
Subbase, Base and Surface Courses (R 1996)
- M148.....Liquid Membrane-Forming Compounds for Curing
Concrete (ASTM C309A)
- M171.....Sheet Materials for Curing Concrete (ASTM C171)
- M182.....Burlap Cloth Made from Jute or Kenaf
- M213.....Preformed Expansion Joint Fillers for Concrete
Paving and Structural Construction
(Non-extruding and Resilient Bituminous Type)
(ASTM D1751)
- T99.....Moisture-Density Relations of Soils Using a 2.5
kg. (5.5 lb) Rammer and a 305 mm (12 in.) Drop
- T180.....Moisture-Density Relations of Soils Using a 4.54
kg (10 lb.) Rammer and a 457 mm (18 in.) Drop
- C. American Society for Testing and Materials (ASTM):
- C94/C94M.....Ready-Mixed Concrete
- C143/C143M.....Slump of Hydraulic Cement Concrete

PART 2 - PRODUCTS**2.1 GENERAL**

- A. Standard concrete shall be Type C, air-entrained as specified in Section 03 30 00, CAST-IN-PLACE CONCRETE, with the following exceptions:

<u>TYPE</u>	<u>MAXIMUM SLUMP*</u>
Curb & Gutter	75 mm (3")
Pedestrian Pavement	75 mm (3")
Vehicular Pavement	50 mm (2") (Machine Finished) 100 mm (4") (Hand Finished)
Equipment Pad	75 to 100 mm (3" to 4")
* For concrete to be vibrated: Slump as determined by ASTM C143. Tolerances as established by ASTM C94.	

- B. Color enhanced concrete shall be Type C, air-entrained as specified in Section 03 30 00, CAST-IN-PLACE CONCRETE, with full-depth integrally colored admixture.
1. Admixture shall be a colored, water-reducing, admixture containing no calcium chloride with coloring agents that are limeproof and ultra-violet resistant.
 2. Admixture color to match existing color enhanced concrete.

2.2 REINFORCEMENT

- A. The type, amount, and locations of steel reinforcement shall be as shown on the drawings and in the specifications.
- B. Welded wire-fabric shall conform to AASHTO M55.
- C. Dowels shall be plain steel bars conforming to AASHTO M31 or M42. Tie bars shall be deformed steel bars conforming to AASHTO M31 or M42.

2.3 SELECT SUBBASE (WHERE REQUIRED)

- A. Subbase material shall consist of select granular material composed of sand, sand-gravel, crushed stone, crushed or granulated slag, with or without soil binder, or combinations of these materials conforming to AASHTO M147, Grading E or F.
- B. Materials meeting other gradations than that noted will be acceptable whenever the gradations are within a tolerance of three to five percent, plus or minus, of the single gradation established by the job-mix formula.
- C. Subbase material shall produce a compacted, dense-graded course, meeting the density requirement specified herein.

2.4 FORMS

- A. Use metal or wood forms that are straight and suitable in cross-section, depth, and strength to resist springing during depositing and consolidating the concrete, for the work involved.
- B. Do not use forms if they vary from a straight line more than 3 mm (1/8 inch) in any 3000 mm (ten foot) long section, in either a horizontal or vertical direction.
- C. Wood forms should be at least 50 mm (2 inches) thick (nominal). Wood forms shall also be free from warp, twist, loose knots, splits, or other defects. Use approved flexible or curved forms for forming radii.

2.5 CONCRETE CURING MATERIALS

- A. Concrete curing materials shall conform to one of the following:
 - 1. Burlap conforming to AASHTO M182 having a weight of 233 grams (seven ounces) or more per square meter (yard) when dry.
 - 2. Impervious Sheeting conforming to AASHTO M171.
 - 3. Liquid Membrane Curing Compound conforming to AASHTO M148 (ASTM C309), Type 2 and shall be free of paraffin or petroleum.
 - 4. Curing Compounds for Color Enhanced Concrete: shall comply with ASTM C309 and be of same manufacturer as colored admixture, for use with integrally colored concrete.

2.6 EXPANSION JOINT FILLERS

Material shall conform to AASHTO M213.

2.7 COLOR AND TEXTURE ENHANCEMENTS

ASTM C979 "Standard Specification for Pigments for Integrally Colored Concrete.

2.8 SEALERS

- A. Sealing Compounds for standard concrete shall be clear, penetrating, breathable water repellent for use on concrete.
 - 1. Isobutyltrialoxysilane in an alcohol carrier conforming to ASTM C672 Deicer Scaling and ASTM E303 Skid Resistance.
- B. Sealing Compounds for Color Enhanced Concrete: shall comply with ASTM C309 and be of same manufacturer as colored admixture, for use with integrally colored concrete.

PART 3 - EXECUTION**3.1 SUBGRADE PENETRATION**

- A. Prepare, construct, and finish the subgrade as specified in Section 31 20 00, EARTH MOVING.

- B. Maintain the subgrade in a smooth, compacted condition, in conformance with the required section and established grade until the succeeding operation has been accomplished.

3.2 SELECT SUBBASE (WHERE REQUIRED)

- A. Mixing: Proportion the select subbase by weight or by volume in quantities so that the final approved job-mixed formula gradation, liquid limit, and plasticity index requirements will be met after subbase course has been placed and compacted. Add water in approved quantities, measured by weight or volume, in such a manner to produce a uniform blend.
- B. Placing:
 - 1. Place the mixed material on the prepared subgrade in a uniform layer to the required contour and grades, and to a loose depth not to exceed 200 mm (8 inches), and that when compacted, will produce a layer of the designated thickness.
 - 2. When the designated compacted thickness exceeds 150 mm (6 inches), place the material in layers of equal thickness. Remove unsatisfactory areas and replace with satisfactory mixture, or mix the material in the area.
 - 3. In no case will the addition of thin layers of material be added to the top layer in order to meet grade.
 - 4. If the elevation of the top layer is 13 mm (1/2 inch) or more below the grade, excavate the top layer and replace with new material to a depth of at least 75 mm (3 inches) in compacted thickness.
- C. Compaction:
 - 1. Perform compaction with approved equipment (hand or mechanical) well suited to the material being compacted.
 - 2. Moisten or aerate the material as necessary to provide the moisture content that will readily facilitate obtaining the specified compaction with the equipment used.
 - 3. Compact each layer to at least 95 percent or 100 percent of maximum density as determined by AASHTO T180 or AASHTO T99 respectively.
- D. Smoothness Test and Thickness Control:

Test the completed subbase for grade and cross section with a straight edge.

 - 1. The surface of each layer shall not show any deviations in excess of 10 mm (3/8 inch).
 - 2. The completed thickness shall be within 13 mm (1/2 inch) of the thickness as shown.
- E. Protection:

1. Maintain the finished subbase in a smooth and compacted condition until the concrete has been placed.
2. When Contractor's subsequent operations or adverse weather disturbs the approved compacted subbase, excavate, and reconstruct it with new material meeting the requirements herein specified, at no additional cost to the VA.

3.3 SETTING FORMS

A. Base Support:

1. Compact the base material under the forms true to grade so that, when set, they will be uniformly supported for their entire length at the grade as shown.
2. Correct imperfections or variations in the base material grade by cutting or filling and compacting.

B. Form Setting:

1. Set forms sufficiently in advance of the placing of the concrete to permit the performance and approval of all operations required with and adjacent to the form lines.
2. Set forms to true line and grade and use stakes, clamps, spreaders, and braces to hold them rigidly in place so that the forms and joints are free from play or movement in any direction.
3. Forms shall conform to line and grade with an allowable tolerance of 3 mm (1/8 inch) when checked with a straightedge and shall not deviate from true line by more than 6 mm (1/4 inch) at any point.
4. Do not remove forms until removal will not result in damaged concrete or at such time to facilitate finishing.
5. Clean and oil forms each time they are used.

C. The Contractor's Registered Professional Land Surveyor shall establish and control the alignment and the grade elevations of the forms or concrete slipforming machine operations.

1. Make necessary corrections to forms immediately before placing concrete.
2. When any form has been disturbed or any subgrade or subbase has become unstable, reset and recheck the form before placing concrete.

3.4 EQUIPMENT

- A. The COTR shall approve equipment and tools necessary for handling materials and performing all parts of the work prior to commencement of work.
- B. Maintain equipment and tools in satisfactory working condition at all times.

3.5 PLACING REINFORCEMENT

- A. Reinforcement shall be free from dirt, oil, rust, scale or other substances that prevent the bonding of the concrete to the reinforcement.
- B. Before the concrete is placed, the COTR shall approve the reinforcement, which shall be accurately and securely fastened in place with suitable supports and ties. The type, amount, and position of the reinforcement shall be as shown.

3.6 PLACING CONCRETE - GENERAL

- A. Obtain approval of the COTR before placing concrete.
- B. Remove debris and other foreign material from between the forms before placing concrete. Obtain approval of the COTR before placing concrete.
- C. Before the concrete is placed, uniformly moisten the subgrade, base, or subbase appropriately, avoiding puddles of water.
- D. Convey concrete from mixer to final place of deposit by a method which will prevent segregation or loss of ingredients. Deposit concrete so that it requires as little handling as possible.
- E. While being placed, spade or vibrate and compact the concrete with suitable tools to prevent the formation of voids or honeycomb pockets. Vibrate concrete well against forms and along joints. Over-vibration or manipulation causing segregation will not be permitted. Place concrete continuously between joints without bulkheads.
- F. Install a construction joint whenever the placing of concrete is suspended for more than 30 minutes and at the end of each day's work.
- G. Workmen or construction equipment coated with foreign material shall not be permitted to walk or operate in the concrete during placement and finishing operations.

3.7 PLACING CONCRETE FOR CURB AND GUTTER, PEDESTRIAN PAVEMENT, EQUIPMENT PADS

- A. Place concrete in the forms in one layer of such thickness that, when compacted and finished, it will conform to the cross section as shown.
- B. Deposit concrete as near to joints as possible without disturbing them but do not dump onto a joint assembly.
- C. After the concrete has been placed in the forms, use a strike-off guided by the side forms to bring the surface to the proper section to be compacted.
- D. Consolidate the concrete thoroughly by tamping and spading, or with approved mechanical finishing equipment.
- E. Finish the surface to grade with a wood or metal float.
- F. All Concrete pads and pavements shall be constructed with sufficient slope to drain properly.

3.8 PLACING CONCRETE FOR VEHICULAR PAVEMENT

- A. Deposit concrete into the forms as close as possible to its final position.
- B. Place concrete rapidly and continuously between construction joints.
- C. Strike off concrete and thoroughly consolidate by a finishing machine, vibrating screed, or by hand-finishing.
- D. Finish the surface to the elevation and crown as shown.
- E. Deposit concrete as near the joints as possible without disturbing them but do not dump onto a joint assembly. Do not place adjacent lanes without approval by the COTR.

3.9 CONCRETE FINISHING - GENERAL

- A. The sequence of operations, unless otherwise indicated, shall be as follows:
 - 1. Consolidating, floating, straight-edging, troweling, texturing, and edging of joints.
 - 2. Maintain finishing equipment and tools in a clean and approved condition.

3.10 CONCRETE FINISHING - CURB

- A. Round the edges of the gutter and top of the curb with an edging tool to a radius of 6mm (1/4 inch) or as otherwise detailed.
- B. Float the surfaces and finish with a smooth wood or metal float until true to grade and section and uniform in textures.
- C. Finish the surfaces, while still wet, with a bristle type brush with longitudinal strokes.
- D. Immediately after removing the front curb form, rub the face of the curb with a wood or concrete rubbing block and water until blemishes, form marks, and tool marks have been removed. Brush the surface, while still wet, in the same manner as the gutter and curb top.
- E. Except at grade changes or curves, finished surfaces shall not vary more than 3 mm (1/8 inch) for gutter and 6 mm (1/4 inch) for top and face of curb, when tested with a 3000 mm (10 foot) straightedge.
- F. Remove and reconstruct irregularities exceeding the above for the full length between regularly scheduled joints.
- G. Correct any depressions which will not drain.
- H. Visible surfaces and edges of finished curb shall be free of blemishes, form marks, and tool marks, and shall be uniform in color, shape, and appearance.

3.11 CONCRETE FINISHING - PEDESTRIAN PAVEMENT

- A. Walks, Grade Slabs, Wheelchair Curb Ramps:

1. Finish the surfaces to grade and cross section with a metal float, trowled smooth and finished with a broom moistened with clear water.
2. Brooming shall be transverse to the line of traffic.
3. Finish all slab edges, including those at formed joints, carefully with an edger having a radius as shown on the Drawings.
4. Unless otherwise indicated, edge the transverse joints before brooming. The brooming shall eliminate the flat surface left by the surface face of the edger. Execute the brooming so that the corrugation, thus produced, will be uniform in appearance and not more than 2 mm (1/16 inch) in depth.
5. The completed surface shall be uniform in color and free of surface blemishes, form marks, and tool marks. The finished surface of the pavement shall not vary more than 5 mm (3/16 inch) when tested with a 3000 mm (10 foot) straightedge.
6. The thickness of the pavement shall not vary more than 6 mm (1/4 inch).
7. Remove and reconstruct irregularities exceeding the above for the full length between regularly scheduled joints.

B. Steps: The method of finishing the steps and the sidewalls is similar to above except as herein noted.

1. Remove the riser forms one at a time, starting with the top riser.
2. After removing the riser form, rub the face of the riser with a wood or concrete rubbing block and water until blemishes, form marks, and tool marks have been removed. Use an outside edger to round the corner of the tread; use an inside edger to finish the corner at the bottom of the riser.
3. Give the risers and sidewall a final brush finish. The treads shall have a final finish with a stiff brush to provide a non-slip surface.
4. The texture of the completed steps shall present a neat and uniform appearance and shall not deviate from a straightedge test more than 5 mm (3/16 inch).

3.12 CONCRETE FINISHING - VEHICULAR PAVEMENT

- A. Accomplish longitudinal floating with a longitudinal float not less than 3000 mm (10 feet) long and 150 mm (6 inches) wide, properly stiffened to prevent flexing and warping. Operate the float from foot bridges in a sawing motion parallel to the direction in which the pavement is being laid from one side of the pavement to the other, and advancing not more than half the length of the float.

- B. After the longitudinal floating is completed, but while the concrete is still plastic, eliminate minor irregularities in the pavement surfaces by means of metal floats, 1500 mm (5 feet) in length, and straightedges, 3000 mm (10 feet) in length. Make the final finish with the straightedges, which shall be used to float the entire pavement surface.
- C. Test the surface for trueness with a 3000 mm (10 foot) straightedge held in successive positions parallel and at right angles to the direction in which the pavement is being laid and the entire area covered as necessary to detect variations. Advance the straightedge along the pavement in successive stages of not more than one half the length of the straightedge. Correct all irregularities and refinish the surface.
- D. The finished surface of the pavement shall not vary more than 6 mm (1/4 inch) in both longitudinal and transverse directions when tested with a 3000 mm (10 foot) straightedge.
- E. The thickness of the pavement shall not vary more than 6 mm (1/4 inch).
- F. When most of the water glaze or sheen has disappeared and before the concrete becomes nonplastic, give the surface of the pavement a broomed finish with an approved fiber broom not less than 450 mm (18 inches) wide. Pull the broom gently over the surface of the pavement from edge to edge. Brooming shall be transverse to the line of traffic and so executed that the corrugations thus produced will be uniform in character and width, and not more than 3 mm (1/8 inch) in depth. Carefully finish the edge of the pavement along forms and at the joints with an edging tool. The brooming shall eliminate the flat surface left by the surface face of the edger.
- G. The finish surfaces of new and existing abutting pavements shall coincide at their juncture.

3.13 CONCRETE FINISHING - EQUIPMENT PADS

- A. After the surface has been struck off and screeded to the proper elevation, give it a smooth dense float finish, free from depressions or irregularities.
- B. Carefully finish all slab edges with an edger having a radius as shown in the Drawings.
- C. After removing the forms, rub the faces of the pad with a wood or concrete rubbing block and water until blemishes, form marks, and tool marks have been removed. The finish surface of the pad shall not vary more than 3 mm (1/8 inch) when tested with a 3000 mm (10 foot) straightedge.
- D. Correct irregularities exceeding the above.

3.14 CONCRETE FINISHING - COLOR AND TEXTURE ENHANCED CONCRETE

- A. Begin imprinting operations according to manufacturer's written instructions, including application of release agent.
- B. Texture and pattern shall match alignment of existing color and texture enhanced concrete.

3.15 JOINTS - GENERAL

- A. Place joints, where shown, conforming to the details as shown, and perpendicular to the finished grade of the concrete surface.
- B. Joints shall be straight and continuous from edge to edge of the pavement.

3.16 CONTRACTION JOINTS

- A. Cut joints to depth by sawing with a blade producing a 1/16" width and depth that is no less than ¼ the thickness of the slab.
- B. Construct joints in curbs by inserting 3 mm (1/8 inch) steel plates conforming to the cross sections of the curb .
- C. Plates shall remain in place until concrete has set sufficiently to hold its shape and shall then be removed.
- D. Finish edges of all joints with an edging tool having the radius as shown.
- E. Score pedestrian pavement with a standard grooving tool or jointer.

3.17 EXPANSION JOINTS

- A. Use a preformed expansion joint filler material of the thickness as shown to form expansion joints.
- B. Material shall extend the full depth of concrete, cut and shaped to the cross section as shown, except that top edges of joint filler shall be below the finished concrete surface where shown to allow for sealing.
- C. Anchor with approved devices to prevent displacing during placing and finishing operations.
- D. Round the edges of joints with an edging tool.
- E. Form expansion joints as follows:
 - 1. Without dowels, about structures and features that project through, into, or against any site work concrete construction.
 - 2. Using joint filler of the type, thickness, and width as shown.
 - 3. Installed in such a manner as to form a complete, uniform separation between the structure and the site work concrete item.

3.18 CONSTRUCTION JOINTS

- A. Locate longitudinal and construction joints between slabs of vehicular pavement as shown.

- B. Place transverse construction joints of the type shown, where indicated and whenever the placing of concrete is suspended for more than 30 minutes.
- C. Use a butt-type joint with dowels in curb if the joint occurs at the location of a planned joint.
- D. Use keyed joints with tiebars if the joint occurs in the middle third of the normal curb joint interval.

3.19 FORM REMOVAL

- A. Forms shall remain in place at least 12 hours after the concrete has been placed. Remove forms without injuring the concrete.
- B. Do not use bars or heavy tools against the concrete in removing the forms. Promptly repair any concrete found defective after form removal.

3.20 CURING OF CONCRETE

- A. Cure concrete by one of the following methods appropriate to the weather conditions and local construction practices, against loss of moisture, and rapid temperature changes for at least seven days from the beginning of the curing operation. Protect unhardened concrete from rain and flowing water. All equipment needed for adequate curing and protection of the concrete shall be on hand and ready to install before actual concrete placement begins. Provide protection as necessary to prevent cracking of the pavement due to temperature changes during the curing period. If any selected method of curing does not afford the proper curing and protection against concrete cracking, remove and replace the damaged pavement and employ another method of curing as directed by the COTR.
- B. Liquid Membrane Curing:
 - 1. Apply pigmented membrane-forming curing compound in two coats at right angles to each other at a rate of 5 m²/L (200 square feet per gallon) for both coats.
 - 2. Do not allow the concrete to dry before the application of the membrane.
 - 3. Cure joints designated to be sealed by inserting moistened paper or fiber rope or covering with waterproof paper prior to application of the curing compound, in a manner to prevent the curing compound entering the joint.
 - 4. Apply additional curing compound to saw cut joints after cleaning and removal of dust and debris.
 - 5. Integrally Colored Concrete: Apply curing compound for integrally colored concrete according to manufacturer's instructions using manufacturer's recommended application techniques. Apply curing

compound at consistent time for each pour to maintain close color consistency.

6. Immediately re-spray any area covered with curing compound and damaged during the curing period.

3.21 CLEANING

A. After completion of the curing period:

1. Remove the curing material (other than liquid membrane).
2. Sweep the concrete clean.
3. After removal of all foreign matter from the joints, seal joints as herein specified.
4. Prior to sealing clean all surfaces to remove any foreign materials prior to sealer application. Use approved cleaning methods, including sandblasting, waterblasting and chemical cleaners while maintaining proper precautions throughout the cleaning process.
5. Clean the entire concrete of all debris and construction equipment as soon as curing and sealing of joints has been completed.

3.22 SEALING

- A. Seal all new concrete work in accord with manufacturer's written instructions after concrete has cured a minimum of 28 days.

3.23 PROTECTION

The contractor shall protect the concrete against all damage prior to final acceptance by the Government. Remove concrete containing excessive cracking, fractures, spalling, or other defects and reconstruct the entire section between regularly scheduled joints, when directed by the COTR, and at no additional cost to the Government. Exclude traffic from vehicular pavement until the concrete is at least seven days old, or for a longer period of time if so directed by the COTR.

3.24 FINAL CLEAN-UP

Remove all debris, rubbish and excess material from the Station.

- - - E N D - - -

SECTION 32 12 16
ASPHALT PAVING

PART 1 - GENERAL

1.1 DESCRIPTION

This work shall cover the composition, mixing, construction upon the prepared subgrade, and the protection of hot asphalt concrete pavement. The hot asphalt concrete pavement shall consist of an aggregate or asphalt base course and asphalt surface course constructed in conformity with the lines, grades, thickness, and cross sections as shown. Each course shall be constructed to the depth, section, or elevation required by the drawings and shall be rolled, finished, and approved before the placement of the next course.

1.2 RELATED WORK

- A. Laboratory and field testing requirements: Section 01 45 29, TESTING LABORATORY SERVICES.
- B. Subgrade Preparation: Paragraph 3.3 and Section 31 20 00, EARTH MOVING.
- C. Pavement Markings: Section 32 17 23, PAVEMENT MARKINGS.

1.3 INSPECTION OF PLANT AND EQUIPMENT

The Resident Engineer shall have access at all times to all parts of the material producing plants for checking the mixing operations and materials and the adequacy of the equipment in use.

1.4 ALIGNMENT AND GRADE CONTROL

The Contractor's Registered Professional Land Surveyor shall establish and control the pavement (aggregate or asphalt base course and asphalt surface course) alignments, grades, elevations, and cross sections as shown on the Drawings.

1.5 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:
- B. Data and Test Reports:
 - 1. Aggregate Base Course: Sources, gradation, liquid limit, plasticity index, percentage of wear, and other tests required by State Highway Department.
 - 2. Asphalt Base/Surface Course: Aggregate source, gradation, soundness loss, percentage of wear, and other tests required by State Highway Department.
 - 3. Job-mix formula.

C. Certifications:

1. Asphalt prime and tack coat material certificate of conformance to State Highway Department requirements.
2. Asphalt cement certificate of conformance to State Highway Department requirements.
3. Job-mix certification - Submit plant mix certification that mix equals or exceeds the Ohio Department of Transportation Construction and Material Specifications.

D. One copy of the Ohio Department of Transportation Construction and Material Specifications shall be catalogued and available for reference in the Contractor's project office.

E. Provide MSDS (Material Safety Data Sheets) for all chemicals used on ground.

PART 2 - PRODUCTS**2.1 GENERAL**

A. Aggregate base and asphalt concrete materials shall conform to the requirements of the following and other appropriate sections of the latest version of the State Highway Material Specifications, including amendments, addenda and errata. Where the term "Engineer" or "Commission" is referenced in the State Highway Specifications, it shall mean the VA Resident Engineer or VA Contracting Officer.

2.2 AGGREGATES

A. Provide aggregates consisting of crushed stone, gravel, sand, or other sound, durable mineral materials processed and blended, and naturally combined.

B. Subbase aggregate (where required) maximum size: 38mm(1-1/2").

C. Base aggregate maximum size:

1. Base course over 152mm(6") thick: 38mm(1-1/2");
2. Other base courses: 19mm(3/4").

D. Asphaltic base course:

1. Maximum particle size not to exceed 25.4mm(1").
2. Where conflicts arise between this specification and the requirements in the latest version of the State Highway Specifications, the State Specifications shall control.

E. Aggregates for asphaltic concrete paving: Provide a mixture of sand, mineral aggregate, and liquid asphalt mixed in such proportions that the percentage by weight will be within:

<u>Sieve Sizes</u>	<u>Percentage Passing</u>
19mm(3/4")	100
9.5mm(3/8")	67 to 85
6.4mm(1/4")	50 to 65
2.4mm(No. 8 mesh)	37 to 50
600µm(No. 30 mesh)	15 to 25
75µm(No. 200 mesh)	3 to 8

plus 50/60 penetration liquid asphalt at 5 percent to 6-1/2 percent of the combined dry aggregates.

2.3 ASPHALTS

A. Comply with provisions of Asphalt Institute Specification SS2:

1. Asphalt cement: Penetration grade 50/60
2. Prime coat: Cut-back type, grade MC-250
3. Tack coat: Uniformly emulsified, grade SS-1H

2.4 SEALER

- A. Provide a sealer consisting of suitable fibrated chemical type asphalt base binders and fillers having a container consistency suitable for troweling after thorough stirring, and containing no clay or other deleterious substance.
- B. Where conflicts arise between this specification and the requirements in the latest version of the State Highway Specifications, the State Specifications shall control.

PART 3 - EXECUTION

3.1 GENERAL

The Asphalt Concrete Paving equipment, weather limitations, job-mix formula, mixing, construction methods, compaction, finishing, tolerance, and protection shall conform to the requirements of the appropriate sections of the ODOT Section 400 Flexible Pavement for the type of material specified.

3.2 MIXING ASPHALTIC CONCRETE MATERIALS

- A. Provide hot plant-mixed asphaltic concrete paving materials.
1. Temperature leaving the plant: 143 degrees C(290 degrees F) minimum, 160 degrees C(320 degrees F) maximum.
 2. Temperature at time of placing: 138 degrees C(280 degrees F) minimum.

3.3 SUBGRADE

- A. Shape to line and grade and compact with self-propelled rollers.

- B. All depressions that develop under rolling shall be filled with acceptable material and the area re-rolled.
- C. Soft areas shall be removed and filled with acceptable materials and the area re-rolled.
- D. Should the subgrade become rutted or displaced prior to the placing of the subbase, it shall be reworked to bring to line and grade.
- E. Proof-roll the subgrade with maximum 45 tonne (50 ton) gross weight dump truck as directed by VA Resident Engineer or VA Contracting Officer. If pumping, pushing, or other movement is observed, rework the area to provide a stable and compacted subgrade.

3.4 BASE COURSES

- A. Subbase (when required)
 - 1. Spread and compact to the thickness shown on the drawings.
 - 2. Rolling shall begin at the sides and continue toward the center and shall continue until there is no movement ahead of the roller.
 - 3. After completion of the subbase rolling there shall be no hauling over the subbase other than the delivery of material for the top course.
- B. Base
 - 1. Spread and compact to the thickness shown on the drawings.
 - 2. Rolling shall begin at the sides and continue toward the center and shall continue until there is no movement ahead of the roller.
 - 3. After completion of the base rolling there shall be no hauling over the base other than the delivery of material for the top course.
- C. Thickness tolerance: Provide the compacted thicknesses shown on the Drawings within a tolerance of minus 0.0mm (0.0") to plus 12.7mm (0.5").
- D. Smoothness tolerance: Provide the lines and grades shown on the Drawings within a tolerance of 5mm in 3m (3/16 inch in ten feet).
- E. Moisture content: Use only the amount of moisture needed to achieve the specified compaction.

3.5 PLACEMENT OF ASPHALTIC CONCRETE PAVING

- A. Remove all loose materials from the compacted base.
- B. Apply the specified prime coat, and tack coat where required, and allow to dry in accordance with the manufacturer's recommendations as approved by the Architect or Engineer.
- C. Receipt of asphaltic concrete materials:
 - 1. Do not accept material unless it is covered with a tarpaulin until unloaded, and unless the material has a temperature of not less than 130 degrees C(280 degrees F).

2. Do not commence placement of asphaltic concrete materials when the atmospheric temperature is below 10 degrees C (50 degrees F), not during fog, rain, or other unsuitable conditions.

D. Spreading:

1. Spread material in a manner that requires the least handling.
2. Where thickness of finished paving will be 76mm (3") or less, spread in one layer.

E. Rolling:

1. After the material has been spread to the proper depth, roll until the surface is hard, smooth, unyielding, and true to the thickness and elevations shown on the drawings.
2. Roll in at least two directions until no roller marks are visible.
3. Finished paving smoothness tolerance:
 - a. No depressions which will retain standing water.
 - b. No deviation greater than 3mm in 1.8m (1/8" in six feet).

3.6 APPLICATION OF SEAL COAT

- A. Prepare the surfaces, mix the seal coat material, and apply in accordance with the manufacturer's recommendations as approved by the Architect or Engineer.
- B. Apply one coat of the specified sealer.
- C. Achieve a finished surface seal which, when dry and thoroughly set, is smooth, tough, resilient, of uniform black color, and free from coarse textured areas, lap marks, ridges, and other surface irregularities.

3.7 PROTECTION

Protect the asphaltic concrete paved areas from traffic until the sealer is set and cured and does not pick up under foot or wheeled traffic.

3.8 FINAL CLEAN-UP

Remove all debris, rubbish, and excess material from the work area.

- - - E N D - - -

**SECTION 32 31 13
METAL FENCES AND GATES**

PART 1 - GENERAL

1.1 DESCRIPTION

This work consists of all labor, materials, and equipment necessary for furnishing and installing chain link fence, gates and accessories in conformance with the lines, grades, and details as shown.

1.2 RELATED WORK

- A. Grounding of fencing for enclosures of electrical equipment and for lightning protection as shown: Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS.
- B. Temporary Construction Fence: Section 01 00 00, GENERAL REQUIREMENTS.
- C. Finish Grading: Section 31 20 00, EARTH MOVING, and Section 32 90 00, PLANTING.

1.3 MANUFACTURER'S QUALIFICATIONS

- A. Fence, gates, and accessories shall be products of manufacturers' regularly engaged in manufacturing items of type specified.
- B. 20 years warranty for factory finish against cracking, peeling, and blistering under normal use.

1.4 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES, furnish the following:
 - 1. Manufacturer's Literature and Data: Metal fencing, gates and all accessories.
 - 2. Manufacturer's Certificates: Zinc-coating complies with specifications.
- B. Shop Drawings for posts, fence sections, fasteners, gates and accessories.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - A36.....Structural Steel.
 - A121.....Zinc-Coated (Galvanized) Steel Barbed Wire.
 - A123.....Zinc (Hot-Dip Galvanized) Coatings on Iron and Steel Products.

A500.....Cold-Formed Welded and Seamless Carbon Steel
Structural Tubing in Rounds and Shapes.
B117.....Standard Practice for Operating Salt Spray
(Fog) Apparatus.
C94/C94M-03.....Ready-Mixed Concrete
D822.....Tests on Paint and Related Coatings Using
Filtered Open-Flame Carbon-Arc Exposure
Apparatus.
D1794.....Resistance of Organic Coatings to the Effects
of Rapid Deformation (Impact).
D3363.....Test Method for Film Hardness by Pencil Test.
F900-03.....Industrial and Commercial Swing Gates
C. Federal Specifications (Fed. Spec.):
FF-P-110J.....Padlock, Changeable Combination

PART 2 - PRODUCTS

2.1 GENERAL

Materials shall conform to:

- A. Steel bar stock-ASTM A36.
- B. Steel tubing-ASTM A500, Grade B.
- C. Type: Ornamental steel fencing system consisting of modular open grille fencing panels fabricated by welding flat steel bars and rods, supported by steel posts and gates and gate hardware.

2.2 PANELS

- A. Vertical main bars: 25 by 3 mm [1 by 1/8 inch] flat bars spaced at 62 mm [2-7/16 inches).
- B. Horizontal cross rods: [3/16 inch] [5 mm] diameter rods spaced at [5-3/16 inches] [132 mm.]
- C. Top and bottom perimeter bars: 25 by 3 mm [1 by 1/8 inch] flat bars.
- D. Panel height: 1219 mm [48 inches).
- E. Panel width: as noted on Drawings.

2.3 POSTS

Galvanized square steel tubes 102 by 102 mm [4 by 4 inches].

2.4 GATES

- A. Provide gates of type and size indicated on Drawings. Equip gates with manufacturer's standard hardware as required for complete functional operation.
- B. Type: Hinged swinging single gate.

- C. Construction: Welded frame fabricated from steel tubing with open grille steel panels to match fencing material.
- D. Nominal size: as noted on Drawings.
- E. Hinges: Size and type as determined by manufacturer. Provide 2 hinges for each leaf up to 1829 mm (6 feet) high and 1 additional hinge for each additional 610 mm [24 inches] in height or fraction thereof.
- F. Arrange latches for padlocking so that padlock will be accessible from both sides of the gate regardless of the latching arrangement.

2.5 GATE HARDWARE

- A. Manufacturer's standard products, installed complete. The type of hinges shall allow gates to swing through 180 degrees, from closed to open position. Hang and secure gates in such a manner that, when locked, they cannot be lifted off hinges.
- B. Provide stops and keepers for all double gates. Latches shall have a plunger-bar arranged to engage the center stop. Arrange latches for locking. Center stops shall consist of a device arranged to be set in concrete and to engage a plunger bar. Keepers shall consist of a mechanical device for securing the free end of the gate when in full open position.
- C. Padlocks for gates are specified under Section 08 71 00, DOOR HARDWARE. Padlocks shall have chains that are securely attached to the gate or gate post.
- D. Equip gate openings with padlock conforming to Fed Spec FF-P-110H, Type EPC, size 50 mm (2 inch). Padlocks shall have chains that are securely attached to the gate or gate post. Before padlocks are delivered to project, submit sample to Resident Engineer for approval. Approved sample may be incorporated in work. Key padlock as directed by the Resident Engineer.

2.6 FACTORY FINISH

- A. Steel fence panels and posts shall be hot-dip galvanized to 1.25 ounces per square foot minimum zinc coating in accordance with ASTM A123. Standard size components shall receive polyester powder coating. Large gate panels shall be coated with 2-part polyurethane coating.
- B. Polyester powder coating: Electrostatically applied colored polyester powder coating heat cured to chemically bond finish to metal substrate.
 - 1. Minimum hardness measured in accordance with ASTM D3363: 2H.

2. Direct impact resistance tested in accordance with ASTM D2794:
Withstand 160 inch-pounds.
 3. Salt spray resistance tested in accordance with ASTM B117: No undercutting, rusting, or blistering after 500 hours in 5 percent salt spray at 95 degrees F and 95 percent relative humidity and after 1000 hours less than [3/16 inch] [5 mm] undercutting.
 4. Weatherability tested in accordance with ASTM D822: No film failure and 88 percent gloss retention after 1 year exposure in South Florida with test panels tilted at 45 degrees.
- C. Polyurethane coating: 1.0 mil dry film thickness of coating of steel test panel cured 30 minutes at 180 degree F and aged 14 days shall resist the following test conditions without failure:
1. 5 percent salt spray for 500 hours.
 2. 100 percent relative humidity for 1000 hours.
 3. Water immersion for 100 hours.
 4. 20 double rubs with cloth saturated with either lacquer thinner, acetone, MEK, gasoline, xylene.
 5. Exposure to lubricating oils, hydraulic fluids, and cutting oils.
 6. 16 cycles of 24 hours at 100 percent humidity, 24 hours at 10 degrees F, and 24 hours at 77 degrees F.
 7. Hardness: H to 2H.
 8. Flexibility: 3 mm [1/8 inch] conical mandrel.
- D. Color: Black.

2.7 CONCRETE

ASTM C94/C94M, using 19 mm (3/4 inch) maximum-size aggregate, and having minimum compressive strength of 25 mPa (3000 psig) at 28 days. Non-shrinking grout shall consist of one part Portland cement to three parts clean, well-graded sand, non-shrinking grout additive and the minimum amount of water to produce a workable mix.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. Install fence by properly trained crew, on previously prepared surfaces, to line and grade as shown. Install fence in accordance with ASTM F567 and with the manufacturer's printed installation instructions, except as modified herein or as shown. Maintain all equipment, tools, and machinery while on the project in sufficient quantities and capacities for proper installation of posts, chain links and accessories.

- B. A Registered Professional Land Surveyor or Registered Civil Engineer specified in Section 01 00 00, GENERAL REQUIREMENTS, shall stake out and certify the fence alignment to meet the requirements as shown.

3.2 EXCAVATION

- A. Excavation for concrete-embedded items shall be of the dimensions shown, except in bedrock. If bedrock is encountered before reaching the required depth, continue the excavation to the depth shown or 450 mm (18 inches) into the bedrock, whichever is less, and provide a minimum of 50 mm (2 inches) larger diameter than the outside diameter of the post. Clear loose material from post holes. Grade area around finished concrete footings as shown and dispose of excess earth as directed by the Resident Engineer.
- B. Concrete footings as detailed on Drawings and approved shop drawings.
- C. Where setting posts in existing structures, provide setting holes for embedment of fence posts. Core drill existing concrete footings for embedment of fence posts. Hole shall be 51 mm [2 inches] minimum greater than post width.

3.3 POST SETTING

- A. Install posts plumb and in alignment. Set post in concrete footings of dimensions as shown, except in bedrock. Thoroughly compact concrete so as it to be free of voids and finished in a slope or dome to divert water running down the post away from the footing. Straight runs between braced posts shall not exceed 150 m (500 feet).
- B. Install posts in bedrock or existing structures with a minimum of 25 mm (1 inch) of non-shrinking grout around each post. Thoroughly work non-shrinking grout into the hole so as to be free of voids and finished in a slope or dome. Cure concrete and grout a minimum of 72 hours before any further work is done on the posts.

3.4 POST SETTING IN STRUCTURES

Install post in retaining walls, curbs, concrete slabs, or similar construction in proper size galvanized pipe sleeves set into the concrete or built into the masonry as shown. Set sleeves plumb and 13 mm (1/2 inch) above the finished structure. Fill space solidly between sleeve and post with non-shrinking grout, molten lead, or sulphur, and finish to divert water running down the post away from the post base.

3.5 POST CAPS

Fit all exposed ends of post with caps. Provide caps that fit snugly and are weathertight. Where top rail is used, provide caps to accommodate the top rail. Install post caps as recommended by the manufacturer and as shown.

3.6 ACCESSORIES

Supply accessories as required and recommended by the manufacturer, to accommodate the installation of a complete fence, with panels that are attached properly to posts.

3.7 GATES

Install gates plumb, level, and secure for full opening without interference. Set keepers, stops and other accessories into concrete as required by the manufacturer and as shown. Adjust hardware for smooth operation and lubricate where necessary.

3.8 REPAIR OF GALVANIZED AND COATED SURFACES

Use galvanized repair compound, stick form, or other method, where galvanized surfaces need field or shop repair. Repair coated surfaces in accordance with the manufacturer's printed directions with paint supplied by manufacturer and matching original coating.

3.9 FINAL CLEAN-UP

Remove all debris, rubbish and excess material from the station.

- - - E N D - - -

**SECTION 32 84 00
PLANTING IRRIGATION**

PART 1 - GENERAL

1.1 DESCRIPTION

An automatically-controlled lawn irrigation system, complete, including piping, sprinkler heads, valves, controls, control wiring, fittings, electrical connections and necessary accessories.

1.2 RELATED WORK

- A. Concrete: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- B. Maintenance of Existing Utilities: Section 01 00 00, GENERAL REQUIREMENTS.
- C. Excavation, Trench Widths, Pipe Bedding, Backfill, Shoring, Sheeting, Bracing: Section 31 20 00, EARTH MOVING.
- D. Protection of Materials and Equipment: Section 21 05 11, COMMON WORK RESULTS FOR FIRE SUPPRESSION / Section 22 05 11, COMMON WORK RESULTS FOR PLUMBING.
- E. Division 26, ELECTRICAL.
- F. Section 32 90 00, PLANTING

1.3 QUALITY ASSURANCE

- A. Criteria:
 - 1. Manufacturer regularly and presently manufactures the item submitted as one of their principal products.
 - 2. There is a permanent service organization, maintained or trained by the manufacturer, which will render satisfactory service within eight hours of receipt of notification that service is requested.
 - 3. Installer, or supplier of a service, has technical qualifications, experience, and trained personnel and facilities to perform the specified work.
- B. Products Criteria:
 - 1. Multiple Units: When two or more units of the same type or class of materials or equipment are required, these units are products of one manufacturer.
 - 2. Assembled Units: Manufacturers of equipment assemblies, which use components made by others, assume complete responsibility for the final assembled product.
 - a. All components of an assembled unit need not be products of the same manufacturer but component parts which are alike are the product of a single manufacturer.

- b. Components are compatible with each other and with the total assembly for the intended service.
- 3. Nameplates: Nameplate bearing manufacturer's name or identification trademark securely affixed in a conspicuous place on equipment, or name or trademark cast integrally with equipment, stamped, or otherwise permanently marked on each item of equipment.
- C. System Requirements:
 - 1. Full and complete coverage is required. Contractor shall, at no additional cost to the Government, make necessary adjustments to layout required to achieve full coverage of irrigated areas without overthrow on roadways, sidewalks, window wells, or buildings and to protect trees from close high spray velocity.
 - 2. Layout work as closely as possible to drawings. Drawings are diagrammatic to the extent that swing joints, offsets and all fittings are not shown. Lines are to be common trenched wherever possible.
 - 3. Locations of control valves are schematic. Control valves shall be grouped wherever possible and aligned at a set dimension back of curb along roads.
 - 4. Irrigation lines and control wire shall run through designated utility lanes or beside roadways where possible.
 - 5. Connect new system to existing mains. Disconnect and abandon existing irrigation system.
- D. Maintenance and Operating Instructions: Prior to final acceptance, verbal instructions, for a period of not less than 8 hours, shall be provided to the operating personnel. Provide manuals as specified in Section 01 00 00, GENERAL REQUIREMENTS.
- E. Completely program controller according to approved irrigation schedule.
- F. Follow manufacturer's instructions for installation.
- G. Manufacturer of Control Systems to certify Control System is complete, including all related components, and totally operational. Submit certificate to Resident Engineer.
- H. As-Built Record Drawings: Maintain a complete set of as-built drawings which shall be corrected daily to show changes in locations of all pipe, valves, pumps and related irrigation equipment. Valves shall be shown with dimensions to reference points.
- I. Controller Chart:
 - 1. Prepare a map diagram showing location of all valves, lateral lines, and route of the control wires. Identify all valves as to size,

- station, number and type of irrigation. "As-built" drawings must be approved before charts are prepared.
2. Provide one controller chart showing the area covered by controller for each automatic controller supplied at the maximum size controller door will allow. Chart shall be a reduced drawing of the actual "as-built" system. If controller sequence is not legible when the drawing is reduced to door size, the drawing shall be enlarged to a size that is readable and placed folded, in a sealed plastic container, inside the controller door.
 3. Chart shall be a blackline print with a different color used to show area of coverage for each station. Charts must be completed and approved prior to final inspection of the irrigation system.

1.4 SUBMITTALS

- A. Submit as one package in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturers' Literature and Data:
 1. Piping.
 2. Jointing materials.
 3. Valves.
 4. Sprinkler heads.
 5. Quick couplers.
 14. Valve boxes.
- C. Complete detailed layout shop drawings covering design of system showing pipe sizes and lengths; fittings, locations, types and sizes of sprinkler heads; controls; valves; location and mounting details of electrical control equipment; complete wiring diagram showing routes and wire sizes; wiring details and source of current connections to existing services. Do not start work before final shop drawing approval.
- D. Name and address of a permanent service organization maintained or trained by the manufacturers that will render satisfactory service within eight hours of receipt of notification that service is requested.
- E. Reproducible "as-built" drawings.
- F. After "as-built" drawings have been approved, submit print of controller chart.

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):

- D1785-04a.....Poly(Vinyl Chloride) (PVC) Plastic Pipe,
Schedule 40, 80, and 120
- D2241-04b.....Poly(Vinyl Chloride) (PVC) Pressure-Rated Pipe
(SDR Series)
- D2287-96(2001).....Nonrigid Vinyl Chloride Polymer and Copolymer
Molding and Extrusion Compounds
- D2464-99e1.....Threaded Poly (Vinyl Chloride) (PVC) Plastic
Pipe Fittings, Schedule 80
- D2466-05.....Poly(Vinyl Chloride) (PVC) Plastic Pipe
Fittings, Schedule 40
- D2564-04.....Solvent Cements for Poly (Vinyl Chloride) (PVC)
Plastic Piping Systems
- D2855-96(2002).....Making Solvent Cemented Joints with Poly(Vinyl
Chloride) (PVC) Pipe and Fittings
- F477-02e1.....Elastomeric Seals (Gaskets) for Joining Plastic
Pipe

C. American Water Works Association (AWWA):

D. National Electrical Manufacturers Association (NEMA):

- 250-2003.....Enclosures for Electrical Equipment (1000 Volts
Maximum);

PART 2 - PRODUCTS

2.1 PIPING

- A. Irrigation Mains: Provide one of the following materials.
 - 1. Polyvinyl Chloride (PVC) Pressure Pipe, AWWA C900, PVC 1120, working pressure 1025 kPa (150 psi). Pipe shall conform to outside diameters of AWWA 151 cast iron pressure pipe to accommodate cast iron fittings.
- B. Irrigation Laterals: Polyvinyl Chloride, ASTM D2241, PVC 1120, SDR 21, solvent welded.
- C. Threaded Pipe: Polyvinyl Chloride, ASTM D1785, PVC 1120, Schedule 80, for threaded connections, risers and swing joints.
- D. Fittings:
 - 1. Irrigation Mains (PVC Pipe): AWWA 110.
 - 2. Irrigation Laterals: PVC, schedule 40, solvent welded socket type, ASTM D2466.
 - 3. Threaded Pipe: PVC, schedule 80, ASTM D2464.
 - 4. Swing Joints: Threaded fittings with elastomeric seals that allow 360 degree rotation, and designed for minimum 1375 kPa (200 psig) working pressure, may be used in lieu of standard threaded fittings.

E. Jointing Materials:

1. Irrigation Mains: Rubber gaskets, AWWA C111.
2. Irrigation Laterals: Solvent cement, ASTM D2564.

2.2 VALVES (EXCEPT CONTROL VALVES)

A. Underground Shut-Off Valves: Provide One of the Following:

1. Gate valves 50 mm (2 inches) and larger: Iron body, bronze mounted, double disc with parallel or inclined seats, non-rising stem turning clockwise to close, 1025 kPa (150 psi) minimum working pressure. AWWA C504.
2. Butterfly valves 80 mm (3 inches) and larger: cast iron body with stainless steel shaft, ductile iron valve disc and resilient rubber coated, 1025 kPa (150 psi) minimum pressure. AWWA C504.
3. Ball valves (for isolation valves 1-1/2" and smaller): Full-port ball valves with bronze body, PTFE seats, and 90 degree on/off handle. Ball valves to have NPT female end connections.

B. Operations:

1. Underground: furnish valves with 50 mm (2 inch) nut for T-Handle socket wrench operation.
2. All butterfly valves 150 mm (6 inches) and above shall have enclosed gear drive operators.
3. Ends of valves shall accommodate the type of pipe installed.

C. Check: Swing.

1. Smaller than 100 mm (4 inches): Bronze body and bonnet, ASTM B61 or B62, 850 kPa (125 pound) WSP.
2. One hundred mm (4 inches) and larger: Iron body, bronze trim, vertical or horizontal installation, flange connection, 1375 kPa (200 pound) WOG.

2.3 VALVE BOX

- A. Gate and Butterfly Valve: Valve boxes shall be precast concrete (from Rigid Cast Iron Forms) with compressive strength of the concrete in excess of 30 Mpa (4000 psi). Box shall be of such length to be adapted to depth of cover required over pipe at valve location. Mark box cover to differentiate between lawn irrigation system and domestic water supply system and set flush with finished grade. Provide 1" T handle socket wrenches of 15 mm (5/8 inch) round stock with sufficient length to extend 600 mm (2 feet) above top of deepest valve box cover.
- B. Control Valves: When in pavement, valve boxes shall be precast concrete (from Rigid Cast Iron Forms) with compressive strength of the concrete in excess of 30 MPa (4000 psi). In planter areas, valve boxes shall be HDPE structural foam Type A, Class III, green in color. Box shall be

minimum 475 mm (19 inches) long by 350 mm (14 inches) deep with key-lockable hinged cast iron cover.

1. After installation, label boxes with two 80 mm (3 inch) size stencils designated controller and circuit numbers with permanent white epoxy paint. Numbers shall be placed at center of valve cover and shall face nearest main road or service road.

2. Furnish 2 750 mm (30 inch) long valve adjustment keys.

2.4 AUTOMATIC CONTROL EQUIPMENT—INDEPENDENT ELECTRIC CONTROLLER WITH NO FLOW SENSING(FOR SMALLER INSTALLATIONS)

- A. Overall control concept: The electric automatic control system shall consist of one controller which operates individual remote control valves in accordance with timing schedules programmed into the independent unit. The location of the controller is shown on the drawings. Toro Custom Command Series, or equal.
- B. 4 independent programs.
- C. Seven (7) day calendar, odd/even day or day interval options of one (1) to thirty (30) days.
- D. Exclude a day option to allow for the selection of specific day(s) not to water.
- E. Three hundred sixty-five (365) day clock/calendar.
- F. Station run times of one (1) minute to ten (10) hours in one (1) minute increments.
- G. 16 total start times.
- H. Start time stacking within each program.
- I. Season adjust setting from ten (10) to two hundred (200) percent in ten (10) percent increments.
- J. Rain delay setting from one (1) to seven (7) days
- K. Automatic, semi-automatic, and manual and timed-manual operation.
- L. 10 position programming dial and LCD display.
- M. Lightning surge protection.
- N. Self-diagnostic circuit breakers that identify and override electrical malfunction of valves.
- O. Non-volatile memory to retain power during power failures of any duration.
- P. Battery backup to maintain accurate time for up to ninety (90) days.
- Q. Sensor hook-up with sensor override switch on faceplate.
- R. Weather-resistant, locking metal cabinet with heavy duty internal transformer.

2.5 CONTROL VALVES:

- A. Each sprinkler section shall be automatically operated by a control valve installed underground and operated by a 24-volt AC electric solenoid. Valves shall be globe type of heavy duty construction and shall have manual shut-off and flow control adjustment and provide for manual operation. Install valves with unions on each side to allow for easy removal. Valves shall have a minimum of 1025 kPa (150 psi) working pressure.
- B. Valves shall be diaphragm type designed to operate in water containing sand and debris and shall have a self cleaning type contamination filter to filter all water leading to the solenoid actuator and the diaphragm chamber. Valve shall incorporate a non-adjustable type opening and closing speed control for protection against surge pressures, or valves shall operate by means of a slow acting direct drive thermal hydraulic motor without ports, screens or diaphragms.
- C. Valves shall be completely serviceable from the top without removing valve body from the system. Furnish 3 750 mm (30 inch) long adjustment keys. Valves to operate at no more than 50 kPa (7 psi) pressure loss at manufacturers maximum recommended flow rate.

2.6 SPRINKLER HEADS

- A. Shall be of make, type and performance as indicated on drawings. The entire internal assembly including filter screen, to be capable of removal from the top without removing the sprinkler case from the riser.
- B. Rotary Pop-up Sprinklers: To be gear-driven.
 - 1. Full Circle Sprinklers: To be a dual or tri-nozzle combination type with positive drive by means of a water-driven gear assembly. Sprinkler head to rotate uniformly and to be driven by means of a train of gears. Sprinklers to be equipped with an integral anti-drain valve to be self-closing at pressures of 3.0m (10 feet) of head or less. Gears and pinions shall be assembled on stainless steel spindles in a water-lubricated sandproof gear case. An inlet screen shall prevent debris from entering the sprinkler and shall be removable with the internal assembly. Sprinklers outer case shall be constructed of corrosion resistant, impact resistant, heavy-duty ABS.
 - 2. Part circle sprinklers to be variable arc type as required with same type drive used for full circle heads.
- C. Shrub Spray Heads: Nozzle shall be pop-up or fixed spray type of standard, undersize or oversize configuration as noted on plans. The sprinkler body, stem, nozzle and screen shall be constructed of heavy-

duty, ultraviolet resistant plastic. It shall have a heavy duty stainless steel retract spring and a ratcheting system for alignment of the pattern. The sprinkler shall have a soft elastomer pressure-activated comolded wiper seal for cleaning debris from the pop-up stem. The sprinkler shall have a plastic or brass nozzle with an adjusting screw capable of regulating the radius and flow. The sprinkler shall be capable of housing protective, nonclogging filter screens or pressure compensating screens (PCS) under the nozzle.

2.7 QUICK COUPLERS

- A. Shall have all parts contained in a two-piece unit and shall consist of a coupler water seal valve assembly and a removable upper body to allow the spring and key track to be serviced without shut down of the main.
- B. Metal parts shall be brass.
- C. Lids shall be lockable vinyl covered and have springs for positive closure on key removal.
- D. Furnish 3 hose swivels and operating keys for each size coupler to the Resident Engineer.

2.8 LOW VOLTAGE CONTROL VALVE WIRE

Wire: Solid copper wire, Underwriters Laboratories Inc. approved for direct burial in ground. Size of wire shall be in accordance with manufacturer's recommendations, but in no case less than No. 14.

2.9 SPLICING MATERIALS: EPOXY WATERPROOF SEALING PACKET. LOW VOLTAGE CONTROLLER CABLE

Multi-strand cable, Underwriters Laboratories Inc. approved for direct burial in ground. Size and type of wire shall be in accordance with manufacturer's recommendations.

2.10 SLEEVE MATERIAL

PVC-1120-5DR 17, Schedule 40.

2.11 WARNING TAPE

Standard, 4-Mil polyethylene 76 mm (3 inch) wide tape, detectable type blue with black letters (if potable water), and imprinted with "CAUTION BURIED IRRIGATION WATER LINE BELOW.

A. TRACER WIRES

No. 14, Green, Type TW plastic-coated copper tracer wire shall be installed with non-metallic irrigation main lines.

PART 3 - EXECUTION**3.1 PIPE LAYING - GENERAL**

- A. Do not lay pipe on unstable material, in wet trench or when, in the opinion of Resident Engineer, trench or weather conditions are unsuitable for the work.
- B. Concrete thrust block shall be installed where the irrigation main changes direction as at ells and tees and where the irrigation main terminates. Pressure tests shall not be made for a period of 36 hours following the completion of pouring of the thrust blocks. Concrete thrust blocks for supply mains shall be sized and placed in strict accordance with the pipe manufacturer's specifications and shall be of an adequate size and so placed as to take all thrust created by the maximum internal water pressure.
- C. Allow a minimum of 80 mm (3 inches) between parallel pipes in the same trench.
- D. Hold pipe securely in place while joint is being made.
- E. Do not work over, or walk on, pipe in trenches until covered by layers of earth well tamped in place to a depth of 300 mm (12 inches) over pipe.
- F. Full length of each section of pipe shall rest upon the pipe bed with recesses excavated to accommodate bells or joints. Do not lay pipe on wood blocking.
- G. Install sprinkler lines to avoid heating trenches, electric ducts, storm and sanitary sewer lines, and existing water and gas mains, all of which have right of way.
- H. Clean interior of pipe of foreign matter before installation. Keep pipe clean during laying operations by means of plugs or other methods. When work is not in progress, securely close open ends of pipe and fittings to prevent water, earth, or other substances from entering.
- I. Minimum cover over water mains shall be 750 mm (30 inches). Control valves shall never be less than 80 mm (3 inches) below finished grade. Cover laterals to minimum depth of 600mm (24 inches).
- J. Existing sidewalks and curbs shall not be cut during trenching and installation of pipe. Install pipe under sidewalks and curbs by auger boring, or by tunneling. Repair or replace any concrete that cracks, due to settling, during the warranty period.
- K. Close pipe openings with caps or plugs during installation. Tightly cover and protect fixtures and equipment against dirt, water and chemical or mechanical injury. At completion of all work thoroughly clean fixtures, exposed materials and equipment.

- L. Warning tape shall be continuously placed 300 mm (12 inches) above sprinkler system water mains and laterals.

3.2 LAYING PLASTIC PIPE

- A. Shall be snaked in trench at least 1 meter to 100 meters (1 foot per 100 feet) to allow for thermal construction and expansion and to reduce strain on connections.
- B. Joints
 - 1. Solvent Welded Socket Type: ASTM D2855.
 - 2. Threaded Type: Apply liquid teflon thread lubricant of teflon thread type. After joint is made hand tight (hard), a strap wrench should be used to make up to two additional full turns.
 - 3. Elastomeric Gasket: ASTM F477.
 - a. Immediately before joining two lengths of PVC pipe, the inside of the bell or coupling, the outside of the spigot and the elastomeric gasket shall be thoroughly cleaned to remove all foreign material.
 - b. Lubrication of the joint and rubber gasket shall be done in accordance with the pipe manufacturer's specifications.
 - c. Care shall be taken that only the correct elastomeric gasket, compatible with the annular groove of the bell, is used. Insertion of the elastomeric gasket in the annular groove of the bell or coupling shall be in accordance with the manufacturer's recommendations. Pipe that is not furnished with a depth mark shall be marked before assembly to assure that the spigot end is inserted to the full depth of the joint.
 - d. The spigot and bell or coupling shall be aligned and pushed until the reference line on the spigot is flush with the end of the bell or coupling. Pushing shall be done in a smooth, steady motion.

3.3 INSTALLATION OF SPRINKLERS AND QUICK COUPLERS

- A. Sprinkler heads and quick couplers shall be placed on temporary nipples extending at least 80 mm (3 inches) above finished grade. After turf is established, remove temporary nipples, ensuring that no dirt or foreign matter enters outlet, and install sprinkler heads and quick couplers at ground surface as detailed.
- B. Place part-circle rotary sprinkler heads no more than 150 mm (6 inches) from edge, of and flush with top of adjacent walks, header boards, curbs, and mowing aprons, or paved areas at time of installation.
- C. Install all shrub sprays, sprinklers and quick couplers on swing joints as detailed on plans.

- D. Set shrub heads 200 mm (8 inches) above grade and 300 mm (1 foot) from edge of curb or pavement. Place adjacent to walls. Stake heads prior to backfilling trenches. Stakes to be parallel to riser.
- E. Install sprinklers and quick coupling valves on a swing joint assembly.

3.4 INSTALLATION OF CONTROL WIRING

- A. Wiring from master controllers to satellites and stub-cuts for future extension shall be located in trench with new mains or in separate trench at back of curb, unless cross-country route is shown. Locate in trench with mains when possible on cross-country routes.
- B. Wiring bundles located with piping shall be set with top of the bundle below top of the pipe. No two wires in any bundle shall be of the same color. Wires shall be bundled, and tied or taped at 4.5 m (15 foot) intervals. A numbered tag shall be provided at each end of a wire, i.e., at valve, at field located controllers and at master controller. The number at each end of wire to be the same.
- C. Splicing shall be held to a minimum. A pullbox shall be provided at each splice. No splices will be allowed between field located controllers and remote control valves.
- D. Provide 300 mm (12 inch) expansion loops in wiring at each wire connection or change in wire direction. Provide 600 mm (24 inch) loop at remote control valves.
- E. Power wiring for the operation of irrigation system shall not be run in same conduit as control wiring.

3.5 TRACER WIRE INSTALLATION

- A. Tracer wire shall be installed on bottom of trench, adjacent to vertical pipe projections, carefully installed to avoid stress from backfilling, and shall be continuous throughout length of pipe with spliced joints soldered and covered with insulation type tape.
- B. Tracer wire shall follow main line pipe and branch lines and terminate in yard box with gate valve controlling these main irrigation lines. Provide sufficient length of wire to reach finish grade, bend back end of wire to make a loop and attach a Dymo-Tape type plastic label with designation "Tracer Wire."
- C. Record locations of tracer wires and their terminations on project record documents.

3.6 SETTING OF VALVES

- A. No valves shall be set under roads, pavement or walks.
- B. Clean interior of valves of foreign matter before installation.
- C. Where pressure control valves are installed adjacent to remote control valve, they shall be housed in the same valve box.

- D. Set valve box cover flush with finished grade.

3.7 SLEEVING

- A. Furnish and install where pipe and control wires pass under walks, paving, walls, and other similar areas.
- B. Sleeving to be twice line size or greater to accommodate retrieval for repair of wiring or piping and shall extend 300 mm (12 inches) beyond edges of paving or construction.
- C. Bed sleeves with a minimum of 100 mm (4 inches) of sand backfill above top of pipe.

3.8 TEST AND FLUSHING

- A. Pressure Test: Pressure test lines before joint areas are backfilled. Backfill a minimum of 300 mm (12 inches) over the pipe to maintain pipe stability during test period. Test piping at hydraulic pressure of 1025 kPa (150 psi) for two hours. Maximum loss shall be 3 L/25 mm pipe diameter/300 m (0.8 gallons/inch pipe diameter/1000-feet). Locate pump at low point in line and apply pressure gradually. Install pressure gage shut-off valve and safety blow-off valve between pressure source and piping. Inspect each joint and repair leaks. Line shall be retested until satisfactory.
- B. Flushing: After testing, flush system with a minimum of 150 percent of operating flow passing through each pipe beginning with larger mains and continuing through smaller mains in sequence. Flush lines before installing sprinkler heads and quick couplers.
- C. Operation Test: Upon completion of the final adjustment of the sprinkler heads to permanent level at ground surface, test each sprinkler section by the pan test and visual test to indicate a uniform distribution within any one sprinkler head area and over the entire area. Operate the entire installation to demonstrate the complete and successful operation of all equipment.

- - - E N D - - -

**SECTION 32 90 00
PLANTING**

PART 1 - GENERAL**1.1 DESCRIPTION**

This work consists of furnishing and installing all planting materials required for landscaping hereinafter specified in locations as shown.

1.2 EQUIPMENT

Maintain all equipment, tools and machinery while on the project in sufficient quantities and capacity for proper execution of the work.

1.3 RELATED WORK

- A. Section 31 20 00, EARTH MOVING, Stripping Topsoil and Stock Piling.
- B. Section 01 45 29, TESTING LABORATORY SERVICES, Topsoil Testing.
- C. Section 31 20 00, EARTH MOVING, Topsoil Materials.
- D. Section 32 84 00, PLANTING IRRIGATION.
- E. Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

1.4 SUBMITTALS

- A. Samples: Submit the following samples for approval before work is started:

Inert Mulch	2.3 kg (5 pounds) of each type to be used.
Organic Mulch	2.3 kg (5 pounds) of each type to be used.
Pre-Emergent Herbicide	2.3 kg (5 pounds) of each type to be used.

- B. Certificates of Conformance or Compliance: Before delivery, notarized certificates attesting that the following materials meet the requirements specified shall be submitted to the Resident Engineer for approval:

- 1. Plant Materials (Department of Agriculture certification by State Nursery Inspector declaring material to be free from insects and disease).
- 2. Fertilizers.
- 3. Lime
- 4. Peat
- 5. Seed
- 6. Sod
- 7. Membranes

8. Asphalt Adhesive

- C. Manufacturer's Literature and Data:

1. Metal edging
2. Antidesiccant
3. Erosion control materials
4. Hydro mulch
5. Pre-emergent herbicide

- D. Licenses: Licenses of Arborist shall be submitted (one copy), to the Resident Engineer.

- E. Soil laboratory testing results and any soil amendment recommendations from the Contractor.

1.5 DELIVERY AND STORAGE

- A. Delivery:

1. Notify the Resident Engineer of the delivery schedule in advance so the plant material may be inspected upon arrival at the job site. Remove unacceptable plant material from the job site immediately.
2. Protect plants during delivery to prevent damage to root balls or desiccation of leaves. Protect trees during transport by tying in the branches and covering all exposed branches.
3. The use of equipment such as "tree spades" is permitted provided the plant balls are sized in accordance with ANSI Z60.1 and tops are protected from damage.
4. Deliver fertilizer and lime to the site in the original, unopened containers bearing the manufacturer's warranted chemical analysis, name, trade name or trademark, and in conformance to state and federal law. In lieu of containers, fertilizer and lime may be furnished in bulk and a certificate indicating the above information shall accompany each delivery.
5. During delivery: Protect sod, from drying out and seed from contamination.

- B. Storage:

1. Sprinkle sod with water and cover with moist burlap, straw or other approved covering, and protect from exposure to wind and direct sunlight. Covering should permit air circulation to alleviate heat development.
2. Keep seed, lime, and fertilizer in dry storage away from contaminants.
3. Store plants not installed on the day of arrival at the site as follows:

- a. Shade and protect plants from the wind when stored outside.
- b. Heel in bare root plants.
- c. Protect plants stored on the project from drying out at all times by covering the balls or roots with moist sawdust, wood chips, shredded bark, peat moss, or other similar mulching material.
- d. Keep plants, including those in containers, in a moist condition until planted, by watering with fine mist spray.

1.6 PLANTING AND TURF INSTALLATION SEASONS AND CONDITIONS

- A. Perform operations within the following dates: From April 1 to June 15 for spring and from August 15 to October 15 for fall, but not before irrigation system is installed, tested, and approved.
- B. No work shall be done when the ground is frozen, snow covered, too wet or in an otherwise unsuitable condition for planting. Special conditions may exist that warrants a variance in the specified planting dates or conditions. Submit a written request to the Resident Engineer stating the special conditions and proposal variance.

1.7 PLANT AND TURF ESTABLISHMENT PERIOD

- A. The Establishment Period for plants and turf shall begin immediately after installation, with the approval of the Resident Engineer, and continue until the date that the Government accepts the project or phase for beneficial use and occupancy. During the Plant and Turf Establishment Period the Contractor shall:
 1. Water all plants and turf to maintain an adequate supply of moisture within the root zone. An adequate supply of moisture is the equivalent of 25 mm (1 inch) of absorbed water per week either through natural rainfall or augmented by periodic watering. Apply water at a moderate rate so as not to displace the mulch or flood the plants and turf.
 2. Prune plants and replace mulch as required.
 3. Replace and restore stakes, guy wires, and eroded plant saucers as required.
 4. In plant beds and saucers, remove grass, weeds, and other undesired vegetation, including the root growth, before they reach a height of 75 mm (3 inches).
 5. Spray with approved insecticides and fungicides to control pests and ensure plant survival in a healthy growing condition, as directed by the Resident Engineer.
 6. Provide the following turf establishment:
 - a. Eradicate all weeds. Water, fertilize, overseed, and perform any other operation necessary to promote the growth of grass.

- b. Replant areas void of turf 0.1 m² (one square foot) and larger in area.
 - c. Mow the new lawn at least three times prior to the final inspection. Begin mowing when grass is 100 mm (4 inches) high. Mow to a 65 mm (2-1/2 inch) height.
7. Remove plants that die during this period and replace each plant with one of the same size and species.

1.8 PLANT AND TURF WARRANTY

- A. All work shall be in accordance with the terms of the FAR Clause 52.246-21, "Warranty", including the following supplements:
- B. A One Year Plant and Turf Warranty will begin on the date that the Government accepts the project or phase for beneficial use and occupancy. The Contractor shall have completed, located, and installed all plants and turf according to the plans and specifications. All plants and turf are expected to be living and in a healthy condition at the time of final inspection.
- C. The Contractor will replace any dead plant material and any areas void of turf immediately. A one year warranty for the plants and turf that was replaced, will begin on the day the work is completed.
- D. Replacement of relocated plants, that the Contractor did not supply, is not required unless they die from improper handling and care during transplanting. Loss through Contractor negligence requires replacement in kind and size.
- E. The Government will reinspect all plants and turf at the end of the One Year Warranty. The Contractor will replace any dead, missing, or defective plant material and turf immediately. The Warranty will end on the date of this inspection provided the Contractor has complied with the work required by this specification. The Contractor shall also comply with the following requirements:
 - 1. Replace dead, missing or defective plant material prior to final inspection.
 - 2. Mulch and weed plant beds and saucers. Just prior to this inspection, treat these areas to a second application of approved pre-emergent herbicide.
 - 3. From plants having been installed for one year, remove stakes, guy wires and any required tree wrappings.
 - 4. Complete remedial measures directed by the Resident Engineer to ensure plant and turf survival.
 - 5. Repair damage caused while making plant or turf replacements.

1.9 APPLICABLE PUBLICATIONS

- A. The publications listed below, form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. American National Standards Institute (ANSI) Publications:
 - ANSI Z60.1-1996.....Nursery Stock
 - ANSI Z133.1-2000.....Tree Care Operations-Pruning, Trimming, Repairing, Maintaining, and Removing Trees and Cutting Brush- Safety Requirements
- C. Hortus Third, A Concise Dictionary of Plants Cultivated in the U.S. and Canada, Wiley Publishers, 1976.
- D. American Society For Testing And Materials (ASTM) Publications:
 - C136-05(Rev. A).....Sieve Analysis of Fine and Coarse Aggregates
 - C516-80(Rev. 2002).....Vermiculite Loose Fill Thermal Insulation
 - C549-81(Rev. 2002).....Perlite Loose Fill Insulation
 - D977-98(Rev. 2003).....Emulsified Asphalt (ASTHO M140 1988)
 - D2028-97(Rev. 2004).....Cutback Asphalt (Rapid-curing Type)
 - D2103-97(Rev. 2003).....Polyethylene Film and Sheeting
- E. Turf Producers International:
 - Guideline Specifications to Turfgrass Sodding 1995 ed.
- F. U. S. Department of Agriculture Federal Seed Act of August 9, 1939:
 - 53 Stat. 1275.....Rules and Regulations
- G. American Wood Preservative Association (AWPA):
 - C2-02.....Lumber, Timbers, Bridge Ties and Mine Ties, Pressure Treatment

PART 2 - PRODUCTS

2.1 GENERAL

All plant and turf material will conform to the varieties specified or shown in the plant list and be true to botanical name as listed in Hortus Third.

2.2 PLANTS

- A. Plants shall be in accordance with ANSI Z60.1, except as otherwise stated in the specifications or shown on the plans. Where the drawings or specifications are in conflict with ANSI Z60.1, the drawings and specification shall prevail.
- B. Provide well-branched and formed planting stock, sound, vigorous, and free from disease, sunscald, windburn, abrasion, harmful insects or insect eggs with healthy, normal, and unbroken root systems. Provide trees, deciduous and evergreen, that are single trunked with a single leader, unless otherwise indicated, display no weak crotches. Provide

symmetrically developed deciduous trees and shrubs of uniform habit of growth, with straight boles or stems and free from objectionable disfigurements, and evergreen trees and shrubs with well developed symmetrical tops with typical spread of branches for each particular species or variety. Provide ground cover and vine plants with the number and length of runners for the size specified, and the proper age for the grade of plants specified. Provide vines and ground cover plants well established in removable containers, integral containers, or formed homogeneous soil sections. Plants shall have been grown under climatic conditions similar to those in the locality of the project. Spray all plants budding into leaf or having soft growth with an anti-desiccant at the nursery before digging.

- C. The minimum acceptable sizes of all plants, measured before pruning with branches in normal position, shall conform to the measurements designated. Plants larger in size than specified may be used with the approval of the Resident Engineer, with no change in the contract price. When larger plants are used, increase the ball of earth or spread of roots in accordance with ANSI Z60.1.
- D. Provide nursery grown plant material conforming to the requirements and recommendations of ANSI Z60.1. Dig and prepare plants for shipment in a manner that will not cause damage to branches, shape, and future development after planting.
- E. Balled and burlapped (B&B) plant ball sizes and ratios will conform to ANSI Z60.1, consisting of firm, natural balls of soil wrapped firmly with burlap or strong cloth and tied.
- F. Bare-root (BR) plants shall have the root system substantially intact, but with the earth carefully removed. Cover roots with a thick coating of mud by "puddling" after the plants are dug.
- G. Container grown plants shall have sufficient root growth to hold the earth intact when removed from containers, but shall not be root bound.
- H. Make substitutions only when a plant (or its alternates as specified) is not obtainable and the Resident Engineer authorizes a change order providing for use of the nearest equivalent obtainable size or variety of plant having the same essential characteristics with an equitable adjustment of the contract price.
- I. When existing plants are to be relocated, ball sizes shall conform to requirements for collected plants in ANSI Z60.1, and plants shall be dug, handled, and replanted in accordance with applicable sections of these specifications.

2.3 LABELS

Each plant, or group and bundles or containers of the same species, variety, and size of plant, shall be legibly tagged with a durable, waterproof and weather-resistant label indicating the correct plant name and size specified in the plant list. Labels shall be securely attached and not be removed.

2.4 TOPSOIL

- A. Topsoil shall be a well-graded soil of good uniform quality. It shall be a natural, friable soil representative of productive soils in the vicinity. Topsoil shall be free of admixture of subsoil, foreign matter, objects larger than 25 mm (one inch) in any dimension, toxic substances, weeds and any material or substances that may be harmful to plant growth and shall have a pH value of not less than 5.0 nor more than 7.5.
- B. Obtain material from stockpiles established under Section 31 20 00, EARTH MOVING, subparagraph, Stripping Topsoil, that meet the general requirements as stated above. Amend topsoil not meeting the pH range specified by the addition of pH Adjusters.
- C. If sufficient topsoil is not available on the site to meet the depth as specified herein, the Contractor shall furnish additional topsoil. At least 10 days prior to topsoil delivery, notify the Resident Engineer of the source(s) from which topsoil is to be furnished. Obtain topsoil from well drained areas. Additional topsoil shall meet the general requirements as stated above and comply with the requirements specified in Section 01 45 29, TESTING LABORATORY SERVICES. Amend topsoil not meeting the pH range specified by the addition of pH adjusters.

2.5 LIME

Lime shall be agricultural limestone containing not less than 90 percent calcium and magnesium carbonates. Lime must be ground to such a fineness that not less than 90% must pass No. 8 mesh and not less than 25% must pass No. 100 mesh. Moisture is not to exceed 10%.

2.6 SOIL CONDITIONERS

- A. Peat shall be a natural product of sphagnum moss peat, peat moss, or peat humus derived from a fresh-water site conforming to Fed. Spec. Q-P-166, except as otherwise specified. Peat shall be shredded and granulated to pass through a 13 mm (1/2 inch) mesh screen and conditioned in storage piles for at least six months after excavation.
- B. Coarse Sand

Coarse concrete sand, ASTM C-33 Fine Aggregate, shall be clean, sharp, free of limestone, shale and slate particles and of toxic materials.

- C. Perlite shall conform to ASTM C549.
- D. Vermiculite shall be horticultural grade and free of any toxic materials and conform to ASTM C516.
- E. Pine Bark shall be horticultural-grade milled pine bark, with 80 percent of the material by volume sized between 0.1 and 15.0 mm (.004in. and .59in.).
 - 1. Pine bark shall be aged sufficiently to break down all woody material. Pine bark shall be screened
 - 2. pH shall range between 4.0 and 7.0.
 - 3. Submit manufacturer's literature for approval.
- F. Organic Matter shall be commercially prepared compost, composted sufficiently to be free of all woody fibers, seeds, and leaf structures, and free of toxic and nonorganic matter.
- G. Fertilizer: Agricultural fertilizer of a formula indicated by the soil test. Fertilizers shall be organic, slow-release compositions whenever applicable

2.7 PLANTING SOIL MIXTURE

The planting soil mixture shall be composed of 5 parts topsoil, 1 part peat moss and 2 parts leaf humus.

2.8 BIOSTIMULANTS

Biostimulants shall contain soil conditioners, VAM fungi, and endomycorrhizal and ectomycorrhizal fungi spores and soil bacteria appropriate for existing soil conditions

2.9 PLANT FERTILIZER

- A. Provide plant fertilizer that is commercial grade and uniform in composition and conforms to applicable state and federal regulations.
- B. For new plant material, provide packet, table, or pellet forms of slow release fertilizers, bearing the manufacturer's warranted statement of analysis. Slow release fertilizers shall contain a minimum percentage by weight of 20% nitrogen (of which 50% percent will be organic 7% soluble & 13% insoluble), 10% available phosphoric acid, and 5% potash.
- C. For existing trees, provide granular fertilizer bearing the manufacturer's warranted statement of analysis. Granular fertilizer shall contain a minimum percentage by weight of 20% nitrogen (of which 50 percent shall be organic 7% soluble & 13% insoluble), 10% available phosphoric acid, and 5% potash.

2.10 TURF FERTILIZER

Provide turf fertilizer that is commercial grade, free flowing, uniform in composition, and conforms to applicable state and federal regulations. Granular fertilizer shall bear the manufacturer's warranted statement of analysis. Granular fertilizer shall contain a minimum percentage by weight of 10% nitrogen (of which 50 percent shall be organic), 6% available phosphoric acid, and 4% potash. Liquid starter fertilizer for use in the hydro seed slurry will be commercial type with 50 percent of the nitrogen in slow release form.

2.11 MEMBRANES

- A. Polyethylene shall conform to ASTM D2103 and shall be 0.1 mm (four mils) thick and clear in color.
- B. Fiberglass mat shall be of lime borosilicate glass fibers with an average fiber diameter of 0.3 mm (8 to 12 microns) and 50 to 100 mm (2 to 4 inch) strands of fiber bonded with phenol formaldehyde resin. The mat shall be 100 percent textile glass fiber. Mat shall be roll type, water permeable, and a minimum of 6 mm (1/4 inch) and maximum of 13 mm (1/2 inch) thick with a density of not less than 12 kg/m³ (3/4 pound per cubic foot).
- C. Landscape Fabric shall be a woven polyester fabric weighing 18 grams per square meter (5/8 oz per sq. yd) and with a 9,000 liter per minute flow rate per sq. meter (225 gal. per minute flow rate per sq. ft.) woven needle-punched polypropylene weighing 113 grams per square meter (4.8 oz. per sq. yd.) And a 950 liter per minute flow rate per sq. meter. (90 gal. per minute flow rate per sq. ft.)

2.12 MULCH

- A. Mulch shall be free from deleterious materials and shall be stored as to prevent inclusion of foreign material.
- B. Inert mulch materials shall be riverbank stone and shall range in size from 25 mm (one inch) to 65 mm (2-1/2 inches) in accordance with ASTM C 136.
- C. Organic mulch materials shall be double shredded hardwood:
 - 1. Straw for lawn seed bed mulch shall be stalks from oats, wheat, rye, barley, or rice that are free from noxious weeds, mold or other objectionable material. Straw shall be in an air-dry condition and suitable for placing with blower equipment.

2. Wood cellulose fiber for use with hydraulic application of grass seed and fertilizer shall consist of specially prepared wood cellulose fiber, processed to contain no growth or germination-inhibiting factors, and dyed an appropriate color to facilitate visual metering of the application of materials. On an air-dry weight basis, the wood cellulose fiber shall contain a maximum of 12 percent moisture, plus or minus three percent at the time of manufacture. The pH range shall be from 3.5 to 5.0. The wood cellulose fiber shall be manufactured so that:
 - a. After addition and agitation in slurry tanks with fertilizers, grass seeds, water, and other approved additives, the fibers in the material will become uniformly suspended to form a homogeneous slurry.
 - b. When hydraulically sprayed on the ground, the material will form a blotter like cover impregnated uniformly with grass seed.
 - c. The cover will allow the absorption of moisture and allow rainfall or applied water to percolate to the underlaying soil.

2.13 ASPHALT ADHESIVE

Asphalt adhesive for application with straw mulch shall be liquid asphalt conforming to ASTM D2028, designation RC-70, or emulsified asphalt conforming to ASTM D977, Grade RS-1.

2.14 EROSION CONTROL

- A. Erosion control net material shall be knitted synthetic netting interwoven with paper strips in rolls (approximately 1500 mm, (56-60 inches wide). Openings between strands approximately 13mm square (1/2 inch square). Material will be secured with 150 mm (6 inch) wire staples made by the same manufacturer as the netting. All erosion control material is to be installed according to the respective manufacturer's recommendations.
- B. Erosion control blanket material shall be cellulose fiber blanket bonded to 6 mm (1/4 inch) square plastic net weighing 10 kg/100 m² (20 pounds per 1000 square feet) in 1250 mm (50 inch) wide rolls.

2.15 TREE WRAP

- A. Crinkle Paper Tree wrap shall be two thicknesses of crinkled paper cemented together with a layer of bituminous material. Wrapping material shall be a minimum of 100 mm (4 inches) in width and have a stretch

factor of 33-1/3 percent. Twine for tying shall be lightly tarred medium or coarse sisal yarn.

2.16 STAKES AND GUYING WIRES

- A. Provide stakes for tree support of rough sawn wood, free from knots, rot, cross grain, or other defects that would impair the strength. Stakes shall be a minimum of 50 mm by 50 mm (2 inches by 2 inches), or 65 mm (2-1/2 inches) in diameter, by 2400 mm (8 feet) long and pointed at one end.
- B. Guying wire shall be 2.7 mm (12 gage) annealed galvanized steel.
- C. Hose chafing guards shall be new or used 2-ply reinforced rubber or plastic hose of all the same color on the project.
- D. Flags to be fastened to guys shall be surveyor's plastic tape, white in color and 150 mm (6 inches) in length.
- E. Guying cable shall be a minimum of five strand twisted, 5 mm (3/16 inch) diameter steel cable.
- F. Turnbuckles shall be galvanized or cadmium plated and have a 75 mm (3 inch) minimum lengthwise opening fitted with screw eyes.
- G. Eye bolts shall be galvanized or cadmium plated having a 50 mm (one inch) diameter eye with a minimum screw length of 40 mm (1-1/2 inches).
- H. Deadmen shall be 100 mm by 200 mm (4 inch by 8 inch) rectangular, or 200 mm (8 inch) diameter by 900 mm (36 inch) long sound wood.
- I. Arrow shaped or auger iron anchors shall be noncorrosive, and sized according to the manufacturer's recommendation.

2.17 EDGING

Metal edging shall be galvanized steel or aluminum with slots provided for stakes and shall be 5 mm (3/16 inch) thick by 100 mm (4 inches) deep in standard lengths. Steel edging shall be treated with a rust preventative coating and factory finished in color black_. Anchoring stakes shall be of similar material and 400 to 450 mm (16 to 18 inches) long and tapered.

2.18 WATER

Water shall not contain elements toxic to plant life. It shall be obtained as specified in Section 01 00 00, GENERAL REQUIREMENTS, paragraph, Temporary Services at no cost to the Contractor.

2.19 ANTIDESICCANT

Antidesiccant shall be an emulsion specifically manufactured for agricultural use that will provide a protective film over plant surfaces permeable enough to permit transpiration.

2.20 SEED

Seed shall be state-certified seed of the latest season's crop and shall be delivered in original sealed packages bearing the producer's warranted analysis for percentages of mixtures, purity, germination, weed seed content, and inert material. Seed shall be labeled in conformance with U. S. Department of Agriculture rules and regulations under the Federal Seed Act and applicable state seed laws. Seed that has become wet, moldy, or otherwise damaged will not be acceptable. Onsite seed mixing shall be done only in the presence of the Resident Engineer. Seed mixtures shall be proportioned by weight as follows:

NAME OF GRASS

(Botanical and Common)	<u>Percent by Weight</u>
Festuca rubra "Pennlawn"- Pennlawn Red Fescue	20%
Poa pratensis "Baron" - Baron Kentucky Blue Grass	60%
Lolium perenne "Manhattan II" - Manhattan II Perennial Rye Grass	20%

<u>Percent Germination</u>	<u>Maximum Percent Weed Seed</u>
90%	2%
90%	2%
90%	2%
_____	_____

2.21 HERBICIDES

All herbicides shall be properly labeled and registered with the U.S. Department of Agriculture. Keep all herbicides in the original labeled containers indicating the analysis and method of use.

PART 3 - EXECUTION**3.1 LAYOUT**

Stake plant material locations and bed outlines on project site for approval by the Resident Engineer before any plant pits or beds are dug. The Resident Engineer may approve adjustments to plant material locations to meet field conditions.

3.2 EXCAVATION FOR PLANTING

- A. Prior to excavating for plant pits and bed, verify the location of any underground utilities. Damage to utility lines will be repaired at the Contractor's expense. Where lawns have been established prior to planting operation, cover the surrounding turf before excavations are made in a manner that will protect turf areas. Barricade existing trees, shrubbery, and beds that are to be preserved in a manner that will effectively protect them during the project construction.
- B. Remove rocks and other underground obstructions to a depth necessary to permit proper planting according to plans and specifications. Where underground utilities, construction, or solid rock ledges are encountered, the Resident Engineer may select other locations for plant material.
- C. Dig plant pits by any approved method so that they have vertical sides and flat bottoms. When pits are dug with an auger and the sides of the pits become glazed, scarify the glazed surface. Size the plant pits as shown, otherwise, the minimum allowable dimensions of plant pits shall be regardless of width, 150 mm (6 inches) deeper for shrubs and 225 mm (9 inches) deeper for trees than the depth of ball or root spread; for ball or root spread up to 600 mm (2 feet), pit diameters shall be twice the ball or root spread; for ball or root spread from 600 to 1200 mm (2 to 4 feet), pit diameters shall be 600 mm (2 feet) greater; for ball or root spread over 1200 mm (4 feet), pit diameters shall be 1-1/2 times the ball or root spread.
- D. Where ground cover and planting beds occur in existing turf areas, remove turf to a depth that will ensure the removal of the entire root system, with additional bed preparation as specified in the next paragraph.
- E. Where existing soil is to be used in place, till new ground cover and plant beds to a depth of 100 mm (4 inches). Spread peatsoil amendment uniformly over the bed to depth of 50 mm (2 inches) and thoroughly incorporate it into the existing soil to a depth of 100 mm (4 inches) using a roto-tiller or similar type of equipment to obtain a uniform and well pulverized soil mix. During tillage operations, remove all sticks, stones, roots, and other objectionable materials. Bring plant beds to a smooth and even surface conforming to established grades.
- F. In areas of new grading where existing soil is being replaced for the construction of new ground cover and plant beds, remove 100 mm (4 inches) of existing soil and replace with topsoil. Plant beds shall be brought to a smooth and even surface conforming to established grades.

Till 50 mm (2 inches) of peatsoil amendment into the topsoil as specified.

- G. Using topsoil, form earth saucers or water basins for watering around plants. Basins to be 2" high for shrubs and 4" high for trees.
- H. Treat plant saucers, shrub, and ground cover bed areas, prior to mulching, with an approved pre-emergent herbicide. Plant ground cover in areas to receive erosion control material through the material after material is in place.

3.3 SETTING PLANTS

- A. Handle balled and burlapped and container-grown plants only by the ball or container. Remove container-grown plants in such a way to prevent damage to plants or root system. Set plants plumb and hold in position until sufficient soil has been firmly placed around the roots or ball. Set plants so that the root crown is 1" higher than the surrounding grade. Plant ground cover plants after the mulch is in place. Avoid contaminating the mulch with the planting soil. Add slow release packet, tablet or pellet fertilizer as each plant is installed as per manufacturer's recommendation for method of installation and quantity.
- B. Backfill balled and burlapped and container-grown plants with planting soil mixture as specified to approximately half the depth of the ball and then tamp and water. For balled and burlapped plants, carefully remove excess burlap and tying materials and fold back. Where plastic wrap or treated burlap is used in lieu of burlap, completely remove these materials before backfilling. Tamp and water remainder of backfill Planting Soil Mixture; then form earth saucers or water basins around isolated plants with topsoil.
- C. Plant bare-root stock arranging the roots in a natural position. Remove damaged roots with a clean cut. Carefully work Planting Soil Mixture in among the roots. Tamp and water the remainder of Planting Soil Mixture; then form earth saucers or water basins around isolated plants with topsoil.

3.4 TRUNK WRAPPING

Wrap the trunks of deciduous trees immediately after planting. Wrap the trunks of deciduous trees, 40 mm (1-1/2 inches) or greater in caliber with the specified material beginning at the base and extending to the first branches. Remove wrapping after one year. When using Crinkled

Paper Wrap, securely tie wrapping at the top and bottom and at 450 mm (18 inch) maximum intervals with twine.

3.5 STAKING AND GUYING

- A. Stake and guy plants as shown on the drawings and as specified.
- B. Drive stakes vertically into the ground to a depth of 800 to 900 mm (2-1/2 to 3 feet) in such a manner as not to injure the ball or roots, unless otherwise shown on the drawings.
- C. Place deadmen not less than 450 mm (18 inches) below the surface of the ground, unless otherwise shown on the drawings.
- D. Install iron anchors according to manufacturer's recommendations.
- E. Fasten flags securely on each guy, wire or cable approximately 2/3 of the distance up from ground level.
- F. Remove stakes and guy wires after one year.

3.6 EDGING PLANT BEDS

- A. Uniformly edge beds using a sharp tool to provide a clear cut division line between the planted area and the adjacent lawn.
- B. Install metal edging materials in accordance with manufacturer's recommendations and as shown on the plans.

3.7 MULCHING PLANTS

- A. Mulch within 48 hours after planting and applying a pre-emergent herbicide. Do not mulch in ground cover areas that shall have organic material placed before planting.
- B. Placing Organic Material: Spread a mulch to a uniform minimum thickness of 50 mm (2 inches).
- C. Keep mulch out of the crowns of shrubs and off buildings, sidewalks, light standards, and other structures.

3.8 PRUNING

- A. Prune new plant material and indicated existing plant material in the following manner: Remove dead, broken and crossing branches. Prune deciduous trees and shrubs to reduce total amount of anticipated foliage by 1/4 to 1/3 while retaining typical growth habit of individual plants with as much height and spread as is practicable. Make cuts with sharp instruments as close as possible to the branch collar. Do not make flush cuts. Do not make "Headback" cuts at right angles to line of growth. Do not pole trees or remove the leader. Remove trimmings from the site. Paint cuts 13 mm (1/2 inch) in diameter and larger with the specified tree wound dressing.

B. Existing trees to be pruned are shown on the drawings. Perform tree pruning and cavity work by in accordance with ANSI Z 133.1. Remove dead wood 13 mm (1/2 inch) or more in diameter, branches interfering with or hindering the healthy growth of the trees, and diseased branches with a clean cut made flush with the parent trunk. Cut back or remove branches as necessary to give the trees proper shape and balance. In removing large limbs, make the initial cut on the underside at a safe distance from the trunk or lateral, to prevent ripping of bark. Ensure branches and trimmings do not endanger traffic or cause damage to property during removal. Section large branches or limbs that cannot be removed in one piece without endangering traffic or property. Lower sections by ropes. Repair any damage resulting from the Contractor's negligence during pruning. Workmen are not permitted to climb trees with climbing spurs. To promote proper healing, cut off flush stubs or limbs that have resulted from improper cuts or broken as a result of former pruning. Remove girdling roots. Clean cuts or wounds measuring 13 mm (1/2 inches) or more in diameter, and exposed wood and scars resulting from previous work or damage. Remove decayed wood to expose healthy tissue. Shape cavities to provide drainage.

3.9 FERTILIZATION OF EXISTING TREES

Apply fertilizer to existing trees shown on the drawings at the rate of 36 g/mm (2 pounds per inch) caliper. Apply in 300 mm to 450 mm (12 inch to 18 inch) deep holes 40 to 50 mm (1-1/2 to 2 inches) in diameter, made by an earth auger, distributed evenly at not more than 600 mm (2 feet) on center throughout the outer half of the branch spread zone of each tree. Fertilize to within 100 mm (4 inches) of the surrounding grade. Use topsoil to bring the surface up to the surrounding grade. When using fertilizer in packet, tablet, or wedge form, apply in accordance with manufacturer's recommendations.

3.10 TILLAGE FOR TURF AREAS

Thoroughly till the soil to a depth of at least 100 mm (4 inches) by scarifying, disking, harrowing, or other approved methods. This is particularly important in areas where heavy equipment has been used, and especially under wet soil conditions. Remove all debris and stones larger than 25 mm (one inch) remaining on the surface after tillage in preparation for finish grading. To minimize erosion, do not till areas of 3:1 slope ratio or greater. Scarify these areas to a 50 mm (one inch) depth and remove debris and stones.

3.11 FINISH GRADING

After tilling the soil for bonding of topsoil with the subsoil, spread the topsoil evenly to minimum depths indicated on the Drawings.

Incorporate topsoil at least 50 to 75 mm (2 to 3 inches) into the subsoil to avoid soil layering. Do not spread topsoil when frozen or excessively wet or dry. Correct irregularities in finished surfaces to eliminate depressions. Protect finished topsoil areas from damage by vehicular or pedestrian traffic. Complete lawn work only after areas are brought to finished grade.

3.12 APPLICATION OF FERTILIZER AND LIME FOR TURF AREAS

- A. Apply turf fertilizer at the rate of 11 kg/100 m² (25 pounds per 1,000 square feet). In addition, adjust soil acidity and add soil conditioners as required herein for suitable topsoil under PART 2, Paragraph, TOPSOIL.
- B. Spread lime at the rate of _____ kg/100 m²(pounds per 1,000 square feet).
- C. Incorporate soil amendments into the soil to a depth of at least 100 mm (4 inches) as part of the finish grading operation. Immediately restore the soil to an even condition before any turf work.

3.13 MECHANICAL SEEDING

- A. Broadcast seed by approved sowing equipment at the rate of 3 kg/100 m² (6 pounds per 1,000 square feet). Sow one half of the seed in one direction, and the remainder sown at right angles to the first sowing. Cover seed to an average depth of 6 mm (1/4 inch) by means of spike-tooth harrow, cultipacker, or other approved device.
- B. Immediately after seeding, firm up the entire area with a roller not exceeding 225 kg/m (150 pounds per foot) of roller width. Where seeding is performed with a cultipacker-type seeder or where seed is applied in combination with hydro-mulching, no rolling is required.
- C. Immediately after preparing the seeded area, evenly spread an organic mulch of straw by hand or by approved mechanical blowers at the rate of 0.5 kg/m² (2 tons per acre). Application shall allow some sunlight to penetrate and air to circulate but also reduce soil and seed erosion and conserve soil moisture. Anchor mulch by either a mulch tiller, asphalt emulsion, twine, or netting. When asphalt emulsion is used, apply either simultaneously or in a separate application. Take precautionary measures to prevent asphalt materials from marking or defacing structures, pavements, utilities, or plantings.

3.14 HYDROSEEDING

When hydroseeding, mix the seed and slow release starter fertilizer, or the seed, fertilizer, lime when required and approved wood cellulose mulch material in the required amount of water to produce a homogeneous slurry and then uniformly apply slurry under pressure at the following rate. Slurry shall consist of 3 kg (6 pounds) of seed and 11 kg (25 pounds) of turf fertilizer in sufficient water to maintain a loose uniform consistency allowing the slurry to be easily applied. When using wood cellulose mulch, incorporate it as an integral part of the slurry mix after the seed and fertilizer have been thoroughly mixed. Apply the slurry mix at the rate of 18 kg/100 m² (40 pounds per 1,000 square feet) (dry weight).

3.15 WATERING

Apply water to the turf areas immediately following installation at a rate sufficient to ensure thorough wetting of the soil to a depth of at least 100 mm (4 inches). Supervise watering operation to prevent run-off. Supply all pumps, hoses, pipelines, and sprinkling equipment. Repair all areas damaged by water operations.

3.16 PROTECTION OF TURF AREAS

Immediately after installation of the turf areas, protect against traffic or other use by erecting barricades, as required, and placing approved signs at appropriate intervals until final acceptance.

3.17 EROSION CONTROL MATERIAL

- A. Install and maintain erosion control material meeting the requirements of this specification on the designated areas as shown and specified. Prepare, fertilize and vegetate the area(s) to be covered, as specified, before the erosion material is placed. Immediately following the planting operations, lay the material evenly and smoothly and in contact with the soil throughout. Omit the straw mulch from all seeded areas receiving the erosion control material.
- B. For waterways, unroll the material in the direction of waterflow. When two or more strips are required to cover a ditch area, they shall overlap at least 100 mm (4 inches). In case a strip is to be spliced lengthwise, the ends of the strips shall overlap at least 150 mm (6 inches) with the upgrade section on top.

- C. When using erosion control material on slopes, place the material either horizontally or vertically to the slope with the edges and ends of adjacent strips butted tightly against each other.
- D. Staple each strip in three rows (each edge and center with the center row alternately spaced) with staples spaced not more than 1200 mm (4 feet) longitudinally. When using two or more strips side by side on slopes, use a common row of staples on the adjoining strips. Staple all end strips at 300 mm (one foot) intervals at the end. Firmly embed staples in the underlying soil.
- E. Maintenance shall consist of repairs made necessary by erosion, wind, or any other cause. Maintain, protect, repair, or replace the erosion control material until the Termination of the Plant and Warranty Period.

3.18 RESTORATION AND CLEAN-UP

Where existing or new turf areas have been damaged or scarred during planting and construction operations, restore disturbed area to their original condition. Keep at least one paved pedestrian access route and one paved vehicular access route to each building clean at all times. In areas where planting and turf work have been completed, clear the area of all debris, spoil piles, and containers. Clear all other paved areas when work in adjacent areas is completed. Remove all debris, rubbish and excess material from the station.

3.19 ENVIRONMENTAL PROTECTION

All work and Contractor operations shall comply with the requirements of Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.

- - - E N D - - -