

A

one and one half inches = one foot

6"

0"

2

B

one inch = one foot

6"

0"

2

C

three quarters inch = one foot

6"

0"

4

D

one half inch = one foot

6"

0"

8

E

one quarter inch = one foot

6"

0"

16


F

one eighth inch = one foot

6"

0"

16

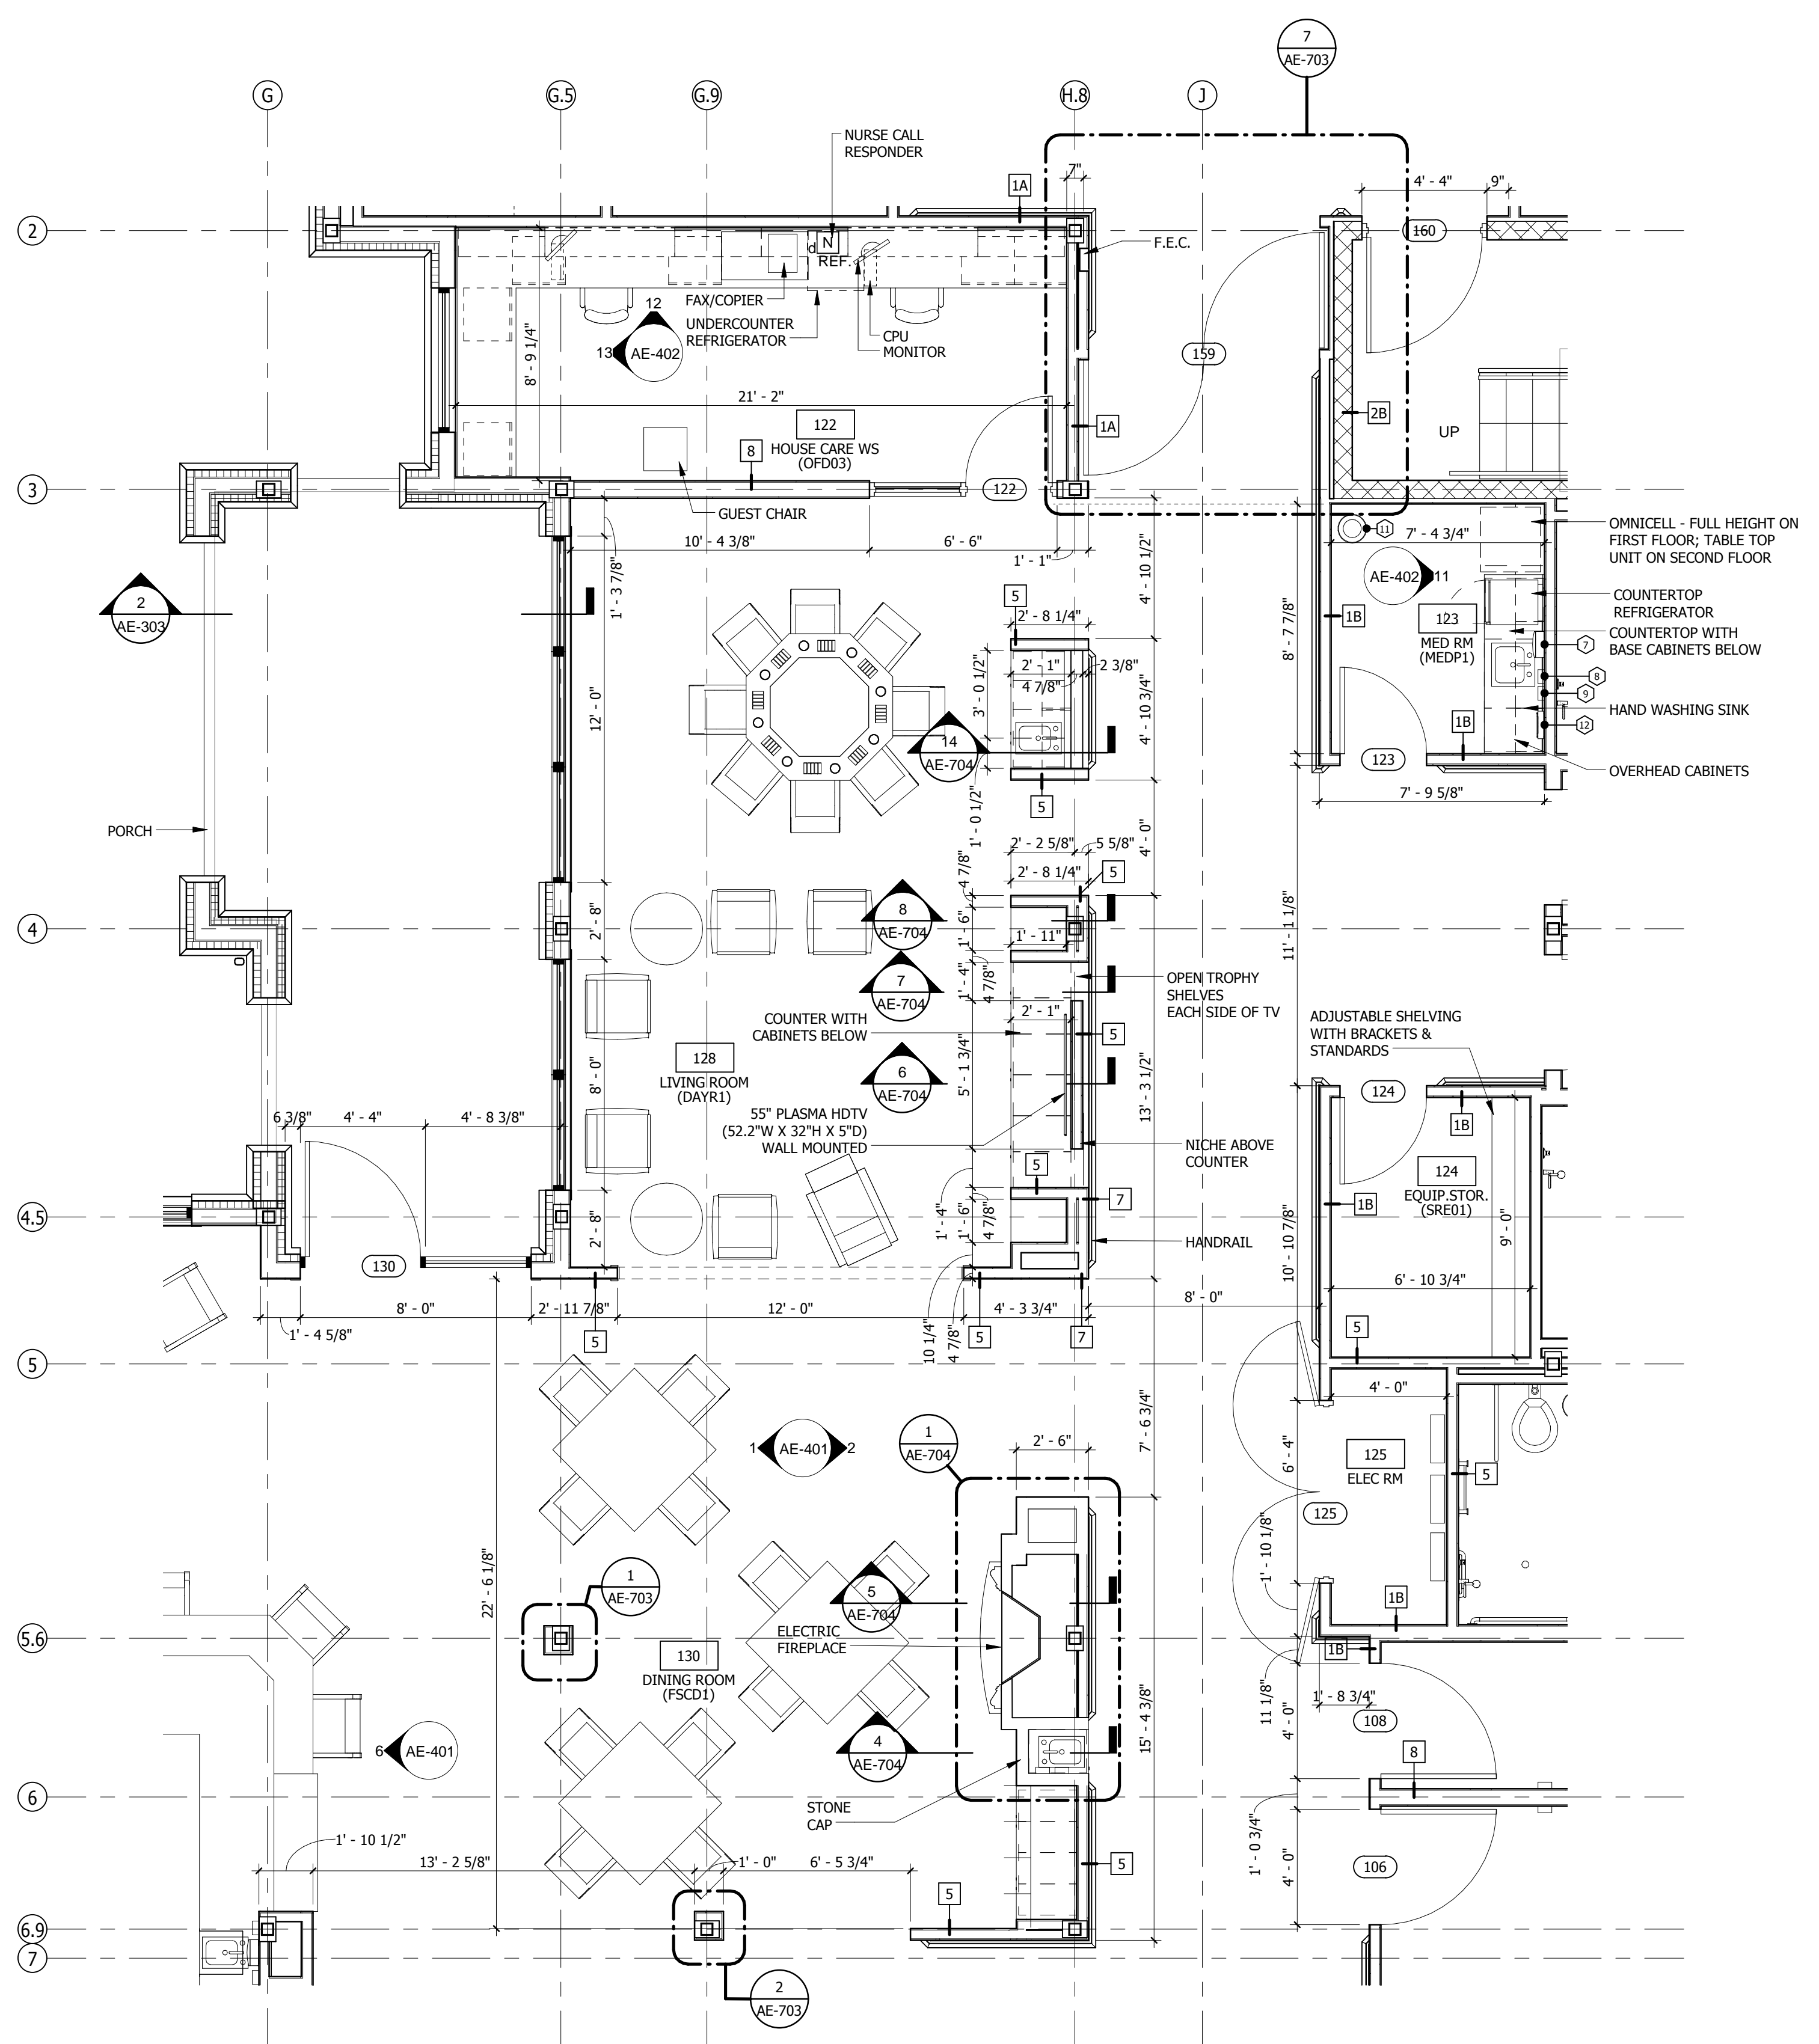

1

COMMON AREAS ENLARGED PLAN

SCALE 1/4" = 1'-0"

PROJECT NORTH

TRUE NORTH

GENERAL NOTES:

- INTERIOR DIMENSIONS GIVEN ARE FROM FINISH TO FINISH OR TO CENTERLINE OF COLUMN UNLESS NOTED OTHERWISE.
- TOLERANCES FOR BUILT-IN ITEMS, INCLUDING ARCHITECTURAL WINDOWS, CASEWORK AND APPLIANCES, MUST BE FIELD VERIFIED BY THE CONTRACTOR TO ENSURE ADEQUATE CLEARANCES AND PROPER FIT.
- REFER TO REFLECTED CEILING PLANS FOR CEILING HEIGHTS AND TYPES.
- REFER TO SPECIFICATIONS FOR FINISHES AND MANUFACTURERS.
- REFER TO 1/8" SCALE FLOOR PLANS FOR DOOR DESIGNATIONS AND 1/8" SCALE EXTERIOR ELEVATIONS FOR WINDOW DESIGNATIONS.
- REFER TO A700 SERIES FOR TYPICAL MOUNTING HEIGHTS OF ACCESSORIES AND DEVICES. PROVIDE FIRE RETARDANT WOOD BLOCKING FOR ACCESSORIES AND DEVICES. SEE DETAIL 19/A702 FOR GRAB BAR AND CABINETS METAL BLOCKING.
- ALL DISPENSERS, INCLUDING SHARPS, PAPER TOWEL, SOAP, HAND SANITIZER AND GLOVE DISPENSERS ARE FURNISHED BY THE GOVERNMENT & INSTALLED BY THE CONTRACTOR.
- REFER TO LIFE SAFETY PLANS FOR LOCATION OF FIRE RATED PARTITIONS.
- PROVIDE FIBER-REINFORCED WATER & MOLD RESISTANT GYPSUM PANELS AT ALL WET WALL LOCATIONS AND WALLS BEHIND AND ADJACENT TO SINKS.
- CONFIRM ALL CABINET & COUNTER TOP LAYOUTS WITH SHOP DRAWINGS.
- REFER TO KITCHEN EQUIPMENT DRAWINGS FOR ALL APPLIANCE INFORMATION.


PARTITION TYPES:

- 1 HOUR FIRE-RATED BARRIER OR 1 HOUR FIRE RATED SMOKE BARRIER 5/8" FIRE-RATED GYP.BD. ON BOTH SIDES OF 3 5/8" METAL STUDS @ 16" O.C. FROM FLOOR TO ROOF OR FLOOR DECK ABOVE. PROVIDE RATE SEALANT AT TOP AND BOTTOM EDGES OF GYP. BD. PROVIDE FIRE SAFING AT FLUTES OF FLOOR OR ROOF DECK ABOVE PER UL NO. U415.
- 0 HOUR SMOKE PARTITION (NON-RATED) CORRIDOR PARTITION, SMOKE SEALED TOP, AT RATED CEILING AND AT FLOOR. 5/8" GYP.BD. ON BOTH SIDES OF 3 5/8" METAL STUDS, 16" O.C., (AT CHASE WALLS, PROVIDE GYP.BD. ON FINISHED SIDE OF STUDS.)
- 2 HOUR FIRE-RATED BARRIER 2 LAYERS 5/8" FIRE-RATED GYP.BD. ON BOTH SIDES OF 3 5/8" METAL STUDS @ 16" O.C. SEAL GYP.BD. AT FLOOR AND AT ROOF DECK OR FLOOR STRUCTURE ABOVE. PROVIDE FIRE SAFING AT FLUTES OF FLOOR OR ROOF DECK ABOVE PER UL NO. U415.
- 1 HOUR FIRE-RATED BARRIER NOMINAL 8"x8"x16" CONCRETE MASONRY UNIT TO UNDERSIDE OF RATED STRUCTURE ABOVE PER IBC TABLE 720.1(2), ADD ONE LAYER OF 5/8" GYP. BD. ON ONE SIDE OF 1 5/8" METAL STUD FURRING @ 16" O.C. SEAL TOP OF WALL WITH FIRE SAFING AT ROOF OR FLOOR DECK ABOVE.
- 1 HOUR FIRE-RATED BARRIER NOMINAL 8"x8"x16" CONCRETE MASONRY UNITS TO UNDERSIDE OF RATED STRUCTURE PER IBC TABLE 720.1(2).
- 1 HOUR FIRE-RATED SHAFT WALL 2 1/2" C/H STUDS AT 24" O.C. COVERED ONE SIDE W/ ONE LAYER 5/8" TYPE "X" GYPSUM BOARD, OPPOSITE SIDE COVERED W/ 1" GYPSUM PANELS, PER UL NO. U415A.
- 2 HOUR FIRE-RATED SHAFT WALL 2 1/2" C/H STUDS AT 24" O.C. COVERED ONE SIDE W/ TWO LAYERS 5/8" TYPE "X" GYPSUM BOARD, OPPOSITE SIDE COVERED W/ 1" GYPSUM PANELS, PER UL NO. U415B.
- 2 HOUR FIRE-RATED BARRIER 8" CMU FROM FLOOR TO STRUCTURE ABOVE; SEAL TOP OF WALL WITH FIRE SAFING AT ROOF OR FLOOR DECK ABOVE PER UL NO. U905.
- TYPICAL PARTITION 5/8" GYP. BD. ON BOTH SIDES OF 3 5/8" METAL STUDS, @ 16" O.C., GYP. BD. TO STRUCTURE ABOVE.
- SAME AS (5) W/ 2" SOUND ATTENUATION BLANKETS
- NOT USED.
- CHASE WALL (WIDTH VARIES) 5/8" GYP. BD. ON ONE SIDE OF STAGGERED 3 5/8" METAL STUDS, @ 16" O.C. PROVIDE GYP.BD. ON EACH FINISH SIDE OF CHASE, GYP.BD. TO FIRE-RATED CEILING OR ROOF ASSEMBLY ABOVE.
- SAME AS (7) W/ 2" SOUND ATTENUATION BLANKETS IN BOTH LINES OF STUDS.
- 5/8" GYP.BD. ON BOTH SIDES OF 6" METAL STUDS
- 0 HOUR RATED PARTITION W/ SOUND RATING 1/4" BASE LAYER GYP.BD. W/ 5/8" GYP.BD. ON BOTH SIDES OF 2 1/2" METAL STUDS @ 24" O.C., W/ 1" SOUND INSULATION (STCSS)
- LOW WALL PARTITION 5/8" GYP. BD. ON BOTH SIDES OF 3 5/8" METAL STUDS @ 16" O.C., TO HEIGHT OF COUNTER TOP
- FOR TOILET RM PARTITIONS FACING A PUBLIC CORRIDOR, 2" SOUND ATTENUATION SHOULD BE ADDED.

TOILET ACCESSORIES LEGEND:

- ITEMS PURCHASED AND INSTALLED BY CONTRACTOR:**
- SWING UP GRAB BARS W/ INTEGRATED TOILET PAPER DISPENSER
 - SHOWER GRAB BAR
 - TOWEL BAR
 - SHOWER TRANSFER SEAT
 - ROBE HOOK
 - RECESSED MEDICINE CABINET - REFER TO SPECIFICATIONS
- ITEMS PURCHASED BY GOVERNMENT AND INSTALLED BY CONTRACTOR:**
- TOILET PAPER DISPENSERS SIDE BY SIDE DOUBLE ROLL BATHROOM DISPENSER (#56784) BY GEORGIA PACIFIC
 - PAPER TOWEL HOLDERS SOPPULL TRANSLUCENT SMOKE DISPENSER (CENTER PULL) (#F580N) (SIZE: 11.5" x 9.25" x 8.75") FOR ROLLS
 - SOAP DISPENSER BACTI-FOAM SOAP DISPENSER (#92723188) FOR BACTI-FOAM SOAP (#EL61806-499) BY ECOLAB
- ITEMS PURCHASED AND INSTALLED BY GOVERNMENT:**
- HAND SANITIZER DISPENSER
 - SHARPS CONTAINER
 - WASTE BASKET
 - GLOVES DISPENSER

BID DOCUMENTS FULLY SPRINKLERED

| | | | | | | | | | | | | | |
|------------|--|--------------|--|---|--|---------------------------------|--|---|--|---------------------------------|--|--|--|
| | | CONSULTANTS: | | ARCHITECT/ENGINEERS: | | Drawing Title ENLARGED PLANS | | Project Title RELOCATE DEMENTIA UNIT | | Project Number VA PN 613-107 | | Office of Construction and Facilities Management Department of Veterans Affairs | |
| | | | |  C.C. HODGSON ARCHITECTURAL GROUP P.C. | | Approved: Project Director | | Building Number 513 | | Building Number 513 | | | |
| | | | | | | | | Location VAMC MARTINSBURG | | Drawing Number AE-106 | | | |
| Revisions: | | Date | | | | | | Date 8/6/2012 | | Checked Checker | | Drawn Author | |