



A




B

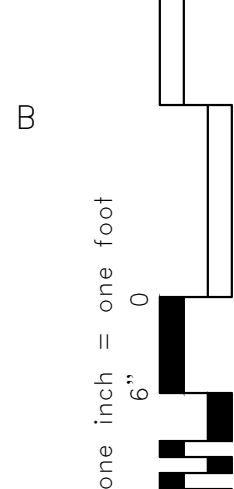


C

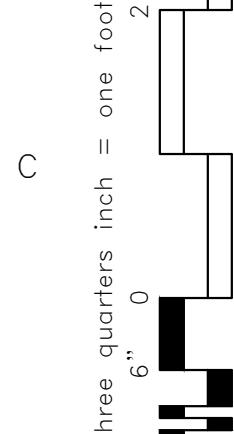


D

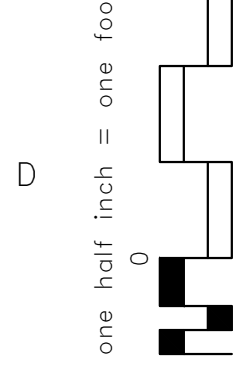

E

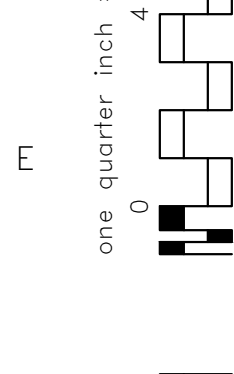

F

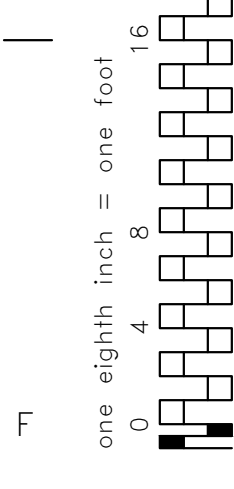

A

B

C

D

E

F

UTILITY LOAD SCHEDULE				ELECTRICAL												PLUMBING																VENTILATION						MECHANICAL																									
ITEM NO.	QTY	DESCRIPTION	SCHEDULE REMARKS	ELEC. CONN.	VOLT/PH	AFF	AMPS	KW	H.P.	ELEC. CONN.	VOLT/PH	AFF	AMPS	KW	H.P.	ELECTRICAL REMARKS	CW	CW AFF	HW	HW AFF	IW	IW TO	DW	DW AFF	GAS	GAS AFF	MBTU /HR	CTW	CTWR	GPM	MAX. PSI	EXHAUST	CFM	SPWG	SUPPLY	CFM	SPWG	MECHANICAL REMARKS																									
001	-	Open Number	N/A																																																												
002	1	Front Counter	Provided By Contractor																																																												
003	1	Work Counter	Provided By Contractor	(2) DR	120/1	32"										Convenience Receptacles																																															
004	2	Sinks with Faucet	Provided By Contractor														1/2"	36"	1/2"	36"	(2) 1 1/2"	to FS																	VERIFY																								
005	1	Double Wall Oven	Provided By Contractor	EC	208/1	24"	40									VERIFY																																															
006	1	Exhaust Hood	Provided By Contractor	EC	120/1	96"	15																																																								
006A	1	Fire Suppression System	Provided By Contractor	EC	120/1	84"	15																																																								
007	4	Electric Cooktop	Provided By Contractor	EC	240/1	34"	15									VERIFY																																															
008	1	Refrigerator/Freezer	Provided By Government	SR	120/1	48"	15									VERIFY	1/4"	75"																				VERIFY																									
009	1	Beverage Counter	Provided By Contractor	(2) DR	120/1	38"										Convenience Receptacles																																															
010	1	Wall Cabinet	Provided By Contractor																																																												
011	1	Waste Disposer	Provided By Contractor	EC	120/1	18"	10.2									Verify					1 1/2"	to FS																Verify																									
012	3	Waste Container	Provided By Government																																																												
013	1	Hand Sink with Faucet	Provided By Contractor														1/2"	36"	1/2"	36"			1 1/2"	18"														VERIFY																									
014	1	Front Counter	Provided By Contractor																																																												
015	1	Work Counter	Provided By Contractor	DR	120/1	38"										Convenience Receptacles																																															
016	1	Work Counter	Provided By Contractor	DR	120/1	38"										Convenience Receptacles																																															
017	1	Under Counter Microwave	Provided By Government	SR	120/1	24"	15									Verify																																															
017A	-	Open Number	N/A																																																												
018	1	Holding/Re therm Unit	Provided By Government	SR	208/3	18"	16									VERIFY																																															
019	1	Work Table	Provided By Government																																																												
020	1	Coffee Maker	Provided By Government	SR	120/1	48"	10									Verify																																															
021	1	Undercounter Dishwasher	Provided By Contractor	EC	208/3	28"	29.5												3/4"	2"	3/4"	to FS																Verify Incoming Water Temperature																									
022	1	Hand Sink	Provided By Contractor														1/2"	36"	1/2"	36"			1 1/2"	24"														VERIFY																									
023	1	Reach In Refrigerator	Provided By Government	SR	120/1	90"	8.0																																																								
024	1	Reach In Freezer	Provided By Government	SR	120/1	90"	11.5																																																								
025	2	Wall Shelf	Provided By Contractor																																																												
026	1	Hot Beverage Dispenser	Provided By Government	SR	120/1	48"	15										1/4"	42"																				Interconnect Water Line to Water Filter Item 026A																									
026A	1	Water Filter	Provided By Contractor														1/2"	60"																				Interconnect Water Line to Coffee Brewer Item 026 and Juice Dispenser Item 027																									
027	1	Juice Dispenser	Provided By Government	SR	120/1	48"	4.5										3/8"	48"																				Interconnect Water Line Water Filter Item 026A																									
028	1	Blender	Provided By Government	SR	120/1	48"	12.5																																																								
029	1	Soap and Towel Dispenser	Provided By Government																																																												
030	1	Cabinet with Doors	Provided By Contractor																																																												
031	1	Ice Dispenser	Provided By Government	SR	120/1	48"	15.1										1/4"	42"			3/4" 5/8"	To FFD																	Interconnect Water Line to Water Filter Item 031A																								
031A	1	Water Filter, Ice	Provided By Contractor														1/2"	60"																																													
ABBREVIATIONS				SR - SINGLE RECEPTACLE DR - DUPLEX RECEPTACLE EC - ELECTRICAL CONNECTION JB - JUNCTION BOX												SW - SWITCH AFF - ABOVE FINISHED FLOOR AMPS - AMPERES												KW - KILOWATT HP - HORSE POWER DFA - DOWN FROM ABOVE												CW - COLD WATER HW - HOT WATER IWL - INTERCONNECTED WATER LINE IW - INDIRECT WASTE DW - DIRECT WASTE						FFD - FUNNEL FLOOR DRAIN FS - FLOOR SINK FD - AREA FLOOR DRAIN AG - AIR GAP MBTU - 1000'S BTU						CTW - COOLING TOWER WATER CTWR - COOLING TOWER WATER RETURN GPM - GALLONS/MINUTE PSI - LBS/SQUARE INCH AFF - ABOVE FINISHED FLOOR DFA - DOWN FROM ABOVE						CFM - CUBIC FEET/MINUTE SPWG - STATIC PRESSURE WATER GAUGE					
				NIKEC - NOT IN KITCHEN EQUIPMENT CONTRACT																																																											
NOTE: ALL LOADS SHOWN ARE FOR SINGLE QUANTITY. MULTIPLY LOAD BY QUANTITY FOR MULTIPLE UNITS.																																																															
NOTE: THIS DRAWING IS FOR INFORMATION ONLY.																																																															

NOTE: THIS DRAWING IS FOR INFORMATION ONLY.

GENERAL CONTRACTOR SHALL COORDINATE WITH THE KITCHEN EQUIPMENT SUB-CONTRACTOR AND RELATED MECHANICAL, ELECTRICAL AND PLUMBING SUB-CONTRACTORS TO ESTABLISH FINAL SPOT CONNECTIONS LOCATIONS AND CONFIGURATIONS AS REQUIRED. THIS DRAWING SHALL NOT BE USED TO LOCATE ANY UTILITY CONNECTIONS IN THE FIELD OR TO LOCATE ANY ROUGH-IN, PENETRATION, OR OTHER REQUIREMENTS.

CINI • LITTLE INTERNATIONAL, INC.

BID DOCUMENTS
FULLY SPRINKLERED

		CONSULTANTS:				ARCHITECT/ENGINEERS:		Drawing Title		Project Title		Project Number		Office of Construction and Facilities Management					
		 CINILITTLE INTERNATIONAL, INC. 20251 CENTURY BOULEVARD, SUITE 375 GERMANTOWN, MD 20874-1114 USA 301-528-9700 OFFICE 301-528-9711 FAX www.cinilittle.com						Foodservice Equipment Utility Load Schedule		RELOCATE DEMENTIA UNIT		VA PN 613-107							
												Building Number 513							
								Approved: Project Director		Location VAMC MARTINSBURG		Drawing Number QF105							
										Date 8/6/2012		Checked LKL		Drawn CAD		Dwg. of --		 Department of Veterans Affairs	
Revisions:		Date																	