


one eighth inch = one foot
one quarter inch = one foot
three eighths inch = one foot
one half inch = one foot
three quarters inch = one foot
one inch = one foot
one and one half inches = one foot
two inches = one foot
three inches = one foot

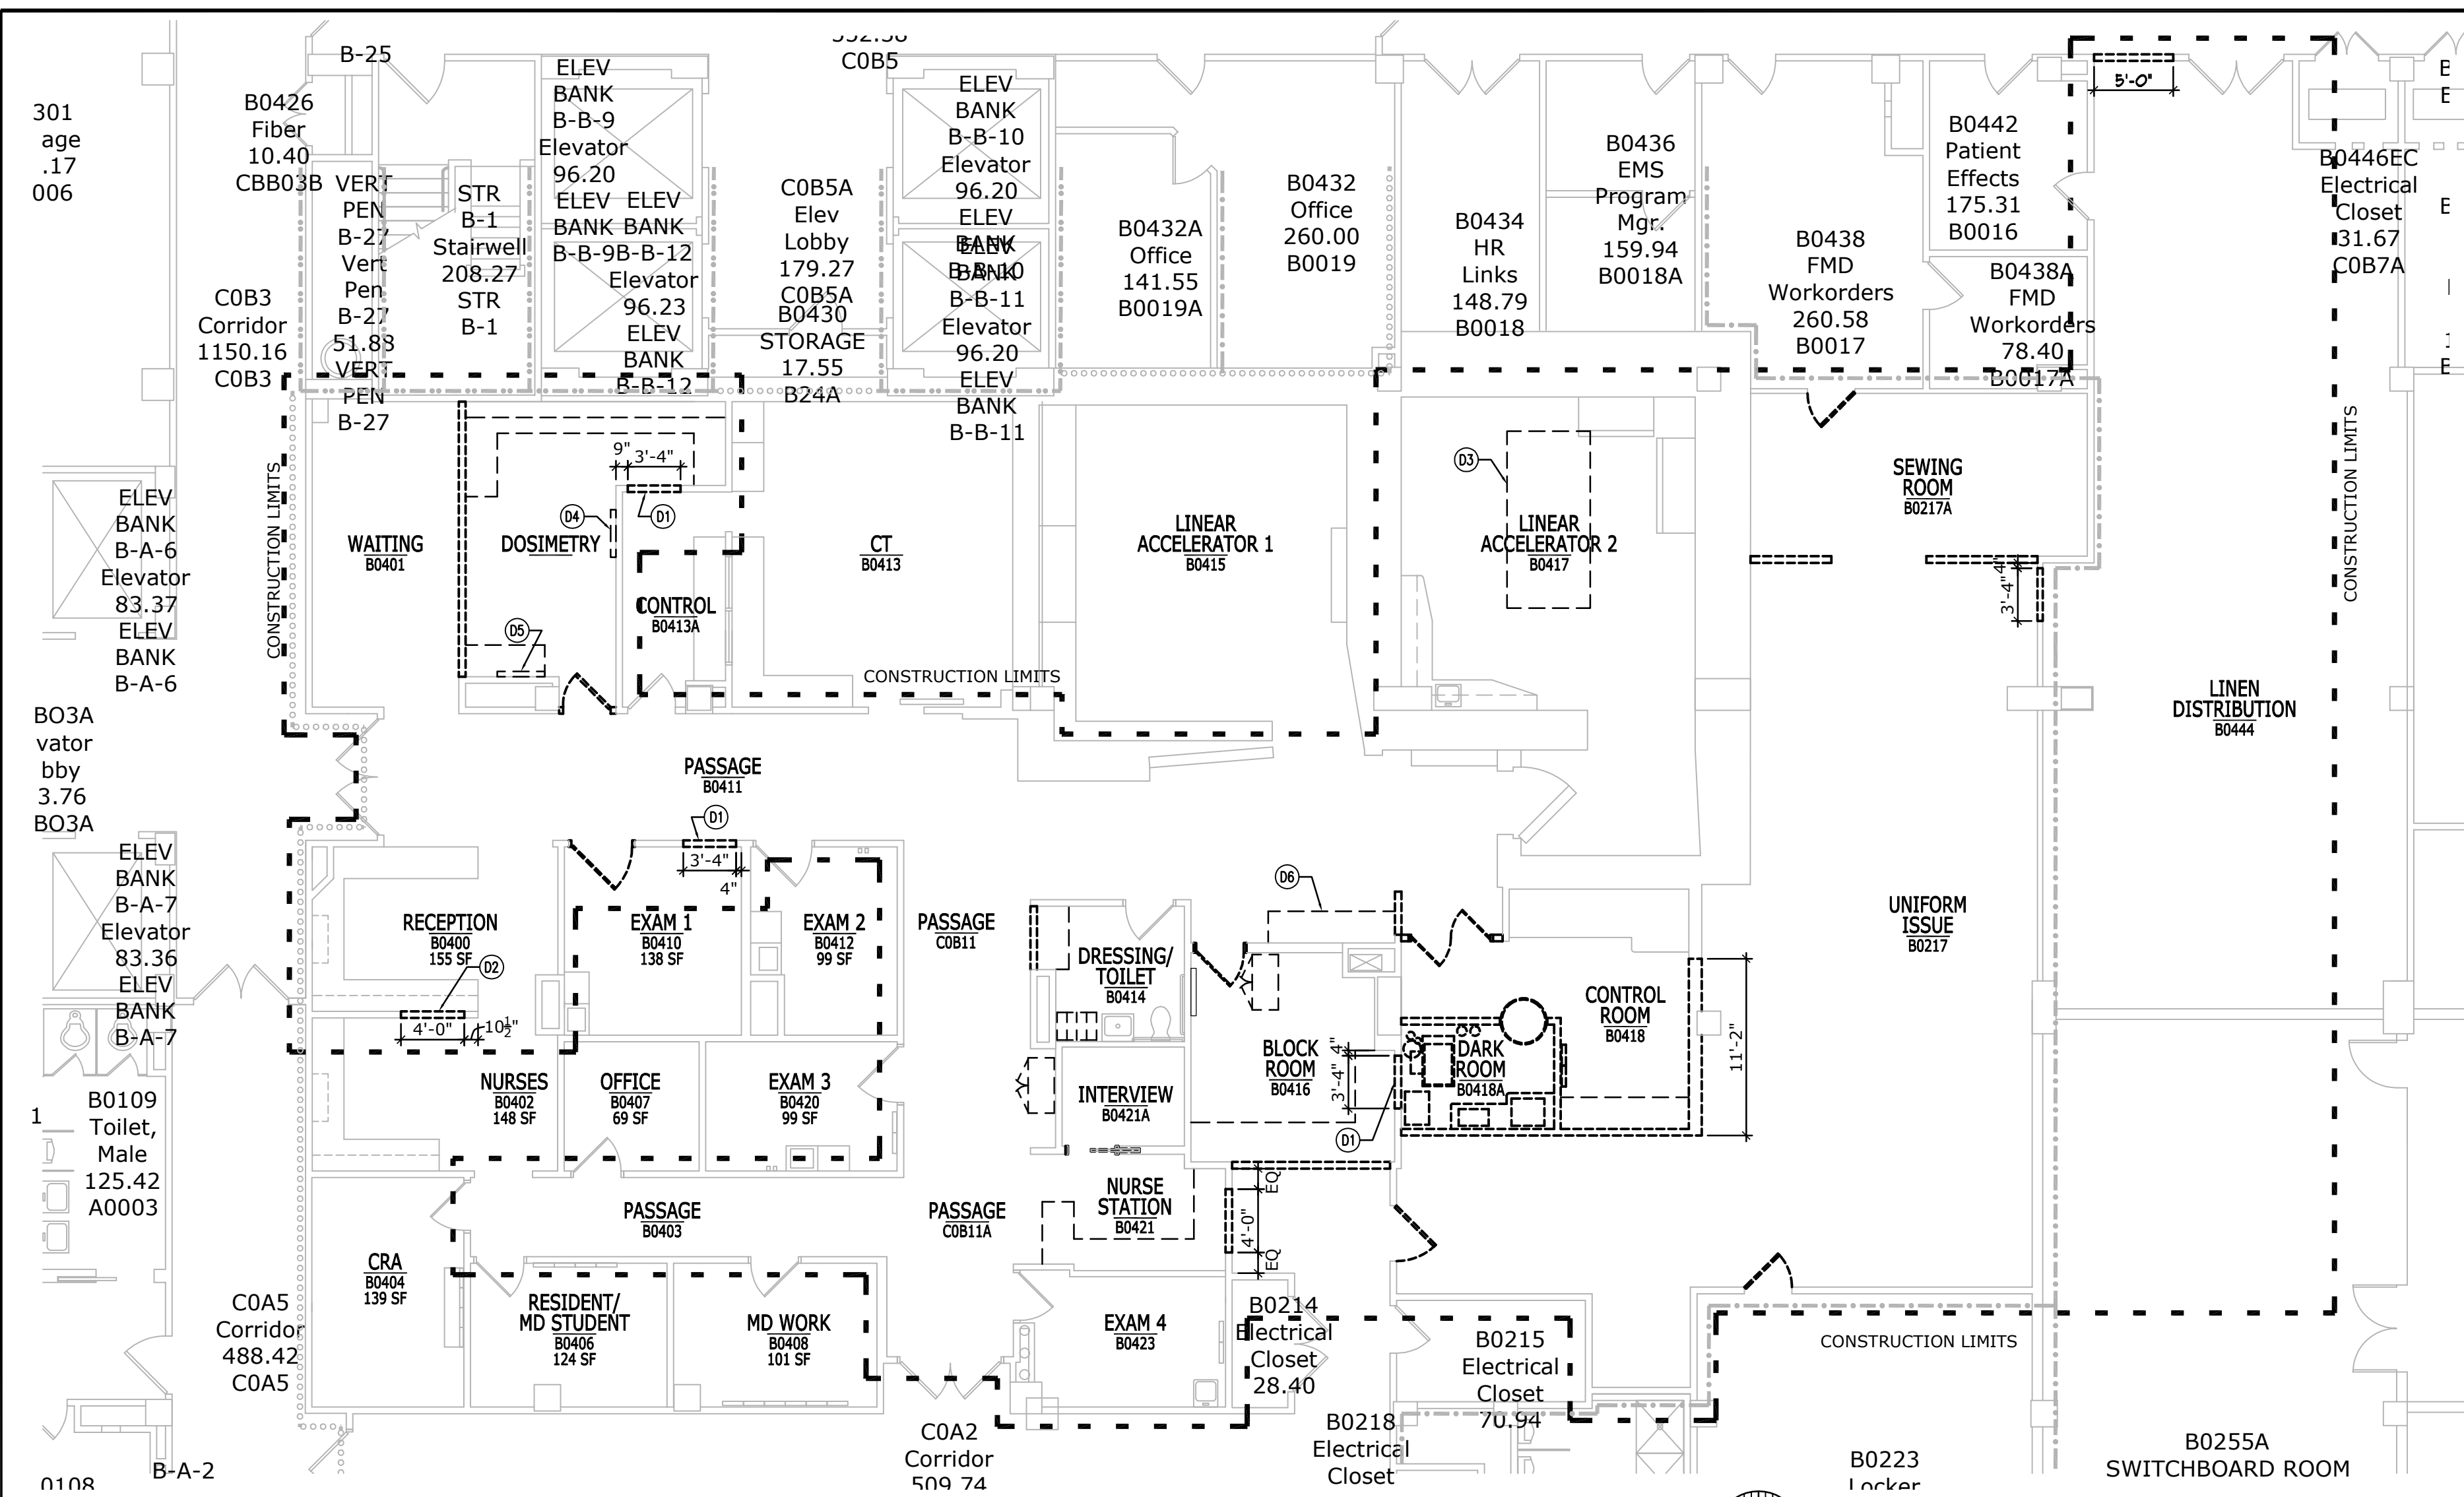

DEMOLITION PLAN - SYMBOLS LEGEND

- EXISTING WALLS TO REMAIN
- EXISTING WALLS TO BE REMOVED
- EXISTING DOOR AND FRAME TO REMAIN
- EXISTING DOOR AND FRAME TO BE REMOVED
- EXISTING ITEM TO REMAIN
- EXISTING ITEM TO BE REMOVED
- DEMOLITION PLAN NOTE
- CONSTRUCTION LIMITS

DEMOLITION PLAN - GENERAL NOTES

- VERIFY ALL DIMENSIONS AND CONDITIONS AT JOB SITE. PORTIONS OF EXISTING CONSTRUCTION MAY HAVE BEEN REMOVED BY OWNER.
- VERIFY EXACT COMPOSITION OF EXISTING WALLS TO BE REMOVED.
- REMOVE FLOOR FINISHES, INCLUDING SETTING BED IN CERAMIC TILE AREAS, WHERE NEW FLOORING IS INDICATED IN ROOM FINISH SCHEDULE.
- REMOVE SUSPENDED CEILINGS AND RELATED HANGERS, OR GYPSUM BOARD/PLASTER CEILINGS WHERE NEW CEILINGS ARE INDICATED ON REFLECTED CEILING PLAN OR ROOM FINISH SCHEDULE.
- REMOVE ALL COLUMN FINISHES, INCLUDING GYPSUM BOARD AND FURRINGS, FROM EXISTING STRUCTURAL COLUMNS.
- REMOVE ALL INTERIOR AND WALL MOUNTED ITEMS IN AREAS TO BE REMODELED (REFER TO ROOM FINISH SCHEDULE) INCLUDING BUT NOT LIMITED TO, CABINETS, EQUIPMENT, LOCKERS, TOILET PARTITIONS, SHELVING, HOOKSTRIPS, HANDRAILS, CLOSET POLES, CHALK AND TACK BOARDS, MIRRORS, WALL AND CEILING TRIM, AND BASE.
- REFER TO PLUMBING, HVAC AND ELECTRICAL PLANS FOR ADDITIONAL DEMOLITION ITEMS AND NOTES. COORDINATE WORK WITH PLUMBING, HVAC AND ELECTRICAL REQUIREMENTS.
- COORDINATE DEMOLITION OF LOAD BEARING WALLS WITH STRUCTURAL PLANS.
- MAINTAIN CONTINUOUS UTILITY SERVICE TO ALL SPACES IN THE BUILDING NOT AFFECTED BY THIS WORK. COORDINATE WITH OWNER ANY DISRUPTION IN SERVICES REQUIRED TO PERFORM WORK OR TO MODIFY EXISTING PIPING, DUCTWORK OR ANY ASSOCIATED EQUIPMENT.
- CONSTRUCT A DUST-PROOF PARTITION TO SEPARATE AREAS OF CONSTRUCTION FROM ADJACENT OCCUPIED AREAS OUTSIDE SCOPE OF CONSTRUCTION.
- REFER TO DEMOLITION PHASING AND CONSTRUCTION PHASING PLANS.

DEMOLITION PLAN NOTES

- DEMO WALL FOR INSTALLATION OF DOOR.
- DEMO WALL FOR INSTALLATION OF BORROWED LITE.
- DEMO LINEAR ACCELERATOR BASEFRAME GROUTED SOLID INTO CONCRETE FLOOR. PM WORK ONLY. CUT CONCRETE TO FIT NEW BASE FRAME - LOCATION SHOWN ON SIEMEN'S DRAWINGS.
- DEMO VIEWBOX. RETAIN FOR REINSTALLATION.
- DEMO TV. RETAIN FOR REINSTALLATION.
- DEMO FURNITURE. RETAIN FOR REINSTALLATION.

FLOOR PLAN - SYMBOLS LEGEND


- NEW PARTITION
- NEW DOOR
- INTERIOR ELEVATION
- CONSTRUCTION LIMITS
- ONE HOUR FIRE RATED WALL ASSEMBLY
- TWO HOUR FIRE RATED WALL ASSEMBLY
- ONE HOUR FIRE RATED SMOKE COMPARTMENT WALL
- SUITE DESIGNATION
- EXISTING WALLS TO REMAIN
- EXISTING DOOR TO REMAIN
- DETAIL REFERENCE
- PARTITION TYPE
- BORROWED LITE, SEE C6/A002
- PLAN NOTE
- PUSH PLATE

FLOOR PLAN - GENERAL NOTES

- DIMENSIONS ON FLOOR PLAN ARE BASED ON FACE OF FINISHED WALL TO FACE OF FINISHED WALL (NOMINAL).
- VERIFY ALL DIMENSIONS AND CONDITIONS AT JOB SITE. PORTIONS OF EXISTING CONSTRUCTION MAY HAVE BEEN REMOVED BY OWNER.
- MAINTAIN CONTINUOUS UTILITY SERVICE TO ALL SPACES IN THE BUILDING NOT AFFECTED BY THIS WORK. COORDINATE W/OWNER ANY DISRUPTION IN SERVICES REQ'D TO PERFORM WORK OR TO MODIFY EXTG PIPING, DUCTWORK OR ANY ASSOCIATED EQUIPMENT.
- REFER TO SHEET A002 FOR ROOM FINISH SCHEDULE, DOOR SCHEDULE, DOOR TYPES, AND NOTES.
- TOILET PAPER DISPENSER, SHARPS CONTAINER, GLOVE BOX, PAPER TOWEL DISPENSER, AND SOAP DISPENSER SHALL BE PROVIDED BY OWNER AND CONTRACTOR INSTALLED.
- GROUT FILL ABANDONED UTILITY PIPES EMBEDDED IN THE CONCRETE SLAB. CUT AND GRIND UTILITY PIPES SMOOTH WITH EXISTING CONCRETE FLOOR PRIOR TO INSTALLING LEVELING MATERIAL.
- ALL WALL HUNG DEVICES TO HAVE WOOD BLOCKING IN WALL SUPPORT.

FLOOR PLAN NOTES

- ALIGN.
- (5) ADJUSTABLE PLAM SHELVES ON METAL STANDARDS.
- PATCH TO MATCH ADJACENT FINISHES.
- SEE DEMOLITION PHASING AND CONSTRUCTION PHASING PLANS.
- INSTALL LINEAR ACCELERATOR BASEFRAME PER SIEMEN'S DRAWINGS.
- REINSTALL EXISTING VIEWBOX.
- REINSTALL EXISTING TV.
- REINSTALL EXISTING FURNITURE.
- PLUMBING CHASE. SIZE TO BE VERIFIED.
- TEMPORARY WALL TO EXISTING CEILING. REMOVE AFTER CONSTRUCTION IS COMPLETED. RETURN FLOOR, WALLS AND CEILING TO ORIGINAL CONDITION.

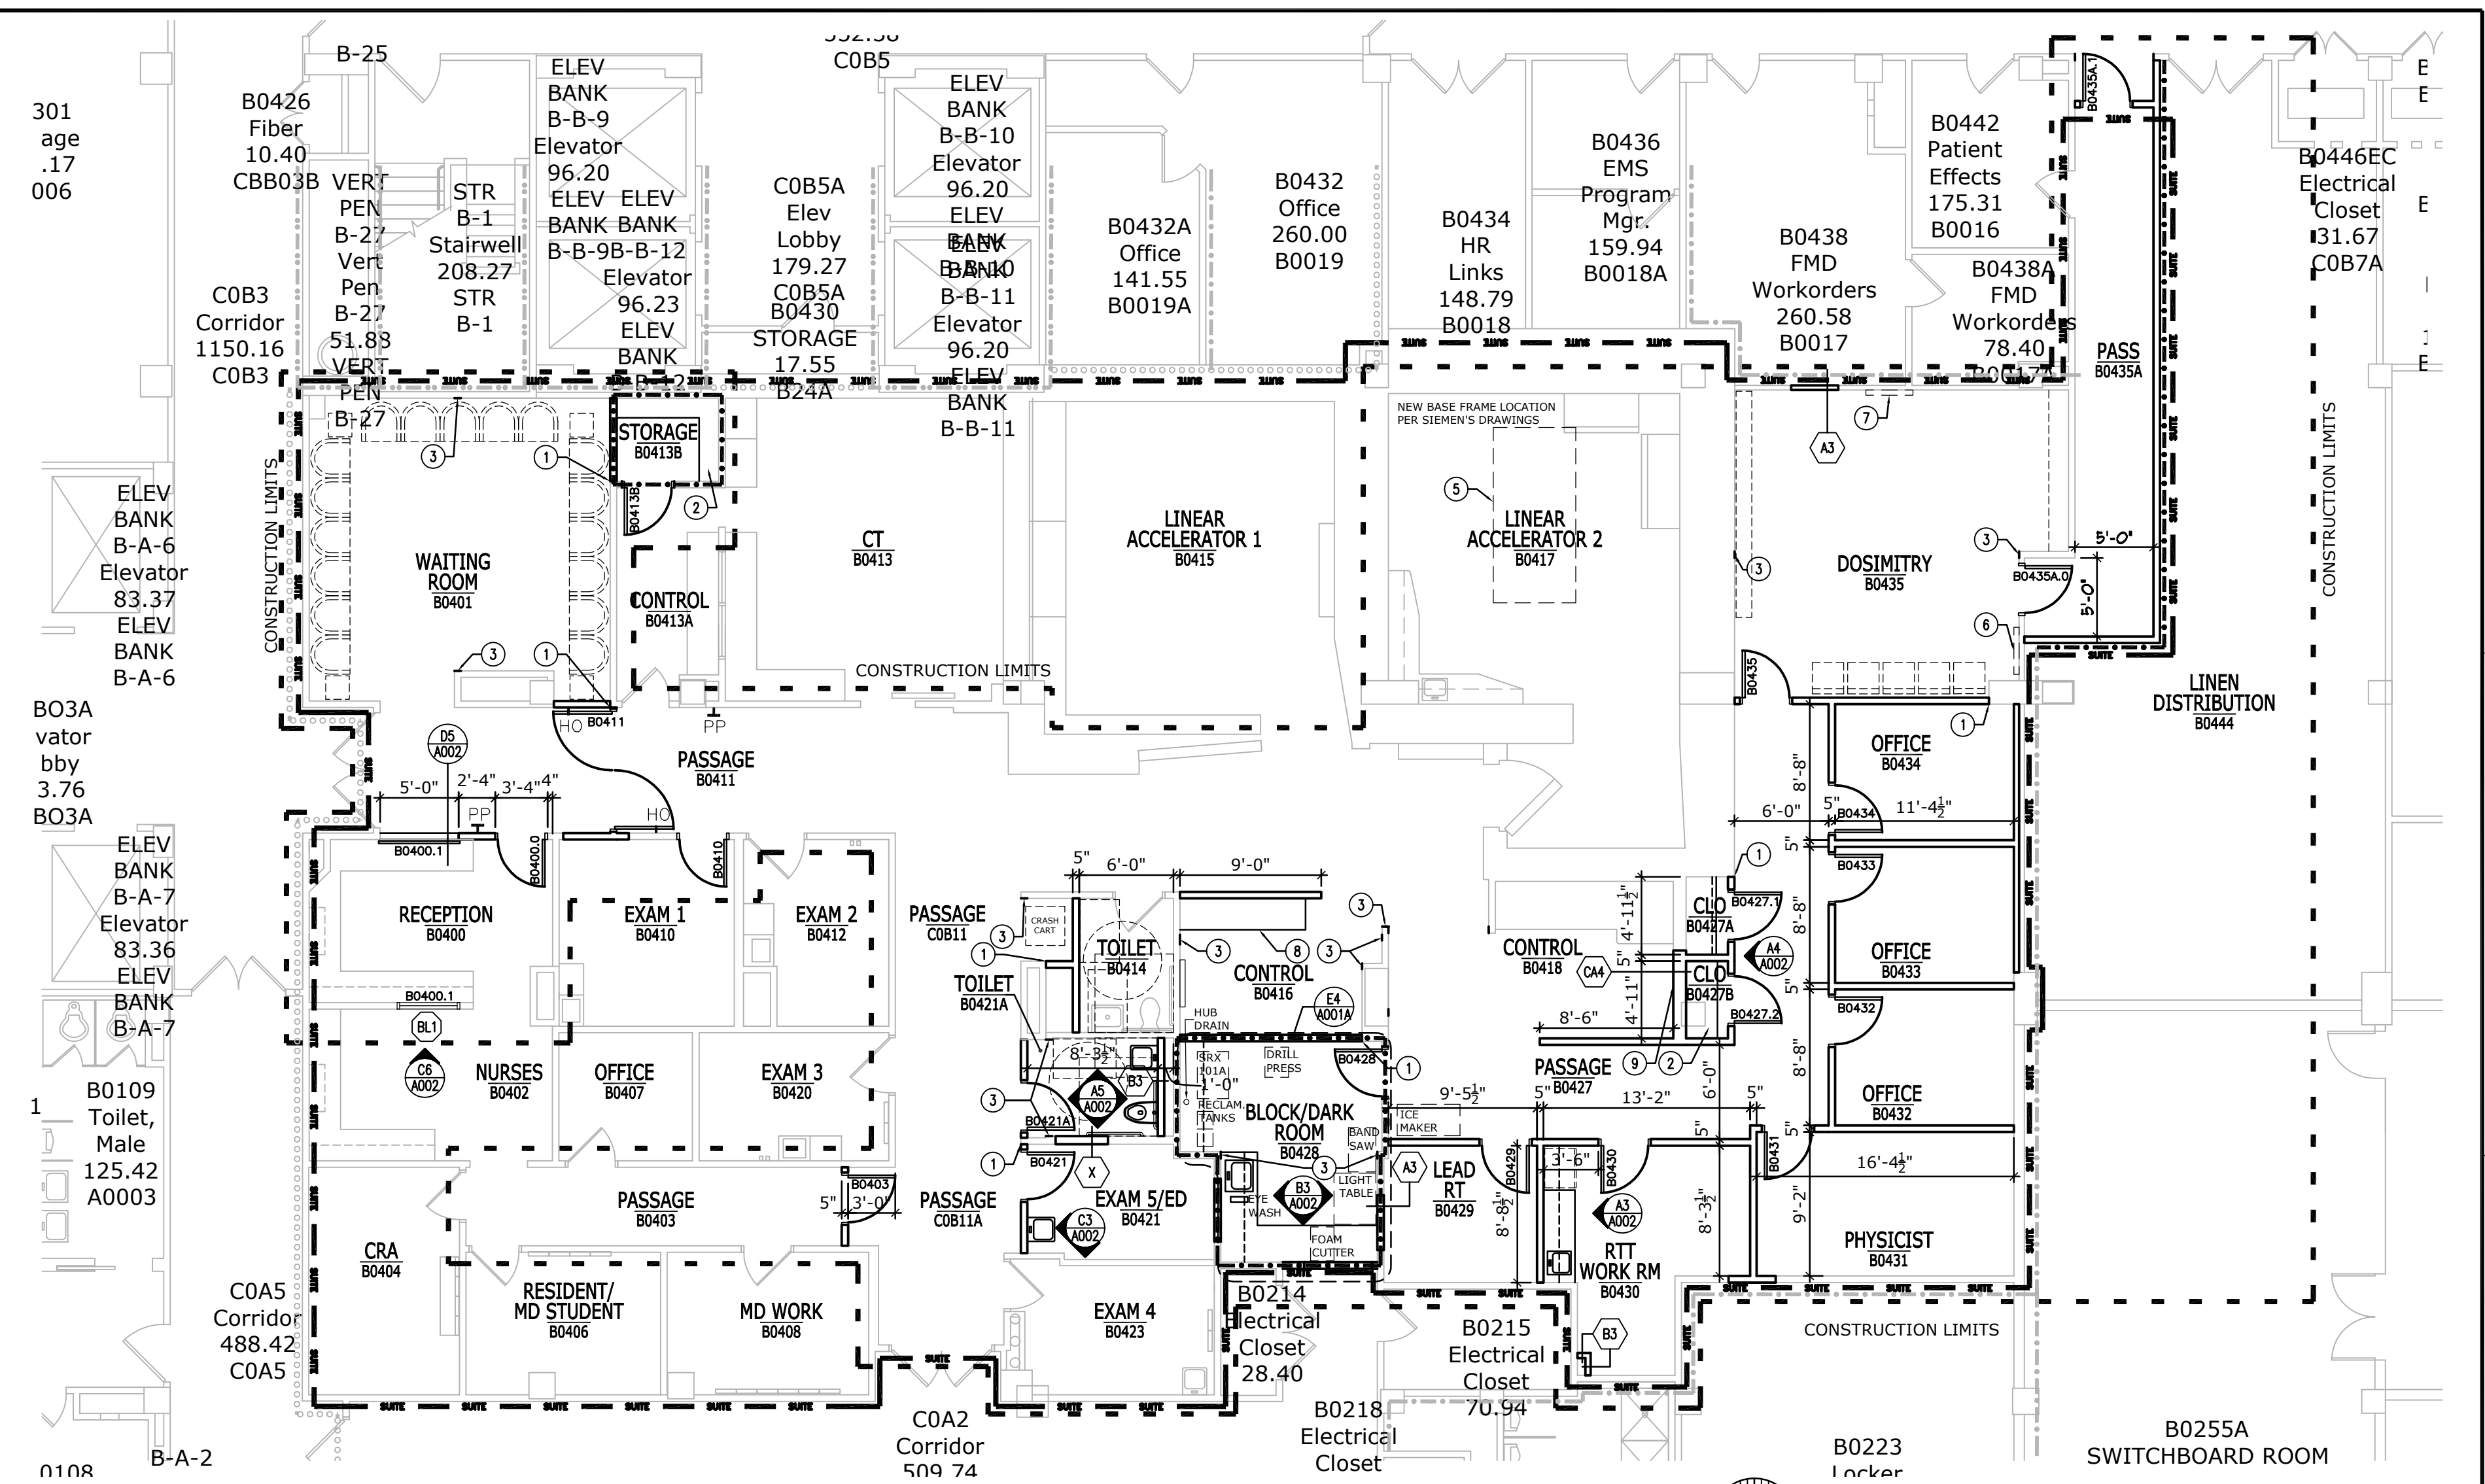

GYPSUM BOARD PARTITION SCHEDULE

- (A) SERIES
NON-COMBUSTIBLE
AVAILABLE FIRE RESISTANCE - 1 HR
3" SOUND CONTROL BATT INSULATION (EXCEPT AS NOTED BELOW) AT ACOUSTIC RATED PARTITIONS
ONE LAYER 5/8" GYPSUM BOARD - EACH SIDE
METAL STUDS @ 1'-4" OC

PARTITION TYPE	STUD WIDTH	PARTITION WIDTH	1HR CONSTRUCTION TESTS	STC	W/O INS	W/INS	NOTES	NOMINAL DIMENSION
(A)	3 5/8"	4 7/8"	GA FILE NO WP1200 UL DES NO U465	40-44	49		STORAGE AREAS NO INSULATION, ALL OTHER 3 5/8" GLASS FIBER BATT INS	5"

- (B) SERIES
NON-COMBUSTIBLE
NO AVAILABLE FIRE RATING
SEE PLANS AND DETAILS FOR DIMENSION
3" SOUND CONTROL BATT INSULATION (EXCEPT AS NOTED BELOW) AT ACOUSTIC RATED PARTITIONS
METAL STUD BRACES AND RUNNERS TO BACK-UP SEE NOTES BELOW FOR SPACING. WHERE STUD DOES NOT EXTEND TO RUNNER AND STRUCTURE ABOVE PROVIDE BRACE AT TOP OF STUD IN ADDITION TO SPACINGS NOTED BELOW
METAL STUDS @ 1'-4" OC
ONE LAYER 5/8" GYPSUM BOARD (TWO LAYERS 5/8" GYPSUM BOARD AT ACOUSTIC RATED, SHOWN DASHED)

PARTITION TYPE	STUD WIDTH	PARTITION WIDTH	1HR CONSTRUCTION TESTS	STC	W/O INS	W/INS	NOTES	NOMINAL DIMENSION
(B)	3 5/8"	4 1/4"	5 7/8"	NA	NA		PROVIDE BRACES TO BACK-UP AT VERTICAL MIDPOINT OF STUD WHERE UNBRACED HEIGHT EXCEEDS 12'-0"	4"

(C) SERIES

- NEW WALL CONSTRUCTION TO MATCH EXISTING CONSTRUCTION. PROVIDE CLEAN AND SMOOTH TRANSITION AT FINISHED FACE.
EXISTING CONSTRUCTION

(D) CHASE (PLUMBING)

- NON-COMBUSTIBLE
AVAILABLE FIRE RESISTANCE - 1 HR
3" SOUND CONTROL BATT INSULATION AT ACOUSTIC RATED PARTITIONS
ONE LAYER 5/8" GYPSUM BOARD - EACH SIDE
METAL STUDS @ 1'-4" OC

PARTITION TYPE	STUD WIDTH	PARTITION WIDTH	1HR CONSTRUCTION TESTS	STC	W/O INS	W/INS	NOTES	NOMINAL DIMENSION
(D)	3 5/8"	VARIES	UL DES NO U420	40-44	49			VARIES

GYPSUM BOARD PARTITION GENERAL NOTES

- ALL GYPSUM BOARD PARTITIONS SHALL BE (D) UNLESS OTHERWISE NOTED ON FLOOR PLAN.
- GYPSUM BOARD PARTITION DIMENSIONS ON FLOOR PLAN ARE BASED ON FACE OF FINISHED PARTITION TO FACE OF FINISHED PARTITION (NOMINAL).
- REFER TO GYP BD SPECIFICATION FOR LOCATIONS & TYPE(S) OF GYPSUM BOARD MATERIAL REQUIRED.
- PROVIDE TYPE "X" FIRE RATED GYPSUM BOARD AT ALL FIRE RATED PARTITIONS.
- SEAL ALL WALL PENETRATIONS AT PERIMETER AND FIRESTOP ALL FIRE RATED PARTITIONS.
- EXTEND ALL GYPSUM BOARD PARTITIONS FULL HEIGHT TO UNDERSIDE OF STEEL DECK ABOVE. AT METAL DECK CONSTRUCTION ABOVE PROVIDE SLIP JOINT BETWEEN TOP OF PARTITION AND UNDERSIDE OF METAL DECK / STRUCTURAL STEEL MEMBER ABOVE. REFER TO DETAIL E3/A001A.
- PROVIDE BLOCKING AT ALL WALL-HUNG EQUIPMENT, DEVICES, ITEMS, ETC. REFER TO DETAIL E5/A001A.

