


DEMOLITION LEGEND	
SYMBOL	DESCRIPTION
—	EXISTING TO REMAIN
---	EXISTING TO BE REMOVED
●	DEMO TO THIS POINT

PLAN KEYED NOTES	
①	REMOVE SURGICAL SCRUB SINK & ALL ASSOCIATED RIM, FLOOR PENETRATIONS. REMOVE VENT PIPING ABOVE CEILING.
②	REMOVE FLOOR DRAIN AND FLUSH VALVE. REMOVE WATER AND WASTE TO BELOW FLOOR. REPAIR FLOOR PENETRATIONS.
③	REMOVE SINK/LAV & ALL ASSOCIATED RIM. REMOVE WASTE AND WATER TO BELOW FLOOR. REPAIR FLOOR PENETRATIONS. REMOVE VENT TO ABOVE CEILING.
④	REMOVE FLOOR DRAIN AND ASSOCIATED VENT RISER. REPAIR FLOOR PENETRATIONS.
⑤	REMOVE 1/4" DISPOSED INSTRUMENT EQUIPMENT TO CLEANING
⑥	TEMPORARY LOCATION OF (2) COMPASSES AND (1) SINK WATER CONNECTIONS FROM EXISTING ROUGH-IN. REMOVE EXISTING ROUGH-IN. REPAIR FLOOR SINK WHEN NEW SERVICES ARE IN PLACE. DISCONNECT AND REMOVE ALL SERVICES TO BELOW FLOOR & ABOVE CEILING.
⑦	REMOVE ROOF DRAIN.
⑧	REMOVE AND RELOCATE 4" VENT THROUGH ROOF. VENT 12" DIA. AND TO ROOF.
⑨	REMOVE SUPERIOR DRAIN AT ROOF PARAPET AND PING TO OVERHANG.
⑩	REMOVE ABANDONED REFRIGERANT LINES THROUGH ROOF. REPAIR FLOOR SINK IN PLACE TO SERVE CAVARIES AND FLOOR SINK WHEN NEW SERVICES ARE IN PLACE. RELOCATE TO FINAL PERMANENT LOCATION.
⑪	TEMPORARY WALL. RE. ARCH.
⑫	

- CONSTRUCTION SHALL BE COMPLETED IN PHASES TO FACILITIES. REFER TO ARCHITECTURAL PHASING PLAN FOR CONSTRUCTION PHASE 1A AND 1B SHALL BE COMPLETE CONSTRUCTION.
- ALL WORK (DEMOLITION AND NEW) ABOVE CEILING IN OCCUPIED AREAS SHALL OCCUR BETWEEN OPERATIONAL AND END OF WORK SHIFT. REPAIR AND END OF WORK SHIFT SCHEDULE DEMOLITION AND NEW CONSTRUCTION ACCORDINGLY.
- ALL SERVICES AND UTILITIES SHALL BE FULLY OPERATIONAL AT END OF WORK SHIFT SCHEDULE DEMOLITION AND NEW CONSTRUCTION ACCORDINGLY.

### CONSTRUCTION PHASING

- CONSTRUCTION SHALL BE COMPLETED IN PHASES TO FACILITIES. REFER TO ARCHITECTURAL PHASING PLAN FOR CONSTRUCTION PHASE 1A AND 1B SHALL BE COMPLETE CONSTRUCTION.
- ALL WORK (DEMOLITION AND NEW) ABOVE CEILING IN OCCUPIED AREAS SHALL OCCUR BETWEEN OPERATIONAL AND END OF WORK SHIFT. REPAIR AND END OF WORK SHIFT SCHEDULE DEMOLITION AND NEW CONSTRUCTION ACCORDINGLY.
- ALL SERVICES AND UTILITIES SHALL BE FULLY OPERATIONAL AT END OF WORK SHIFT SCHEDULE DEMOLITION AND NEW CONSTRUCTION ACCORDINGLY.

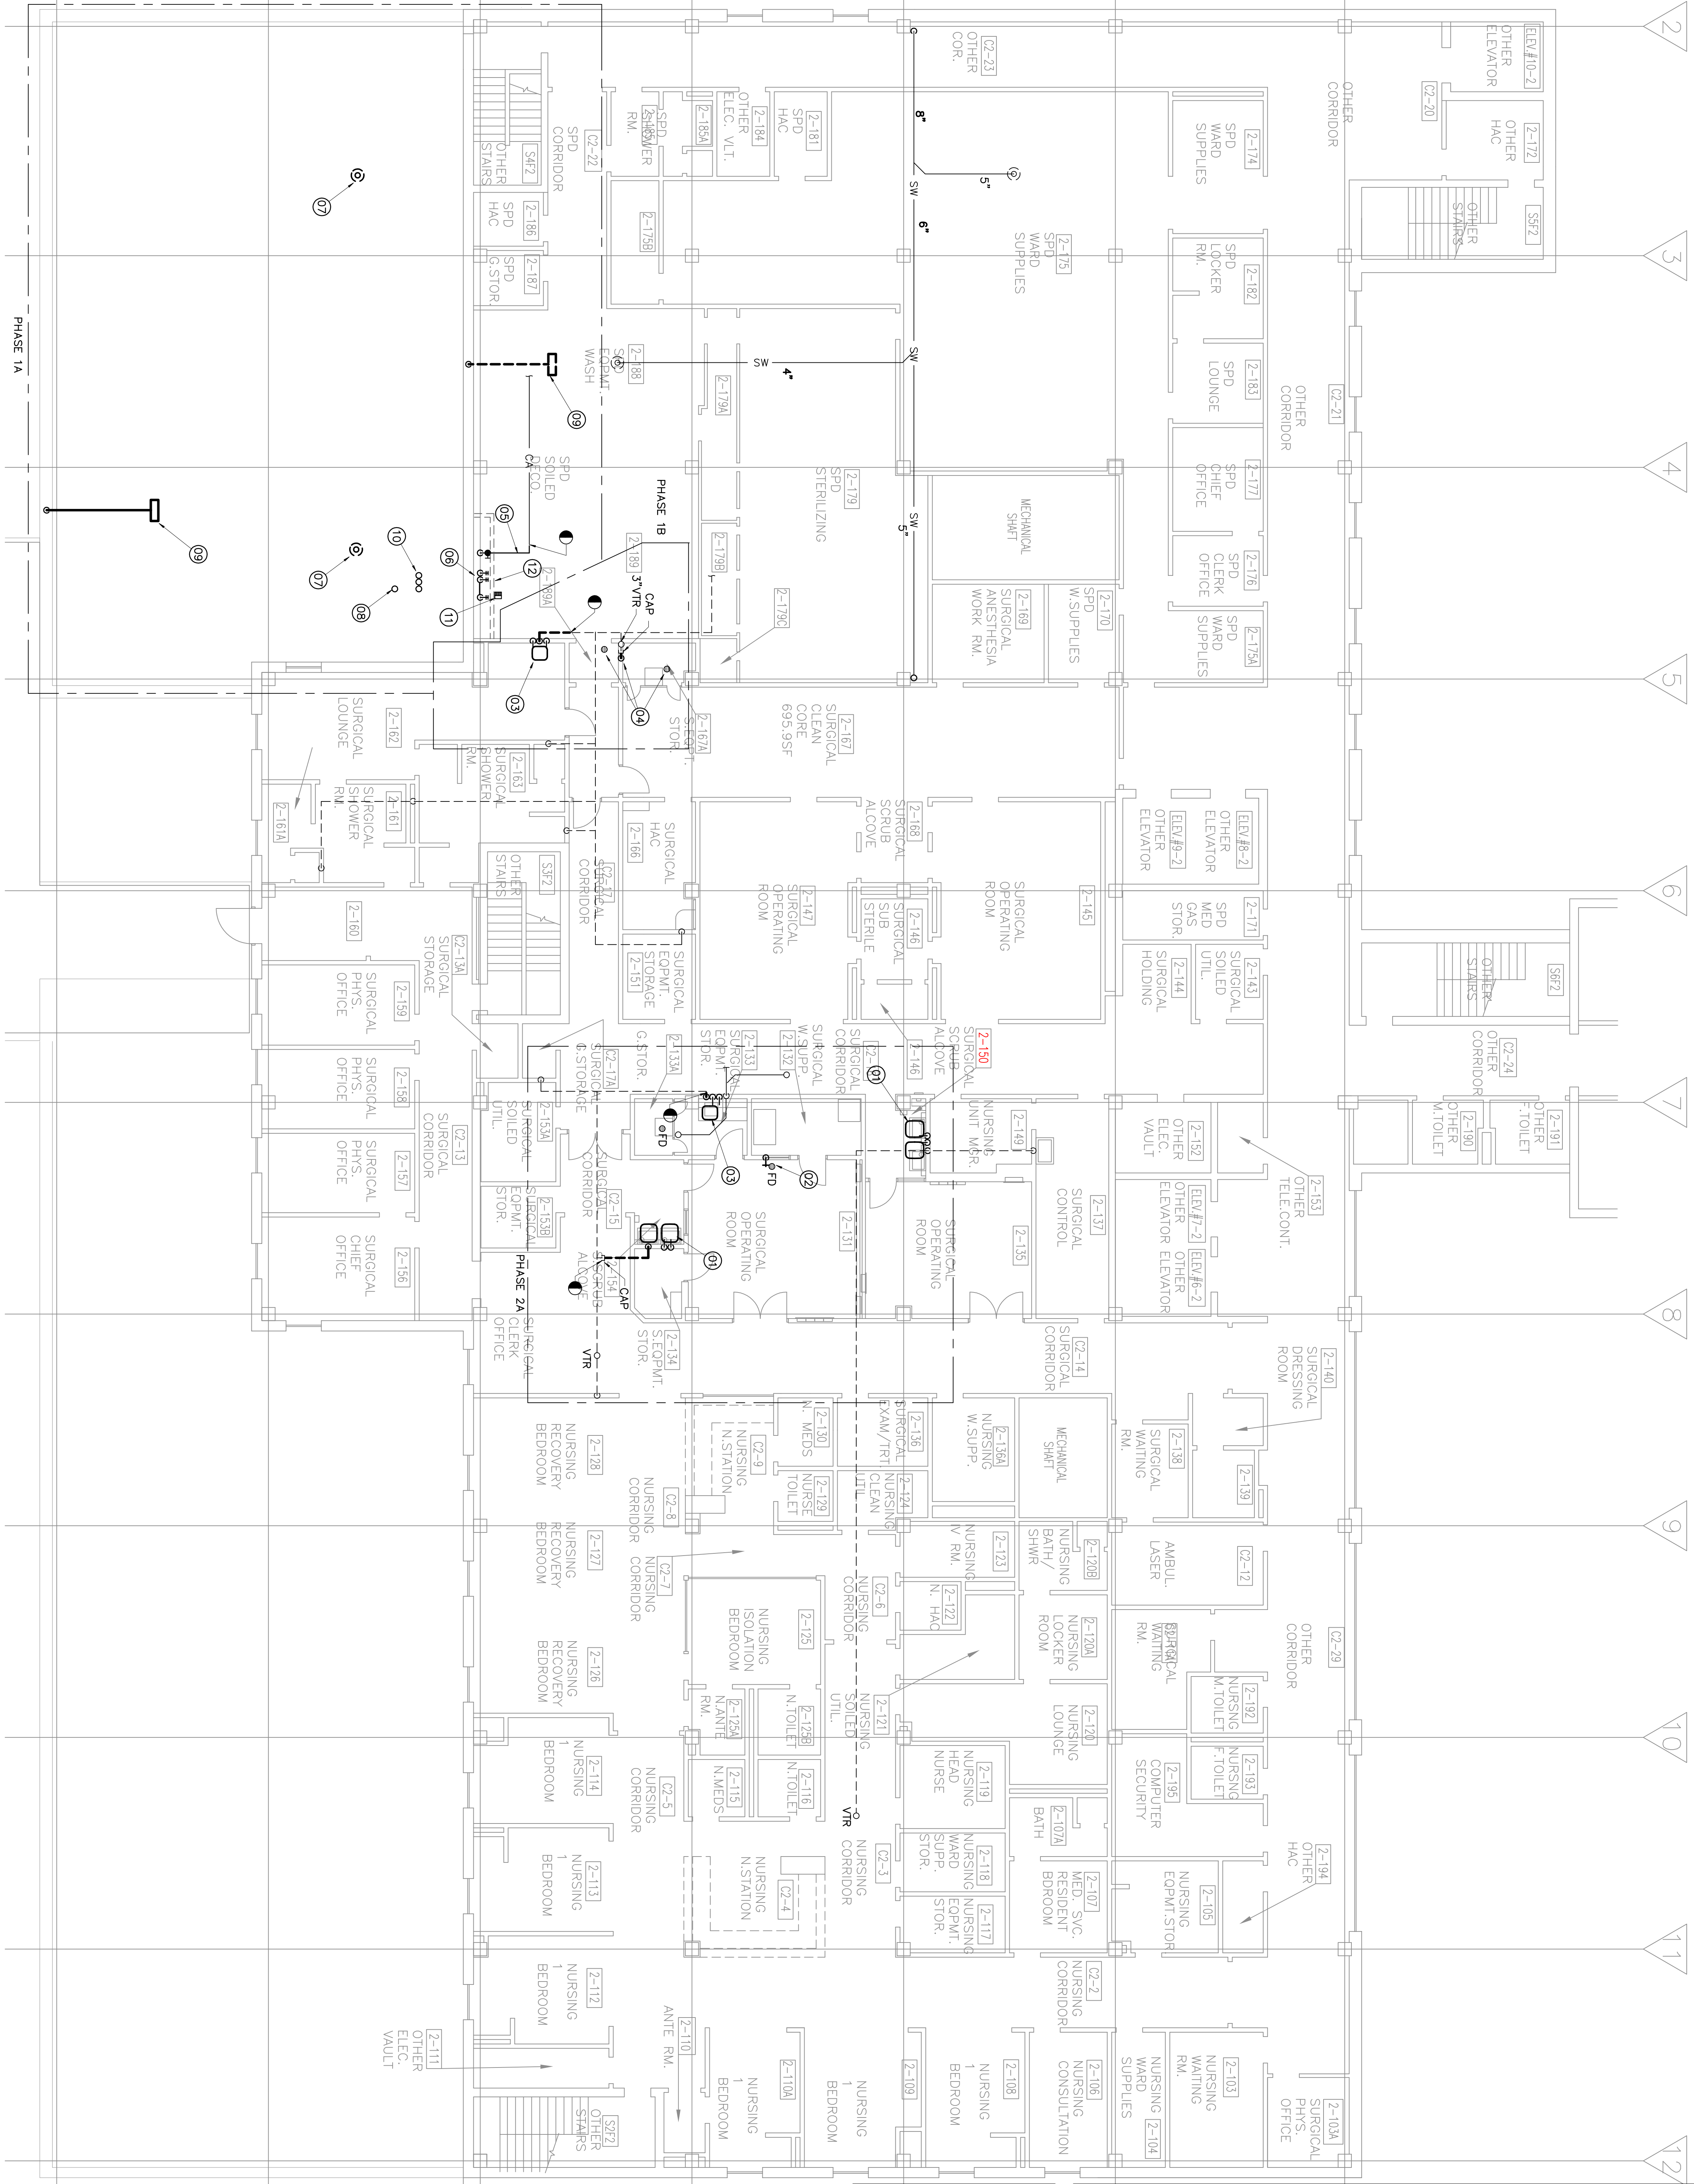

### FULLY SPRINKLERED

<b>CONSULTANTS:</b>		<b>MECHANICAL, PLUMBING, AND ELECTRICAL:</b>	
<b>CIVIL/STRUCTURAL:</b>		<b>SSR Smith Securian</b>	
<b>MARTIN/MARTIN</b>		<b>SSR Smith Securian</b>	
CONSULTING ENGINEERS		CONSULTING ENGINEERS	
P. 24 820 W. 13th Avenue		P. 24 820 W. 13th Avenue	
FAX 503.431.5666		FAX 503.431.5666	
<b>Date</b>		<b>Date</b>	

<b>ARCHITECT/ENGINEERS:</b>		<b>Heery International Inc.</b>	
<b>Heery design</b>		<b>Heery International Inc.</b>	
820 16th Street Mail		820 16th Street Mail	
Suite 200		Suite 200	
720.960.0276		720.960.0276	
Heery Project Number:		08304000	

<b>Project Title</b>		<b>Project Title</b>	
<b>SECOND FLOOR PLAN</b>		<b>PROPERTY RENOVATION</b>	
<b>PLUMBING DEMOLITION</b>		<b>AND EXPANSION</b>	
<b>Approved Project Director</b>		<b>Location</b>	
<b>Date</b>		<b>CHEYENNE, WY</b>	
<b>04/24/09</b>		<b>04/24/09</b>	
<b>Checked</b>		<b>Checked</b>	
<b>PD102</b>		<b>PD102</b>	
<b>Dwg 21 of 44</b>		<b>Dwg 21 of 44</b>	

<b>Office of Construction and Facilities Management</b>		<b>Department of Veterans Affairs</b>	
<b>VA FORM 08-6231</b>		<b>VA FORM 08-6231</b>	