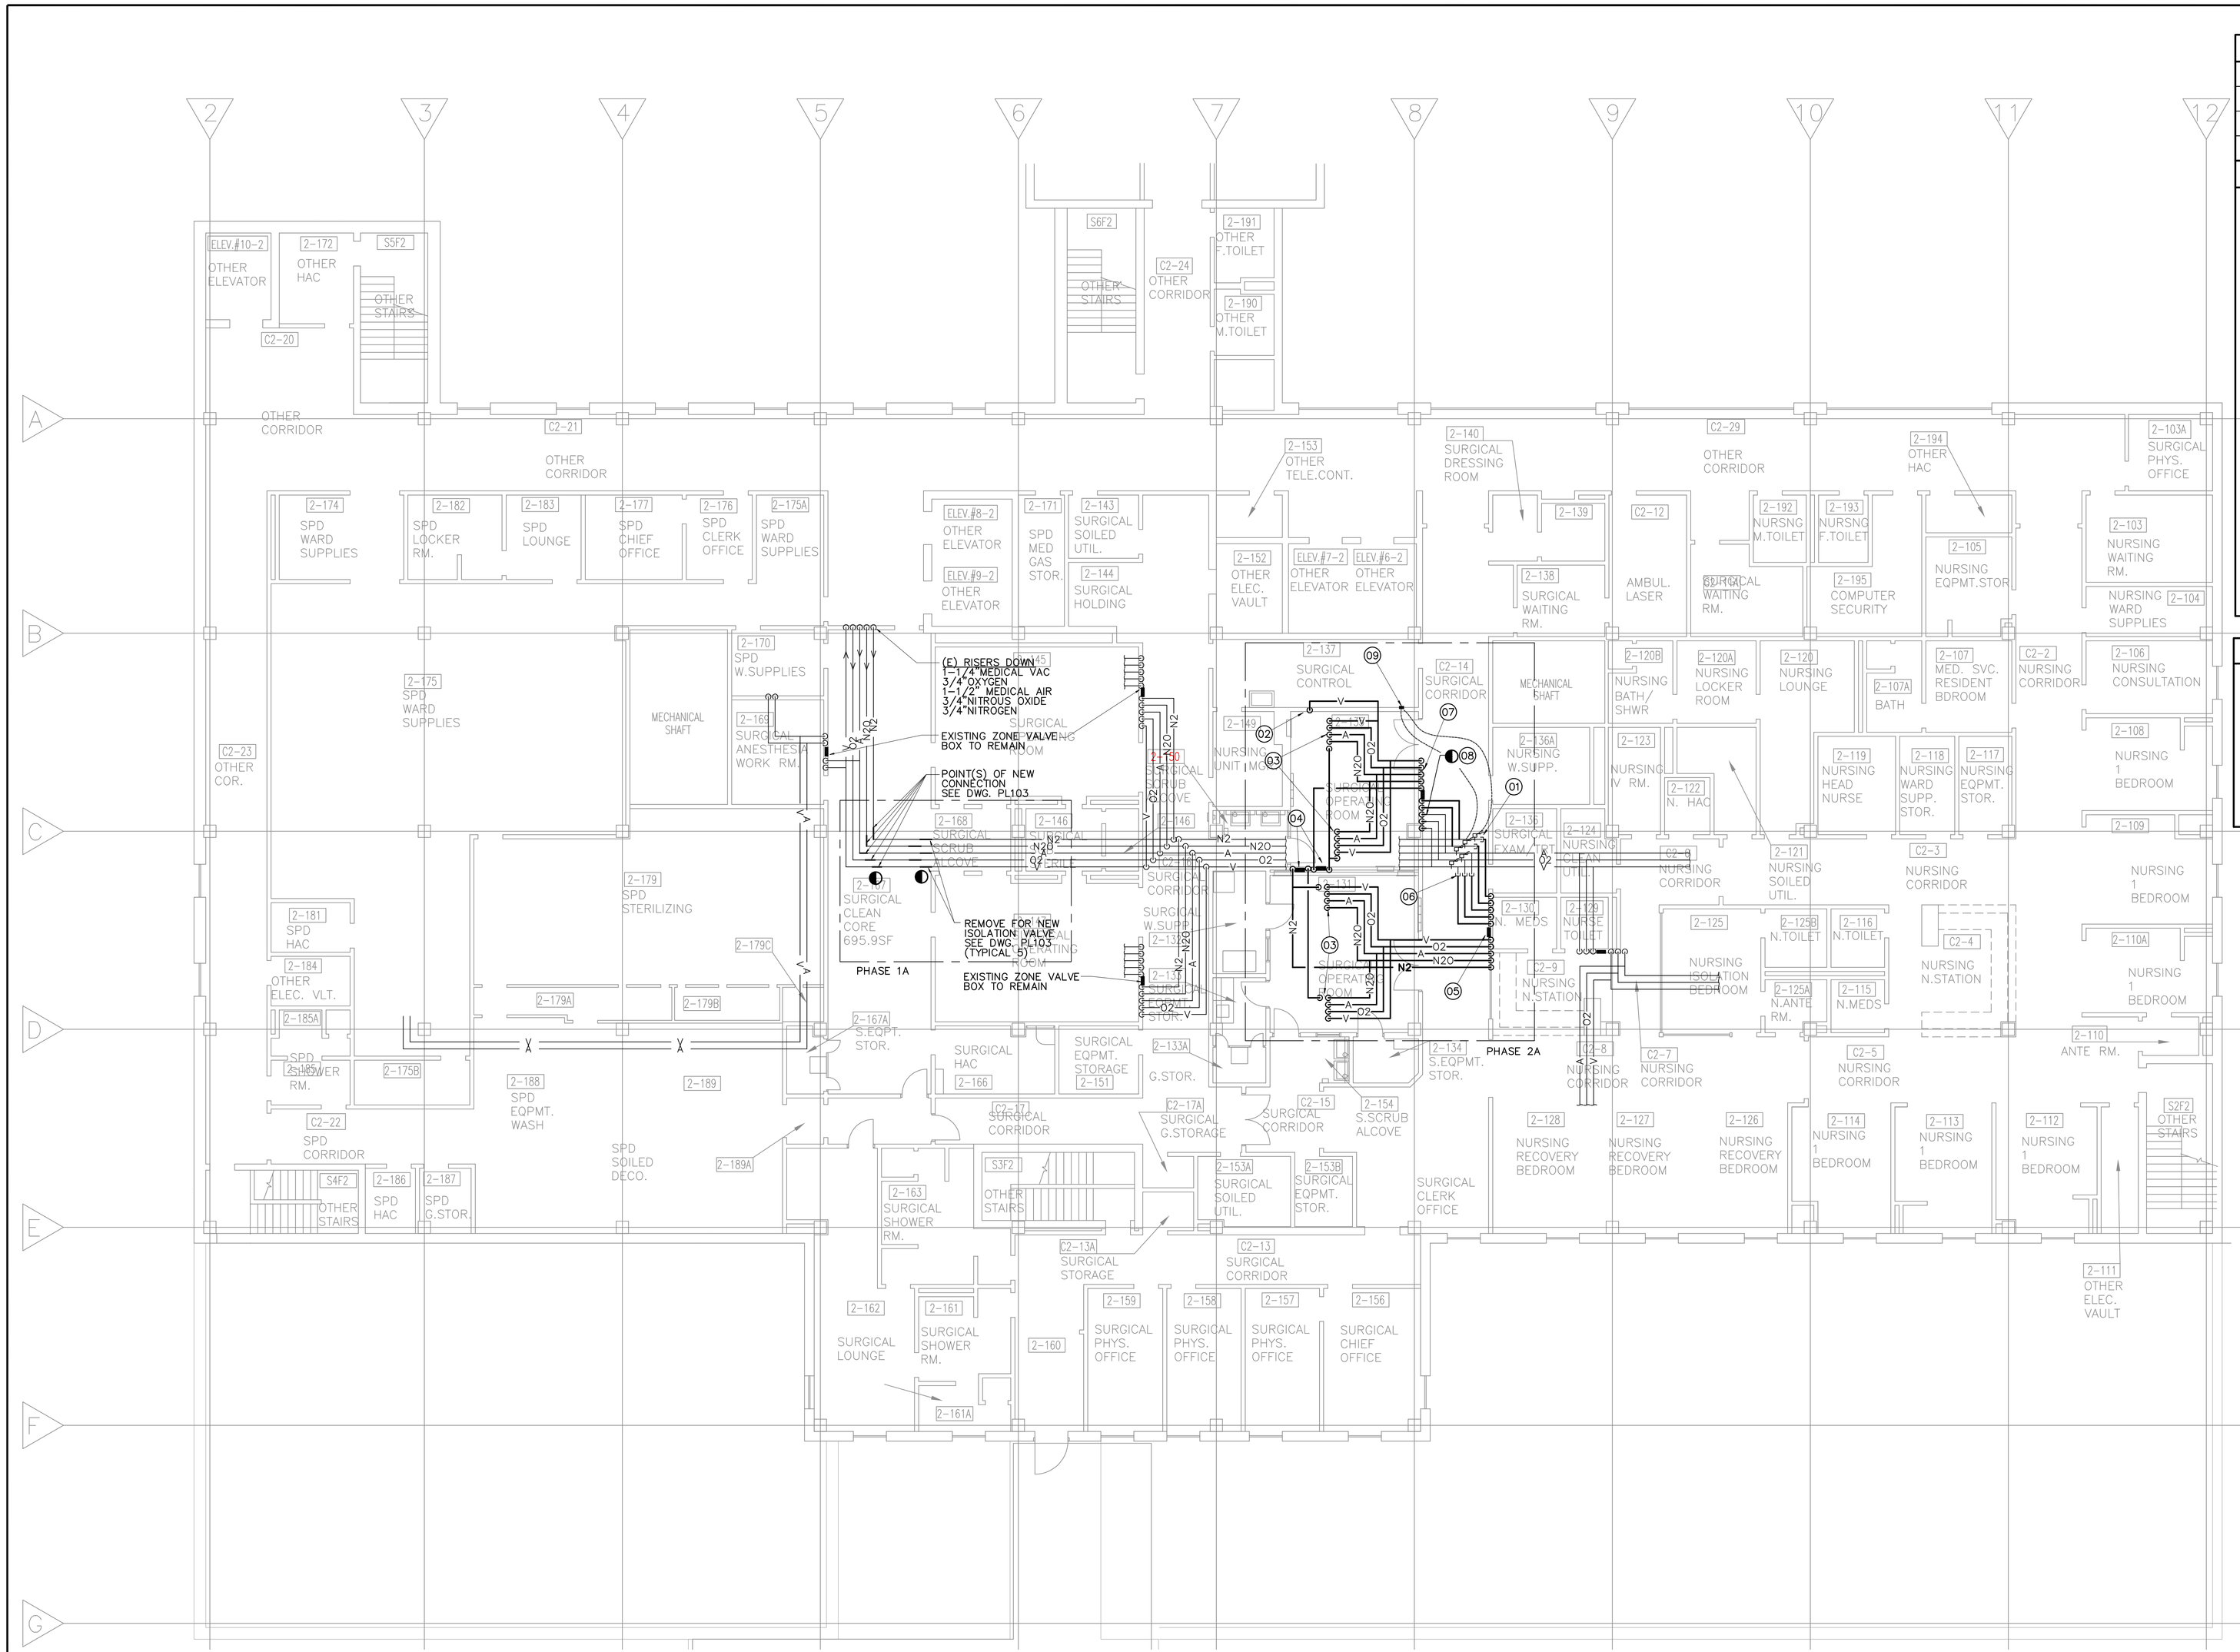

DEMOLITION LEGEND

SYMBOL	DESCRIPTION
———	EXISTING TO REMAIN
———	EXISTING TO BE REMOVED
◐	DEMO TO THIS POINT

PLAN KEYED NOTES

01. CAP 3/4" NITROGEN AND 3/4" NITROUS OXIDE PIPING ABOVE CEILING DOWNSTREAM FROM EXISTING LINE PRESSURE SENSORS. SENSORS AND WIRING TO EXISTING ALARM PANEL TO REMAIN. REMOVE ALL PIPING DOWNSTREAM FROM NEW CAPS.
02. REMOVE VACUUM MEDICAL OUTLET IN WALL. REMOVE VACUUM PIPING IN WALL & ABOVE CEILING BACK TO ZONE VALVE BOX.
03. REMOVE MEDICAL GAS CEILING COLUMN. DISCONNECT AND REMOVE ALL MEDICAL GAS PIPING ABOVE CEILING BACK TO ZONE VALVE BOX.
04. REMOVE NITROGEN CONTROL PANEL IN WALL. REMOVE NITROGEN PIPING IN WALL AND ABOVE CEILING BACK TO ZONE VALVE BOX AND CEILING COLUMN.
05. REMOVE MEDICAL GAS ZONE VALVE BOX. REMOVE PIPING IN WALL AND ABOVE CEILING BACK TO NEW CAPS. COORDINATE WALL REPAIR WITH G.C.
06. CAP OXYGEN, MEDICAL AIR AND VACUUM BRANCH PIPING ABOVE CEILING. EXISTING MAINS TO REMAIN.
07. REMOVE MEDICAL GAS ZONE VALVE BOX. REMOVE PIPING IN WALL AND ABOVE CEILING TO POINT(S) OF NEW CONNECTION OR PIPE MAIN AS INDICATED. NEW ZONE VALVE BOX TO BE INSTALLED IN SAME LOCATION. COORDINATE WALL REPAIR WITH G.C.
08. 1" MEDICAL VACUUM, 3/4" OXYGEN, AND 1/2" MEDICAL AIR BRANCH PIPING TO REMAIN. COORDINATE EXACT LOCATION OF NEW CONNECTION(S) WITH NEW ZONE VALVE BOX. SEE DWG. PL103.
09. EXISTING AREA ALARM PANEL TO REMAIN. EXISTING SENSOR SWITCHES AND WIRING TO REMAIN. RELABEL AREA ALARM PANEL FOR REVISED SERVICE AREAS AND ROOM NUMBERS PER HOSPITAL STANDARDS.

CONSTRUCTION PHASING

1. CONSTRUCTION SHALL BE COMPLETED IN PHASES TO ALLOW FOR UNINTERRUPTED USE OF HOSPITAL FACILITIES. REFER TO ARCHITECTURAL PHASING PLAN. CONSTRUCTION PHASE 1A AND 1B SHALL BE COMPLETE PRIOR TO BEGINNING OF PHASE 2A AND 2B CONSTRUCTION.
2. ALL WORK (DEMOLITION AND NEW) ABOVE CEILING IN OCCUPIED AREAS SHALL OCCUR BETWEEN 8:00 PM AND 5:00 AM. ALL CEILING TILES MUST BE REPLACED AT END OF WORK SHIFT.
3. ALL SERVICES AND UTILITIES SHALL BE FULLY OPERATIONAL AT END OF WORK SHIFT. SCHEDULE DEMOLITION AND NEW CONSTRUCTION ACCORDINGLY.

FULLY SPRINKLERED

Revisions	Date

CONSULTANTS:

CIVIL/STRUCTURAL:
MARTIN/MARTIN
CONSULTING ENGINEERS
12499 West Colfax Avenue
P.O. Box 151500
Lakewood, Colorado 80215
303.431.8100
FAX 303.431.6866

MECHANICAL, PLUMBING, AND ELECTRICAL:
SSR Smith Seckman Reid, Inc.
8055 E. Tufts Avenue, Suite 1100
Denver, Colorado 80237
(303) 779-1222
FAX: (303) 694-9144
www.ssr-inc.com
SSR JOB #: 08270120

PLAN NORTH

SCALE: 1/8" = 1'-0"

ARCHITECT/ENGINEERS:

HEERY design

Heery International Inc.
820 16th Street Mall,
Suite 200,
Denver, CO 80202-3219
720.946.0276

Heery Project Number:
0830400

Drawing Title: SECOND FLOOR PLAN MEDICAL GAS DEMOLITION

Approved: Project Director

Project Title: SURGERY RENOVATION AND EXPANSION

Location: CHEYENNE, WY

Date: 04/24/09 | Checked: RDM | Drawn: DLB

Project Number: VA-259-09-RA-209

Building Number: BLDG. NO. 1

Drawing Number: PD103

Dwg. 22 of 44

Office of Construction and Facilities Management

Department of Veterans Affairs

VA FORM 08-6231