

## PROJECT 662-19-500, UPGRADE CAMPUS DOORS AND BUILDING 203 LOBBY

## SECTION 00 01 10

## TABLE OF CONTENTS

	<b>DIVISION 01 - GENERAL REQUIREMENTS</b>
01 00 00	General Requirements
01 33 23	Shop Drawings, Product Data, and Samples
01 35 26	Safety Requirements
01 42 19	Reference Standards
01 57 19	Temporary Environmental Controls
01 74 19	Construction Waste Management
	<b>DIVISION 02 - EXISTING CONDITIONS</b>
02 21 13	Site Surveys
02 41 00	Demolition
02 82 13.13	Glovebag Asbestos Abatement
	<b>DIVISION 08 - OPENINGS</b>
08 11 13	Hollow Metal Doors and Frames
08 14 00	Interior Wood Doors
08 41 13	Aluminum-Framed Entrances and Storefronts
08 71 00	Door Hardware
08 71 13	Automatic Door Operators
	<b>DIVISION 09 - FINISHES</b>
09 29 00	Gypsum Board
09 66 16	Terrazzo Floor Tile
09 91 00	Painting
	<b>DIVISION 26 - ELECTRICAL</b>
26 05 11	Requirements for Electrical Installations
26 05 19	Low-Voltage Electrical Power Conductors and Cables
26 05 26	Grounding and Bonding for Electrical Systems
26 05 33	Raceway and Boxes for Electrical Systems
26 27 26	Wiring Devices
26 29 21	Enclosed Switches and Circuit Breakers
	<b>DIVISION 27 - COMMUNICATIONS</b>
27 10 00	Control, Communication and Signal Wiring

**SECTION 01 00 00**  
**GENERAL REQUIREMENTS**  
**TABLE OF CONTENTS**

1.1 GENERAL INTENTION.....	3
1.2 STATEMENT OF BID ITEMS.....	3
1.3 SPECIFICATIONS AND DRAWINGS.....	6
1.4 CONSTRUCTION SECURITY REQUIREMENTS.....	6
1.5 FIRE SAFETY.....	8
1.6 OPERATIONS AND STORAGE AREAS.....	10
1.7 ALTERATIONS.....	14
1.8 INFECTION PREVENTION MEASURES.....	15
1.9 DISPOSAL AND RETENTION.....	16
1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS.....	17
1.11 RESTORATION.....	17
1.12 PHYSICAL DATA.....	18
1.13 AS-BUILT DRAWINGS.....	18
1.14 USE OF ROADWAYS.....	18
1.15 PRECONSTRUCTION RISK ASSESSMENT.....	18
1.16 TEMPORARY USE OF EXISTING ELEVATORS.....	18
1.17 TEMPORARY TOILETS.....	19
1.18 AVAILABILITY AND USE OF UTILITY SERVICES.....	19
1.19 TESTS.....	19
1.20 INSTRUCTIONS.....	19
1.21 RELOCATED EQUIPMENT and ITEMS.....	20
1.22 CONSTRUCTION SIGN.....	20
1.23 SAFETY SIGN.....	21
1.24 CONSTRUCTION AND DEMOLITION DEBRIS MANAGEMENT.....	21
1.25 HISTORIC PRESERVATION.....	21
1.26 PARKING.....	21
1.27 I.D. BADGES.....	22
1.28 CONSTRUCTION SCHEDULE.....	22
1.29 DAILY LOGS.....	23

1.30 TB TESTING REQUIREMENTS.....	23
1.31 SEASONAL INFLUENZA VACCINE REQUIREMENTS.....	23
1.32 ASBESTOS.....	23

**SECTION 01 00 00**  
**GENERAL REQUIREMENTS**

**1.1 GENERAL INTENTION**

- A. The San Francisco Veterans Affairs (VA) Medical Center has a requirement to upgrade door security on the campus at 4150 Clement St, San Francisco CA 94121. This scope includes replacing selected exterior doors, installing selected new interior doors, and providing access control at these doors (largely through the Medical Center's Johnson Controls P2000 access control system). It will also include enclosing the exterior space adjacent to the Building 203 vestibule (turning an exterior space into a fully finished interior space) and refreshing the vestibule and lobby. This will create a single public entrance at the front of that building and will ultimately enable nearly instant lockdown of the campus in the event of an emergency. All work will be performed at the Medical Center (buildings 7, 8, 200, 203, and 208) and must minimize disruption to these spaces. The work in Building 203 will involve asbestos-containing material (ACM; see Asbestos Material Locations drawing). Where possible, the contractor shall match existing glazes and finishes.

**1.2 STATEMENT OF BID ITEMS**

- A. Scope. The contractor shall provide construction services, including material, labor, and equipment, for the following scope:
1. Replace existing doors and install new doors. The contractor shall, in accordance with Attachment 1, Door Schedule, and specifications:
    - a. remove twelve existing doors and provide and install replacement doors, and provide and install one new double door:
      - i. remove existing frames and transoms and provide and install new ones, only as required for operational finished installations;
      - ii. for doors that are not all metal, provide and install full laminated glass glazing, half-lite tempered glass glazing, or small-lite laminated glass glazing;
      - iii. provide and install panic hardware and/or breakout options for all exterior doors; and tie into existing accessories/components or provide replacements of any automatic door functionality, including, but not limited to, power, presence sensors, and ADA door access switches.
  2. Provide access control. The contractor shall access the VA network with the P2000 system and, in accordance with Attachment 1, Door Schedule, and specifications:
    - a. provide and install an intercom system to enable two-way audio/video communication between staff on the first floor of Building 8 at the check-in desk and visitors; install the intercom on the visitor side at ADA height and allow for users of average height to be within the camera's field of view; provide push-button activation on each side of the intercom; and provide all electrical and communication wiring for a fully operational finished installation;
    - b. provide and install card key access or push-button mechanical combination lock access control; where possible, reuse existing

- card key readers and controllers; integrate card key readers with the P2000 system; provide Kaba Simplex Pushbutton locks, model 5021BWL-26D-41, for push-button combo locks;
- c. provide and install card key reader access control at GA1B-200 (Entry Ramp) Exterior Door; integrate card key readers with the P2000 system; reuse, where possible, existing card key readers and controllers; and
  - d. evaluate the P2000 system alarm configurations and update the system to:
    - i. trigger an alarm under the following conditions:
      - a. forced entry or propping open of any exterior door; and
      - b. unauthorized attempts or access to any door;
    - ii. reconfigure the system such that any other alarms are disabled and no longer show as actionable alarms; and
    - iii. provide emergency lockdown of all Medical Center exterior doors configured in the P2000 system.
3. Enclose the exterior space adjacent to the Building 203 vestibule and refresh the vestibule and lobby to create a fully finished interior space. The contractor shall, in accordance with Attachment 2, Finish Schedule; the Design Intent Drawings; the asbestos material Locations drawings; and specifications:
- a. remove the exterior automatic swinging double door at the Building 203 vestibule adjacent to the GA-1 lobby and the non-structural exterior glass wall adjacent to the Building 203 vestibule;
  - b. provide and install aluminum-framed storefronts, in coordination with the contracting officer's representative (COR):
    - i. between the two columns west of and parallel to the vestibule's automatic sliding door to enclose this space, and in the place of the removed non-structural exterior glass wall;
    - ii. with each new storefront having metal panes from the ground to 40" high, double-pane glazed panels with tint to match adjacent existing finishes from 40" high to 8' high, and metal panes from 8' high to the ceiling;
  - c. remove ACM from the floors (tile mastic and vinyl tile, approximately 2100 sf) in the lobby and vestibule; remove flooring from the three passenger elevator cabs in the lobby;
  - d. provide and install Floorazzo tile in the lobby, the vestibule, the newly enclosed space, and the three passenger elevator cabs in the lobby (approximately 2500 sf);
  - e. provide and install gypsum wallboard in the newly enclosed space, including a 2x4 frame; provide and install floor-to-ceiling wall covering over the concrete column in the vestibule and over the main lobby wall between the elevator lobbies;
  - f. provide and install one electrical outlet, one data outlet, and ceiling light fixtures in the newly enclosed space; remove drop-in translucent acrylic ceiling panels in the main lobby and

passenger elevator lobby; paint the metal grid; provide and install composite resin drop-in panels (35 panels, each 2 ft by 4 ft by approximately 1/16 in. thick);

- g. remove extraneous hangings from the walls and patch holes, in coordination with the COR; paint the walls, doors (vestibule/lobby faces only), and trim in the lobby, vestibule, and newly enclosed space; provide and install wall protection, corner guards, wall base, handrails, and wall guards; and
- h. provide and install a ceiling acoustical suspension system with grid and panels in the newly enclosed space (approximately 100 sf).

#### B. Other Requirements

1. The contractor shall follow the phasing plan to be provided by the COR.
2. The contractor shall provide power and communications to meet the requirements of the submitted product to be successfully integrated into the existing system. The contractor shall program the card readers and set them up to be viewed/managed by the existing station access control system, be compatible with existing campus key cards (HID Corporate 1000) and PIVs. The contractor shall ensure that any changes made will not impact any parts of the existing setup, including elevator access, outside this scope of work.
3. All network data and electrical work shall be provided by the contractor. Provide CAT 6a STP cabling for required communication infrastructure. The contractor shall provide certification reports demonstrating cables are connected properly, are open, have no shorts, have no signal loss. The contractor shall use T568B connection format in accordance with OIT.
4. Network data shall be terminated at patch panels at designated locations within OIT switch closets. New 24 port patch panels will be provided and labeled per OIT requirements, as required.
5. All penetrations through smoke and fire walls as designated by the San Francisco VA Facility Site Condition Assessment will be done per all applicable codes, VA, and NFPA.
6. All interior and exterior cable runs for both telecommunication and electrical work will meet VA's Construction Facility Manual Design guides for telecommunication raceways and pathways and electrical requirements.
7. For exterior doors and transoms, the contractor shall meet the Physical Security Design Manual, latest edition, to the greatest extent possible.
8. The contractor shall provide user and technical service manuals in both physical and electronic formats for all systems provided in this procurement.
9. Attachments and any as-built drawings are provided as a convenience to the contractor. All bidders shall perform diligent site investigations to verify the information presented in the attachments or drawings before bidding to include the correct costs in their bid. Any deviation of the existing system from this

attachment that may affect the work shall be the responsibility of the contractor.

10. As-built drawings shall be submitted to the COR at the end of the project and shall correctly reflect all the deviations observed by the contractor during work execution. The contractor shall also submit a consolidated spreadsheet summarizing all equipment installed and/or migrated, including manufacturer, model, part number, serial number, physical location, mount type, switch/patch panel/port information, OIT closet location, MAC address, switch/panel information, and other relevant information.
11. Before beginning any demolition work, the contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the Medical Center; any damaged items shall be repaired or replaced as approved by the COR.
12. This work shall include but not limited to signage for detour of traffic, infection control containment, barricades, and related prep work or finish work. The contractor shall make every effort to return any surrounding areas impacted by project back to existing conditions. Any new penetrations through fire walls shall be caulked to maintain fire rating requirements. Any new utilities must not be tied or supported to other existing dissimilar utilities and supported by building structure.
13. The contractor shall completely prepare site for building operations, including demolition and removal of existing structures, and furnish labor, equipment, and materials and to perform work.
14. Bidders shall only visit the site by appointment with the Contracting Officer's Representative (COR).
15. The contractor shall provide photographic documentation to the COR of existing interior finishes prior to start of construction and shall make repairs to all existing interior finishes damaged during new installation to match existing finishes.

### **1.3 SPECIFICATIONS AND DRAWINGS**

- A. The contractor shall maintain on the job site one (1) printed set of specifications, one (1) printed copy of all RFI's and any documents that modify the original specifications and drawings.

### **1.4 CONSTRUCTION SECURITY REQUIREMENTS**

#### **A. Security Plan:**

1. The security plan defines both physical and administrative security procedures that will remain effective for the entire duration of the project.
2. The general contractor is responsible for assuring that all subcontractors working on the project and their employees also comply with these regulations.

#### **B. Security Procedures:**

1. General contractor's employees shall not enter the project site without appropriate badge. They may also be subject to inspection of their personal effects when entering or leaving the project site.

2. For working outside the "regular hours" as defined in the contract, the general contractor shall give 3 days notice to the Contracting Officer so that security arrangements can be provided for the employees. This notice is separate from any notices required for utility shutdown described later in this section.
3. No photography of VA premises is allowed without written permission of the Contracting Officer.
4. VA reserves the right to close down or shut down the project site and order general contractor's employees off the premises in the event of a national emergency. The general contractor may return to the site only with the written approval of the Contracting Officer.
5. Contractor shall adhere to all security standards regarding VA data. C&A requirements do not apply, and a Security Accreditation Package is not required.

E. Document Control:

1. Before starting any work, the general contractor/subcontractors shall submit an electronic security memorandum describing the approach to following goals and maintaining confidentiality of "sensitive information".
2. The general contractor is responsible for safekeeping of all drawings, project manuals, and other project information. This information shall be shared only with those with a specific need to accomplish the project.
3. Certain documents, sketches, videos or photographs and drawings may be marked "Law Enforcement Sensitive" or "Sensitive Unclassified". Secure such information in separate containers and limit the access to only those who will need it for the project. Return the information to the Contracting Officer upon request.
4. These security documents shall not be removed or transmitted from the project site without the written approval of Contracting Officer.
5. All paper waste or electronic media such as CD's and diskettes shall be shredded and destroyed in a manner acceptable to the VA.
6. Notify Contracting Officer and Site Security Officer immediately when there is a loss or compromise of "sensitive information".
7. All electronic information shall be stored in specified location following VA standards and procedures using an Engineering Document Management Software (EDMS).
  - a. Security, access and maintenance of all project drawings, both scanned and electronic shall be performed and tracked through the EDMS system.
  - b. "Sensitive information" including drawings and other documents may be attached to e-mail provided all VA encryption procedures are followed.

F. Parking

1. Paid parking is required on all days of the week and for all shifts. A daily parking permit shall be obtained at one of the three paid parking machines located around the SFVAMC campus at the cost of \$1 per 24-hour period. The \$1 parking permit fee applies for trucks,



vans, automobiles, motorcycles, motorized scooters or any other motorized vehicle using a single parking space. Employees parking in car/van pool or handicapped spaces must also pay the parking fee.

2. Parking passes must be purchased daily and will expire in 24 hours. There will be no refunds.
3. Parking is available on a first come/first serve basis. Payment of the parking permit fee does not guarantee that a parking space will be available.
4. Each vehicle parked in an employee parking lot must display a valid parking pass. Payment of the parking permit fee and display of the receipt on the front dashboard of the vehicle will validate parking for the 24-hour period. Vehicles parked in an employee lot without the tag visibly displayed or payment of the daily rate and display of the receipt will be subject to any of the following penalties: issuance of a U.S. Court Violation Notice, administrative action, or tow away. Parking in a designated patient, volunteer, GSA vehicle, or visitor lot parking space will also be subject to the above penalties.
5. Vehicles shall park in designated parking spaces only. Vehicles parked in locations other than designated parking spaces will be subject to issuance of a U.S. Court Violation Notice, administrative action, or vehicle tow away.
6. Motorcyclists must park in spaces designated for their use.

#### **1.5 FIRE SAFETY**

- A. Applicable Publications: Publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

1. American Society for Testing and Materials (ASTM):

E84-18.....Surface Burning Characteristics of Building Materials

2. National Fire Protection Association (NFPA):

10-2018.....Standard for Portable Fire Extinguishers

30-2018.....Flammable and Combustible Liquids Code

51B-2014.....Standard for Fire Prevention During Welding, Cutting and Other Hot Work

70-2017.....National Electrical Code

241-2013.....Standard for Safeguarding Construction, Alteration, and Demolition Operations

3. Occupational Safety and Health Administration (OSHA):

29 CFR 1926.....Safety and Health Regulations for Construction

- B. Fire Safety Plan: Establish and maintain a fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to COR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES prior to any worker for the contractor or subcontractors beginning work, they shall undergo a

safety briefing provided by the general contractor's competent person per OSHA requirements. This briefing shall include information on the construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, etc. Documentation shall be provided to the COR that individuals have undergone contractor's safety briefing.

- C. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.
- D. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3 m (10 feet).
- E. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with COR.
- F. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to COR.
- G. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.
- H. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.
- I. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the Medical Center. Parameters for the testing and results of any tests performed shall be recorded by the Medical Center and copies provided to the COR Engineer.
- J. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with COR.
- K. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with COR. Obtain permits from facility Safety through COR at least 48 hours in advance. Designate contractor's responsible project-site fire prevention program manager to permit hot work.
- L. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to COR.
- M. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. In separate and detached buildings under construction, smoking is prohibited except in designated smoking rest areas.
- N. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.

- O. Perform other construction, alteration and demolition operations in accordance with 29 CFR 1926.
- P. If required, submit documentation to the COR that personnel have been trained in the fire safety aspects of working in areas with impaired structural or compartmentalization features.
- Q. Above Ceiling Permit: Contractors are restricted from working above ceiling without the required Above Ceiling Permit. This required when working above any ceilings in the Medical Center outside of contained construction areas.
- R. Temporary Electrical: Contractors are not allowed to use power supplied VA unless approved by COR. If approved, use and installations shall be in accordance with 29 CFR 1926, NFPA 241 and NFPA 70. At no time will VA approve temporary power connection from a critical electrical circuit.

#### **1.6 OPERATIONS AND STORAGE AREAS**

- A. The contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the contractor's performance.
- B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the contractor and shall be removed by the contractor at its expense upon completion of the work.
- C. The contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation. When it is necessary to cross curbs or sidewalks, the contractor shall protect them from damage. The contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.
- D. Working space and space available for storing materials shall be as shown on the drawings or as determined by the COR.
- E. Workers are subject to rules of Medical Center applicable to their conduct.
- E. Execute work in such a manner as to interfere as little as possible with work being done by others. Keep roads clear of construction materials, debris, standing construction equipment and vehicles at all times.
- F. Execute work so as to interfere as little as possible with normal functioning of Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment, and with work being done by others. Use of equipment and tools that transmit vibrations and noises through the building structure, are not permitted in buildings that are occupied, during construction, jointly

by patients or medical personnel, and contractor's personnel, except as permitted by COR where required by limited working space.

1. Do not store materials and equipment in other than assigned areas.
  2. Schedule delivery of materials and equipment to immediate construction working areas within buildings in use by Department of Veterans Affairs in quantities sufficient for not more than four work days. Provide unobstructed access to Medical Center areas required to remain in operation.
  3. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of contractor's materials and equipment will be permitted subject to fire and safety requirements.
- G. Construction Safety Rounds: VA will perform construction safety rounds weekly. Contractor superintendent or contractor's Competent Person will be present during these safety inspections. COR will identify the date and time of these weekly inspections.
- H. Phasing: To ensure such executions, contractor shall furnish the COR with a schedule of approximate phasing dates on which the contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, contractor shall notify the COR two weeks in advance of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such phasing dates to ensure accomplishment of this work in successive phases mutually agreeable to Medical Center Director, COR and contractor.
- I. Buildings will be occupied during performance of work.
1. Contractor shall take all measures and provide all material necessary for protecting existing equipment and property in affected areas of construction against dust and debris, so that equipment and affected areas to be used in the Medical Centers operations will not be hindered. Contractor shall permit access to Department of Veterans Affairs personnel and patients through other construction areas which serve as routes of access to such affected areas and equipment. These routes whether access or egress shall be isolated from the construction area by temporary partitions and have walking surfaces, lighting, etc. to facilitate patient and staff access. Coordinate alteration work in areas occupied by Department of Veterans Affairs so that Medical Center operations will continue during the construction period.
- J. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at suitable places where shown; or, in absence of such indication, where directed by COR.
1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of COR. Electrical work shall be accomplished with all affected circuits or equipment de-energized. When an electrical outage cannot be accomplished, work on any energized circuits or equipment shall not commence without a

- detailed work plan, the Medical Center Director's prior knowledge and written approval.
2. Contractor shall submit a request to interrupt any such services to COR, in writing, 21 days in advance of proposed interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.
  3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Medical Center. Interruption time approved by Medical Center may occur at other than contractor's normal working hours.
  4. Major interruptions of any system must be requested, in writing, at least 28 calendar days prior to the desired time and shall be performed as directed by the COR.
  5. In case of a contract construction emergency, service will be interrupted on approval of COR. Such approval will be confirmed in writing as soon as practical.
  6. Whenever it is required that a connection fee be paid to a public utility provider for new permanent service to the construction project, for such items as water, sewer, electricity, gas or steam, payment of such fee shall be the responsibility of the Government and not the contractor.
- K. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, which are to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged at the main, branch or panel they originate from. The lines shall not be capped in finished areas, but shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas, or within walls or partitions; so that they are completely behind the finished surfaces.
- L. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:
1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles. Wherever excavation for new utility lines cross existing roads, at least one lane must be open to traffic at all times with approval.
  2. Method and scheduling of required cutting, altering and removal of existing roads, walks and entrances must be approved by the COR.
- M. Coordinate the work for this contract with other construction operations as directed by COR. This includes the scheduling of traffic and the use of roadways, as specified in Article 1.14, USE OF ROADWAYS.
- N. Contract Work Hours and Federal Holidays: Standard daily contract work hours at the San Francisco VA Medical Center (SFVAMC) are from 7:30 AM to 5:00 PM, Monday through Friday, except for Federal Holidays. The contractor shall submit to the Contracting Officer (CO) for approval, in writing, a notice of its desire to work during any period/hours other than the standard. Notice shall include a detailed description of the type of work to be performed and its location. These "non-standard" hours are referred to as "WHEN Hours" (Weekend-Holiday-Evening-Night). The notice requesting work during WHEN hours shall be submitted not

less than three (3) working days prior to each period of work scheduled at times other than normal duty hours to include Federal holidays. "WHEN Hours" shall be included in the contractor's budget and on their schedule with description of type of duties, duration, and manpower information. Contractors are reminded that patients are generally asleep after 10:00 PM. Therefore, approval is subject to the availability of the COR, the type of work to be performed, the specific hours requested, and the anticipated noise level that will be generated by contractor activity. Under no circumstance will the contractor proceed without express written approval of the Contracting Officer. When weekend work is approved by the COR, work shall be limited to no earlier than 7:30 AM start to 5:00 PM completion of construction period weekends. Any time out side of that window will be considered evening or night work and will require its own approval.

1. Work Phasing/Scheduling: Contractor shall work closely with the COR in developing a work schedule for contract performance. Simultaneous or transitional work on/between multiple facilities may be required. Advance coordination by the contractor is critical and required. Note, concurrent work performance is anticipated on all line items for this project.
2. The work to be performed on this project will include occupied areas; however, arrangements may be made so that the area may be blocked off during performance of work if feasible. The contractor shall notify the COR of intent to start work, with two (2) weeks' notice, in any specific assigned area. The contractor shall coordinate the work of all activities whereby both the Government and the contractor can continue operations with the least possible interference and inconvenience.
3. The contractor is required to have a minimum of crews for work covered by this contract, and provide additional crew(s) as the work justifies. Each crew can operate simultaneously and independently of the other crew(s).
4. The following is a list of Federal Holidays observed by all Federal Installations:

New Year's Day, January 1

Birthday of Martin Luther King, Jr, 3rd Monday in January

Washington's Birthday, 3rd Monday in February

Memorial Day, Last Monday in May

Independence Day, July 4

Labor Day, 1st Monday in September

Columbus Day, 2nd Monday in September

Veterans Day, November 11

Thanksgiving Day, 4th Thursday in November

Christmas Day, December 25

Any of the above holidays falling on a Saturday will be observed on the preceding Friday; holidays falling on a Sunday will be observed on the following Monday. Also included is any date specifically declared by the President of the United States of America as a National Holiday.

5. No deliveries of construction equipment, materials, HVAC equipment, dumpsters (or pick up of dumpsters), cranes, concrete trucks, etc. before 7:30 AM on weekdays and 8 AM on weekends. Exception will be for oversize loads that require delivery before a certain time due to permitting conditions, and shall require a minimum of 3 days notice to the COR prior to arrival at SFVAMC. No contractor vehicles, delivery vehicle, cranes, concrete trucks, hauling trucks, etc. will be staged within 500 yards of the SFVAMC prior to driving onto SFVAMC grounds.

#### **1.7 ALTERATIONS**

- A. Survey: Before any work is started, the contractor shall make a thorough survey with the COR of areas of buildings in which alterations occur and areas which are anticipated routes of access.
- B. Any items required to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of COR, to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by contractor with new items in accordance with specifications which will be furnished by Government. Provided the contract work is changed by reason of this paragraph B, the contract will be modified accordingly, under provisions of clause entitled "DIFFERING SITE CONDITIONS" (FAR 52.236-2) and "CHANGES" (FAR 52.243-4 and VAAR 852.236-88).
- C. Re-Survey: Thirty days before expected partial or final inspection date, the contractor and COR together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors, windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:
  1. Re-survey report shall also list any damage caused by contractor to such flooring and other surfaces, despite protection measures; and, will form basis for determining extent of repair work required of contractor to restore damage caused by contractor's workers in executing work of this contract.
- D. Protection: Provide the following protective measures:
  1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.
  2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.
  3. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.
- E. Final Cleanup: Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
- F. Disposal and Retention: Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts

thereof, shall be disposed of as follows per Article 1.9, DISPOSAL AND RETENTION.

#### **1.8 INFECTION PREVENTION MEASURES**

- A. Implement the requirements of VAMC's Infection Control Risk Assessment (ICRA) team. ICRA Group may monitor dust near the construction work and require the contractor to take corrective action immediately if the safe levels are exceeded.
- B. Establish and maintain a dust control program as part of the contractor's infection preventive measures in accordance with the guidelines provided by ICRA Group. Prior to start of work, prepare a plan detailing project-specific dust protection measures, including periodic status reports, and submit to COR for review for compliance with contract requirements. No work shall start without approved ICRA permit and full coordination with COR.
  - 1. All personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the Medical Center.
- C. Medical Center Infection Control personnel shall monitor for airborne disease (e.g. aspergillosis) as appropriate during construction. A baseline of conditions may be established by the Medical Center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality. In addition:
  - 1. The COR and VAMC Infection Control personnel shall review pressure differential monitoring documentation to verify that pressure differentials in the construction zone and in the patient-care rooms are appropriate for their settings. The requirement for negative air pressure in the construction zone shall depend on the location and type of activity. Upon notification, the contractor shall implement corrective measures to restore proper pressure differentials as needed.
  - 2. In case of any problem, the Medical Center, along with assistance from the contractor, shall conduct an environmental assessment to find and eliminate the source.
- D. In general, the following preventive measures shall be adopted during construction to keep down dust and prevent mold.
  - 1. Do not perform dust producing tasks within occupied areas without the approval of the COR. For construction in any areas that will remain jointly occupied by the Medical Center and contractor's workers, the contractor shall:
    - a. Provide plastic, fire-resistant sheets to isolate larger areas when generating dust indoors.
    - b. HEPA filtration is required where the exhaust dust may reenter the breathing zone. Contractor shall verify that construction exhaust to exterior is not reintroduced to the Medical Center through intake vents, or building openings. Install HEPA (High Efficiency Particulate Accumulator) filter vacuum system rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. Insure continuous negative air pressures occurring within the work area. HEPA filters should have ASHRAE 85 or other pre-filter to extend the useful life of the HEPA. Provide both



primary and secondary filtrations units. Exhaust hoses shall be heavy duty, flexible steel reinforced and exhausted so that dust is not reintroduced to the Medical Center.

- c. Adhesive Walk-off/Carpet Walk-off Mats, minimum 600mm x 900mm (24" x 36"), shall be used at all interior transitions from the construction area to occupied Medical Center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area always.
- d. Vacuum and wet mop all transition areas from construction to the occupied Medical Center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as they are created. Transport these outside the construction area in containers with tightly fitting lids.
- e. The contractor shall not haul debris through patient-care areas without prior approval of the COR and the Medical Center. When approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.
- f. Using a HEPA vacuum, clean inside the barrier and vacuum ceiling tile prior to replacement. Any ceiling access panels opened for investigation beyond sealed areas shall be sealed immediately when unattended.
- g. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.
- h. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.

**E. Final Cleanup:**

- 1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
- 2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
- 3. All new air ducts shall be cleaned prior to final inspection.

**1.9 DISPOSAL AND RETENTION**

A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:

- 1. Reserved items which are to remain property of the Government are identified by attached tags or noted on drawings or in specifications as items to be stored. Items that remain property of the Government shall be removed or dislodged from present locations

in such a manner as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by COR.

2. Items not reserved shall become property of the contractor and be removed by contractor from Medical Center.
3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with contractor's operation.

#### **1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS**

- A. The contractor shall preserve and protect all structures, equipment, and vegetation (such as trees, shrubs, and grass) on or adjacent to the work site, which are not to be removed and which do not unreasonably interfere with the work required under this contract. The contractor shall only remove trees when specifically authorized to do so, and shall avoid damaging vegetation that will remain in place. If any limbs or branches of trees are broken during contract performance, or by the careless operation of equipment, or by workers, the contractor shall trim those limbs or branches with a clean cut and paint the cut with a tree-pruning compound as directed by the Contracting Officer.
- B. The contractor shall protect from damage all existing improvements and utilities at or near the work site and on adjacent property of a third party, the locations of which are made known to or should be known by the contractor. The contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the contractor.

#### **1.11 RESTORATION**

- A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the COR. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the COR before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.
- B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.
- C. At contractor's own expense, contractor shall immediately restore to service and repair any damage caused by contractor's workers to existing piping and conduits, wires, cables, etc., of utility services

or of fire protection systems and communications systems (including telephone) which are not scheduled for discontinuance or abandonment.

- D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2).

#### **1.12 PHYSICAL DATA**

- A. Data and information furnished or referred to in this specification is for the contractor's information. The Government shall not be responsible for any interpretation of or conclusion drawn from the data or information by the contractor.
- B. Government does not guarantee that other materials will not be encountered nor that proportions, conditions or character of several materials will not vary from those indicated by explorations. Bidders are expected to examine site of work and logs of borings; and, after investigation, decide for themselves character of materials and make their bids accordingly. Upon proper application to Department of Veterans Affairs, bidders will be permitted to make subsurface explorations of their own at site.

#### **1.13 AS-BUILT DRAWINGS**

- A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications.
- B. All variations shall be shown in the same general detail as used in the contract drawings. To ensure compliance, as-built drawings shall be made available for the COR's review, as often as requested.
- C. Contractor shall deliver two approved completed sets of as-built drawings in the electronic version (scanned PDF) to the COR within 15 calendar days after each completed phase and after the acceptance of the project by the COR.
- D. Paragraphs A, B, & C shall also apply to all shop drawings.

#### **1.14 USE OF ROADWAYS**

- A. For hauling, use only established public roads and roads on Medical Center property and, when authorized by the COR, such temporary roads which are necessary in the performance of contract work. Temporary roads shall be constructed and restoration performed by the contractor at contractor's expense. When necessary to cross curbing, sidewalks, or similar construction, they must be protected by well-constructed bridges.

#### **1.15 PRECONSTRUCTION RISK ASSESSMENT**

- A. For every construction project, the contractor and the COR are required to perform a Pre-Construction Risk Assessment (PCRA). The contractor must submit the PCRA within 15 days from issuance of the Notice to Proceed.

#### **1.16 TEMPORARY USE OF EXISTING ELEVATORS**

- A. Contractor will be allowed the use of existing elevators. The contractor shall provide maximum protection of elevator components.

**1.17 TEMPORARY TOILETS**

- A. Contractor may have for use of contractor's workers, such toilet accommodations as may be assigned to contractor by Medical Center. Contractor shall keep such places clean and be responsible for any damage done thereto by contractor's workers. Failure to maintain satisfactory condition in toilets will deprive contractor of the privilege to use such toilets.

**1.18 AVAILABILITY AND USE OF UTILITY SERVICES**

- A. The Government shall make all reasonably required amounts of utilities available to the contractor from existing outlets and supplies, as specified in the contract. The contractor shall carefully conserve any utilities furnished without charge.
- B. Electricity (for Construction and Testing): Furnish all temporary electric services.
  - 1. Obtain electricity by connecting to the Medical Center electrical distribution system. Electricity is available at no cost to the contractor.

**1.19 TESTS**

- A. Conduct final tests required in various sections of specifications in presence of an authorized representative of the Contracting Officer. contractor shall furnish all labor, materials, equipment, instruments, and forms, to conduct and record such tests.
- B. All related components as defined above shall be functioning when any system component is tested. Tests shall be completed within a reasonably period of time during which operating and environmental conditions remain reasonably constant and are typical of the design conditions.
- C. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components and of the entire system.

**1.20 INSTRUCTIONS**

- A. Contractor shall furnish Maintenance and Operating manuals (hard copies and electronic) and verbal instructions when required by the various sections of the specifications and as hereinafter specified.
- B. Manuals: Maintenance and operating manuals and one compact disc (four hard copies and one electronic copy each) for each separate piece of equipment shall be delivered to the COR coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference

the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing equipment similar to but of a different model, style, and size than that furnished will not be accepted.

- C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed training to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the COR and shall be considered concluded only when the COR is satisfied in regard to complete and thorough coverage. The contractor shall submit a course outline with associated material to the COR for review and approval prior to scheduling training to ensure the subject matter covers the expectations of the VA and the contractual requirements. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the COR, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

#### **1.21 RELOCATED EQUIPMENT AND ITEMS**

- A. Contractor shall disconnect, dismantle as necessary, remove and reinstall in new location, all existing equipment and items indicated by symbol "R" or otherwise shown to be relocated by the contractor.
- B. Perform relocation of such equipment or items at such times and in such a manner as directed by the COR.
- C. Provide all mechanical and electrical service connections, fittings, fastenings and any other materials necessary for assembly and installation of relocated equipment; and leave such equipment in proper operating condition.
- D. All service lines such as noted above for relocated equipment shall be in place at point of relocation ready for use before any existing equipment is disconnected. Make relocated existing equipment ready for operation or use immediately after reinstallation.

#### **1.22 CONSTRUCTION SIGN**

- A. Provide two (2) construction signs at each entrance to the construction area. Signs shall be of a durable material, 300 mm (12 inch) high and 760 mm (30 inch) wide. Background shall be of yellow gloss paint. Lettering shall be in blue gloss paint, with letters 50 mm (2 inch) high in Helvetica. Letter as follows:

DANGER - KEEP OUT

CONSTRUCTION AREA

AUTHORIZED PERSONNEL ONLY

PLEASE EXCUSE THE INCONVENIENCE

## WE ARE WORKING TO IMPROVE YOUR FACILITY

- B. Maintain signs and remove them when directed by the COR.

**1.23 SAFETY SIGN**

- A. Prior to commencing work, the contractor shall provide proof that an OSHA-certified "competent person" (CP) (29 CFR 1926.20 (b) (2)) will maintain a presence at the work site whenever the general or subcontractors are present.
- B. All contracted employees must be able to speak and understand English. Contracted employees must be legally employed in the United States of America.
- C. All employees of general contractor or subcontractors shall have the 10-hour or 30-hour OSHA certified Construction Safety course and/or other relevant competency training. Copies of training records shall be submitted before start of work.
- D. Provide Safety Signs per OSHA requirements and as directed by the Contracting Officer's Representative. All safety signs shall be commercially produced.

**1.24 CONSTRUCTION AND DEMOLITION DEBRIS MANAGEMENT**

- A. This project requires compliance with the City of San Francisco's Construction and Demolition Ordinance, number 27-06, for managing construction and demolition debris, where at least 65% can be reused/recycled and diverted away from the landfill. Compliance with this City Ordinance can be accomplished through using a registered transporter and registered facility for managing the construction/demolition debris. For more information, refer to the following websites:

Construction and Demolition Ordinance:

[https://sfenvironment.org/sites/default/files/fliers/files/cd\\_ordinance.pdf](https://sfenvironment.org/sites/default/files/fliers/files/cd_ordinance.pdf)

List of Registered Transporters:

[https://sfenvironment.org/sites/default/files/fliers/files/sfe\\_zw\\_cd\\_registered\\_facilities\\_list\\_190222.pdf](https://sfenvironment.org/sites/default/files/fliers/files/sfe_zw_cd_registered_facilities_list_190222.pdf)

List of Registered Facilities:

[https://sfenvironment.org/sites/default/files/fliers/files/sfe\\_zw\\_cd\\_registered\\_facilities\\_list\\_181108.pdf](https://sfenvironment.org/sites/default/files/fliers/files/sfe_zw_cd_registered_facilities_list_181108.pdf)

Construction and Demolition Forms and Resources

<https://sfenvironment.org/construction-demolition-resources>

**1.25 HISTORIC PRESERVATION**

- A. Where the contractor or any of the contractor's employees, prior to, or during the construction work, are advised of or discover any possible archeological, historical and/or cultural resources, the contractor shall immediately notify the COR verbally, and then with a written follow up.

**1.26 PARKING**

- A. There will be minimal parking space on site available to the contractor for staging, container, or debris box. Coordinate through the COR prior to staging or placing container or debris box.

**1.27 I.D. BADGES**

- A. All workers are required to obtain a time-limited I.D. badge from the VA Police Service, located on the ground floor of Building 203. This badge must be worn always when workers are on site.

**1.28 CONSTRUCTION SCHEDULE**

- A. The contractor shall develop a Construction Schedule demonstrating fulfillment of contract requirements, shall keep the schedule up-to-date as required in this Article, and shall utilize the schedule for coordinating and monitoring work under the Contract (including activities of subcontractors, vendors, and suppliers). The schedule shall be prepared in the format of a Gantt or Bar Chart, utilizing Microsoft Project or similar computer application, subject to approval by the COR.
- B. Within 10 calendar days after receipt of Notice to Proceed, the contractor shall submit a complete Construction Schedule for review by the COR under provisions of Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES. Submit three copies on sheets of paper 750 mm by 1050 mm (30 by 42 inches). Within 10 calendar days of receipt of the Construction Schedule, the Contracting Officer's Representative will return the submittal with any comments or objections, and if appropriate, schedule a meeting with the contractor for joint review, correction, or adjustment of the schedule. Within 14 calendar days after the later of the return of the submittal or the joint review meeting, the contractor shall revise and submit three copies of the revised schedule for the Contracting Officer's Representative approval.
- C. The Construction Schedule shall show construction activities in sufficient detail to monitor work progress, to support application and certificates for payment, and to coordinate submittal review, inspection, and other activities of the COR and his consultants. As a minimum, it will contain the level of detail shown in the Sample Construction Schedule Drawing CS-1, which is a sample only, derived from a different project and not to be used as is for this project. Activities shall be identified by trade and nature of task, and shall show durations for the activity from allowable early-start and late-start to early-finish and late-finish, with graphic distinctions between these durations made by color or pattern.
- D. The contractor shall update the Construction Schedule monthly, and shall submit an updated schedule with each payment request. Monthly job progress meetings shall be held on dates mutually agreed to by the Contracting Officer's Representative and the contractor. An updated schedule shall be furnished by the contractor to the VA at least three working days prior to the meeting. At the meeting, job progress will be reviewed to verify: actual start or finish dates for activities completed or in progress; remaining duration required to complete activities in progress or scheduled to start; and percentage complete for activities in progress. Any changes required to the schedule due to discrepancies between actual job progress and the schedule shall be reported by the contractor, reviewed, and submitted for approval to the Contracting Officer. Any corrective actions in terms of increased manpower, shift hours, work days, or other measures necessary to maintain phasing or contract completion dates shall be reported by the contractor, reviewed, and included in proposed schedule changes.

- E. Contractor shall install and post the construction signs at the entrance to the construction area. Sign shall include the contractor name and telephone number.

#### **1.29 DAILY LOGS**

- A. Permit and daily construction checklist
- B. Workers present and work taking place during day at project
- C. Egress Routes for Construction Workers should be inspected daily
- D. Report findings and corrective actions weekly to the COR

#### **1.30 TB TESTING REQUIREMENTS**

- A. The contractor shall be responsible for providing written documentation that all his employees and subcontractor employees that will be working within the identified areas of the Medical Center have a PPD tuberculin skin test (TST Testing) for Tuberculosis screening within the last 12 months prior to starting work at the San Francisco VA Medical Center. The contractor shall insure that those individuals keep current annual test results throughout the duration of the project. The contractor is responsible to insure these documents are kept current and are readily available for review upon request. The contractor shall provide this written document to the Contracting officer (CO) or Contracting Officer's Representative naming their employees or subcontractor employees, the date they were tested and the PPD Skin Test results. Documentation of where the test was performed is also required. If the employee has never had a PPD Skin Test, then a two-step skin test or an FDA approved Quantiferon blood test is required.
- B. If the employee or the subcontractor employee test results are positive or their PPD Skin Test has been found to be positive in the past, the contractor is required to also state in writing if the employee was treated for latent Tuberculosis with INH. If the employee is a new PPD Skin Test Converter, a Chest X-Ray is required with proper documented results. The identified areas at the San Francisco VAMC that require these documented tests and results as part of the contract are buildings 1 (ground floor only), 8, 200, 203 and 208.

#### **1.31 SEASONAL INFLUENZA VACCINE REQUIREMENTS**

- A. Seasonal influenza vaccination is the single best way to prevent the spread of influenza in healthcare settings. It is the policy of this Medical Center that any contractor working in buildings 8, 203, 208, 200 (defined as patient care areas) must show evidence of receiving a flu shot during the flu season or wear an ordinary loop mask while working within 6 feet of the breathing zone of any patient. The contractor will be responsible for ensuring its employees have had this vaccination while working in patient care areas between November 1 and March 31. Flu vaccination can be done at an outside provider or through SFVA Occupational Health at no charge. Proof of vaccination must be shown to the Contracting Officer's Representative prior to start of work using the self-certification form for each employee that will be working in patient care areas at the SFVAMC during the defined timeline.

#### **1.32 ASBESTOS**

- A. Materials containing asbestos can be found throughout the facility, thus appropriate safety precautions be taken by the contractor.



Materials containing asbestos are not to be disturbed. Working in an asbestos environment, such as above a ceiling, will require an approved containment with a HEPA filter system, certified/qualified worker, and a qualified Industrial Hygienist to monitor the work environment as per OSHA requirements. Appropriate documentation must be submitted to the VA for approval that verifies qualifications.

- - - E N D - - -

**SECTION 01 33 23****SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. This specification defines the general requirements and procedures for submittals. A submittal is information submitted for VA review to establish compliance with the contract documents.
- B. Detailed submittal requirements are found in the technical sections of the contract specifications. The Contracting Officer may request submittals in addition to those specified when deemed necessary to adequately describe the work covered in the respective technical specifications at no additional cost to the government.
- C. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project. Non-compliant material incorporated in the work will be removed and replaced at the Contractor's expense.

**1.2 DEFINITIONS**

- A. Preconstruction Submittals: Submittals which are required prior to issuing contract notice to proceed or starting construction. For example, Certificates of insurance; Surety bonds; Site-specific safety plan; Construction progress schedule; Schedule of values; Submittal register; List of proposed subcontractors.
- B. Shop Drawings: Drawings, diagrams, and schedules specifically prepared to illustrate some portion of the work. Drawings prepared by or for the Contractor to show how multiple systems and interdisciplinary work will be integrated and coordinated.
- C. Product Data: Catalog cuts, illustrations, schedules, diagrams, performance charts, instructions, and brochures, which describe and illustrate size, physical appearance, and other characteristics of materials, systems, or equipment for some portion of the work. Samples of warranty language when the contract requires extended product warranties.
- D. Samples: Physical examples of materials, equipment, or workmanship that illustrate functional and aesthetic characteristics of a material or product and establish standards by which the work can be judged. Color samples from the manufacturer's standard line (or custom color samples if specified) to be used in selecting or approving colors for the project. Field samples and mock-ups constructed to establish standards by which the ensuing work can be judged.
- E. Design Data: Calculations, mix designs, analyses, or other data pertaining to a part of work.
- F. Test Reports: Report which includes findings of a test required to be performed by the Contractor on an actual portion of the work. Report

which includes finding of a test made at the job site or on sample taken from the job site, on portion of work during or after installation.

- G. Certificates: Document required of Contractor, or of a manufacturer, supplier, installer, or subcontractor through Contractor. The purpose is to document procedures, acceptability of methods, or personnel qualifications for a portion of the work.
- H. Manufacturer's Instructions: Pre-printed material describing installation of a product, system, or material, including special notices and MSDS concerning impedances, hazards, and safety precautions.
- I. Manufacturer's Field Reports: Documentation of the testing and verification actions taken by manufacturer's representative at the job site on a portion of the work, during or after installation, to confirm compliance with manufacturer's standards or instructions. The documentation must indicate whether the material, product, or system has passed or failed the test.
- J. Operation and Maintenance Data: Manufacturer data that is required to operate, maintain, troubleshoot, and repair equipment, including manufacturer's help, parts list, and product line documentation. This data shall be incorporated in an operations and maintenance manual.
- K. Closeout Submittals: Documentation necessary to properly close out a construction contract. For example, Record Drawings and as-built drawings. Also, submittal requirements necessary to properly close out a phase of construction on a multi-phase contract.

### **1.3 SUBMITTAL REGISTER**

- A. The submittal register will list items of equipment and materials for which submittals are required by the specifications. This list may not be all inclusive and additional submittals may be required by the specifications. The Contractor is not relieved from supplying submittals required by the contract documents but which have been omitted from the submittal register.
- B. The submittal register will serve as a scheduling document for submittals and will be used to control submittal actions throughout the contract period.
- C. The VA will provide the initial submittal register in electronic format. Thereafter, the Contractor shall track all submittals by maintaining a complete list, including completion of all data columns, including dates on which submittals are received and returned by the VA.
- D. The Contractor shall update the submittal register as submittal actions occur and maintain the submittal register at the project site until final acceptance of all work by Contracting Officer.
- E. The Contractor shall submit formal monthly updates to the submittal register in electronic format. Each monthly update shall document actual submission and approval dates for each submittal.

### **1.4 SUBMITTAL SCHEDULING**

- A. Submittals are to be scheduled, submitted, reviewed, and approved prior to the acquisition of the material or equipment.

- B. Coordinate scheduling, sequencing, preparing, and processing of submittals with performance of work so that work will not be delayed by submittal processing. Allow time for potential resubmittal.
- C. No delay costs or time extensions will be allowed for time lost in late submittals or resubmittals.
- D. All submittals are required to be approved prior to the start of the specified work activity.

### **1.5 SUBMITTAL PREPARATION**

- A. Each submittal is to be complete and in sufficient detail to allow ready determination of compliance with contract requirements.
- B. Collect required data for each specific material, product, unit of work, or system into a single submittal. Prominently mark choices, options, and portions applicable to the submittal. Partial submittals will not be accepted for expedition of construction effort. Submittal will be returned without review if incomplete.
- C. If available product data is incomplete, provide Contractor-prepared documentation to supplement product data and satisfy submittal requirements.
- D. All irrelevant or unnecessary data shall be removed from the submittal to facilitate accuracy and timely processing. Submittals that contain the excessive amount of irrelevant or unnecessary data will be returned with review.
- E. Provide a transmittal form for each submittal with the following information:
  - 1. Project title, location and number.
  - 2. Construction contract number.
  - 3. Date of the drawings and revisions.
  - 4. Name, address, and telephone number of subcontractor, supplier, manufacturer, and any other subcontractor associated with the submittal.
  - 5. List paragraph number of the specification section and sheet number of the contract drawings by which the submittal is required.
  - 6. When a resubmission, add alphabetic suffix on submittal description. For example, submittal 18 would become 18A, to indicate resubmission.
  - 7. Product identification and location in project.
- F. The Contractor is responsible for reviewing and certifying that all submittals are in compliance with contract requirements before submitting for VA review. Proposed deviations from the contract requirements are to be clearly identified. All deviations submitted must include a side by side comparison of item being proposed against item specified. Failure to point out deviations will result in the VA requiring removal and replacement of such work at the Contractor's expense.
- G. Stamp, sign, and date each submittal transmittal form indicating action taken.

- H. Stamp used by the Contractor on the submittal transmittal form to certify that the submittal meets contract requirements is to be similar to the following:

CONTRACTOR
(Firm Name)
_____ Approved
_____ Approved with corrections as noted on submittal data and/or attached sheets(s)
SIGNATURE: _____
TITLE: _____
DATE: _____

#### 1.6 SUBMITTAL FORMAT AND TRANSMISSION

- A. Provide submittals in electronic format, with the exception of material samples. Use PDF as the electronic format, unless otherwise specified or directed by the Contracting Officer.
- B. Compile the electronic submittal file as a single, complete document. Name the electronic submittal file specifically according to its contents.
- C. Electronic files must be of sufficient quality that all information is legible. Generate PDF files from original documents so that the text included in the PDF file is both searchable and can be copied. If documents are scanned, Optical Character Resolution (OCR) routines are required.
- D. E-mail electronic submittal documents smaller than 5MB in size to e-mail addresses as directed by the Contracting Officer.

- E. Provide electronic documents over 5MB through an electronic FTP file sharing system. Confirm that the electronic FTP file sharing system can be accessed from the VA computer network. The Contractor is responsible for setting up, providing, and maintaining the electronic FTP file sharing system for the construction contract period of performance.
- F. Provide hard copies of submittals when requested by the Contracting Officer. Up to 3 additional hard copies of any submittal may be requested at the discretion of the Contracting Officer, at no additional cost to the VA.

### **1.7 SAMPLES**

- A. Submit two sets of physical samples showing range of variation, for each required item.
- B. Where samples are specified for selection of color, finish, pattern, or texture, submit the full set of available choices for the material or product specified.
- C. When color, texture, or pattern is specified by naming a particular manufacturer and style, include one sample of that manufacturer and style, for comparison.
- D. Before submitting samples, the Contractor is to ensure that the materials or equipment will be available in quantities required in the project. No change or substitution will be permitted after a sample has been approved.
- E. The VA reserves the right to disapprove any material or equipment which previously has proven unsatisfactory in service.
- F. Physical samples supplied maybe requested back for use in the project after reviewed and approved.

### **1.8 OPERATION AND MAINTENANCE DATA**

- A. Submit data specified for a given item within 30 calendar days after the item is delivered to the contract site.
- B. In the event the Contractor fails to deliver O&M Data within the time limits specified, the Contracting Officer may withhold from progress payments 50 percent of the price of the item with which such O&M Data are applicable.

### **1.9 TEST REPORTS**

SRE may require specific test after work has been installed or completed which could require contractor to repair test area at no additional cost to contract.

### **1.10 VA REVIEW OF SUBMITTALS AND RFIS**

- A. The VA will review all submittals for compliance with the technical requirements of the contract documents. The Architect-Engineer for this project will assist the VA in reviewing all submittals and determining contractual compliance. Review will be only for conformance with the applicable codes, standards and contract requirements.

- B. Period of review for submittals begins when the VA COR receives submittal from the Contractor.
- C. Period of review for each resubmittal is the same as for initial submittal.
- D. VA review period is 15 working days for submittals.
- E. VA review period is 10 working days for RFIs.
- F. The VA will return submittals to the Contractor with the following notations:
  - 1. "Approved": authorizes the Contractor to proceed with the work covered.
  - 2. "Approved as noted": authorizes the Contractor to proceed with the work covered provided the Contractor incorporates the noted comments and makes the noted corrections.
  - 3. "Disapproved, revise and resubmit": indicates noncompliance with the contract requirements or that submittal is incomplete. Resubmit with appropriate changes and corrections. No work shall proceed for this item until resubmittal is approved.
  - 4. "Not reviewed": indicates submittal does not have evidence of being reviewed and approved by Contractor or is not complete. A submittal marked "not reviewed" will be returned with an explanation of the reason it is not reviewed. Resubmit submittals after taking appropriate action.

#### **1.11 APPROVED SUBMITTALS**

- A. The VA approval of submittals is not to be construed as a complete check, and indicates only that the general method of construction, materials, detailing, and other information are satisfactory.
- B. VA approval of a submittal does not relieve the Contractor of the responsibility for any error which may exist. The Contractor is responsible for fully complying with all contract requirements and the satisfactory construction of all work, including the need to check, confirm, and coordinate the work of all subcontractors for the project. Non-compliant material incorporated in the work will be removed and replaced at the Contractor's expense.
- C. After submittals have been approved, no resubmittal for the purpose of substituting materials or equipment will be considered unless accompanied by an explanation of why a substitution is necessary.
- D. Retain a copy of all approved submittals at project site, including approved samples.

#### **1.12 WITHHOLDING OF PAYMENT**

Payment for materials incorporated in the work will not be made if required approvals have not been obtained.

- - - E N D - - -



**SECTION 01 35 26**  
**SAFETY REQUIREMENTS**  
**TABLE OF CONTENTS**

1.1	APPLICABLE PUBLICATIONS.....	2
1.2	DEFINITIONS.....	3
1.3	REGULATORY REQUIREMENTS.....	4
1.4	ACCIDENT PREVENTION PLAN (APP).....	4
1.5	ACTIVITY HAZARD ANALYSES (AHAs).....	7
1.6	PRECONSTRUCTION CONFERENCE.....	8
1.7	"SITE SAFETY AND HEALTH OFFICER" (SSHO) and "COMPETENT PERSON" (CP) .....	9
1.8	TRAINING.....	9
1.9	INSPECTIONS.....	10
1.10	ACCIDENTS, OSHA 300 LOGS, AND MAN-HOURS .....	11
1.11	PERSONAL PROTECTIVE EQUIPMENT (PPE) .....	11
1.12	INFECTION CONTROL .....	12
1.13	TUBERCULOSIS SCREENING .....	17
1.14	FIRE SAFETY .....	18
1.15	ELECTRICAL .....	19
1.16	FALL PROTECTION .....	20
1.17	SCAFFOLDS AND OTHER WORK PLATFORMS .....	21
1.18	EXCAVATION AND TRENCHES .....	21
1.19	CRANES .....	23
1.20	CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT) .....	23
1.21	CONFINED SPACE ENTRY .....	24
1.22	WELDING AND CUTTING .....	24
1.23	LADDERS .....	24
1.24	FLOOR & WALL OPENINGS .....	24

**1.1 APPLICABLE PUBLICATIONS:**

- A. Latest publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.
- B. American Society of Safety Engineers (ASSE):
- A10.1-2011.....Pre-Project & Pre-Task Safety and Health Planning
  - A10.34-2012.....Protection of the Public on or Adjacent to Construction Sites
  - A10.38-2013.....Basic Elements of an Employer's Program to Provide a Safe and Healthful Work Environment  
American National Standard Construction and Demolition Operations
- C. American Society for Testing and Materials (ASTM):
- E84-2013.....Surface Burning Characteristics of Building Materials
- D. The Facilities Guidelines Institute (FGI):
- FGI Guidelines-2010Guidelines for Design and Construction of Healthcare Facilities
- E. National Fire Protection Association (NFPA):
- 10-2013.....Standard for Portable Fire Extinguishers
  - 30-2012.....Flammable and Combustible Liquids Code
  - 51B-2014.....Standard for Fire Prevention During Welding, Cutting and Other Hot Work
  - 70-2014.....National Electrical Code
  - 70B-2013.....Recommended Practice for Electrical Equipment Maintenance
  - 70E-2015 .....Standard for Electrical Safety in the Workplace
  - 99-2012.....Health Care Facilities Code
  - 241-2013.....Standard for Safeguarding Construction, Alteration, and Demolition Operations
- F. The Joint Commission (TJC)
- TJC Manual .....Comprehensive Accreditation and Certification Manual
- G. U.S. Nuclear Regulatory Commission
- 10 CFR 20 .....Standards for Protection Against Radiation
- H. U.S. Occupational Safety and Health Administration (OSHA):
- 29 CFR 1904 .....Reporting and Recording Injuries & Illnesses
  - 29 CFR 1910 .....Safety and Health Regulations for General Industry
  - 29 CFR 1926 .....Safety and Health Regulations for Construction Industry

## CPL 2-0.124.....Multi-Employer Citation Policy

## I. VHA Directive 2005-007

**1.2 DEFINITIONS:**

- A. Critical Lift. A lift with the hoisted load exceeding 75% of the crane's maximum capacity; lifts made out of the view of the operator (blind picks); lifts involving two or more cranes; personnel being hoisted; and special hazards such as lifts over occupied facilities, loads lifted close to power-lines, and lifts in high winds or where other adverse environmental conditions exist; and any lift which the crane operator believes is critical.
- B. OSHA "Competent Person" (CP). One who is capable of identifying existing and predictable hazards in the surroundings and working conditions which are unsanitary, hazardous or dangerous to employees, and who has the authorization to take prompt corrective measures to eliminate them (see 29 CFR 1926.32(f)).
- C. "Qualified Person" means one who, by possession of a recognized degree, certificate, or professional standing, or who by extensive knowledge, training and experience, has successfully demonstrated his ability to solve or resolve problems relating to the subject matter, the work, or the project.
- D. High Visibility Accident. Any mishap which may generate publicity or high visibility.
- E. Accident/Incident Criticality Categories:

No impact - near miss incidents that should be investigated but are not required to be reported to the VA;

Minor incident/impact - incidents that require first aid or result in minor equipment damage (less than \$5000). These incidents must be investigated but are not required to be reported to the VA;

Moderate incident/impact - Any work-related injury or illness that results in:

1. Days away from work (any time lost after day of injury/illness onset);
2. Restricted work;
3. Transfer to another job;
4. Medical treatment beyond first aid;
5. Loss of consciousness;
6. A significant injury or illness diagnosed by a physician or other licensed health care professional, even if it did not result in (1) through (5) above or,
7. any incident that leads to major equipment damage (greater than \$5000).

These incidents must be investigated and are required to be reported to the VA;

Major incident/impact - Any mishap that leads to fatalities, hospitalizations, amputations, and losses of an eye as a result of contractors' activities. Or any incident which leads to major property damage (greater than \$20,000) and/or may generate publicity or high

visibility. These incidents must be investigated and are required to be reported to the VA as soon as practical, but not later than 2 hours after the incident.

- E. Medical Treatment. Treatment administered by a physician or by registered professional personnel under the standing orders of a physician. Medical treatment does not include first aid treatment even through provided by a physician or registered personnel.

### **1.3 REGULATORY REQUIREMENTS:**

- A. In addition to the detailed requirements included in the provisions of this contract, comply with 29 CFR 1926, comply with 29 CFR 1910 as incorporated by reference within 29 CFR 1926, comply with ASSE A10.34, and all applicable [federal, state, and local] laws, ordinances, criteria, rules and regulations. Submit matters of interpretation of standards for resolution before starting work. Where the requirements of this specification, applicable laws, criteria, ordinances, regulations, and referenced documents vary, the most stringent requirements govern except with specific approval and acceptance by the Contracting Officer Representative (COR).

### **1.4 ACCIDENT PREVENTION PLAN (APP):**

- A. The APP (aka Construction Safety & Health Plan) shall interface with the Contractor's overall safety and health program. Include any portions of the Contractor's overall safety and health program referenced in the APP in the applicable APP element and ensure it is site-specific. The Government considers the Prime Contractor to be the "controlling authority" for all worksite safety and health of each subcontractor(s). Contractors are responsible for informing their subcontractors of the safety provisions under the terms of the contract and the penalties for noncompliance, coordinating the work to prevent one craft from interfering with or creating hazardous working conditions for other crafts, and inspecting subcontractor operations to ensure that accident prevention responsibilities are being carried out.
- B. The APP shall be prepared as follows:
  1. Written in English by a qualified person who is employed by the Prime Contractor articulating the specific work and hazards pertaining to the contract (model language can be found in ASSE A10.33). Specifically articulating the safety requirements found within these VA contract safety specifications.
  2. Address both the Prime Contractors and the subcontractors work operations.
  3. State measures to be taken to control hazards associated with materials, services, or equipment provided by suppliers.
  4. Address all the elements/sub-elements and in order as follows:
    - a. **SIGNATURE SHEET.** Title, signature, and phone number of the following:
      - 1) Plan preparer (Qualified Person such as corporate safety staff person or contracted Certified Safety Professional with construction safety experience);

- 2) Plan approver (company/corporate officers authorized to obligate the company);
  - 3) Plan concurrence (e.g., Chief of Operations, Corporate Chief of Safety, Corporate Industrial Hygienist, project manager or superintendent, project safety professional). Provide concurrence of other applicable corporate and project personnel (Contractor).
- b. **BACKGROUND INFORMATION.** List the following:
- 1) Contractor;
  - 2) Contract number;
  - 3) Project name;
  - 4) Brief project description, description of work to be performed, and location; phases of work anticipated (these will require an AHA).
- c. **STATEMENT OF SAFETY AND HEALTH POLICY.** Provide a copy of current corporate/company Safety and Health Policy Statement, detailing commitment to providing a safe and healthful workplace for all employees. The Contractor's written safety program goals, objectives, and accident experience goals for this contract should be provided.
- d. **RESPONSIBILITIES AND LINES OF AUTHORITIES.** Provide the following:
- 1) A statement of the employer's ultimate responsibility for the implementation of his SOH program;
  - 2) Identification and accountability of personnel responsible for safety at both corporate and project level. Contracts specifically requiring safety or industrial hygiene personnel shall include a copy of their resumes.
  - 3) The names of Competent and/or Qualified Person(s) and proof of competency/qualification to meet specific OSHA Competent/Qualified Person(s) requirements must be attached.;
  - 4) Requirements that no work shall be performed unless a designated competent person is present on the job site;
  - 5) Requirements for pre-task Activity Hazard Analysis (AHAs);
  - 6) Lines of authority;
  - 7) Policies and procedures regarding noncompliance with safety requirements (to include disciplinary actions for violation of safety requirements) should be identified;
- e. **SUBCONTRACTORS AND SUPPLIERS.** If applicable, provide procedures for coordinating SOH activities with other employers on the job site:
- 1) Identification of subcontractors and suppliers (if known);
  - 2) Safety responsibilities of subcontractors and suppliers.
- f. **TRAINING.**
- 1) Site-specific SOH orientation training at the time of initial hire or assignment to the project for every employee before working on the project site is required.

- 2) Mandatory training and certifications that are applicable to this project (e.g., explosive actuated tools, crane operator, rigger, crane signal person, fall protection, electrical lockout/NFPA 70E, machine/equipment lockout, confined space, etc...) and any requirements for periodic retraining/recertification are required.
- 3) Procedures for ongoing safety and health training for supervisors and employees shall be established to address changes in site hazards/conditions.
- 4) OSHA 10-hour training is required for all workers on site and the OSHA 30-hour training is required for Trade Competent Persons (CPs)

**g. SAFETY AND HEALTH INSPECTIONS.**

- 1) Specific assignment of responsibilities for a minimum daily job site safety and health inspection during periods of work activity: Who will conduct (e.g., "Site Safety and Health CP"), proof of inspector's training/qualifications, when inspections will be conducted, procedures for documentation, deficiency tracking system, and follow-up procedures.
- 2) Any external inspections/certifications that may be required (e.g., contracted CSP or CSHT)

**h. ACCIDENT/INCIDENT INVESTIGATION & REPORTING.** The Contractor shall conduct mishap investigations of all Moderate and Major as well as all High Visibility Incidents. The APP shall include accident/incident investigation procedure and identify person(s) responsible to provide the following to Contracting Officer Representative (COR):

- 1) Exposure data (man-hours worked);
- 2) Accident investigation reports;
- 3) Project site injury and illness logs.

**i. PLANS (PROGRAMS, PROCEDURES) REQUIRED.** Based on a risk assessment of contracted activities and on mandatory OSHA compliance programs, the Contractor shall address all applicable occupational, patient, and public safety risks in site-specific compliance and accident prevention plans. These Plans shall include but are not be limited to procedures for addressing the risks associates with the following:

- 1) Emergency response;
- 2) Contingency for severe weather;
- 3) Fire Prevention;
- 4) Medical Support;
- 5) Posting of emergency telephone numbers;
- 6) Prevention of alcohol and drug abuse;
- 7) Site sanitation(housekeeping, drinking water, toilets);
- 8) Night operations and lighting;
- 9) Hazard communication program;

- 10) Welding/Cutting "Hot" work;
- 11) Electrical Safe Work Practices (Electrical LOTO/NFPA 70E);
- 12) General Electrical Safety;
- 13) Hazardous energy control (Machine LOTO);
- 14) Site-Specific Fall Protection & Prevention;
- 15) Excavation/trenching;
- 16) Asbestos abatement;
- 17) Lead abatement;
- 18) Crane Critical lift;
- 19) Respiratory protection;
- 20) Health hazard control program;
- 21) Radiation Safety Program;
- 22) Abrasive blasting;
- 23) Heat/Cold Stress Monitoring;
- 24) Crystalline Silica Monitoring (Assessment);
- 25) Demolition plan (to include engineering survey);
- 26) Formwork and shoring erection and removal;
- 27) PreCast Concrete;
- 28) Public (Mandatory compliance with ANSI/ASSE A10.34-2012).

- C. Submit the APP to the Contracting Officer Representative (COR) for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES 15 calendar days prior to the date of the preconstruction conference for acceptance. Work cannot proceed without an accepted APP.
- D. Once accepted by the Contracting Officer Representative (COR, the APP and attachments will be enforced as part of the contract. Disregarding the provisions of this contract or the accepted APP will be cause for stopping of work, at the discretion of the Contracting Officer in accordance with FAR Clause 52.236-13, *Accident Prevention*, until the matter has been rectified.
- E. Once work begins, changes to the accepted APP shall be made with the knowledge and concurrence of the Contracting Officer Representative (COR. Should any severe hazard exposure, i.e. imminent danger, become evident, stop work in the area, secure the area, and develop a plan to remove the exposure and control the hazard. Notify the Contracting Officer within 24 hours of discovery. Eliminate/remove the hazard. In the interim, take all necessary action to restore and maintain safe working conditions in order to safeguard onsite personnel, visitors, the public and the environment.

#### **1.5 ACTIVITY HAZARD ANALYSES (AHAS) :**

- A. AHAs are also known as Job Hazard Analyses, Job Safety Analyses, and Activity Safety Analyses. Before beginning each work activity involving a type of work presenting hazards not experienced in previous project operations or where a new work crew or sub-contractor is to perform the work, the Contractor(s) performing that work activity shall

prepare an AHA (Example electronic AHA forms can be found on the US Army Corps of Engineers web site)

- B. AHAs shall define the activities being performed and identify the work sequences, the specific anticipated hazards, site conditions, equipment, materials, and the control measures to be implemented to eliminate or reduce each hazard to an acceptable level of risk.
- C. Work shall not begin until the AHA for the work activity has been accepted by the Contracting Officer Representative (COR) and discussed with all engaged in the activity, including the Contractor, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.
  - 1. The names of the Competent/Qualified Person(s) required for a particular activity (for example, excavations, scaffolding, fall protection, other activities as specified by OSHA and/or other State and Local agencies) shall be identified and included in the AHA. Certification of their competency/qualification shall be submitted to the Government Designated Authority (GDA) for acceptance prior to the start of that work activity.
  - 2. The AHA shall be reviewed and modified as necessary to address changing site conditions, operations, or change of competent/qualified person(s).
    - a. If more than one Competent/Qualified Person is used on the AHA activity, a list of names shall be submitted as an attachment to the AHA. Those listed must be Competent/Qualified for the type of work involved in the AHA and familiar with current site safety issues.
    - b. If a new Competent/Qualified Person (not on the original list) is added, the list shall be updated (an administrative action not requiring an updated AHA). The new person shall acknowledge in writing that he or she has reviewed the AHA and is familiar with current site safety issues.
  - 3. Submit AHAs to the Contracting Officer Representative (COR) for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES for review at least 15 calendar days prior to the start of each phase. Subsequent AHAs as shall be formatted as amendments to the APP. The analysis should be used during daily inspections to ensure the implementation and effectiveness of the activity's safety and health controls.
  - 4. The AHA list will be reviewed periodically (at least monthly) at the Contractor supervisory safety meeting and updated as necessary when procedures, scheduling, or hazards change.
  - 5. Develop the activity hazard analyses using the project schedule as the basis for the activities performed. All activities listed on the project schedule will require an AHA. The AHAs will be developed by the contractor, supplier, or subcontractor and provided to the prime contractor for review and approval and then submitted to the Contracting Officer Representative (COR)

#### **1.6 PRECONSTRUCTION CONFERENCE:**

- A. Contractor representatives who have a responsibility or significant role in implementation of the accident prevention program, as required



by 29 CFR 1926.20(b)(1), on the project shall attend the preconstruction conference to gain a mutual understanding of its implementation. This includes the project superintendent, subcontractor superintendents, and any other assigned safety and health professionals.

- B. Discuss the details of the submitted APP to include incorporated plans, programs, procedures and a listing of anticipated AHAs that will be developed and implemented during the performance of the contract. This list of proposed AHAs will be reviewed at the conference and an agreement will be reached between the Contractor and the Contracting Officer's representative as to which phases will require an analysis. In addition, establish a schedule for the preparation, submittal, review, and acceptance of AHAs to preclude project delays.

#### **1.7 "SITE SAFETY AND HEALTH OFFICER" (SSHO) AND "COMPETENT PERSON" (CP):**

- A. The Prime Contractor shall designate a minimum of one SSHO at each project site that will be identified as the SSHO to administer the Contractor's safety program and government-accepted Accident Prevention Plan. Each subcontractor shall designate a minimum of one CP in compliance with 29 CFR 1926.20 (b)(2) that will be identified as a CP to administer their individual safety programs.
- B. Further, all specialized Competent Persons for the work crews will be supplied by the respective contractor as required by 29 CFR 1926 (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations).
- C. These Competent Persons can have collateral duties as the subcontractor's superintendent and/or work crew lead persons as well as fill more than one specialized CP role (i.e. Asbestos, Electrical, Cranes, & Derricks, Demolition, Fall Protection, Fire Safety/Life Safety, Ladder, Rigging, Scaffolds, and Trenches/Excavations). However, the SSHO has be a separate qualified individual from the Prime Contractor's Superintendent and/or Quality Control Manager with duties only as the SSHO.
- D. The SSHO or an equally-qualified Designated Representative/alternate will maintain a presence on the site during construction operations in accordance with FAR Clause 52.236-6: *Superintendence by the Contractor*. CPs will maintain presence during their construction activities in accordance with above mentioned clause. A listing of the designated SSHO and all known CPs shall be submitted prior to the start of work as part of the APP with the training documentation and/or AHA as listed in Section 1.8 below.
- E. The repeated presence of uncontrolled hazards during a contractor's work operations will result in the designated CP as being deemed incompetent and result in the required removal of the employee in accordance with FAR Clause 52.236-5: Material and Workmanship, Paragraph (c).

#### **1.8 TRAINING:**

- A. The designated Prime Contractor SSHO must meet the requirements of all applicable OSHA standards and be capable (through training, experience, and qualifications) of ensuring that the requirements of 29 CFR 1926.16 and other appropriate Federal, State and local requirements are met for the project. As a minimum the SSHO must have completed the OSHA 30-hour

Construction Safety class and have five (5) years of construction industry safety experience or three (3) years if he/she possesses a Certified Safety Professional (CSP) or certified Construction Safety and Health Technician (CSHT) certification or have a safety and health degree from an accredited university or college.

- B. All designated CPs shall have completed the OSHA 30-hour Construction Safety course within the past 5 years.
- C. In addition to the OSHA 30 Hour Construction Safety Course, all CPs with high hazard work operations such as operations involving asbestos, electrical, cranes, demolition, work at heights/fall protection, fire safety/life safety, ladder, rigging, scaffolds, and trenches/excavations shall have a specialized formal course in the hazard recognition & control associated with those high hazard work operations. Documented "repeat" deficiencies in the execution of safety requirements will require retaking the requisite formal course.
- D. All other construction workers shall have the OSHA 10-hour Construction Safety Outreach course and any necessary safety training to be able to identify hazards within their work environment.
- E. Submit training records associated with the above training requirements to the Contracting Officer Representative (COR) for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES 15 calendar days prior to the date of the preconstruction conference for acceptance.
- F. Prior to any worker for the contractor or subcontractors beginning work, they shall undergo a safety briefing provided by the SSHO or his/her designated representative. As a minimum, this briefing shall include information on the site-specific hazards, construction limits, VAMC safety guidelines, means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, emergency procedures, accident reporting etc... Documentation shall be provided to the Resident Engineer that individuals have undergone contractor's safety briefing.
- G. Ongoing safety training will be accomplished in the form of weekly documented safety meeting.

#### **1.9 INSPECTIONS:**

- A. The SSHO shall conduct frequent and regular safety inspections (daily) of the site and each of the subcontractors CPs shall conduct frequent and regular safety inspections (daily) of their work operations as required by 29 CFR 1926.20(b)(2). Each week, the SSHO shall conduct a formal documented inspection of the entire construction areas with the subcontractors' "Trade Safety and Health CPs" present in their work areas. Coordinate with, and report findings and corrective actions weekly to Contracting Officer Representative (COR).
- B. A Certified Safety Professional (CSP) with specialized knowledge in construction safety or a certified Construction Safety and Health Technician (CSHT) shall randomly conduct a monthly site safety inspection. The CSP or CSHT can be a corporate safety professional or independently contracted. The CSP or CSHT will provide their certificate number on the required report for verification as necessary.

1. Results of the inspection will be documented with tracking of the identified hazards to abatement.
2. The Contracting Officer Representative (COR) will be notified immediately prior to start of the inspection and invited to accompany the inspection.
3. Identified hazard and controls will be discussed to come to a mutual understanding to ensure abatement and prevent future reoccurrence.
4. A report of the inspection findings with status of abatement will be provided to the Contracting Officer Representative (COR) within one week of the onsite inspection.

#### **1.10 ACCIDENTS, OSHA 300 LOGS, AND MAN-HOURS:**

- A. The prime contractor shall establish and maintain an accident reporting, recordkeeping, and analysis system to track and analyze all injuries and illnesses, high visibility incidents, and accidental property damage (both government and contractor) that occur on site. Notify the Contracting Officer Representative (COR) as soon as practical, but no more than four hours after any accident meeting the definition of a Moderate or Major incidents, High Visibility Incidents, , or any weight handling and hoisting equipment accident. Within notification include contractor name; contract title; type of contract; name of activity, installation or location where accident occurred; date and time of accident; names of personnel injured; extent of property damage, if any; extent of injury, if known, and brief description of accident (to include type of construction equipment used, PPE used, etc.). Preserve the conditions and evidence on the accident site until the Contracting Officer Representative (COR) determine whether a government investigation will be conducted.
- B. Conduct an accident investigation for all Minor, Moderate and Major incidents as defined in paragraph DEFINITIONS, and property damage accidents resulting in at least \$20,000 in damages, to establish the root cause(s) of the accident. Complete the VA Form 2162 (or equivalent) , and provide the report to the Contracting Officer Representative (COR) within 3 calendar days of the accident. The Contracting Officer Representative (COR) will provide copies of any required or special forms.
- C. A summation of all man-hours worked by the contractor and associated sub-contractors for each month will be reported to the Contracting Officer Representative (COR) monthly.
- D. A summation of all Minor, Moderate, and Major incidents experienced on site by the contractor and associated sub-contractors for each month will be provided to the Contracting Officer Representative (COR) monthly. The contractor and associated sub-contractors' OSHA 300 logs will be made available to the Contracting Officer Representative (COR) as requested.

#### **1.11 PERSONAL PROTECTIVE EQUIPMENT (PPE):**

- A. PPE is governed in all areas by the nature of the work the employee is performing. For example, specific PPE required for performing work on electrical equipment is identified in NFPA 70E, Standard for Electrical Safety in the Workplace.
- B. Mandatory PPE includes:

1. Hard Hats - unless written authorization is given by the Contracting Officer Representative (COR in circumstances of work operations that have limited potential for falling object hazards such as during finishing work or minor remodeling. With authorization to relax the requirement of hard hats, if a worker becomes exposed to an overhead falling object hazard, then hard hats would be required in accordance with the OSHA regulations.
2. Safety glasses - unless written authorization is given by the Contracting Officer Representative (COR) in circumstances of no eye hazards, appropriate safety glasses meeting the ANSI Z.87.1 standard must be worn by each person on site.
3. Appropriate Safety Shoes - based on the hazards present, safety shoes meeting the requirements of ASTM F2413-11 shall be worn by each person on site unless written authorization is given by the Contracting Officer Representative (COR) in circumstances of no foot hazards.
4. Hearing protection - Use personal hearing protection at all times in designated noise hazardous areas or when performing noise hazardous tasks.

#### 1.12 INFECTION CONTROL

- A. Infection Control is critical in all medical center facilities. Interior construction activities causing disturbance of existing dust, or creating new dust, must be conducted within ventilation-controlled areas that minimize the flow of airborne particles into patient areas. Exterior construction activities causing disturbance of soil or creates dust in some other manner must be controlled.
- B. An AHA associated with infection control will be performed by VA personnel in accordance with FGI Guidelines (i.e. Infection Control Risk Assessment (ICRA)). The ICRA procedure found on the American Society for Healthcare Engineering (ASHE) website will be utilized. Risk classifications of Class II or lower will require approval by the Contracting Officer Representative before beginning any construction work. Risk classifications of Class III or higher will require a permit before beginning any construction work. Infection Control permits will be issued by the Contracting Officer Representative (COR). The Infection Control Permits will be posted outside the appropriate construction area. More than one permit may be issued for a construction project if the work is located in separate areas requiring separate classes. The primary project scope area for this project is: **Class [\_\_\_\_]**, however, work outside the primary project scope area may vary. The required infection control precautions with each class are as follows:
  1. Class I requirements:
    - a. During Construction Work:
      - 1) Notify the Contracting Officer Representative (COR)
      - 2) Execute work by methods to minimize raising dust from construction operations.
      - 3) Ceiling tiles: Immediately replace a ceiling tiles displaced for visual inspection.

- b. Upon Completion:
    - 1) Clean work area upon completion of task
    - 2) Notify the Contracting Officer Representative (COR).
- 2. Class II requirements:
  - a. During Construction Work:
    - 1) Notify the Contracting Officer Representative (COR)
    - 2) Provide active means to prevent airborne dust from dispersing into atmosphere such as wet methods or tool mounted dust collectors where possible.
    - 3) Water mist work surfaces to control dust while cutting.
    - 4) Seal unused doors with duct tape.
    - 5) Block off and seal air vents.
    - 6) Remove or isolate HVAC system in areas where work is being performed.
  - b. Upon Completion:
    - 1) Wipe work surfaces with cleaner/disinfectant.
    - 2) Contain construction waste before transport in tightly covered containers.
    - 3) Wet mop and/or vacuum with HEPA filtered vacuum before leaving work area.
    - 4) Upon completion, restore HVAC system where work was performed
    - 5) Notify the Contracting Officer Representative (COR).
- 3. Class III requirements:
  - a. During Construction Work:
    - 1) Obtain permit from the Contracting Officer Representative (COR).
    - 2) Remove or Isolate HVAC system in area where work is being done to prevent contamination of duct system.
    - 3) Complete all critical barriers i.e. sheetrock, plywood, plastic, to seal area from non-work area or implement control cube method (cart with plastic covering and sealed connection to work site with HEPA vacuum for vacuuming prior to exit) before construction begins. Install construction barriers and ceiling protection carefully, outside of normal work hours.
    - 4) Maintain negative air pressure, 0.01 inches of water gauge, within work site utilizing HEPA equipped air filtration units and continuously monitored with a digital display, recording and alarm instrument, which must be calibrated on installation, maintained with periodic calibration and monitored by the contractor.
    - 5) Contain construction waste before transport in tightly covered containers.
    - 6) Cover transport receptacles or carts. Tape covering unless solid lid.

## b. Upon Completion:

- 1) Do not remove barriers from work area until completed project is inspected by the Contracting Officer Representative (COR) and thoroughly cleaned by the VA Environmental Services Department.
- 2) Remove construction barriers and ceiling protection carefully to minimize spreading of dirt and debris associated with construction, outside of normal work hours.
- 3) Vacuum work area with HEPA filtered vacuums.
- 4) Wet mop area with cleaner/disinfectant.
- 5) Upon completion, restore HVAC system where work was performed.
- 6) Return permit to the Contracting Officer Representative (COR)

## 4. Class IV requirements:

## a. During Construction Work:

- 1) Obtain permit from the Contracting Officer Representative (COR)
- 2) Isolate HVAC system in area where work is being done to prevent contamination of duct system.
- 3) Complete all critical barriers i.e. sheetrock, plywood, plastic, to seal area from non work area or implement control cube method (cart with plastic covering and sealed connection to work site with HEPA vacuum for vacuuming prior to exit) before construction begins. Install construction barriers and ceiling protection carefully, outside of normal work hours.
- 4) Maintain negative air pressure, 0.01 inches of water gauge, within work site utilizing HEPA equipped air filtration units and continuously monitored with a digital display, recording and alarm instrument, which must be calibrated on installation, maintained with periodic calibration and monitored by the contractor.
- 5) Seal holes, pipes, conduits, and punctures.
- 6) Construct anteroom and require all personnel to pass through this room so they can be vacuumed using a HEPA vacuum cleaner before leaving work site or they can wear cloth or paper coveralls that are removed each time they leave work site.
- 7) All personnel entering work site are required to wear shoe covers. Shoe covers must be changed each time the worker exits the work area.

## b. Upon Completion:

- 1) Do not remove barriers from work area until completed project is inspected by the Contracting Officer Representative (COR) with thorough cleaning by the VA Environmental Services Dept.
- 2) Remove construction barriers and ceiling protection carefully to minimize spreading of dirt and debris associated with construction, outside of normal work hours.
- 3) Contain construction waste before transport in tightly covered containers.

- 4) Cover transport receptacles or carts. Tape covering unless solid lid.
- 5) Vacuum work area with HEPA filtered vacuums.
- 6) Wet mop area with cleaner/disinfectant.
- 7) Upon completion, restore HVAC system where work was performed.
- 8) Return permit to the Contracting Officer Representative (COR) Barriers shall be erected as required based upon classification (Class III & IV requires barriers) and shall be constructed as follows:
  1. Class III and IV - closed door with masking tape applied over the frame and door is acceptable for projects that can be contained in a single room.
  2. Construction, demolition or reconstruction not capable of containment within a single room must have the following barriers erected and made presentable on hospital occupied side:
    - a. Class III & IV (where dust control is the only hazard, and an agreement is reached with the Resident Engineer and Medical Center) - Airtight plastic barrier that extends from the floor to ceiling. Seams must be sealed with duct tape to prevent dust and debris from escaping
    - b. Class III & IV - Drywall barrier erected with joints covered or sealed to prevent dust and debris from escaping.
    - c. Class III & IV - Seal all penetrations in existing barrier airtight
    - d. Class III & IV - Barriers at penetration of ceiling envelopes, chases and ceiling spaces to stop movement air and debris
    - e. Class IV only - Anteroom or double entrance openings that allow workers to remove protective clothing or vacuum off existing clothing
    - f. Class III & IV - At elevators shafts or stairways within the field of construction, overlapping flap minimum of two feet wide of polyethylene enclosures for personnel access.

C. Products and Materials:

1. Sheet Plastic: Fire retardant polystyrene, 6-mil thickness meeting local fire codes
2. Barrier Doors: Self Closing One-hour fire-rated solid core wood in steel frame, painted
3. Dust proof one-hour fire-rated drywall
4. High Efficiency Particulate Air-Equipped filtration machine rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Maintenance of equipment and replacement of the HEPA filters and other filters will be in accordance with manufacturer's instructions.
5. Exhaust Hoses: Heavy duty, flexible steel reinforced; Ventilation Blower Hose

6. Adhesive Walk-off Mats: Provide minimum size mats of 24 inches x 36 inches
  7. Disinfectant: Hospital-approved disinfectant or equivalent product
  8. Portable Ceiling Access Module
- D. Before any construction on site begins, all contractor personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the medical center.
  - E. A dust control program will be establish and maintained as part of the contractor's infection preventive measures in accordance with the FGI Guidelines for Design and Construction of Healthcare Facilities. Prior to start of work, prepare a plan detailing project-specific dust protection measures with associated product data, including periodic status reports, and submit to Facility (COR) for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
  - F. Medical center Infection Control personnel will monitor for airborne disease (e.g. aspergillosis) during construction. A baseline of conditions will be established by the medical center prior to the start of work and periodically during the construction stage to determine impact of construction activities on indoor air quality with safe thresholds established.
  - H. In general, the following preventive measures shall be adopted during construction to keep down dust and prevent mold.
    1. Contractor shall verify that construction exhaust to exterior is not reintroduced to the medical center through intake vents, or building openings. HEPA filtration is required where the exhaust dust may reenter the medical center.
    2. Exhaust hoses shall be exhausted so that dust is not reintroduced to the medical center.
    3. Adhesive Walk-off/Carpet Walk-off Mats shall be used at all interior transitions from the construction area to occupied medical center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.
    4. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as it is created. Transport these outside the construction area in containers with tightly fitting lids.
    5. The contractor shall not haul debris through patient-care areas without prior approval of the Resident Engineer and the Medical Center. When, approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.
    6. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the



construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.

7. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.

#### I. Final Cleanup:

1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
3. All new air ducts shall be cleaned prior to final inspection.

#### J. Exterior Construction

1. Contractor shall verify that dust will not be introduced into the medical center through intake vents, or building openings. HEPA filtration on intake vents is required where dust may be introduced.
2. Dust created from disturbance of soil such as from vehicle movement will be wetted with use of a water truck as necessary
3. All cutting, drilling, grinding, sanding, or disturbance of materials shall be accomplished with tools equipped with either local exhaust ventilation (i.e. vacuum systems) or wet suppression controls.

### 1.13 TUBERCULOSIS SCREENING

- A. Contractor shall provide written certification that all contract employees assigned to the work site have had a pre-placement tuberculin screening within 90 days prior to assignment to the worksite and been found have negative TB screening reactions. Contractors shall be required to show documentation of negative TB screening reactions for any additional workers who are added after the 90-day requirement before they will be allowed to work on the work site. NOTE: This can be the Center for Disease Control (CDC) and Prevention and two-step skin testing or a Food and Drug Administration (FDA)-approved blood test.
  1. Contract employees manifesting positive screening reactions to the tuberculin shall be examined according to current CDC guidelines prior to working on VHA property.
  2. Subsequently, if the employee is found without evidence of active (infectious) pulmonary TB, a statement documenting examination by a physician shall be on file with the employer (construction contractor), noting that the employee with a positive tuberculin screening test is without evidence of active (infectious) pulmonary TB.
  3. If the employee is found with evidence of active (infectious) pulmonary TB, the employee shall require treatment with a subsequent statement to the fact on file with the employer before being allowed to return to work on VHA property.

## 1.14 FIRE SAFETY

- A. Fire Safety Plan: Establish and maintain a site-specific fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to Contracting Officer Representative (COR) for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. This plan may be an element of the Accident Prevention Plan.
- B. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.
- C. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).
- D. Temporary Construction Partitions:
  - 1. Install and maintain temporary construction partitions to provide smoke-tight separations between construction areas, the areas that are described in phasing requirements and/or adjoining areas. Construct partitions of gypsum board or treated plywood (flame spread rating of 25 or less in accordance with ASTM E84) on both sides of fire retardant treated wood or metal steel studs. Extend the partitions through suspended ceilings to floor slab deck or roof. Seal joints and penetrations. At door openings, install Class C,  $\frac{3}{4}$  hour fire/smoke rated doors with self-closing devices.
  - 2. Install one-hour fire-rated temporary construction partitions as shown on drawings to maintain integrity of existing exit stair enclosures, exit passageways, fire-rated enclosures of hazardous areas, horizontal exits, smoke barriers, vertical shafts and openings enclosures.
  - 3. Close openings in smoke barriers and fire-rated construction to maintain fire ratings. Seal penetrations with listed through-penetration firestop materials in accordance with Section 07 84 00, FIRESTOPPING.
- E. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.
- F. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with Resident Engineer Contracting Officer Representative (COR).
- G. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to Contracting Officer Representative (COR).
- H. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.
- I. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.

- J. Standpipes: Install and extend standpipes up with each floor in accordance with 29 CFR 1926 and NFPA 241. Do not charge wet standpipes subject to freezing until weather protected.
- K. Sprinklers: Install, test and activate new automatic sprinklers prior to removing existing sprinklers.
- L. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with Contracting Officer Representative (COR). All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the Resident Engineer.
- M. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day. Coordinate with Contracting Officer Representative (COR).
- N. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with Facility Safety Office. Obtain permits from facility Safety at least 72 hours in advance. Designate contractor's responsible project-site fire prevention program manager to permit hot work.
- O. Fire Hazard Prevention and Safety Inspections: Inspect entire construction areas weekly. Coordinate with, and report findings and corrective actions weekly to Contracting Officer Representative (COR).
- P. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. In separate and detached buildings under construction, smoking is prohibited except in designated smoking rest areas.
- Q. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.
- R. If required, submit documentation to the COR that personnel have been trained in the fire safety aspects of working in areas with impaired structural or compartmentalization features.

#### **1.15 ELECTRICAL**

- A. All electrical work shall comply with NFPA 70 (NEC), NFPA 70B, NFPA 70E, 29 CFR Part 1910 Subpart J - General Environmental Controls, 29 CFR Part 1910 Subpart S - Electrical, and 29 CFR 1926 Subpart K in addition to other references required by contract.
- B. All qualified persons performing electrical work under this contract shall be licensed journeyman or master electricians. All apprentice electricians performing under this contract shall be deemed unqualified persons unless they are working under the immediate supervision of a licensed electrician or master electrician.
- C. All electrical work will be accomplished de-energized and in the Electrically Safe Work Condition ( refer to NFPA 70E for Work Involving Electrical Hazards, including Exemptions to Work Permit). Any Contractor, subcontractor or temporary worker who fails to fully comply

with this requirement is subject to immediate termination in accordance with FAR clause 52.236-5(c). Only in rare circumstance where achieving an electrically safe work condition prior to beginning work would increase or cause additional hazards, or is infeasible due to equipment design or operational limitations is energized work permitted. The Contracting Officer Representative (COR) with approval of the Medical Center Director will make the determination if the circumstances would meet the exception outlined above. An AHA and permit specific to energized work activities will be developed, reviewed, and accepted by the VA prior to the start of that activity.

1. Development of a Hazardous Electrical Energy Control Procedure is required prior to de-energization. A single Simple Lockout/Tagout Procedure for multiple work operations can only be used for work involving qualified person(s) de-energizing one set of conductors or circuit part source. Task specific Complex Lockout/Tagout Procedures are required at all other times.
  2. Verification of the absence of voltage after de-energization and lockout/tagout is considered "energized electrical work" (live work) under NFPA 70E, and shall only be performed by qualified persons wearing appropriate shock protective (voltage rated) gloves and arc rate personal protective clothing and equipment, using Underwriters Laboratories (UL) tested and appropriately rated contact electrical testing instruments or equipment appropriate for the environment in which they will be used.
  3. Personal Protective Equipment (PPE) and electrical testing instruments will be readily available for inspection by the Contracting Officer Representative (COR).
- D.** Before beginning any electrical work, an Activity Hazard Analysis (AHA) will be conducted to include Shock Hazard and Arc Flash Hazard analyses (NFPA Tables can be used only as a last alternative and it is strongly suggested a full Arc Flash Hazard Analyses be conducted). Work shall not begin until the AHA for the work activity and permit for energized work has been reviewed and accepted by the Contracting Officer Representative (COR) and discussed with all engaged in the activity, including the Contractor, subcontractor(s), and Government on-site representatives at preparatory and initial control phase meetings.
- E.** Ground-fault circuit interrupters. GFCI protection shall be provided where an employee is operating or using cord- and plug-connected tools related to construction activity supplied by 125-volt, 15-, 20-, or 30-ampere circuits. Where employees operate or use equipment supplied by greater than 125-volt, 15-, 20-, or 30-ampere circuits, GFCI protection or an assured equipment grounding conductor program shall be implemented in accordance with NFPA 70E - 2015, Chapter 1, Article 110.4(C) (2) ..

#### **1.16 FALL PROTECTION**

- A. The fall protection (FP) threshold height requirement is 6 ft (1.8 m) for ALL WORK, unless specified differently or the OSHA 29 CFR 1926 requirements are more stringent, to include steel erection activities, systems-engineered activities (prefabricated) metal buildings, residential (wood) construction and scaffolding work.
  1. The use of a Safety Monitoring System (SMS) as a fall protection method is prohibited.

2. The use of Controlled Access Zone (CAZ) as a fall protection method is prohibited.
3. A Warning Line System (WLS) may ONLY be used on floors or flat or low-sloped roofs (between 0 - 18.4 degrees or 4:12 slope) and shall be erected around all sides of the work area (See 29 CFR 1926.502(f) for construction of WLS requirements). Working within the WLS does not require FP. No worker shall be allowed in the area between the roof or floor edge and the WLS without FP. FP is required when working outside the WLS.
4. Fall protection while using a ladder will be governed by the OSHA requirements.

#### **1.17 SCAFFOLDS AND OTHER WORK PLATFORMS**

- A. All scaffolds and other work platforms construction activities shall comply with 29 CFR 1926 Subpart L.
- B. The fall protection (FP) threshold height requirement is 6 ft (1.8 m) as stated in Section 1.16.
- C. The following hierarchy and prohibitions shall be followed in selecting appropriate work platforms.
  1. Scaffolds, platforms, or temporary floors shall be provided for all work except that can be performed safely from the ground or similar footing.
  2. Ladders less than 20 feet may be used as work platforms only when use of small hand tools or handling of light material is involved.
  3. Ladder jacks, lean-to, and prop-scaffolds are prohibited.
  4. Emergency descent devices shall not be used as working platforms.
- D. Contractors shall use a scaffold tagging system in which all scaffolds are tagged by the Competent Person. Tags shall be color-coded: green indicates the scaffold has been inspected and is safe to use; red indicates the scaffold is unsafe to use. Tags shall be readily visible, made of materials that will withstand the environment in which they are used, be legible and shall include:
  1. The Competent Person's name and signature;
  2. Dates of initial and last inspections.
- E. Mast Climbing work platforms: When access ladders, including masts designed as ladders, exceed 20 ft (6 m) in height, positive fall protection shall be used.

#### **1.18 EXCAVATION AND TRENCHES**

- A. All excavation and trenching work shall comply with 29 CFR 1926 Subpart P. Excavations less than 5 feet in depth require evaluation by the contractor's "Competent Person" (CP) for determination of the necessity of an excavation protective system where kneeling, laying in, or stooping within the excavation is required.
- B. All excavations and trenches 24 inches in depth or greater shall require a written trenching and excavation permit (NOTE - some States and other local jurisdictions require separate state/jurisdiction-issued excavation permits). The permit shall have two sections, one section will be completed prior to digging or drilling and the other will be completed prior to personnel entering the excavations greater

than 5 feet in depth. Each section of the permit shall be provided to the Project Manager (COR) and Facility Safety Officer and/or other Government Designated Authority prior to proceeding with digging or drilling and prior to proceeding with entering the excavation. After completion of the work and prior to opening a new section of an excavation, the permit shall be closed out and provided to the Project Manager (COR) and Facility Safety Officer and/or other Government Designated Authority. The permit shall be maintained onsite and the first section of the permit shall include the following:

1. Estimated start time & stop time2. Specific location and nature of the work.
3. Indication of the contractor's "Competent Person" (CP) in excavation safety with qualifications and signature. Formal course in excavation safety is required by the contractor's CP.
4. Indication of whether soil or concrete removal to an offsite location is necessary.
5. Indication of whether soil samples are required to determined soil contamination.
6. Indication of coordination with local authority (i.e. "One Call") or contractor's effort to determine utility location with search and survey equipment.
7. Indication of review of site drawings for proximity of utilities to digging/drilling.

The second section of the permit for excavations greater than five feet in depth shall include the following:

1. Determination of OSHA classification of soil. Soil samples will be from freshly dug soil with samples taken from different soil type layers as necessary and placed at a safe distance from the excavation by the excavating equipment. A pocket penetrometer will be utilized in determination of the unconfined compression strength of the soil for comparison against OSHA table (Less than 0.5 Tons/FT<sup>2</sup> - Type C, 0.5 Tons/FT<sup>2</sup> to 1.5 Tons/FT<sup>2</sup> - Type B, greater than 1.5 Tons/FT<sup>2</sup> - Type A without condition to reduce to Type B).
2. Indication of selected protective system (sloping/benching, shoring, shielding). When soil classification is identified as "Type A" or "Solid Rock", only shoring or shielding or Professional Engineer designed systems can be used for protection. A Sloping/Benching system may only be used when classifying the soil as Type B or Type C. Refer to Appendix B of 29 CFR 1926, Subpart P for further information on protective systems designs.
3. Indication of the spoil pile being stored at least 2 feet from the edge of the excavation and safe access being provided within 25 feet of the workers.
4. Indication of assessment for a potential toxic, explosive, or oxygen deficient atmosphere where oxygen deficiency (atmospheres containing less than 19.5 percent oxygen) or a hazardous atmosphere exists or could reasonably be expected to exist. Internal combustion engine equipment is not allowed in an excavation without providing force air ventilation to lower the concentration to below OSHA PELs, providing sufficient oxygen levels, and atmospheric testing as necessary to ensure safe levels are maintained.

- C. As required by OSHA 29 CFR 1926.651(b)(1), the estimated location of utility installations, such as sewer, telephone, fuel, electric, water lines, or any other underground installations that reasonably may be expected to be encountered during excavation work, shall be determined prior to opening an excavation.
  - 1. The planned dig site will be outlined/marked in white prior to locating the utilities.
  - 2. Used of the American Public Works Association Uniform Color Code is required for the marking of the proposed excavation and located utilities.
  - 3. 811 will be called two business days before digging on all local or State lands and public Right-of Ways.
  - 4. Digging will not commence until all known utilities are marked.
  - 5. Utility markings will be maintained
- D. Excavations will be hand dug or excavated by other similar safe and acceptable means as excavation operations approach within 3 to 5 //\_\_// feet of identified underground utilities. Exploratory bar or other detection equipment will be utilized as necessary to further identify the location of underground utilities.
- E. Excavations greater than 20 feet in depth require a Professional Engineer designed excavation protective system.

#### **1.19 CRANES**

- A. All crane work shall comply with 29 CFR 1926 Subpart CC.
- B. Prior to operating a crane, the operator must be licensed, qualified or certified to operate the crane. Thus, all the provisions contained with Subpart CC are effective and there is no "Phase In" date.
- C. A detailed lift plan for all lifts shall be submitted to the Project Manager (COR) and Facility Safety and/or other Government Designated Authority 18 days prior to the scheduled lift complete with route for truck carrying load, crane load analysis, siting of crane and path of swing and all other elements of a critical lift plan where the lift meets the definition of a critical lift. Critical lifts require a more comprehensive lift plan to minimize the potential of crane failure and/or catastrophic loss. The plan must be reviewed and accepted by the General Contractor before being submitted to the VA for review. The lift will not be allowed to proceed without prior acceptance of this document.
- D. Crane operators shall not carry loads
  - 1. over the general public or VAMC personnel
  - 2. over any occupied building unless
    - a. the top two floors are vacated
    - b. or overhead protection with a design live load of 300 psf is provided

#### **1.20 CONTROL OF HAZARDOUS ENERGY (LOCKOUT/TAGOUT)**

- A. All installation, maintenance, and servicing of equipment or machinery shall comply with 29 CFR 1910.147 except for specifically referenced operations in 29 CFR 1926 such as concrete & masonry equipment

[1926.702(j)], heavy machinery & equipment [1926.600(a)(3)(i)], and process safety management of highly hazardous chemicals (1926.64). Control of hazardous electrical energy during the installation, maintenance, or servicing of electrical equipment shall comply with Section 1.15 to include NFPA 70E and other VA specific requirements discussed in the section.

#### **1.21 CONFINED SPACE ENTRY**

- A. All confined space entry shall comply with 29 CFR 1926, Subpart AA except for specifically referenced operations in 29 CFR 1926 such as excavations/trenches [1926.651(g)].
- B. A site-specific Confined Space Entry Plan (including permitting process) shall be developed and submitted to the Project Manager (COR) and Facility Safety Officer and/or other Government Designated Authority.

#### **1.22 WELDING AND CUTTING**

As specified in section 1.14, Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with Project Manager (COR) and Facility Safety Officer and/or other Government Designated Authority. Obtain permits from Project Manager (COR) and Facility Safety Officer and/or other Government Designated Authority at least 72 hours in advance. Designate contractor's responsible project-site fire prevention program manager to permit hot work.

#### **1.23 LADDERS**

- A. All Ladder use shall comply with 29 CFR 1926 Subpart X.
- B. All portable ladders shall be of sufficient length and shall be placed so that workers will not stretch or assume a hazardous position.
- C. Manufacturer safety labels shall be in place on ladders
- D. Step Ladders shall not be used in the closed position
- E. Top steps or cap of step ladders shall not be used as a step
- F. Portable ladders, used as temporary access, shall extend at least 3 ft (0.9 m) above the upper landing surface.
  - 1. When a 3 ft (0.9-m) extension is not possible, a grasping device (such as a grab rail) shall be provided to assist workers in mounting and dismounting the ladder.
  - 2. In no case shall the length of the ladder be such that ladder deflection under a load would, by itself, cause the ladder to slip from its support.
- G. Ladders shall be inspected for visible defects on a daily basis and after any occurrence that could affect their safe use. Broken or damaged ladders shall be immediately tagged "DO NOT USE," or with similar wording, and withdrawn from service until restored to a condition meeting their original design.

#### **1.24 FLOOR & WALL OPENINGS**

- A. All floor and wall openings shall comply with 29 CFR 1926 Subpart M.
- B. Floor and roof holes/openings are any that measure over 2 in (51 mm) in any direction of a walking/working surface which persons may trip or



fall into or where objects may fall to the level below. Skylights located in floors or roofs are considered floor or roof hole/openings.

- C. All floor, roof openings or hole into which a person can accidentally walk or fall through shall be guarded either by a railing system with toeboards along all exposed sides or a load-bearing cover. When the cover is not in place, the opening or hole shall be protected by a removable guardrail system or shall be attended when the guarding system has been removed, or other fall protection system.
1. Covers shall be capable of supporting, without failure, at least twice the weight of the worker, equipment and material combined.
  2. Covers shall be secured when installed, clearly marked with the word "HOLE", "COVER" or "Danger, Roof Opening-Do Not Remove" or color-coded or equivalent methods (e.g., red or orange "X"). Workers must be made aware of the meaning for color coding and equivalent methods.
  3. Roofing material, such as roofing membrane, insulation or felts, covering or partly covering openings or holes, shall be immediately cut out. No hole or opening shall be left unattended unless covered.
  4. Non-load-bearing skylights shall be guarded by a load-bearing skylight screen, cover, or railing system along all exposed sides.
  5. Workers are prohibited from standing/walking on skylights.

- - - E N D - - -

**SECTION 01 42 19**  
**REFERENCE STANDARDS**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

This section specifies the availability and source of references and standards specified in the project manual under paragraphs APPLICABLE PUBLICATIONS and/or shown on the drawings.

**1.2 AVAILABILITY OF SPECIFICATIONS LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS FPMR PART 101-29 (FAR 52.211-1) (AUG 1998)**

- A. The GSA Index of Federal Specifications, Standards and Commercial Item Descriptions, FPMR Part 101-29 and copies of specifications, standards, and commercial item descriptions cited in the solicitation may be obtained for a fee by submitting a request to - GSA Federal Supply Service, Specifications Section, Suite 8100, 470 East L'Enfant Plaza, SW, Washington, DC 20407, Telephone (202) 619-8925, Facsimile (202) 619-8978.
- B. If the General Services Administration, Department of Agriculture, or Department of Veterans Affairs issued this solicitation, a single copy of specifications, standards, and commercial item descriptions cited in this solicitation may be obtained free of charge by submitting a request to the addressee in paragraph (a) of this provision. Additional copies will be issued for a fee.

**1.3 AVAILABILITY FOR EXAMINATION OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-4) (JUN 1988)**

The specifications and standards cited in this solicitation can be examined at the following location:

DEPARTMENT OF VETERANS AFFAIRS  
 Office of Construction & Facilities Management  
 Facilities Quality Service (00CFM1A)  
 425 Eye Street N.W, (sixth floor)  
 Washington, DC 20001  
 Telephone Numbers: (202) 632-5249 or (202) 632-5178  
 Between 9:00 AM - 3:00 PM

**1.4 AVAILABILITY OF SPECIFICATIONS NOT LISTED IN THE GSA INDEX OF FEDERAL SPECIFICATIONS, STANDARDS AND COMMERCIAL ITEM DESCRIPTIONS (FAR 52.211-3) (JUN 1988)**

The specifications cited in this solicitation may be obtained from the associations or organizations listed below.

- AA Aluminum Association Inc.  
<http://www.aluminum.org>
- AABC Associated Air Balance Council  
<http://www.aabchg.com>
- AAMA American Architectural Manufacturer's Association  
<http://www.aamanet.org>
- AAN American Nursery and Landscape Association  
<http://www.anla.org>

AASHTO American Association of State Highway and Transportation  
Officials  
<http://www.aashto.org>

AATCC American Association of Textile Chemists and Colorists  
<http://www.aatcc.org>

ACGIH American Conference of Governmental Industrial Hygienists  
<http://www.acgih.org>

ACI American Concrete Institute  
<http://www.aci-int.net>

ACPA American Concrete Pipe Association  
<http://www.concrete-pipe.org>

ACPPA American Concrete Pressure Pipe Association  
<http://www.acppa.org>

ADC Air Diffusion Council  
<http://flexibleduct.org>

AGA American Gas Association  
<http://www.aga.org>

AGC Associated General Contractors of America  
<http://www.agc.org>

AGMA American Gear Manufacturers Association, Inc.  
<http://www.agma.org>

AHAM Association of Home Appliance Manufacturers  
<http://www.aham.org>

AIA American Institute of Architects  
<http://www.aia.org>

AISC American Institute of Steel Construction  
<http://www.aisc.org>

AISI American Iron and Steel Institute  
<http://www.steel.org>

AITC American Institute of Timber Construction  
<http://www.aitc-glulam.org>

AMCA Air Movement and Control Association, Inc.  
<http://www.amca.org>

ANLA American Nursery & Landscape Association  
<http://www.anla.org>

ANSI American National Standards Institute, Inc.  
<http://www.ansi.org>

APA The Engineered Wood Association  
<http://www.apawood.org>

ARI Air-Conditioning and Refrigeration Institute  
<http://www.ari.org>

ASAE American Society of Agricultural Engineers  
<http://www.asae.org>

ASCE American Society of Civil Engineers  
<http://www.asce.org>

ASHRAE	American Society of Heating, Refrigerating, and Air-Conditioning Engineers <a href="http://www.ashrae.org">http://www.ashrae.org</a>
ASME	American Society of Mechanical Engineers <a href="http://www.asme.org">http://www.asme.org</a>
ASSE	American Society of Sanitary Engineering <a href="http://www.asse-plumbing.org">http://www.asse-plumbing.org</a>
ASTM	American Society for Testing and Materials <a href="http://www.astm.org">http://www.astm.org</a>
AWI	Architectural Woodwork Institute <a href="http://www.awinet.org">http://www.awinet.org</a>
AWS	American Welding Society <a href="http://www.aws.org">http://www.aws.org</a>
AWWA	American Water Works Association <a href="http://www.awwa.org">http://www.awwa.org</a>
BHMA	Builders Hardware Manufacturers Association <a href="http://www.buildershardware.com">http://www.buildershardware.com</a>
BIA	Brick Institute of America <a href="http://www.bia.org">http://www.bia.org</a>
CAGI	Compressed Air and Gas Institute <a href="http://www.cagi.org">http://www.cagi.org</a>
CGA	Compressed Gas Association, Inc. <a href="http://www.cganet.com">http://www.cganet.com</a>
CI	The Chlorine Institute, Inc. <a href="http://www.chlorineinstitute.org">http://www.chlorineinstitute.org</a>
CISCA	Ceilings and Interior Systems Construction Association <a href="http://www.cisca.org">http://www.cisca.org</a>
CISPI	Cast Iron Soil Pipe Institute <a href="http://www.cispi.org">http://www.cispi.org</a>
CLFMI	Chain Link Fence Manufacturers Institute <a href="http://www.chainlinkinfo.org">http://www.chainlinkinfo.org</a>
CPMB	Concrete Plant Manufacturers Bureau <a href="http://www.cpmf.org">http://www.cpmf.org</a>
CRA	California Redwood Association <a href="http://www.calredwood.org">http://www.calredwood.org</a>
CRSI	Concrete Reinforcing Steel Institute <a href="http://www.crsi.org">http://www.crsi.org</a>
CTI	Cooling Technology Institute <a href="http://www.cti.org">http://www.cti.org</a>
DHI	Door and Hardware Institute <a href="http://www.dhi.org">http://www.dhi.org</a>
EGSA	Electrical Generating Systems Association <a href="http://www.egsa.org">http://www.egsa.org</a>
EEI	Edison Electric Institute <a href="http://www.eei.org">http://www.eei.org</a>

EPA	Environmental Protection Agency <a href="http://www.epa.gov">http://www.epa.gov</a>
ETL	ETL Testing Laboratories, Inc. <a href="http://www.etl.com">http://www.etl.com</a>
FAA	Federal Aviation Administration <a href="http://www.faa.gov">http://www.faa.gov</a>
FCC	Federal Communications Commission <a href="http://www.fcc.gov">http://www.fcc.gov</a>
FPS	The Forest Products Society <a href="http://www.forestprod.org">http://www.forestprod.org</a>
GANA	Glass Association of North America <a href="http://www.cssinfo.com/info/gana.html/">http://www.cssinfo.com/info/gana.html/</a>
FM	Factory Mutual Insurance <a href="http://www.fmglobal.com">http://www.fmglobal.com</a>
GA	Gypsum Association <a href="http://www.gypsum.org">http://www.gypsum.org</a>
GSA	General Services Administration <a href="http://www.gsa.gov">http://www.gsa.gov</a>
HI	Hydraulic Institute <a href="http://www.pumps.org">http://www.pumps.org</a>
HPVA	Hardwood Plywood & Veneer Association <a href="http://www.hpva.org">http://www.hpva.org</a>
ICBO	International Conference of Building Officials <a href="http://www.icbo.org">http://www.icbo.org</a>
ICEA	Insulated Cable Engineers Association Inc. <a href="http://www.icea.net">http://www.icea.net</a>
\ICAC	Institute of Clean Air Companies <a href="http://www.icac.com">http://www.icac.com</a>
IEEE	Institute of Electrical and Electronics Engineers <a href="http://www.ieee.org/">http://www.ieee.org/</a>
IMSA	International Municipal Signal Association <a href="http://www.imsasafety.org">http://www.imsasafety.org</a>
IPCEA	Insulated Power Cable Engineers Association
NBMA	Metal Buildings Manufacturers Association <a href="http://www.mbma.com">http://www.mbma.com</a>
MSS	Manufacturers Standardization Society of the Valve and Fittings Industry Inc. <a href="http://www.mss-hq.com">http://www.mss-hq.com</a>
NAAMM	National Association of Architectural Metal Manufacturers <a href="http://www.naamm.org">http://www.naamm.org</a>
NAPHCC	Plumbing-Heating-Cooling Contractors Association <a href="http://www.phccweb.org.org">http://www.phccweb.org.org</a>
NBS	National Bureau of Standards See - NIST

NBBPVI	National Board of Boiler and Pressure Vessel Inspectors <a href="http://www.nationboard.org">http://www.nationboard.org</a>
NEC	National Electric Code See - NFPA National Fire Protection Association
NEMA	National Electrical Manufacturers Association <a href="http://www.nema.org">http://www.nema.org</a>
NFPA	National Fire Protection Association <a href="http://www.nfpa.org">http://www.nfpa.org</a>
NHLA	National Hardwood Lumber Association <a href="http://www.natlhardwood.org">http://www.natlhardwood.org</a>
NIH	National Institute of Health <a href="http://www.nih.gov">http://www.nih.gov</a>
NIST	National Institute of Standards and Technology <a href="http://www.nist.gov">http://www.nist.gov</a>
NLMA	Northeastern Lumber Manufacturers Association, Inc. <a href="http://www.nelma.org">http://www.nelma.org</a>
NPA	National Particleboard Association 18928 Premiere Court Gaithersburg, MD 20879 (301) 670-0604
NSF	National Sanitation Foundation <a href="http://www.nsf.org">http://www.nsf.org</a>
NWWDA	Window and Door Manufacturers Association <a href="http://www.nwwda.org">http://www.nwwda.org</a>
OSHA	Occupational Safety and Health Administration Department of Labor <a href="http://www.osha.gov">http://www.osha.gov</a>
PCA	Portland Cement Association <a href="http://www.portcement.org">http://www.portcement.org</a>
PCI	Precast Prestressed Concrete Institute <a href="http://www.pci.org">http://www.pci.org</a>
PPI	The Plastic Pipe Institute <a href="http://www.plasticpipe.org">http://www.plasticpipe.org</a>
PEI	Porcelain Enamel Institute, Inc. <a href="http://www.porcelainenamel.com">http://www.porcelainenamel.com</a>
PTI	Post-Tensioning Institute <a href="http://www.post-tensioning.org">http://www.post-tensioning.org</a>
RFCI	The Resilient Floor Covering Institute <a href="http://www.rfci.com">http://www.rfci.com</a>
RIS	Redwood Inspection Service See - CRA
RMA	Rubber Manufacturers Association, Inc. <a href="http://www.rma.org">http://www.rma.org</a>
SCMA	Southern Cypress Manufacturers Association <a href="http://www.cypressinfo.org">http://www.cypressinfo.org</a>

SDI Steel Door Institute  
<http://www.steeldoor.org>

IGMA Insulating Glass Manufacturers Alliance  
<http://www.igmaonline.org>

SJI Steel Joist Institute  
<http://www.steeljoist.org>

SMACNA Sheet Metal and Air-Conditioning Contractors  
 National Association, Inc.  
<http://www.smacna.org>

SSPC The Society for Protective Coatings  
<http://www.sspc.org>

STI Steel Tank Institute  
<http://www.steeltank.com>

SWI Steel Window Institute  
<http://www.steelwindows.com>

TCA Tile Council of America, Inc.  
<http://www.tileusa.com>

TEMA Tubular Exchange Manufacturers Association  
<http://www.tema.org>

TPI Truss Plate Institute, Inc.  
 583 D'Onofrio Drive; Suite 200  
 Madison, WI 53719  
 (608) 833-5900

UBC The Uniform Building Code  
 See ICBO

UL Underwriters' Laboratories Incorporated  
<http://www.ul.com>

ULC Underwriters' Laboratories of Canada  
<http://www.ulc.ca>

WCLIB West Coast Lumber Inspection Bureau  
 6980 SW Varns Road, P.O. Box 23145  
 Portland, OR 97223  
 (503) 639-0651

WRCLA Western Red Cedar Lumber Association  
 P.O. Box 120786  
 New Brighton, MN 55112  
 (612) 633-4334

WWPA Western Wood Products Association  
<http://www.wwpa.org>

- - - E N D - - -

**SECTION 01 57 19****TEMPORARY ENVIRONMENTAL CONTROLS****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. This section specifies the control of environmental pollution and damage that the Contractor must consider for air, water, and land resources. It includes management of visual aesthetics, noise, solid waste, radiant energy, and radioactive materials, as well as other pollutants and resources encountered or generated by the Contractor. The Contractor is obligated to consider specified control measures with the costs included within the various contract items of work.
- B. Environmental pollution and damage is defined as the presence of chemical, physical, or biological elements or agents which:
  - 1. Adversely effect human health or welfare,
  - 2. Unfavorably alter ecological balances of importance to human life,
  - 3. Effect other species of importance to humankind, or;
  - 4. Degrade the utility of the environment for aesthetic, cultural, and historical purposes.
- C. Definitions of Pollutants:
  - 1. Chemical Waste: Petroleum products, bituminous materials, salts, acids, alkalis, herbicides, pesticides, organic chemicals, and inorganic wastes.
  - 2. Debris: Combustible and noncombustible wastes, such as leaves, tree trimmings, ashes, and waste materials resulting from construction or maintenance and repair work.
  - 3. Sediment: Soil and other debris that has been eroded and transported by runoff water.
  - 4. Solid Waste: Rubbish, debris, garbage, and other discarded solid materials resulting from industrial, commercial, and agricultural operations and from community activities.
  - 5. Surface Discharge: The term "Surface Discharge" implies that the water is discharged with possible sheeting action and subsequent soil erosion may occur. Waters that are surface discharged may terminate in drainage ditches, storm sewers, creeks, and/or "water of the United States" and would require a permit to discharge water from the governing agency.
  - 6. Rubbish: Combustible and noncombustible wastes such as paper, boxes, glass and crockery, metal and lumber scrap, tin cans, and bones.



7. Sanitary Wastes:

- a. Sewage: Domestic sanitary sewage and human and animal waste.
- b. Garbage: Refuse and scraps resulting from preparation, cooking, dispensing, and consumption of food.

**1.2 QUALITY CONTROL**

- A. Establish and maintain quality control for the environmental protection of all items set forth herein.
- B. Record on daily reports any problems in complying with laws, regulations, and ordinances. Note any corrective action taken.

**1.3 REFERENCES**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.
- B. U.S. National Archives and Records Administration (NARA):

33 CFR 328.....Definitions

**1.4 SUBMITTALS**

- A. In accordance with Section, 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES, furnish the following:
  - 1. Environmental Protection Plan: After the contract is awarded and prior to the commencement of the work, the Contractor shall meet with the COR to discuss the proposed Environmental Protection Plan and to develop mutual understanding relative to details of environmental protection. Not more than 20 days after the meeting, the Contractor shall prepare and submit to the COR for approval, a written and/or graphic Environmental Protection Plan including, but not limited to, the following:
    - a. Name(s) of person(s) within the Contractor's organization who is (are) responsible for ensuring adherence to the Environmental Protection Plan.
    - b. Name(s) and qualifications of person(s) responsible for manifesting hazardous waste to be removed from the site.
    - c. Name(s) and qualifications of person(s) responsible for training the Contractor's environmental protection personnel.
    - d. Description of the Contractor's environmental protection personnel training program.
    - e. A list of Federal, State, and local laws, regulations, and permits concerning environmental protection, pollution control, noise control and abatement that are applicable to the Contractor's proposed operations and the requirements imposed by those laws, regulations, and permits.

- f. Methods for protection of features to be preserved within authorized work areas including trees, shrubs, vines, grasses, ground cover, landscape features, air and water quality, fish and wildlife, soil, historical, and archeological and cultural resources.
  - g. Procedures to provide the environmental protection that comply with the applicable laws and regulations. Describe the procedures to correct pollution of the environment due to accident, natural causes, or failure to follow the procedures as described in the Environmental Protection Plan.
  - h. Permits, licenses, and the location of the solid waste disposal area.
  - i. Drawings showing locations of any proposed temporary excavations or embankments for haul roads, material storage areas, structures, sanitary facilities, and stockpiles of excess or spoil materials. Include as part of an Erosion Control Plan approved by the District Office of the U.S. Soil Conservation Service and the Department of Veterans Affairs.
  - j. Environmental Monitoring Plans for the job site including land, water, air, and noise.
  - k. Work Area Plan showing the proposed activity in each portion of the area and identifying the areas of limited use or nonuse. Plan should include measures for marking the limits of use areas. This plan may be incorporated within the Erosion Control Plan.
- B. Approval of the Contractor's Environmental Protection Plan will not relieve the Contractor of responsibility for adequate and continued control of pollutants and other environmental protection measures.

#### **1.5 PROTECTION OF ENVIRONMENTAL RESOURCES**

- A. Protect environmental resources within the project boundaries and those affected outside the limits of permanent work during the entire period of this contract. Confine activities to areas defined by the specifications and drawings.
- B. Protection of Land Resources: Prior to construction, identify all land resources to be preserved within the work area. Do not remove, cut, deface, injure, or destroy land resources including trees, shrubs, vines, grasses, top soil, and land forms without permission from the COR. Do not fasten or attach ropes, cables, or guys to trees for anchorage unless specifically authorized, or where special emergency use is permitted.
  - 1. Work Area Limits: Prior to any construction, mark the areas that require work to be performed under this contract. Mark or fence isolated areas within the general work area that are to be saved and protected. Protect monuments, works of art, and markers before construction operations begin. Convey to all personnel the purpose of marking and protecting all necessary objects.
  - 2. Protection of Landscape: Protect trees, shrubs, vines, grasses, land forms, and other landscape features shown on the drawings to be

- preserved by marking, fencing, or using any other approved techniques.
- a. Box and protect from damage existing trees and shrubs to remain on the construction site.
  - b. Immediately repair all damage to existing trees and shrubs by trimming, cleaning, and painting with antiseptic tree paint.
  - c. Do not store building materials or perform construction activities closer to existing trees or shrubs than the farthest extension of their limbs.
3. Reduction of Exposure of Unprotected Erodible Soils: Plan and conduct earthwork to minimize the duration of exposure of unprotected soils. Clear areas in reasonably sized increments only as needed to use. Form earthwork to final grade as shown. Immediately protect side slopes and back slopes upon completion of rough grading.
  4. Temporary Protection of Disturbed Areas: Construct diversion ditches, benches, and berms to retard and divert runoff from the construction site to protected drainage areas approved under paragraph 208 of the Clean Water Act.
    - a. Sediment Basins: Trap sediment from construction areas in temporary or permanent sediment basins that can accommodate the anticipated storm runoff during project construction. After each storm, pump the basins dry and remove the accumulated sediment. Control overflow/drainage with paved weirs or by vertical overflow pipes, draining from the surface.
    - b. Reuse or conserve the collected topsoil sediment as directed by the COR. Topsoil use and requirements are specified in Section 31 20 00, EARTH MOVING.
    - c. Institute effluent quality monitoring programs as required by Federal, State, and local environmental agencies.
  5. Erosion and Sedimentation Control Devices: The erosion and sediment controls selected and maintained by the Contractor shall be such that water quality standards are not violated as a result of the Contractor's activities. Construct or install all temporary and permanent erosion and sedimentation control features and maintain them thru end of project construction.
  6. Manage borrow areas on project site to minimize erosion and to prevent sediment from entering nearby water courses or lakes.
  7. Manage and control spoil areas on project site and prevent erosion of soil or sediment from entering nearby water courses or lakes.
  8. Protect adjacent areas from despoilment by temporary excavations and embankments.
  9. Handle and dispose of solid wastes in such a manner that will prevent contamination of the environment. Place solid wastes (excluding clearing debris) in containers that are emptied on a regular

schedule. Transport all solid waste off Government property and dispose of waste in compliance with Federal, State, and local requirements.

10. Store chemical waste away from the work areas in corrosion resistant containers and dispose of waste in accordance with Federal, State, and local regulations.
  11. Handle discarded materials other than those included in the solid waste category as directed by the COR.
- C. Protection of Water Resources: Keep construction activities under surveillance, management, and control to avoid pollution of surface and ground waters and sewer systems. Implement management techniques to control water pollution by the listed construction activities that are included in this contract.
1. Washing and Curing Water: Do not allow wastewater directly derived from construction activities to enter water areas. Collect and place wastewater in retention ponds allowing the suspended material to settle, the pollutants to separate, or the water to evaporate.
  2. Control movement of materials and equipment at stream crossings during construction to prevent violation of water pollution control standards of the Federal, State, or local government.
  3. Monitor water areas affected by construction.
- D. Protection of Fish and Wildlife Resources: Keep construction activities under surveillance, management, and control to minimize interference with, disturbance of, or damage to fish and wildlife. Prior to beginning construction operations, list species that require specific attention along with measures for their protection.
- E. Protection of Air Resources: Keep construction activities under surveillance, management, and control to minimize pollution of air resources. Burning is not permitted on the job site. Keep activities, equipment, processes, and work operated or performed, in strict accordance with the State of California Air Pollution Statue, Rule, or Regulation and Federal emission and performance laws and standards. Maintain ambient air quality standards set by the Environmental Protection Agency, for those construction operations and activities specified.
1. Particulates: Control dust particles, aerosols, and gaseous by-products from all construction activities, processing, and preparation of materials (such as from asphaltic batch plants) at all times, including weekends, holidays, and hours when work is not in progress.
  2. Particulates Control: Maintain all excavations, stockpiles, haul roads, permanent and temporary access roads, plant sites, spoil areas, borrow areas, and all other work areas within or outside the project boundaries free from particulates which would cause a hazard or a nuisance. Sprinklering, chemical treatment of an approved type, light bituminous treatment, baghouse, scrubbers, electrostatic precipitators, or other methods are permitted to control particulates in the work area.

3. Hydrocarbons and Carbon Monoxide: Control monoxide emissions from equipment to Federal and State allowable limits.
  4. Odors: Control odors of construction activities and prevent obnoxious odors from occurring.
- F. Reduction of Noise: Minimize noise using every action possible. Perform noise-producing work in less sensitive hours of the day or week as directed by the COR. Maintain noise-produced work at or below the decibel levels and within the time periods specified.
1. Perform construction activities involving repetitive, high-level impact noise only between 8:00 a.m. and 5:00 pm weekdays only unless otherwise permitted by the COR. Repetitive impact noise on the property shall not exceed the following dB limitations:

Time Duration of Impact Noise	Sound Level in dB
More than 12 minutes in any hour	70
Less than 30 seconds of any hour	85
Less than three minutes of any hour	80
Less than 12 minutes of any hour	75

2. Provide sound-deadening devices on equipment and take noise abatement measures that are necessary to comply with the requirements of this contract, consisting of, but not limited to, the following:
  - a. Maintain maximum permissible construction equipment noise levels at 15 m (50 feet) (dBA):

EARTHMOVING		MATERIALS HANDLING	
FRONT LOADERS	75	CONCRETE MIXERS	75
BACKHOES	75	CONCRETE PUMPS	75
DOZERS	75	CRANES	75
TRACTORS	75	DERRICKS IMPACT	75
SCAPERS	80	PILE DRIVERS	95
GRADERS	75	JACK HAMMERS	75
TRUCKS	75	ROCK DRILLS	80
PAVERS, STATIONARY	80	PNEUMATIC TOOLS	80
PUMPS	75	BLASTING	75
GENERATORS	75	SAWS	75

## COMPRESSORS

75

## VIBRATORS

75

- b. Use shields or other physical barriers to restrict noise transmission.
  - c. Provide soundproof housings or enclosures for noise-producing machinery.
  - d. Use efficient silencers on equipment air intakes.
  - e. Use efficient intake and exhaust mufflers on internal combustion engines that are maintained so equipment performs below noise levels specified.
  - f. Line hoppers and storage bins with sound deadening material.
  - g. Conduct truck loading, unloading, and hauling operations so that noise is kept to a minimum.
3. Measure sound level for noise exposure due to the construction at least once every five successive working days while work is being performed above 55 dB(A) noise level. Measure noise exposure at the property line or 15 m (50 feet) from the noise source, whichever is greater. Measure the sound levels on the A weighing network of a General Purpose sound level meter at slow response. To minimize the effect of reflective sound waves at buildings, take measurements at 900 to 1800 mm (three to six feet) in front of any building face. Submit the recorded information to the COR noting any problems and the alternatives for mitigating actions.
- G. Restoration of Damaged Property: If any direct or indirect damage is done to public or private property resulting from any act, omission, neglect, or misconduct, the Contractor shall restore the damaged property to a condition equal to that existing before the damage at no additional cost to the Government. Repair, rebuild, or restore property as directed or make good such damage in an acceptable manner.
- H. Final Clean-up: On completion of project and after removal of all debris, rubbish, and temporary construction, Contractor shall leave the construction area in a clean condition satisfactory to the COR. Cleaning shall include off the station disposal of all items and materials not required to be salvaged, as well as all debris and rubbish resulting from demolition and new work operations.

- - - E N D - - -

**SECTION 01 74 19**

**CONSTRUCTION WASTE MANAGEMENT**

**PART 1 - GENERAL**

**1.1 DESCRIPTION**

- A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.
- B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.
- C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:
  - 1. Waste Management Plan development and implementation.
  - 2. Techniques to minimize waste generation.
  - 3. Sorting and separating of waste materials.
  - 4. Salvage of existing materials and items for reuse or resale.
  - 5. Recycling of materials that cannot be reused or sold.
- D. At a minimum the following waste categories shall be diverted from landfills:
  - 1. Soil.
  - 2. Inerts (eg, concrete, masonry and asphalt).
  - 3. Clean dimensional wood and palette wood.
  - 4. Green waste (biodegradable landscaping materials).
  - 5. Engineered wood products (plywood, particle board and I-joists, etc).
  - 6. Metal products (eg, steel, wire, beverage containers, copper, etc).
  - 7. Cardboard, paper and packaging.
  - 8. Bitumen roofing materials.
  - 9. Plastics (eg, ABS, PVC).
  - 10. Carpet and/or pad.
  - 11. Gypsum board.

12. Insulation.

13. Paint.

14. Fluorescent lamps.

## **1.2 RELATED WORK**

A. Section 02 41 00, DEMOLITION.

B. Section 01 00 00, GENERAL REQUIREMENTS.

## **1.3 QUALITY ASSURANCE**

A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction /Demolition waste includes products of the following:

1. Excess or unusable construction materials.

2. Packaging used for construction products.

3. Poor planning and/or layout.

4. Construction error.

5. Over ordering.

6. Weather damage.

7. Contamination.

8. Mishandling.

9. Breakage.

B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.

C. Contractor shall develop and implement procedures to recycle construction and demolition waste to a minimum of 50 percent.

D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.

E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations. The Whole Building Design Guide website <http://www.wbdg.org/tools/cwm.php> provides a Construction Waste Management Database that contains



information on companies that haul, collect, and process recyclable debris from construction projects.

- F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.
- G. Contractor shall provide on-site instructions and supervision of separation, handling, salvage, recycle, reuse and return methods to be used by all parties during waste generating stages.
- H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

#### **1.4 TERMINOLOGY**

- A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.
- B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.
- C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.
- D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.
- E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).
- F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.
- G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.
- H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.
- I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.
- J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.

- K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.
- L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.
  - 1. On-site Recycling - Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
  - 2. Off-site Recycling - Materials hauled to a location and used in an altered form in the manufacture of new products.
- M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facilities permit or be regulated by the local enforcement agency.
- N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.
- O. Return: To give back reusable items or unused products to vendors for credit.
- P. Salvage: To remove waste materials from the site for resale or re-use by a third party.
- Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.
- R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.
- S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

## **1.5 SUBMITTALS**

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:
- B. Prepare and submit to the COR a written demolition debris management plan. The plan shall include, but not be limited to, the following information:
  - 1. Procedures to be used for debris management.
  - 2. Techniques to be used to minimize waste generation.

3. Analysis of the estimated job site waste to be generated:
  - a. List of each material and quantity to be salvaged, reused, recycled.
  - b. List of each material and quantity proposed to be taken to a landfill.
4. Detailed description of the Means/Methods to be used for material handling.
  - a. On site: Material separation, storage, protection where applicable.
  - b. Off site: Transportation means and destination. Include list of materials.
    - 1) Description of materials to be site-separated and self-hauled to designated facilities.
    - 2) Description of mixed materials to be collected by designated waste haulers and removed from the site.
  - c. The names and locations of mixed debris reuse and recycling facilities or sites.
  - d. The names and locations of trash disposal landfill facilities or sites.
  - e. Documentation that the facilities or sites are approved to receive the materials.
- C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.
- D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.

#### **1.6 APPLICABLE PUBLICATIONS**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.
- B. U.S. Green Building Council (USGBC):
 

LEED Green Building Rating System for New Construction

#### **1.7 RECORDS**

Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the

quantity of waste disposed by landfill or incineration. Records shall be kept in accordance with the LEED Reference Guide and LEED Template.

## **PART 2 - PRODUCTS**

### **2.1 MATERIALS**

- A. List of each material and quantity to be salvaged, recycled, reused.
- B. List of each material and quantity proposed to be taken to a landfill.
- C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

## **PART 3 - EXECUTION**

### **3.1 COLLECTION**

- A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.
- B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.
- C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

### **3.2 DISPOSAL**

- A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.
- B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

### **3.3 REPORT**

- A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.
- B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.
- C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping

fees, manifests, invoices. Include the net total costs for each disposal.

- - - E N D - - -

**SECTION 02 21 13**

**SITE SURVEYS**

**PART 1 - GENERAL**

**1.1 SUMMARY**

A. Section Includes:

1. Researching and collecting documents and field collection information.

**1.2 APPLICABLE PUBLICATIONS**

A. Comply with references to extent specified in this section.

**1.3 SUBMITTALS**

A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS.

**QUALITY ASSURANCE**

B. Two journeyman electricians licensed by the local authority having jurisdiction.

**1.4 WARRANTY**

N/A

**PART 2 - PRODUCTS**

**2.1 ACCESSORIES**

A. Provide electrical metering equipment and personnel protective equipment (PPE)

**PART 3 - EXECUTION**

**3.1 EXAMINATION**

A. Research VA facility records for floor plans, panel schedules, single line diagrams and other documents pertaining to project site.

**3.2 PREPARATION**

A. Coordinate with Contracting Officer's Representative for site access.

B. Notify Contracting Officer's Representative when access is denied.

**3.3 SURVEYS**

A. Locate existing panelboards. Identify service type, rated capacities, and quantities of circuit breakers and wire size.

**3.4 SURVEY REQUIREMENTS**

A. Consult Contracting Officer's Representative to confirm any other required electrical panelboard replacement survey requirements.

- - - E N D - - -

**SECTION 02 41 00****DEMOLITION****PART 1 - GENERAL****1.1 DESCRIPTION:**

This section specifies demolition and removal of buildings, portions of buildings, utilities, other structures and debris from trash dumps shown.

**1.2 RELATED WORK:**

- A. Demolition outside buildings - Not Applicable.
- B. Safety Requirements: Section 01 35 26 Safety Requirements Article, ACCIDENT PREVENTION PLAN (APP).
- C. Disconnecting utility services prior to demolition: Section 01 00 00, GENERAL REQUIREMENTS.
- D. Reserved items that are to remain the property of the Government: Section 01 00 00, GENERAL REQUIREMENTS.
- E. Asbestos Removal: Section 02 82 13 13, GLOVE BAG ASBESTOS ABATEMENT.
- F. Environmental Protection: Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- G. Construction Waste Management: Section 017419 CONSTRUCTION WASTE MANAGEMENT.
- H. Infectious Control: Section 01 00 00, GENERAL REQUIREMENTS, Article 1.7, INFECTION PREVENTION MEASURES.

**1.3 PROTECTION:**

- A. Perform demolition in such manner as to eliminate hazards to persons and property; to minimize interference with use of adjacent areas, utilities and structures or interruption of use of such utilities; and to provide free passage to and from such adjacent areas of structures. Comply with requirements of GENERAL CONDITIONS Article, ACCIDENT PREVENTION.
- B. Provide safeguards, including warning signs, barricades, temporary fences, warning lights, and other similar items that are required for protection of all personnel during demolition and removal operations. Comply with requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES AND IMPROVEMENTS.
- C. Maintain fences, barricades, lights, and other similar items around exposed excavations until such excavations have been completely filled.
- D. Provide enclosed dust chutes with control gates from each floor to carry debris to truck beds and govern flow of material into truck. Provide overhead bridges of tight board or prefabricated metal construction at dust chutes to protect persons and property from falling debris.
- E. Prevent spread of flying particles and dust. Sprinkle rubbish and debris with water to keep dust to a minimum. Do not use water if it results in hazardous or objectionable condition such as, but not

limited to; ice, flooding, or pollution. Vacuum and dust the work area daily.

- F. In addition to previously listed fire and safety rules to be observed in performance of work, include following:
  - 1. No wall or part of wall shall be permitted to fall outwardly from structures.
  - 2. Maintain at least one stairway in each structure in usable condition to highest remaining floor. Keep stairway free of obstructions and debris until that level of structure has been removed.
  - 3. Wherever a cutting torch or other equipment that might cause a fire is used, provide and maintain fire extinguishers nearby ready for immediate use. Instruct all possible users in use of fire extinguishers.
  - 4. Keep hydrants clear and accessible at all times. Prohibit debris from accumulating within a radius of 4500 mm (15 feet) of fire hydrants.
- G. Before beginning any demolition work, the Contractor shall survey the site and examine the drawings and specifications to determine the extent of the work. The contractor shall take necessary precautions to avoid damages to existing items to remain in place, to be reused, or to remain the property of the SFVA any damaged items shall be repaired or replaced as approved by the Resident Engineer. The Contractor shall coordinate the work of this section with all other work and shall construct and maintain shoring, bracing, and supports as required. The Contractor shall ensure that structural elements are not overloaded and shall be responsible for increasing structural supports or adding new supports as may be required as a result of any cutting, removal, or demolition work performed under this contract. Do not overload structural elements. Provide new supports and reinforcement for existing construction weakened by demolition or removal works. Repairs, reinforcement, or structural replacement must have Resident Engineer's approval.
- H. The work shall comply with the requirements of Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS.
- I. The work shall comply with the requirements of Section 01 00 00, GENERAL REQUIREMENTS, Article 1.7 INFECTION PREVENTION MEASURES.

#### **1.4 UTILITY SERVICES:**

- A. Demolish and remove outside utility service lines shown to be removed.
- B. Remove abandoned outside utility lines that would interfere with installation of new utility lines and new construction.

#### **PART 2 - PRODUCTS (NOT USED)**

#### **PART 3 - EXECUTION**

##### **3.1 DEMOLITION:**

- A. Completely demolish and remove buildings and structures, including all appurtenances related or connected thereto, as noted below:
  - 1. As required for installation of new utility service lines.
  - 2. To full depth within an area defined by hypothetical lines located 1500 mm (5 feet) outside building lines of new structures.



- B. Debris, including brick, concrete, stone, metals and similar materials shall become property of Contractor and shall be disposed of by him daily, off the SFVA to avoid accumulation at the demolition site. Materials that cannot be removed daily shall be stored in areas specified by the Resident Engineer. Break up concrete slabs below grade that do not require removal from present location into pieces not exceeding 600 mm (24 inches) square to permit drainage. Contractor shall dispose debris in compliance with applicable federal, state or local permits, rules and/or regulations.
- C. In removing buildings and structures of more than two stories, demolish work story by story starting at highest level and progressing down to third floor level. Demolition of first and second stories may proceed simultaneously.
- D. Remove and legally dispose of all materials in compliance with applicable federal, state or local permits, rules and/or regulations. The removal of hazardous material shall be referred to Hazardous Materials specifications.
- E. Remove existing utilities as indicated or uncovered by work and terminate in a manner conforming to the nationally recognized code covering the specific utility and approved by the Resident Engineer. When Utility lines are encountered that are not indicated on the drawings, the Resident Engineer shall be notified prior to further work in that area.

### **3.2 CLEAN-UP:**

On completion of work of this section and after removal of all debris, leave site in clean condition satisfactory to COR. Clean-up shall include disposal of all items and materials not required to remain property of the Government as well as all debris and rubbish resulting from demolition operations.

- - - E N D - - -

**SECTION 02 82 13.13**  
**GLOVEBAG ASBESTOS ABATEMENT**  
**TABLE OF CONTENTS**

PART 1 - GENERAL.....	5
1.1 SUMMARY OF THE WORK.....	5
1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS.....	5
1.1.2 EXTENT OF WORK.....	5
1.1.3 RELATED WORK.....	5
1.1.4 TASKS.....	5
1.1.5 ABATEMENT CONTRACTOR USE OF PREMISES.....	5
1.2 VARIATIONS IN QUANTITY.....	6
1.3 STOP ASBESTOS REMOVAL.....	6
1.4 DEFINITIONS.....	7
1.4.1 GENERAL.....	7
1.4.2 GLOSSARY.....	7
1.4.3 REFERENCED STANDARDS ORGANIZATIONS.....	14
1.5 APPLICABLE CODES AND REGULATIONS.....	16
1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS.....	16
1.5.2 Asbestos Abatement CONTRACTOR RESPONSIBILITY.....	16
1.5.3 FEDERAL REQUIREMENTS.....	16
1.5.4 STATE REQUIREMENTS:.....	17
1.5.5 LOCAL REQUIREMENTS.....	17
1.5.6 STANDARDS.....	17
1.5.7 EPA GUIDANCE DOCUMENTS.....	17
1.5.8 NOTICES.....	18
1.5.9 PERMITS/LICENSES.....	18
1.5.10 POSTING AND FILING OF REGULATIONS.....	18
1.5.11 VA RESPONSIBILITIES.....	18
1.5.12 EMERGENCY ACTION PLAN AND ARRANGEMENTS.....	19
1.5.14 PRE-Construction MEETING.....	19
1.6 PROJECT COORDINATION.....	20
1.6.1 PERSONNEL.....	20
1.7 RESPIRATORY PROTECTION.....	22
1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM.....	22
1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR.....	22
1.7.3 SELECTION AND USE OF RESPIRATORS.....	22
1.7.4 MINIMUM RESPIRATORY PROTECTION.....	22

1.7.5 MEDICAL WRITTEN OPINION.....	22
1.7.6 RESPIRATOR FIT TEST.....	22
1.7.7 RESPIRATOR FIT CHECK.....	23
1.7.8 MAINTENANCE AND CARE OF RESPIRATORS.....	23
1.8 WORKER PROTECTION.....	23
1.8.1 TRAINING OF ABATEMENT PERSONNEL.....	23
1.8.2 MEDICAL EXAMINATIONS.....	23
1.8.3 personal PROTECTIVE EQUIPMENT.....	23
1.8.4 REGULATED AREA ENTRY PROCEDURE.....	24
1.8.5 DECONTAMINATION PROCEDURE.....	24
1.8.6 REGULATED AREA REQUIREMENTS.....	24
1.9 DECONTAMINATION FACILITIES.....	25
1.9.1 DESCRIPTION.....	25
1.9.2 GENERAL REQUIREMENTS.....	25
1.9.3 TEMPORARY FACILITIES TO THE PDF and w/EDF.....	25
1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF).....	25
1.9.5 waste/EQUIPMENT DECONTAMINATION FACILITY (w/EDF).....	27
1.9.6 waste/EQUIPMENT DECONTAMINATION PROCEDURES.....	28
PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT.....	28
2.1 MATERIALS AND EQUIPMENT.....	28
2.1.1 GENERAL REQUIREMENTS (all abatement projects).....	28
2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA.....	30
2.2.1 GENERAL.....	30
2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA.....	30
2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA.....	30
2.2.4 CRITICAL BARRIERS.....	30
2.2.5 SECONDARY BARRIERS.....	31
2.2.6 EXTENSION OF THE REGULATED AREA.....	31
2.2.7 FIRESTOPPING.....	31
2.3 MONITORING, INSPECTION AND TESTING.....	31
2.3.1 GENERAL.....	31
2.3.2 SCOPE OF SERVICES OF THE VPIH/cih CONSULTANT.....	32
2.3.3 MONITORING, INSPECTION AND TESTING BY ABATEMENT CONTRACTOR CPIH/CIH.....	33
2.4 Asbestos hazard abatement plan.....	34
2.5 SUBMITTALS.....	34
2.5.1 PRE-start MEETING SUBMITTALS.....	34
2.5.2 SUBMITTALS DURING ABATEMENT.....	36

2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT.....	37
2.6 ENCAPSULANTS.....	37
2.6.1 TYPES OF ENCAPSULANTS.....	37
2.6.2 PERFORMANCE REQUIREMENTS.....	37
2.7 CERTIFICATES OF COMPLIANCE.....	38
2.8 RECYCLABLE PROTECTIVE CLOTHING.....	38
PART 3 - EXECUTION.....	38
3.1 REGULATED AREA PREPARATIONS.....	38
3.1.1 SITE SECURITY.....	38
3.1.2 OSHA DANGER SIGNS.....	39
3.1.3.1 SHUT DOWN - LOCK OUT ELECTRICAL.....	39
3.1.3.2 SHUT DOWN - LOCK OUT HVAC.....	39
3.1.4 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA.....	40
3.1.4.1 GENERAL.....	40
3.1.4.2 PREPARATION PRIOR TO SEALING OFF.....	40
3.1.4.3 CONTROLLING ACCESS TO THE REGULATED AREA.....	40
3.1.4.4 CRITICAL BARRIERS.....	40
3.1.4.5 EXTENSION OF THE REGULATED AREA.....	41
3.1.4.6 floor barriers:.....	41
3.1.5 SANITARY FACILITIES.....	41
3.1.6 Pre-Cleaning.....	41
3.1.6.1 PRE-CLEANING MOVABLE OBJECTS.....	41
3.1.6.2 PRE-CLEANING FIXED OBJECTS.....	41
3.1.6.3 PRE-CLEANING SURFACES IN THE REGULATED AREA.....	42
3.1.7 PRE-ABATEMENT ACTIVITIES.....	42
3.1.7.1 PRE-ABATEMENT MEETING.....	42
3.1.7.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS.....	42
3.1.7.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS.....	43
3.2 REMOVAL OF piping ACM.....	44
3.2.1 WETTING MATERIALS.....	44
3.2.2 SECONDARY BARRIER AND WALKWAYS.....	44
3.2.3 WET REMOVAL OF ACM.....	44
3.3 GLOVEBAG REMOVAL PROCEDURES.....	45
3.3.1 GENERAL.....	45
3.3.2 NEGATIVE PRESSURE GLOVEBAG PROCEDURE.....	46
3.4 LOCKDOWN ENCAPSULATION.....	46
3.4.1 GENERAL.....	46

3.4.2 SEALING EXPOSED EDGES.....	46
3.5 DISPOSAL OF ACM WASTE MATERIALS.....	46
3.5.1 GENERAL.....	46
3.5.2 PROCEDURES.....	46
3.6 PROJECT DECONTAMINATION.....	47
3.6.1 GENERAL.....	47
3.6.2 REGULATED AREA CLEARANCE.....	47
3.6.3 WORK DESCRIPTION.....	47
3.6.4 PRE-DECONTAMINATION CONDITIONS.....	48
3.6.5 FIRST CLEANING.....	48
3.6.6 PRE-CLEARANCE INSPECTION AND TESTING.....	48
3.6.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES.....	48
3.7 FINAL VISUAL INSPECTIONS AND AIR CLEARANCE TESTING.....	49
3.7.1 GENERAL.....	49
3.7.2 FINAL VISUAL INSPECTION.....	49
3.7.3 FINAL AIR CLEARANCE TESTING.....	49
3.7.4 FINAL AIR CLEARANCE PROCEDURES.....	49
3.7.5 CLEARANCE SAMPLING USING PCM.....	50
3.7.6 CLEARANCE SAMPLING USING TEM.....	50
3.7.7 LABORATORY TESTING OF PCM SAMPLES.....	50
3.7.8 LABORATORY TESTING OF TEM SAMPLES.....	50
3.8 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE.....	51
3.8.1 COMPLETION OF ABATEMENT WORK.....	51
3.8.2 CERTIFICATE OF COMPLETION BY CONTRACTOR.....	51
3.8.3 WORK SHIFTS.....	51
3.8.4 RE-INSULATION.....	51
ATTACHMENT #1.....	52
ATTACHMENT #2.....	53
ATTACHMENT #3.....	55
ATTACHMENT #4.....	56

**INSTRUCTIONS TO ARCHITECT/ENGINEER AND INDUSTRIAL HYGIENE CONSULTANT SECTION****02 82 13.13****GLOVEBAG ASBESTOS ABATEMENT****PART 1 - GENERAL****1.1 SUMMARY OF THE WORK****1.1.1 CONTRACT DOCUMENTS AND RELATED REQUIREMENTS**

Drawings, general provisions of the contract, including general and supplementary conditions and other Division 01 specifications, shall apply to the work of this section. The contract documents show the work to be done under the contract and related requirements and conditions impacting the project. Related requirements and conditions include applicable codes and regulations, notices and permits, existing site conditions and restrictions on use of the site, requirements for partial owner occupancy during the work, coordination with other work and the phasing of the work. In the event the Asbestos Abatement Contractor discovers a conflict in the contract documents and/or requirements or codes, the conflict must be brought to the immediate attention of the Contracting Officer for resolution. Whenever there is a conflict or overlap in the requirements, the most stringent shall apply. Any actions taken by the Contractor without obtaining guidance from the Contracting Officer shall become the sole risk and responsibility of the Asbestos Abatement Contractor. All costs incurred due to such action are also the responsibility of the Asbestos Abatement Contractor.

**1.1.2 EXTENT OF WORK**

- A. See statement of work and Asbestos Material Locations drawings.

**1.1.3 RELATED WORK**

- A. Section 02 41 00, DEMOLITION.

**1.1.4 TASKS**

The work tasks are summarized briefly as follows:

- A. Pre-abatement activities including pre-abatement meeting(s), inspection(s), notifications, permits, submittal approvals, work-site preparations, emergency procedures arrangements, and Asbestos Hazard Abatement Plans for glovebag asbestos abatement work.
- B. Abatement activities including removal, clean-up and disposal of ACM waste, recordkeeping, security, monitoring, and inspections.
- C. Cleaning and decontamination activities including final visual inspection, air monitoring and certification of decontamination.

**1.1.5 ABATEMENT CONTRACTOR USE OF PREMISES**

- A. The Contractor and Contractor's personnel shall cooperate fully with the VA representative/consultant to facilitate efficient use of

buildings and areas within buildings. The Contractor shall perform the work in accordance with the VA specifications, drawings, phasing plan and in compliance with any/all applicable Federal, State and Local regulations and requirements.

- B. The Contractor shall use the existing facilities in the building strictly within the limits indicated in contract documents as well as the approved VA Design and Construction Procedures. VA Design and Construction Procedures drawings of partially occupied buildings will show the limits of regulated areas; the placement of decontamination facilities; the temporary location of bagged waste ACM; the path of transport to outside the building; and the temporary waste storage area for each building/regulated area. Any variation from the arrangements shown on drawings shall be secured in writing from the VA representative through the pre-abatement plan of action.

## 1.2 VARIATIONS IN QUANTITY

The quantities and locations of ACM as indicated on the drawings and the extent of work included in this section are estimated, which are limited by the physical constraints imposed by occupancy of the buildings and accessibility to ACM.

## 1.3 STOP ASBESTOS REMOVAL

If the Contracting Officer; their field representative; (the facility Safety Officer/Manager or their designee, or the VA Professional Industrial Hygienist/ Certified Industrial Hygienist (VPIH/CIH) presents a verbal **Stop Asbestos Removal Order**, the Contractor/Personnel shall immediately stop all asbestos removal and maintain HEPA filtered negative pressure air flow in the containment and adequately wet any exposed ACM. If a verbal Stop Asbestos Removal Order is issued, the VA shall follow-up with a written order to the Contractor as soon as it is practicable. The Contractor shall not resume any asbestos removal activity until authorized to do so in writing by the VA Contracting Officer. A stop asbestos removal order may be issued at any time the VA Contracting Officer determines abatement conditions/activities are not within VA specification, regulatory requirements or that an imminent hazard exists to human health or the environment. Work stoppage will continue until conditions have been corrected to the satisfaction of the VA. Standby time and costs for corrective actions will be borne by the Contractor, including the VPIH/CIH time. The occurrence of any of the following events shall be reported immediately by the Contractor's competent person to the VA Contracting Office or field representative using the most expeditious means (e.g., verbal or telephonic), followed up with written notification to the Contracting Officer as soon as practical. The Contractor shall immediately stop asbestos removal/disturbance activities and initiate fiber reduction activities:

- A. Airborne PCM analysis results equal to or greater than 0.01 f/cc outside a regulated area or >0.05 f/cc inside a regulated area;
- B. breach or break in regulated area containment barrier(s);
- C. less than -0.02" WCG pressure in the regulated area;
- D. serious injury/death at the site;

- E. fire/safety emergency at the site;
- F. respiratory protection system failure;
- G. power failure or loss of wetting agent; or
- H. any visible emissions observed outside the regulated area.

## 1.4 DEFINITIONS

### 1.4.1 GENERAL

Definitions and explanations here are neither complete nor exclusive of all terms used in the contract documents, but are general for the work to the extent they are not stated more explicitly in another element of the contract documents. Drawings must be recognized as diagrammatic in nature and not completely descriptive of the requirements indicated therein.

### 1.4.2 GLOSSARY

**Abatement** - Procedures to control fiber release from asbestos-containing materials. Includes removal, encapsulation, enclosure, demolition, and renovation activities related to asbestos containing materials (ACM).

**Aerosol** - Solid or liquid particulate suspended in air.

**Adequately wet** - Sufficiently mixed or penetrated with liquid to prevent the release of particulates. If visible emissions are observed coming from the ACM, then that material has not been adequately wetted.

**Aggressive method** - Removal or disturbance of building material by sanding, abrading, grinding, or other method that breaks, crumbles, or disintegrates intact ACM.

**Aggressive sampling** - EPA AHERA defined clearance sampling method using air moving equipment such as fans and leaf blowers to aggressively disturb and maintain in the air residual fibers after abatement.

**AHERA** - Asbestos Hazard Emergency Response Act. Asbestos regulations for schools issued in 1987.

**Aircell** - Pipe or duct insulation made of corrugated cardboard which contains asbestos.

**Air monitoring** - The process of measuring the fiber content of a known volume of air collected over a specified period of time. The NIOSH 7400 Method, Issue 2 is used to determine the fiber levels in air. For personal samples and clearance air testing using Phase Contrast Microscopy (PCM) analysis. NIOSH Method 7402 can be used when it is necessary to confirm fibers counted by PCM as being asbestos. The AHERA TEM analysis may be used for background, area samples and clearance samples when required by this specification, or at the discretion of the VPIH/CIH as appropriate.

**Air sample filter** - The filter used to collect fibers which are then counted. The filter is made of mixed cellulose ester membrane for PCM (Phase Contrast Microscopy) and polycarbonate for TEM (Transmission Electron Microscopy)



**Amended water** - Water to which a surfactant (wetting agent) has been added to increase the penetrating ability of the liquid.

**Asbestos** - Includes chrysotile, amosite, crocidolite, tremolite asbestos, anthophyllite asbestos, actinolite asbestos, and any of these minerals that have been chemically treated or altered. Asbestos also includes PACM, as defined below.

**Asbestos Hazard Abatement Plan (AHAP)** - Asbestos work procedures required to be submitted by the contractor before work begins.

**Asbestos-containing material (ACM)** - Any material containing more than one percent of asbestos.

**Asbestos contaminated elements (ACE)** - Building elements such as ceilings, walls, lights, or ductwork that are contaminated with asbestos.

**Asbestos-contaminated soil (ACS)** - Soil found in the work area or in adjacent areas such as crawlspaces or pipe tunnels which is contaminated with asbestos-containing material debris and cannot be easily separated from the material.

**Asbestos-containing waste (ACW) material** - Asbestos-containing material or asbestos contaminated objects requiring disposal.

**Asbestos Project Monitor** - Some states require that any person conducting asbestos abatement clearance inspections and clearance air sampling be licensed as an asbestos project monitor.

**Asbestos waste decontamination facility** - A system consisting of drum/bag washing facilities and a temporary storage area for cleaned containers of asbestos waste. Used as the exit for waste and equipment leaving the regulated area. In an emergency, it may be used to evacuate personnel.

**Authorized person** - Any person authorized by the VA, the Contractor, or government agency and required by work duties to be present in regulated areas.

**Authorized visitor** - Any person approved by the VA; the contractor; or any government agency representative having jurisdiction over the regulated area (e.g., OSHA, Federal and State EPA).

**Barrier** - Any surface that isolates the regulated area and inhibits fiber migration from the regulated area.

**Containment Barrier** - An airtight barrier consisting of walls, floors, and/or ceilings of sealed plastic sheeting which surrounds and seals the outer perimeter of the regulated area.

**Critical Barrier** - The barrier responsible for isolating the regulated area from adjacent spaces, typically constructed of plastic sheeting secured in place at openings such as doors, windows, or any other opening into the regulated area.

**Primary Barrier** - Plastic barriers placed over critical barriers and exposed directly to abatement work.

**Secondary Barrier** - Any additional plastic barriers used to isolate and provide protection from debris during abatement work.

**Breathing zone** - The hemisphere forward of the shoulders with a radius of about 150 - 225 mm (6 - 9 inches) from the worker's nose.

**Bridging encapsulant** - An encapsulant that forms a layer on the surface of the ACM.

**Building/facility owner** - The legal entity, including a lessee, which exercises control over management and recordkeeping functions relating to a building and/or facility in which asbestos activities take place.

**Bulk testing** - The collection and analysis of suspect asbestos containing materials.

**Certified Industrial Hygienist (CIH)** - A person certified in the comprehensive practice of industrial hygiene by the American Board of Industrial Hygiene.

**Class I asbestos work** - Activities involving the removal of Thermal System Insulation (TSI) and surfacing ACM and Presumed Asbestos Containing Material (PACM).

**Class II asbestos work** - Activities involving the removal of ACM which is not thermal system insulation or surfacing material. This includes, but is not limited to, the removal of asbestos-containing wallboard, floor tile and sheeting, roofing and siding shingles, and construction mastic.

**Clean room/Changing room** - An uncontaminated room having facilities for the storage of employee's street clothing and uncontaminated materials and equipment.

**Clearance sample** - The final air sample taken after all asbestos work has been done and visually inspected. Performed by the VA's professional industrial hygiene consultant/Certified Industrial Hygienist (VPIH/CIH).

**Closely resemble** - The major workplace conditions which have contributed to the levels of historic asbestos exposure, are no more protective than conditions of the current workplace.

**Competent person** - In addition to the definition in 29 CFR 1926.32(f), one who is capable of identifying existing asbestos hazards in the workplace and selecting the appropriate control strategy for asbestos exposure, who has the authority to take prompt corrective measures to eliminate them, as specified in 29 CFR 1926.32(f); in addition, for Class I and II work who is specially trained in a training course which meets the criteria of EPA's Model Accreditation Plan (40 CFR 763) for supervisor.

**Contractor's Professional Industrial Hygienist (CPIH/CIH)** - The asbestos abatement contractor's industrial hygienist. The industrial hygienist must meet the qualification requirements of a PIH and may be a certified industrial hygienist (CIH).

**Count** - Refers to the fiber count or the average number of fibers greater than five microns in length with a length-to-width (aspect) ratio of at least 3 to 1, per cubic centimeter of air.

**Crawl space** - An area which can be found either in or adjacent to the work area. This area has limited access and egress and may contain asbestos materials and/or asbestos contaminated soil.

**Decontamination area/unit** - An enclosed area adjacent to and connected to the regulated area and consisting of an equipment room, shower room, and clean room, which is used for the decontamination of workers, materials, and equipment that are contaminated with asbestos.

**Demolition** - The wrecking or taking out of any load-supporting structural member and any related razing, removing, or stripping of asbestos products.

**VA Total** - means a building or substantial part of the building is completely removed, torn or knocked down, bulldozed, flattened, or razed, including removal of building debris.

**Disposal bag** - Typically 6 mil thick sift-proof, dustproof, leak-tight container used to package and transport asbestos waste from regulated areas to the approved landfill. Each bag/container must be labeled/marked in accordance with EPA, OSHA and DOT requirements.

**Disturbance** - Activities that disrupt the matrix of ACM or PACM, crumble or pulverize ACM or PACM, or generate visible debris from ACM or PACM. Disturbance includes cutting away small amounts of ACM or PACM, no greater than the amount that can be contained in one standard sized glove bag or waste bag, in order to access a building component. In no event shall the amount of ACM or PACM so disturbed exceed that which can be contained in one glove bag or disposal bag and shall not exceed 60 inches in length or width.

**Drum** - A rigid, impermeable container made of cardboard fiber, plastic, or metal which can be sealed in order to be sift-proof, dustproof, and leak-tight.

**Employee exposure** - The exposure to airborne asbestos that would occur if the employee were not wearing respiratory protection equipment.

**Encapsulant** - A material that surrounds or embeds asbestos fibers in an adhesive matrix and prevents the release of fibers.

**Encapsulation** - Treating ACM with an encapsulant.

**Enclosure** - The construction of an air tight, impermeable, permanent barrier around ACM to control the release of asbestos fibers from the material and also eliminate access to the material.

**Equipment room** - A contaminated room located within the decontamination area that is supplied with impermeable bags or containers for the disposal of contaminated protective clothing and equipment.

**Fiber** - A particulate form of asbestos, 5 microns or longer, with a length to width (aspect) ratio of at least 3 to 1.

**Fibers per cubic centimeter (f/cc)** - Abbreviation for fibers per cubic centimeter, used to describe the level of asbestos fibers in air.

**Filter** - Media used in respirators, vacuums, or other machines to remove particulate from air.

**Firestopping** - Material used to close the open parts of a structure in order to prevent a fire from spreading.

**Friable asbestos containing material** - Any material containing more than one (1) percent or asbestos as determined using the method specified in appendix A, Subpart F, 40 CFR 763, section 1, Polarized Light Microscopy, that, when dry, can be crumbled, pulverized, or reduced to powder by hand pressure.

**Glovebag** - Not more than a 60 x 60 inch impervious plastic bag-like enclosure affixed around an asbestos-containing material, with glove-like appendages through which materials and tools may be handled.

**High efficiency particulate air (HEPA) filter** - An ASHRAE MERV 17 filter capable of trapping and retaining at least 99.97 percent of all mono-dispersed particles of 0.3 micrometers in diameter.

**HEPA vacuum** - Vacuum collection equipment equipped with a HEPA filter system capable of collecting and retaining asbestos fibers.

**Homogeneous area** - An area of surfacing, thermal system insulation or miscellaneous ACM that is uniform in color, texture and date of application.

**HVAC** - Heating, Ventilation and Air Conditioning

**Industrial hygienist (IH)** - A professional qualified by education, training, and experience to anticipate, recognize, evaluate and develop controls for occupational health hazards. Meets definition requirements of the American Industrial Hygiene Association (AIHA).

**Industrial hygienist technician (IH Technician)** - A person working under the direction of an IH or CIH who has special training, experience, certifications and licenses required for the industrial hygiene work assigned. Some states require that an industrial hygienist technician conducting asbestos abatement clearance inspection and clearance air sampling be licensed as an asbestos project monitor.

**Intact** - The ACM has not crumbled, been pulverized, or otherwise deteriorated so that the asbestos is no longer likely to be bound with its matrix.

**Lockdown** - Applying encapsulant, after a final visual inspection, on all abated surfaces at the conclusion of ACM removal prior to removal of critical barriers.

**National Emission Standards for Hazardous Air Pollutants (NESHAP)** - EPA's rule to control emissions of asbestos to the environment (40 CFR Part 61, Subpart M).

**Negative initial exposure assessment** - A demonstration by the employer which complies with the criteria in 29 CFR 1926.1101 (f)(2)(iii), that employee exposure during an operation is expected to be consistently below the PEL.

**Negative pressure** - Air pressure which is lower than the surrounding area, created by exhausting air from a sealed regulated area through HEPA equipped filtration units. OSHA requires maintaining -0.02" water column gauge inside the negative pressure enclosure.

**Negative pressure respirator** - A respirator in which the air pressure inside the facepiece is negative during inhalation relative to the air pressure outside the respirator facepiece.

**Non-friable ACM** - Material that contains more than 1 percent asbestos but cannot be crumbled, pulverized, or reduced to powder by hand pressure.

**Organic vapor cartridge** - The type of cartridge used on air purifying respirators to remove organic vapor hazardous air contaminants.

**Outside air** - The air outside buildings and structures, including, but not limited to, the air under a bridge or in an open ferry dock.

**Owner/operator** - Any person who owns, leases, operates, controls, or supervises the facility being demolished or renovated or any person who

owns, leases, operates, controls, or supervises the demolition or renovation operation, or both.

**Penetrating encapsulant** - Encapsulant that is absorbed into the ACM matrix without leaving a surface layer.

**Personal protective equipment (PPE)** - equipment designed to protect user from injury and/or specific job hazard. Such equipment may include protective clothing, hard hats, safety glasses, and respirators.

**Personal sampling/monitoring** - Representative air samples obtained in the breathing zone for one or more workers within the regulated area using a filter cassette and a calibrated air sampling pump to determine asbestos exposure.

**Permissible exposure limit (PEL)** - The level of exposure OSHA allows for an 8 hour time weighted average. For asbestos fibers, the eight (8) hour time weighted average PEL is 0.1 fibers per cubic centimeter (0.1 f/cc) of air and the 30-minute Excursion Limit is 1.0 fibers per cubic centimeter (1 f/cc).

**Pipe tunnel** - An area, typically located adjacent to mechanical spaces or boiler rooms in which the pipes servicing the heating system in the building are routed to allow the pipes to access heating elements. These areas may contain asbestos pipe insulation, asbestos fittings, or asbestos-contaminated soil.

**Polarized light microscopy (PLM)** - Light microscopy using dispersion staining techniques and refractive indices to identify and quantify the type(s) of asbestos present in a bulk sample.

**Polyethylene sheeting** - Strong plastic barrier material 4 to 6 mils thick, semi-transparent, flame retardant per NFPA 241.

**Positive/negative fit check** - A method of verifying the seal of a facepiece respirator by temporarily occluding the filters and breathing in (inhaling) and then temporarily occluding the exhalation valve and breathing out (exhaling) while checking for inward or outward leakage of the respirator respectively.

**Presumed ACM (PACM)** - Thermal system insulation, surfacing, and flooring material installed in buildings prior to 1981. If the building owner has actual knowledge, or should have known through the exercise of due diligence that other materials are ACM, they too must be treated as PACM. The designation of PACM may be rebutted pursuant to 29 CFR 1926.1101 (b).

**Professional IH** - An IH who meets the definition requirements of AIHA; meets the definition requirements of OSHA as a "Competent Person" at 29 CFR 1926.1101 (b); has completed two specialized EPA approved courses on management and supervision of asbestos abatement projects; has formal training in respiratory protection and waste disposal; and has a minimum of four projects of similar complexity with this project of which at least three projects serving as the supervisory IH. The PIH may be either the VA's PIH (VPIH) or Contractor's PIH (CPIH/CIH).

**Project designer** - A person who has successfully completed the training requirements for an asbestos abatement project designer as required by 40 CFR 763 Appendix C, Part I; (B) (5).

**Assigned Protection factor** - A value assigned by OSHA/NIOSH to indicate the expected protection provided by each respirator class, when the respirator is properly selected and worn correctly. The number indicates the reduction of exposure level from outside to inside the respirator facepiece.

**Qualitative fit test (QLFT)** - A fit test using a challenge material that can be sensed by the wearer if leakage in the respirator occurs.

**Quantitative fit test (QNFT)** - A fit test using a challenge material which is quantified outside and inside the respirator thus allowing the determination of the actual fit factor.

**Regulated area** - An area established by the employer to demarcate where Class I, II, III asbestos work is conducted, and any adjoining area where debris and waste from such asbestos work may accumulate; and a work area within which airborne concentrations of asbestos exceed, or there is a reasonable possibility they may exceed the PEL.

**Regulated ACM (RACM)** - Friable ACM; Category I non-friable ACM that has become friable; Category I non-friable ACM that will be or has been subjected to sanding, grinding, cutting, or abrading or; Category II non-friable ACM that has a high probability of becoming or has become crumbled, pulverized, or reduced to powder by the forces expected to act on the material in the course of the demolition or renovation operation.

**Removal** - All operations where ACM, PACM and/or RACM is taken out or stripped from structures or substrates, including demolition operations.

**Renovation** - Altering a facility or one or more facility components in any way, including the stripping or removal of asbestos from a facility component which does not involve demolition activity.

**Repair** - Overhauling, rebuilding, reconstructing, or reconditioning of structures or substrates, including encapsulation or other repair of ACM or PACM attached to structures or substrates.

**Shower room** - The portion of the PDF where personnel shower before leaving the regulated area.

**Supplied air respirator (SAR)** - A respiratory protection system that supplies minimum Grade D respirable air per ANSI/Compressed Gas Association Commodity Specification for Air, G-7.1-1989.

**Surfacing ACM** - A material containing more than 1 percent asbestos that is sprayed, troweled on or otherwise applied to surfaces for acoustical, fireproofing and other purposes.

**Surfactant** - A chemical added to water to decrease water's surface tension thus making it more penetrating into ACM.

**Thermal system ACM** - A material containing more than 1 percent asbestos applied to pipes, fittings, boilers, breeching, tanks, ducts, or other structural components to prevent heat loss or gain.

**Transmission electron microscopy (TEM)** - A microscopy method that can identify and count asbestos fibers.

**VA Professional Industrial Hygienist (VPIH/CIH)** - The Department of Veterans Affairs Professional Industrial Hygienist must meet the

qualifications of a PIH, and may be a Certified Industrial Hygienist (CIH).

**VA Representative** - The VA official responsible for on-going project work.

**Visible emissions** - Any emissions, which are visually detectable without the aid of instruments, coming from ACM/PACM/RACM/ACS or ACM waste material.

**Waste/Equipment decontamination facility (W/EDF)** - The area in which equipment is decontaminated before removal from the regulated area.

**Waste generator** - Any owner or operator whose act or process produces asbestos-containing waste material.

**Waste shipment record** - The shipping document, required to be originated and signed by the waste generator, used to track and substantiate the disposition of asbestos-containing waste material.

**Wet cleaning** - The process of thoroughly eliminating, by wet methods, any asbestos contamination from surfaces or objects.

#### 1.4.3 REFERENCED STANDARDS ORGANIZATIONS

The following acronyms or abbreviations as referenced in contract/specification documents are defined to mean the associated names. Names and addresses may be subject to change.

- A. VA Department of Veterans Affairs  
810 Vermont Avenue, NW  
Washington, DC 20420
  
- B. AIHA American Industrial Hygiene Association  
2700 Prosperity Avenue, Suite 250  
Fairfax, VA 22031  
703-849-8888
  
- C. ANSI American National Standards Institute  
1430 Broadway  
New York, NY 10018  
212-354-3300
  
- D. ASTM American Society for Testing and Materials  
1916 Race St.  
Philadelphia, PA 19103  
215-299-5400
  
- E. CFR Code of Federal Regulations  
Government Printing Office  
Washington, DC 20420

- F. CGA Compressed Gas Association  
1235 Jefferson Davis Highway  
Arlington, VA 22202  
703-979-0900
  
- G. CS Commercial Standard of the National Institute of Standards and Technology (NIST)  
U. S. Department of Commerce  
Government Printing Office  
Washington, DC 20420
  
- H. EPA Environmental Protection Agency  
401 M St., SW  
Washington, DC 20460  
202-382-3949
  
- I. MIL-STD Military Standards/Standardization Division  
Office of the Assistant Secretary of Defense  
Washington, DC 20420
  
- I. NIST National Institute for Standards and Technology  
U. S. Department of Commerce  
Gaithersburg, MD 20234  
301-921-1000
  
- K. NEC National Electrical Code (by NFPA)
  
- L. NEMA National Electrical Manufacturer's Association  
2101 L Street, NW  
Washington, DC 20037
  
- M. NFPA National Fire Protection Association  
1 Batterymarch Park  
P.O. Box 9101  
Quincy, MA 02269-9101  
800-344-3555
  
- N. NIOSH National Institutes for Occupational Safety and Health  
4676 Columbia Parkway  
Cincinnati, OH 45226  
513-533-8236
  
- O. OSHA Occupational Safety and Health Administration  
U.S. Department of Labor  
Government Printing Office  
Washington, DC 20402



P. UL Underwriters Laboratory  
 333 Pfingsten Rd.  
 Northbrook, IL 60062  
 312-272-8800

## **1.5 APPLICABLE CODES AND REGULATIONS**

### **1.5.1 GENERAL APPLICABILITY OF CODES, REGULATIONS, AND STANDARDS**

- A. All work under this contract shall be done in strict accordance with all applicable Federal, State, and local regulations, standards and codes governing asbestos abatement, and any other trade work done in conjunction with the abatement. All applicable codes, regulations and standards are adopted into this specification and will have the same force and effect as this specification.
- B. The most recent edition of any relevant regulation, standard, document or code shall be in effect. Where conflict among the requirements or with these specification exists, the most stringent requirement(s) shall be utilized.
- C. Copies of all standards, regulations, codes and other applicable documents, including this specification and those listed in Section 1.5 shall be available at the worksite in the clean change area of the worker decontamination system.

### **1.5.2 ASBESTOS ABATEMENT CONTRACTOR RESPONSIBILITY**

The Asbestos Abatement Contractor (Contractor) shall assume full responsibility and liability for compliance with all applicable Federal, State and Local regulations related to any and all aspects of the asbestos abatement project. The Contractor is responsible for providing and maintaining training, accreditations, medical exams, medical records, personal protective equipment (PPE) including respiratory protection including respirator fit testing, as required by applicable Federal, State and Local regulations. The Contractor shall hold the VA and VPIH/CIH consultants harmless for any Contractor's failure to comply with any applicable work, packaging, transporting, disposal, safety, health, or environmental requirement on the part of himself, his employees, or his subcontractors. The Contractor will incur all costs of the CPIH/CIH, including all sampling/analytical costs to assure compliance with OSHA/EPA/State requirements related to failure to comply with the regulations applicable to the work.

### **1.5.3 FEDERAL REQUIREMENTS**

Federal requirements which govern some aspect of asbestos abatement include, but are not limited to, the following regulations.

- A. Occupational Safety and Health Administration (OSHA)
  - 1. Title 29 CFR 1926.1101 - Construction Standard for Asbestos
  - 2. Title 29 CFR 1910 Subpart I - Personal Protective Equipment
  - 3. Title 29 CFR 1910.134 - Respiratory Protection
  - 4. Title 29 CFR 1926 - Construction Industry Standards

5. Title 29 CFR 1910.1020 - Access to Employee Exposure and Medical Records

6. Title 29 CFR 1910.1200 - Hazard Communication

7. Title 29 CFR 1910 Subpart K - Medical and First Aid

**B. Environmental Protection Agency (EPA)**

1. 40 CFR 61 Subpart A and M (Revised Subpart B) - National Emission Standard for Hazardous Air Pollutants - Asbestos.

2. 40 CFR 763.80 - Asbestos Hazard Emergency Response Act (AHERA)

**C. Department of Transportation (DOT)**

Title 49 CFR 100 - 185 - Transportation

**1.5.4 STATE REQUIREMENTS:**

State requirements apply to the asbestos abatement work, disposal, clearance, etc.

**1.5.5 LOCAL REQUIREMENTS**

If local requirements are more stringent than federal or state standards, the local standards are to be followed.

**1.5.6 STANDARDS**

A. Standards which govern asbestos abatement activities include, but are not limited to, the following:

1. American National Standards Institute (ANSI) Z9.2-79 - Fundamentals Governing the Design and Operation of Local Exhaust Systems and ANSI Z88.2 - Practices for Respiratory Protection.

2. Underwriters Laboratories (UL) 586-90 - UL Standard for Safety of HEPA filter Units, 7th Edition.

B. Standards which govern encapsulation work include, but are not limited to, the following:

1. American Society for Testing and Materials (ASTM)

C. Standards which govern the fire and safety concerns in abatement work include, but are not limited to, the following:

1. National Fire Protection Association (NFPA) 241 - Standard for Safeguarding Construction, Alteration, and Demolition Operations.

2. NFPA 701 - Standard Methods for Fire Tests for Flame Resistant Textiles and Film.

3. NFPA 101 - Life Safety Code

**1.5.7 EPA GUIDANCE DOCUMENTS**

A. EPA guidance documents which discuss asbestos abatement work activities are listed below. These documents are made part of this section by reference. EPA publications can be ordered from (800) 424-9065.

- B. Guidance for Controlling ACM in Buildings (Purple Book) EPA 560/5-85-024
- C. Asbestos Waste Management Guidance EPA 530-SW-85-007.
- D. A Guide to Respiratory Protection for the Asbestos Abatement Industry EPA-560-OPTS-86-001
- E. Guide to Managing Asbestos in Place (Green Book) TS 799 20T July 1990

#### **1.5.8 NOTICES**

- A. State and Local agencies: Send written notification as required by state and local regulations including the local fire department prior to beginning any work on ACM as follows:
- B. Copies of notifications shall be submitted to the VA for the facility's records in the same time frame notification are given to EPA, State, and Local authorities.

#### **1.5.9 PERMITS/LICENSES**

The contractor shall apply for and have all required permits and licenses to perform asbestos abatement work as required by Federal, State, and Local regulations.

#### **1.5.10 POSTING AND FILING OF REGULATIONS**

Maintain two (2) copies of applicable federal, state, and local regulations. Post one copy of each at the regulated area where workers will have daily access to the regulations and keep another copy in the Contractor's office.

#### **1.5.11 VA RESPONSIBILITIES**

Prior to commencement of work:

- A. Notify occupants adjacent to regulated areas of project dates and requirements for relocation, if needed. Arrangements must be made prior to starting work for relocation of desks, files, equipment, and personal possessions to avoid unauthorized access into the regulated area. **Note: Notification of adjacent personnel is required by OSHA in 29 CFR 1926.1101 (k) to prevent unnecessary or unauthorized access to the regulated area.**
- B. Submit to the Contractor results of background air sampling; including location of samples, person who collected the samples, equipment utilized, calibration data and method of analysis. During abatement, submit to the Contractor, results of bulk material analysis and air sampling data collected during the course of the abatement. This information shall not release the Contractor from any responsibility for OSHA compliance.

**1.5.12 EMERGENCY ACTION PLAN AND ARRANGEMENTS**

- A. An Emergency Action Plan shall be developed by prior to commencing abatement activities and shall be agreed to by the Contractor and the VA. The Plan shall meet the requirements of 29 CFR 1910.38 (a); (b).
- B. Emergency procedures shall be in written form and prominently posted in the clean room and equipment room of the decontamination unit. Everyone, prior to entering the regulated area, must read and sign these procedures to acknowledge understanding of the regulated area layout, location of emergency exits and emergency procedures.
- C. Emergency planning shall include written notification of police, fire, and emergency medical personnel of planned abatement activities; work schedule; layout of regulated area; and access to the regulated area, particularly barriers that may affect response capabilities.
- D. Emergency planning shall include consideration of fire, explosion, hazardous atmospheres, electrical hazards, slips/trips and falls, confined spaces, and heat stress illness. Written procedures for response to emergency situations shall be developed and employee training in procedures shall be provided.
- E. Employees shall be trained in regulated area/site evacuation procedures in the event of workplace emergencies.
  - 1. For non life-threatening situations - employees injured or otherwise incapacitated shall decontaminate following normal procedures with assistance from fellow workers, if necessary, before exiting the regulated area to obtain proper medical treatment.
  - 2. For life-threatening injury or illness, worker decontamination shall take least priority after measures to stabilize the injured worker, remove them from the regulated area, and secure proper medical treatment.
- F. Telephone numbers of any/all emergency response personnel shall be prominently posted in the clean room, along with the location of the nearest telephone.
- G. The Contractor shall provide verification of first aid/CPR training for personnel responsible for providing first aid/CPR. OSHA requires medical assistance within 3-4 minutes of a life-threatening injury/illness. Bloodborne Pathogen training shall also be verified for those personnel required to provide first aid/CPR.
- H. The Emergency Action Plan shall provide for a Contingency Plan in the event that an incident occurs that may require the modification of the Asbestos Hazard Abatement Plans during abatement. Such incidents include, but are not limited to, fire; accident; power failure; negative pressure failure; and supplied air system failure. The Contractor shall detail procedures to be followed in the event of an incident assuring that asbestos abatement work is stopped and wetting is continued until correction of the problem.

**1.5.14 PRE-CONSTRUCTION MEETING**

Prior to commencing the work, the Contractor shall meet with the VPCIH to present and review, as appropriate, the items following this paragraph. The Contractor's Competent Person(s) who will be on-site shall participate in the pre-start meeting. The pre-start meeting is to

discuss and determine procedures to be used during the project. At this meeting, the Contractor shall provide:

- A. Proof of Contractor licensing.
- B. Proof the Competent Person is trained and accredited and approved for working in this State. Verification of the experience of the Competent Person shall also be presented.
- C. A list of all workers who will participate in the project, including experience and verification of training and accreditation.
- D. A list of and verification of training for all personnel who have current first-aid/CPR training. A minimum of one person per shift must have adequate training.
- E. Current medical written opinions for all personnel working on-site meeting the requirements of 29 CFR 1926.1101 (m).
- F. Current fit-tests for all personnel wearing respirators on-site meeting the requirements of 29 CFR 1926.1101 (h) and Appendix C.
- G. A copy of the Contractor's Asbestos Hazard Abatement Plan. In these procedures, the following information must be detailed, specific for this project. A copy of the Contractor's Asbestos Hazard Abatement Plan (AHAP) for Class I Glovebag Asbestos Abatement. In these procedures, the following information must be detailed, specific for this project.
  - 1. Regulated area preparation procedures;
  - 2. Notification requirements procedure of Contractor as required in 29 CFR 1926.1101 (d);
  - 3. If required, decontamination area set-up/layout and decontamination procedures for employees;
  - 4. Glovebag abatement methods/procedures and equipment to be used; and
  - 5. Personal protective equipment to be used.
- H. At this meeting the Contractor shall provide all submittals as required.
- I. Procedures for handling, packaging and disposal of asbestos waste.
- J. Emergency Action Plan and Contingency Plan Procedures.

## **1.6 PROJECT COORDINATION**

The following are the minimum administrative and supervisory personnel necessary for coordination of the work.

### **1.6.1 PERSONNEL**

- A. Administrative and supervisory personnel shall consist of a qualified Competent Person(s) as defined by OSHA in the Construction Standards and the Asbestos Construction Standard; Contractor Professional Industrial Hygienist and Industrial Hygiene Technicians. These employees are the Contractor's representatives responsible for

compliance with these specifications and all other applicable requirements.

B. Non-supervisory personnel shall consist of an adequate number of qualified personnel to meet the schedule requirements of the project. Personnel shall meet required qualifications. Personnel utilized on-site shall be pre-approved by the VA representative. A request for approval shall be submitted for any person to be employed during the project giving the person's name; social security number; qualifications; accreditation card with color picture; Certificate of Worker's Acknowledgment; and Affidavit of Medical Surveillance and Respiratory Protection and current Respirator Fit Test.

C. Minimum qualifications for Contractor and assigned personnel are:

1. The Contractor has conducted within the last three (3) years, three (3) projects of similar complexity and dollar value as this project; has not been cited and penalized for serious violations of federal (and state as applicable) EPA and OSHA asbestos regulations in the past three (3) years; has adequate liability/occurrence insurance for asbestos work as required by the state; is licensed in applicable states; has adequate and qualified personnel available to complete the work; has comprehensive Asbestos Hazard Abatement Plans (AHAPs) for asbestos work; and has adequate materials, equipment and supplies to perform the work.
2. The Competent Person has four (4) years of abatement experience of which two (2) years were as the Competent Person on the project; meets the OSHA definition of a Competent Person; has been the Competent Person on two (2) projects of similar size and complexity as this project within the past three (3) years; has completed EPA AHERA/OSHA/State/Local training requirements/accreditation(s) and refreshers; and has all required OSHA documentation related to medical and respiratory protection.
3. The Contractor Professional Industrial Hygienist/CIH (CPIH/CIH) shall have five (5) years of monitoring experience and supervision of asbestos abatement projects; has participated as senior IH on five (5) abatement projects, three (3) of which are similar in size and complexity as this project; has developed at least one complete Asbestos Hazard Abatement Plan for asbestos abatement; has trained abatement personnel for three (3) years; has specialized EPA AHERA/OSHA training in asbestos abatement management, respiratory protection, waste disposal and asbestos inspection; has completed the NIOSH 582 Course or equivalent, Contractor/Supervisor course; and has appropriate medical/respiratory protection records/documentation.
4. The Abatement Personnel shall have completed the EPA AHERA/OSHA abatement worker course; have training on the Asbestos Hazard Abatement Plans of the Contractor; has one year of asbestos abatement experience within the past three (3) years of similar size and complexity; has applicable medical and respiratory protection documentation; has certificate of training/current refresher and State accreditation/license.

All personnel should be in compliance with OSHA construction safety training as applicable and submit certification.

**1.7 RESPIRATORY PROTECTION****1.7.1 GENERAL - RESPIRATORY PROTECTION PROGRAM**

The Contractor shall develop and implement a written Respiratory Protection Program (RPP) which is in compliance with the January 8, 1998 OSHA requirements found at 29 CFR 1926.1101 and 29 CFR 1910 Subpart I;134. ANSI Standard Z88.2-1992 provides excellent guidance for developing a respiratory protection program. All respirators used must be NIOSH approved for asbestos abatement activities. The written RPP shall, at a minimum, contain the basic requirements found at 29 CFR 1910.134 (c) (1) (i - ix) - Respiratory Protection Program.

**1.7.2 RESPIRATORY PROTECTION PROGRAM COORDINATOR**

The Respiratory Protection Program Coordinator (RPPC) must be identified and shall have two (2) years experience coordinating RPP of similar size and complexity. The RPPC must submit a signed statement attesting to the fact that the program meets the above requirements.

**1.7.3 SELECTION AND USE OF RESPIRATORS**

The procedure for the selection and use of respirators must be submitted to the VA as part of the Contractor's qualifications. The procedure must be written clearly enough for workers to understand. A copy of the Respiratory Protection Program must be available in the clean room of the decontamination unit for reference by employees or authorized visitors.

**1.7.4 MINIMUM RESPIRATORY PROTECTION**

Minimum respiratory protection shall be a full face powered air purifying respirator when fiber levels are maintained consistently at or below 0.5 f/cc. A higher level of respiratory protection may be provided or required, depending on fiber levels. Respirator selection shall meet the requirements of 29 CFR 1926.1101 (h); Table 1, except as indicated in this paragraph. Abatement personnel must have a respirator for their exclusive use.

**1.7.5 MEDICAL WRITTEN OPINION**

No employee shall be allowed to wear a respirator unless a physician or other licensed health care professional has provided a written determination they are medically qualified to wear the class of respirator to be used on the project while wearing whole body impermeable garments and subjected to heat or cold stress.

**1.7.6 RESPIRATOR FIT TEST**

All personnel wearing respirators shall have a current quantitative fit test which was conducted in accordance with 29 CFR 1910.134 (f) and Appendix A. Fit tests shall be done for PAPR's which have been put into a failure mode.

**1.7.7 RESPIRATOR FIT CHECK**

The Competent Person shall assure that the positive/negative pressure user seal check is done each time the respirator is donned by an employee. Head coverings must cover respirator head straps. Any situation that prevents an effective facepiece to face seal as evidenced by failure of a user seal check shall preclude that person from wearing a respirator inside the regulated area until resolution of the problem.

**1.7.8 MAINTENANCE AND CARE OF RESPIRATORS**

The Respiratory Protection Program Coordinator shall submit evidence and documentation showing compliance with 29 CFR 1910.134 (h) maintenance and care of respirators.

**1.8 WORKER PROTECTION****1.8.1 TRAINING OF ABATEMENT PERSONNEL**

Prior to beginning any abatement activity, all personnel shall be trained in accordance with OSHA 29 CFR 1926.1101 (k)(9) and any additional State/Local requirements. Training must include, at a minimum, the elements listed at 29 CFR 1926.1101 (k)(9)(viii). Training shall have been conducted by a third party, EPA/State approved trainer meeting the requirements of EPA 40 CFR 763 Appendix C (AHERA MAP). Initial training certificates and current refresher and accreditation proof must be submitted for each person working at the site.

**1.8.2 MEDICAL EXAMINATIONS**

Medical examinations meeting the requirements of 29 CFR 1926.1101 (m) shall be provided for all personnel working in the regulated area, regardless of exposure levels. A current physician's written opinion as required by 29 CFR 1926.1101 (m)(4) shall be provided for each person and shall include in the medical opinion the person has been evaluated for working in a heat and cold stress environment while wearing personal protective equipment (PPE) and is able to perform the work without risk of material health impairment.

**1.8.3 PERSONAL PROTECTIVE EQUIPMENT**

Provide whole body clothing, head coverings, foot coverings and any other personal protective equipment as determined by conducting the hazard assessment required by OSHA at 29 CFR 1910.132 (d). The Competent Person shall ensure the integrity of personal protective equipment worn for the duration of the project. Duct tape shall be used to secure all suit sleeves to wrists and to secure foot coverings at the ankle.



#### 1.8.4 REGULATED AREA ENTRY PROCEDURE

The Competent Person shall ensure that each time workers enter the regulated area; they remove ALL street clothes in the clean room of the decontamination unit and put on new disposable coveralls, head coverings, a clean respirator, and then proceed through the shower room to the equipment room where they put on non-disposable required personal protective equipment.

#### 1.8.5 DECONTAMINATION PROCEDURE

The Competent Person shall require all personnel to adhere to following decontamination procedures whenever they leave the regulated area.

- A. When exiting the regulated area, remove disposable coveralls, and ALL other clothes, disposable head coverings, and foot coverings or boots in the equipment room.
- B. Still wearing the respirator and completely naked, proceed to the shower. Showering is MANDATORY. Care must be taken to follow reasonable procedures in removing the respirator to avoid inhaling asbestos fibers while showering. The following procedure is required as a minimum:
  1. Thoroughly wet body including hair and face. If using a PAPR hold blower above head to keep filters dry.
  2. With respirator still in place, thoroughly decontaminate body, hair, respirator face piece, and all other parts of the respirator except the blower and battery pack on a PAPR. Pay particular attention to cleaning the seal between the face and respirator facepiece and under the respirator straps.
  3. Take a deep breath, hold it and/or exhale slowly, completely wetting hair, face, and respirator. While still holding breath, remove the respirator and hold it away from the face before starting to breathe.
- C. Carefully decontaminate the facepiece of the respirator inside and out. If using a PAPR, shut down using the following sequence: a) first cap inlets to filters; b) turn blower off to keep debris collected on the inlet side of the filter from dislodging and contaminating the outside of the unit; c) thoroughly decontaminate blower and hoses; d) carefully decontaminate battery pack with a wet rag being cautious of getting water in the battery pack thus preventing destruction. **(THIS PROCEDURE IS NOT A SUBSTITUTE FOR RESPIRATOR CLEANING!)**
- D. Shower and wash body completely with soap and water. Rinse thoroughly.
- E. Rinse shower room walls and floor to drain prior to exiting.
- F. Proceed from shower to clean room; dry off and change into street clothes or into new disposable work clothing.

#### 1.8.6 REGULATED AREA REQUIREMENTS

The Competent Person shall meet all requirements of 29 CFR 1926.1101 (o) and assure that all requirements for Class I glovebag regulated areas at 29 CFR 1926.1101 (e) are met. All personnel in the regulated area shall not be allowed to eat, drink, smoke, chew tobacco or gum,

apply cosmetics, or in any way interfere with the fit of their respirator.

## **1.9 DECONTAMINATION FACILITIES**

### **1.9.1 DESCRIPTION**

Provide each regulated area with separate personnel decontamination facilities (PDF) and waste/equipment decontamination facilities (W/EDF). Ensure that the PDF are the only means of ingress and egress to the regulated area and that all equipment, bagged waste, and other material exit the regulated area only through the W/EDF.

### **1.9.2 GENERAL REQUIREMENTS**

All personnel entering or exiting a regulated area must go through the PDF and shall follow the requirements at 29 CFR 1926.1101 (j)(1) and these specifications. All waste, equipment and contaminated materials must exit the regulated area through the W/EDF and be decontaminated in accordance with these specifications. Walls and ceilings of the PDF and W/EDF must be constructed of a minimum of 3 layers of 6 mil opaque fire retardant polyethylene sheeting and be securely attached to existing building components and/or an adequate temporary framework. A minimum of 3 layers of 6 mil poly shall also be used to cover the floor under the PDF and W/EDF units. Construct doors so that they overlap and secure to adjacent surfaces. Weight inner doorway sheets with layers of duct tape so that they close quickly after release. Put arrows on sheets so they show direction of travel and overlap. If the building adjacent area is occupied, construct a solid barrier on the occupied side(s) to protect the sheeting and reduce potential for non-authorized personnel entering the regulated area.

### **1.9.3 TEMPORARY FACILITIES TO THE PDF AND W/EDF**

The Competent Person shall provide temporary water service connections to the PDF and W/EDF. Backflow prevention must be provided at the point of connection to the VA system. Water supply must be of adequate pressure and meet requirements of 29 CFR 1910.141(d)(3). Provide adequate temporary overhead electric power with ground fault circuit interruption (GFCI) protection. Provide a sub-panel equipped with GFCI protection for all temporary power in the clean room. Provide adequate lighting to provide a minimum of 50 foot candles in the PDF and W/EDF. Provide temporary heat, if needed, to maintain 70°F throughout the PDF and W/EDF.

### **1.9.4 PERSONNEL DECONTAMINATION FACILITY (PDF)**


The Competent Person shall provide a PDF consisting of shower room which is contiguous to a clean room and equipment room. The PDF must be sized to accommodate the number of personnel scheduled for the project. The shower room, located in the center of the PDF, shall be fitted with as many portable showers as necessary to insure all employees can complete the entire decontamination procedure within 15 minutes. The PDF shall be constructed of opaque poly for privacy. The PDF shall be

constructed to eliminate any parallel routes of egress without showering.

1. Clean Room: The clean room must be physically and visually separated from the rest of the building to protect the privacy of personnel changing clothes. The clean room shall be constructed of at least 3 layers of 6 mil opaque fire retardant poly to provide an air tight room. Provide a minimum of 2 - 900 mm (3 foot) wide 6 mil poly opaque fire retardant doorways. One doorway shall be the entry from outside the PDF and the second doorway shall be to the shower room of the PDF. The floor of the clean room shall be maintained in a clean, dry condition. Shower overflow shall not be allowed into the clean room. Provide 1 storage locker per person. A portable fire extinguisher, minimum 10 pounds capacity, Type ABC, shall be provided in accordance with OSHA and NFPA Standard 10. All persons entering the regulated area shall remove all street clothing in the clean room and dress in disposable protective clothing and respiratory protection. Any person entering the clean room does so either from the outside with street clothing on or is coming from the shower room completely naked and thoroughly washed. Females required to enter the regulated area shall be ensured of their privacy throughout the entry/exit process by posting guards at both entry points to the PDF so no male can enter or exit the PDF during her stay in the PDF.
2. Shower Room: The Competent Person shall assure that the shower room is a completely water tight compartment to be used for the movement of all personnel from the clean room to the equipment room and for the showering of all personnel going from the equipment room to the clean room. Each shower shall be constructed so water runs down the walls of the shower and into a drip pan. Install a freely draining smooth floor on top of the shower pan. The shower room shall be separated from the rest of the building and from the clean room and equipment room using air tight walls made from at least 3 layers of 6 mil opaque fire retardant poly. The shower shall be equipped with a shower head and controls, hot and cold water, drainage, soap dish and continuous supply of soap, and shall be maintained in a sanitary condition throughout its use. The controls shall be arranged so an individual can shower without assistance. Provide a flexible hose shower head, hose bibs and all other items shown on Shower Schematic. Waste water will be pumped to a drain after being filtered through a minimum of a 100 micron sock in the shower drain; a 20 micron filter; and a final 5 micron filter. Filters will be changed a minimum of once per day or more often as needed. Filter changes must be done in the shower to prevent loss of contaminated water. Hose down all shower surfaces after each shift and clean any debris from the shower pan. Residue is to be disposed of as asbestos waste.
3. Equipment Room: The Competent Person shall provide an equipment room which shall be an air tight compartment for the storage of work equipment/tools, reusable personal protective equipment, except for a respirator and for use as a gross decontamination area for personnel exiting the regulated area. The equipment room shall be separated from the regulated area by a minimum 3 foot wide door made with 2 layers of 6 mil opaque fire retardant poly. The equipment room shall be separated from the regulated area, the shower room and the rest of the building by air tight walls and ceiling constructed

of a minimum of 3 layers of 6 mil opaque fire retardant poly. Damp wipe all surfaces of the equipment room after each shift change. Provide an additional loose layer of 6 mil fire retardant poly per shift change and remove this layer after each shift. If needed, provide a temporary electrical sub-panel equipped with GFCI in the equipment room to accommodate any equipment required in the regulated area.

4. The PDF shall be as follows: Clean room at the entrance followed by a shower room followed by an equipment room leading to the regulated area. Each doorway in the PDF shall be a minimum of 2 layers of 6 mil opaque fire retardant poly.

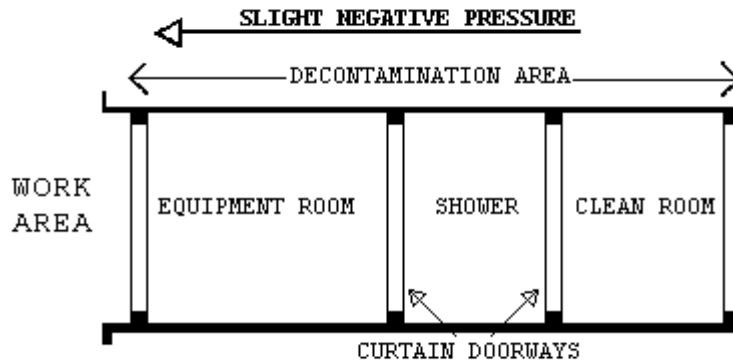


#### 1.9.5 WASTE/EQUIPMENT DECONTAMINATION FACILITY (W/EDF)

The Competent Person shall provide a W/EDF consisting of a wash room, holding room, and clean room for removal of waste, equipment and contaminated material from the regulated area. Personnel shall not enter or exit the W/EDF except in the event of an emergency. Clean debris and residue in the W/EDF daily. All surfaces in the W/EDF shall be wiped/hosed down after each shift and all debris shall be cleaned from the shower pan. The W/EDF shall consist of the following:

1. Wash Down Station: Provide an enclosed shower unit in the regulated area just outside the Wash Room as an equipment bag and container cleaning station.
2. Wash Room: Provide a wash room for cleaning of bagged or containerized asbestos containing waste materials passed from the regulated area. Construct the wash room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. Locate the wash room so that packaged materials, after being wiped clean, can be passed to the Holding Room. Doorways in the wash room shall be constructed of 2 layers of 6 mil fire retardant poly.
3. Holding Room: Provide a holding room as a drop location for bagged materials passed from the wash room. Construct the holding room using 50 x 100 mm (2" x 4") wood framing and 3 layers of 6 mil fire retardant poly. The holding room shall be located so that bagged material cannot be passed from the wash room to the clean room unless it goes through the holding room. Doorways in the holding room shall be constructed of 2 layers of 6 mil fire retardant poly.

4. Clean Room: Provide a clean room to isolate the holding room from the exterior of the regulated area. Construct the clean room using 2 x 4 wood framing and 2 layers of 6 mil fire retardant poly. The clean room shall be located so as to provide access to the holding room from the building exterior. Doorways to the clean room shall be constructed of 2 layers of 6 mil fire retardant poly. When a negative pressure differential system is used, a rigid enclosure separation between the W/EDF clean room and the adjacent areas shall be provided.
5. The W/EDF shall be as follows: Wash Room leading to a Holding Room followed by a Clean Room leading to outside the regulated area. See diagram.

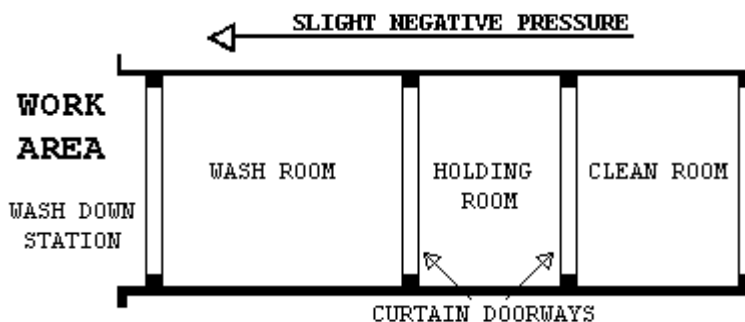

#### 1.9.6 WASTE/EQUIPMENT DECONTAMINATION PROCEDURES

At the washdown station in the regulated area, thoroughly wet wipe/clean contaminated equipment and/or sealed polyethylene bags and pass into Wash Room after visual inspection. When passing anything into the Wash Room, close all doorways of the W/EDF, other than the doorway between the washdown station and the Wash Room. Keep all outside personnel clear of the W/EDF. Once inside the Wash Room, wet clean the equipment and/or bags. After cleaning and inspection, pass items into the Holding Room. Close all doorways except the doorway between the Holding Room and the Clean Room. Workers from the Clean Room/Exterior shall enter the Holding Room and remove the decontaminated/cleaned equipment/bags for removal and disposal. These personnel will not be required to wear PPE. At no time shall personnel from the clean side be allowed to enter the Wash Room.

## PART 2 - PRODUCTS, MATERIALS AND EQUIPMENT

### 2.1 MATERIALS AND EQUIPMENT

#### 2.1.1 GENERAL REQUIREMENTS (ALL ABATEMENT PROJECTS)

Prior to the start of work, the contractor shall provide and maintain a sufficient quantity of materials and equipment to assure continuous and efficient work throughout the duration of the project. Work shall not start unless the following items have been delivered to the site and the CPIH/CIH has submitted verification to the VA's representative.

- A. All materials shall be delivered in their original package, container or bundle bearing the name of the manufacturer and the brand name (where applicable).
- B. Store all materials subject to damage off the ground, away from wet or damp surfaces and under cover sufficient enough to prevent damage or contamination. Flammable and combustible materials cannot be stored inside buildings. Replacement materials shall be stored outside of the regulated area until abatement is completed.
- C. The Contractor shall not block or hinder use of buildings by patients, staff, and visitors to the VA in partially occupied buildings by placing materials/equipment in any unauthorized location.
- D. The Competent Person shall inspect for damaged, deteriorating or previously used materials. Such materials shall not be used and shall be removed from the worksite and disposed of properly.
- E. Polyethylene sheeting for walls in the regulated area shall be a minimum of 4-mils. For floors and all other uses, sheeting of at least 6-mils shall be used in widths selected to minimize the frequency of joints. Fire retardant poly shall be used throughout.
- F. The method of attaching polyethylene sheeting shall be agreed upon in advance by the Contractor and the VA and selected to minimize damage to equipment and surfaces. Method of attachment may include any combination of moisture resistant duct tape furring strips, spray glue, staples, nails, screws, lumber and plywood for enclosures or other effective procedures capable of sealing polyethylene to dissimilar finished or unfinished surfaces under both wet and dry conditions.
- G. Polyethylene sheeting utilized for the PDF shall be opaque white or black in color, 6 mil fire retardant poly.
- H. Installation and plumbing hardware, showers, hoses, drain pans, sump pumps and waste water filtration system shall be provided by the Contractor.
- I. An adequate number of HEPA vacuums, scrapers, sprayers, nylon brushes, brooms, disposable mops, rags, sponges, staple guns, shovels, ladders and scaffolding of suitable height and length as well as meeting OSHA requirements, fall protection devices, water hose to reach all areas in the regulated area, airless spray equipment, and any other tools, materials or equipment required to conduct the abatement project. All electrically operated hand tools, equipment, electric cords shall be connected to GFCI protection.
- J. Special protection for objects in the regulated area shall be detailed (e.g., plywood over carpeting or hardwood floors to prevent damage from scaffolds, water and falling material).
- K. Disposal bags - 2 layers of 6 mil poly for asbestos waste shall be pre-printed with labels, markings and address as required by OSHA, EPA and DOT regulations.
- L. The VA shall be provided an advance copy of the MSDS as required for all hazardous chemicals under OSHA 29 CFR 1910.1200 - Hazard Communication in the pre-project submittal. Chlorinated compounds shall not be used with any spray adhesive, mastic remover or other product. Appropriate encapsulant(s) shall be provided.

- M. OSHA DANGER demarcation signs, as many and as required by OSHA 29 CFR 1926.1101(k) (7) shall be provided and placed by the Competent Person. All other posters and notices required by Federal and State regulations shall be posted in the Clean Room.
- N. Adequate and appropriate PPE for the project and number of personnel/shifts shall be provided. All personal protective equipment issued must be based on a written hazard assessment conducted under 29 CFR 1910.132(d).

## **2.2 CONTAINMENT BARRIERS AND COVERINGS IN THE REGULATED AREA**

### **2.2.1 GENERAL**

Using critical barriers, seal off the perimeter to the regulated area to completely isolate the regulated area from adjacent spaces. All horizontal surfaces in the regulated area must be covered with 2 layers of 6 mil fire retardant poly to prevent contamination and to facilitate clean-up. Should adjacent areas become contaminated, immediately stop work and clean up the contamination at no additional cost to the Government. Provide firestopping and identify all fire barrier penetrations due to abatement work as specified in Section 2.2.8; FIRESTOPPING.

### **2.2.2 PREPARATION PRIOR TO SEALING THE REGULATED AREA**

- A. Place all tools, scaffolding, materials and equipment needed for working in the regulated area prior to erecting any plastic sheeting. Remove all uncontaminated removable furniture, equipment and/or supplies from the regulated area before commencing work, or completely cover with 2 layers of 6-mil fire retardant poly sheeting and secure with duct tape. Lock out and tag out any HVAC systems in the regulated area.

### **2.2.3 CONTROLLING ACCESS TO THE REGULATED AREA**

- A. Access to the regulated area is allowed only through the personnel decontamination facility (PDF), if required. All other means of access shall be eliminated and OSHA Danger demarcation signs posted as required by OSHA. If the regulated area is adjacent to or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly sheeting to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid.

### **2.2.4 CRITICAL BARRIERS**

- A. Completely separate any openings into the regulated area from adjacent areas using fire retardant poly at least 6 mils thick and duct tape. Individually seal with 2 layers of 6 mil poly and duct tape all HVAC openings into the regulated area. Individually seal all lighting fixtures, clocks, doors, windows, convectors, speakers, or any other objects in the regulated area. Heat must be shut off any objects covered with poly.

### **2.2.5 SECONDARY BARRIERS**

- A. A loose layer of 6 mil fire retardant poly shall be used as a drop cloth to protect the floor/horizontal surfaces from debris generated during the glovebag abatement. This layer shall be replaced as needed during the work.

### **2.2.6 EXTENSION OF THE REGULATED AREA**

- A. If the enclosure of the regulated area is breached in any way that could allow contamination to occur, the affected area shall be included in the regulated area and constructed as per this section. If the affected area cannot be added to the regulated area, decontamination measures must be started immediately and continue until air monitoring indicates background levels are met.

### **2.2.7 FIRESTOPPING**

- A. Through penetrations caused by cables, cable trays, pipes, sleeves must be firestopped with a fire-rated firestop system providing an air tight seal.
- B. Firestop materials that are not equal to the wall or ceiling penetrated shall be brought to the attention of the VA Representative. The Contractor shall list all areas of penetration, the type of sealant used, and whether or not the location is fire rated. Any discovery of penetrations during abatement shall be brought to the attention of the VA Representative immediately. All walls, floors and ceilings are considered fire rated unless otherwise determined by the VA Representative or Fire Marshall.
- C. Any visible openings whether or not caused by a penetration shall be reported by the Contractor to the VA Representative for a sealant system determination. Firestops shall meet ASTM E814 and UL 1479 requirements for the opening size, penetrant, and fire rating needed.

## **2.3 MONITORING, INSPECTION AND TESTING**

### **2.3.1 GENERAL**

- A. Perform throughout abatement work monitoring, inspection and testing inside and around the regulated area in accordance with the OSHA requirements and these specifications. OSHA requires that the Employee exposure to asbestos must not exceed 0.1 fibers per cubic centimeter (f/cc) of air, averaged over an 8-hour work shift. The CPIH/CIH is responsible for and shall inspect and oversee the performance of the Contractor IH Technician. The IH Technician shall continuously inspect and monitor conditions inside the regulated area to ensure compliance with these specifications. In addition, the CPIH/CIH shall personally manage air sample collection, analysis, and evaluation for personnel, regulated area, and adjacent area samples to satisfy OSHA requirements. Additional inspection and testing requirements are also indicated in other parts of this specification.
- B. The VA will employ an independent industrial hygienist (VPIH/CIH) consultant and/or use its own IH to perform various services on behalf of the VA. The VPIH/CIH will perform the necessary monitoring,



inspection, testing, and other support services to ensure that VA patients, employees, and visitors will not be adversely affected by the abatement work, and that the abatement work proceeds in accordance with these specifications, that the abated areas or abated buildings have been successfully decontaminated. The work of the VPIH/CIH consultant in no way relieves the Contractor from their responsibility to perform the work in accordance with contract/specification requirements, to perform continuous inspection, monitoring and testing for the safety of their employees, and to perform other such services as specified. The cost of the VPIH/CIH and their services will be borne by the VA except for any repeat of final inspection and testing that may be required due to unsatisfactory initial results. Any repeated final inspections and/or testing, if required, will be paid for by the Contractor.

- C. If fibers counted by the VPIH/CIH during abatement work, either inside or outside the regulated area, utilizing the NIOSH 7400 air monitoring method, exceed the specified respective limits, the Contractor shall stop work. The Contractor may request confirmation of the results by analysis of the samples by TEM. Request must be in writing and submitted to the VA's representative. Cost for the confirmation of results will be borne by the Contractor for both the collection and analysis of samples and for the time delay that may/does result for this confirmation. Confirmation sampling and analysis will be the responsibility of the CPIH/CIH with review and approval of the VPIH/CIH. An agreement between the CPIH/CIH and the VPIH/CIH shall be reached on the exact details of the confirmation effort, in writing, including such things as the number of samples, location, collection, quality control on-site, analytical laboratory, interpretation of results and any follow-up actions. This written agreement shall be co-signed by the IH's and delivered to the VA's representative.

### **2.3.2 SCOPE OF SERVICES OF THE VPIH/CIH CONSULTANT**

- A. The purpose of the work of the VPIH/CIH is to: Assure quality; resolve problems; and prevent the spread of contamination beyond the regulated area. In addition, their work includes performing the final inspection and testing to determine whether the regulated area or building has been adequately decontaminated. All air monitoring is to be done utilizing PCM/TEM. The VPIH/CIH will perform the following tasks:
  - 1. Task 1: Establish background levels before abatement begins by collecting background samples. Retain samples for possible TEM analysis.
  - 2. Task 2: Perform continuous air monitoring, inspection, and testing outside the regulated area during actual abatement work to detect any faults in the regulated area isolation and any adverse impact on the surroundings from regulated area activities.
  - 3. Task 3: Perform unannounced visits to spot check overall compliance of work with contract/specifications. These visits may include any inspection, monitoring, and testing inside and outside the regulated area and all aspects of the operation except personnel monitoring.
  - 4. Task 4: Provide support to the VA representative such as evaluation of submittals from the Contractor, resolution of unforeseen developments, etc.

5. Task 5: Perform, in the presence of the VA representative, final inspection and testing of a decontaminated regulated area or building at the conclusion of the abatement and clean-up work to certify compliance with all regulations and the VA requirements/specifications.
  6. Task 6: Issue certificate of decontamination for each regulated area or building and project report.
- B. All data, inspection results and testing results generated by the VPIH/CIH will be available to the Contractor for information and consideration. The Contractor shall cooperate with and support the VPIH/CIH for efficient and smooth performance of their work.
  - C. The monitoring and inspection results of the VPIH/CIH will be used by the VA to issue any Stop Removal orders to the Contractor during abatement work and to accept or reject a regulated area or building as decontaminated.

### **2.3.3 MONITORING, INSPECTION AND TESTING BY ABATEMENT CONTRACTOR CPIH/CIH**

The Contractor's CPIH/CIH is responsible for managing all monitoring, inspections, and testing required by these specifications, as well as any and all regulatory requirements adopted by these specifications. The CPIH/CIH is responsible for the continuous monitoring of all subsystems and procedures which could affect the health and safety of the Contractor's personnel. Safety and health conditions and the provision of those conditions inside the regulated area for all persons entering the regulated area is the exclusive responsibility of the Contractor/Competent Person. The person performing the personnel and area air monitoring inside the regulated area shall be an IH Technician, who shall be trained and shall have specialized field experience in sampling and analysis. The IH Technician shall have successfully completed a NIOSH 582 Course or equivalent and provide documentation. The IH Technician shall participate in the AIHA Asbestos Analysis Registry or participate in the Proficiency Analytic Testing program of AIHA for fiber counting quality control assurance. The IH Technician shall also be an accredited EPA AHERA/State Contractor/Supervisor (or Abatement Worker) and Building Inspector. The IH Technician shall have participated in five abatement projects collecting personal and area samples as well as responsibility for documentation on substantially similar projects in size and scope. The analytic laboratory used by the Contractor to analyze the samples shall be AIHA accredited for asbestos PAT and approved by the VA prior to start of the project. A daily log shall be maintained by the CPIH/CIH or IH Technician, documenting all OSHA requirements for air personal monitoring for asbestos in 29 CFR 1926.1101(f), (g) and Appendix A. This log shall be made available to the VA representative and the VPIH/CIH upon request. The log will contain, at a minimum, information on personnel or area samples, other persons represented by the sample, the date of sample collection, start and stop times for sampling, sample volume, flow rate, and fibers/cc. The CPIH/CIH shall collect and analyze samples for each representative job being done in the regulated area, i.e., removal, wetting, clean-up, and load-out. No fewer than two personal samples per shift shall be collected and one area sample per 1,000 square feet of regulated area where abatement is taking place and one sample per shift in the clean room area shall be collected. In

addition to the continuous monitoring required, the CPIH/CIH will perform inspection and testing at the final stages of abatement for each regulated area as specified in the CPIH/CIH responsibilities. Additionally, the CPIH/CIH will monitor and record pressure readings within the containment daily with a minimum of two readings at the beginning and at the end of a shift, and submit the data in the daily report.

## **2.4 ASBESTOS HAZARD ABATEMENT PLAN**

The Contractor shall have established Asbestos Hazard Abatement Plan (AHAP) in printed form and loose leaf folder consisting of simplified text, diagrams, sketches, and pictures that establish and explain clearly the ways and procedures to be followed during all phases of the work by the Contractor's personnel. The AHAP must be modified as needed to address specific requirements of the project. The AHAP shall be submitted for review and approval prior to the start of any abatement work. The minimum topics and areas to be covered by the AHAP(s) are:

- A. Minimum Personnel Qualifications
- B. Contingency Plans and Arrangements
- C. Security and Safety Procedures
- D. Respiratory Protection/Personal Protective Equipment Program and Training
- E. Medical Surveillance Program and Recordkeeping
- F. Regulated Area Requirements for Glovebag Abatement
- G. Decontamination Facilities and Entry/Exit Procedures (PDF and W/EDF)
- H. Monitoring, Inspections, and Testing
- I. Removal Procedures for Piping ACM Using the Glovebag Method
- J. Disposal of ACM waste
- K. Regulated Area Decontamination/Clean-up
- L. Regulated Area Visual and Air Clearance
- M. Project Completion/Closeout

## **2.5 SUBMITTALS**

### **2.5.1 PRE-START MEETING SUBMITTALS**

Submit to the VA a minimum of 14 days prior to the pre-start meeting the following for review and approval. Meeting this requirement is a prerequisite for the pre-start meeting for this project:

- A. Submit a detailed work schedule for the entire project reflecting contract documents and the phasing/schedule requirements from the CPM chart.
- B. Submit a staff organization chart showing all personnel who will be working on the project and their capacity/function. Provide their qualifications, training, accreditations, and licenses, as appropriate. Provide a copy of the "Certificate of Worker's Acknowledgment" and the "Affidavit of Medical Surveillance and Respiratory Protection" for each person.

- C. Submit Asbestos Hazard Abatement Plan developed specifically for this project, incorporating the requirements of the specifications, prepared, signed and dated by the CPIH/CIH.
- D. Submit the specifics of the materials and equipment to be used for this project with manufacturer names, model numbers, performance characteristics, pictures/diagrams, and number available for the following:
  - 1. Supplied air system, negative air machines, HEPA vacuums, air monitoring pumps, calibration devices, pressure differential monitoring device and emergency power generating system.
  - 2. Waste water filtration system, shower system, containment barriers.
  - 3. Encapsulants, surfactants, hand held sprayers, airless sprayers, glovebags, and fire extinguishers.
  - 4. Respirators, protective clothing, personal protective equipment.
  - 5. Fire safety equipment to be used in the regulated area.
- E. Submit the name, location, and phone number of the approved landfill; proof/verification the landfill is approved for ACM disposal; the landfill's requirements for ACM waste; the type of vehicle to be used for transportation; and name, address, and phone number of subcontractor, if used. Proof of asbestos training for transportation personnel shall be provided.
- F. Submit required notifications and arrangements made with regulatory agencies having regulatory jurisdiction and the specific contingency/emergency arrangements made with local health, fire, ambulance, hospital authorities and any other notifications/arrangements.
- G. Submit the name, location and verification of the laboratory and/or personnel to be used for analysis of air and/or bulk samples. Personal air monitoring must be done in accordance with OSHA 29 CFR 1926.1101(f) and Appendix A. And area or clearance air monitoring in accordance with EPA AHERA protocols.
- H. Submit qualifications verification: Submit the following evidence of qualifications. Make sure that all references are current and verifiable by providing current phone numbers and documentation.
  - 1. Asbestos Abatement Company: Project experience within the past 3 years; listing projects first most similar to this project: Project Name; Type of Abatement; Duration; Cost; Reference Name/Phone Number; Final Clearance; and Completion Date
  - 2. List of project(s) halted by owner, A/E, IH, regulatory agency in the last 3 years: Project Name; Reason; Date; Reference Name/Number; and Resolution.
  - 3. List asbestos regulatory citations (e.g., OSHA), notices of violations (e.g., Federal and state EPA), penalties, and legal actions taken against the company including and of the company's officers (including damages paid) in the last 3 years. Provide copies and all information needed for verification.
- I. Submit information on personnel: Provide a resume; address each item completely; copies of certificates, accreditations, and licenses. Submit an affidavit signed by the CPIH/CIH stating that all personnel

submitted below have medical records in accordance with OSHA 29 CFR 1926.1101(m) and 29 CFR 1910.20 and that the company has implemented a medical surveillance program and written respiratory protection program, and maintains recordkeeping in accordance with the above regulations. Submit the phone number and doctor/clinic/hospital used for medical evaluations.

1. CPIH/CIH and IH Technician: Name; years of abatement experience; list of projects similar to this one; certificates, licenses, accreditations for proof of AHERA/OSHA specialized asbestos training; professional affiliations; number of workers trained; samples of training materials; samples of AHAP(s) developed; medical opinion; and current respirator fit test.
  2. Competent Person(s)/Supervisor(s): Number; names; social security numbers; years of abatement experience as Competent Person/Supervisor; list of similar projects in size/complexity as Competent Person/Supervisor; as a worker; certificates, licenses, accreditations; proof of AHERA/OSHA specialized asbestos training; maximum number of personnel supervised on a project; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
  3. Workers: Numbers; names; social security numbers; years of abatement experience; certificates, licenses, accreditations; training courses in asbestos abatement and respiratory protection; medical opinion (asbestos surveillance and respirator use); and current respirator fit test.
- J. Submit copies of State license for asbestos abatement; copy of insurance policy, including exclusions with a letter from agent stating in plain language the coverage provided and the fact that asbestos abatement activities are covered by the policy; copy of AHAP(s) incorporating the requirements of this specification; information on who provides your training, how often; who provides medical surveillance, how often; who performs and how is personal air monitoring of abatement workers conducted; a list of references of independent laboratories/IH's familiar with your air monitoring and Asbestos Hazard Abatement Plans; copies of monitoring results of the five referenced projects listed and analytical method(s) used.
- K. Rented equipment must be decontaminated prior to returning to the rental agency.
- L. Submit, before the start of work, the manufacturer's technical data for all types of encapsulants, all MSDS, and application instructions.

#### **2.5.2 SUBMITTALS DURING ABATEMENT**

- A. The Competent Person shall maintain and submit a daily log at the regulated area documenting the dates and times of the following: purpose, attendees and summary of meetings; all personnel entering/exiting the regulated area; document and discuss the resolution of unusual events such as barrier breaching, equipment failures, emergencies, and any cause for stopping work; representative air monitoring and results/TWAs/ELs. Submit this information daily to the VPIH/CIH.

- B. The CPIH/CIH shall document and maintain the inspection and approval of the regulated area preparation prior to start of work and daily during work.
  - 1. Removal of any poly barriers.
  - 2. Visual inspection/testing by the CPIH/CIH or IH Technician prior to application of lockdown encapsulant.
  - 3. Packaging and removal of ACM waste from regulated area.
  - 4. Disposal of ACM waste materials; copies of Waste Shipment Records/landfill receipts to the VA's representative on a weekly basis.

### **2.5.3 SUBMITTALS AT COMPLETION OF ABATEMENT**

The CPIH/CIH shall submit a project report consisting of the daily log book requirements and documentation of events during the abatement project including Waste Shipment Records signed by the landfill's agent. It will also include information on the containment and transportation of waste from the containment with applicable Chain of Custody forms. The report shall include a certificate of completion, signed and dated by the CPIH/CIH, in accordance with Attachment #1. All clearance and perimeter area samples must be submitted. The VA Representative will retain the abatement report after completion of the project and provide copies of the abatement report to VAMC Office of Engineer and the Safety Office.

## **2.6 ENCAPSULANTS**

### **2.6.1 TYPES OF ENCAPSULANTS**

- A. The following four types of encapsulants must comply with performance requirements as stated in paragraph 2.6.2:
  - 1. Removal encapsulant - used as a wetting agent to remove ACM.
  - 2. Bridging encapsulant - provides a tough, durable coating on ACM.
  - 3. Penetrating encapsulant - penetrates/encapsulates ACM at least 13 mm (1/2").
  - 4. Lockdown encapsulant - seals microscopic fibers on surfaces after ACM removal.

### **2.6.2 PERFORMANCE REQUIREMENTS**

Encapsulants shall meet the latest requirements of EPA; shall not contain toxic or hazardous substances; or solvents; and shall comply with the following performance requirements:

- A. General Requirements for all Encapsulants:
  - 1. ASTM E84: Flame spread of 25; smoke emission of 50.
  - 2. University of Pittsburgh Protocol: Combustion Toxicity; zero mortality.
  - 3. ASTM C732: Accelerated Aging Test; Life Expectancy - 20 years.
  - 4. ASTM E96: Permeability - minimum of 0.4 perms.

**B. Bridging/Penetrating Encapsulants:**

1. ASTM E736: Cohesion/Adhesion Test - 24 kPa (50 lbs/ft<sup>2</sup>).
2. ASTM E119: Fire Resistance - 3 hours (Classified by UL for use on fibrous/cementitious fireproofing).
3. ASTM D2794: Gardner Impact Test; Impact Resistance - minimum 11.5 kg-mm (43 in/lb).
4. ASTM D522: Mandrel Bend Test; Flexibility - no rupture or cracking.

**C. Lockdown Encapsulants:**

1. ASTM E119: Fire resistance - 3 hours (tested with fireproofing over encapsulant applied directly to steel member).
2. ASTM E736: Bond Strength - 48 kPa (100 lbs/ft<sup>2</sup>) (test compatibility with cementitious and fibrous fireproofing).
3. In certain situations, encapsulants may have to be applied to hot pipes/equipment. The encapsulant must be able to withstand high temperatures without cracking or off-gassing any noxious vapors during application.

**2.7 CERTIFICATES OF COMPLIANCE**

The Contractor shall submit to the VA representative certification from the manufacturer indicating compliance with performance requirements for encapsulants when applied according to manufacturer recommendations.

**2.8 RECYCLABLE PROTECTIVE CLOTHING**

If recyclable clothing is provided, all requirements of EPA, DOT and OSHA shall be met.

**PART 3 - EXECUTION****3.1 REGULATED AREA PREPARATIONS****3.1.1 SITE SECURITY**

- A. Regulated area access is to be restricted only to authorized, trained/accredited and protected personnel. These may include the Contractor's employees, employees of Subcontractors, VA employees and representatives, State and local inspectors, and any other designated individuals. A list of authorized personnel shall be established prior to commencing the project and be posted in the clean room of the decontamination unit.
- B. Entry into the regulated area by unauthorized individuals shall be reported immediately to the Competent Person by anyone observing the entry. The Competent Person shall immediately require any unauthorized person to leave the regulated area and then notify the VA Contracting Officer or VA Representative using the most expeditious means.
- C. A log book shall be maintained in the clean room of the decontamination unit. Anyone who enters the regulated area must

record their name, affiliation, time in, and time out for each entry.

- D. Access to the regulated area shall be through a single decontamination unit. All other access (doors, windows, hallways, etc.) shall be sealed or locked to prevent entry to or exit from the regulated area. The only exceptions for this requirement are the waste/equipment load-out area which shall be sealed except during the removal of containerized asbestos waste from the regulated area, and emergency exits. Emergency exits shall not be locked from the inside; however, they shall be sealed with poly sheeting and taped until needed. In any situation where exposure to high temperatures which may result in a flame hazard, fire retardant poly sheeting must be used.
- E. The Contractor's Competent Person shall control site security during abatement operations in order to isolate work in progress and protect adjacent personnel. A 24 hour security system shall be provided at the entrance to the regulated area to assure that all entrants are logged in/out and that only authorized personnel are allowed entrance.
- F. The Contractor will have the VA's assistance in notifying adjacent personnel of the presence, location and quantity of ACM in the regulated area and enforcement of restricted access by the VA's employees.
- G. The regulated area shall be locked during non-working hours and secured by VA Representative or Competent Person. The VA Police should be informed of asbestos abatement regulated areas to provide security checks during facility rounds and emergency response.

### **3.1.2 OSHA DANGER SIGNS**

Post OSHA DANGER signs meeting the specifications of OSHA 29 CFR 1926.1101 at any location and approaches to the regulated area where airborne concentrations of asbestos may exceed ambient background levels. Signs shall be posted at a distance sufficiently far enough away from the regulated area to permit any personnel to read the sign and take the necessary measures to avoid exposure. Additional signs will be posted following construction of the regulated area enclosure.

#### **3.1.3.1 SHUT DOWN - LOCK OUT ELECTRICAL**

Shut down and lock out/tag out electric power to the regulated area. Provide temporary power and lighting. Insure safe installation including GFCI of temporary power sources and equipment by compliance with all applicable electrical code requirements and OSHA requirements for temporary electrical systems. Electricity shall be provided by the VA.

#### **3.1.3.2 SHUT DOWN - LOCK OUT HVAC**

Shut down and lock out/tag out heating, cooling, and air conditioning system (HVAC) components that are in, supply or pass through the regulated area. Investigate the regulated area and agree on pre-



abatement condition with the VA's representative. Seal all intake and exhaust vents in the regulated area with duct tape and 2 layers of 6-mil poly. Also, seal any seams in system components that pass through the regulated area. Remove all contaminated HVAC system filters and place in labeled 6-mil poly disposal bags for disposal as asbestos waste.

### **3.1.4 CONTAINMENT BARRIERS AND COVERINGS FOR THE REGULATED AREA**

#### **3.1.4.1 GENERAL**

Seal off any openings at the perimeter of the regulated area with critical barriers to completely isolate the regulated area and to contain all airborne asbestos contamination created by the abatement activities. Should the adjacent area past the regulated area become contaminated due to improper work activities, the Contractor shall suspend work inside the regulated area, continue wetting, and clean the adjacent areas in accordance with procedures described in these specifications. Any and all costs associated with the adjacent area cleanup shall not be borne by the VA.

#### **3.1.4.2 PREPARATION PRIOR TO SEALING OFF**

Place all materials, equipment and supplies necessary to isolate the regulated area inside the regulated area. Remove all movable material/equipment as described above and secure all unmovable material/equipment as described above. Properly secured material/equipment shall be considered to be outside the regulated area.

#### **3.1.4.3 CONTROLLING ACCESS TO THE REGULATED AREA**

Access to the regulated area is allowed only through the personnel decontamination facility (PDF). All other means of access shall be eliminated and OSHA DANGER demarcation signs posted as required by OSHA. If the regulated area is adjacent to, or within view of an occupied area, provide a visual barrier of 6 mil opaque fire retardant poly to prevent building occupant observation. If the adjacent area is accessible to the public, the barrier must be solid and capable of withstanding the negative pressure.

#### **3.1.4.4 CRITICAL BARRIERS**

The regulated area must be completely separated from the adjacent area(s) and the outside by at least 2 layers of 6 mil fire retardant poly and duct tape/spray adhesive. Individually seal all supply and exhaust ventilation openings, lighting fixtures, clocks, doorways, windows, convectors, speakers, and other openings into the regulated area with 2 layers of 6 mil fire retardant poly, and taped securely in place with duct tape/spray adhesive. Critical barriers must remain in place until all work and clearances have been completed. Light fixtures shall not be operational during abatement. Auxiliary lighting shall be provided. If needed, provide plywood squares 6" x 6" x 3/8" (150mm x 150mm x 18mm) held in place with one 6d smooth masonry/galvanized nail driven through the center of the plywood square and duct tape on the

poly so as to clamp the poly to the wall/surface. Locate plywood squares at each end, corner, and 4' (1200mm) maximum on centers.

#### **3.1.4.5 EXTENSION OF THE REGULATED AREA**

If the regulated area barrier is breached in any manner that could allow the passage of asbestos fibers or debris, the Competent Person shall immediately stop work, continue wetting, and proceed to extend the regulated area to enclose the affected area as per procedures described in this specification. If the affected area cannot be enclosed, decontamination measures and cleanup shall start immediately. All personnel shall be isolated from the affected area until decontamination/cleanup is completed as verified by visual inspection and air monitoring. Air monitoring at completion must indicate background levels.

#### **3.1.4.6 FLOOR BARRIERS:**

All floors within 10' of glovebag work shall be covered with 2 layers of 6 mil fire retardant poly.

#### **3.1.5 SANITARY FACILITIES**

The Contractor shall provide sanitary facilities for abatement personnel and maintain them in a clean and sanitary condition throughout the abatement project.

#### **3.1.6 PRE-CLEANING**

##### **3.1.6.1 PRE-CLEANING MOVABLE OBJECTS**

The VA will provide water for abatement purposes. The Contractor shall connect to the existing VA system. The service to the shower(s) shall be supplied with backflow prevention.

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area. PPE must be donned by all workers performing pre-cleaning activities. After items have been pre-cleaned and decontaminated, they may be removed from the work area for storage until the completion of abatement in the work area.

Pre-clean all movable objects within the regulated area using a HEPA filtered vacuum and/or wet cleaning methods as appropriate. After cleaning, these objects shall be removed from the regulated area and carefully stored in an uncontaminated location.

##### **3.1.6.2 PRE-CLEANING FIXED OBJECTS**

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area.

Pre-clean all fixed objects in the regulated area using HEPA filtered vacuums and/or wet cleaning techniques as appropriate. Careful attention must be paid to machinery behind grills or gratings where access may be difficult but contamination may be significant. Also, pay particular attention to wall, floor and ceiling penetration behind fixed items. After pre-cleaning, enclose fixed objects with 2 layers of 6-mil poly and seal securely in place with duct tape. Objects (e.g., permanent fixtures, shelves, electronic equipment, laboratory tables, sprinklers, alarm systems, closed circuit TV equipment and computer cables) which must remain in the regulated area and that require special ventilation or enclosure requirements should be designated here along with specified means of protection. Contact the manufacturer for special protection requirements.

### **3.1.6.3 PRE-CLEANING SURFACES IN THE REGULATED AREA**

Pre-cleaning of ACM contaminated items shall be performed after the enclosure has been erected and negative pressure has been established in the work area.

Pre-clean all surfaces in the regulated area using HEPA filtered vacuums and/or wet cleaning methods as appropriate. Do not use any methods that would raise dust such as dry sweeping or vacuuming with equipment not equipped with HEPA filters. Do not disturb asbestos-containing materials during this pre-cleaning phase.

### **3.1.7 PRE-ABATEMENT ACTIVITIES**

#### **3.1.7.1 PRE-ABATEMENT MEETING**

The VA representative, upon receipt, review, and substantial approval of all pre-abatement submittals and verification by the CPIH/CIH that all materials and equipment required for the project are on the site, will arrange for a pre-abatement meeting between the Contractor, the CPIH/CIH, Competent Person(s), the VA representative(s), and the VPIH/CIH. The purpose of the meeting is to discuss any aspect of the submittals needing clarification or amplification and to discuss any aspect of the project execution and the sequence of the operation. The Contractor shall be prepared to provide any supplemental information/documentation to the VA's representative regarding any submittals, documentation, materials or equipment. Upon satisfactory resolution of any outstanding issues, the VA's representative will issue a written order to proceed to the Contractor. No abatement work of any kind described in the following provisions shall be initiated prior to the VA written order to proceed.

#### **3.1.7.2 PRE-ABATEMENT INSPECTIONS AND PREPARATIONS**

Before any work begins on the construction of the regulated area, the Contractor will:

- A. Conduct a space-by-space inspection with an authorized VA representative and prepare a written inventory of all existing

damage in those spaces where asbestos abatement will occur. Still or video photography may be used to supplement the written damage inventory. Document will be signed and certified as accurate by both parties.

- B. The VA Representative, the Contractor, and the VPIH/CIH must be aware of AEQA 10-95 indicating the failure to identify asbestos in the areas listed as well as common issues when preparing specifications and contract documents. This is especially critical when demolition is planned, because AHERA surveys are non-destructive, and ACM may remain undetected. A NESHAPS (destructive) ACM inspection should be conducted on all building structures that will be demolished. Ensure the following areas are inspected on the project: Lay-in ceilings concealing ACM; ACM behind walls/windows from previous renovations; inside utility chases/walls; transite piping/ductwork/sheets; behind radiators; lab fume hoods; transite lab countertops; roofing materials; below window sills; water/sewer lines; electrical conduit coverings; crawl spaces( previous abatement contamination); flooring/mastic covered by carpeting/new flooring; exterior insulated wall panels; on underground fuel tanks; and steam line trench coverings.
- C. Ensure that all furniture, machinery, equipment, curtains, drapes, blinds, and other movable objects required to be removed from the regulated area have been cleaned and removed or properly protected from contamination.
- D. If present and required, remove and dispose of carpeting from floors in the regulated area.
- E. Inspect existing firestopping in the regulated area. Correct as needed.

### **3.1.7.3 PRE-ABATEMENT CONSTRUCTION AND OPERATIONS**

- A. Perform all preparatory work for the first regulated area in accordance with the approved work schedule and with this specification.
- B. Upon completion of all preparatory work, the CPIH/CIH will inspect the work and systems and will notify the VA's representative when the work is completed in accordance with this specification. The VA's representative may inspect the regulated area and the systems with the VPIH/CIH and may require that upon satisfactory inspection, the Contractor's employees perform all major aspects of the approved AHAP(s), especially worker protection, respiratory systems, contingency plans, decontamination procedures, and monitoring to demonstrate satisfactory operation.
- C. The CPIH/CIH shall document the pre-abatement activities described above and deliver a copy to the VA's representative.
- D. Upon satisfactory inspection of the installation of and operation of systems the VA's representative will notify the Contractor in writing to proceed with the asbestos abatement work in accordance with this specification.

### 3.2 REMOVAL OF PIPING ACM

#### 3.2.1 WETTING MATERIALS

- A. Use amended water for the wetting of ACM prior to removal. The Competent Person shall assure the wetting of ACM meets the definition of "adequately wet" in the EPA NESHAP's regulation and OSHA's "wet methods" for the duration of the project. A removal encapsulant may be used instead of amended water with written approval of the VA's representative.
- B. Amended Water: Provide water to which a surfactant has been added shall be used to wet the ACM and reduce the potential for fiber release during disturbance of ACM. The mixture must be equal to or greater than the wetting provided by water amended by a surfactant consisting one ounce of 50% polyoxyethylene ester and 50% polyoxyethylene ether mixed with 5 gallons (19L) of water.
- C. Removal Encapsulant: Provide a penetrating encapsulant designed specifically for the removal of ACM. The material must, when used, result in adequate wetting of the ACM and retard fiber release during disturbance equal to or greater than the amended water described above in B.

#### 3.2.2 SECONDARY BARRIER AND WALKWAYS

- A. Install as a drop cloth a 6 mil poly sheet at the beginning of each work shift where removal is to be done during that shift. Completely cover floors and any walls within 10 feet (3 meters) of the area where work is to be done. Secure the secondary barrier with duct tape to prevent it from moving or debris from getting behind it. Remove the secondary barrier at the end of the shift or as work in the area is completed. Keep residue on the secondary barrier wetted. When removing, fold inward to prevent spillage and place in a disposal bag.
- B. Install walkways using 6 mil black poly between the regulated area and the decontamination facilities (PDF and W/EDF) to protect the primary layers from contamination and damage. Install the walkways at the beginning of each shift and remove at the end of each shift.

#### 3.2.3 WET REMOVAL OF ACM

- A. Using acceptable glovebag procedures, adequately and thoroughly wet the ACM to be removed prior to removal with amended water or when authorized by VA, removal encapsulant to reduce/prevent fiber release to the air. Adequate time (at a minimum two hours) must be allowed for the amended water or removal encapsulant to saturate the ACM. Abatement personnel must not disturb dry ACM. Use a fine spray of amended water or removal encapsulant. Saturate the material sufficiently to wet to the substrate without causing excessive dripping. The material must be sprayed repeatedly/continuously during the removal process in order to maintain adequately wet conditions. Removal encapsulants must be applied in accordance with the manufacturer's written instructions. Perforate or carefully separate, using wet methods, an outer covering that is painted or jacketed in order to allow penetration and wetting of the material. Where necessary, carefully remove covering while wetting to minimize fiber release. **In no event shall dry removal occur**

**except when authorized in writing by the VPIH/CIH and VA when a greater safety hazard (e.g., electricity) is present**

### 3.3 GLOVEBAG REMOVAL PROCEDURES

#### 3.3.1 GENERAL

All applicable OSHA requirements and glovebag manufacturer's recommendations shall be met during glove bagging operations. In cases where live steam lines are present, the lines must be shut down prior to any work being performed on the system. **No abatement work shall be conducted on live, pressurized steam lines.** The Contractor may choose to use a High Temperature Glovebag in which a temperature rating ranges from 300°F to 700°F on steam lines that have recently been shut down and remain at high temperature for some time. In the case where a glovebag is not feasible, the Contractor will need to build a full negative pressure containment of sufficient size and follow all regulations as it pertains to removal.

1. Mix the surfactant with water in the garden sprayer, following the manufacturer's directions.
2. Have each employee put on a HEPA filtered respirator approved for asbestos and check the fit using the positive/negative fit check.
3. Have each employee put on a disposable full-body suit. Remember, the hood goes over the respirator straps.
4. Check closely the integrity of the glove bag to be used. Check all seams, gloves, sleeves, and glove openings. OSHA requires the bottom of the bag to be seamless.
5. Check the pipe where the work will be performed. If it is damaged (broken lagging, hanging, etc.), wrap the entire length of the pipe in poly sheeting and "candy stripe" it with duct tape.
6. Attach glovebag with required tools per manufacturer's instructions.
7. Using the smoke tube and aspirator bulb, test 10% of glovebags by placing the tube into the water porthole (two-inch opening to glove bag), and fill the bag with smoke and squeeze it. If leaks are found, they should be taped closed using duct tape and the bag should be retested with smoke.
8. Insert the wand from the water sprayer through the water porthole.
9. Insert the hose end from a HEPA vacuum into the upper portion of the glove bag.
10. Wet and remove the pipe insulation.
11. If the section of pipe is covered with an aluminum jacket, remove it first using the wire cutters to cut any bands and the tin snips to remove the aluminum. It is important to fold the sharp edges in to prevent cutting the bag when placing it in the bottom.
12. When the work is complete, spray the upper portion of the bag and clean-push all residue into the bottom of the bag with the other waste material. Be very thorough. Use adequate water.
13. Put all tools, after washing them off in the bag, in one of the sleeves of glove bag and turn it inside out, drawing it outside of the bag. Twist the sleeve tightly several times to seal it and tape

it several tight turns with duct tape. Cut through the middle of the duct tape and remove the sleeve. Put the sleeve in the next glove bag or put it in a bucket of water to decontaminate the tools after cutting the sleeve open.

14. Turn on the HEPA vacuum and collapse the bag completely. Remove the vacuum nozzle, seal the hole with duct tape, twist the bag tightly several times in the middle, and tape it to keep the material in the bottom during removal of the glove bag from the pipe.
15. Slip a disposal bag over the glove bag (still attached to the pipe). Remove the tape securing the ends, and slit open the top of the glove bag and carefully fold it down into the disposal bag. Double bag and gooseneck waste materials.

### **3.3.2 NEGATIVE PRESSURE GLOVEBAG PROCEDURE**

1. In addition to the above requirements, the HEPA vacuum shall be run continuously during the glovebag procedure until completion at which time the glovebag will be collapsed by the HEPA vacuum prior to removal from the pipe/component.
2. The HEPA vacuum shall be attached and operated as needed to prevent collapse of the glovebag during the removal process.

## **3.4 LOCKDOWN ENCAPSULATION**

### **3.4.1 GENERAL**

Lockdown encapsulation is an integral part of the ACM removal. At the conclusion of ACM removal and before removal of the primary barriers, all piping surfaces shall be encapsulated with a bridging encapsulant.

### **3.4.2 SEALING EXPOSED EDGES**

Seal edges of ACM exposed by removal work with two coats of encapsulant. Prior to sealing, permit the exposed edges to dry completely to permit penetration of the encapsulant.

## **3.5 DISPOSAL OF ACM WASTE MATERIALS**

### **3.5.1 GENERAL**

Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 100-185 regulations. Disposal shall be done at an approved landfill. Disposal of non-friable ACM shall be done in accordance with applicable regulations.

### **3.5.2 PROCEDURES**

- A. The VA must be notified at least 24 hours in advance of any waste removed from the containment
- B. Asbestos waste shall be packaged and moved through the W/EDF into a covered transport container in accordance with procedures in this

specification. Waste shall be double-bagged and wetted with amended water prior to disposal. Wetted waste can be very heavy. Bags shall not be overfilled. Bags shall be securely sealed to prevent accidental opening and/or leakage. The top shall be tightly twisted and goose necked prior to tightly sealing with at least three wraps of duct tape. Ensure that unauthorized persons do not have access to the waste material once it is outside the regulated area. All transport containers must be covered at all times when not in use. NESHAP's signs must be on containers during loading and unloading. Material shall not be transported in open vehicles. If drums are used for packaging, the drums shall be labeled properly and shall not be re-used.

- C. Waste Load Out: Waste load out shall be done in accordance with the procedures in W/EDF Decontamination Procedures. Sealed waste bags shall be decontaminated on exterior surfaces by wet cleaning and/or HEPA vacuuming before being placed in the second waste bag and sealed, which then must also be wet wiped or HEPA vacuumed.
- D. Asbestos waste with sharp edged components, i.e., nails, screws, lath, strapping, tin sheeting, jacketing, metal mesh, etc., which might tear poly bags shall be wrapped securely in burlap before packaging and, if needed, use a poly lined fiber drum as the second container, prior to disposal.

### **3.6 PROJECT DECONTAMINATION**

#### **3.6.1 GENERAL**

- A. The entire work related to project decontamination shall be performed under the close supervision and monitoring of the CPIH/CIH.
- B. If the asbestos abatement work is in an area which was contaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal and cleanings of the surfaces of the regulated area after the primary barrier removal.
- C. If the asbestos abatement work is in an area which was uncontaminated prior to the start of abatement, the decontamination will be done by cleaning the primary barrier poly prior to its removal, thus preventing contamination of the building when the regulated area critical barriers are removed.

#### **3.6.2 REGULATED AREA CLEARANCE**

Air testing and other requirements which must be met before release of the Contractor and re-occupancy of the regulated area space are specified in Final Testing Procedures.

#### **3.6.3 WORK DESCRIPTION**

Decontamination includes the clearance air testing in the regulated area and the decontamination and removal of the enclosures/facilities installed prior to the abatement work including primary/critical barriers, PDF and W/EDF facilities, and negative pressure systems.



**3.6.4 PRE-DECONTAMINATION CONDITIONS**

- A. Before decontamination starts, all ACM waste from the regulated area shall be removed, all waste collected and removed, and the secondary barrier of poly removed and disposed of along with any gross debris generated by the work.
- B. At the start of decontamination, the following shall be in place:
  - 1. Critical barriers over all openings consisting of two layers of 6 mil poly which is the sole barrier between the regulated area and the rest of the building or outside.
  - 2. Decontamination facilities, if required for personnel and equipment in operating condition.

**3.6.5 FIRST CLEANING**

Carry out a first cleaning of all surfaces of the regulated area including items of remaining poly sheeting, tools, scaffolding, ladders/staging by wet methods and/or HEPA vacuuming. Do not use dry dusting/sweeping/air blowing methods. Use each surface of a wetted cleaning cloth one time only and then dispose of as contaminated waste. Continue this cleaning until there is no visible residue from abated surfaces or poly or other surfaces. Remove all filters in the air handling system and dispose of as ACM waste in accordance with these specifications. The negative pressure system shall remain in operation during this time. Additional cleaning(s) may be needed as determined by the CPIH/VPIH/CIH.

**3.6.6 PRE-CLEARANCE INSPECTION AND TESTING**

The CPIH/CIH and VPIH/CIH will perform a thorough and detailed visual inspection at the end of the cleaning to determine whether there is any visible residue in the regulated area. If the visual inspection is acceptable, the CPIH/CIH will perform pre-clearance sampling using aggressive clearance as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). If the sampling results show values below 0.01 f/cc, then the Contractor shall notify the VA's representative of the results with a brief report from the CPIH/CIH documenting the inspection and sampling results and a statement verifying that the regulated area is ready for lockdown encapsulation. The VA reserves the right to utilize their own VPIH/CIH to perform a pre-clearance inspection and testing for verification.

**3.6.7 LOCKDOWN ENCAPSULATION OF ABATED SURFACES**

With the express written permission of the VA's representative, perform lockdown encapsulation of all surfaces from which asbestos was abated in accordance with the procedures in this specification.

### **3.7 FINAL VISUAL INSPECTIONS AND AIR CLEARANCE TESTING**

#### **3.7.1 GENERAL**

Notify the VA representative 24 hours in advance for the performance of the final visual inspection and testing. The final visual inspection and testing will be performed by the VPIH/CIH after the final cleaning.

#### **3.7.2 FINAL VISUAL INSPECTION**

Final visual inspection will include the entire regulated area, the PDF, all poly sheeting, seals over HVAC openings, doorways, windows, and any other openings. If any debris, residue, dust or any other suspect material is detected, the final cleaning shall be repeated at no cost to the VA. Dust/material samples may be collected and analyzed at no cost to the VA at the discretion of the VPIH/CIH to confirm visual findings. When the regulated area is visually clean the final testing can be done.

#### **3.7.3 FINAL AIR CLEARANCE TESTING**

- A. After an acceptable final visual inspection by the VPIH/CIH and VA Representative, the VPIH/CIH will perform the final clearance testing. Air samples will be collected and analyzed in accordance with procedures for AHERA in this specification. If work is less than 260 lf/160 sf/35 cf, 5 PCM samples shall be collected for clearance and a minimum of one field blank. If work is equal to or more than 260 lf/160 sf/35 cf, AHERA TEM sampling shall be performed for clearance. TEM analysis shall be done in accordance with procedures for EPA AHERA in this specification. If the release criteria are not met, the Contractor shall repeat the final cleaning and continue decontamination procedures until clearance is achieved. All additional inspection and testing costs will be borne by the Contractor.
- B. If release criteria are met, proceed to perform the abatement closeout and to issue the certificate of completion in accordance with these specifications.

#### **3.7.4 FINAL AIR CLEARANCE PROCEDURES**

- A. Contractor's Release Criteria: Work in a regulated area is complete when the regulated area is visually clean and airborne fiber levels have been reduced to or below 0.01 f/cc as measured by the AHERA PCM protocol, or 70 AHERA structures per square millimeter (s/mm<sup>2</sup>) by AHERA TEM.
- B. Air Monitoring and Final Clearance Sampling: To determine if the elevated airborne fiber counts encountered during abatement operations have been reduced to the specified level, the VPIH/CIH will secure samples and analyze them according to the following procedures:
  1. Fibers Counted: "Fibers" referred to in this section shall be either all fibers regardless of composition as counted in the NIOSH 7400 PCM method or asbestos fibers counted using the AHERA TEM method.
  2. Aggressive Sampling: All final air testing samples shall be collected using aggressive sampling techniques except where soil is not encapsulated or enclosed. Samples will be collected on 0.8μ MCE

filters for PCM analysis and 0.45 $\mu$  Polycarbonate filters for TEM. A minimum of 1200 Liters of using calibrated pumps shall be collected for clearance samples. Before pumps are started, initiate aggressive air mixing sampling as detailed in 40 CFR 763 Subpart E (AHERA) Appendix A (III)(B)(7)(d). Air samples will be collected in areas subject to normal air circulation away from corners, obstructed locations, and locations near windows, doors, or vents. After air sampling pumps have been shut off, circulating fans shall be shut off. The negative pressure system shall continue to operate.

#### **3.7.5 CLEARANCE SAMPLING USING PCM**

- A. The VPIH/CIH will perform clearance samples as indicated by the specification.
- B. The NIOSH 7400 PCM method will be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 5 PCM clearance samples shall be collected. All samples must be equal to or less than 0.01 f/cc to clear the regulated area.

#### **3.7.6 CLEARANCE SAMPLING USING TEM**

- A. Clearance requires 13 samples be collected; 5 inside the regulated area; 5 outside the regulated area; and 3 field blanks.
- B. The TEM method will be used for clearance sampling with a minimum collection volume of 1200 Liters of air. A minimum of 13 clearance samples shall be collected. All samples must be equal to or less than 70 AHERA structures per square millimeter (s/mm<sup>2</sup>) AHERA TEM.

#### **3.7.7 LABORATORY TESTING OF PCM SAMPLES**

The services of an AIHA accredited laboratory will be employed by the VA to perform analysis for the PCM air samples. The accredited laboratory shall be successfully participating in the AIHA Proficiency Analytical Testing (PAT) program. Samples will be sent daily by the VPIH/CIH so that verbal/faxed reports can be received within 24 hours. A complete record, certified by the laboratory, of all air monitoring tests and results will be furnished to the VA's representative and the Contractor.

#### **3.7.8 LABORATORY TESTING OF TEM SAMPLES**

Samples shall be sent by the VPIH/CIH to a NIST accredited laboratory for analysis by TEM. The laboratory shall be successfully participating in the NIST Airborne Asbestos Analysis (TEM) program. Verbal/faxed results from the laboratory shall be available within 24 hours after receipt of the samples. A complete record, certified by the laboratory, of all TEM results shall be furnished to the VA's representative and the Contractor.

### **3.8 ABATEMENT CLOSEOUT AND CERTIFICATE OF COMPLIANCE**

#### **3.8.1 COMPLETION OF ABATEMENT WORK**

After thorough decontamination, seal negative air machines with 2 layers of 6 mil poly and duct tape to form a tight seal at the intake/outlet ends before removal from the regulated area. Complete asbestos abatement work upon meeting the regulated area visual and air clearance criteria and fulfilling the following:

- A. Remove all equipment, materials, and debris from the project area.
- B. Package and dispose of all asbestos waste as required. Dispose of waste ACM and debris which is packaged in accordance with these specifications, OSHA, EPA and DOT. The landfill requirements for packaging must also be met. Transport will be in compliance with 49 CFR 100-185 regulations.
- C. Repair or replace all interior finishes damaged during the abatement work.
- D. The VA will be notified of any waste removed from the containment prior to 24 hours.
- E. Fulfill other project closeout requirements as specified elsewhere in this specification.

#### **3.8.2 CERTIFICATE OF COMPLETION BY CONTRACTOR**

The CPIH/CIH shall complete and sign the "Certificate of Completion" in accordance with Attachment 1 at the completion of the abatement and decontamination of the regulated area.

#### **3.8.3 WORK SHIFTS**

All work shall be done during administrative hours (8:00 AM to 4:30 PM) Monday - Friday excluding Federal Holidays. Any change in the work schedule must be approved in writing by the VA Representative.

#### **3.8.4 RE-INSULATION**

If required as part of the contract, replace all asbestos containing insulation with suitable non-asbestos material. Provide MSDS for all replacement materials. Refer to Section 23 07 11, HVAC, PLUMBING, AND BOILER PLANT INSULATION.

**ATTACHMENT #1****CERTIFICATE OF COMPLETION**

DATE: \_\_\_\_\_ VA Project #: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_ Abatement Contractor: \_\_\_\_\_

VAMC/ADDRESS: \_\_\_\_\_

1. I certify that I have personally inspected, monitored and supervised the abatement work of (specify regulated area or Building):  
which took place from        /        /        to        /        /
2. That throughout the work all applicable requirements/regulations and the VA's specifications were met.
3. That any person who entered the regulated area was protected with the appropriate personal protective equipment and respirator and that they followed the proper entry and exit procedures and the proper operating procedures for the duration of the work.
4. That all employees of the Abatement Contractor engaged in this work were trained in respiratory protection, were experienced with abatement work, had proper medical surveillance documentation, were fit-tested for their respirator, and were not exposed at any time during the work to asbestos without the benefit of appropriate respiratory protection.
5. That I performed and supervised all inspection and testing specified and required by applicable regulations and VA specifications.
6. That the conditions inside the regulated area were always maintained in a safe and healthy condition and the maximum fiber count never exceeded 0.5 f/cc, except as described below.
7. That all glovebag work was done in accordance with OSHA requirements and the manufacturer's recommendations.

CPIH/CIH Signature/Date: \_\_\_\_\_

CPIH/CIH Print Name: \_\_\_\_\_

Abatement Contractor Signature/Date: \_\_\_\_\_

Abatement Contractor Print Name: \_\_\_\_\_

**ATTACHMENT #2****CERTIFICATE OF WORKER'S ACKNOWLEDGMENT**

PROJECT NAME: \_\_\_\_\_ DATE: \_\_\_\_\_

PROJECT ADDRESS: \_\_\_\_\_

ABATEMENT CONTRACTOR'S NAME: \_\_\_\_\_

**WORKING WITH ASBESTOS CAN BE HAZARDOUS TO YOUR HEALTH. INHALING ASBESTOS HAS BEEN LINKED WITH VARIOUS TYPES OF CANCERS. IF YOU SMOKE AND INHALE ASBESTOS FIBERS, YOUR CHANCES OF DEVELOPING LUNG CANCER IS GREATER THAN THAT OF THE NON-SMOKING PUBLIC.**

Your employer's contract with the owner for the above project requires that: You must be supplied with the proper personal protective equipment including an adequate respirator and be trained in its use. You must be trained in safe and healthy work practices and in the use of the equipment found at an asbestos abatement project. You must receive/have a current medical examination for working with asbestos. These things shall be provided at no cost to you. By signing this certificate you are indicating to the owner that your employer has met these obligations.

RESPIRATORY PROTECTION: I have been trained in the proper use of respirators and have been informed of the type of respirator to be used on the above indicated project. I have a copy of the written Respiratory Protection Program issued by my employer. I have been provided for my exclusive use, at no cost, with a respirator to be used on the above indicated project.

TRAINING COURSE: I have been trained by a third party, State/EPA accredited trainer in the requirements for an AHERA/OSHA Asbestos Abatement Worker training course, 32 hours minimum duration. I currently have a valid State accreditation certificate. The topics covered in the course include, as a minimum, the following:

- Physical Characteristics and Background Information on Asbestos
- Potential Health Effects Related to Exposure to Asbestos
- Employee Personal Protective Equipment
- Establishment of a Respiratory Protection Program
- State of the Art Work Practices
- Personal Hygiene
- Additional Safety Hazards
- Medical Monitoring
- Air Monitoring
- Relevant Federal, State and Local Regulatory Requirements, Procedures, and Standards
- Asbestos Waste Disposal

MEDICAL EXAMINATION: I have had a medical examination within the past 12 months which was paid for by my employer. This examination included: health history, occupational history, pulmonary function test, and may have included a chest x-ray evaluation. The physician issued a positive written opinion after the examination.

Signature:\_\_\_\_\_

Printed Name:\_\_\_\_\_

Social Security Number:\_\_\_\_\_

Witness:\_\_\_\_\_

**ATTACHMENT #3****AFFIDAVIT OF MEDICAL SURVEILLANCE, RESPIRATORY PROTECTION AND TRAINING/ACCREDITATION**

VA PROJECT NAME AND NUMBER: \_\_\_\_\_

VA MEDICAL FACILITY: \_\_\_\_\_

ABATEMENT CONTRACTOR'S NAME AND ADDRESS: \_\_\_\_\_

1. I verify that the following individual

Name: \_\_\_\_\_ Social Security Number: \_\_\_\_\_

who is proposed to be employed in asbestos abatement work associated with the above project by the named Abatement Contractor, is included in a medical surveillance program in accordance with 29 CFR 1926.1101(m), and that complete records of the medical surveillance program as required by 29 CFR 1926.1101(m) (n) and 29 CFR 1910.20 are kept at the offices of the Abatement Contractor at the following address.

Address: \_\_\_\_\_

2. I verify that this individual has been trained, fit-tested and instructed in the use of all appropriate respiratory protection systems and that the person is capable of working in safe and healthy manner as expected and required in the expected work environment of this project.

3. I verify that this individual has been trained as required by 29 CFR 1926.1101(k). This individual has also obtained a valid State accreditation certificate. Documentation will be kept on-site.

4. I verify that I meet the minimum qualifications criteria of the VA specifications for a CPIH.

Signature of CPIH/CIH: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name of CPIH/CIH: \_\_\_\_\_

Signature of Contractor: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name of Contractor: \_\_\_\_\_



**ATTACHMENT #4****ABATEMENT CONTRACTOR/COMPETENT PERSON(S) REVIEW AND ACCEPTANCE OF THE VA'S ASBESTOS SPECIFICATIONS**

VA Project Location:\_\_\_\_\_

VA Project #:\_\_\_\_\_

VA Project Description:\_\_\_\_\_

This form shall be signed by the Asbestos Abatement Contractor Owner and the Asbestos Abatement Contractor's Competent Person(s) prior to any start of work at the VA related to this Specification. If the Asbestos Abatement Contractor's/Competent Person(s) has not signed this form, they shall not be allowed to work on-site.

I, the undersigned, have read VA's Asbestos Specification regarding the asbestos abatement requirements. I understand the requirements of the VA's Asbestos Specification and agree to follow these requirements as well as all required rules and regulations of OSHA/EPA/DOT and State/Local requirements. I have been given ample opportunity to read the VA's Asbestos Specification and have been given an opportunity to ask any questions regarding the content and have received a response related to those questions. I do not have any further questions regarding the content, intent and requirements of the VA's Asbestos Specification.

At the conclusion of the asbestos abatement, I will certify that all asbestos abatement work was done in accordance with the VA's Asbestos Specification and all ACM was removed properly and no fibrous residue remains on any abated surfaces.

Abatement Contractor Owner's Signature\_\_\_\_\_Date\_\_\_\_\_

Abatement Contractor Competent Person(s)\_\_\_\_\_Date\_\_\_\_\_

- - END- - - -

**SECTION 08 11 13**  
**HOLLOW METAL DOORS AND FRAMES**

**PART 1 - GENERAL**

**1.1 SUMMARY**

- A. Section Includes:
1. Hollow metal doors hung in hollow metal frames at exterior locations.
  2. Hollow metal door frames for wood doors at interior locations.
  3. Glazed openings in hollow metal doors.

**1.2 RELATED REQUIREMENTS**

- A. Aluminum frames entrance work: Section 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS.
- B. Door Hardware: Section 08 71 00, DOOR HARDWARE.

**1.3 APPLICABLE PUBLICATIONS**

- A. Comply with references to extent specified in this section.
- B. American National Standard Institute (ANSI):
1. A250.8-2014 - Standard Steel Doors and Frames.
- C. ASTM International (ASTM):
1. A240/A240M-15b - Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications.
  2. A653/A653M-15 - Steel Sheet, Zinc-Coated (Galvanized) or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip.
  3. A1008/A1008M-15 - Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy and High Strength Low Alloy with Improved Formability, Solution Hardened, and Bake Hardenable.
  4. B209-14 - Aluminum and Aluminum-Alloy Sheet and Plate.
  5. B209M-14 - Aluminum and Aluminum-Alloy Sheet and Plate (Metric).
  6. B221-14 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
  7. B221M-13 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric).
  8. D3656/D3656M-13 - Insect Screening and Louver Cloth Woven from Vinyl Coated Glass Yarns.
  9. E90-09 - Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Elements.
- D. Federal Specifications (Fed. Spec.):
1. L-S-125B - Screening, Insect, Nonmetallic.
- E. Master Painters Institute (MPI):

- 1.No. 18 - Primer, Zinc Rich, Organic.
- F. National Association of Architectural Metal Manufacturers (NAAMM):
  - 1.AMP 500-06 - Metal Finishes Manual.
- G. National Fire Protection Association (NFPA):
  - 1.80-16 - Fire Doors and Other Opening Protectives.
- H. UL LLC (UL):
  - 1.10C-09 - Positive Pressure Fire Tests of Door Assemblies.
  - 2.1784-15 - Air Leakage Tests of Door Assemblies and Other Opening Protectives.

#### **1.4 SUBMITTALS**

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
  - 1.Show size, configuration, and fabrication and installation details.
- C. Manufacturer's Literature and Data:
  - 1.Description of each product.
  - 2.Include schedule showing each door and frame requirements, fire label, and smoke control label for openings.
  - 3.Installation instructions.
- D. Sustainable Construction Submittals:
  - 1.Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
- E. Qualifications: Substantiate qualifications comply with specifications.
  - 1.Manufacturer with project experience list.

#### **1.5 QUALITY ASSURANCE**

- A. Manufacturer Qualifications:
  - 1.Regularly manufactures specified products.
  - 2.Manufactured specified products with satisfactory service on five similar installations for minimum five years.
    - a. Project Experience List: Provide contact names and addresses for completed projects.

#### **1.6 DELIVERY**

- A. Fasten temporary steel spreaders across the bottom of each door frame before shipment.
- B. Deliver products in manufacturer's original sealed packaging.
- C. Mark packaging, legibly. Indicate manufacturer's name or brand, type, production run number, and manufacture date.

- D. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

#### **1.7 STORAGE AND HANDLING**

- A. Store products indoors in dry, weathertight, conditioned facility.
- B. Protect products from damage during handling and construction operations.

#### **1.8 WARRANTY**

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

### **PART 2 - PRODUCTS**

#### **2.1 SYSTEM PERFORMANCE**

NOT USED.

#### **2.2 MATERIALS**

- A. Stainless Steel: ASTM A240/A240M; Type 304 and Type 316.
- B. Sheet Steel: ASTM A1008/A1008M, cold-rolled.
- C. Galvanized Sheet Steel: ASTM A653.
- D. Aluminum Sheet: ASTM B209M (ASTM B209).
- E. Aluminum Extrusions: ASTM B221M (ASTM B221).

#### **2.3 PRODUCTS - GENERAL**

- A. Provide hollow metal doors and frames from one manufacturer.
- B. Sustainable Construction Requirements:
  - 1. Steel Recycled Content: 30 percent total recycled content, minimum.
  - 2. Stainless Steel Recycled Content: 70 percent total recycled content, minimum.
  - 3. Aluminum Recycled Content: 50 percent total recycled content, minimum.

#### **2.4 HOLLOW METAL DOORS**

- A. Hollow Metal Doors: ANSI A250.8; 44 mm (1-3/4 inches) thick.
  - 1. Exterior Doors: Level 3 and Physical Performance Level A, extra-heavy duty; Model 2, seamless.
- B. Door Faces:
  - 1. Exterior Doors: Stainless steel minimum ZF180 (A60) coating.
- C. Door Cores:
  - 1. Exterior Doors: Polystyrene or polyurethane.

#### **2.5 HOLLOW METAL FRAMES**

- A. Hollow Metal Frames: ANSI A250.8; face welded.

1. Interior Frames:

- a. Level 1 Hollow Metal Doors: 1.0 mm (0.042 inch) thick.
- b. Level 2 and Level 3 Hollow Metal Doors: 1.3 mm (0.053 inch) thick.
- c. Wood Doors: 1.0 mm (0.042 inch) thick.

B. Frame Materials:

- 1. Interior Frames: Galvanized sheet steel minimum ZF120 (A40) coating.
- 2. Exterior Frames: Stainless steel ZF180 (A60) coating.

## 2.6 FABRICATION

A. Hardware Preparation: ANSI A250.8; for hardware specified in Section 08 71 00, DOOR HARDWARE.

B. Hollow Metal Door Fabrication:

- 1. Close top edge of exterior doors flush and seal to prevent water intrusion.
- 2. Fill spaces between vertical steel stiffeners with insulation.

C. Custom Metal Hollow Doors:

- 1. Provide custom hollow metal doors where nonstandard steel doors are shown on drawings.
  - a. Provide door sizes, design, materials, construction, gages, and finish as specified for standard steel doors.

D. Hollow Metal Frame Fabrication:

- 1. Fasten mortar guards to back of hardware reinforcements, except on lead-lined frames.
- 2. Borrowed Light and Panel Opening Frames:
  - a. Provide integral stop on exterior, corridor, or secure side of door.
  - b. Design rabbet width and depth to receive glazing material or panel.

3. Frame Anchors:

- a. Floor anchors:
  - 1) Provide extension type floor anchors to compensate for depth of floor fills.
  - 2) Provide 1.3 mm (0.053 inch) thick steel clip angles welded to jamb and drilled to receive floor fasteners.
  - 3) Provide 50 mm by 50 mm by 9 mm (2 inch by 2 inch by 3/8 inch) clip angle for lead lined frames, drilled for floor fasteners.
  - 4) Provide mullion 2.3 mm (0.093 inch) thick steel channel anchors, drilled for two floor fasteners and frame anchor screws.

- 5) Provide continuous 1 mm (0.042 inch) thick steel rough bucks drilled for floor fasteners and frame anchor screws for sill sections.
  - a) Space floor bolts 50 mm (2 inches) on center.
- b. Jamb anchors:
  - 1) Place anchors on jambs:
    - a) Near top and bottom of each frame.
    - b) At intermediate points at maximum 600 mm (24 inches) spacing.
  - 2) Form jamb anchors from steel minimum 1 mm (0.042 inch) thick.
  - 3) Anchors set in masonry: Provide adjustable anchors designed for friction fit against frame and extended into masonry minimum 250 mm (10 inches). Provide one of following types:
    - a) Wire Loop Type: 5 mm (3/16 inch) diameter wire.
    - b) T-Shape type.
    - c) Strap and stirrup type: Corrugated or perforated sheet steel.
  - 4) Anchors for stud partitions: Provide tabs for securing anchor to sides of studs. Provide one of the following:
    - a) Welded type.
    - b) Lock-in snap-in type.
  - 5) Anchors for frames set in prepared openings:
    - a) Steel pipe spacers 6 mm (1/4 inch) inside diameter, welded to plate reinforcing at jamb stops, or hat shaped formed strap spacers 50 mm (2 inches) wide, welded to jamb near stop.
    - b) Drill jamb stop and strap spacers for 6 mm (1/4 inch) flat head bolts to pass through frame and spacers.
    - c) Two piece frames: Subframe or rough buck drilled for 6 mm (1/4 inch) bolts.
  - 6) Anchors for observation windows and other continuous frames set in stud partitions.
    - a) Weld clip anchors to sills and heads of continuous frames over 1200 mm (4 feet) long.
    - b) Space maximum 600 mm (24 inches) on centers.
  - 7) Modify frame anchors to fit special frame and wall construction.
  - 8) Provide special anchors where shown on drawings and where required to suit application.

**2.7 FINISHES**

- A. Steel and Galvanized Steel: ANSI A250.8; shop primed.
- B. Stainless Steel: NAAMM AMP 500; No. 4 polished finish.
  - 1. Blend welds to match adjacent finish.
- C. Finish exposed surfaces after fabrication.
- D. Aluminum Anodized Finish: NAAMM AMP 500.
  - 1. Color Anodized Finish: AA-C22A42 or AA-C22A44; Class I Architectural, 0.018 mm (0.7 mil) thick.

**2.8 ACCESSORIES**

- A. Primers: ANSI A250.8.
- B. Barrier Coating: ASTM D1187/D1187M.
- C. Welding Materials: AWS D1.1/D1.1M, type to suit application.
- D. Clips Connecting Members and Sleeves: Match door faces.
- E. Fasteners: Stainless steel
  - 1. Metal Framing: Steel drill screws.
  - 2. Masonry and Concrete: Expansion bolts and power actuated drive pins.
- F. Anchors: Stainless steel
- G. Galvanizing Repair Paint: MPI No. 18.
- H. Insulation: Unfaced mineral wool.

**PART 3 - EXECUTION****3.1 PREPARATION**

- A. Examine and verify substrate suitability for product installation.
- B. Protect existing construction and completed work from damage.
- C. Apply barrier coating to metal surfaces in contact with cementitious materials to minimum 0.7 mm (30 mils) dry film thickness.

**3.2 INSTALLATION - GENERAL**

- A. Install products according to manufacturer's instructions and approved submittal drawings.
  - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
  - 2. Install fire doors and frames according to NFPA 80.
  - 3. Install smoke control doors and frames according to NFPA 105.

**3.3 FRAME INSTALLATION**

- A. Apply barrier coating to concealed surfaces of frames built into masonry.
- B. Plumb, align, and brace frames until permanent anchors are set.

1. Use triangular bracing near each corner on both sides of frames with temporary wood spreaders at midpoint.
2. Use wood spreaders at bottom of frame when shipping spreader is removed.
3. Where construction permits concealment, leave shipping spreaders in place after installation, otherwise remove spreaders when frames are set and anchored.
4. Remove wood spreaders and braces when walls are built and jamb anchors are secured.

C. Floor Anchors:

1. Anchor frame jambs to floor with two expansion bolts.
  - a. Lead Lined Frames: Use 9 mm (3/8 inch) diameter bolts.
  - b. Other Frames: Use 6 mm (1/4 inch) diameter bolts.
2. Power actuated drive pins are acceptable to secure frame anchors to concrete floors.

D. Jamb Anchors:

1. Masonry Walls:
  - a. Embed anchors in mortar.
  - b. Fill space between frame and masonry with grout or mortar as walls are built.
2. Metal Framed Walls: Secure anchors to sides of studs with two fasteners through anchor tabs.
3. Prepared Masonry and Concrete Openings:
  - a. Direct Securement: 6 mm (1/4 inch) diameter expansion bolts through spacers.
  - b. Subframe or Rough Buck Securement:
    - 1) 6 mm (1/4 inch) diameter expansion bolts on 600 mm (24 inch) centers.
    - 2) Power activated drive pins on 600 mm (24 inches) centers.
  - c. Secure two-piece frames to subframe or rough buck with machine screws on both faces.

E. Touch up damaged factory finishes.

1. Repair galvanized surfaces with galvanized repair paint.
2. Repair painted surfaces with touch up primer.

### 3.4 DOOR INSTALLATION

- A. Install doors plumb and level.
- B. Adjust doors for smooth operation.
- C. Touch up damaged factory finishes.



1. Repair galvanized surfaces with galvanized repair paint.
2. Repair painted surfaces with touch up primer.

**3.5 CLEANING**

- A. Clean exposed door and frame surfaces. Remove contaminants and stains.

**3.6 PROTECTION**

- A. Protect doors and frames from traffic and construction operations.
- B. Remove protective materials immediately before acceptance.
- C. Repair damage.

- - - E N D - - -

**SECTION 08 14 00**  
**INTERIOR WOOD DOORS**

**PART 1 - GENERAL**

**1.1 SUMMARY**

- A. This section specifies interior flush doors requirements.

**1.2 RELATED REQUIREMENTS**

- A. Door Hardware including hardware location (height): Section 08 71 00, DOOR HARDWARE.
- B. Installation of Doors and Hardware: Section 08 11 13, HOLLOW METAL DOORS AND FRAMES and Section 08 71 00, DOOR HARDWARE.

**1.3 APPLICABLE PUBLICATIONS**

- A. Comply with references to extent specified in this section.
- B. American National Standards Institute/Window and Door Manufacturers Association (ANSI/WDMA):
  - 1. I.S. 1A-13 - Architectural Wood Flush Doors.
  - 2. I.S. 6A-13 - Interior Architectural Stile and Rails Doors.
- C. ASTM International (ASTM):
  - 1. E90-09 - Laboratory Measurements of Airborne Sound Transmission Loss of Building Partitions and Elements.
- D. National Fire Protection Association (NFPA):
  - 1. 80-16 - Fire Doors and Other Opening Protectives.
  - 2. 252-12 - Fire Tests of Door Assemblies.
- E. UL LLC (UL):
  - 1. 10C-09 - Positive Pressure Fire Tests of Door Assemblies.
- F. Window and Door Manufacturers Association (WDMA):
  - 1. TM 7-14 - Cycle-Slam Test.
  - 2. TM 8-14 - Hinge Loading Test.
  - 3. TM 10-14 - Screw Holding Capacity.

**1.4 SUBMITTALS**

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
  - 1. Show size, configuration, and fabrication and installation details.
  - 2. Include details of glazing.
  - 3. Indicate project specific requirements not included in Manufacturer's Literature and Data submittal.
- C. Manufacturer's Literature and Data:
  - 1. Description of each product.
  - 2. Fire rated doors showing conformance with NFPA 80.

- D. Sustainable Construction Submittals:
  - 1. Low Pollutant-Emitting Materials:
    - a. Show volatile organic compound types and quantities.
- E. Test Reports: Indicate each product complies with specifications.
  - 1. Screw Holding Capacity Test.
  - 2. Cycle-Slam Test.
  - 3. Hinge-Loading Test.
- F. Operation and Maintenance Data:
  - 1. Care instructions for each exposed finish product.

### **1.5 QUALITY ASSURANCE**

- A. Manufacturer Qualifications:
  - 1. Regularly and presently manufactures specified products.
  - 2. Manufactures specified products with satisfactory service on five similar installations for minimum five years.

### **1.6 DELIVERY**

- A. Deliver products in manufacturer's original sealed packaging.
  - 1. Minimum 0.15 mm (6 mil) polyethylene bags or cardboard packaging to remain unbroken during delivery and storage.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, and manufacture date.
  - 1. Identify door opening corresponding to Door Schedule.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.

### **1.7 STORAGE AND HANDLING**

- A. Store products indoors in dry, weathertight conditioned facility.
  - 1. Store doors according to ANSI/WDMA I.S. 1A.
- B. Protect products from damage during handling and construction operations.

### **1.8 FIELD CONDITIONS**

- A. Environment:
  - 1. Product Temperature: Minimum 21 degrees C (70 degrees F) for minimum 48 hours before installation.
  - 2. Work Area Ambient Temperature Range: 21 to 27 degrees C (70 to 80 degrees F) continuously, beginning 48 hours before installation.
  - 3. Install products when building is permanently enclosed and when wet construction is completed, dried, and cured.
    - a. Comply with door manufacturer's instructions for relative humidity.

### **1.9 WARRANTY**

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

- B. Manufacturer's Warranty: Warrant interior factory finished wood doors against material and manufacturing defects.

- 1. Warranty Period: Lifetime of original installation.

## **PART 2 - PRODUCTS**

### **2.1 PRODUCTS - GENERAL**

- A. Provide each product from one manufacturer.
- B. Sustainable Construction Requirements:
  - 1. Low Pollutant-Emitting Materials: Comply with low VOC limits:
    - a. Paints and coatings.
    - b. Composite wood and agrifiber.

### **2.2 FLUSH WOOD DOORS**

- A. General:
  - 1. ANSI/WDMA I.S. 1A, Extra Heavy Duty.
  - 2. Adhesive: Type II.
  - 3. Core: Structural composite lumber, except when mineral core is required for fire rating.
  - 4. Thickness: 44 mm (1-3/4 inches) unless otherwise shown or specified.
- B. Faces:
  - 1. ANSI/WDMA I.S. 1A.
  - 2. One species throughout project unless scheduled or otherwise shown.
  - 3. Transparent Finished Faces: Premium Grade. rotary cut.
    - a. AA Grade face veneer.
    - b. Match face veneers for doors for uniform effect of color and grain at joints.
    - c. Door Edges: Same species as door face veneer, except maple is acceptable for stile face veneer on birch doors.
    - d. In existing buildings, where doors are required to have transparent finish, use wood species, grade, and assembly of face veneers to match adjacent existing doors.
  - 4. Painted Finishes: Custom Grade, mill option close grained hardwood, premium or medium density overlay.
  - 5. Factory sand doors for finishing.
- C. Wood For Stops, Louvers, Muntins and Moldings For Flush Doors Required to Have Transparent Finish:
  - 1. Solid wood of same species as face veneer, except maple is acceptable on birch doors.
  - 2. Glazing:
    - a. On non-fire-rated doors, use applied wood stops nailed tightly on room side and attached on opposite side with flathead, countersunk wood screws, spaced approximately 125 mm (5 inches) on center.

**2.3 FABRICATION**

- A. Factory machine interior wood doors to receive hardware, bevels, undercuts, cutouts, accessories and fitting for frame.
  - 1. Factory fit fire rated doors according to NFPA 80.
- B. Rout doors for hardware using templates and location heights specified in Section 08 71 00, DOOR HARDWARE.
- C. Factory fit doors to frame, bevel lock edge of doors 3 mm (1/8 inch) for each 50 mm (2 inches) of door thickness.
- D. Clearances between Doors and Frames and Floors:
  - 1. Door Jambs, Heads, and Meeting Stiles: Maximum 3 mm (1/8 inch).
- E. Provide cutouts for glazed openings.
- F. Finish surfaces, including both faces, top and bottom and edges of the doors smooth to touch.
- G. Identify each door on top edge.
  - 1. Mark with stamp, brand or other indelible mark, giving manufacturer's name, door's trade name, construction of door, date of manufacture and quality.
  - 2. Mark door or provide separate certification including name of inspection organization.
  - 3. Identify door manufacturing standard, including glue type.
  - 4. Identify veneer and quality certification.

**2.4 FINISHES**

- A. Field Finished Doors: Seal top and bottom edges of doors with two coats of catalyzed polyurethane or water resistant sealer.
- B. Factory Transparent Finish:
  - 1. Factory finish flush wood doors.
    - a. ANSI/WDMA I.S. 1A Section F-3 Finish System Descriptions for System 5, Conversion Varnish or System 7, Catalyzed Vinyl.

**PART 3 - EXECUTION****3.1 PREPARATION**

- A. Examine and verify substrate suitability for product installation.
  - 1. Verify door frames are properly anchored.
  - 2. Verify door frames are plumb, square, in plane, and within tolerances for door installation.
- B. Protect existing construction and completed work from damage.

**3.2 INSTALLATION**

- A. Install products according to manufacturer's instructions.
  - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.

### 3.3 PROTECTION

- A. After installation, place shipping container over door and tape in place.
  - 1. Do not apply tape to door faces and edges.
- B. Provide protective covering over exposed hardware in addition to covering door.
- C. Maintain covering in good condition until removal is directed by Contracting Officer's Representative.

- - E N D - -

**SECTION 08 41 13****ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS****PART 1 - GENERAL****1.1 SUMMARY****A. Section Includes:**

1. Aluminum-framed entrances.

**1.2 RELATED REQUIREMENTS****A. Hardware:** Section 08 71 00, DOOR HARDWARE.**B. Automatic Door Actuators:** Section 08 71 13, AUTOMATIC DOOR OPERATORS.**1.3 APPLICABLE PUBLICATIONS****A. Comply with references to extent specified in this section.****B. American Architectural Manufacturers Associations (AAMA):**

1. 2603-15 - Performance Requirements and Test Procedures for Pigmented Organic Coatings on Aluminum Extrusions and Panels.
2. 2604-13 - Performance Requirements and Test Procedures for High Performance Organic Coatings on Architectural Extrusions and Panels.
3. 2605-13 - Performance Requirements and Test Procedures for Superior Performing Organic Coatings on Aluminum Extrusions and Panels.

**C. American Welding Society (AWS):**

1. D1.2/D1.2M-14 - Structural Welding Code - Aluminum.

**D. ASTM International (ASTM):**

1. A240/A240M-15b - Chromium and Chromium-Nickel Stainless Steel Plate, Sheet, and Strip for Pressure Vessels and for General Applications.
2. B209-14 - Aluminum and Aluminum-Alloy Sheet and Plate.
3. B209M-14 - Aluminum and Aluminum-Alloy Sheet and Plate (Metric).
4. B221-14 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes.
5. B221M 13 - Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes (Metric).
6. D1187/D1187M-97(2011)e1 - Asphalt-Base Emulsions for Use as Protective Coatings for Metal.
7. E283-04(2012) - Rate of Air Leakage Through Exterior Windows, Curtain Walls, and Doors Under Specified Pressure Differences Across the Specimen.
8. E330/E330M-14 -Structural Performance of Exterior Windows, Doors, Skylights and Curtain Walls by Uniform Static Air Pressure Difference.
9. E331-00(2009) - Water Penetration of Exterior Windows, Curtain Walls, and Doors by Uniform Static Air Pressure Difference.
10. E1886-13a - Performance of Exterior Windows, Curtain Walls, Doors, and Impact Protective Systems Impacted by Missiles and Exposed to Cyclic Pressure Differentials.

- 11. E1996-14a - Performance of Exterior Windows, Curtain Walls, Doors, and impact Protective Systems Impacted by Windborne Debris in Hurricanes.
- 12. F468-15 - Nonferrous Bolts, Hex Cap Screws, and Studs for General Use.
- 13. F593-13a - Stainless Steel Bolts, Hex Cap Screws, and Studs.
- E. National Association of Architectural Metal Manufacturers (NAAMM):
  - 1. AMP 500-06 - Metal Finishes Manual.
- F. National Fenestration Rating Council (NFRC):
  - 1. 500-14(E1A0) - Determining Fenestration Product Condensation Resistance Values.
- G. United States Veterans Administration (VA):
  - 1. PSDSDD - Physical Security Design Standards Data Definitions.

#### **1.4 PREINSTALLATION MEETINGS**

- A. Conduct pre-installation meeting at project site minimum 30 days before beginning Work of this section.
  - 1. Required Participants:
    - a. Contracting Officer's Representative.
    - b. Contractor.
    - c. Installer.
    - d. Manufacturer's field representative.
  - 2. Meeting Agenda: Distribute agenda to participants minimum 3 days before meeting.
    - a. Installation schedule.
    - b. Installation sequence.
    - c. Preparatory work.
    - d. Protection before, during, and after installation.
    - e. Installation.
    - f. Terminations.
    - g. Transitions and connections to other work.
    - h. Other items affecting successful completion.
  - 3. Document and distribute meeting minutes to participants to record decisions affecting installation.

#### **1.5 SUBMITTALS**

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings: Minimum 1 to 2 (half size) scale.
  - 1. Show size, configuration, and fabrication and installation details.
  - 2. Show anchorage and reinforcement.



3. Show interface and relationship to adjacent work, including thermal, air, and water barrier continuity.
  - C. Manufacturer's Literature and Data:
    1. Description of each product.
    2. Doors, each type.
    3. Entrance and Storefront construction.
    4. Installation instructions.
    5. Warranty.
  - D. Sustainable Construction Submittals:
    1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
  - E. Test reports: Certify each product complies with specifications.
  - F. Certificates: Certify each product with specifications.
    1. Certify anodized finish thickness.
  - G. Qualifications: Substantiate qualifications comply with specifications.
    1. Manufacturer with project experience list.
    2. Installer with project experience list.
    3. Welders and welding procedures.
  - H. Delegated Design Drawings and Calculations: Signed and sealed by responsible design professional.
    1. Show location and magnitude of loads applied to building structural frame.
    2. Identify deviations from details shown on drawings.
  - I. Operation and Maintenance Data:
    1. Care instructions for each exposed finish product.
- 1.6 QUALITY ASSURANCE**
- A. Manufacturer Qualifications:
    1. Regularly manufactures specified products.
    2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.
      - a. Project Experience List: Provide contact names and addresses for completed projects.
  - B. Installer Qualifications: Product manufacturer or Manufacturer authorized representative.
    1. Regularly installs specified products.
    2. Installed specified products with satisfactory service on five similar installations for minimum five years.
      - a. Project Experience List: Provide contact names and addresses for completed projects.
  - C. Welders and Welding Procedures Qualifications: AWS D1.2/D1.2M.

**1.7 DELIVERY, STORAGE AND HANDLING**

- A. Deliver products in manufacturer's original sealed packaging.
- B. Mark packaging, legibly. Indicate manufacturer's name or brand, type, color, production run number, and manufacture date.
- C. Before installation, return or dispose of products within distorted, damaged, or opened packaging.
- D. Store products indoors in dry, weathertight conditioned facility.
- E. Protect products from damage during handling and construction operations.

**1.8 WARRANTY**

- A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."
- B. Manufacturer's Warranty: Warrant painted finish against material and manufacturing defects.
  - 1. Warranty Period: 20 years.

**PART 2 - PRODUCTS****2.1 SYSTEM PERFORMANCE**

- A. Delegated Design: Prepare submittal documents including design calculations and drawings signed and sealed by registered design professional, licensed in state where work is located.
  - 1. Minor deviations to details shown on drawings to accommodate manufacturer's standard products may be accepted by Contracting Officer's Representative when deviations do not affect design concept and specified performance.
- B. Design aluminum framed entrances complying with specified performance:
  - 1. Wind and Seismic Load Resistance: ASCE/SEI 7; Design criteria as indicated on Drawings when tested according to ASTM E330/E330M.
  - 2. Thermal Movement: Accommodate ambient temperature range of 67 degrees C (120 degrees F).
  - 3. Blast Resistance:
    - a. Mission Critical Protected Facilities: VA PSDSDD W1 design threat level located at standoff distance.
      - 1) Standoff Distance: Minimum 15 m (50 feet); maximum VA PSDSDD GP2.
    - b. Failure: Glass must fail first.
  - 4. Condensation Resistance: NFRC 500.
    - a. Fixed Framing: 45 CRF, minimum.
  - 5. Water Resistance: ASTM E331; No uncontrolled penetration at 380 Pa (8 psf), minimum, pressure differential.
  - 6. Fixed Framing Air Infiltration Resistance: ASTM E283; 0.30 L/s/sq. m (0.06 cfm/sf), maximum at 300 Pa (6.24 psf), minimum, pressure differential.

7. Entrance Doors Air Infiltration Resistance: ASTM E283; maximum allowable at 75 Pa (1.57 psf), minimum, pressure differential.
  - a. Paired Doors: 6 L/s/sq. m (1.2 cfm/sf).

## 2.2 MATERIALS

- A. Aluminum:
  1. Sheet Metal: ASTM B209M (ASTM B209), minimum 1.6 mm (0.063 inch) thick.
  2. Extrusions: ASTM B221M (ASTM B221).
    - a. Framing: Minimum 3 mm (0.125 inch) wall thickness.
    - b. Glazing Beads, Moldings, and Trim: Minimum 1.25 mm (0.050 inch) thick.
  3. Alloy 6063 temper T5 for doors, door frames, fixed glass sidelights, storefronts, and transoms.
  4. Alloy 6061 temper T6 for guide tracks for sliding doors and other extruded structural members.
  5. Color Anodized Aluminum: Provide aluminum alloy required to produce specified color.
- B. Stainless Steel: ASTM A240/A240M; Type 302 or Type 304.
- C. Thermal Break: Manufacturer standard low conductive material retarding heat flow in the framework, where insulating glass is scheduled.

## 2.3 PRODUCTS - GENERAL

- A. Provide aluminum framed entrances from one manufacturer.
- B. Provide aluminum entrances from same manufacturer.
- C. Sustainable Construction Requirements:
  1. Aluminum Recycled Content: 80 percent total recycled content, minimum.

## 2.4 FRAMES

- A. Framing Members: Extruded aluminum, thermally broken.
- B. Stops: Provide integral fixed stops and glass rebates and snap-on removable stops.
- C. Provide concealed screws, bolts and other fasteners.
- D. Secure cover boxes to frames in back of lock strike cutouts.

## 2.5 MANUAL ALUMINUM DOORS (SWINGING)

- A. Frames: Aluminum extrusions.
- B. Jamb: 45mm (1-3/4 inches) thick.
- C. Door: 45 mm (1-3/4 inches) thick.
  1. Door Edges and Internal Reinforcing: Extruded aluminum tubes, single piece full height and width, welded joints.
- D. Glass: Full Lite, Laminated Glass, Clear
- E. Lock requirements: Refer to 08 71 00 DOOR HARDWARE
- F. Panic: Surface Mounted

**2.6 SLIDING DOORS (SINGLE or BI-PART PANEL)**

- A. Frames: Aluminum extrusions.
- B. Jamb: 45mm (1-3/4 inches) thick.
- C. Panels: 45 mm (1-3/4 inches) thick.
  - 1. Panel Edges and Internal Reinforcing: Extruded aluminum tubes, single piece full height and width, welded joints.
- D. Glass: Laminated Glass, Clear
- E. Electric Solenoid Lock for Fail Safe/Fail Secure
- F. Access Control: Card Key Reader Access (External)
- G. Keyed Rotary Controls: Lock requirements in 08 71 00 DOOR HARDWARE
- H. Panic: Surface Mounted
- I. Breakout: Full Breakout
- J. For Single Panel, provide two equal sized panels, with one moving panel
- K. For Bi-Part Panel, provide four equal sized panels, with two center moving panels

**2.7 SLIDING DOORS (BI-FOLDING PANELS)**

- A. Frames: Aluminum extrusions.
- B. Jamb: 45mm (1-3/4 inches) thick.
- C. Panels: 4-panels, 45mm (1-3/4 inches) thick.
  - 1. Panel Edges and Internal Reinforcing: Extruded aluminum tubes, single piece full height and width, welded joints.
- D. Glass: Laminated Glass, Clear
- E. Electric Solenoid Lock for Fail Safe/Fail Secure
- F. Access Control: Card Key Reader Access (External)
- G. Keyed Rotary Controls: Lock requirements in 08 71 00 DOOR HARDWARE
- H. Panic: Surface Mounted
- I. Breakout: Full Breakout
- J. Provide an opening of a minimum of 5' (60") centered

**2.8 COLUMN COVERS AND TRIM**

- A. Column Covers and Trim: Sheet aluminum fabrications shown from sheet aluminum of longest available lengths.
- B. Provide concealed fasteners.
- C. Provide aluminum stiffeners and supporting members shown on drawings and as required to maintain component integrity and shape.

**2.9 FABRICATION**

- A. Form metal parts and fit and assemble joints, except joints designed to accommodate movement. Seal joints to resist air infiltration and water penetration.
- B. Welding:

1. Make welds without distorting and discoloring exposed surfaces.
2. Clean and dress welds. Remove welding flux and weld spatter.
- C. Prepare and reinforce doors and frames for hardware and accessories.
  1. Coordinate preparation with specified hardware. See Section 08 71 00, DOOR HARDWARE.
  2. Fabricate reinforcement from stainless steel plates.
    - a. Hinge and pivot reinforcing: Minimum 4.5 mm (0.179 inch) thick.
    - b. Lock Face, Flush Bolts, Concealed Holders, Concealed and Surface Mounted Closers Reinforcing: Minimum 2.6 mm (0.104 inch) thick.
    - c. Other Surface Mounted Hardware Reinforcing: Minimum 1.5 mm (0.059 inch) thick.
  3. Where concealed hardware is specified, provide space, cutouts, and reinforcement for installation and secure fastening.
- D. Factory assemble doors.

## **2.10 FINISHES**

- A. Aluminum Anodized Finish: NAAMM AMP 500.
  1. Dark Bronze Anodized Finish: AA-C22A42 or AA-C22A44; Class I Architectural, 0.018 mm (0.7 mil) thick.

## **2.11 ACCESSORIES**

- A. Dielectric Tape: Plastic, non-absorptive, with pressure sensitive adhesive; 0.18 to 0.25 mm (7 to 10 mils) thick.
- B. Barrier Coating: ASTM D1187/D1187M.
- C. Welding Materials: AWS D1.2/D1.2M, type to suit application.
- D. Fasteners:
  1. Aluminum: ASTM F468, Alloy 2024.
  2. Stainless Steel: ASTM F593, Alloy Groups 1, 2 and 3.
- E. Anchors: Aluminum or stainless steel; type to suit application.
- F. Galvanizing Repair Paint: MPI No. 18.
- G. Touch-Up Paint: Match shop finish.

## **PART 3 - EXECUTION**

### **3.1 PREPARATION**

- A. Examine and verify substrate suitability for product installation.
  1. Coordinate floor closer installation recessed into concrete slabs.
  2. Coordinate anchor installation built into masonry and concrete.
- B. Protect existing construction and completed work from damage.
- C. Clean substrates. Remove contaminants capable of affecting subsequently installed product's performance.
- D. Apply dielectric tape or barrier coating to aluminum surfaces in contact with dissimilar metals and cementitious materials to minimum 0.7 mm (30 mils) dry film thickness.

**3.2 INSTALLATION - GENERAL**

- A. Install products according to manufacturer's instructions.
  - 1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Install aluminum framed entrances plumb and true, in alignment and to lines shown on drawings.
- C. Anchor frames to adjoining construction at heads, jambs and sills.
- D. Provide concealed aluminum clips to connect adjoining frame sections.
- E. Install door hardware and hang doors. See Section 08 71 00, DOOR HARDWARE.
- F. Install door operators.
- G. Adjust doors and hardware uniform clearances and proper operation.
- H. Touch up damaged factory finishes.
  - 1. Repair galvanized surfaces with galvanized repair paint.
  - 2. Repair painted surfaces with touch up primer.
- I. Tolerances:
  - 1. Variation from Plumb, Level, Warp, and Bow: Maximum 3 mm in 3 m (1/8 inch in 10 feet).
  - 2. Variation from Plane: Maximum 3 mm in 3.65 m (1/8 inch in 12 feet); 6 mm (1/4 inch) over total length.
  - 3. Variation from Alignment: Maximum 1.5 mm (1/16 inch) in-line offset and maximum 3 mm (1/8 inch) corner offset.
  - 4. Variation from Square: Maximum 3 mm (1/8 inch) diagonal measurement differential.

**3.3 PROTECTION, CLEANING AND REPAIRING**

- A. Clean exposed aluminum and glass surfaces. Remove contaminants and stains.
- B. Protect aluminum-framed entrances from construction operations.
- C. Remove protective materials immediately before acceptance.
- D. Repair damage.

- - - E N D - - -

**SECTION 08 71 00****DOOR HARDWARE****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. Door hardware and related items necessary for complete installation and operation of doors.

**1.2 RELATED WORK**

- A. Application of Hardware: Section 08 14 00, WOOD DOORS, Section 08 11 13, HOLLOW METAL DOORS AND FRAMES, Section 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS, Section 08 71 13, AUTOMATIC DOOR OPERATORS
- B. Electrical: Division 26, ELECTRICAL.

**1.3 GENERAL**

- A. All hardware shall comply with UFAS, (Uniform Federal Accessible Standards) unless specified otherwise.
- B. Provide rated door hardware assemblies where required by most current version of the International Building Code (IBC).
- C. Hardware for Labeled Fire Doors and Exit Doors: Conform to requirements of NFPA 80 for labeled fire doors and to NFPA 101 for exit doors, as well as to other requirements specified. Provide hardware listed by UL, except where heavier materials, large size, or better grades are specified herein under paragraph HARDWARE SETS. In lieu of UL labeling and listing, test reports from a nationally recognized testing agency may be submitted showing that hardware has been tested in accordance with UL test methods and that it conforms to NFPA requirements.
- D. Hardware for application on metal and wood doors and frames shall be made to standard templates. Furnish templates to the fabricator of these items in sufficient time so as not to delay the construction.
- E. The following items shall be of the same manufacturer, except as otherwise specified:
  - 1. Mortise locksets.
  - 2. Hinges for hollow metal and wood doors.
  - 3. Surface applied overhead door closers.
  - 4. Exit devices.
  - 5. Floor closers.

**1.4 WARRANTY**

- A. Automatic door operators shall be subject to the terms of FAR Clause 52.246-21, except that the Warranty period shall be two years in lieu of one year for all items except as noted below:
  - 1. Locks, latchsets, and panic hardware: 5 years.
  - 2. Door closers and continuous hinges: 10 years.

### 1.5 MAINTENANCE MANUALS

- A. In accordance with Section 01 00 00, GENERAL REQUIREMENTS Article titled "INSTRUCTIONS", furnish maintenance manuals and instructions on all door hardware. Provide installation instructions with the submittal documentation.

### 1.6 SUBMITTALS

- A. Submittals shall be in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. Submit 6 copies of the schedule per Section 01 33 23. Submit 2 final copies of the final approved schedules to VAMC Locksmith as record copies.
- B. Hardware Schedule: Prepare and submit hardware schedule in the following form:

Hardware Item	Quantity	Size	Reference Publication Type No.	Finish	Mfr. Name and Catalog No.	Key Control Symbols	UL Mark (if fire rated and listed)	ANSI/BHMA Finish Designation

- C. Samples and Manufacturers' Literature:

1. Samples: All hardware items (proposed for the project) that have not been previously approved by Builders Hardware Manufacturers Association shall be submitted for approval. Tag and mark all items with manufacturer's name, catalog number and project number.
2. Samples are not required for hardware listed in the specifications by manufacturer's catalog number, if the contractor proposes to use the manufacturer's product specified.

- D. Certificate of Compliance and Test Reports: Submit certificates that hardware conforms to the requirements specified herein. Certificates shall be accompanied by copies of reports as referenced. The testing shall have been conducted either in the manufacturer's plant and certified by an independent testing laboratory or conducted in an independent laboratory, within four years of submittal of reports for approval.

### 1.7 DELIVERY AND MARKING

- A. Deliver items of hardware to job site in their original containers, complete with necessary appurtenances including screws, keys, and instructions. Tag one of each different item of hardware and deliver to COR for reference purposes. Tag shall identify items by Project Specification number and manufacturer's catalog number. These items



shall remain on file in COR's office until all other similar items have been installed in project, at which time the COR will deliver items on file to Contractor for installation in predetermined locations on the project.

#### **1.8 PREINSTALLATION MEETING**

- A. Convene a preinstallation meeting not less than 30 days before start of installation of door hardware. Require attendance of parties directly affecting work of this section, including Contractor and Installer, COR and VA Locksmith, Hardware Consultant, and Hardware Manufacturer's Representative. Review the following:
  - 1. Inspection of door hardware.
  - 2. Job and surface readiness.
  - 3. Coordination with other work.
  - 4. Protection of hardware surfaces.
  - 5. Substrate surface protection.
  - 6. Installation.
  - 7. Adjusting.
  - 8. Repair.
  - 9. Field quality control.
  - 10. Cleaning.

#### **1.9 INSTRUCTIONS**

- A. Keying: All electronic cylinders shall be provided and added into existing electronic key system, if not already within existing door hardware. Labeling of cylinder shall conform to facility standards. Each electronic core cylinder shall only be removable with a special key or tool without disassembly of knob or lockset. Cylinders shall be 7 pin-type. The key system shall be small format (Best size and profile) removable core type.

#### **1.10 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only. In text, hardware items are referred to by series, types, etc., listed in such specifications and standards, except as otherwise specified.
- B. American Society for Testing and Materials (ASTM):
  - F883-04.....Padlocks
  - E2180-07.....Standard Test Method for Determining the Activity of Incorporated Antimicrobial Agent(s) In Polymeric or Hydrophobic Materials

C. American National Standards Institute/Builders Hardware Manufacturers Association (ANSI/BHMA):

A156.1-06.....Butts and Hinges  
 A156.2-03.....Bored and Pre-assembled Locks and Latches  
 A156.3-08.....Exit Devices, Coordinators, and Auto Flush Bolts  
 A156.4-08.....Door Controls (Closers)  
 A156.5-14.....Cylinders and Input Devices for Locks.  
 A156.6-05.....Architectural Door Trim  
 A156.8-05.....Door Controls-Overhead Stops and Holders  
 A156.11-14.....Cabinet Locks  
 A156.12-05 .....Interconnected Locks and Latches  
 A156.13-05.....Mortise Locks and Latches Series 1000  
 A156.14-07 .....Sliding and Folding Door Hardware  
 A156.15-06.....Release Devices-Closer Holder, Electromagnetic and Electromechanical  
 A156.16-08.....Auxiliary Hardware  
 A156.17-04 .....Self-Closing Hinges and Pivots  
 A156.18-06.....Materials and Finishes  
 A156.20-06 .....Strap and Tee Hinges, and Hasps  
 A156.21-09.....Thresholds  
 A156.22-05.....Door Gasketing and Edge Seal Systems  
 A156.23-04.....Electromagnetic Locks  
 A156.24-03.....Delayed Egress Locking Systems  
 A156.25-07 .....Electrified Locking Devices  
 A156.26-06.....Continuous Hinges  
 A156.28-07 .....Master Keying Systems  
 A156.29-07 .....Exit Locks and Alarms  
 A156.30-03 .....High Security Cylinders  
 A156.31-07 .....Electric Strikes and Frame Mounted Actuators  
 A156.36-10.....Auxiliary Locks  
 A250.8-03.....Standard Steel Doors and Frames

D. National Fire Protection Association (NFPA):

80-10.....Fire Doors and Other Opening Protectives  
 101-09.....Life Safety Code

E. Underwriters Laboratories, Inc. (UL):

## Building Materials Directory (2008)

**PART 2 - PRODUCTS****2.1 BUTT HINGES**

- A. ANSI A156.1. Provide only five-knuckle, or three-knuckle where the required hinge type is not available in a five-knuckle version. The following types of butt hinges shall be used for the types of doors listed, except where otherwise specified:
  - 1. Exterior Doors: Type A5112 for doors 900 mm (3 feet) wide or less and Type A5111 for doors over 900 mm (3 feet) wide. Hinges for exterior outswing doors shall have non-removable pins. Hinges for exterior fire-rated doors shall be of stainless steel material.
  - 2. Interior Doors: Type A8112 for doors 900 mm (3 feet) wide or less and Type A8111 for doors over 900 mm (3 feet) wide. Hinges for doors exposed to high humidity areas (shower rooms, toilet rooms, kitchens, janitor rooms, etc. shall be of stainless steel material.
- B. Provide quantity and size of hinges per door leaf as follows:
  - 1. Doors up to 1210 mm (4 feet) high: 2 hinges.
  - 2. Doors 1210 mm (4 feet) to 2260 mm (7 feet 5 inches) high: 3 hinges minimum.
  - 3. Doors greater than 2260 mm (7 feet 5 inches) high: 4 hinges.
  - 4. Doors up to 900 mm (3 feet) wide, standard weight: 114 mm x 114 mm (4-1/2 inches x 4-1/2 inches) hinges.
  - 5. Doors over 900 mm (3 feet) to 1065 mm (3 feet 6 inches) wide, standard weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
  - 6. Doors over 1065 mm (3 feet 6 inches) to 1210 mm (4 feet), heavy weight: 127 mm x 114 mm (5 inches x 4-1/2 inches).
  - 7. Provide heavy-weight hinges where specified.
  - 8. At doors weighing 330 kg (150 lbs.) or more, furnish 127 mm (5 inch) high hinges.

**2.2 CONTINUOUS HINGES**

- A. ANSI/BHMA A156.26, Grade 1-600.
  - 1. Listed under Category N in BHMA's "Certified Product Directory."
- B. General: Minimum 0.120-inch- (3.0-mm-) thick, hinge leaves with minimum overall width of 4 inches (102 mm); fabricated to full height of door and frame and to template screw locations; with components finished after milling and drilling are complete
- C. Continuous, Barrel-Type Hinges: Hinge with knuckles formed around a Teflon-coated 6.35mm (0.25-inch) minimum diameter pin that extends entire length of hinge.
  - 1. Base Metal for Exterior Hinges: Stainless steel.
  - 2. Base Metal for Interior Hinges: Stainless steel.
  - 3. Base Metal for Hinges for Fire-Rated Assemblies: Stainless steel.

4. Provide with non-removable pin (hospital tip option) at lockable outswing doors.
5. Where required to clear adjacent casing, trim, and wall conditions and allow full door swing, provide swing clear hinges of minimum width required.
6. Provide with manufacturer's cut-outs for separate mortised power transfers and/or mortised automatic door bottoms where they occur.
7. Where thru-wire power transfers are integral to the hinge, provide hinge with easily removable portion to allow easy access to wiring connections.
8. Where models are specified that provide an integral wrap-around edge guard for the hinge edge of the door, provide manufacturer's adjustable threaded stud and machine screw mechanism to allow the door to be adjusted within the wrap-around edge guard.

### **2.3 DOOR CLOSING DEVICES**

- A. Closing devices shall be products of one manufacturer for each type specified.

### **2.4 OVERHEAD CLOSERS**

- A. Conform to ANSI A156.4, Grade 1 and ADA reduced opening force requirements. Shall be LCN 4040XP Non-Handed Aluminum or equivalent for manual doors. For Automatic doors, shall be LCN 9142-Series or equivalent.
- B. Closers shall conform to the following:
  1. The closer shall have minimum 50 percent adjustable closing force over minimum value for that closer and have adjustable hydraulic back check effective between 60 degrees and 85 degrees of door opening.
  3. Size Requirements: Provide multi-size closers, sizes 1 through 6, except where multi-size closer is not available for the required application.
  4. Material of closer body shall be forged or cast.
  5. Arm and brackets for closers shall be steel, malleable iron or high strength ductile cast iron.
  6. Where closers are exposed to the exterior or are mounted in rooms that experience high humidity, provide closer body and arm assembly of stainless steel material.
  7. Closers shall have full size metal cover; plastic covers will not be accepted.
  8. Closers shall have adjustable hydraulic back-check, separate valves for closing and latching speed, adjustable back-check positioning valve, and adjustable delayed action valve.
  9. Provide closers with any accessories required for the mounting application, including (but not limited to) drop plates, special soffit plates, spacers for heavy-duty parallel arm fifth screws,

bull-nose or other regular arm brackets, longer or shorter arm assemblies, and special factory templating. Provide special arms, drop plates, and templating as needed to allow mounting at doors with overhead stops and/or holders.

10. Closer arms or backcheck valve shall not be used to stop the door from overswing, except in applications where a separate wall, floor, or overhead stop cannot be used.
11. Provide parallel arm closers with heavy duty rigid arm.
12. Where closers are to be installed on the push side of the door, provide parallel arm type except where conditions require use of top jamb arm.
13. Provide all surface closers with the same body attachment screw pattern for ease of replacement and maintenance.
14. All closers shall have a 1 ½" (38mm) minimum piston diameter.

## **2.5 DOOR STOPS**

- A. Conform to ANSI A156.16.
- B. Provide door stops wherever an opened door or any item of hardware thereon would strike a wall, column, equipment or other parts of building construction. For concrete, masonry or quarry tile construction, use lead expansion shields for mounting door stops.
- C. Where cylindrical locks with turn pieces or pushbuttons occur, equip wall bumpers Type L02251 (rubber pads having concave face) to receive turn piece or button.
- D. Provide floor stops (Type L02141 or L02161 in office areas; Type L02121 x 3 screws into floor elsewhere. Wall bumpers, where used, must be installed to impact the trim or the door within the leading half of its width. Floor stops, where used, must be installed within 4-inches of the wall face and impact the door within the leading half of its width.
- E. Where drywall partitions occur, use floor stops, Type L02141 or L02161 in office areas, Type L02121 elsewhere.
- F. Provide stop Type L02011, as applicable for exterior doors. At outswing doors where stop can be installed in concrete, provide stop mated to concrete anchor set in 76mm (3-inch) core-drilled hole and filled with quick-setting cement.
- G. Omit stops where floor mounted door holders are required and where automatic operated doors occur.
- H. Provide appropriate roller bumper for each set of doors (except where closet doors occur) where two doors would interfere with each other in swinging.
- I. Provide door stops on doors where combination closer magnetic holders are specified, except where wall stops cannot be used or where floor stops cannot be installed within 4-inches of the wall.

- J. Where the specified wall or floor stop cannot be used, provide concealed overhead stops (surface-mounted where concealed cannot be used).

## **2.6 LOCKS AND LATCHES**

- A. Conform to ANSI A156.2. Locks and latches for doors 45 mm (1-3/4 inch) thick or over shall have beveled fronts. Lock cylinders shall have not less than seven pins. Cylinders for all locksets shall be removable core type. Cylinders shall be furnished with construction removable cores and construction master keys. Cylinder shall be removable by special key or tool. Construct all cores so that they will be interchangeable into the core housings of all mortise locks, rim locks, cylindrical locks, and any other type lock included in the Great Grand Master Key System. Disassembly of lever or lockset shall not be required to remove core from lockset. Provide temporary keying device or construction core to allow opening and closing during construction and prior to the installation of final cores.
- B. In addition to above requirements, locks and latches shall comply with following requirements:
  - 1. Mortise Lock and Latch Sets: Conform to ANSI/BHMA A156.13. Mortise locksets shall be series 1000, minimum Grade 2. All locksets and latchsets, except on designated doors in Psychiatric (Mental Health) areas, shall have lever handles fabricated from cast stainless steel. No substitute lever material shall be accepted. All locks and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Furnish armored fronts for all mortise locks. Where mortise locks are installed in high-humidity locations or where exposed to the exterior on both sides of the opening, provide non-ferrous mortise lock case.
  - 2. Cylindrical Lock and Latch Sets: levers shall meet ADA (Americans with Disabilities Act) requirements. Cylindrical locksets shall be series 4000 Grade I. All locks and latchsets shall be furnished with 122.55 mm (4-7/8-inch) curved lip strike and wrought box. At outswing pairs with overlapping astragals, provide flat lip strip with 21mm (7/8-inch) lip-to-center dimension. Provide lever design to match existing lever design.
  - 3. Auxiliary locks shall be as specified under hardware sets and conform to ANSI A156.36.
  - 4. Locks on designated doors in Psychiatric (Mental Health) areas shall be paddle type with arrow projection covers and be UL Listed. Provide these locks with paddle in the down position on both sides of the door. Locks shall be fabricated of wrought stainless steel.

## **2.7 PUSH-BUTTON COMBINATION LOCKS**

- A. Kaba Simplex 5021BWL-26D-41 or equal.
- B. Construction: Heavy duty mortise lock housing conforming to ANSI/BHMA A156.13, Grade 1. Lever handles and operating components in compliance

with the UFAS and the ADA Accessibility Guidelines. Match lever handles of locks and latchsets on adjacent doors.

- C. Special Features: Small format key-in-lever cylinder for override to permit a master keyed security system, lock is programmed via keypad without removing lock from door, single access code

## **2.8 ARMOR PLATES, KICK PLATES, MOP PLATES AND DOOR EDGING**

- A. Conform to ANSI Standard A156.6.
- B. Provide protective plates and door edging as specified below:
  1. Kick plates, mop plates and armor plates of metal, Type J100 series.
  2. Provide kick plates where specified. Kick plates shall be 406.5 mm (16 inches) high. Kick plates shall be minimum 1.27 mm (0.050 inches) thick. Provide kick plates beveled on all 4 edges (B4E). On push side of doors where jamb stop extends to floor, make kick plates 38 mm (1-1/2 inches) less than width of door, except pairs of metal doors which shall have plates 25 mm (1 inch) less than width of each door. Extend all other kick and mop plates to within 6 mm (1/4 inch) of each edge of doors. Kick plates shall butt astragals. For jamb stop requirements, see specification sections pertaining to door frames.
  3. Kick plates and/or mop plates are not required on following door sides:
    - a. Armor plate side of doors;
    - b. Exterior side of exterior doors;
    - c. Both sides of aluminum entrance doors.
  4. Armor plates for doors are listed under Article "Hardware Sets". Armor plates shall be thickness as noted in the hardware set, 875 mm (35 inches) high and 38 mm (1-1/2 inches) less than width of doors, except on pairs of metal doors. Provide armor plates beveled on all 4 edges (B4E). Plates on pairs of metal doors shall be 25 mm (1 inch) less than width of each door. Where top of intermediate rail of door is less than 875 mm (35 inches) from door bottom, extend armor plates to within 13 mm (1/2 inch) of top of intermediate rail. On doors equipped with panic devices, extend armor plates to within 13 mm (1/2 inch) of panic bolt push bar.
  6. Provide stainless steel edge guards where so specified at wood doors. Provide mortised type instead of surface type except where door construction and/or ratings will not allow. Provide edge guards of bevel and thickness to match wood door. Provide edge guards with factory cut-outs for door hardware that must be installed through or extend through the edge guard. Provide full-height edge guards except where door rating does not allow; in such cases, provide edge guards to height of bottom of typical lockset armor front. Forward edge guards to wood door manufacturer for factory installation on doors.

**2.9 EXIT DEVICES**

- A. Conform to ANSI Standard A156.3. Exit devices shall be Grade 1; type and function are specified in hardware sets. Shall be Von Duprin 99 Series or equivalent. Provide surface mounted vertical rod exit devices in interior and exterior of building unless otherwise specified. Provide externally mounted top latch. Trim shall have cast satin stainless steel lever handles of design similar to locksets, unless otherwise specified. Provide key cylinders for keyed operating trim and, where specified, cylinder dogging.
- B. Surface vertical rod panics shall only be provided less bottom rod; provide fire pins as required by exit device and door fire labels.
- D. At non-rated openings with panic hardware, provide panic hardware with key cylinder dogging feature.
- E. At electronic openings with panic hardware, provide panic hardware with electronic option to provide connection to card key reader.

**2.10 FLUSH BOLTS (AUTOMATIC)**

- A. Conform to ANSI A156.3. Dimension of flush bolts shall conform to ANSI A115. Bolts shall conform to Underwriters Laboratories, Inc., requirements for fire door hardware. Flush bolts shall automatically latch and unlatch. Furnish dustproof strikes conforming to ANSI A156.16 for bottom flushbolt. Face plates for dustproof strike shall be rectangular and not less than 38 mm by 90 mm (1-1/2 by 3-1/2 inches).
- B. At interior doors, provide auto flush bolts less bottom bolt, unless otherwise specified, except at wood pairs with fire-rating greater than 20 minutes; provide fire pins as required by auto flush bolt and door fire labels.
- C. Flush bolts shall be IVES or equivalent.

**2.11 THRESHOLDS**

- A. Conform to ANSI A156.21, mill finish extruded aluminum, except as otherwise specified. In existing construction, thresholds shall be installed in a bed of sealant with ¼-20 stainless steel machine screws and expansion shields. In new construction, embed aluminum anchors coated with epoxy in concrete to secure thresholds. Furnish thresholds for the full width of the openings.
- B. At exterior doors and any interior doors exposed to moisture, provide threshold with non-slip abrasive finish.
- C. Provide with miter returns where threshold extends more than 12 mm (0.5 inch) beyond face of frame.

**2.12 WEATHERSTRIPS (FOR EXTERIOR DOORS)**

- A. Conform to ANSI A156.22. Air leakage shall not to exceed 0.50 CFM per foot of crack length (0.000774m<sup>3</sup>/s/m).

**2.13 MISCELLANEOUS HARDWARE**

- A. Mutes: Conform to ANSI A156.16. Provide door mutes or door silencers Type L03011 or L03021, depending on frame material, of white or light gray color, on each steel or wood door frame, except at fire-rated



frames, lead-lined frames and frames for sound-resistant, lightproof and electromagnetically shielded doors. Furnish 3 mutes for single doors and 2 mutes for each pair of doors, except double-acting doors. Provide 4 mutes or silencers for frames for each Dutch type door. Provide 2 mutes for each edge of sliding door which would contact door frame.

## **2.14 FINISHES**

- A. Exposed surfaces of hardware shall have ANSI A156.18, finishes as specified below. Finishes on all hinges, pivots, closers, thresholds, etc., shall be as specified below under "Miscellaneous Finishes."
- B. 626 or 630: All surfaces on exterior and interior of buildings, except where other finishes are specified.
- C. Miscellaneous Finishes:
  - 1. Hinges --exterior doors: 630.
  - 2. Hinges --interior doors: 652.
  - 3. Pivots: Match door trim.
  - 4. Door Closers: Factory applied paint finish. Dull or Satin Aluminum color.
  - 5. Thresholds: Mill finish aluminum.
  - 6. Cover plates for floor hinges and pivots: 630.
  - 7. Other primed steel hardware: 600.
- D. Hardware Finishes for Existing Buildings: U.S. Standard finishes shall match finishes of hardware in (similar) existing spaces.
- E. Special Finish: Exposed surfaces of hardware for dark bronze anodized aluminum doors shall have oxidized oil rubbed bronze finish (dark bronze) finish on door closers shall closely match doors.

## **2.15 BASE METALS**

- A. Apply specified U.S. Standard finishes on different base metals as following:

<b>Finish</b>	<b>Base Metal</b>
652	Steel
626	Brass or bronze
630	Stainless steel

## **PART 3 - EXECUTION**

### **3.1 HARDWARE HEIGHTS**

- A. For existing buildings locate hardware on doors at heights to match existing hardware. The Contractor shall visit the site, verify location of existing hardware and submit locations to VA COR for approval.

**B. Hardware Heights from Finished Floor:**

1. Exit devices centerline of strike (where applicable) 1024 mm (40-5/16 inches).
2. Locksets and latch sets centerline of strike 1024 mm (40-5/16 inches).
3. Deadlocks centerline of strike 1219 mm (48 inches).
4. Hospital arm pull 1168 mm (46 inches) to centerline of bottom supporting bracket.
5. Centerline of door pulls to be 1016 mm (40 inches).
6. Push plates and push-pull shall be 1270 mm (50 inches) to top of plate.
7. Push-pull latch to be 1024 mm (40-5/16 inches) to centerline of strike.
8. Locate other hardware at standard commercial heights. Locate push and pull plates to prevent conflict with other hardware.

**3.2 INSTALLATION**

- A. Closer devices, including those with hold-open features, shall be equipped and mounted to provide maximum door opening permitted by building construction or equipment. Closers shall be mounted on side of door inside rooms, inside stairs, and away from corridors. At exterior doors, closers shall be mounted on interior side. Where closers are mounted on doors they shall be mounted with sex nuts and bolts; foot shall be fastened to frame with machine screws.

**B. Hinge Size Requirements:**

<b>Door Thickness</b>	<b>Door Width</b>	<b>Hinge Height</b>
45 mm (1-3/4 inch)	900 mm (3 feet) and less	113 mm (4-1/2 inches)
45 mm (1-3/4 inch)	Over 900 mm (3 feet) but not more than 1200 mm (4 feet)	125 mm (5 inches)

- C. Hinge leaves shall be sufficiently wide to allow doors to swing clear of door frame trim and surrounding conditions.
- D. Where new hinges are specified for new doors in existing frames or existing doors in new frames, sizes of new hinges shall match sizes of existing hinges; or, contractor may reuse existing hinges provided hinges are restored to satisfactory operating condition as approved by Resident Engineer. Existing hinges shall not be reused on door openings having new doors and new frames. Coordinate preparation for hinge cut-outs and screw-hole locations on doors and frames.

- E. Hinges Required Per Door: 3 butts
- F. Fastenings: Suitable size and type and shall harmonize with hardware as to material and finish. Provide machine screws and lead expansion shields to secure hardware to concrete, ceramic or quarry floor tile, or solid masonry. Fiber or rawl plugs and adhesives are not permitted. All fastenings exposed to weather shall be of nonferrous metal.
- G. After locks have been installed; show in presence of COR that keys operate their respective locks in accordance with keying requirements. Installation of locks which do not meet specified keying requirements shall be considered sufficient justification for rejection and replacement of all locks installed on project.

### 3.3 FINAL INSPECTION

- A. Installer to provide letter to VA COR that upon completion, installer has visited the Project and has accomplished the following:
  - 1. Re-adjust hardware.
  - 2. Evaluate maintenance procedures and recommend changes or additions, and instruct VA personnel.
  - 3. Identify items that have deteriorated or failed.
  - 4. Submit written report identifying problems.

### 3.4 DEMONSTRATION

- A. Demonstrate efficacy of mechanical hardware and electrical, and electronic hardware systems, including adjustment and maintenance procedures, to satisfaction of Project Engineer and VA Locksmith.

### 3.5 HARDWARE SETS

- A. Following sets of hardware correspond to hardware sets required:

#### INTERIOR PAIRS OF DOORS

##### HW-1 - Internal Hollow Metal Doors

##### Each Pair to Have:

Hinges	QUANTITY & TYPE AS REQUIRED
1 Set Auto Flush Bolts	IVES
1 Punch Button Lock	Kaba Simplex
1 Key Cylinder	I/C SMALL FORMAT 7-PIN CORE
2 Kick Plates	TYPE AS REQUIRED
2 Floor Stops	L02121 x 3 FASTENERS
2 Glazing	Vision Lite Frames w/ clear tempered glass (22" x 30")
2 Closers	LCN 4040XP Non-Handed Aluminum
1 Exit Device	Von Duprin 99 Series

HW-2 - Internal Aluminum Storefront DoorsEach Pair to Have:

Hinges	Continuous Hinge
2 Exit Device	Von Duprin 99 Series
1 Key Cylinder	I/C SMALL FORMAT 7-PIN CORE
2 Closers	LCN 4040XP Non-Handed Aluminum or equiv.
2 Floor Stop	Floor Stop and Automatic Holder

HW-MH3 -Internal Entry Wood DoorsEach Pair to Have:

Hinges	QUANTITY & TYPE AS REQUIRED
1 Electrified Lock	TYPE AS REQUIRED
1 Key Cylinder	I/C SMALL FORMAT 7-PIN CORE
1 Power Supply	REGULATED, FILTERED, 24VDC, AMPERAGE AS REQUIRED
2 Closer	LCN 4040XP Non-Handed Aluminum or equiv.
1 Kick Plate	TYPE AS REQUIRED
1 Floor Stop	L02121 x 3 FASTENERS
2 Glazing	Small Lite Laminated, (5" x 30")

INSTALL DOOR CLOSERS ON WAITING ROOM (ENTRY WAY) SIDE.

PROVIDE SECURITY FASTENERS FOR ALL HARDWARE ITEMS.

120VAC POWER, CONDUIT, AND WIRING BY DIVISION 26.

**EXTERIOR SINGLE DOOR**HW-4 - External Aluminum Storefront Single DoorEach Door to Have:

Hinges	Continuous Hinge
1 Exit Device	Von Duprin 99 Series
1 Electrified Lock	TYPE AS REQUIRED
1 Key Cylinder	I/C SMALL FORMAT 7-PIN CORE
1 Closer	LCN 9142-Series or equivalent

1	Glazing	Laminated
---	---------	-----------

**EXTERIOR PAIRS OF DOORS**HW-5 - External Aluminum Storefront DoorsEach Pair to Have:

	Hinges	Continuous Hinge
2	Exit Device	Von Duprin 99 Series
1	Electrified Lock	TYPE AS REQUIRED
1	Key Cylinder	I/C SMALL FORMAT 7-PIN CORE
2	Closers	LCN 9142-Series or equivalent
2	Floor Stops	L02121 x 3 FASTENERS
1	Glazing	Laminated

HW-E6 - Exterior Hollow Metal DoorsEach Pair to Have:

	Hinges	Continuous Hinge
2	Exit Device	Von Duprin 99 Series
1	Electrified Lock	TYPE AS REQUIRED
1	Key Cylinder	I/C SMALL FORMAT 7-PIN CORE
2	Closer	LCN 9142-Series or equivalent
2	Armor Plate	TYPE AS REQUIRED

HW-E6A - Exterior Hollow Metal Swing Clear DoorsEach Pair to Have:

	Hinges	Continuous Hinge, Swing Clear
2	Exit Device	Von Duprin 99 Series
1	Electrified Lock	TYPE AS REQUIRED
1	Key Cylinder	I/C SMALL FORMAT 7-PIN CORE
2	Closer	LCN 9142-Series or equivalent

2 Armor Plate TYPE AS REQUIRED

**EXTERIOR SLIDING DOORS**

HW-E7 - Exterior Sliding Doors

Each Sliding Door to Have:

1 Set Track Hardware	TYPE REQUIRED FOR DOOR MATERIAL, WEIGHT, AND MOUNTING DETAILS (COMPLETE WITH TRACK, TRACK BRACKETS, HANGERS, GUIDES, BUMPERS, AND INTERNAL TRACK STOPS)
1 Pull	TYPE AS REQUIRED
1 Electrified Lock	TYPE AS REQUIRED
1 Exit Device	Surface Mounted
1 Key Cylinder	I/C SMALL FORMAT 7-PIN CORE
Glazing	Laminate

HW-E7A - Exterior Bi-Part Sliding DoorsEach Sliding Door Set to Have:

1	Set Track Hardware	TYPE REQUIRED FOR DOOR MATERIAL, WEIGHT, AND MOUNTING DETAILS (COMPLETE WITH TRACK, TRACK BRACKETS, HANGERS, GUIDES, BUMPERS, AND INTERNAL TRACK STOPS)
2	Pulls	TYPE AS REQUIRED
1	Electrified Lock	TYPE AS REQUIRED
1	Exit Device	Surface Mounted
1	Key Cylinder	I/C SMALL FORMAT 7-PIN CORE
	Glazing	Laminate

HW-E8 - Exterior Folding DoorsEach Folding Bi-fold Door Set to Have:

1	Set Track Hardware	TYPE REQUIRED FOR DOOR MATERIAL, WEIGHT, AND MOUNTING DETAILS (COMPLETE WITH TRACK, TRACK BRACKETS, HANGERS, GUIDES, BUMPERS, AND INTERNAL TRACK STOPS)
2	Pulls	TYPE AS REQUIRED
1	Electrified Lock	TYPE AS REQUIRED
1	Exit Device	Surface Mounted
1	Key Cylinder	I/C SMALL FORMAT 7-PIN CORE
	Glazing	Laminate

- - - E N D - - -

**SECTION 08 71 13**  
**AUTOMATIC DOOR OPERATORS**

**PART 1 - GENERAL**

**1.1 SUMMARY**

A. Section Includes:

1. Automatic operators for swinging and sliding/folding doors.

**1.2 RELATED REQUIREMENTS**

- A. Aluminum Frames Entrance Work: Section 08 41 13, ALUMINUM-FRAMED ENTRANCES AND STOREFRONTS.
- B. Door Hardware: Section 08 71 00, DOOR HARDWARE.

**1.3 APPLICABLE PUBLICATIONS**

- A. Comply with references to extent specified in this section.
- B. ASTM International (ASTM):
  1. B209-14 - Aluminum and Aluminum-Alloy Sheet and Plate.
  2. A1008/A1008M-15 - Steel, Sheet, Cold-Rolled, Carbon, Structural, High-Strength Low-Alloy, High-Strength Low-Alloy with Improved Formability, Solution Hardened, and Baked Hardenable.
- C. Builders Hardware Manufacturers Association (BHMA):
  1. BHMA A156.10-11 - Power Operated Pedestrian Doors.
- D. National Fire Protection Association (NFPA):
  1. 101-18 - Life Safety Code.
- E. Underwriters Laboratories (UL):
  1. 325-13 - Standard for Doors, Drapery, Gate, Louver, and Window Operators and Systems.

**1.4 SUBMITTALS**

- A. Submittal Procedures: Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submittal Drawings:
  1. Show size, configuration, and fabrication and installation details.
- C. Manufacturer's Literature and Data:
  1. Description of each product.
  2. Installation instructions.
  3. Warranty.
- D. Sustainable Construction Submittals:
  1. Recycled Content: Identify post-consumer and pre-consumer recycled content percentage by weight.
- E. Test reports: Certify each product complies with specifications.
- F. Qualifications: Substantiate qualifications comply with specifications.
  1. Manufacturer with project experience list.



2. Installer with project experience list.

G. Operation and Maintenance Data:

1. Care instructions for each exposed finish product.
2. Start-up, maintenance, troubleshooting, emergency, and shut-down instructions for each operational product.

**1.5 QUALITY ASSURANCE**

A. Manufacturer's Qualifications:

1. Regularly manufactures specified products.
2. Manufactured specified products with satisfactory service on five similar installations for minimum five years.
  - a. Provide contact names and addresses for completed projects when requested by Contracting Officer's Representative.

B. Installer's Qualifications: Experienced installer, approved by the manufacturer.

**1.6 WARRANTY**

A. Construction Warranty: FAR clause 52.246-21, "Warranty of Construction."

B. Manufacturer's Warranty: Warrant automatic door operators against material and manufacturing defects.

1. Warranty Period: Two years.

**PART 2 - PRODUCTS**

**2.1 SYSTEM PERFORMANCE**

- A. Comply with requirements of BHMA A156.10. Unless otherwise indicated on Drawings, provide operators that move doors from fully closed to fully opened position in three seconds maximum time interval, when speed adjustment is at maximum setting.
- B. Equipment: Conforming to UL 325. Provide key operated power disconnect wall switch for each door installation. Key core shall conform to key hardware requirements as specified in Section 08 71 00, DOOR HARDWARE.
- C. Electrical Wiring, Connections and Equipment: Motors, starters, controls, associated devices, and interconnecting wiring required for installation. Equipment and wiring as specified in Division 26, ELECTRICAL.

**2.2 PRODUCTS - GENERAL**

- A. Provide door operators from one manufacturer.
- B. Provide one type of operator throughout project.
- C. Sustainable Construction Requirements:
  1. Steel Recycled Content: 30 percent total recycled content, minimum.
  2. Aluminum Recycled Content: 80 percent total recycled content, minimum.

**2.3 SWING DOOR OPERATORS**

A. General:

1. Type: Institutional type.
  2. Size: As recommended by manufacturer for door weight and sizes.
- B. Function:
1. Provide operators, enclosed in housing, permitting opening of door by energizing motor and stopped by electrically reducing Voltage and stalling motor against mechanical stop.
  2. Door to close by means of spring energy, and closing force controlled by gear system and motor being used as dynamic brake without power, or controlled by hydraulic closer in electro-hydraulic operators.
  3. Opening and Closing Speeds: Field adjustable.
  4. Operators with checking mechanism providing cushioning action at last part of door travel, in both opening and closing cycle.
  5. Operators capable of recycling doors instantaneously to full open position from any point in closing cycle when control switch is activated.
  6. When automatic power is interrupted or shut-off, permit doors to easily open manually without damage to automatic operator system.
- C. Connect hardware with drive arm attached to door with pin linkage rotating in a self-lubricating bearing. Prevent doors from pivoting on shaft of operator.
- D. Operator Housing:
1. ASTM B209, Type 6063-T5 aluminum alloy, 112 mm (4-1/2 inches) wide by 140 mm (5.5 inches) high by 3.2 mm (0.125 inch) thick, aluminum extrusions with enclosed end caps for application to 100 mm (4 inches) and larger frame systems.
- E. Power Operator:
1. Completely assembled and sealed unit including gear drive transmission, mechanical spring and bearings, located in aluminum case and filled with special lubricant for extreme temperature conditions. Rubber mounted units with provisions for easy maintenance and replacement, without removing door from pivots or frame.
- F. Motors:
1. Provide with interlock to prevent operation when doors are electrically locked from opening.
- G. Electrical Control:
1. Self-contained electrical control unit, including necessary transformers, relays, rectifiers, and other electronic components for proper operation and switching of power operator.
  2. Connecting Harnesses: Interlocking plugs.
- H. Accessories:
1. Metal mounting supports, brackets and other accessories necessary for installation of operators at head of door frames.
- I. Microprocessor Controls:

1. Multi-function microprocessor control providing adjustable hold open time (1-30 seconds) with fully adjustable opening speed, LED indications for sensor input signals and operator status and power assist close options. Control capable of receiving activation signals from any device with normally open dry contact output.
2. Hold doors held open by low Voltage applied to the continuous duty motor.
3. Controls:
  - a. Adjustable safety circuit that monitors door operation and stops opening direction of door if obstruction is sensed.
  - b. Recycle feature that reopens door if obstruction is sensed at any point during closing cycle.
  - c. Standard three position key switch with functions for ON, OFF, and HOLD OPEN, mounted on operator enclosure, door frame, or wall, as indicated on drawings.

## **2.4 SLIDING DOOR OPERATORS**

### **A. Operator Function:**

1. Electric motor pulling door from closed to open position, stopping door by electrically reducing Voltage and stalling door against mechanical stop.
2. Opening and Closing Speeds: Field adjustable.
3. System permitting manual control of door in event of power failure.

### **B. Power Operator:**

1. Completely assembled and sealed electromechanical operating unit including 95 W (1/8 hp.) DC shunt-wound permanent magnet motor with sealed bearings, located in aluminum case and filled with special lubricant for extreme temperature conditions. Rubber mount units with provisions for easy maintenance and replacement, without removing door from pivots or frame.
2. Opening and Closing Cycle: Field adjustable.

### **C. Operator Housing:**

1. ASTM B209, Type 6063-T5 aluminum alloy, 150 mm (6 inches) wide by 200 mm (8 inches) high by 3.2 mm (0.125 inch) thick, aluminum extrusions with enclosed end caps for application to 100 mm (4 inches) and larger frame systems.

## **2.5 SLIDING DOOR UNITS**

### **A. Provide door panels in compliance with NFPA 101, allowing "breakout" to full open position to provide instant egress at any point in door's movement.**

1. Door Panels: ASTM A1008/A1008M, steel sheet, Type B, cold-rolled, reinforce frame structure, minimum 1.1-mm (0.043 inch) thick steel shapes.

### **B. Sliding Door Hardware Guide Rollers, Door Carrier:**

1. Rollers: Steel or plastic rollers with sealed bearings with each door having two support rollers and one anti-rise roller.

- a. Vertical Adjustment: Minimum 9 mm (0.35 inch) with positive mechanical locks.
  - b. Include two urethane covered oil impregnated bearing bottom rollers attached with 5 mm (3/16 inch) thick formed steel guide brackets at each door.
  - c. Door Carriers: For each door carrier supporting door leaf, include vertical steel reinforcing member to prevent sagging when door is swung under breakaway conditions.
    - 1) Carbon Steel Brackets And Fittings: Corrosion resistant.
- C. Locking Hardware:
- 1. Locking hardware at interior doors not requiring physical security is not required.
  - 2. Doors with surface mounted vertical rod panic hardware integrated into doors where physical security is required and free egress is required at all times.
  - 3. Doors with manufacturers' standard hookbolt lock (keyed both sides) where physical security is required and free egress is not required at all times.
    - a. At doors with access control devices, provide doors with electronic deadbolt locking to prevent doors from manually sliding open.
- D. Door Closers: Breakout or swing-out panels with door closers concealed in top rail of door.

## **2.6 POWER UNITS**

- A. Self-contained, electric operated and independent of door operator.
  - 1. Capacity and size of power circuits according to automatic door operator manufacturer's specifications and Division 26 - ELECTRICAL.

## **2.7 DOOR CONTROLS**

- A. Control Devices: BHMA A156.10; control opening and closing functions.
- B. Open doors when control device is actuated; hold doors in open positions; then, close doors after a 5 second period, unless safety device or reactivated control interrupts operation.
- C. Motion Detector:
  - 1. Mounting: Surface or concealed.
  - 2. Detection Area: 1500 mm (60 inches) deep and 1500 mm (60 inches) across, plus or minus 150 mm (6 inches).
  - 3. Response Time: 25 milliseconds, maximum.
  - 4. Control Power: 24 Volt DC.
  - 5. Design units to be unaffected by cleaning material, solvents, dust, dirt and outdoor weather conditions.

## **2.8 SAFETY DEVICES**

- A. Sliding/Folding Doors:
  - 1. Two photoelectric beams mounted at heights of 600 mm (24 inches) and 1200 mm (48 inches) in door frame.

2. Overhead safety presence sensors at door head on both sides of opening.
  3. Recycle doors to full open position when beams are interrupted.
  4. Motion detector mounted on both sides of door for detection of traffic in both direction.
- B. Swing Doors: Install presence sensor on pull side of door to detect any person standing in door swing path and prevent door from opening.
1. Time delay Switches: Adjustable between 3 to 60 seconds and control closing cycle of doors.

### **PART 3 - EXECUTION**

#### **3.1 PREPARATION**

- A. Examine and verify substrate suitability for product installation.
1. Verify door opening is correctly sized and within acceptable tolerances.
- B. Protect existing construction and completed work from damage.

#### **3.2 INSTALLATION**

- A. Install products according to manufacturer's instructions and approved submittal drawings.
1. When manufacturer's instructions deviate from specifications, submit proposed resolution for Contracting Officer's Representative consideration.
- B. Coordinate door installation with other related work.
- C. Install manual controls and power disconnect switches recessed or semi-flush mounted in partitions.
- D. Secure operator components to adjacent construction with suitable fastenings.
- E. Conceal conduits, piping, and electric equipment, in finish work.
- F. Install power units in locations shown.
1. Where units are mounted on walls, provide metal supports or shelves for units.
  2. Ensure equipment, including time delay switches, are accessible for maintenance and adjustment.
- G. Ensure operators are adjusted and function properly for type of expected traffic.
- H. Synchronize each leaf of pair doors to open and close simultaneously. Permit each door leaf to be opened manually, independent of other door leaf.

#### **3.3 DEMONSTRATION AND TRAINING**

- A. Instruct VA personnel in proper automatic door operator operation and maintenance.
1. Trainer: Manufacturer approved instructor.
  2. Training Time: 4 hours minimum.

- B. Coordinate instruction to VA personnel with VA Contracting Officer's Representative.

- - E N D - -

**SECTION 09 29 00****GYPSUM BOARD****PART 1 - GENERAL****1.1 DESCRIPTION**

This section specifies installation and finishing of gypsum board.

**1.2 RELATED WORK**

- A. Installation of steel framing members for walls, partitions, furring, soffits, and ceilings: Section 05 40 00, COLD-FORMED METAL FRAMING, and Section 09 22 16, NON-STRUCTURAL METAL FRAMING.
- B. Sound deadening board: Section 07 21 13, THERMAL INSULATION.
- C. Acoustical Sealants: Section 07 92 00, JOINT SEALANTS.
- D. Gypsum base for veneer plaster: Section 09 26 00, VENEER PLASTERING.
- E. Lead lined wallboard: Section 13 49 00, RADIATION PROTECTION.
- F. Lay in gypsum board ceiling panels: Section 09 51 00, ACOUSTICAL CEILING.

**1.3 TERMINOLOGY**

- A. Definitions and description of terms shall be in accordance with ASTM C11, C840, and as specified.
- B. Underside of Structure Overhead: In spaces where steel trusses or bar joists are shown, the underside of structure overhead shall be the underside of the floor or roof construction supported by the trusses or bar joists.
- C. "Yoked": Gypsum board cut out for opening with no joint at the opening (along door jamb or above the door).

**1.4 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's Literature and Data:
  - 1. Cornerbead and edge trim.
  - 2. Finishing materials.
  - 3. Laminating adhesive.
  - 4. Gypsum board, each type.
- C. Shop Drawings:

1. Typical gypsum board installation, showing corner details, edge trim details and the like.
2. Typical sound rated assembly, showing treatment at perimeter of partitions and penetrations at gypsum board.
3. Typical shaft wall assembly.
4. Typical fire rated assembly and column fireproofing, indicating details of construction same as that used in fire rating test.

D. Samples:

1. Cornerbead.
2. Edge trim.
3. Control joints.

E. Test Results:

1. Fire rating test, each fire rating required for each assembly.
2. Sound rating test.

#### **1.5 DELIVERY, IDENTIFICATION, HANDLING AND STORAGE**

In accordance with the requirements of ASTM C840.

#### **1.6 ENVIRONMENTAL CONDITIONS**

In accordance with the requirements of ASTM C840.

#### **1.7 APPLICABLE PUBLICATIONS**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society for Testing And Materials (ASTM):
- |              |                                                                                                                                                        |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| C11-08.....  | Terminology Relating to Gypsum and Related Building Materials and Systems                                                                              |
| C475-02..... | Joint Compound and Joint Tape for Finishing Gypsum Board                                                                                               |
| C840-08..... | Application and Finishing of Gypsum Board                                                                                                              |
| C919-08..... | Sealants in Acoustical Applications                                                                                                                    |
| C954-07..... | Steel Drill Screws for the Application of Gypsum Board or Metal Plaster Bases to Steel Stud from 0.033 in. (0.84mm) to 0.112 in. (2.84mm) in thickness |



- C1002-07.....Steel Self-Piercing Tapping Screws for the  
Application of Gypsum Panel Products or Metal  
Plaster Bases to Wood Studs or Steel Studs
- C1047-05.....Accessories for Gypsum Wallboard and Gypsum  
Veneer Base
- C1177-06.....Glass Mat Gypsum Substrate for Use as Sheathing
- C1658-06.....Glass Mat Gypsum Panels
- C1396-06.....Gypsum Board
- E84-08.....Surface Burning Characteristics of Building  
Materials
- C. Underwriters Laboratories Inc. (UL):
- Latest Edition.....Fire Resistance Directory
- D. Inchcape Testing Services (ITS):
- Latest Editions.....Certification Listings

## **PART 2 - PRODUCTS**

### **2.1 GYPSUM BOARD**

- A. Gypsum Board: ASTM C1396, Type X, 16 mm (5/8 inch) thick unless shown otherwise. Shall contain a minimum of 20 percent recycled gypsum.
- B. Coreboard or Shaft Wall Liner Panels.
1. ASTM C1396, Type X.
  2. ASTM C1658: Glass Mat Gypsum Panels,
  3. Coreboard for shaft walls 300, 400, 600 mm (12, 16, or 24 inches) wide by required lengths 25 mm (one inch) thick with paper faces treated to resist moisture.
- C. Water Resistant Gypsum Backing Board: ASTM C620, Type X, 16 mm (5/8 inch) thick.
- D. Gypsum cores shall contain a minimum of 95 percent post industrial recycled gypsum content. Paper facings shall contain 100 percent post-consumer recycled paper content.

### **2.2 GYPSUM SHEATHING BOARD**

- A. ASTM C1396, Type X, water-resistant core, 16 mm (5/8 inch) thick.
- B. ASTM C1177, Type X.

### 2.3 ACCESSORIES

- A. ASTM C1047, except form of 0.39 mm (0.015 inch) thick zinc coated steel sheet or rigid PVC plastic.
- B. Flanges not less than 22 mm (7/8 inch) wide with punchouts or deformations as required to provide compound bond.

### 2.4 FASTENERS

- A. ASTM C1002 and ASTM C840, except as otherwise specified.
- B. ASTM C954, for steel studs thicker than 0.04 mm (0.33 inch).
- C. Select screws of size and type recommended by the manufacturer of the material being fastened.
- D. For fire rated construction, type and size same as used in fire rating test.
- E. Clips: Zinc-coated (galvanized) steel; gypsum board manufacturer's standard items.

### 2.5 FINISHING MATERIALS AND LAMINATING ADHESIVE

ASTM C475 and ASTM C840. Free of antifreeze, vinyl adhesives, preservatives, biocides and other VOC. Adhesive shall contain a maximum VOC content of 50 g/l.

## PART 3 - EXECUTION

### 3.1 GYPSUM BOARD HEIGHTS

- A. Extend all layers of gypsum board from floor to underside of structure overhead on following partitions and furring:
  - 1. Two sides of partitions:
    - a. Fire rated partitions.
    - b. Smoke partitions.
    - c. Sound rated partitions.
    - d. Full height partitions shown (FHP).
    - e. Corridor partitions.
  - 2. One side of partitions or furring:
    - a. Inside of exterior wall furring or stud construction.
    - b. Room side of room without suspended ceilings.
    - c. Furring for pipes and duct shafts, except where fire rated shaft wall construction is shown.

3. Extend all layers of gypsum board construction used for fireproofing of columns from floor to underside of structure overhead, unless shown otherwise.
- B. In locations other than those specified, extend gypsum board from floor to heights as follows:
  1. Not less than 100 mm (4 inches) above suspended acoustical ceilings.
  2. At ceiling of suspended gypsum board ceilings.
  3. At existing ceilings.

### **3.2 INSTALLING GYPSUM BOARD**

- A. Coordinate installation of gypsum board with other trades and related work.
- B. Install gypsum board in accordance with ASTM C840, except as otherwise specified.
- C. Moisture and Mold-Resistant Assemblies: Provide and install moisture and mold-resistant glass mat gypsum wallboard products with moisture-resistant surfaces complying with ASTM C1658 where shown and in locations which might be subject to moisture exposure during construction.
- D. Use gypsum boards in maximum practical lengths to minimize number of end joints.
- E. Bring gypsum board into contact, but do not force into place.
- F. Ceilings:
  1. For single-ply construction, use perpendicular application.
  2. For two-ply assemblies:
    - a. Use perpendicular application.
    - b. Apply face ply of gypsum board so that joints of face ply do not occur at joints of base ply with joints over framing members.
- G. Walls (Except Shaft Walls):
  1. When gypsum board is installed parallel to framing members, space fasteners 300 mm (12 inches) on center in field of the board, and 200 mm (8 inches) on center along edges.
  2. When gypsum board is installed perpendicular to framing members, space fasteners 300 mm (12 inches) on center in field and along edges.
  3. Stagger screws on abutting edges or ends.
  4. For single-ply construction, apply gypsum board with long dimension either parallel or perpendicular to framing members as required to

minimize number of joints except gypsum board shall be applied vertically over "Z" furring channels.

5. For two-ply gypsum board assemblies, apply base ply of gypsum board to assure minimum number of joints in face layer. Apply face ply of wallboard to base ply so that joints of face ply do not occur at joints of base ply with joints over framing members.
6. For three-ply gypsum board assemblies, apply plies in same manner as for two-ply assemblies, except that heads of fasteners need only be driven flush with surface for first and second plies. Apply third ply of wallboard in same manner as second ply of two-ply assembly, except use fasteners of sufficient length enough to have the same penetration into framing members as required for two-ply assemblies.
7. No offset in exposed face of walls and partitions will be permitted because of single-ply and two-ply or three-ply application requirements.
8. Installing Two Layer Assembly Over Sound Deadening Board:
  - a. Apply face layer of wallboard vertically with joints staggered from joints in sound deadening board over framing members.
  - b. Fasten face layer with screw, of sufficient length to secure to framing, spaced 300 mm (12 inches) on center around perimeter, and 400 mm (16 inches) on center in the field.
9. Control Joints ASTM C840 and as follows:
  - a. Locate at both side jambs of openings if gypsum board is not "yoked". Use one system throughout.
  - b. Not required for wall lengths less than 9000 mm (30 feet).
  - c. Extend control joints the full height of the wall or length of soffit/ceiling membrane.

#### H. Acoustical or Sound Rated Partitions, Fire and Smoke Partitions:

1. Cut gypsum board for a space approximately 3 mm to 6 mm (1/8 to 1/4 inch) wide around partition perimeter.
2. Coordinate for application of caulking or sealants to space prior to taping and finishing.
3. For sound rated partitions, use sealing compound (ASTM C919) to fill the annular spaces between all receptacle boxes and the partition finish material through which the boxes protrude to seal all holes and/or openings on the back and sides of the boxes. STC minimum values as shown.

#### I. Electrical and Telecommunications Boxes:

1. Seal annular spaces between electrical and telecommunications receptacle boxes and gypsum board partitions.

#### J. Accessories:

1. Set accessories plumb, level and true to line, neatly mitered at corners and intersections, and securely attach to supporting surfaces as specified.
2. Install in one piece, without the limits of the longest commercially available lengths.
3. Corner Beads:
  - a. Install at all vertical and horizontal external corners and where shown.
  - b. Use screws only. Do not use crimping tool.
4. Edge Trim (casings Beads):
  - a. At both sides of expansion and control joints unless shown otherwise.
  - b. Where gypsum board terminates against dissimilar materials and at perimeter of openings, except where covered by flanges, casings or permanently built-in equipment.
  - c. Where gypsum board surfaces of non-load bearing assemblies abut load bearing members.
  - d. Where shown.

### **3.3 INSTALLING GYPSUM SHEATHING**

- A. Install in accordance with ASTM C840, except as otherwise specified or shown.
- B. Use screws of sufficient length to secure sheathing to framing.
- C. Space screws 9 mm (3/8 inch) from ends and edges of sheathing and 200 mm (8 inches) on center. Space screws a maximum of 200 mm (8 inches) on center on intermediate framing members.
- D. Apply 600 mm by 2400 mm (2 foot by 8 foot) sheathing boards horizontally with tongue edge up.
- E. Apply 1200 mm by 2400 mm or 2700 mm (4 ft. by 8 ft. or 9 foot) gypsum sheathing boards vertically with edges over framing.

### **3.4 CAVITY SHAFT WALL**

- A. Coordinate assembly with Section 09 22 16, NON-STRUCTURAL METAL FRAMING, for erection of framing and gypsum board.
- B. For nonbearing for two-hour fire rating walls, conform to UL Design No. U438 or FM WALL CONSTRUCTION 12 for -2/HR. For non-loadbearing one-hour fire rating walls - conform to FM WALL CONSTRUCTION 25-1/HR.
- C. Cut coreboard (liner) panels 25 mm (one inch) less than floor-to-ceiling height, and erect vertically between J-runners on shaft side.

1. Where shaft walls exceed 4300 mm (14 feet) in height, position panel end joints within upper and lower third points of wall.
  2. Stagger joints top and bottom in adjacent panels.
  3. After erection of J-struts of opening frames, fasten panels to J-struts with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.
- D. Gypsum Board:
1. Two hour wall:
    - a. Erect base layer (backing board) vertically on finish side of wall with end joints staggered. Fasten base layer panels to studs with 25 mm (one inch) long screws, spaced 600 mm (24 inches) on center.
    - b. Use laminating adhesive between plies in accordance with UL or FM if required by fire test.
    - c. Apply face layer of gypsum board required by fire test vertically over base layer with joints staggered and attach with screws of sufficient length to secure to framing staggered from those in base, spaced 300 mm (12 inches) on center.
  2. One hour wall with one layer on finish side of wall: Apply face layer of gypsum board vertically. Attach to studs with screws of sufficient length to secure to framing, spaced 300 mm (12 inches) on center in field and along edges.
  3. Where coreboard is covered with face layer of gypsum board, stagger joints of face layer from those in the coreboard base.
- E. Treat joints, corners, and fasteners in face layer as specified for finishing of gypsum board.
- F. Elevator Shafts:
1. Protrusions including fasteners other than flange of shaft wall framing system or offsets from vertical alignments more than 3 mm (1/8-inch) are not permitted unless shown.
  2. Align shaft walls for plumb vertical flush alignment from top to bottom of shaft.

### 3.5 FINISHING OF GYPSUM BOARD

- A. Finish joints, edges, corners, and fastener heads in accordance with ASTM C840. Use Level 5 finish for all finished areas open to public view.
- B. Before proceeding with installation of finishing materials, assure the following:
  1. Gypsum board is fastened and held close to framing or furring.
  2. Fastening heads in gypsum board are slightly below surface in dimple formed by driving tool.

- C. Finish joints, fasteners, and all openings, including openings around penetrations, on that part of the gypsum board extending above suspended ceilings to seal surface of non decorated smoke barrier, fire rated and sound rated and sound rated gypsum board construction. After the installation of hanger rods, hanger wires, supports, equipment, conduits, piping and similar work, seal remaining openings and maintain the integrity of the smoke barrier, fire rated and sound rated construction/ Sanding is not required of non decorated surfaces.

### **3.6 REPAIRS**

- A. After taping and finishing has been completed, and before decoration, repair all damaged and defective work, including nondecorated surfaces.
- B. Patch holes or openings 13 mm (1/2 inch) or less in diameter, or equivalent size, with a setting type finishing compound or patching plaster.
- C. Repair holes or openings over 13 mm (1/2 inch) diameter, or equivalent size, with 16 mm (5/8 inch) thick gypsum board secured in such a manner as to provide solid substrate equivalent to undamaged surface.
- D. Tape and refinish scratched, abraded or damaged finish surfaces including cracks and joints in non decorated surface to provide smoke tight construction or fire protection equivalent to the fire rated construction and STC equivalent to the sound rated construction.

### **3.7 UNACCESSIBLE CEILINGS**

At Mental Health and Behavioral Nursing Units, areas accessible to patients and not continuously observable by staff (e.g., patient bedrooms, day rooms), ceilings should be a solid material such as gypsum board. This will limit patient access. Access doors are needed to access electrical and mechanical equipment above the ceiling. These doors should be locked to prevent unauthorized access and secured to ceiling using tamper resistant fasteners.

- - - E N D - - -

**SECTION 09 66 16**  
**TERRAZZO FLOOR TILE**

**PART 1 - GENERAL**

**1.1 DESCRIPTION:**

- A. This section specifies requirements for terrazzo tile for installation over concrete floors.

**1.2 RELATED WORK:**

- A. Resilient Base: Section 09 65 13, RESILIENT BASE AND ACCESSORIES.
- B. Concrete Floors: Section 03 30 00, CAST-IN-PLACE CONCRETE.
- C. Color, Size, Thickness, Finish and Type: Section 09 06 00, SCHEDULE FOR FINISHES.
- D. Subfloor Testing and Preparation: Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

**1.3 QUALITY ASSURANCE:**

- A. Approval by Contracting Officer Representative (COR) is required of products or service, or proposed manufacturer, suppliers and installers, and will be based upon submission by Contractor of certification that:
  - 1. Manufacturer has manufactured terrazzo tile as one of his principal products for a minimum of three (3) years. Submit list of not less than five (5) installations. List is to include name of project, and owner and location of project. Submit manufacturer's qualifications.
  - 2. Installer has installed terrazzo tile for a minimum of three (3) years. Submit installer's qualifications.

**1.4 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Flooring Manufacturer's Literature and Data: Printed pre-installation and installation instructions for conditions indicated.
- C. Certificates: Indicating materials conform to specified requirements. Indicating flooring manufacturer's approval of underlayment, substrate preparation, adhesive finishes and cleaners.
- D. Samples: Terrazzo Tile each color, size, finish, and type to be used.
- E. Manufacturer's qualifications including list of installations.
- F. Installer's qualifications.
- G. Moisture and pH test results as per Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.
- H. Manufacturer's warranty.

**1.5 DELIVERY:**

- A. Deliver materials to job in manufacturer's original unopened containers, free of damage, with manufacturer's brand name marked thereon.



**1.6 STORAGE:**

- A. Store materials in a protected area. That is kept dry and has a temperature not lower than 18 degrees C (65 degrees F) or higher than 27 degrees C (80 degrees F).

**1.7 PROJECT CONDITIONS:**

- A. Do not install tiles until all other work that could cause damage to the finish flooring has been completed. Acclimate tiles and maintain spaces where tile is to be installed to a temperature of not less than 21 degrees C (70 degrees F) for at least 48 hours before, during and after the installation of tiles. A minimum temperature of 13 degrees C (55 degrees F) is to be maintained thereafter.

**1.8 WARRANTY:**

- A. Construction Warranty: Comply with FAR clause 52.246-21, "Warranty of Construction".

**1.9 APPLICABLE PUBLICATIONS:**

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by basic designation only.
- B. ASTM International (ASTM):
  - C97/C97M-09.....Test Methods for Absorption and Bulk Specific Gravity of Dimension Stone
  - C109/C109M-13.....Compressive Strength of Hydraulic Cement Mortars
  - C501-84 (R2009).....Test Method for Relative Resistance to Wear of Unglazed Ceramic Tile by the Taber Abraser
  - E84-14.....Test Method for Surface Burning Characteristics of Building Materials
  - E90-09.....Standard Test Method for Laboratory Measurement of Airborne Sound Transmission Loss of Building Partitions and Element
  - E413-10.....Classification for Rating Sound Insulation
  - E492-09.....Standard Test Method for Laboratory Measurement of Impact Sound Transmission Through Floor-Ceiling Assemblies Using the Tapping Machine
  - E648-14c.....Critical Radiant Flux of Floor Covering Systems Using a Radiant Heat Energy Source
  - E989-06.....Standard Classification for Determination of Impact Insulation Class
  - F1869-11.....Test Method for Measuring Moisture Vapor Emission Rate of Concrete Subfloor Using Anhydrous Calcium Chloride
  - F2170-11.....Test Method for Determining Relative Humidity in Concrete Floor Slabs Using in Situ Probes
- C. Code of Federal Regulation (CFR):

40 CFR 59.....Determination of Volatile Matter Content, Water Content, Density Volume Solids, and Weight Solids of Surface Coating

D. Tile Council of North America (TCNA):

DCOF AcuTest-2012.....Dynamic Coefficient of Friction Test

## **PART 2 - PRODUCTS**

### **2.1 TERRAZZO TILE:**

- A. Provide terrazzo tile that is of color, size, thickness, finish and type as specified in Section 09 06 00, SCHEDULE FOR FINISHES. Tiles are to consist of gem chips embedded in a rigid thermoset resin matrix. Provide granite chips that are manufacturer's standard gradation.

TERRAZZO TILE PROPERTIES		
PROPERTY	TEST METHOD	VALUE
Compressive strength	ASTM C109/C109M	20 MPa (3000 psi) minimum
Water Absorption	ASTM C97/C97M	0.7 percent maximum
Abrasive Wear	ASTM C501	Index 28
Coefficient of Friction	TCNA DCOF AcuTest	0.42 when wet
Flame Spread	ASTM E84	Class A
Critical Radiant Flux	ASTM E648	Class I

### **2.2 ADHESIVE:**

- A. Provide terrazzo tile manufacturer's standard product or a product recommended by the terrazzo tile manufacturer.
1. Adhesive to have a VOC content of 70 g/L or less when calculated according to 40 CFR 59, (EPA Method 24).

### **2.3 RESILIENT BASE:**

- A. See Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

### **2.4 TERRAZZO BASE/STRIPS:**

- A. Provide terrazzo base/strips matching the requirements of terrazzo tile and being a manufacturer's standard product. Color, size, thickness, finish and type as specified in Section 09 06 00, SCHEDULE FOR FINISHES.

**2.5 METAL EDGE STRIPS:**

- A. Extruded aluminum, butt-type, 38 mm (1-1/2 inches) wide with thickness to set top surface flush with top of tile and with bevel at exposed edge. Edge strips to have countersunk holes, within 12 mm (1/2 inch) of each end and spaced at no more than 203 mm (8 inches) on center for securement.

**PART 3 - EXECUTION****3.1 GENERAL:**

- A. Provide terrazzo tile flooring on floor surfaces and walls where shown on the construction documents. After becoming familiar with details of the work, verify dimensions in the field, and advise the COR of any discrepancy before performing the work.

**3.2 SUBFLOOR TESTING AND PREPARATION:**

- A. Prepare and test surfaces to receive terrazzo floor tile and adhesive as specified in Section 09 05 16, SUBSURFACE PREPARATION FOR FLOOR FINISHES.

**3.3 INSTALLATION:**

- A. Install tile in accordance with the tile manufacturers approved installation instructions, except as specified herein. Lay design symmetrical about center lines of rooms. Joints are to be maximum 0.79 mm (1/32 inch) and in true alignment. Cut tile to fit snugly at pipes and other fixed vertical surfaces. Seal joints at pipes with silicone. Remove spots or smears of adhesive immediately. Make entire surfaces of finished tile floors smooth, straight, and free from bleeding adhesive, buckles, waves or projecting tile edges upon completion.
- B. Metal Edge Strips: Secure strips with No. 10 aluminum alloy, counter sunk flathead machine screws with expansion sleeves. Provide metal edge strips, in one (1) piece, at any exposed edges of tile.
- C. Terrazzo Base/Strips: Continuous and adhesively applied. Joints are to be tight and formed in same manner as floor tile.
- D. Premolded Base: As specified in Section 09 65 13, RESILIENT BASE AND ACCESSORIES.

**3.4 CLEANING:**

- A. Upon completion and after adhesive has cured, clean flooring in accordance with manufacturer's recommendations.

**3.5 PROTECTION:**

- A. From the time of laying until acceptance, protect the flooring from damage. Replace damaged, loose, broken, or curled tiles. Except as necessary to install new tile, keep all traffic off new tile for at least 24 hours after installation.

- - - E N D - - -

**SECTION 09 91 00****PAINTING****PART 1 - GENERAL****1.1 DESCRIPTION:**

- A. Work of this Section includes all labor, materials, equipment, and services necessary to complete the painting and finishing as shown on the construction documents and/or specified herein, including, but not limited to, the following:
1. Prime coats which may be applied in shop under other sections.
  2. Prime painting unprimed surfaces to be painted under this Section.
  3. Painting items furnished with a prime coat of paint, including touching up of or repairing of abraded, damaged or rusted prime coats applied by others.
  4. Painting gypsum drywall exposed to view.
  5. Painting of wood exposed to view, except items which are specified to be painted or finished under other Sections of these specifications. Back painting of all wood in contact with concrete, masonry or other moisture areas.
  6. Painting includes shellacs, stains, varnishes, coatings specified, and striping or markers and identity markings.
  7. Incidental painting and touching up as required to produce proper finish for painted surfaces, including touching up of factory finished items.
  8. Painting of any surface not specifically mentioned to be painted herein or on construction documents, but for which painting is obviously necessary to complete the job, or work which comes within the intent of these specifications, is to be included as though specified.

**1.2 RELATED WORK:**

- A. Activity Hazard Analysis: Section 01 35 26, SAFETY REQUIREMENTS.
- Division 10 - SPECIALTIES; Division 11 - EQUIPMENT; Division 12 - FURNISHINGS; Division 22 - PLUMBING; Division 26 - ELECTRICAL; Division 27 - COMMUNICATIONS; and Division 28 - ELECTRONIC SAFETY AND SECURITY sections.
- B. Type of Finish, Color, and Gloss Level of Finish Coat: see Finish Schedule.

**1.3 SUBMITTALS:**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

**PART 2 - PRODUCTS.**

- C. Painter qualifications.
- D. Manufacturer's Literature and Data:

1. Before work is started, or sample panels are prepared, submit manufacturer's literature and technical data, the current Master Painters Institute (MPI) "Approved Product List" indicating brand label, product name and product code as of the date of contract award, will be used to determine compliance with the submittal requirements of this specification. The Contractor may choose to use subsequent MPI "Approved Product List", however, only one (1) list may be used for the entire contract and each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer. No variation from the MPI "Approved Product List" where applicable is acceptable.

E. Sample Panels:

1. After painters' materials have been approved and before work is started submit sample panels showing each type of finish and color specified.
2. Panels to Show Color: Composition board, 100 x 250 mm (4 x 10 inch).
3. Panel to Show Transparent Finishes: Wood of same species and grain pattern as wood approved for use, 100 x 250 mm (4 x 10 inch face) minimum, and where both flat and edge grain will be exposed, 250 mm (10 inches) long by sufficient size, 50 x 50 mm (2 x 2 inch) minimum or actual wood member to show complete finish.
4. Attach labels to panel stating the following:
  - a. Federal Specification Number or manufacturers name and product number of paints used.
  - b. Specification code number specified in Section 09 06 00, SCHEDULE FOR FINISHES.
  - c. Product type and color.
  - d. Name of project.
5. Strips showing not less than 50 mm (2 inch) wide strips of undercoats and 100 mm (4 inch) wide strip of finish coat.

F. Sample of identity markers if used.

G. Manufacturers' Certificates indicating compliance with specified requirements:

1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified.
2. High temperature aluminum paint.
3. Epoxy coating.
4. Intumescent clear coating or fire retardant paint.
5. Plastic floor coating.

**1.4 DELIVERY AND STORAGE:**

- A. Deliver materials to site in manufacturer's sealed container marked to show following:
1. Name of manufacturer.
  2. Product type.
  3. Batch number.

4. Instructions for use.
  5. Safety precautions.
- B. In addition to manufacturer's label, provide a label legibly printed as following:
1. Federal Specification Number, where applicable, and name of material.
  2. Surface upon which material is to be applied.
  3. Specify Coat Types: Prime; body; finish; etc.
- C. Maintain space for storage, and handling of painting materials and equipment in a ventilated, neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.
- D. Store materials at site at least 24 hours before using, at a temperature between 7 and 30 degrees C (45 and 85 degrees F).

#### **1.5 QUALITY ASSURANCE:**

- A. Qualification of Painters: Use only qualified journeyman painters for the mixing and application of paint on exposed surfaces. Submit evidence that key personnel have successfully performed surface preparation and application of coating on a minimum of three (3) similar projects within the past three (3) years.
- B. Paint Coordination: Provide finish coats which are compatible with the prime paints used. Review other Sections of these specifications in which prime paints are to be provided to ensure compatibility of the total coatings system for the various substrates. Upon request from other subcontractors, furnish information on the characteristics of the finish materials proposed to be used, to ensure that compatible prime coats are used. Provide barrier coats over incompatible primers or remove and re-prime as required. Notify the Contracting Officer Representative (COR) in writing of any anticipated problems using the coating systems as specified with substrates primed by others.

#### **1.6 MOCK-UP PANEL:**

- A. In addition to the samples specified herein to be submitted for approval, apply in the field, at their final location, each type and color of approved paint materials, applied 3.05 m (10 feet) wide, floor to ceiling of wall surfaces, before proceeding with the remainder of the work, for approval by the COR. Paint mock-ups to include one (1) door and frame assembly.
- B. Finish and texture approved by COR will be used as a standard of quality and workmanship for remainder of work.
- C. Repaint individual areas which are not approved, as determined by the COR, until approval is received.

#### **1.7 REGULATORY REQUIREMENTS:**

- A. Paint materials are to conform to the restrictions of the local Environmental and Toxic Control jurisdiction.
1. Volatile Organic Compounds (VOC) Emissions Requirements:  
Field-applied paints and coatings that are inside the waterproofing system to not exceed limits of authorities having jurisdiction.
  2. Lead-Base Paint:

- a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.
  - b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.
  - c. Do not use coatings having a lead content over 0.06 percent by weight of non-volatile content.
  - d. For lead-paint removal, see Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
- 3. Asbestos: Provide materials that do not contain asbestos.
  - 4. Chromate, Cadmium, Mercury, and Silica: Provide materials that do not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
  - 5. Human Carcinogens: Provide materials that do not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
  - 6. Use high performance acrylic paints in place of alkyd paints.

#### **1.8 SAFETY AND HEALTH**

- A. Apply paint materials using safety methods and equipment in accordance with the following:
  - 1. Comply with applicable Federal, State, and local laws and regulations, and with the ACCIDENT PREVENTION PLAN, including the Activity Hazard Analysis (AHA) as specified in Section 01 35 26, SAFETY REQUIREMENTS. The AHA is to include analyses of the potential impact of painting operations on painting personnel and on others involved in and adjacent to the work zone.
- B. Safety Methods Used During Paint Application: Comply with the requirements of SSPC PA Guide 10.
- C. Toxic Materials: To protect personnel from overexposure to toxic materials, conform to the most stringent guidance of:
  - 1. The applicable manufacturer's Material Safety Data Sheets (MSDS) or local regulation.
  - 2. 29 CFR 1910.1000.
  - 3. ACGIH-BKLT and ACGHI-DOC, threshold limit values.

#### **1.9 APPLICABLE PUBLICATIONS:**

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. American Conference of Governmental Industrial Hygienists (ACGIH):
  - ACGIH TLV-BKLT-2012.....Threshold Limit Values (TLV) for Chemical Substances and Physical Agents and Biological Exposure Indices (BEIs)
  - ACGIH TLV-DOC-2012.....Documentation of Threshold Limit Values and Biological Exposure Indices, (Seventh Edition)

## C. ASME International (ASME):

A13.1-07(R2013).....Scheme for the Identification of Piping Systems

## D. Code of Federal Regulation (CFR):

40 CFR 59.....Determination of Volatile Matter Content, Water  
Content, Density Volume Solids, and Weight  
Solids of Surface Coating

## E. Commercial Item Description (CID):

A-A-1272A.....Plaster Gypsum (Spackling Compound)

## F. Federal Specifications (Fed Spec):

TT-P-1411A.....Paint, Copolymer-Resin, Cementitious (For  
Waterproofing Concrete and Masonry Walls) (CEP)

## G. Master Painters Institute (MPI):

1.....Aluminum Paint

4.....Interior/ Exterior Latex Block Filler

5.....Exterior Alkyd Wood Primer

7.....Exterior Oil Wood Primer

8.....Exterior Alkyd, Flat MPI Gloss Level 1

9.....Exterior Alkyd Enamel MPI Gloss Level 6

10.....Exterior Latex, Flat

11.....Exterior Latex, Semi-Gloss

18.....Organic Zinc Rich Primer

22.....Aluminum Paint, High Heat (up to 590° - 1100F)

27.....Exterior / Interior Alkyd Floor Enamel, Gloss

31.....Polyurethane, Moisture Cured, Clear Gloss

36.....Knot Sealer

43.....Interior Satin Latex, MPI Gloss Level 4

44.....Interior Low Sheen Latex, MPI Gloss Level 2

45.....Interior Primer Sealer

46.....Interior Enamel Undercoat

47.....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5

48.....Interior Alkyd, Gloss, MPI Gloss Level 6

50.....Interior Latex Primer Sealer

51.....Interior Alkyd, Eggshell, MPI Gloss Level 3

52.....Interior Latex, MPI Gloss Level 3

53.....Interior Latex, Flat, MPI Gloss Level 1

54.....Interior Latex, Semi-Gloss, MPI Gloss Level 5

59.....Interior/Exterior Alkyd Porch & Floor Enamel,  
Low Gloss



- 60.....Interior/Exterior Latex Porch & Floor Paint,  
Low Gloss
  - 66.....Interior Alkyd Fire Retardant, Clear Top-Coat  
(ULC Approved)
  - 67.....Interior Latex Fire Retardant, Top-Coat (ULC  
Approved)
  - 68.....Interior/ Exterior Latex Porch & Floor Paint,  
Gloss
  - 71.....Polyurethane, Moisture Cured, Clear, Flat
  - 77.....Epoxy Cold Cured, Gloss
  - 79.....Marine Alkyd Metal Primer
  - 90.....Interior Wood Stain, Semi-Transparent
  - 91.....Wood Filler Paste
  - 94.....Exterior Alkyd, Semi-Gloss
  - 95.....Fast Drying Metal Primer
  - 98.....High Build Epoxy Coating
  - 101.....Epoxy Anti-Corrosive Metal Primer
  - 108.....High Build Epoxy Coating, Low Gloss
  - 114.....Interior Latex, Gloss
  - 119.....Exterior Latex, High Gloss (acrylic)
  - 134.....Galvanized Water Based Primer
  - 135.....Non-Cementitious Galvanized Primer
  - 138.....Interior High Performance Latex, MPI Gloss  
Level 2
  - 139.....Interior High Performance Latex, MPI Gloss  
Level 3
  - 140.....Interior High Performance Latex, MPI Gloss  
Level 4
  - 141.....Interior High Performance Latex (SG) MPI Gloss  
Level 5
  - 163.....Exterior Water Based Semi-Gloss Light  
Industrial Coating, MPI Gloss Level 5
- G. Society for Protective Coatings (SSPC):
- SSPC SP 1-82(R2004).....Solvent Cleaning
  - SSPC SP 2-82(R2004).....Hand Tool Cleaning
  - SSPC SP 3-28(R2004).....Power Tool Cleaning
  - SSPC SP 10/NACE No.2.....Near-White Blast Cleaning
  - SSPC PA Guide 10.....Guide to Safety and Health Requirements
- H. Maple Flooring Manufacturer's Association (MFMA):
- I. U.S. National Archives and Records Administration (NARA):

29 CFR 1910.1000.....Air Contaminants

J. Underwriter's Laboratory (UL)

## **PART 2 - PRODUCTS**

### **2.1 MATERIALS:**

- A. Conform to the coating specifications and standards referenced in PART 3. Submit manufacturer's technical data sheets for specified coatings and solvents.

### **2.2 PAINT PROPERTIES:**

- A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.
- B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.
- C. Provide undercoat paint produced by the same manufacturer as the finish coats. Use only thinners approved by the paint manufacturer, and use only to recommended limits.
- D. VOC Content: For field applications that are inside the weatherproofing system, paints and coating to comply with VOC content limits of authorities having jurisdiction and the following VOC content limits:
  - 1. Flat Paints and Coatings: 50 g/L.
  - 2. Non-flat Paints and Coatings: 150 g/L.
  - 3. Dry-Fog Coatings: 400 g/L.
  - 4. Primers, Sealers, and Undercoaters: 200 g/L.
  - 5. Anticorrosive and Antirust Paints applied to Ferrous Metals: 250 g/L.
  - 6. Zinc-Rich Industrial Maintenance Primers: 340 g/L.
  - 7. Pretreatment Wash Primers: 420 g/L.
  - 8. Shellacs, Clear: 730 g/L.
  - 9. Shellacs, Pigmented: 550 g/L.
- E. VOC test method for paints and coatings is to be in accordance with 40 CFR 59 (EPA Method 24). Part 60, Appendix A with the exempt compounds' content determined by Method 303 (Determination of Exempt Compounds) in the South Coast Air Quality Management District's (SCAQMD) "Laboratory Methods of Analysis for Enforcement Samples" manual.

### **2.3 PLASTIC TAPE:**

- A. Pigmented vinyl plastic film in colors as specified in Section 09 06 00, SCHEDULE FOR FINISHES or specified.
- B. Pressure sensitive adhesive back.
- D. Widths as shown on construction documents.

#### 1.4 Biobased Content

A. Paint products shall comply with following bio-based standards for biobased materials:

Material Type	Percent by Weight
Interior Paint	20 percent biobased material
Interior Paint- Oil Based and Solvent Alkyd	67 percent biobased material
Exterior Paint	20 percent biobased material
Wood & Concrete Stain	39 percent biobased content
Polyurethane Coatings	25 percent biobased content
Water Tank Coatings	59 percent biobased content
Wood & Concrete Sealer-Membrane Concrete Sealers	11 percent biobased content
Wood & Concrete Sealer-Penetrating Liquid	79 percent biobased content

B. The minimum-content standards are based on the weight (not the volume) of the material.

### PART 3 - EXECUTION

#### 3.1 JOB CONDITIONS:

A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.

1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each day's work.

B. Atmospheric and Surface Conditions:

1. Do not apply coating when air or substrate conditions are:
  - a. Less than 3 degrees C (5 degrees F) above dew point.
  - b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the COR and the product manufacturer. Under no circumstances are application conditions to exceed manufacturer recommendations.
  - c. When the relative humidity exceeds 85 percent; or to damp or wet surfaces; unless otherwise permitted by the paint manufacturer's printed instructions.

2. Maintain interior temperatures until paint dries hard.
3. Do no exterior painting when it is windy and dusty.
4. Do not paint in direct sunlight or on surfaces that the sun will warm.
5. Apply only on clean, dry and frost free surfaces except as follows:
  - a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces only when allowed by manufacturer's printed instructions.
  - b. Concrete and masonry when permitted by manufacturer's recommendations, dampen surfaces to which water thinned acrylic and cementitious paints are applied with a fine mist of water on hot dry days to prevent excessive suction and to cool surface.
6. Varnishing:
  - a. Apply in clean areas and in still air.
  - b. Before varnishing vacuum and dust area.
  - c. Immediately before varnishing wipe down surfaces with a tack rag.

### **3.2 INSPECTION:**

- A. Examine the areas and conditions where painting and finishing are to be applied and correct any conditions detrimental to the proper and timely completion of the work. Do not proceed with the work until unsatisfactory conditions are corrected to permit proper installation of the work.

### **3.3 GENERAL WORKMANSHIP REQUIREMENTS:**

- A. Application may be by brush or roller. Spray application only upon acceptance from the COR in writing.
- B. Furnish to the COR a painting schedule indicating when the respective coats of paint for the various areas and surfaces will be completed. This schedule is to be kept current as the job progresses.
- C. Protect work at all times. Protect all adjacent work and materials by suitable covering or other method during progress of work. Upon completion of the work, remove all paint and varnish spots from floors, glass and other surfaces. Remove from the premises all rubbish and accumulated materials of whatever nature not caused by others and leave work in a clean condition.
- D. Remove and protect hardware, accessories, device plates, lighting fixtures, and factory finished work, and similar items, or provide in place protection. Upon completion of each space, carefully replace all removed items by workmen skilled in the trades involved.
- E. When indicated to be painted, remove electrical panel box covers and doors before painting walls. Paint separately and re-install after all paint is dry.
- F. Materials are to be applied under adequate illumination, evenly spread and flowed on smoothly to avoid runs, sags, holidays, brush marks, air bubbles and excessive roller stipple.
- G. Apply materials with a coverage to hide substrate completely. When color, stain, dirt or undercoats show through final coat of paint, the surface is to be covered by additional coats until the paint film is of

uniform finish, color, appearance and coverage, at no additional cost to the Government.

- H. All coats are to be dry to manufacturer's recommendations before applying succeeding coats.
- I. All suction spots or "hot spots" in plaster after the application of the first coat are to be touched up before applying the second coat.
- J. Do not apply paint behind frameless mirrors that use mastic for adhering to wall surface.

### **3.4 SURFACE PREPARATION:**

#### **A. General:**

- 1. The Contractor shall be held wholly responsible for the finished appearance and satisfactory completion of painting work. Properly prepare all surfaces to receive paint, which includes cleaning, sanding, and touching-up of all prime coats applied under other Sections of the work. Broom clean all spaces before painting is started. All surfaces to be painted or finished are to be completely dry, clean and smooth.
- 2. See other sections of specifications for specified surface conditions and prime coat.
- 3. Perform preparation and cleaning procedures in strict accordance with the paint manufacturer's instructions and as herein specified, for each particular substrate condition.
- 4. Clean surfaces before applying paint or surface treatments with materials and methods compatible with substrate and specified finish. Remove any residue remaining from cleaning agents used. Do not use solvents, acid, or steam on concrete and masonry. Schedule the cleaning and painting so that dust and other contaminants from the cleaning process will not fall in wet, newly painted surfaces.
- 5. Maximum Moisture Content of Substrates: When measured with an electronic moisture meter as follows:
  - a. Concrete: 12 percent.
  - b. Fiber-Cement Board: 12 percent.
  - c. Masonry (Clay and CMU's): 12 percent.
  - d. Wood: 15 percent.
  - e. Gypsum Board: 12 percent.
  - f. Plaster: 12 percent.

#### **B. Wood:**

- 1. Sand to a smooth even surface and then dust off.
- 2. Sand surfaces showing raised grain smooth between each coat.
- 3. Wipe surface with a tack rag prior to applying finish.
- 4. Surface painted with an opaque finish:
  - a. Coat knots, sap and pitch streaks with MPI 36 (Knot Sealer) before applying paint.

- b. Apply two coats of MPI 36 (Knot Sealer) over large knots.
- 5. After application of prime or first coat of stain, fill cracks, nail and screw holes, depressions and similar defects with wood filler paste. Sand the surface to make smooth and finish flush with adjacent surface.
- 6. Before applying finish coat, reapply wood filler paste if required, and sand surface to remove surface blemishes. Finish flush with adjacent surfaces.
- 7. Fill open grained wood such as oak, walnut, ash and mahogany with MPI 91 (Wood Filler Paste), colored to match wood color.
  - a. Thin filler in accordance with manufacturer's instructions for application.
  - b. Remove excess filler, wipe as clean as possible, dry, and sand as specified.
- C. Gypsum Plaster and Gypsum Board:
  - 1. Remove efflorescence, loose and chalking plaster or finishing materials.
  - 2. Remove dust, dirt, and other deterrents to paint adhesion.
  - 3. Fill holes, cracks, and other depressions with CID-A-A-1272A finished flush with adjacent surface, with texture to match texture of adjacent surface. Patch holes over 25 mm (1-inch) in diameter as specified in Section for plaster or gypsum board.

### 3.5 PAINT PREPARATION:

- A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
- B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.
- C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.
- D. Mix two (2) component and two (2) part paint and those requiring additives in such a manner as to uniformly blend as specified in manufacturer's printed instructions unless specified otherwise.
- E. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

### 3.6 APPLICATION:

- A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.
- B. Unless otherwise specified, apply paint in three (3) coats; prime, body, and finish. When two (2) coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.
- C. Apply each coat evenly and cover substrate completely.

- D. Allow not less than 48 hours between application of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by COR.
- E. Apply by brush or roller.
  - 1. Apply painting materials specifically required by manufacturer to be applied by spraying.
  - 2. In new construction and in existing occupied spaces, where paint is applied by spray, mask or enclose with polyethylene, or similar air tight material with edges and seams continuously sealed including items specified in "Building and Structural Work Field Painting"; "Work not Painted"; motors, controls, telephone, and electrical equipment, fronts of sterilizes and other recessed equipment and similar prefinished items.
- F. Do not paint in closed position operable items such as access doors and panels, window sashes, overhead doors, and similar items except overhead roll-up doors and shutters.

### **3.7 PRIME PAINTING:**

- A. After surface preparation, prime surfaces before application of body and finish coats, except as otherwise specified.
- B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.
- C. Additional field applied prime coats over shop or factory applied prime coats are not required except for exterior exposed steel apply an additional prime coat.
- D. Prime rabbets for stop and face glazing of wood, and for face glazing of steel.
- E. Wood and Wood Particleboard:
  - 1. Use same kind of primer specified for exposed face surface.
    - a. Exterior wood: MPI 7 (Exterior Oil Wood Primer) for new construction and MPI 5 (Exterior Alkyd Wood Primer) for repainting bare wood primer except where MPI 90 (Interior Wood Stain, Semi-Transparent) is scheduled.
    - b. Interior wood except for transparent finish: MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat), thinned if recommended by manufacturer.
  - 2. Apply two (2) coats of primer MPI 7 (Exterior Oil Wood Primer) or MPI 5 (Exterior Alkyd Wood Primer) or sealer MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat) to surfaces of wood doors, including top and bottom edges, which are cut for fitting or for other reason.
  - 3. Apply one (1) coat of primer MPI 7 (Exterior Oil Wood Primer) or MPI 5 (Exterior Alkyd Wood Primer) or sealer MPI 45 (Interior Primer Sealer) or MPI 46 (Interior Enamel Undercoat) as soon as delivered to site to surfaces of unfinished woodwork, except concealed surfaces of shop fabricated or assembled millwork and surfaces specified to have varnish, stain or natural finish.

4. Back prime and seal ends of exterior woodwork, and edges of exterior plywood specified to be finished.
5. Apply MPI 67 (Interior Latex Fire Retardant, Top-Coat (UL Approved) to wood for fire retardant finish.

F. Metals except boilers, incinerator stacks, and engine exhaust pipes:

G. Gypsum Board

1. Surfaces scheduled to have **MPI 54 (Interior Latex, Semi-Gloss, MPI Gloss Level 5)**

### 3.9 INTERIOR FINISHES:

A. Apply following finish coats over prime coats in spaces or on surfaces specified in Section 09 06 00, SCHEDULE FOR FINISHES.

C. Gypsum Board:

1. Two (2) coats of MPI 138 (Interior High Performance Latex, MPI Gloss Level 2).

F. Wood:

1. Sanding:

- a. Use 220-grit sandpaper.
- b. Sand sealers and varnish between coats.
- c. Sand enough to scarify surface to assure good adhesion of subsequent coats, to level roughly applied sealer and varnish, and to knock off "whiskers" of any raised grain as well as dust particles.

2. Sealers:

- a. MPI 31 (gloss) or MPI 71 (flat) thinned as recommended by manufacturer at rate of one (1) part of thinner to four (4) parts of varnish.
- b. Apply sealers specified except sealer may be omitted where pigmented, penetrating, or wiping stains containing resins are used.
- c. Allow manufacturer's recommended drying time before sanding, but not less than 24 hours or 36 hours in damp or muggy weather.
- d. Sand as specified.

3. Paint Finish:

Two (2) coats of MPI 51 (Interior Alkyd, Eggshell).



**3.13 BUILDING AND STRUCTURAL WORK FIELD PAINTING:**

- A. Painting and finishing of interior and exterior work except as specified here-in-after.
  - 1. Painting and finishing of new and existing work including colors and gloss of finish selected is specified in Finish Schedule, Section 09 06 00, SCHEDULE FOR FINISHES.
  - 2. Painting of disturbed, damaged and repaired or patched surfaces when entire space is not scheduled for complete repainting or refinishing.
  - 3. Painting of ferrous metal and galvanized metal.
  - 4. Painting of wood with fire retardant paint exposed in attics, when used as mechanical equipment space (except shingles).
  - 5. Identity painting and safety painting.
- B. Building and Structural Work not Painted:
  - 1. Prefinished items:
    - a. Casework, doors, elevator entrances and cabs, metal panels, wall covering, and similar items specified factory finished under other sections.

**3.14 PROTECTION CLEAN UP, AND TOUCH-UP:**

- A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.
- B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.
- C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

**SECTION 26 05 11****REQUIREMENTS FOR ELECTRICAL INSTALLATIONS****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. This section applies to all sections of Division 26.
- B. Furnish and install electrical systems, materials, equipment, and accessories in accordance with the specifications.
- C. Conductor ampacities are based on copper conductors, with the conduit and raceways sized per NEC. Aluminum conductors are prohibited.

**1.2 MINIMUM REQUIREMENTS**

- A. The latest International Building Code (IBC), Underwriters Laboratories, Inc. (UL), Institute of Electrical and Electronics Engineers (IEEE), and National Fire Protection Association (NFPA) codes and standards are the minimum requirements for materials and installation.
- B. The drawings and specifications shall govern in those instances where requirements are greater than those stated in the above codes and standards.

**1.3 TEST STANDARDS**

- A. All materials and equipment shall be listed, labeled, or certified by a Nationally Recognized Testing Laboratory (NRTL) to meet Underwriters Laboratories, Inc. (UL), standards where test standards have been established. Materials and equipment which are not covered by UL standards will be accepted, providing that materials and equipment are listed, labeled, certified or otherwise determined to meet the safety requirements of a NRTL. Materials and equipment which no NRTL accepts, certifies, lists, labels, or determines to be safe, will be considered if inspected or tested in accordance with national industrial standards, such as ANSI, NEMA, and NETA. Evidence of compliance shall include certified test reports and definitive shop drawings.
- B. Definitions:
  - 1. Listed: Materials and equipment included in a list published by an organization that is acceptable to the Authority Having Jurisdiction and concerned with evaluation of products or services, that maintains periodic inspection of production or listed materials and equipment or periodic evaluation of services, and whose listing states that the materials and equipment either meets appropriate designated standards or has been tested and found suitable for a specified purpose.
  - 2. Labeled: Materials and equipment to which has been attached a label, symbol, or other identifying mark of an organization that is acceptable to the Authority Having Jurisdiction and concerned with product evaluation, that maintains periodic inspection of production of labeled materials and equipment, and by whose labeling the manufacturer indicates compliance with appropriate standards or performance in a specified manner.
  - 3. Certified: Materials and equipment which:

- a. Have been tested and found by a NRTL to meet nationally recognized standards or to be safe for use in a specified manner.
  - b. Are periodically inspected by a NRTL.
  - c. Bear a label, tag, or other record of certification.
4. Nationally Recognized Testing Laboratory: Testing laboratory which is recognized and approved by the Secretary of Labor in accordance with OSHA regulations.

#### **1.4 QUALIFICATIONS (PRODUCTS AND SERVICES)**

- A. Manufacturer's Qualifications: The manufacturer shall regularly and currently produce, as one of the manufacturer's principal products, the materials and equipment specified for this project, and shall have manufactured the materials and equipment for at least three years.
- B. Product Qualification:
- 1. Manufacturer's materials and equipment shall have been in satisfactory operation, on three installations of similar size and type as this project, for at least three years.
  - 2. The Government reserves the right to require the Contractor to submit a list of installations where the materials and equipment have been in operation before approval.
- C. Service Qualifications: There shall be a permanent service organization maintained or trained by the manufacturer which will render satisfactory service to this installation within four hours of receipt of notification that service is needed. Submit name and address of service organizations.

#### **1.5 APPLICABLE PUBLICATIONS**

- A. Applicable publications listed in all Sections of Division 26 shall be the latest issue, unless otherwise noted.
- B. Products specified in all sections of Division 26 shall comply with the applicable publications listed in each section.

#### **1.6 MANUFACTURED PRODUCTS**

- A. Materials and equipment furnished shall be of current production by manufacturers regularly engaged in the manufacture of such items, and for which replacement parts shall be available. Materials and equipment furnished shall be new, and shall have superior quality and freshness.
- B. When more than one unit of the same class or type of materials and equipment is required, such units shall be the product of a single manufacturer.
- C. Equipment Assemblies and Components:
- 1. Components of an assembled unit need not be products of the same manufacturer.
  - 2. Manufacturers of equipment assemblies, which include components made by others, shall assume complete responsibility for the final assembled unit.
  - 3. Components shall be compatible with each other and with the total assembly for the intended service.

4. Constituent parts which are similar shall be the product of a single manufacturer.
- D. Factory wiring and terminals shall be identified on the equipment being furnished and on all wiring diagrams.
- E. When Factory Tests are specified, Factory Tests shall be performed in the factory by the equipment manufacturer, and witnessed by the contractor. In addition, the following requirements shall be complied with:
  1. The Government shall have the option of witnessing factory tests. The Contractor shall notify the Government through the COR a minimum of thirty (30) days prior to the manufacturer's performing of the factory tests.
  2. When factory tests are successful, contractor shall furnish four (4) copies of the equipment manufacturer's certified test reports to the COR fourteen (14) days prior to shipment of the equipment, and not more than ninety (90) days after completion of the factory tests.
  3. When factory tests are not successful, factory tests shall be repeated in the factory by the equipment manufacturer, and witnessed by the Contractor. The Contractor shall be liable for all additional expenses for the Government to witness factory re-testing.

#### **1.7 VARIATIONS FROM CONTRACT REQUIREMENTS**

- A. Where the Government or the Contractor requests variations from the contract requirements, the connecting work and related components shall include, but not be limited to additions or changes to branch circuits, circuit protective devices, conduits, wire, feeders, controls, panels and installation methods.

#### **1.8 MATERIALS AND EQUIPMENT PROTECTION**

- A. Materials and equipment shall be protected during shipment and storage against physical damage, vermin, dirt, corrosive substances, fumes, moisture, cold and rain.
  1. Store materials and equipment indoors in clean dry space with uniform temperature to prevent condensation.
  2. During installation, equipment shall be protected against entry of foreign matter, and be vacuum-cleaned both inside and outside before testing and operating. Compressed air shall not be used to clean equipment. Remove loose packing and flammable materials from inside equipment.
  3. Damaged equipment shall be repaired or replaced, as determined by the COR.
  4. Painted surfaces shall be protected with factory installed removable heavy kraft paper, sheet vinyl or equal.
  5. Damaged paint on equipment shall be refinished with the same quality of paint and workmanship as used by the manufacturer so repaired areas are not obvious.

#### **1.9 WORK PERFORMANCE**

- A. All electrical work shall comply with requirements of the latest NFPA 70 (NEC), NFPA 70B, NFPA 70E, NFPA 99, NFPA 110, OSHA Part 1910 subpart

J - General Environmental Controls, OSHA Part 1910 subpart K - Medical and First Aid, and OSHA Part 1910 subpart S - Electrical, in addition to other references required by contract.

- B. Job site safety and worker safety is the responsibility of the Contractor.
- C. Electrical work shall be accomplished with all affected circuits or equipment de-energized.
- D. For work that affects existing electrical systems, arrange, phase and perform work to assure minimal interference with normal functioning of the facility. Refer to Article OPERATIONS AND STORAGE AREAS under Section 01 00 00, GENERAL REQUIREMENTS.
- E. New work shall be installed and connected to existing work neatly, safely and professionally. Disturbed or damaged work shall be replaced or repaired to its prior conditions, as required by Section 01 00 00, GENERAL REQUIREMENTS.
- F. Coordinate location of equipment and conduit with other trades to minimize interference.

#### **1.10 EQUIPMENT INSTALLATION AND REQUIREMENTS**

- A. Equipment location shall be as close as practical to locations shown on the drawings.
- B. Working clearances shall not be less than specified in the NEC.
- C. Inaccessible Equipment:
  - 1. Where the Government determines that the Contractor has installed equipment not readily accessible for operation and maintenance, the equipment shall be removed and reinstalled as directed at no additional cost to the Government.
  - 2. "Readily accessible" is defined as being capable of being reached quickly for operation, maintenance, or inspections without the use of ladders, or without climbing or crawling under or over obstacles such as, but not limited to, motors, pumps, belt guards, transformers, piping, ductwork, conduit and raceways.
- D. Electrical service entrance equipment and arrangements for temporary and permanent connections to the electric utility company's system shall conform to the electric utility company's requirements. Coordinate fuses, circuit breakers and relays with the electric utility company's system, and obtain electric utility company approval for sizes and settings of these devices.

#### **1.11 EQUIPMENT IDENTIFICATION**

- A. In addition to the requirements of the NEC, update any panel sheet which clearly indicates information required for use and maintenance of items such as switchboards and switchgear, panelboards, cabinets, motor controllers, fused and non-fused safety switches, generators, automatic transfer switches, separately enclosed circuit breakers, individual breakers and controllers in switchboards, switchgear and motor control assemblies, control devices and other significant equipment.

#### **1.12 SUBMITTALS**

- A. Submit to the COR in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

- B. The Government's approval shall be obtained for all materials and equipment before delivery to the job site. Delivery, storage or installation of materials and equipment which has not had prior approval will not be permitted.
- C. The submittals shall include the following:
1. Information that confirms compliance with contract requirements. Include the manufacturer's name, model or catalog numbers, catalog information, technical data sheets, shop drawings, manuals, pictures, nameplate data, and test reports as required.
  2. Elementary and interconnection wiring diagrams for communication and signal systems, control systems, and equipment assemblies. All terminal points and wiring shall be identified on wiring diagrams.
  3. Parts list which shall include information for replacement parts and ordering instructions, as recommended by the equipment manufacturer.
- D. Maintenance and Operation Manuals:
1. Submit as required for systems and equipment specified in the technical sections. Furnish in hardcover binders or an approved equivalent.
  2. Inscribe the following identification on the cover: the words "MAINTENANCE AND OPERATION MANUAL," the name and location of the system, material, equipment, building, name of Contractor, and contract name and number. Include in the manual the names, addresses, and telephone numbers of each subcontractor installing the system or equipment and the local representatives for the material or equipment.
  3. Provide a table of contents and assemble the manual to conform to the table of contents, with tab sheets placed before instructions covering the subject. The instructions shall be legible and easily read, with large sheets of drawings folded in.
  4. The manuals shall include:
    - a. Internal and interconnecting wiring and control diagrams with data to explain detailed operation and control of the equipment.
    - b. A control sequence describing start-up, operation, and shutdown.
    - c. Description of the function of each principal item of equipment.
    - d. Installation instructions.
    - e. Safety precautions for operation and maintenance.
    - f. Diagrams and illustrations.
    - g. Periodic maintenance and testing procedures and frequencies, including replacement parts numbers.
    - h. Performance data.
    - i. Pictorial "exploded" parts list with part numbers. Emphasis shall be placed on the use of special tools and instruments. The list shall indicate sources of supply, recommended spare and replacement parts, and name of servicing organization.
    - j. List of factory approved or qualified permanent servicing organizations for equipment repair and periodic testing and

maintenance, including addresses and factory certification qualifications.

- G. Approvals will be based on complete submission of shop drawings, manuals, test reports, certifications, and samples as applicable.

#### **1.13 ACCEPTANCE CHECKS AND TESTS**

- A. The Contractor shall furnish the instruments, materials, and labor for tests.
- B. Where systems are comprised of components specified in more than one section of Division 26, the Contractor shall coordinate the installation, testing, and adjustment of all components between various manufacturer's representatives and technicians so that a complete, functional, and operational system is delivered to the Government.
- C. When test results indicate any defects, the Contractor shall repair or replace the defective materials or equipment, and repeat the tests for the equipment. Repair, replacement, and re-testing shall be accomplished at no additional cost to the Government.

#### **1.14 WARRANTY**

- A. All work performed and all equipment and material furnished under this Division shall be free from defects and shall remain so for a period of one year from the date of acceptance of the entire installation by the Contracting Officer for the Government.

#### **1.15 INSTRUCTION**

- A. Instruction to designated Government personnel shall be provided for the particular equipment or system as required in each associated technical specification section.
- B. Furnish the services of competent and factory-trained instructors to give full instruction in the adjustment, operation, and maintenance of the specified equipment and system, including pertinent safety requirements. Instructors shall be thoroughly familiar with all aspects of the installation, and shall be factory-trained in operating theory as well as practical operation and maintenance procedures.
- C. A training schedule shall be developed and submitted by the Contractor and approved by the COR at least 30 days prior to the planned training.

- - - E N D - - -

**SECTION 26 05 19****LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. This section specifies the furnishing, installation, connection, and testing of the electrical conductors and cables for use in electrical systems rated 600 V and below, indicated as cable(s), conductor(s), wire, or wiring in this section.

**1.2 RELATED WORK**

- A. Section 07 84 00, FIRESTOPPING: Sealing around penetrations to maintain the integrity of fire-resistant rated construction.
- B. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.
- D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits for conductors and cables.
- E. Section 26 05 41, UNDERGROUND ELECTRICAL CONSTRUCTION: N/A.

**1.3 QUALITY ASSURANCE**

- A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

**1.4 SUBMITTALS**

- A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
1. Shop Drawings:
    - a. Submit sufficient information to demonstrate compliance with drawings and specifications.
    - b. Submit the following data for approval:
      - 1) Electrical ratings and insulation type for each conductor and cable.
      - 2) Splicing materials and pulling lubricant.
  2. Certifications: Two weeks prior to final inspection, submit the following.
    - a. Certification by the manufacturer that the conductors and cables conform to the requirements of the drawings and specifications.
    - b. Certification by the Contractor that the conductors and cables have been properly installed, adjusted, and tested.



## 1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are reference in the text by designation only.
- B. American Society of Testing Material (ASTM):
  - D2301-10.....Standard Specification for Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape
  - D2304-10.....Test Method for Thermal Endurance of Rigid Electrical Insulating Materials
  - D3005-10.....Low-Temperature Resistant Vinyl Chloride Plastic Pressure-Sensitive Electrical Insulating Tape
- C. National Electrical Manufacturers Association (NEMA):
  - WC 70-09.....Power Cables Rated 2000 Volts or Less for the Distribution of Electrical Energy
- D. National Fire Protection Association (NFPA):
  - 70-17.....National Electrical Code (NEC)
- E. Underwriters Laboratories, Inc. (UL):
  - 44-14.....Thermoset-Insulated Wires and Cables
  - 83-14.....Thermoplastic-Insulated Wires and Cables
  - 467-13.....Grounding and Bonding Equipment
  - 486A-486B-13.....Wire Connectors
  - 486C-13.....Splicing Wire Connectors
  - 486D-15.....Sealed Wire Connector Systems
  - 486E-15.....Equipment Wiring Terminals for Use with Aluminum and/or Copper Conductors
  - 493-07.....Thermoplastic-Insulated Underground Feeder and Branch Circuit Cables
  - 514B-12.....Conduit, Tubing, and Cable Fittings

## PART 2 - PRODUCTS

### 2.1 CONDUCTORS AND CABLES

- A. Conductors and cables shall be in accordance with ASTM, NEMA, NFPA, UL, as specified herein, and as shown on the drawings.
- B. All conductors shall be copper.
- C. Single Conductor and Cable:
  - 1. No. 12 AWG: Minimum size, except where smaller sizes are specified herein or shown on the drawings.
  - 2. No. 8 AWG and larger: Stranded.
  - 3. No. 10 AWG and smaller: Solid; except shall be stranded for final connection to motors, transformers, and vibrating equipment.

4. Insulation: THHN-THWN and XHHW-2. XHHW-2 shall be used for isolated power systems.

D. Direct Burial Cable: UF or USE cable.

E. Color Code:

1. No. 10 AWG and smaller: Solid color insulation or solid color coating.
2. No. 8 AWG and larger: Color-coded using one of the following methods:
  - a. Solid color insulation or solid color coating.
  - b. Stripes, bands, or hash marks of color specified.
  - c. Color using 19 mm (0.75 inches) wide tape.
4. For modifications and additions to existing wiring systems, color coding shall conform to the existing wiring system.
5. Conductors shall be color-coded as follows:

208/120 V	Phase	480/277 V
Black	A	Brown
Red	B	Orange
Blue	C	Yellow
White	Neutral	Gray *
* or white with colored (other than green) tracer.		

6. Lighting circuit "switch legs", and 3-way and 4-way switch "traveling wires," shall have color coding that is unique and distinct (e.g., pink and purple) from the color coding indicated above. The unique color codes shall be solid and in accordance with the NEC. Coordinate color coding in the field with the COR.
7. Color code for isolated power system wiring shall be in accordance with the NEC.

## 2.2 SPLICES

- A. Splices shall be in accordance with NEC and UL.
- B. Above Ground Splices for No. 10 AWG and Smaller:
  1. Solderless, screw-on, reusable pressure cable type, with integral insulation, approved for copper and aluminum conductors.
  2. The integral insulator shall have a skirt to completely cover the stripped conductors.
  3. The number, size, and combination of conductors used with the connector, as listed on the manufacturer's packaging, shall be strictly followed.
- C. Above Ground Splices for No. 8 AWG to No. 4/0 AWG:

1. Compression, hex screw, or bolt clamp-type of high conductivity and corrosion-resistant material, listed for use with copper and aluminum conductors.
2. Insulate with materials approved for the particular use, location, voltage, and temperature. Insulation level shall be not less than the insulation level of the conductors being joined.
3. Splice and insulation shall be product of the same manufacturer.
4. All bolts, nuts, and washers used with splices shall be zinc-plated cadmium-plated steel.

D. Above Ground Splices for 250 kcmil and Larger:

1. Long barrel "butt-splice" or "sleeve" type compression connectors, with minimum of two compression indents per wire, listed for use with copper and aluminum conductors.
2. Insulate with materials approved for the particular use, location, voltage, and temperature. Insulation level shall be not less than the insulation level of the conductors being joined.
3. Splice and insulation shall be product of the same manufacturer.

SPEC WRITER NOTE: Delete the paragraphs below if underground splices types are not required.

E. Underground Splices for No. 10 AWG and Smaller:

1. Solderless, screw-on, reusable pressure cable type, with integral insulation. Listed for wet locations, and approved for copper and aluminum conductors.
2. The integral insulator shall have a skirt to completely cover the stripped conductors.
3. The number, size, and combination of conductors used with the connector, as listed on the manufacturer's packaging, shall be strictly followed.

F. Underground Splices for No. 8 AWG and Larger:

1. Mechanical type, of high conductivity and corrosion-resistant material. Listed for wet locations, and approved for copper and aluminum conductors.
2. Insulate with materials approved for the particular use, location, voltage, and temperature. Insulation level shall be not less than the insulation level of the conductors being joined.
3. Splice and insulation shall be product of the same manufacturer.//

G. Plastic electrical insulating tape: Per ASTM D2304, flame-retardant, cold and weather resistant.

### 2.3 CONNECTORS AND TERMINATIONS

- A. Mechanical type of high conductivity and corrosion-resistant material, listed for use with copper and aluminum conductors.
- B. Long barrel compression type of high conductivity and corrosion-resistant material, with minimum of two compression indents per wire, listed for use with copper and aluminum conductors.

- C. All bolts, nuts, and washers used to connect connections and terminations to bus bars or other termination points shall be zinc-plated cadmium-plated steel.

#### **2.4 CONTROL WIRING**

- A. Unless otherwise specified elsewhere in these specifications, control wiring shall be as specified herein, except that the minimum size shall be not less than No. 14 AWG.
- B. Control wiring shall be sized such that the voltage drop under in-rush conditions does not adversely affect operation of the controls.

#### **2.5 WIRE LUBRICATING COMPOUND**

- A. Lubricating compound shall be suitable for the wire insulation and conduit, and shall not harden or become adhesive.
- B. Shall not be used on conductors for isolated power systems.

### **PART 3 - EXECUTION**

#### **3.1 GENERAL**

- A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer's instructions.
- B. Install all conductors in raceway systems.
- C. Splice conductors only in outlet boxes, junction boxes, pullboxes, manholes, or handholes.
- D. Conductors of different systems (e.g., 120 V and 277 V) shall not be installed in the same raceway.
- E. Install cable supports for all vertical feeders in accordance with the NEC. Provide split wedge type which firmly clamps each individual cable and tightens due to cable weight.
- F. In panelboards, cabinets, wireways, switches, enclosures, and equipment assemblies, neatly form, train, and tie the conductors with non-metallic ties.
- G. For connections to motors, transformers, and vibrating equipment, stranded conductors shall be used only from the last fixed point of connection to the motors, transformers, or vibrating equipment.
- H. Use expanding foam or non-hardening duct-seal to seal conduits entering a building, after installation of conductors.
- I. Conductor and Cable Pulling:
  - 1. Provide installation equipment that will prevent the cutting or abrasion of insulation during pulling. Use lubricants approved for the cable.
  - 2. Use nonmetallic pull ropes.
  - 3. Attach pull ropes by means of either woven basket grips or pulling eyes attached directly to the conductors.
  - 4. All conductors in a single conduit shall be pulled simultaneously.
  - 5. Do not exceed manufacturer's recommended maximum pulling tensions and sidewall pressure values.
- J. No more than three branch circuits shall be installed in any one conduit.

- K. When stripping stranded conductors, use a tool that does not damage the conductor or remove conductor strands.

### **3.2 INSTALLATION IN MANHOLES**

- A. Train the cables around the manhole walls, but do not bend to a radius less than six times the overall cable diameter.
- B. Fireproofing:
  - 1. Install fireproofing on low-voltage conductors where the low-voltage conductors are installed in the same manholes with medium-voltage conductors.
  - 2. Use fireproofing tape as specified in Section 26 05 13, MEDIUM-VOLTAGE CABLES, and apply the tape in a single layer, half-lapped, or as recommended by the manufacturer. Install the tape with the coated side towards the cable and extend it not less than 25 mm (1 inch) into each duct.
  - 3. Secure the fireproofing tape in place by a random wrap of glass cloth tape.

### **3.3 SPLICE AND TERMINATION INSTALLATION**

- A. Splices and terminations shall be mechanically and electrically secure, and tightened to manufacturer's published torque values using a torque screwdriver or wrench.
- B. Where the Government determines that unsatisfactory splices or terminations have been installed, replace the splices or terminations at no additional cost to the Government.

### **3.4 CONDUCTOR IDENTIFICATION**

- A. When using colored tape to identify phase, neutral, and ground conductors larger than No. 8 AWG, apply tape in half-overlapping turns for a minimum of 75 mm (3 inches) from terminal points, and in junction boxes, pullboxes, and manholes. Apply the last two laps of tape with no tension to prevent possible unwinding. Where cable markings are covered by tape, apply tags to cable, stating size and insulation type.

### **3.5 FEEDER CONDUCTOR IDENTIFICATION**

- A. In each interior pullbox and each underground manhole and handhole, install brass tags on all feeder conductors to clearly designate their circuit identification and voltage. The tags shall be the embossed type, 40 mm (1-1/2 inches) in diameter and 40 mils thick. Attach tags with plastic ties.

### **3.6 EXISTING CONDUCTORS**

- A. Unless specifically indicated on the plans, existing conductors shall not be reused.

### **3.7 CONTROL WIRING INSTALLATION**

- A. Unless otherwise specified in other sections, install control wiring and connect to equipment to perform the required functions as specified or as shown on the drawings.
- B. Install a separate power supply circuit for each system, except where otherwise shown on the drawings.

**3.8 CONTROL WIRING IDENTIFICATION**

- A. Install a permanent wire marker on each wire at each termination.
- B. Identifying numbers and letters on the wire markers shall correspond to those on the wiring diagrams used for installing the systems.
- C. Wire markers shall retain their markings after cleaning.
- D. In each manhole and handhole, install embossed brass tags to identify the system served and function.

**3.9 DIRECT BURIAL CABLE INSTALLATION**

- A. Tops of the cables:
  - 1. Below the finished grade: Minimum 600 mm (24 inches) unless greater depth is shown.
  - 2. Below road and other pavement surfaces: In conduit as specified, minimum 760 mm (30 inches) unless greater depth is shown.
  - 3. Do not install cables under railroad tracks.
- B. Under road and paved surfaces: Install cables in concrete-encased galvanized steel rigid conduits. Size as shown on plans, but not less than 50 mm (2 inches) trade size with bushings at each end of each conduit run. Provide size/quantity of conduits required to accommodate cables plus one spare.
- C. Work with extreme care near existing ducts, conduits, cables, and other utilities to prevent any damage.
- D. Excavation and backfill is specified in Section 31 20 00, EARTH MOVING. In addition:
  - 1. Place 75 mm (3 inches) bedding sand in the trenches before installing the cables.
  - 2. Place 75 mm (3 inches) shading sand over the installed cables.
  - 3. Install continuous horizontal 25 mm by 200 mm (1 inch x 8 inches) preservative-impregnated wood planking 75 mm (3 inches) above the cables before backfilling.
- E. Provide horizontal slack in the cables for contraction during cold weather.
- F. Install the cables in continuous lengths. Splices within cable runs shall not be accepted.
- G. Connections and terminations shall be listed submersible-type designed for the cables being installed.
- H. Warning tape shall be continuously placed 300 mm (12 inches) above the buried cables.

**3.10 ACCEPTANCE CHECKS AND TESTS**

- A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:
  - 1. Visual Inspection and Tests: Inspect physical condition.
  - 2. Electrical tests:

- a. After installation but before connection to utilization devices, such as fixtures, motors, or appliances, test conductors phase-to-phase and phase-to-ground resistance with an insulation resistance tester. Existing conductors to be reused shall also be tested.
- b. Applied voltage shall be 500 V DC for 300 V rated cable, and 1000 V DC for 600 V rated cable. Apply test for one minute or until reading is constant for 15 seconds, whichever is longer. Minimum insulation resistance values shall not be less than 25 megohms for 300 V rated cable and 100 megohms for 600 V rated cable.
- c. Perform phase rotation test on all three-phase circuits.

- - - E N D - - -

**SECTION 26 05 26****GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. This section specifies the furnishing, installation, connection, and testing of grounding and bonding equipment, indicated as grounding equipment in this section.
- B. "Grounding electrode system" refers to grounding electrode conductors and all electrodes required or allowed by NEC, as well as made, supplementary, and lightning protection system grounding electrodes.
- C. The terms "connect" and "bond" are used interchangeably in this section and have the same meaning.

**1.2 RELATED WORK**

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.
- B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.
- C. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduit and boxes.

**1.3 QUALITY ASSURANCE**

- A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

**1.4 SUBMITTALS**

- A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
  - 1. Shop Drawings:
    - a. Submit sufficient information to demonstrate compliance with drawings and specifications.
    - b. Submit plans showing the location of system grounding electrodes and connections, and the routing of aboveground and underground grounding electrode conductors.
  - 2. Test Reports:
    - a. Two weeks prior to the final inspection, submit ground resistance field test reports to the COR.
  - 3. Certifications:
    - a. Certification by the Contractor that the grounding equipment has been properly installed and tested.

**1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.



## B. American Society for Testing and Materials (ASTM):

B1-13.....Standard Specification for Hard-Drawn Copper Wire

B3-13.....Standard Specification for Soft or Annealed Copper Wire

B8-11.....Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft

## C. Institute of Electrical and Electronics Engineers, Inc. (IEEE):

81-12.....IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System Part 1: Normal Measurements

## D. National Fire Protection Association (NFPA):

70-17.....National Electrical Code (NEC)

70E-15.....National Electrical Safety Code

99-15.....Health Care Facilities

## E. Underwriters Laboratories, Inc. (UL):

44-14 .....Thermoset-Insulated Wires and Cables

83-14 .....Thermoplastic-Insulated Wires and Cables

467-13 .....Grounding and Bonding Equipment

**PART 2 - PRODUCTS****2.1 GROUNDING AND BONDING CONDUCTORS**

- A. Equipment grounding conductors shall be insulated stranded copper, except that sizes No. 10 AWG and smaller shall be solid copper. Insulation color shall be continuous green for all equipment grounding conductors, except that wire sizes No. 4 AWG and larger shall be identified per NEC.
- B. Bonding conductors shall be bare stranded copper, except that sizes No. 10 AWG and smaller shall be bare solid copper. Bonding conductors shall be stranded for final connection to motors, transformers, and vibrating equipment.
- C. Conductor sizes shall not be less than shown on the drawings, or not less than required by the NEC, whichever is greater.
- D. Insulation: THHN-THWN and XHHW-2. XHHW-2 shall be used for isolated power systems.

SPEC WRITER NOTE: Specify stainless steel ground rods for corrosive soil conditions.

**2.2 GROUND RODS**

- A. Steel or copper clad steel, Stainless steel, 19 mm (0.75 inch) diameter by 3 M (10 feet) long.
- B. Quantity of rods shall be as shown on the drawings, and as required to obtain the specified ground resistance.

### **2.3 CONCRETE ENCASED ELECTRODE**

- A. Concrete encased electrode shall be No. 4 AWG bare copper wire, installed per NEC.

### **2.4 GROUND CONNECTIONS**

- A. Below Grade and Inaccessible Locations: Exothermic-welded type connectors.
- B. Above Grade:
  - 1. Bonding Jumpers: Listed for use with aluminum and copper conductors. For wire sizes No. 8 AWG and larger, use compression-type connectors. For wire sizes smaller than No. 8 AWG, use mechanical type lugs. Connectors or lugs shall use zinc-plated//cadmium-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.
  - 2. Connection to Building Steel: Exothermic-welded type connectors.
  - 3. Connection to Grounding Bus Bars: Listed for use with aluminum and copper conductors. Use mechanical type lugs, with zinc-plated//cadmium-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.
  - 4. Connection to Equipment Rack and Cabinet Ground Bars: Listed for use with aluminum and copper conductors. Use mechanical type lugs, with zinc-plated//cadmium-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.

### **2.5 EQUIPMENT RACK AND CABINET GROUND BARS**

- A. Provide solid copper ground bars designed for mounting on the framework of open or cabinet-enclosed equipment racks. Ground bars shall have minimum dimensions of 6.3 mm (0.25 inch) thick x 19 mm (0.75 inch) wide, with length as required or as shown on the drawings. Provide insulators and mounting brackets.

### **2.6 GROUND TERMINAL BLOCKS**

- A. At any equipment mounting location (e.g., backboards and hinged cover enclosures) where rack-type ground bars cannot be mounted, provide mechanical type lugs, with zinc-plated//cadmium-plated steel bolts, nuts, and washers. Bolts shall be torqued to the values recommended by the manufacturer.

### **2.7 GROUNDING BUS BAR**

- A. Pre-drilled rectangular copper bar with stand-off insulators, minimum 6.3 mm (0.25 inch) thick x 100 mm (4 inches) high in cross-section, length as shown on the drawings, with hole size, quantity, and spacing per detail shown on the drawings. Provide insulators and mounting brackets.

## **PART 3 - EXECUTION**

### **3.1 GENERAL**

- A. Installation shall be in accordance with the NEC, as shown on the drawings, and manufacturer's instructions.
- B. System Grounding:
  - 1. Secondary service neutrals: Ground at the supply side of the secondary disconnecting means and at the related transformer.

2. Separately derived systems (transformers downstream from the service entrance): Ground the secondary neutral.
3. Isolation transformers and isolated power systems shall not be system grounded.
- C. Equipment Grounding: Metallic piping, building structural steel, electrical enclosures, raceways, junction boxes, outlet boxes, cabinets, machine frames, and other conductive items in close proximity with electrical circuits, shall be bonded and grounded.
- D. For patient care area electrical power system grounding, conform to the latest NFPA 70 and 99.

### **3.2 INACCESSIBLE GROUNDING CONNECTIONS**

- A. Make grounding connections, which are normally buried or otherwise inaccessible, by exothermic weld.

### **3.3 MEDIUM-VOLTAGE EQUIPMENT AND CIRCUITS**

- A. Switchgear: Provide a bare grounding electrode conductor from the switchgear ground bus to the grounding electrode system.
- B. Duct Banks and Manholes: Provide an insulated equipment grounding conductor in each duct containing medium-voltage conductors, sized per NEC except that minimum size shall be No. 2 AWG. Bond the equipment grounding conductors to the switchgear ground bus, to all manhole grounding provisions and hardware, to the cable shield grounding provisions of medium-voltage cable splices and terminations, and to equipment enclosures.
- C. Pad-Mounted Transformers:
  1. Provide a driven ground rod and bond with a grounding electrode conductor to the transformer grounding pad.
  2. Ground the secondary neutral.
- D. Lightning Arresters: Connect lightning arresters to the equipment ground bus or ground rods as applicable.

### **3.4 SECONDARY VOLTAGE EQUIPMENT AND CIRCUITS**

- A. Main Bonding Jumper: Bond the secondary service neutral to the ground bus in the service equipment.
- B. Metallic Piping, Building Structural Steel, and Supplemental Electrode(s):
  1. Provide a grounding electrode conductor sized per NEC between the service equipment ground bus and all metallic water pipe systems, building structural steel, and supplemental or made electrodes. Provide jumpers across insulating joints in the metallic piping.
  2. Provide a supplemental ground electrode as shown on the drawings and bond to the grounding electrode system.
- C. Switchgear, Switchboards, Unit Substations, Panelboards, Motor Control Centers, Engine-Generators, Automatic Transfer Switches, and other electrical equipment:
  1. Connect the equipment grounding conductors to the ground bus.

2. Connect metallic conduits by grounding bushings and equipment grounding conductor to the equipment ground bus.

D. Transformers:

1. Exterior: Exterior transformers supplying interior service equipment shall have the neutral grounded at the transformer secondary. Provide a grounding electrode at the transformer.
2. Separately derived systems (transformers downstream from service equipment): Ground the secondary neutral at the transformer. Provide a grounding electrode conductor from the transformer to the nearest component of the grounding electrode system or the ground bar at the service equipment (field verify inform the COR prior to installtion).

### 3.5 RACEWAY

A. Conduit Systems:

1. Ground all metallic conduit systems. All metallic conduit systems shall contain an equipment grounding conductor.
2. Non-metallic conduit systems, except non-metallic feeder conduits that carry a grounded conductor from exterior transformers to interior or building-mounted service entrance equipment, shall contain an equipment grounding conductor.
3. Metallic conduit that only contains a grounding conductor, and is provided for its mechanical protection, shall be bonded to that conductor at the entrance and exit from the conduit.
4. Metallic conduits which terminate without mechanical connection to an electrical equipment housing by means of locknut and bushings or adapters, shall be provided with grounding bushings. Connect bushings with a equipment grounding conductor to the equipment ground bus.

B. Feeders and Branch Circuits: Install equipment grounding conductors with all feeders, and power and lighting branch circuits.

C. Boxes, Cabinets, Enclosures, and Panelboards:

1. Bond the equipment grounding conductor to each pullbox, junction box, outlet box, device box, cabinets, and other enclosures through which the conductor passes (except for special grounding systems for intensive care units and other critical units shown).
2. Provide lugs in each box and enclosure for equipment grounding conductor termination.

D. Wireway Systems:

1. Bond the metallic structures of wireway to provide electrical continuity throughout the wireway system, by connecting a No. 6 AWG bonding jumper at all intermediate metallic enclosures and across all section junctions.
2. Install insulated No. 6 AWG bonding jumpers between the wireway system, bonded as required above, and the closest building ground at each end and approximately every 16 M (50 feet).
3. Use insulated No. 6 AWG bonding jumpers to ground or bond metallic wireway at each end for all intermediate metallic enclosures and across all section junctions.

4. Use insulated No. 6 AWG bonding jumpers to ground cable tray to column-mounted building ground plates (pads) at each end and approximately every 15 M (49 feet).
- E. Receptacles shall not be grounded through their mounting screws. Ground receptacles with a jumper from the receptacle green ground terminal to the device box ground screw and a jumper to the branch circuit equipment grounding conductor.
- F. Ground lighting fixtures to the equipment grounding conductor of the wiring system. Fixtures connected with flexible conduit shall have a green ground wire included with the power wires from the fixture through the flexible conduit to the first outlet box.
- G. Fixed electrical appliances and equipment shall be provided with a ground lug for termination of the equipment grounding conductor.
- H. Raised Floors: Provide bonding for all raised floor components as shown on the drawings.
- I. Panelboard Bonding in Patient Care Areas: The equipment grounding terminal buses of the normal and essential branch circuit panel boards serving the same individual patient vicinity shall be bonded together with an insulated continuous copper conductor not less than No. 10 AWG, installed in rigid metal conduit.

### **3.6 OUTDOOR METALLIC FENCES AROUND ELECTRICAL EQUIPMENT**

- A. Fences shall be grounded with a ground rod at each fixed gate post and at each corner post.
- B. Drive ground rods until the top is 300 mm (12 inches) below grade. Attach a No. 4 AWG copper conductor by exothermic weld to the ground rods, and extend underground to the immediate vicinity of fence post. Lace the conductor vertically into 300 mm (12 inches) of fence mesh and fasten by two approved bronze compression fittings, one to bond the wire to post and the other to bond the wire to fence. Each gate section shall be bonded to its gatepost by a 3 mm x 25 mm (0.375 inch x 1 inch) flexible, braided copper strap and ground post clamps. Clamps shall be of the anti-electrolysis type.

### **3.7 CORROSION INHIBITORS**

- A. When making grounding and bonding connections, apply a corrosion inhibitor to all contact surfaces. Use corrosion inhibitor appropriate for protecting a connection between the metals used.

### **3.8 CONDUCTIVE PIPING**

- A. Bond all conductive piping systems, interior and exterior, to the grounding electrode system. Bonding connections shall be made as close as practical to the equipment ground bus.
- B. In operating rooms and at intensive care and coronary care type beds, bond the medical gas piping and medical vacuum piping at the outlets directly to the patient ground bus.

### **3.9 LIGHTNING PROTECTION SYSTEM**

- A. Bond the lightning protection system to the electrical grounding electrode system.

**3.10 MAIN ELECTRICAL ROOM GROUNDING**

- A. Provide ground bus bar and mounting hardware at each main electrical room where incoming feeders are terminated, as shown on the drawings. Connect to pigtail extensions of the building grounding ring, as shown on the drawings.

**3.11 EXTERIOR LIGHT POLES**

- A. Provide 6.1 M (20 feet) of No. 4 AWG bare copper coiled at bottom of pole base excavation prior to pour, plus additional un-spliced length in and above foundation as required to reach pole ground stud.

**3.12 GROUND RESISTANCE**

- A. Grounding system resistance to ground shall not exceed 5 ohms. Make any modifications or additions to the grounding electrode system necessary for compliance without additional cost to the Government. Final tests shall ensure that this requirement is met.
- B. Grounding system resistance shall comply with the electric utility company ground resistance requirements.

**3.13 GROUND ROD INSTALLATION**

- A. For outdoor installations, drive each rod vertically in the earth, until top of rod is 610 mm (24 inches) below final grade.
- B. For indoor installations, leave 100 mm (4 inches) of each rod exposed.
- C. Where buried or permanently concealed ground connections are required, make the connections by the exothermic process, to form solid metal joints. Make accessible ground connections with mechanical pressure-type ground connectors.
- D. Where rock or impenetrable soil prevents the driving of vertical ground rods, install angled ground rods or grounding electrodes in horizontal trenches to achieve the specified ground resistance.

**3.14 ACCEPTANCE CHECKS AND TESTS**

- A. Resistance of the grounding electrode system shall be measured using a four-terminal fall-of-potential method as defined in IEEE 81. Ground resistance measurements shall be made before the electrical distribution system is energized or connected to the electric utility company ground system, and shall be made in normally dry conditions not fewer than 48 hours after the last rainfall.
- B. Resistance measurements of separate grounding electrode systems shall be made before the systems are bonded together. The combined resistance of separate systems may be used to meet the required resistance, but the specified number of electrodes must still be provided.
- C. Below-grade connections shall be visually inspected by the COR prior to backfilling. The Contractor shall notify the COR 24 hours before the connections are ready for inspection.

- - - E N D - - -

**SECTION 26 05 33****RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. This section specifies the furnishing, installation, and connection of conduit, fittings, and boxes, to form complete, coordinated, grounded raceway systems. Raceways are required for all wiring unless shown or specified otherwise.
- B. Definitions: The term conduit, as used in this specification, shall mean any or all of the raceway types specified.

**1.2 RELATED WORK**

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements and items that are common to more than one section of Division 26.
- B. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground fault currents.

**1.3 QUALITY ASSURANCE**

Refer to Paragraph, QUALIFICATIONS, in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

**1.4 SUBMITTALS**

- A. Submit six copies of the following in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
  - 1. Shop Drawings:
    - a. Size and location of main feeders.
    - b. Size and location of panels and pull-boxes.
    - c. Layout of required conduit penetrations through structural elements.
    - d. Submit the following data for approval:
      - 1) Raceway types and sizes.
      - 2) Conduit bodies, connectors and fittings.
      - 3) Junction and pull boxes, types and sizes.
  - 2. Certifications: Two weeks prior to final inspection, submit the following:
    - a. Certification by the manufacturer that raceways, conduits, conduit bodies, connectors, fittings, junction and pull boxes, and all related equipment conform to the requirements of the drawings and specifications.
    - b. Certification by the Contractor that raceways, conduits, conduit bodies, connectors, fittings, junction and pull boxes, and all related equipment have been properly installed.

## 1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. American National Standards Institute (ANSI):
- C80.1-05.....Electrical Rigid Steel Conduit
  - C80.3-05.....Steel Electrical Metal Tubing
  - C80.6-05.....Electrical Intermediate Metal Conduit
- C. National Fire Protection Association (NFPA):
- 70-11.....National Electrical Code (NEC)
- D. Underwriters Laboratories, Inc. (UL):
- 1-05.....Flexible Metal Conduit
  - 5-11.....Surface Metal Raceway and Fittings
  - 6-07.....Electrical Rigid Metal Conduit - Steel
  - 50-95.....Enclosures for Electrical Equipment
  - 360-13.....Liquid-Tight Flexible Steel Conduit
  - 467-13.....Grounding and Bonding Equipment
  - 514A-13.....Metallic Outlet Boxes
  - 514B-12.....Conduit, Tubing, and Cable Fittings
  - 514C-07.....Nonmetallic Outlet Boxes, Flush-Device Boxes and Covers
  - 651-11.....Schedule 40 and 80 Rigid PVC Conduit and Fittings
  - 651A-11.....Type EB and A Rigid PVC Conduit and HDPE Conduit
  - 797-07.....Electrical Metallic Tubing
  - 1242-06.....Electrical Intermediate Metal Conduit - Steel
- E. National Electrical Manufacturers Association (NEMA):
- TC-2-13.....Electrical Polyvinyl Chloride (PVC) Tubing and Conduit
  - TC-3-13.....PVC Fittings for Use with Rigid PVC Conduit and Tubing
  - FB1-12.....Fittings, Cast Metal Boxes and Conduit Bodies for Conduit, Electrical Metallic Tubing and Cable
  - FB2.10-13.....Selection and Installation Guidelines for Fittings for use with Non-Flexible Conduit or Tubing (Rigid Metal Conduit, Intermediate



Metallic Conduit, and Electrical Metallic  
Tubing)

FB2.20-12.....Selection and Installation Guidelines for  
Fittings for use with Flexible Electrical  
Conduit and Cable

F. American Iron and Steel Institute (AISI):

S100-2007.....North American Specification for the Design of  
Cold-Formed Steel Structural Members

## **PART 2 - PRODUCTS**

### **2.1 MATERIAL**

A. Conduit Size: In accordance with the NEC, but not less than 13 mm (0.5-inch) unless otherwise shown. Where permitted by the NEC, 13 mm (0.5-inch) flexible conduit may be used for tap connections to recessed lighting fixtures.

B. Conduit:

1. Size: In accordance with the NEC, but not less than 13 mm (0.5-inch).
2. Rigid Steel Conduit (RMC): Shall conform to UL 6 and ANSI C80.1.
3. Rigid aluminum: N/A
4. Rigid Intermediate Steel Conduit (IMC): Shall conform to UL 1242 and ANSI C80.6.
5. Electrical Metallic Tubing (EMT): Shall conform to UL 797 and ANSI C80.3. Maximum size not to exceed 105 mm (4 inches) and shall be permitted only with cable rated 600 V or less.
6. Flexible Metal Conduit: Shall conform to UL 1.
7. Liquid-tight Flexible Metal Conduit: Shall conform to UL 360.
8. Direct Burial Plastic Conduit: Shall conform to UL 651 and UL 651A, heavy wall PVC or high density polyethylene (PE).
9. Surface Metal Raceway: Shall conform to UL 5.

C. Conduit Fittings:

1. Rigid Steel and Intermediate Metallic Conduit Fittings:
  - a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
  - b. Standard threaded couplings, locknuts, bushings, conduit bodies, and elbows: Only steel or malleable iron materials are acceptable. Integral retractable type IMC couplings are also acceptable.
  - c. Locknuts: Bonding type with sharp edges for digging into the metal wall of an enclosure.
  - d. Bushings: Metallic insulating type, consisting of an insulating insert, molded or locked into the metallic body of the fitting. Bushings made entirely of metal or nonmetallic material are not permitted.

- e. Erickson (Union-Type) and Set Screw Type Couplings: Approved for use in concrete are permitted for use to complete a conduit run where conduit is installed in concrete. Use set screws of case-hardened steel with hex head and cup point to firmly seat in conduit wall for positive ground. Tightening of set screws with pliers is prohibited.
  - f. Sealing Fittings: Threaded cast iron type. Use continuous drain-type sealing fittings to prevent passage of water vapor. In concealed work, install fittings in flush steel boxes with blank cover plates having the same finishes as that of other electrical plates in the room.
3. Electrical Metallic Tubing Fittings:
- a. Fittings and conduit bodies shall meet the requirements of UL 514B, ANSI C80.3, and NEMA FB1.
  - b. Only steel or malleable iron materials are acceptable.
- c. Compression Couplings and Connectors: Concrete-tight and rain-tight, with connectors having insulated throats.
- d. Indent-type connectors or couplings are prohibited.
- e. Die-cast or pressure-cast zinc-alloy fittings or fittings made of "pot metal" are prohibited.
4. Flexible Metal Conduit Fittings:
- a. Conform to UL 514B. Only steel or malleable iron materials are acceptable.
  - b. Clamp-type, with insulated throat.
5. Liquid-tight Flexible Metal Conduit Fittings:
- a. Fittings shall meet the requirements of UL 514B and NEMA FB1.
  - b. Only steel or malleable iron materials are acceptable.
  - c. Fittings must incorporate a threaded grounding cone, a steel or plastic compression ring, and a gland for tightening. Connectors shall have insulated throats.
6. Direct Burial Plastic Conduit Fittings: Fittings shall meet the requirements of UL 514C and NEMA TC3.
7. Surface Metal Raceway Fittings: As recommended by the raceway manufacturer. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, conduit entry fittings, accessories, and other fittings as required for complete system.
8. Expansion and Deflection Couplings:
- a. Conform to UL 467 and UL 514B.
  - b. Accommodate a 19 mm (0.75-inch) deflection, expansion, or contraction in any direction, and allow 30 degree angular deflections.

- c. Include internal flexible metal braid, sized to guarantee conduit ground continuity and a low-impedance path for fault currents, in accordance with UL 467 and the NEC tables for equipment grounding conductors.
  - d. Jacket: Flexible, corrosion-resistant, watertight, moisture and heat-resistant molded rubber material with stainless steel jacket clamps.
- D. Conduit Supports:
- 1. Parts and Hardware: Zinc-coat or provide equivalent corrosion protection.
  - 2. Individual Conduit Hangers: Designed for the purpose, having a pre-assembled closure bolt and nut, and provisions for receiving a hanger rod.
  - 3. Multiple Conduit (Trapeze) Hangers: Not less than 38 mm x 38 mm (1.5 x 1.5 inches), 12-gauge steel, cold-formed, lipped channels; with not less than 9 mm (0.375-inch) diameter steel hanger rods.
  - 4. Solid Masonry and Concrete Anchors: Self-drilling expansion shields, or machine bolt expansion.
- E. Outlet, Junction, and Pull Boxes:
- 1. UL-50 and UL-514A.
  - 2. Rustproof cast metal where required by the NEC or shown on drawings.
  - 3. Sheet Metal Boxes: Galvanized steel, except where shown on drawings.
- F. Metal Wireways: Equip with hinged covers, except as shown on drawings. Include couplings, offsets, elbows, expansion joints, adapters, hold-down straps, end caps, and other fittings to match and mate with wireways as required for a complete system.

### **PART 3 - EXECUTION**

#### **3.1 PENETRATIONS**

- A. Cutting or Holes:
- 1. Cut holes in advance where they should be placed in the structural elements, such as ribs or beams. Obtain the approval of the COR prior to drilling through structural elements.
  - 2. Cut holes through concrete and masonry in new and existing structures with a diamond core drill or concrete saw. Pneumatic hammers, impact electric, hand, or manual hammer-type drills are not allowed, except when permitted by the COR where working space is limited.
- B. Firestop: Where conduits, wireways, and other electrical raceways pass through fire partitions, fire walls, smoke partitions, or floors, install a fire stop that provides an effective barrier against the spread of fire, smoke and gases as specified in Section 07 84 00, FIRESTOPPING.

- C. Waterproofing: At floor, exterior wall, and roof conduit penetrations, completely seal the gap around conduit to render it watertight, as specified in Section 07 92 00, JOINT SEALANTS.

### **3.2 INSTALLATION, GENERAL**

- A. In accordance with UL, NEC, NEMA, as shown on drawings, and as specified herein.
- B. Raceway systems used for Essential Electrical Systems (EES) shall be entirely independent of other raceway systems.
- C. Install conduit as follows:
  1. In complete mechanically and electrically continuous runs before pulling in cables or wires.
  2. Unless otherwise indicated on the drawings or specified herein, installation of all conduits shall be concealed within finished walls, floors, and ceilings.
  3. Flattened, dented, or deformed conduit is not permitted. Remove and replace the damaged conduits with new conduits.
  4. Assure conduit installation does not encroach into the ceiling height head room, walkways, or doorways.
  5. Cut conduits square, ream, remove burrs, and draw up tight.
  6. Independently support conduit at 2.4 M (8 feet) on centers with specified materials and as shown on drawings.
  7. Do not use suspended ceilings, suspended ceiling supporting members, lighting fixtures, other conduits, cable tray, boxes, piping, or ducts to support conduits and conduit runs.
  8. Support within 300 mm (12 inches) of changes of direction, and within 300 mm (12 inches) of each enclosure to which connected.
  9. Close ends of empty conduits with plugs or caps at the rough-in stage until wires are pulled in, to prevent entry of debris.
  10. Conduit installations under fume and vent hoods are prohibited.
  11. Secure conduits to cabinets, junction boxes, pull-boxes, and outlet boxes with bonding type locknuts. For rigid steel and IMC conduit installations, provide a locknut on the inside of the enclosure, made up wrench tight. Do not make conduit connections to junction box covers.
  12. Flashing of penetrations of the roof membrane is specified in Section 07 60 00, FLASHING AND SHEET METAL.
  13. Conduit bodies shall only be used for changes in direction, and shall not contain splices.
- D. Conduit Bends:
  1. Make bends with standard conduit bending machines.
  2. Conduit hickey may be used for slight offsets and for straightening stubbed out conduits.

3. Bending of conduits with a pipe tee or vise is prohibited.

E. Layout and Homeruns:

1. Install conduit with wiring, including homeruns, as shown on drawings.
2. Deviations: Make only where necessary to avoid interferences and only after drawings showing the proposed deviations have been submitted and approved by the COR.

### 3.3 CONCEALED WORK INSTALLATION

A. In Concrete:

1. Conduit: Rigid steel, IMC, or EMT. Do not install EMT in concrete slabs that are in contact with soil, gravel, or vapor barriers.
2. Align and run conduit in direct lines.
3. Install conduit through concrete beams only:
  - a. Where shown on the structural drawings.
  - b. As approved by the COR prior to construction, and after submittal of drawing showing location, size, and position of each penetration.
4. Installation of conduit in concrete that is less than 75 mm (3 inches) thick is prohibited.
  - a. Conduit outside diameter larger than one-third of the slab thickness is prohibited.
  - b. Space between conduits in slabs: Approximately six conduit diameters apart, and one conduit diameter at conduit crossings.
  - c. Install conduits approximately in the center of the slab so that there will be a minimum of 19 mm (0.75-inch) of concrete around the conduits.
5. Make couplings and connections watertight. Use thread compounds that are UL approved conductive type to ensure low resistance ground continuity through the conduits. Tightening setscrews with pliers is prohibited.

B. Above Furred or Suspended Ceilings and in Walls:

1. Conduit for Conductors Above 600 V: Rigid steel. Mixing different types of conduits in the same system is prohibited.
2. Conduit for Conductors 600 V and Below: Rigid steel, IMC, EMT. Mixing different types of conduits in the same system is prohibited.
3. Align and run conduit parallel or perpendicular to the building lines.
4. Connect recessed lighting fixtures to conduit runs with maximum 1.8 M (6 feet) of flexible metal conduit extending from a junction box to the fixture.
5. Tightening set screws with pliers is prohibited.

6. For conduits running through metal studs, limit field cut holes to no more than 70% of web depth. Spacing between holes shall be at least 457 mm (18 inches). Cuts or notches in flanges or return lips shall not be permitted.

### **3.4 EXPOSED WORK INSTALLATION**

- A. Unless otherwise indicated on drawings, exposed conduit is only permitted in mechanical and electrical rooms.
- B. Conduit for Conductors Above 600 V: Rigid steel. Mixing different types of conduits in the system is prohibited.
- C. Conduit for Conductors 600 V and Below: Rigid steel, IMC, EMT. Mixing different types of conduits in the system is prohibited.
- D. Align and run conduit parallel or perpendicular to the building lines.
- E. Install horizontal runs close to the ceiling or beams and secure with conduit straps.
- F. Support horizontal or vertical runs at not over 2.4 M (8 feet) intervals.
- G. Surface Metal Raceways: Use only where shown on drawings.
- H. Painting:
  1. Paint exposed conduit as specified in Section 09 91 00, PAINTING.
  2. Paint all conduits containing cables rated over 600 V safety orange. Refer to Section 09 91 00, PAINTING for preparation, paint type, and exact color. In addition, paint legends, using 50 mm (2 inch) high black numerals and letters, showing the cable voltage rating. Provide legends where conduits pass through walls and floors and at maximum 6 M (20 feet) intervals in between.

### **3.5 DIRECT BURIAL INSTALLATION**

Refer to Section 26 05 41, UNDERGROUND ELECTRICAL CONSTRUCTION.

### **3.6 HAZARDOUS LOCATIONS**

- A. Use rigid steel conduit only.
- B. Install UL approved sealing fittings that prevent passage of explosive vapors in hazardous areas equipped with explosion-proof lighting fixtures, switches, and receptacles, as required by the NEC.

### **3.7 WET OR DAMP LOCATIONS**

- A. Use rigid steel or IMC conduits unless as shown on drawings.
- B. Provide sealing fittings to prevent passage of water vapor where conduits pass from warm to cold locations, i.e., refrigerated spaces, constant-temperature rooms, air-conditioned spaces, building exterior walls, roofs, or similar spaces.
- C. Use rigid steel or IMC conduit within 1.5 M (5 feet) of the exterior and below concrete building slabs in contact with soil, gravel, or vapor barriers, unless as shown on drawings. Conduit shall be half-lapped with 10 mil PVC tape before installation. After installation, completely recoat or retape any damaged areas of coating.

- D. Conduits run on roof shall be supported with integral galvanized lipped steel channel, attached to UV-inhibited polycarbonate or polypropylene blocks every 2.4 M (8 feet) with 9 mm (3/8-inch) galvanized threaded rods, square washer and locknut. Conduits shall be attached to steel channel with conduit clamps.

### **3.8 MOTORS AND VIBRATING EQUIPMENT**

- A. Use flexible metal conduit for connections to motors and other electrical equipment subject to movement, vibration, misalignment, cramped quarters, or noise transmission.
- B. Use liquid-tight flexible metal conduit for installation in exterior locations, moisture or humidity laden atmosphere, corrosive atmosphere, water or spray wash-down operations, inside airstream of HVAC units, and locations subject to seepage or dripping of oil, grease, or water.
- C. Provide a green equipment grounding conductor with flexible and liquid-tight flexible metal conduit.

### **3.9 EXPANSION JOINTS**

- A. Conduits 75 mm (3 inch) and larger that are secured to the building structure on opposite sides of a building expansion joint require expansion and deflection couplings. Install the couplings in accordance with the manufacturer's recommendations.
- B. Provide conduits smaller than 75 mm (3 inch) with junction boxes on both sides of the expansion joint. Connect flexible metal conduits to junction boxes with sufficient slack to produce a 125 mm (5 inch) vertical drop midway between the ends of the flexible metal conduit. Flexible metal conduit shall have a green insulated copper bonding jumper installed. In lieu of this flexible metal conduit, expansion and deflection couplings as specified above are acceptable.
- C. Install expansion and deflection couplings where shown.
- D. Seismic Areas: In seismic areas, provide conduits rigidly secured to the building structure on opposite sides of a building expansion joint with junction boxes on both sides of the joint. Connect conduits to junction boxes with 375 mm (15 inches) of slack flexible conduit. Flexible conduit shall have a copper bonding jumper installed.

### **3.10 CONDUIT SUPPORTS**

- A. Safe working load shall not exceed one-quarter of proof test load of fastening devices.
- B. Use pipe straps or individual conduit hangers for supporting individual conduits.
- C. Support multiple conduit runs with trapeze hangers. Use trapeze hangers that are designed to support a load equal to or greater than the sum of the weights of the conduits, wires, hanger itself, and an additional 90 kg (200 lbs). Attach each conduit with U-bolts or other approved fasteners.
- D. Support conduit independently of junction boxes, pull-boxes, fixtures, suspended ceiling T-bars, angle supports, and similar items.

E. Fasteners and Supports in Solid Masonry and Concrete:

1. New Construction: Use steel or malleable iron concrete inserts set in place prior to placing the concrete.
2. Existing Construction:
  - a. Steel expansion anchors not less than 6 mm (0.25-inch) bolt size and not less than 28 mm (1.125 inch) in embedment.
  - b. Power set fasteners not less than 6 mm (0.25-inch) diameter with depth of penetration not less than 75 mm (3 inch).
  - c. Use vibration and shock-resistant anchors and fasteners for attaching to concrete ceilings.

F. Hollow Masonry: Toggle bolts.

G. Bolts supported only by plaster or gypsum wallboard are not acceptable.

H. Metal Structures: Use machine screw fasteners or other devices specifically designed and approved for the application.

I. Attachment by wood plugs, rawl plug, plastic, lead or soft metal anchors, or wood blocking and bolts supported only by plaster is prohibited.

J. Chain, wire, or perforated strap shall not be used to support or fasten conduit.

K. Spring steel type supports or fasteners are prohibited for all uses except horizontal and vertical supports/fasteners within walls.

L. Vertical Supports: Vertical conduit runs shall have riser clamps and supports in accordance with the NEC and as shown. Provide supports for cable and wire with fittings that include internal wedges and retaining collars.

### 3.11 BOX INSTALLATION

A. Boxes for Concealed Conduits:

1. Flush-mounted.
2. Provide raised covers for boxes to suit the wall or ceiling, construction, and finish.

B. In addition to boxes shown, install additional boxes where needed to prevent damage to cables and wires during pulling-in operations or where more than the equivalent of 4-90 degree bends are necessary.

C. Locate pullboxes so that covers are accessible and easily removed. Coordinate locations with piping and ductwork where installed above ceilings.

D. Remove only knockouts as required. Plug unused openings. Use threaded plugs for cast metal boxes and snap-in metal covers for sheet metal boxes.

E. Outlet boxes mounted back-to-back in the same wall are prohibited. A minimum 600 mm (24 inch) center-to-center lateral spacing shall be maintained between boxes.



- F. Flush-mounted wall or ceiling boxes shall be installed with raised covers so that the front face of raised cover is flush with the wall. Surface-mounted wall or ceiling boxes shall be installed with surface-style flat or raised covers.
- G. Minimum size of outlet boxes for ground fault circuit interrupter (GFCI) receptacles is 100 mm (4 inches) square x 55 mm (2.125 inches) deep, with device covers for the wall material and thickness involved.
- H. Stencil or install phenolic nameplates on covers of the boxes identified on riser diagrams; for example "SIG-FA JB No. 1."
- I. On all branch circuit junction box covers, identify the circuits with black marker.

- - - E N D - - -

**SECTION 26 27 26****WIRING DEVICES****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. This section specifies the furnishing, installation, connection, and testing of wiring devices.

**1.2 RELATED WORK**

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: General electrical requirements that are common to more than one section of Division 26.
- B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Cables and wiring.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path to ground for possible ground fault currents.
- D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduit and boxes.

**1.3 QUALITY ASSURANCE**

- A. Refer to Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES), in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

**1.4 SUBMITTALS**

- A. Submit six copies of the following in accordance with Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.
1. Shop Drawings:
    - a. Submit sufficient information to demonstrate compliance with drawings and specifications.
    - b. Include electrical ratings, dimensions, mounting details, construction materials, grade, and termination information.
  2. Manuals:
    - a. Submit, simultaneously with the shop drawings, companion copies of complete maintenance and operating manuals, including technical data sheets and information for ordering replacement parts.
    - b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
  3. Certifications: Two weeks prior to final inspection, submit the following.
    - a. Certification by the manufacturer that the wiring devices conform to the requirements of the drawings and specifications.
    - b. Certification by the Contractor that the wiring devices have been properly installed and adjusted.

## 1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below (including amendments, addenda, revisions, supplements and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.
- B. National Fire Protection Association (NFPA):
  - 70-14.....National Electrical Code (NEC)
  - 99-15.....Health Care Facilities
- C. National Electrical Manufacturers Association (NEMA):
  - WD 1-10.....General Color Requirements for Wiring Devices
  - WD 6-12 .....Wiring Devices - Dimensional Specifications
- D. Underwriter's Laboratories, Inc. (UL):
  - 5-11.....Surface Metal Raceways and Fittings
  - 20-10.....General-Use Snap Switches
  - 231-08.....Power Outlets
  - 467-13.....Grounding and Bonding Equipment
  - 498-12.....Attachment Plugs and Receptacles
  - 943-15.....Ground-Fault Circuit-Interrupters
  - 1449-14.....Surge Protective Devices
  - 1472-15.....Solid State Dimming Controls

## PART 2 - PRODUCTS

### 2.1 RECEPTACLES

- A. General: All receptacles shall comply with NEMA, NFPA, UL, and as shown on the drawings.
  - 1. Mounting straps shall be nickel plated brass, brass, nickel plated steel or galvanize steel with break-off plaster ears, and shall include a self-grounding feature. Terminal screws shall be brass, brass plated or a copper alloy metal.
  - 2. Receptacles shall have provisions for back wiring with separate metal clamp type terminals (four minimum) and side wiring from four captively held binding screws.
- B. Duplex Receptacles - Hospital-grade: shall be listed for hospital grade, single phase, 20 ampere, 120 volts, 2-pole, 3-wire, NEMA 5-20R, with break-off feature for two-circuit operation.
  - 1. Bodies shall be ivory in color.
  - 2. Switched duplex receptacles shall be wired so that only the top receptacle is switched. The lower receptacle shall be unswitched.
  - 3. Duplex Receptacles on Emergency Circuit:
    - a. In rooms without emergency powered general lighting, the emergency receptacles shall be of the self-illuminated type.
  - 4. Ground Fault Current Interrupter (GFCI) Duplex Receptacles: Shall be an integral unit, hospital-grade, suitable for mounting in a

standard outlet box, with end-of-life indication and provisions to isolate the face due to improper wiring. GFCI receptacles shall be self-test receptacles in accordance with UL 943.

- a. Ground fault interrupter shall consist of a differential current transformer, self-test, solid state sensing circuitry and a circuit interrupter switch. Device shall have nominal sensitivity to ground leakage current of 4-6 milliamperes and shall function to interrupt the current supply for any value of ground leakage current above five milliamperes (+ or - 1 milliampere) on the load side of the device. Device shall have a minimum nominal tripping time of 0.025 second.
  - b. Self-test function shall be automatically initiated within 5 seconds after power is activated to the receptacles. Self-test function shall be periodically and automatically performed every 3 hours or less.
  - c. End-of-life indicator light shall be a persistent flashing or blinking light to indicate that the GFCI receptacle is no longer in service.
  - d. Bodies shall be RED in color.
5. Tamper-Resistant Duplex Receptacles:
- a. Bodies shall be RED in color.
    - 1) Shall permit current to flow only while a standard plug is in the proper position in the receptacle.
    - 2) Screws exposed while the wall plates are in place shall be the tamperproof type.
- C. Duplex Receptacles - Non-hospital Grade: shall be the same as duplex receptacles - hospital grade in accordance with sections 2.1A and 2.1B of this specification, except for the hospital grade listing.
- a. Bodies shall be (see Standard) nylon.
- D. Receptacles - 20, 30, and 50 ampere, 250 Volts: Shall be complete with appropriate cord grip plug.
- E. Weatherproof Receptacles: Shall consist of a duplex receptacle, mounted in box with a gasketed, weatherproof, cast metal cover plate and cap over each receptacle opening. The cap shall be permanently attached to the cover plate by a spring-hinged flap. The weatherproof integrity shall not be affected when heavy duty specification or hospital grade attachment plug caps are inserted. Cover plates on outlet boxes mounted flush in the wall shall be gasketed to the wall in a watertight manner.
- F. Surge Protective (TVSS) Receptacles shall have integral surge suppression in line to ground, line to neutral, and neutral to ground modes.
- 1. TVSS Components: Multiple metal-oxide varistors; with a nominal clamp-level rating of 400 Volts, and minimum single transient pulse energy dissipation of 210 Joules.
  - 2. Active TVSS Indication: LED, visible in face of device to indicate device is active or no longer in service.
- G. Cable Reel Receptacles:

1. Reel shall have a heavy-duty spring motor, with self-contained rewind power and non-sparking ratchet assembly, a 4-way roller and adjustable cable stop, and a safety chain. Reel shall lock when desired cable has been payed out, and unlock and retract when cable is pulled to release lock.
2. Reel shall be provided with minimum 40 foot [12m] cable rated for 20 amperes with required phase conductors, neutral, and equipment grounding conductor. Provide device with NEMA 5-20R GFCI receptacles.

## **2.2 TOGGLE SWITCHES**

- A. Toggle switches shall be totally enclosed tumbler type with nylon bodies. Handles shall be (see Standard) in color unless otherwise specified or shown on the drawings.
  1. Switches installed in hazardous areas shall be explosion-proof type in accordance with the NEC and as shown on the drawings.
  2. Shall be single unit toggle, butt contact, quiet AC type, heavy-duty general-purpose use with an integral self grounding mounting strap with break-off plaster ears and provisions for back wiring with separate metal wiring clamps and side wiring with captively held binding screws.
  3. Switches shall be rated 20 amperes at 120-277 Volts AC.

## **2.3 MANUAL DIMMING CONTROL -N/A**

## **2.4 WALL PLATES**

- A. Wall plates for switches and receptacles shall be type 302 stainless steel or smooth nylon (Verify location). Oversize plates are not acceptable.
- B. Color shall be ivory unless otherwise specified. See Standard
- C. For receptacles or switches mounted adjacent to each other, wall plates shall be common for each group of receptacles or switches.
- D. In areas requiring tamperproof wiring devices, wall plates shall be type 302 stainless steel, and shall have tamperproof screws and beveled edges.
- E. Duplex Receptacles on Emergency Circuit: Wall plates shall be red nylon with the word "EMERGENCY" engraved in 6 mm (1/4 inch) white letters. Wall plates shall be type 302 stainless steel, with the word "EMERGENCY" engraved in 6 mm (1/4 inch) red letters.

## **2.5 SURFACE MULTIPLE-OUTLET ASSEMBLIES**

- A. Shall have the following features:
  1. Enclosures:
    - a. Thickness of steel shall be not less than 1 mm (0.040 inch) for base and cover. Nominal dimensions shall be 40 mm x 70 mm (1-1/2 inches by 2-3/4 inches) with inside cross sectional area not less than 2250 square mm (3-1/2 square inches). The enclosures shall be thoroughly cleaned, phosphatized, and painted at the factory with primer and the manufacturer's standard baked enamel finish.
  2. Receptacles shall be duplex, hospital grade. See paragraph 'RECEPTACLES' in this Section. Device cover plates shall be the

- manufacturer's standard corrosion resistant finish and shall not exceed the dimensions of the enclosure.
3. Unless otherwise shown on drawings, receptacle spacing shall be 600 mm (24 inches) on centers.
  4. Conductors shall be as specified in Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLE.
  5. Installation fittings shall be the manufacturer's standard bends, offsets, device brackets, inside couplings, wire clips, elbows, and other components as required for a complete system.
  6. Bond the assemblies to the branch circuit conduit system.

### **PART 3 - EXECUTION**

#### **3.1 INSTALLATION**

- A. Installation shall be in accordance with the NEC and as shown as on the drawings.
- B. Install wiring devices after wall construction and painting is complete.
- C. The ground terminal of each wiring device shall be bonded to the outlet box with an approved green bonding jumper, and also connected to the branch circuit equipment grounding conductor.
- D. Outlet boxes for toggle switches and manual dimming controls shall be mounted on the strike side of doors.
- E. Provide barriers in multi-gang outlet boxes to comply with the NEC.
- F. Coordinate the electrical work with the work of other trades to ensure that wiring device flush outlets are positioned with box openings aligned with the face of the surrounding finish material. Pay special attention to installations in cabinet work, and in connection with laboratory equipment.
- G. Exact field locations of floors, walls, partitions, doors, windows, and equipment may vary from locations shown on the drawings. Prior to locating sleeves, boxes and chases for roughing-in of conduit and equipment, the Contractor shall coordinate exact field location of the above items with other trades.
- H. Install wall switches 1.2 M (48 inches) above floor, with the toggle OFF position down.
- I. Install wall dimmers 1.2 M (48 inches) above floor.
- J. Install receptacles 450 mm (18 inches) above floor, and 152 mm (6 inches) above counter backsplash or workbenches. Install specific-use receptacles at heights shown on the drawings.
- K. Install horizontally mounted receptacles with the ground pin to the right.
- L. When required or recommended by the manufacturer, use a torque screwdriver. Tighten unused terminal screws.
- M. Label device plates with a permanent adhesive label listing panel and circuit feeding the wiring device.

### 3.2 ACCEPTANCE CHECKS AND TESTS

- A. Perform manufacturer's required field checks in accordance with the manufacturer's recommendations, and the latest NFPA 99. In addition, include the following:
1. Visual Inspection and Tests:
    - a. Inspect physical and electrical conditions.
    - b. Vacuum-clean surface metal raceway interior. Clean metal raceway exterior.
    - c. Test wiring devices for damaged conductors, high circuit resistance, poor connections, inadequate fault current path, defective devices, or similar problems using a portable receptacle tester. Correct circuit conditions, remove malfunctioning units and replace with new, and retest as specified above.
    - d. Test GFCI receptacles.
  2. Receptacle testing in the Patient Care Spaces, such as retention force of the grounding blade of each receptacle, shall comply with the latest NFPA 99.

- - - E N D - - -

**SECTION 26 29 21****ENCLOSED SWITCHES AND CIRCUIT BREAKERS****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. This section specifies the furnishing, installation, and connection of fused and unfused disconnect switches (indicated as switches in this section), and separately-enclosed circuit breakers for use in electrical systems rated 600 V and below.

**1.2 RELATED WORK**

- A. Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS: Requirements that apply to all sections of Division 26.
- B. Section 26 05 19, LOW-VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES: Low-voltage conductors.
- C. Section 26 05 26, GROUNDING AND BONDING FOR ELECTRICAL SYSTEMS: Requirements for personnel safety and to provide a low impedance path for possible ground faults.
- D. Section 26 05 33, RACEWAY AND BOXES FOR ELECTRICAL SYSTEMS: Conduits.

**1.3 QUALITY ASSURANCE**

- A. Quality Assurance shall be in accordance with Paragraph, QUALIFICATIONS (PRODUCTS AND SERVICES) in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS.

**1.4 SUBMITTALS**

- A. Submit in accordance with Paragraph, SUBMITTALS in Section 26 05 11, REQUIREMENTS FOR ELECTRICAL INSTALLATIONS, and the following requirements:
  - 1. Shop Drawings:
    - a. Submit sufficient information to demonstrate compliance with drawings and specifications.
    - b. Submit the following data for approval:
      - 1) Electrical ratings, dimensions, mounting details, materials, required clearances, terminations, weight, fuses, circuit breakers, wiring and connection diagrams, accessories, and device nameplate data.
    - c. Certification from the manufacturer that representative enclosed switches and circuit breakers have been seismically tested to International Building Code requirements. Certification shall be based upon simulated seismic forces on a shake table or by analytical methods, but not by experience data or other methods.
  - 2. Manuals:
    - a. Submit complete maintenance and operating manuals including technical data sheets, wiring diagrams, and information for ordering fuses, circuit breakers, and replacement parts.
      - 1) Include schematic diagrams, with all terminals identified, matching terminal identification in the enclosed switches and circuit breakers.



- 2) Include information for testing, repair, troubleshooting, assembly, and disassembly.
- b. If changes have been made to the maintenance and operating manuals originally submitted, submit updated maintenance and operating manuals two weeks prior to the final inspection.
- 3. Certifications: Two weeks prior to final inspection, submit the following.
  - a. Certification by the manufacturer that the enclosed switches and circuit breakers conform to the requirements of the drawings and specifications.
  - b. Certification by the Contractor that the enclosed switches and circuit breakers have been properly installed, adjusted, and tested.

### **1.5 APPLICABLE PUBLICATIONS**

- A. Publications listed below (including amendments, addenda, revisions, supplements, and errata) form a part of this specification to the extent referenced. Publications are referenced in the text by designation only.
- B. International Code Council (ICC):
  - IBC-15.....International Building Code
- C. National Electrical Manufacturers Association (NEMA):
  - FU 1-12.....Low Voltage Cartridge Fuses
  - KS 1-13.....Heavy Duty Enclosed and Dead-Front Switches  
(600 Volts Maximum)
- D. National Fire Protection Association (NFPA):
  - 70-17.....National Electrical Code (NEC)
- E. Underwriters Laboratories, Inc. (UL):
  - 98-16.....Enclosed and Dead-Front Switches
  - 248 1-11.....Low Voltage Fuses
  - 489-13.....Molded Case Circuit Breakers and Circuit  
Breaker Enclosures

## **PART 2 - PRODUCTS**

### **2.1 FUSED SWITCHES RATED 600 AMPERES AND LESS**

- A. Switches shall be in accordance with NEMA, NEC, UL, as specified, and as shown on the drawings.
- B. Shall be NEMA classified General Duty (GD) for 240 V switches, and NEMA classified Heavy Duty (HD) for 480 V switches.
- C. Shall be horsepower (HP) rated.
- D. Shall have the following features:
  - 1. Switch mechanism shall be the quick-make, quick-break type.
  - 2. Copper blades, visible in the open position.
  - 3. An arc chute for each pole.

4. External operating handle shall indicate open and closed positions, and have lock-open padlocking provisions.
5. Mechanical interlock shall permit opening of the door only when the switch is in the open position, defeatable to permit inspection.
6. Fuse holders for the sizes and types of fuses specified.
7. Solid neutral for each switch being installed in a circuit which includes a neutral conductor.
8. Ground lugs for each ground conductor.
9. Enclosures:
  - a. Shall be the NEMA types shown on the drawings.
  - b. Where the types of switch enclosures are not shown, they shall be the NEMA types most suitable for the ambient environmental conditions.
  - c. Shall be finished with manufacturer's standard gray baked enamel paint over pretreated steel.

## **2.2 UNFUSED SWITCHES RATED 600 AMPERES AND LESS**

- A. Shall be the same as fused switches, but without provisions for fuses.

## **2.3 FUSED SWITCHES RATED OVER 600 AMPERES TO 1200 AMPERES**

- A. Shall be the same as fused switches, and shall be NEMA classified Heavy Duty (HD).

## **2.4 MOTOR RATED TOGGLE SWITCHES**

- A. Type 1, general purpose for single-phase motors rated up to 1 horsepower.
- B. Quick-make, quick-break toggle switch with external reset button and thermal overload protection matched to nameplate full-load current of actual protected motor.

## **2.5 CARTRIDGE FUSES - N/A**

## **2.6 SEPARATELY-ENCLOSED CIRCUIT BREAKERS**

- A. Provide circuit breakers that is compatible with that existing PANELBOARDS.
- B. Match AIC Rating, and manufacture type to match existing.

# **PART 3 - EXECUTION**

## **3.1 INSTALLATION**

- A. Installation shall be in accordance with the NEC, and manufacturer's instructions.
- B. In seismic areas, enclosed switches and circuit breakers shall be adequately anchored and braced per details on structural contract drawings to withstand the seismic forces at the location where installed.
- C. Fused switches shall be furnished complete with fuses. Arrange fuses such that rating information is readable without removing the fuses.

### 3.2 ACCEPTANCE CHECKS AND TESTS

A. Perform in accordance with the manufacturer's recommendations. In addition, include the following:

1. Visual Inspection and Tests:

- a. Compare equipment nameplate data with specifications and approved shop drawings.
- b. Inspect physical, electrical, and mechanical condition.
- c. Verify tightness of accessible bolted electrical connections by calibrated torque-wrench method.
- d. Vacuum-clean enclosure interior. Clean enclosure exterior.

### 3.3 SPARE PARTS

A. Two weeks prior to the final inspection, furnish one complete set of spare fuses for each fused disconnect switch installed on the project. Deliver the spare fuses to the COR.

- - - END - - -

**SECTION 27 10 00****CONTROL, COMMUNICATION AND SIGNAL WIRING****PART 1 - GENERAL****1.1 DESCRIPTION**

- A. This section includes control, communication and signal wiring requirements.
- B. This section applies to all sections of Divisions 27.

**1.2 SUBMITTALS**

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Submit written certification from OEM:
  - 1. Indicate wiring and connection diagrams meet National and Government Life Safety Guidelines, NFPA, NEC, NRTL, Joint Commission, OEM, and this section.
  - 2. Include instructions, requirements, recommendations, and guidance for proper performance of system as described herein.
  - 3. Government will not approve any submittal without this certification.
- C. Identify environmental specifications on technical submittals; identify requirements for installation.
  - 1. Minimum floor space and ceiling heights.
  - 2. Minimum size of doors for cable reel passage.
- D. Power: Provide specific voltage, amperage, phases, and quantities of circuits.
- E. Provide conduit size requirements.
- F. Closeout Submittals:
  - 1. Provide contact information for maintenance personnel to contact contractor for emergency maintenance and logistic assistance, and assistance in resolving technical problems at any time during warranty period.
  - 2. Provide certified OEM sweep test tags from each cable reel to COR.
  - 3. Furnish spare or unused wire and cable with appropriate connectors (female types) for installation in appropriate punch blocks, barrier strips, patch, or bulkhead connector panels.
  - 4. Turn over unused and opened installation kit boxes, coaxial, fiber optic, and twisted pair cable reels, conduit, cable tray, cable duct bundles, wire rolls, physical installation hardware to COR.
  - 5. Documentation: Include any item or quantity of items, as installed drawings, equipment, maintenance, and operation manuals, and OEM materials needed to completely and correctly provide system documentation required herein.

**PART 2 - PRODUCTS**

## 2.1 CONTROL WIRING

- A. Provide control wiring large enough so voltage drop under in-rush conditions does not adversely affect operation of controls.
- B. Provide cable meeting specifications for type of cable.
- C. Outside Location (i.e. above ground, underground in conduit, ducts, pathways, etc.): Provide cables filled with a waterproofing compound between outside jacket (not touching any provided armor) and inter conductors to seal punctures in jacket and protect conductors from moisture.
- D. Remote Control Cable:
  - 1. Multi-conductor with stranded conductors able to handle power and voltage required to control specified system equipment, from a remote location.
  - 2. NRTL listed and pass VW-1 vertical wire flame test (UL 83) (formerly FR-1).
  - 3. Color-coded Conductors: Combined multi-conductor and coaxial cables are acceptable for this installation, on condition system performance standards are met.
  - 4. Technical Characteristics:
    - a. Length: As required, in 1K (3,000 ft.) reels minimum.
    - b. Connectors: As required by system design.
    - c. Size:
      - 1) 18 AWG, minimum, Outside.
      - 2) 20 AWG, minimum, Inside.
    - d. Color Coding: Required, EIA industry standard.
    - e. Bend Radius: 10 times cable outside diameter.
    - f. Impedance: As required.
    - g. Shield Coverage: As required by OEM specification.
    - h. Attenuation:

Frequency in MHz	dB per 305 Meter (1,000 feet), maximum
0.7	5.2
1.0	6.5
4.0	14.0
8.0	19.0
16.0	26.0
20.0	29.0
25.0	33.0

31.0	36.0
50.0	52.0

E. Distribution System Signal Wires and Cables:

1. Provide in same manner, and use construction practices, as Fire Protective and other Emergency Systems identified and defined in NFPA 101, Life Safety Code, Chapters 7, 12, and 13, NFPA 70, National Electrical Code, Chapter 7, Special Conditions.
2. Provide system able to withstand adverse environmental conditions without deterioration, in their respective location.
3. Provide entering of each equipment enclosure, console, cabinet or rack in such a manner that all doors or access panels can be opened and closed without removal or disruption of cables.
4. Terminate on an item of equipment by direct connection.

## 2.2 COMMUNICATION AND SIGNAL WIRING

- A. Provide communications and signal wiring conforming to recommendations of manufacturers of systems; provide not less than TIA Performance Category 6.
- B. Wiring shown is for typical systems; provide wiring as required for systems being provided.
- C. Provide color-coded conductor insulation for multi-conductor cables.
- D. Connectors:
  1. Provide connectors for transmission lines, and signal extensions to maintain uninterrupted continuity, ensure effective connection, and preserve uniform polarity between all points in system.
    - a. Provide AC barrier strips with a protective cover to prevent accidental contact with wires carrying live AC current.
    - b. Provide punch blocks for signal connection, not AC power. AC power twist-on wire connectors are not permitted for signal wire terminations.
  2. Cables: Provide connectors designed for specific size cable and conductors being installed with OEM's approved installation tool. Typical system cable connectors include:
    - a. Audio spade lug.
    - b. Punch block.
    - c. Wirewrap.

## 2.3 INSTALLATION KIT

- A. Include connectors and terminals, labeling systems, audio spade lugs, barrier strips, punch blocks or wire wrap terminals, heat shrink tubing, cable ties, solder, hangers, clamps, bolts, conduit, cable duct, cable tray, etc., required to accomplish a neat and secure installation.
- B. Terminate conductors in a spade lug and barrier strip, wire wrap terminal or punch block, so there are no unfinished or unlabeled wire connections.

C. Minimum required installation sub-kits:

1. System Grounding:

a. Provide required cable and installation hardware for effective ground path, including the following:

- 1) Control Cable Shields.
- 2) Data Cable Shields.
- 3) Equipment Racks.
- 4) Equipment Cabinets.
- 5) Conduits.
- 6) Ducts.
- 7) Cable Trays.
- 8) Power Panels.
- 9) Connector Panels.
- 10) Grounding Blocks.

b. Bond radio equipment to earth ground via internal building wiring, according to NEC.

2. Wire and Cable: Provide connectors and terminals, punch blocks, tie wraps, hangers, clamps, labels, etc. required to accomplish termination in an orderly installation.

3. Conduit, Cable Duct, and Cable Tray: Provide conduit, duct, trays, junction boxes, back boxes, cover plates, feed through nipples, hangers, clamps, other hardware required to accomplish a neat and secure conduit, cable duct, cable tray installation in accordance with NEC and documents.

4. Equipment Interface: Provide any items or quantity of equipment, cable, mounting hardware and materials to interface systems with identified sub-systems, according to OEM requirements and construction documents.

5. Labels: Provide any item or quantity of labels, tools, stencils, and materials to label each subsystem according to OEM requirements, as-installed drawings, and construction documents.

D. Cross-Connection System (CCS) Equipment Breakout, Termination Connector (or Bulkhead), and Patch Panels:

1. Connector Panels: Flat smooth 3.175 mm (1/8 inch) thick solid aluminum, custom designed, fitted and installed in cabinet. Install bulkhead equipment connectors on panel to enable cabinet equipment's signal, control, and coaxial cables to be connected through panel. Match panel color to cabinet installed.

a. Digital or High Speed Data:

- 1) Provide 480 mm (19 inches) horizontal EIA/ECA 310 rack mountable patch panel with EIA/ECA 310 standard spaced vertical mounting holes for digital or high-speed data service CSS, with modular female Category 6 RJ45 jacks designed for size and type of UTP or F/UTP cable installed in rows.

2) Technical Characteristics:

- a) Number of Horizontal Rows: Minimum 2.
- b) Number of Jacks Per Row: Minimum 24.
- c) Type of Jacks: RJ45.
- d) Terminal Protector: Required for each used or unused jack.
- e) Insulation: Required between each row of jacks.

## **2.4 EXISTING WIRING**

- A. Reuse existing wiring only where accepted by COR.
- B. Only existing wiring that conforms to specifications and applicable codes can be reused; existing wiring that does not meet these requirements cannot be reused and must be removed by contractor.

## **PART 3 - EXECUTION**

### **3.1 INSTALLATION**

- A. General:
  - 1. Install wiring in cable tray or raceway.
  - 2. Seal cable entering a building from underground, between wire and conduit where cable exits conduit, with non-hardening approved compound.
  - 3. Wire Pulling:
    - a. Provide installation equipment that prevents cutting or abrasion of insulation during pulling of cables.
    - b. Use ropes made of nonmetallic material for pulling feeders.
    - c. Attach pulling lines for feeders by means of either woven basket grips or pulling eyes attached to conductors, as accepted by COR.
    - d. Pull multiple cables into a single conduit together.
- B. Control, Communication and Signal Wiring Installation:
  - 1. Unless otherwise specified in other sections, provide wiring and connect to equipment/devices to perform required functions as indicated.
  - 2. Install separate cables for each system so that malfunctions in any system does not affect other systems, except where otherwise required.
  - 3. Group wires and cables according to service (i.e. AC, grounds, signal, DC, control, etc.); DC, control and signal cables can be included with any group.
  - 4. Form wires and cables to not change position in group throughout the conduit run. Bundle wires and cables in accepted signal duct, conduit, cable ducts, or cable trays neatly formed, tied off in 600 mm to 900 mm (24 inch to 36 inch) lengths to not change position in group throughout run.
  - 5. Concealed splices are not allowed.



6. Separate, organize, bundle, and route wires or cables to restrict EMI, channel crosstalk, or feedback oscillation inside any enclosure.
  7. Looking at any enclosure from the rear (wall mounted enclosures, junction, pull or interface boxes from the front), locate AC power, DC and speaker wires or cables on the left; coaxial, control, microphone and line level audio and data wires or cables, on the right.
  8. Provide ties and fasteners that do not damage or distort wires or cables. Limit spacing between tied points to maximum 150 mm (6 inches).
  9. Install wires or cables outside of buildings in conduit, secured to solid building structures.
  10. Wires or cables must be specifically accepted, on a case by case basis, to be installed outside of conduit. Bundled wires or cables must be tied at minimum 460 mm (18 inches) intervals to a solid building structure; bundled wires or cables must have ultra violet protection and be waterproof (including all connections).
  11. Laying wires or cables directly on roof tops, ladders, drooping down walls, walkways, floors, etc. is not permitted.
  12. Wires or cables installed outside of conduit, cable trays, wireways, cable duct, etc.:
    - a. Only when authorized, can wires or cables be identified and approved to be installed outside of conduit.
    - b. Provide wire or cable rated plenum and OEM certified for use in air plenums.
    - c. Provide wires and cables hidden, protected, fastened and tied at maximum 600 mm (24 inches) intervals, to building structure.
    - d. Provide closer wire or cable fastening intervals to prevent sagging, maintain clearance above suspended ceilings.
    - e. Remove unsightly wiring and cabling from view, and discourage tampering and vandalism.
    - f. Sleeve and seal wire or cable runs, not installed in conduit, that penetrate outside building walls, supporting walls, and two hour fire barriers, with an approved fire retardant sealant.
- C. AC Power:
1. Bond to ground contractor-installed equipment and identified Government-furnished equipment, to eliminate shock hazards and to minimize ground loops, common mode returns, noise pickup, crosstalk, etc. for total ground resistance of 0.1 Ohm or less.
  2. Use of conduit, signal duct or cable trays as system or electrical ground is not permitted; use these items only for dissipation of internally generated static charges (not to be confused with externally generated lightning) that can be applied or generated outside mechanical and physical confines of system to earth ground. Discovery of improper system grounding is grounds to declare system unacceptable and termination of all system acceptance testing.

3. Cabinet Bus: Extend a common ground bus of at least #10 AWG solid copper wire throughout each equipment cabinet and bond to system ground. Provide a separate isolated ground connection from each equipment cabinet ground bus to system ground. Do not tie equipment ground busses together.
4. Equipment: Bond equipment to cabinet bus with copper braid equivalent to at least #12 AWG. Self-grounding equipment enclosures, racks or cabinets, that provide OEM certified functional ground connections through physical contact with installed equipment, are acceptable alternatives.

### **3.2 EQUIPMENT IDENTIFICATION**

#### **A. Control, Communication and Signal System Identification:**

1. Install a permanent wire marker on each wire at each termination.
2. Identify cables with numbers and letters on the labels corresponding to those on wiring diagrams used for installing systems.
3. Install labels retaining their markings after cleaning.

#### **B. Labeling:**

1. Industry Standard: ANSI/TIA-606-B.
2. Print lettering for voice and data circuits using laser printers or thermal ink transfer process; handwritten labels are not acceptable.
3. Cable and Wires (hereinafter referred to as "cable"): Label cables at both ends in accordance with industry standard. Provide permanent labels in contrasting colors. Identify cables matching system Record Wiring Diagrams.
4. Equipment: Permanently labeled system equipment with contrasting plastic laminate or bakelite material. Label system equipment on face of unit corresponding to its source.
5. Conduit, Cable Duct, and Cable Tray: Label conduit, duct and tray, including utilized GFE, with permanent marking devices or spray painted stenciling a minimum of 3 meters (10 ft.) identifying system. Label each enclosure according to this standard.
6. Termination Hardware: Label workstation outlets and patch panel connections using color coded labels with identifiers in accordance with industry standard and Record Wiring Diagrams.

### **3.3 TESTING**

- A. Minimum test requirements are for impedance compliance, inductance, capacitance, signal level compliance, opens, shorts, cross talk, noise, and distortion, and split pairs on cables in frequency ranges specified.
- B. Tests required for data cable must be made to confirm operation of this cable at minimum 10 Mega (M) Hertz (Hz) full bandwidth, fully channel loaded and a Bit Error Rate of a minimum of 10<sup>-6</sup> at maximum rate of speed.
- C. Provide cable installation and test records at acceptance testing to COR and thereafter maintain in facility's switch room.
- D. Record changes (used pair, failed pair, etc.) in these records as change occurs.

E. Test cables after installation and replace any defective cables.

- - - E N D - - -