


# VA MEDICAL CENTER HUNTINGTON, WEST VIRGINIA


PROJECT NO: 581-12-110  
REPLACE LIGHTS & PAINT BOILER PLANT  
BUILDING 3

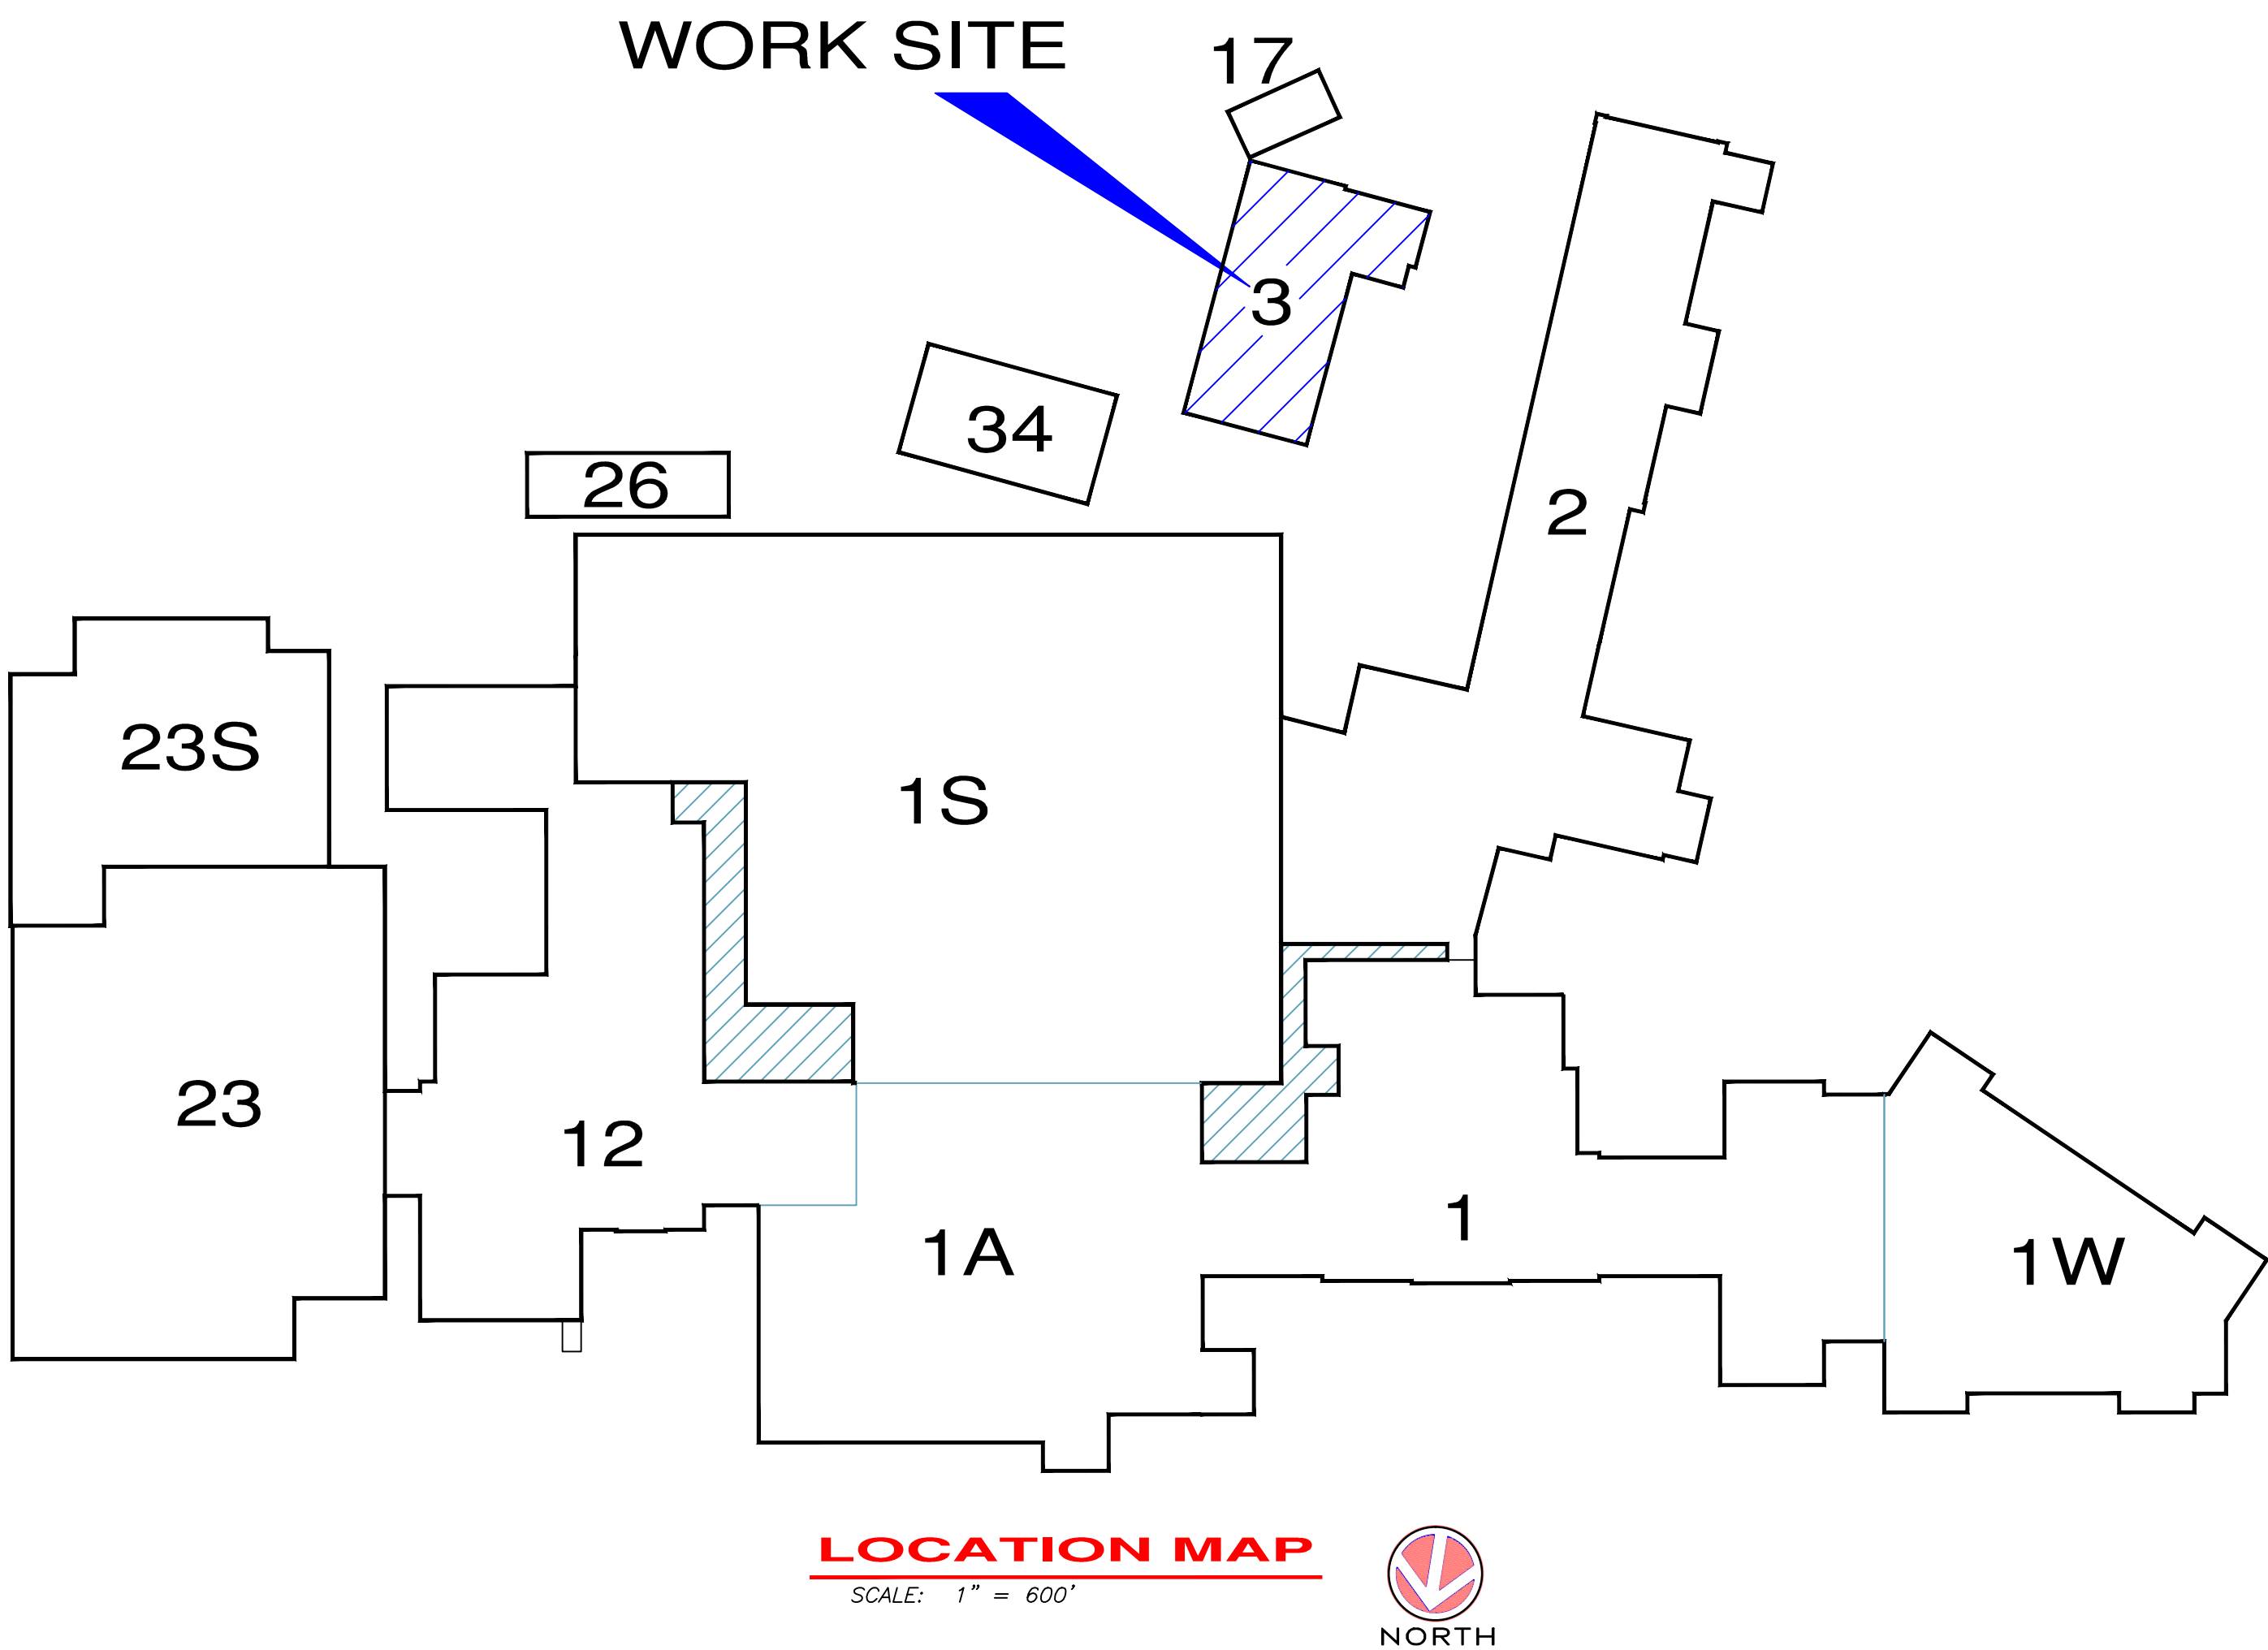

## GENERAL NOTES APPLICABLE TO THIS PROJECT

- A. CONTRACTOR SHALL VERIFY WORK AREA CONDITIONS AND REQUIREMENTS. PROVIDE SUBMITTALS OF ALL PRODUCTS UNLESS BRAND SPECIFIED HERE-IN.
- B. ALL TOOLS USED IN THIS PROJECT SHALL BE PROPERLY SECURED AT ALL TIMES BY THE CONTRACTOR TO PREVENT ANY OF THESE TOOLS BEING A HAZARD TO PATIENTS.
- C. THE CONTRACTOR AT HIS EXPENSE WILL BE RESPONSIBLE FOR ACQUIRING VA PICTURE I.D. BADGES FOR EACH MEMBER OF HIS WORK FORCE BEFORE ANY MEMBER WILL BE ALLOWED TO PERFORM WORK IN VA PREMISES. PROCESS I.D. APPLICATIONS THROUGH COR.
- D. LABOR RATE TO BE POSTED IN WORK AREA.
- E. ABSOLUTELY NO VA TOOLS, MATERIALS WILL BE LOANED OR GIVEN BY THE VA TO ANY MEMBER OF THE CONTRACTOR'S WORK FORCE AT ANY TIME.
- G. CONTRACTOR SHALL COORDINATE ONLY WITH THE COR.
- H. EACH WORKER WILL BE REQUIRED TO WEAR APPROPRIATE SAFETY EQUIPMENT AT ALL TIMES (I.E. SAFETY SHOES, EAR PLUGS, SAFETY GLASSES, SAFETY HELMET ETC.) AND IS RESPONSIBLE TO ENSURE THAT NON-WORKERS ARE PREVENTED FROM INJURING THEMSELVES IN ANY WORK AREA.
- I. DO NOT ALLOW DEMOLITION DEBRIS TO ACCUMULATE ON JOB SITE. DO NOT LEAVE TOOLS UNATTENDED. DEBRIS SHALL BE DAMPENED AND COVERED. DAMP MOP OCCUPIED FLOOR AREAS AS REQUIRED. PROVIDE WALK OFF MATS AS REQUIRED. LEAD BASE PAINT CONTAMINATION POTENTIAL. PROVIDE NEGATIVE AIR VENTILATION TO THE EXTERIOR OF THE WORK AREA AS DIRECTED BY COR. INSTALL DUST PROTECTION WALLS BETWEEN AREAS IN USE BY VA.
- J. WORK INSIDE CONTROL ROOM TO BE COORDINATED WITH COR/BOILER SUPERVISOR. WORK SHALL BE ARRANGED TO ALLOW AS LITTLE INTERRUPTION AND INCONVENIENCE TO 24 HOUR PLANT OPERATION. THE BOILER CONTROL CENTER WILL REMAIN IN OPERATION AT ALL TIMES. CONTRACTOR SHALL STOP ANY WORK AND VACATE CONTROL ROOM IF SITUATIONS OCCUR REQUIRING SUCH INSTRUCTION BY BOILER PLANT SUPERVISOR.
- K. EXISTING PAINT AT BOILER PLANT IS LEAD-BASED PAINT. CONTRACTORS SHALL FOLLOW VA SPECIFICATIONS TO REMOVE ALL LEAD-BASE PAINT.
- L. ALL POSTED SIGNAGE ON WALLS, DOORS, ETC. SHALL BE REMOVED BY THE CONTRACTOR AND REINSTALLED BY CONTRACTOR AFTER COMPLETING FINISHES.

INDEX TO DRAWINGS	
SHT.NO.	DESCRIPTION
T1	TITLE SHEET & GENERAL NOTES
A1	BASEMENT FLOOR PLAN
A2	GROUND FLOOR PLAN
A3	ROOF PLAN ELEVATIONS & SCHEDULES



UNITED STATES DEPARTMENT OF VETERANS AFFAIRS  
VA MEDICAL CENTER - 1540 SPRING VALLEY DRIVE - HUNTINGTON WV 25704

DRAWING TITLE: <b>TITLE SHEET, INDEX &amp; GENERAL NOTES</b>		PROJECT TITLE: <b>REPLACE LIGHTS &amp; PAINT BOILER PLANT</b>	
APPROVED: CHRIS ECKLES ASS'T CHIEF, ENGINEERING	BUILDING: <b>3</b>	PROJECT NUMBER: <b>12-110</b>	DRAWING NUMBER: <b>T1</b>
APPROVED: JOHN KLIM CHIEF, ENGINEERING	DRAWN: STEVE ELROD	DATE: <b>OCT '12</b>	DWG.